



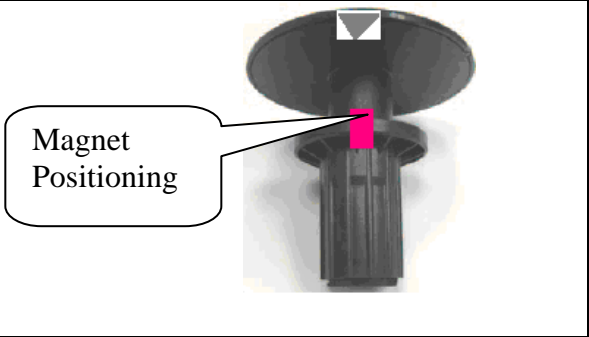
101 REGENCY PARKWAY
MANSFIELD, TX 76063
817-842-8000
FAX 817-842-8100

Dialog - Booster Installation Instructions

FCC ID: NTAWB2



101 REGENCY PARKWAY
 MANSFIELD, TX 76063
 817-842-8000
 FAX 817-842-8100

Field Operations		Factory Default Parameters	
Magnet initialization	Position the magnet on the Booster cone for 5 seconds	Booster Status	FH Tx On
		Buzzer	Off
		Magnet Activation	On
Learning the Pit 3G Meters	Install the Booster into the pit within 30 seconds		
Booster is Ready to Transmit	This process is done automatically. After 6-10 minutes the Booster is ready to transmit		

FCC ID	NTAWB2
--------	--------



101 REGENCY PARKWAY
MANSFIELD, TX 76063
817-842-8000
FAX 817-842-8100

CAUTION



The User and the Installer should be aware that changes and modifications to the equipment not expressly approved by Master Meter could void warranty and the user's authority to operate the equipment.

Professionally trained personnel should install the equipment.

The antenna used for this transmitter must be installed to normally provide minimum separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter

ATTENTION



The digital portion of the transceiver has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1.) Reorient or relocate the receiving antenna.
- 2.) Increase the separation between the equipment and receiver.
- 3.) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4.) Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: Dialog Booster is designed only for Master Meter meters with Dialog registers.

Installation

1. Remove the Pit-Set Lid



2. Insert and Install the Booster into the Pit-Set Lid





101 REGENCY PARKWAY
MANSFIELD, TX 76063
817-842-8000
FAX 817-842-8100

3. Locate the Booster Unit near the Pit-Set.
Face the Magnet on the Booster Cone
Wait for 5 seconds until its Beep



4. Position the assembled Pit-Set Lid with the Booster unit back on the Pit (after the Beep)

