

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: STI, Inc.
Model: 34601
Standards: FCC 15.231/IC RSS-210
ID's: TXL34601/6335A-34601
Report #: 2012025

Appendix J: Manual

Please see the following pages.

Installation and Operation Manual

STI Wireless Doorbell Button

Model: STI-34601

For use with STI
Wireless Alert Series Receivers



FEATURES AND SPECIFICATIONS:

- 500' range
- Commercial and residential applications
- Streamlined design
- ABS UV-stabilized material
- Low battery indicator on STI Alert Receiver
- Coin Cell Battery CR2032



**Safety Technology
International, Inc.**

"We Protect the Things that Protect You."

Thank you for purchasing the STI Wireless Doorbell Button. Your satisfaction is very important to us. Please read this manual carefully to get the most from your new product.

INSTALLATION INSTRUCTIONS:

1. To remove cover, insert screwdriver, or other small device, at bottom of cover and depress gently. Rotate until tab disengages (Fig. 1).
2. Insert the battery by placing it **under** the top claws and then pushing battery into the bottom cradle (Fig. 2 and 3).
3. Attach backplate onto mounting surface with two included #6 – 32" screws (Fig. 4).
4. Snap cover back together (Fig. 4).
5. The Wireless Doorbell Button can now be enrolled into your 433 MHz Wireless Receiver. (Refer to receiver instructions for enrollment and programming.)




Fig. 1




Fig. 2




Fig. 3

WHEN USING ANCHORS, DRILL 3/16 in. DIA HOLES
WHEN USING SCREWS ONLY, DRILL 3/32 in. DIA HOLES


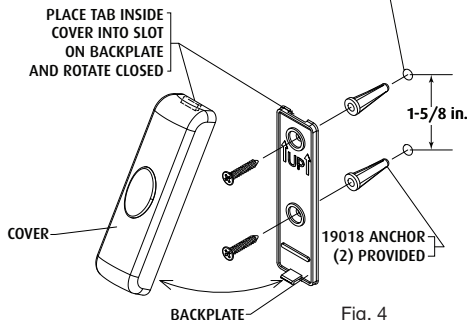


Fig. 4



IMPORTANT NOTICE:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Safety Technology International, Inc. could void the user's authority to operate the equipment.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'Appareil ne doit pas produire de brouillage, et
2. L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Model: 34601

FCC ID: TXL34601

IC: 6335A-34601

WARRANTY INFORMATION:

Safety Technology International, Inc. warrants to the original consumer/purchaser that this product shall be free of defects in material and workmanship under normal use and circumstances for a period of one (1) year from the original date of purchase.

TECHNICAL SUPPORT:

Contact STI at 800-888-4784



**Safety Technology
International, Inc.**



2306 Airport Road • Waterford • Michigan • 48327-1209
Phone: 248-673-9898 • Toll Free: 800-888-4784 • Fax: 248-673-1246
Email: info@sti-usa.com • Web: www.sti-usa.com

Safety Technology International (Europe) Ltd.

Unit 49G Pipers Road • Park Farm Industrial Estate • Redditch
Worcestershire • B98 0HU • England • Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999 • Freephone: 0800 085 1678 (UK only)
E-mail: info@sti-europe.com • Web: www.sti-europe.com