

CY-WDCB7UR installation manual

Proprietary Information

All information contained in this document is confidential and proprietary to Hanshin IT. No license, expressed or implied, under any patent, copyright or trade secret right is granted or implied by the conveyance of this document. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise without the prior written permission of Hanshin IT.

Copyright © 2012 Hanshin IT. All rights reserved.

Document Title	CY-WDCB7UR Installation manual
Samsung P/N	BN59-01157A
Hanshin IT P/N	HS6621 Rev 2.6
Latest Revision Number	V0.9
Latest Revised Date	04/23/2012

Confidential

Revision No.:	V0.9
Authors:	DC Kim
Project Leader:	DC Kim
Project Code:	SS-UWB-201101
Release Date:	04/23/2012

CONTENT

1. SCOPE	8
1.1 DOCUMENT	8
2. How to install the CY-WDCB7UR?	8
2.1 UWB RF module applications	8
2.2 Interface signals	8
2.3 Installation	8
3. HARDWARE SPECIFICATIONS	10
3.1 GENERAL	10
3.2 PRODUCT CHARACTERISTICS	10
3.3 ENVIRONMENT	11
3.3.1 Temperature	11
3.3.2 Humidity	11
3.4 PRODUCT PHOTOGRAPH	12
4. HARDWARE REQUIREMENTS	13
4.1 FUNCTIONAL BLOCK DIAGRAM	13
4.2 AL6301/AL5100 CHIPSET ARCHITECTURE	14
4.3 IO CONNECTOR PIN DEFINITION	15
4.4 Manufacturing Test Block Diagram	16
4.4.1 PT Block Diagram	16
4.4.2 FT Block Diagram	16

4.5	PRODUCT TEST ITEMS & SPEC	17
4.5.1	Transmission Section	17
4.5.2	Receiver Section.....	17
4.6	PERFORMANCE TEST RESULTS	18
4.6.1	Current Consumption.....	18
4.6.2	Indoor Range Throughput	18
5.	DIMENSION INFORMATION.....	19
5.1	PCB DIMENSION	19
5.2	SHIELD CASE DIMENSION	20
5.3	ASSEMBLY DIMENSION	22
6.	PACKAGE DIMENSION	23
6.1	LABEL DIMENSION	23
6.2	LABEL STICK	23
7.	ANTENNA SPECIFICATIONS.....	24
7.1	Summaries.....	24
7.1.1	Function and Features	24
7.2	Specification	24
7.2.1	Applicable Boundary.....	24
7.2.2	Electrical Specification.....	24
7.3	Results of Antenna Measurement.....	26
7.3.1	Antenna Return Loss	26

7.3.2	Antenna VSWR	27
7.3.3	Antenna Radiation Pattern.....	27
7.3.4	Antenna Peak Gain	28
7.4	Drawing	30
7.4.1	Antenna Drawing.....	30
8.	PACKAGE DIMENSION	32
8.1	ANTI SHIELDING BAG	32
8.2	CARTON	32
8.3	PAD	33
8.4	TRAY	33
8.5	CARTON ASSY DRAWING (TRAY STACK DRAWING)	34
9.	HANSHIN IT CONTACT INFORMATION	35
10.	IC Statement.....	35

Revision History

Revision	Originator	Description	Date
0.9	DC Kim	Initial Released.	04/23/12

IMPORTANT SAFETY INSTRUCTIONS

Please read and observe all warnings and instructions given in this manual and those marked on the unit before use of the unit.

⚠ DANGER

- ★ Avoid direct contacts to water, moisture, any sorts of beverages, excessive heat and magnetic sources.
- ★ Do not handle the unit in with wet hands, especially when plugging or unplugging, to avoid electric shocks.

⚠ WARNING

- ★ Do not disassemble, modify, tamper or repair the unit yourself. Refer all servicing to qualified service personnel.
- ★ Do not drop or expose the unit to excessive shock.
- ★ Keep the device out of direct sun light, wind, high-humidity and dusts.
- ★ Plug in USB Transmitter properly. If reversely plugged, that may cause harmful damages.
- ★ Do not place the unit on hot area or block the ventilator of the unit to avoid overheat.

⚠ CAUTION

- ★ Do not relocate the unit while in use. That may cause malfunctioning of the unit.
- ★ Use the correct power source only.
- ★ Never place the unit or AC adapter on a heat sensitive surface
- ★ Never allow any liquids to spill into any part of your product, and never expose the product to rain, water, seawater or moisture
- ★ Never operate the unit during a thunderstorm.

FCC information

The following information must be included in the User Manual for the Final End Product (Host Product):

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device is authorized under Title 47 CFR 15.519 (the FCC Rules and Regulations).

The operation of this device is subject to the following restriction:

Changes or modifications made to this equipment not expressly approved by SAMSUNG or parties authorized by SAMSUNG could void the user's authority to operate the device under the FCC Equipment Authorization. This includes changes or substitutions of the antennas which are furnished with the device.

UWB devices may not be employed for the operation of toys. Operation onboard an aircraft, a ship or satellite is prohibited.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following

Contains FCC ID: A3LCYWDCB7UR

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

1. SCOPE

1.1 DOCUMENT

This documentation describes the hardware specifications of the **UWB Module** product for wireless PC monitor and how to install the module. This product adopts the Alereon **AL6301/AL5100** chipset solutions.
It is a confidential document of HANSHIN IT.

2. How to install the CY-WDCB7UR?

2.1 UWB RF module applications

This is the UWB module for OEM usage in the application of high speed data transmission. This module follows standard Half miniCard mechanical dimension which is used in the commercial area. It can be used in notebook PC or wireless monitor or A/V receiver box.

2.2 Interface signals

This module is based on USB 2.0 interface. Pins of connector have USB and GPIO signals and power.


GPIO signals can be programmed for I2C signal line for device control. Power 3.3V is supplied to the module. In the module, 1.2V, 2.4V DC are made for the circuit and 3.3V is used for I/O part. The power consumption is about 1W.

2.3 Installation

The mother board which is installed with the UWB module should have a miniCard connector and latch parts.

This module is half size minicard and the connector and latch on the mother board should be spaced with the distance for half size miniCard..

The installation procedure is as follows.

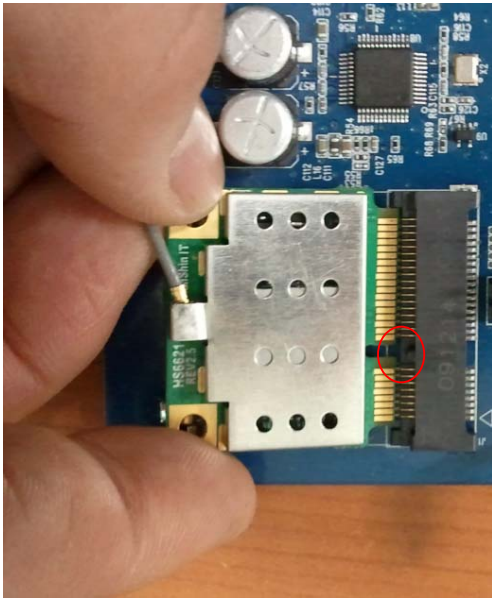

Prepare the module and align the module to the miniCard connector as the picture.



If the alignment is done, insert the module into the connector, press down the top center of module. Then you can hear the sound of locking by latch part.



This is the picture which is installed with the module. Check that the latch's clip is locked properly.

3. HARDWARE SPECIFICATIONS

3.1 GENERAL

Wireless circuit compatible with IEEE 802.15.3a standard and provide maximum speeds up to 480 Mbps.

3.2 PRODUCT CHARACTERISTICS

The CY-WDCB7UR is designed for PC monitor UWB module product. It provides the fast data transportation between user and PC monitor via wireless network. The device is intended for use in a wide range of system types with extensive communication and connectivity requirements.

Radio technology: Compliance with 802.15.3a standards

Operating frequency: 3.16GHz ~8.97GHz, BG1, BG3, BG6

Modulation Schemes: Multiband OFDM

Data rate(Mbps)

53.3, 80, 106.7, 160, 200, 320, 400, 480 in BG1, BG3, BG6.

3.3 ENVIRONMENT

3.3.1 Temperature

Operating Temperature Conditions

The product shall be capable of continuous reliable operation when operating in ambient temperature of 0°C to +60°C.

Non-Operating Temperature Conditions

Neither subassemblies shall be damaged nor shall the operational performance be degraded when restored to the operating temperature when exposed to storage temperature in the range of -10°C to +75°C.

3.3.2 Humidity

Operating Humidity Conditions

The product shall be capable of continuous reliable operation when subjected to relative humidity in the range of 10% and 85% non-condensing.

Non-Operating Humidity conditions

The product shall not be damaged nor shall the performance be degraded after exposure to relative humidity ranging from 5% to 90% non-condensing.

3.4 PRODUCT PHOTOGRAPH




PCB TOP and BOTTOM SIDE



4. HARDWARE REQUIREMENTS


4.1 FUNCTIONAL BLOCK DIAGRAM

The hardware design of CY-WDCB7UR is based on AL6301/AL5100 reference circuit.

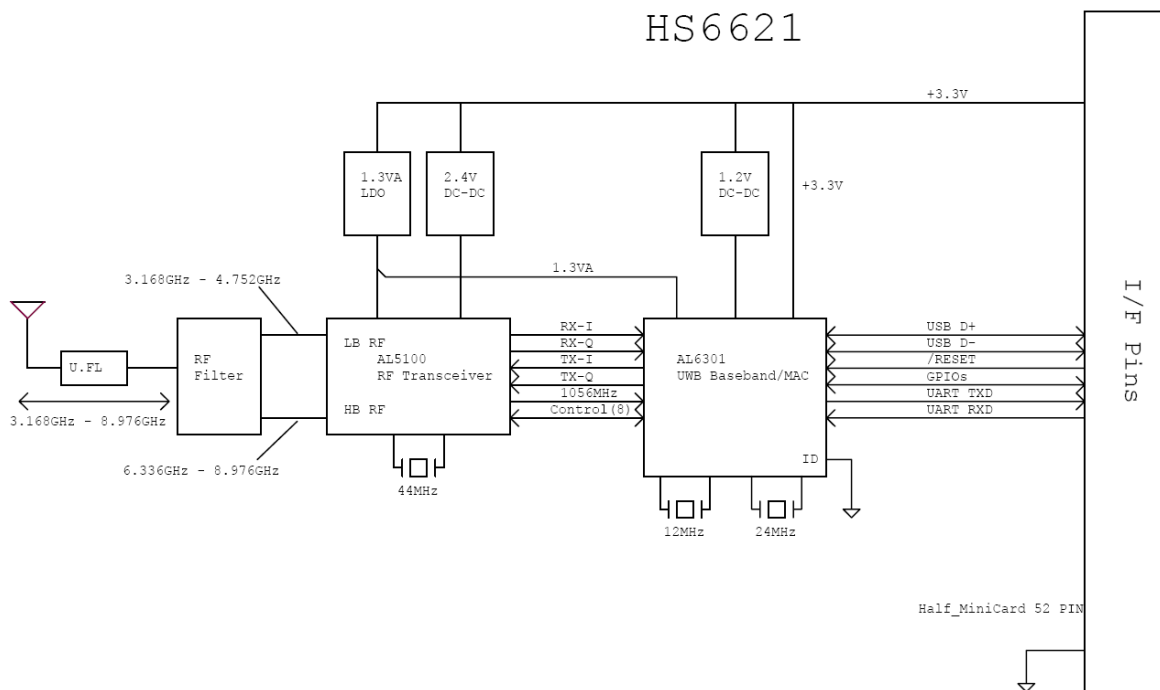

4.2 AL6301/AL5100 CHIPSET ARCHITECTURE

FUNCTIONAL BLOCK DIAGRAM (AL6301 with AL5100 RF Transceiver)

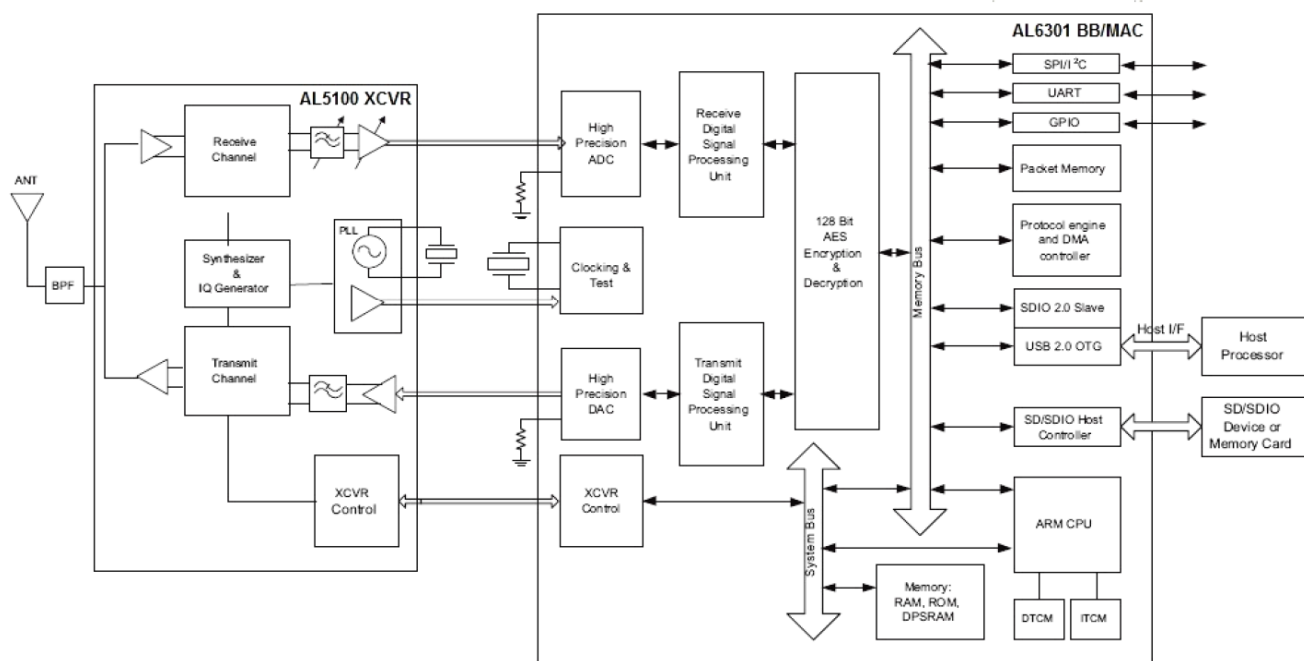


4.3 IO CONNECTOR PIN DEFINITION

HS6621(Rev2.5) Half_MiniCard Edge Connector				
Signal Assignments				
Function		Pin#	Pin#	Function
	NC	1	2	3.3V
	NC	3	4	GND
	NC	5	6	NC
	NC	7	8	NC
	GND	9	10	NC
	NC	11	12	NC
	NC	13	14	NC
	GND	15	16	USB VBUS
	NC	17	18	GND
	NC	19	20	W_Disable#
	GND	21	22	NC
	NC	23	24	3.3V
	NC	25	26	GND
	GND	27	28	NC
	GND	29	30	NC
	UART_RX	31	32	Assoc. VBUS
	UART_TX	33	34	GND
	GND	35	36	USB D-
	NC	37	38	USB D+
	NC	39	40	GND
	AL_GPIO_2	41	42	Dock_LED(AL_GPIO_0)
	AL_GPIO_4	43	44	Security_LED(AL_GPIO_1)
	AL_GPIO_5	45	46	Data_LED(AL_GPIO_3)
	AL_GPIO_7	47	48	NC
	Host_Connect_LED(AL_GPIO_6)	49	50	GND
	NC	51	52	3.3V


4.4 Manufacturing Test Block Diagram

4.4.1 PT Block Diagram

*** Certified Calibrated Golden Sample required**

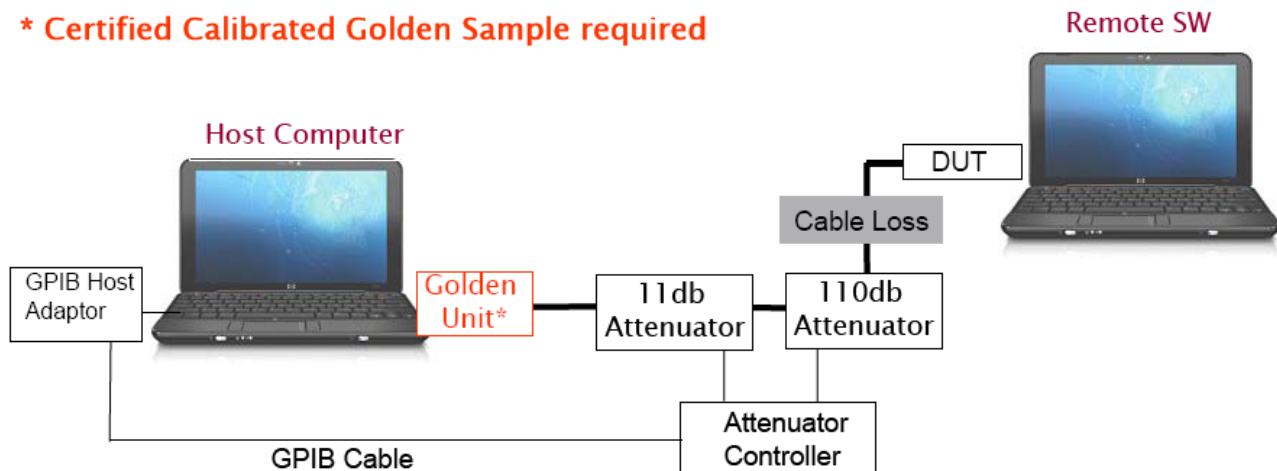

4.4.2 FT Block Diagram

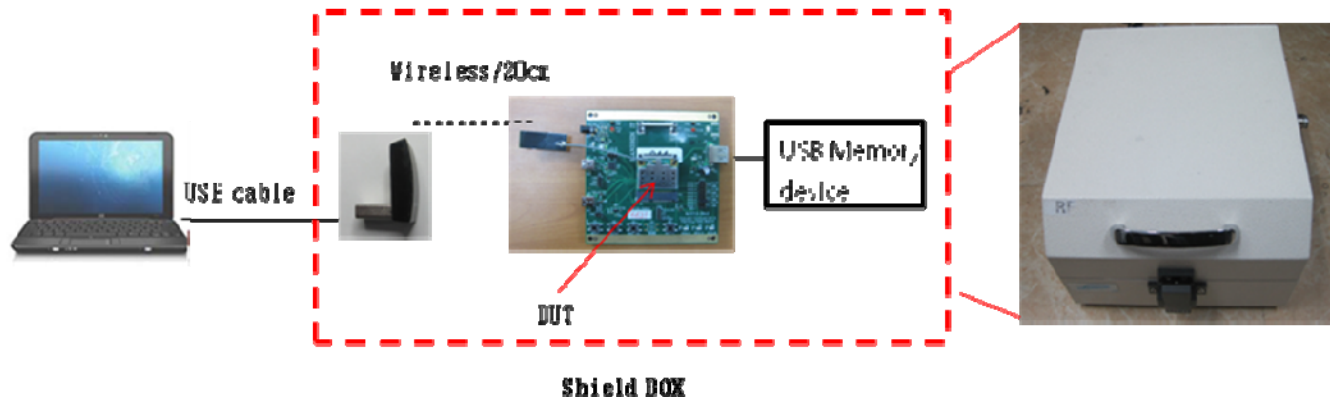

4.5 PRODUCT TEST ITEMS & SPEC

4.5.1 Transmission Section

BG	TFC	Rate	RxPwr	PayloadLength	PacketNumber	IFS(us)	BurstNumber	BurstPolicy	PERLimit(%)	LQILimit
1	1	53	-50	1024	1000	10	1	0	5	14
1	1	480	-50	1024	1000	10	1	0	5	14
3	1	480	-50	1024	1000	10	1	0	5	14
3	7	480	-50	1024	1000	10	1	0	5	14
6	7	53	-50	1024	1000	10	1	0	5	14
6	7	480	-50	1024	1000	10	1	0	5	14
1	5	53	-50	1024	1	10	1	0	5	14

4.5.2 Receiver Section


BG	TFC	Rate	RxPwr	PayloadLength	PacketNumber	IFS(us)	BurstNumber	BurstPolicy	PERLimit(%)	LQILimit
1	1	53	-75	1024	1000	10	1	0	5	0
1	1	480	-67	1024	1000	10	1	0	5	0
1	5	53	-75	1024	1000	10	1	0	5	0
1	7	53	-75	1024	1000	10	1	0	5	0
1	7	480	-67	1024	1000	10	1	0	5	0
1	10	480	-67	1024	1000	10	1	0	5	0
3	1	53	-75	1024	1000	10	1	0	5	0
3	1	200	-67	1024	1000	10	1	0	5	0
3	1	480	-64	1024	1000	10	1	0	5	0
6	1	53	-72	1024	1000	10	1	0	5	0
6	5	53	-72	1024	1000	10	1	0	5	0
6	1	200	-67	1024	1000	10	1	0	5	0
6	7	200	-67	1024	1000	10	1	0	5	0

4.6 PERFORMANCE TEST RESULTS

4.6.1 Current Consumption

Maximum Current Consumption (mA)							
Mode	Stand-by	BG1		BG3		BG6	
		Transmit	Receive	Transmit	Receive	Transmit	Receive
Current	160~280	185	210	185	220	187	223


4.6.2 Indoor Range Throughput

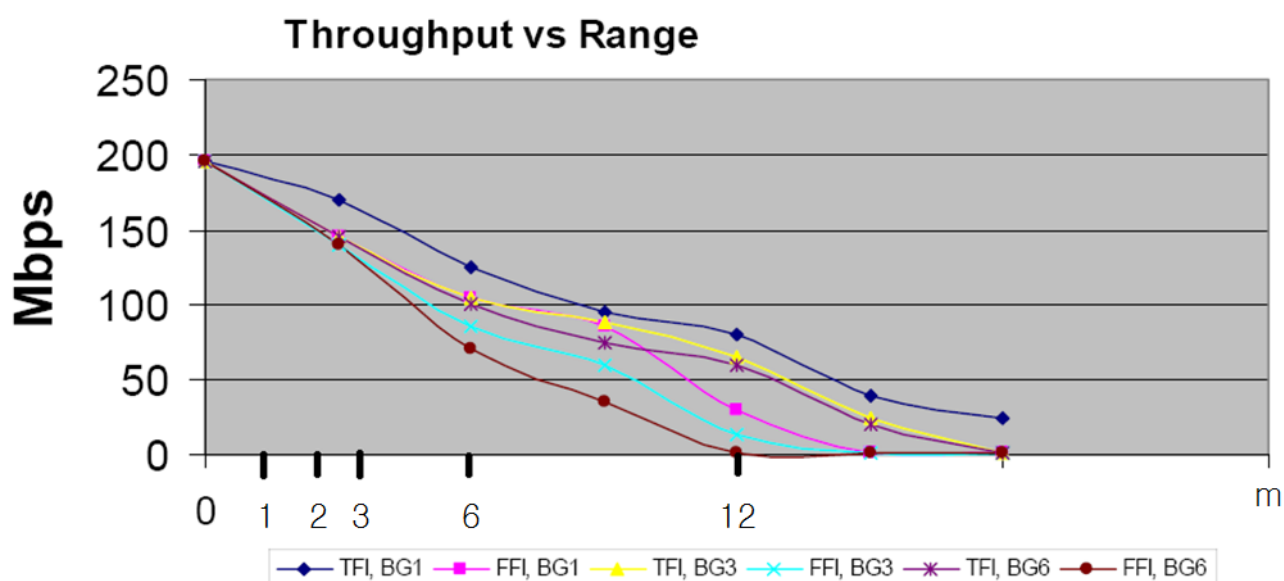

5. DIMENSION INFORMATION


5.1 PCB DIMENSION


PCB Dimension (W x L): 30 x 26.8mm, Thickness 1.0mm $\pm$ 0.1mm

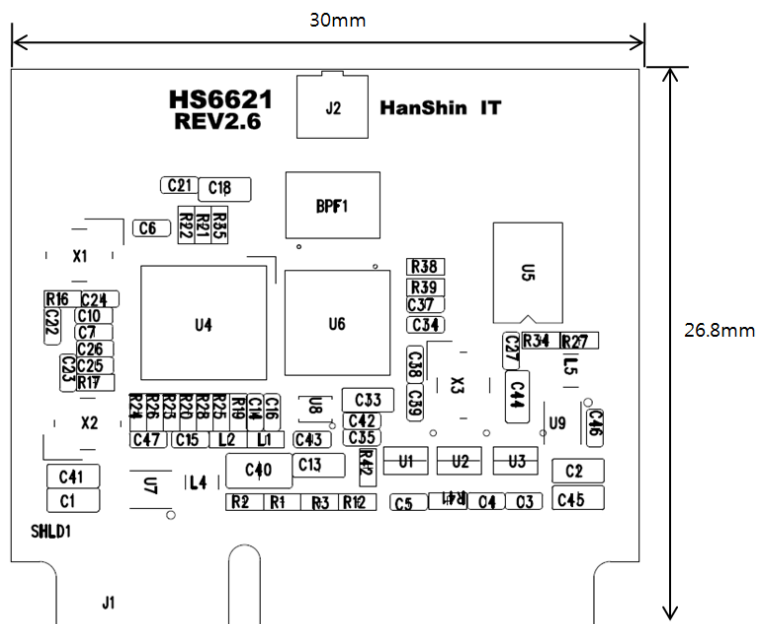


5.2 SHIELD CASE DIMENSION

Shield case Dimension (W x L): 28.9 x 22.25 mm, Thickness 0.3mm

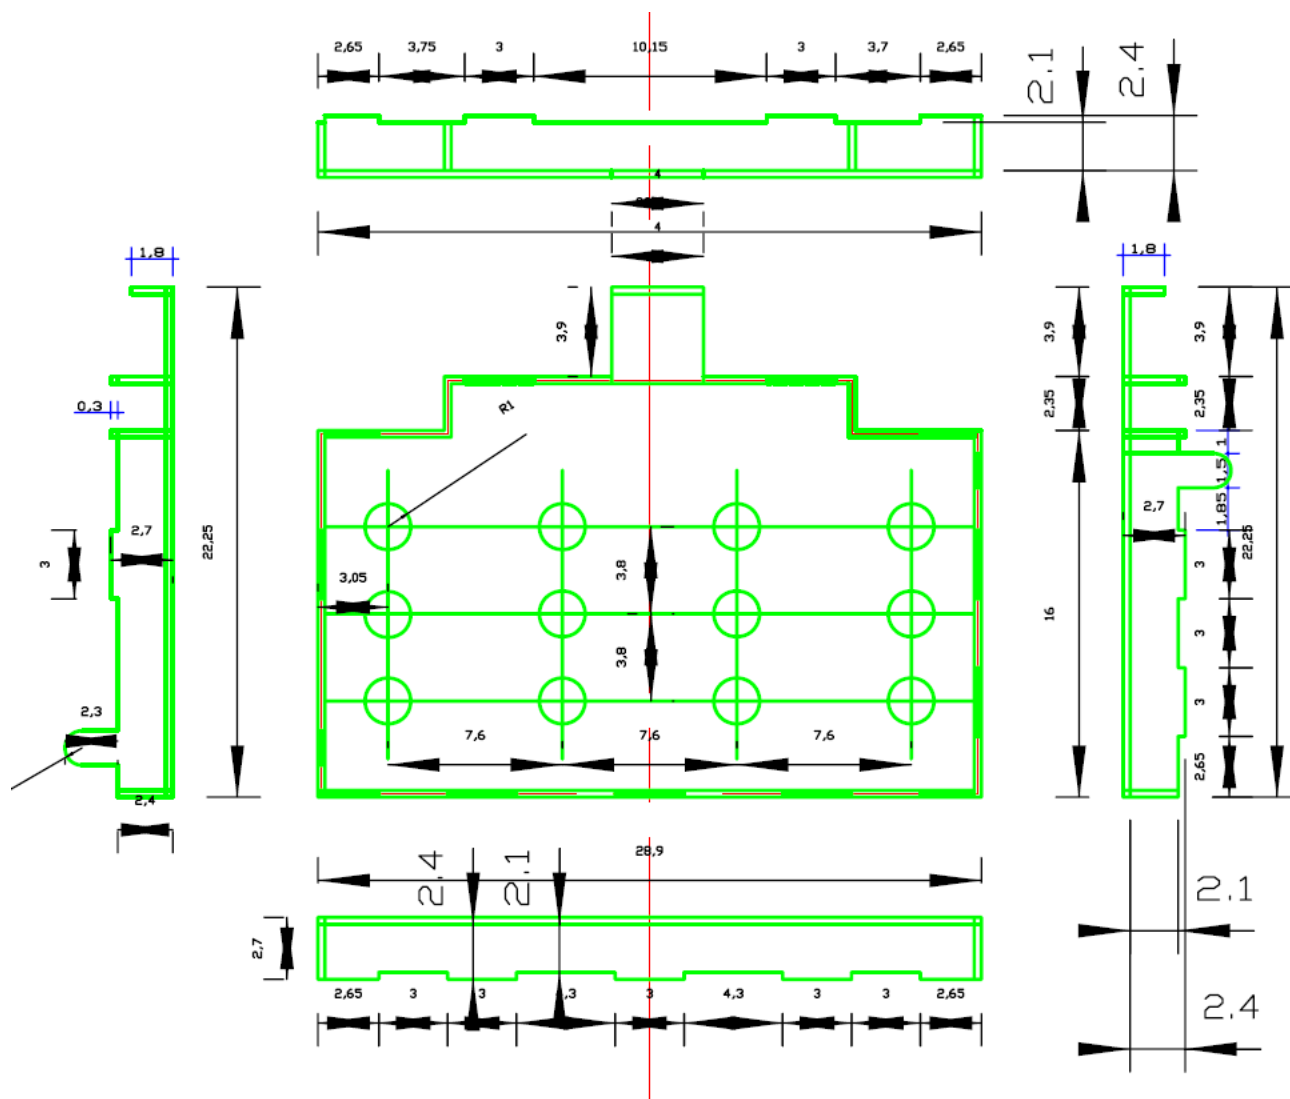

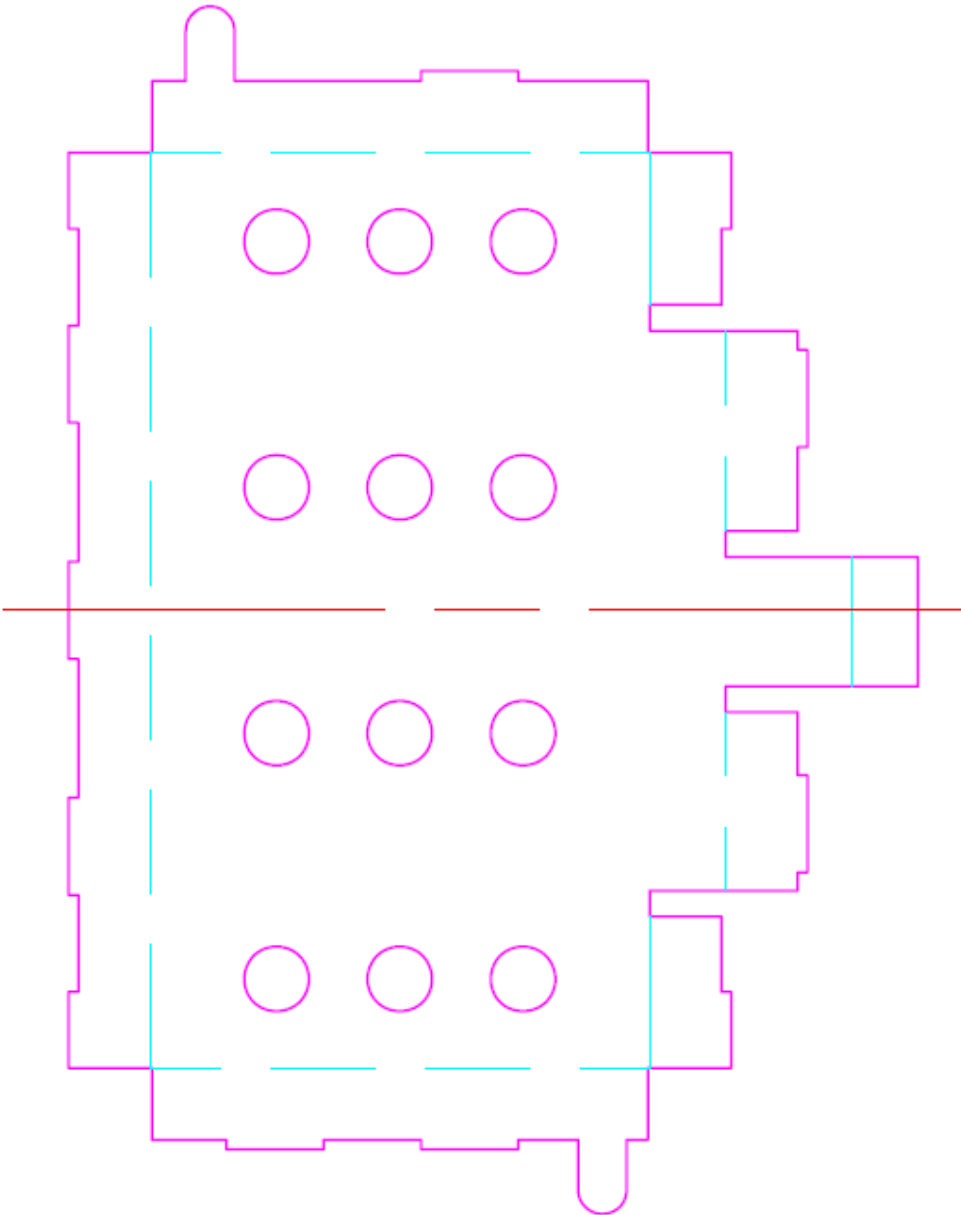

5.3 ASSEMBLY DIMENSION

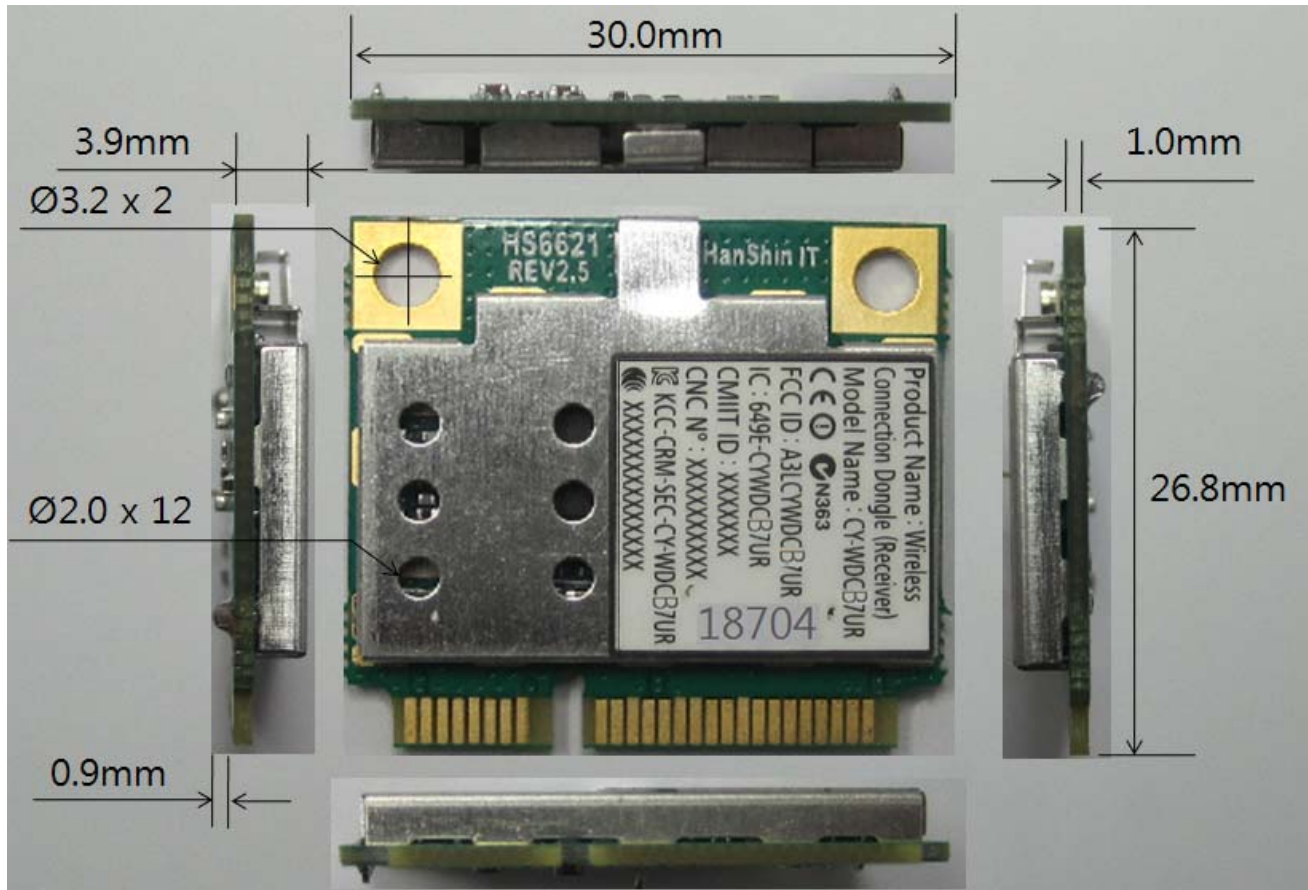

Array number : 3 x 2 pcs

Cutting type : Routing


Array Size : 118.0mm X 55.6mm

6. PACKAGE DIMENSION

6.1 LABEL DIMENSION

Label, pasted on the bottom of cover

Material: PP MATIC/S692N/GB

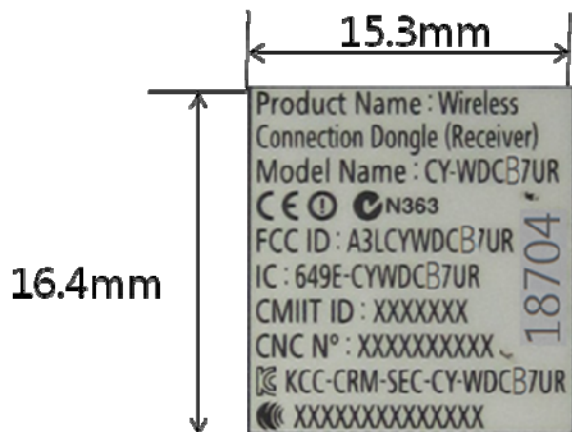

6.2 LABEL STICK



Regulation
Label

7. ANTENNA SPECIFICATIONS

7.1 Summaries

7.1.1 Function and Features

This specification of approval is explained information of UWB(Ultra Wide Band) Antenna (BWT-UWB/HSM-L001/IN) including general information, general specification, result of examination, examination procedure and assembling.

7.2 Specification

7.2.1 Applicable Boundary

This specification data is applicable to define the patch antenna's specification of Ultra Wide Band Antenna for Video data transmitting and receiving.

7.2.2 Electrical Specification

Model	BWT-UWB/HSM-L001/IN		
Type	Micro-strip Patch Type		
Characteristic	Electrical Char.	Frequency Range	3.1GHz ~ 10.6GHz
		Polarization	Linear (Vertical)
		Gain	3.1 dBi (max.)
		V. S. W. R	1 : 3.3
		Power Capability	≤5 Watt
		Impedance	50 Ω

	Physical Char.	Radiation Element	
		Material	Copper
		Dimension	13 × 36 × 0.6 mm
		Weight	0.5 g
		Input Connector	MHF(F)

7.3 Results of Antenna Measurement


7.3.1 Antenna Return Loss



7.3.2 Antenna VSWR




7.3.3 Antenna Radiation Pattern

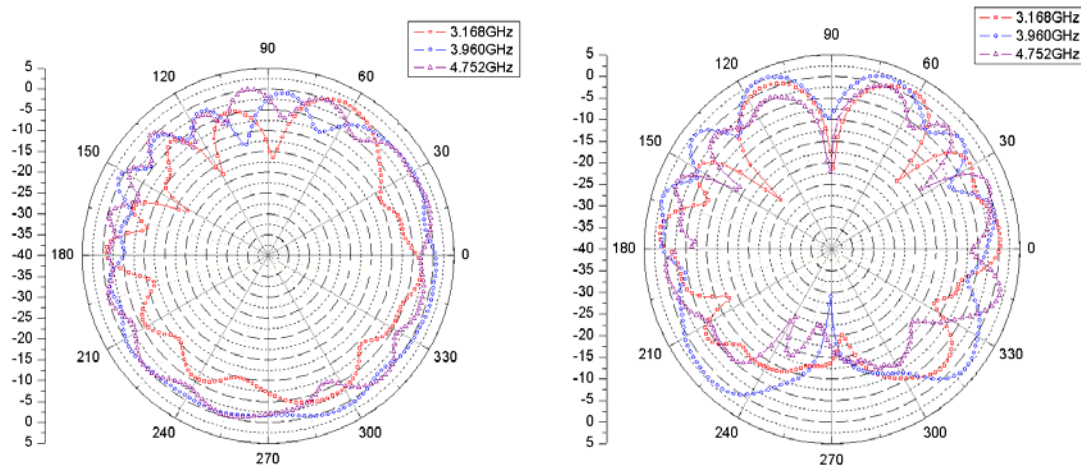


Picture 1. 3.168GHz~4.752GHz (Vertical)


Picture 2. 3.168GHz~4.752GHz (Horizontal)

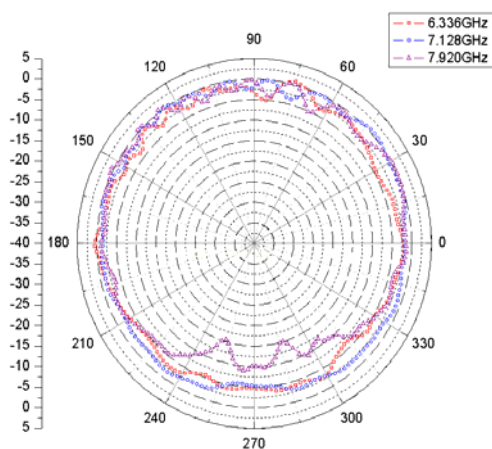


Picture 3. 6.336GHz~7.920GHz (Vertical)

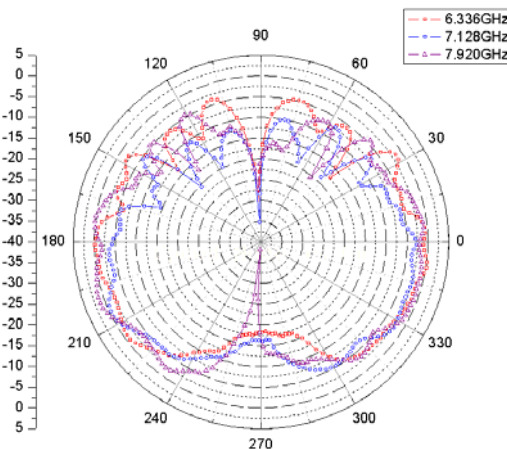

Picture 4. 6.336GHz~7.920GHz (Horizontal)

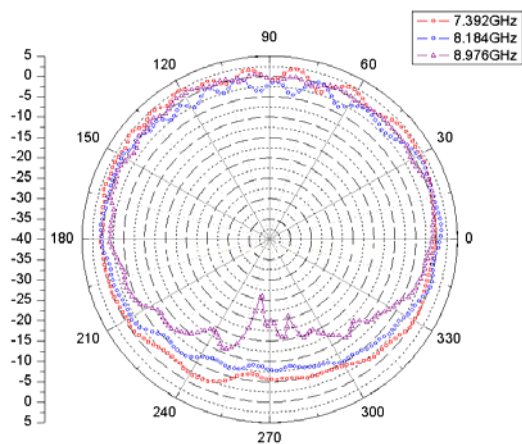

Picture 5. 7.392 GHz~8.976GHz (Vertical)

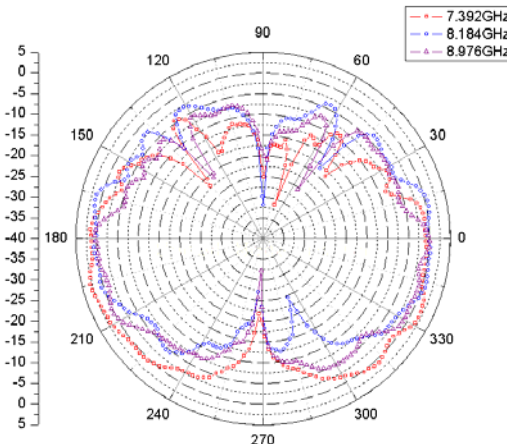

Picture 6. 7.392 GHz~8.976GHz (Horizontal)


7.3.4 Antenna Peak Gain

Band Group Peak Gain

BWT-UWB/HSM-L001/IN


Band Group	Frequency (GHz)	Gain(dBi)
BG 1	3.168	2.22
	3.960	2.31
	4.752	2.15
BG 3	6.336	2.17
	7.128	1.95
	7.920	2.65
BG 6	7.392	3.10
	8.184	2.81
	8.976	2.78

Band Group Peak Gain

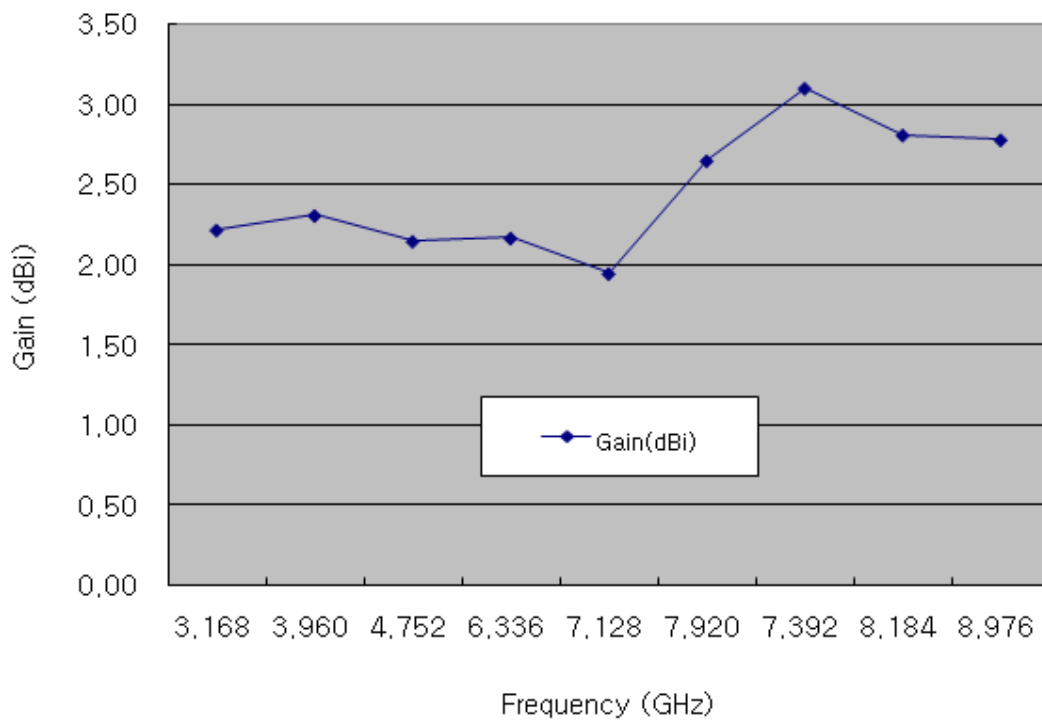


7.4 Drawing

7.4.1 Antenna Drawing

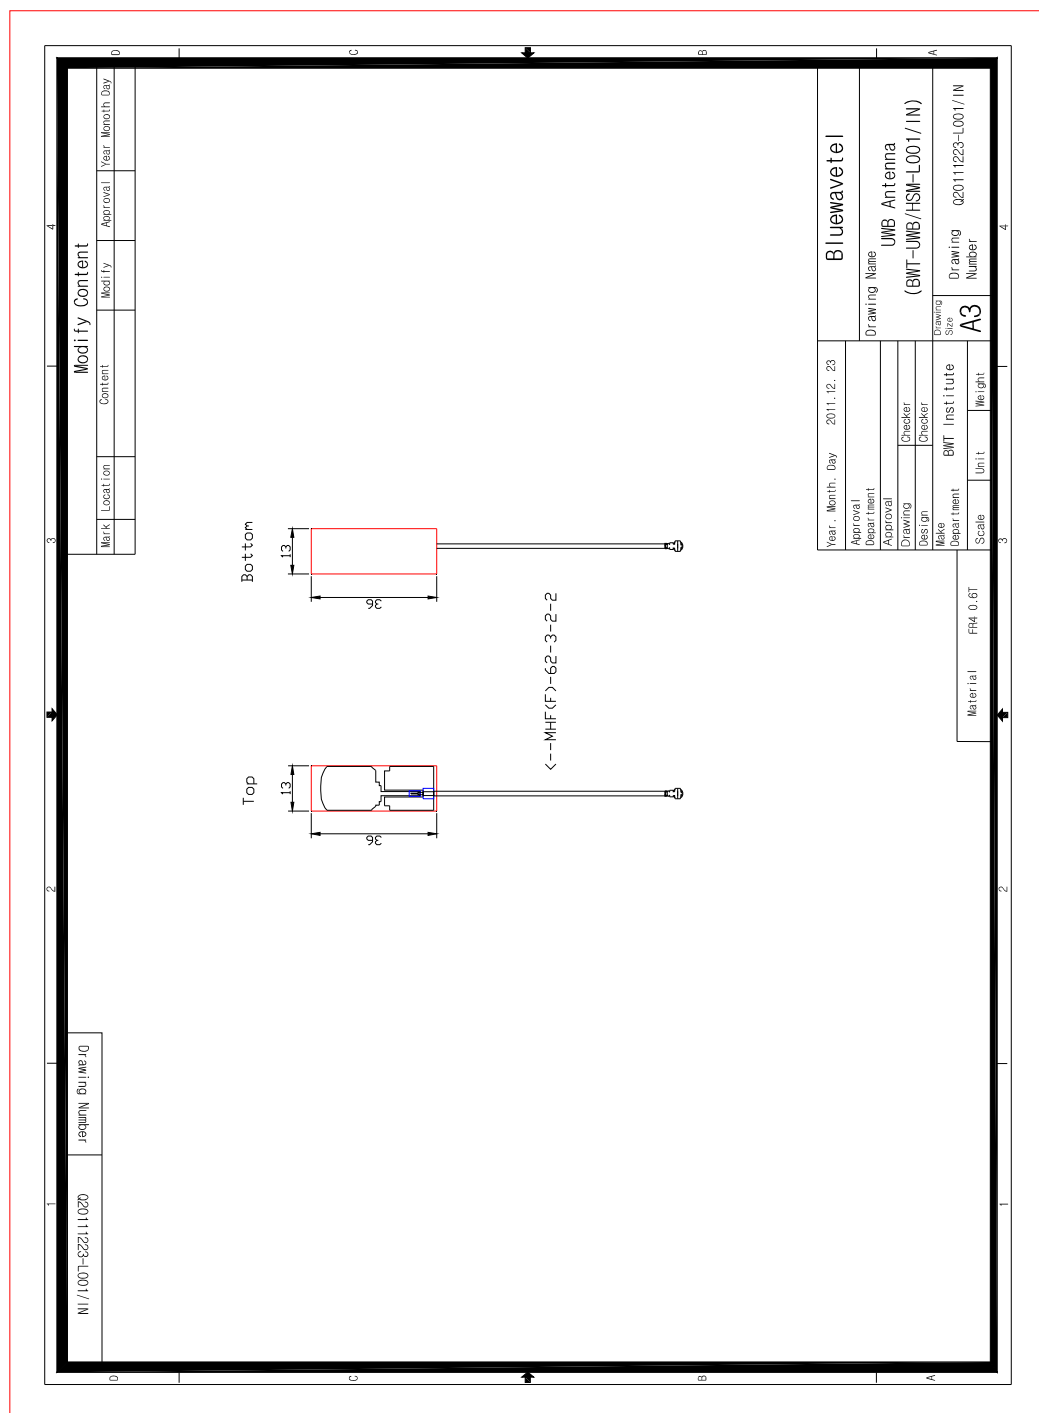

5.2 Cable Drawing

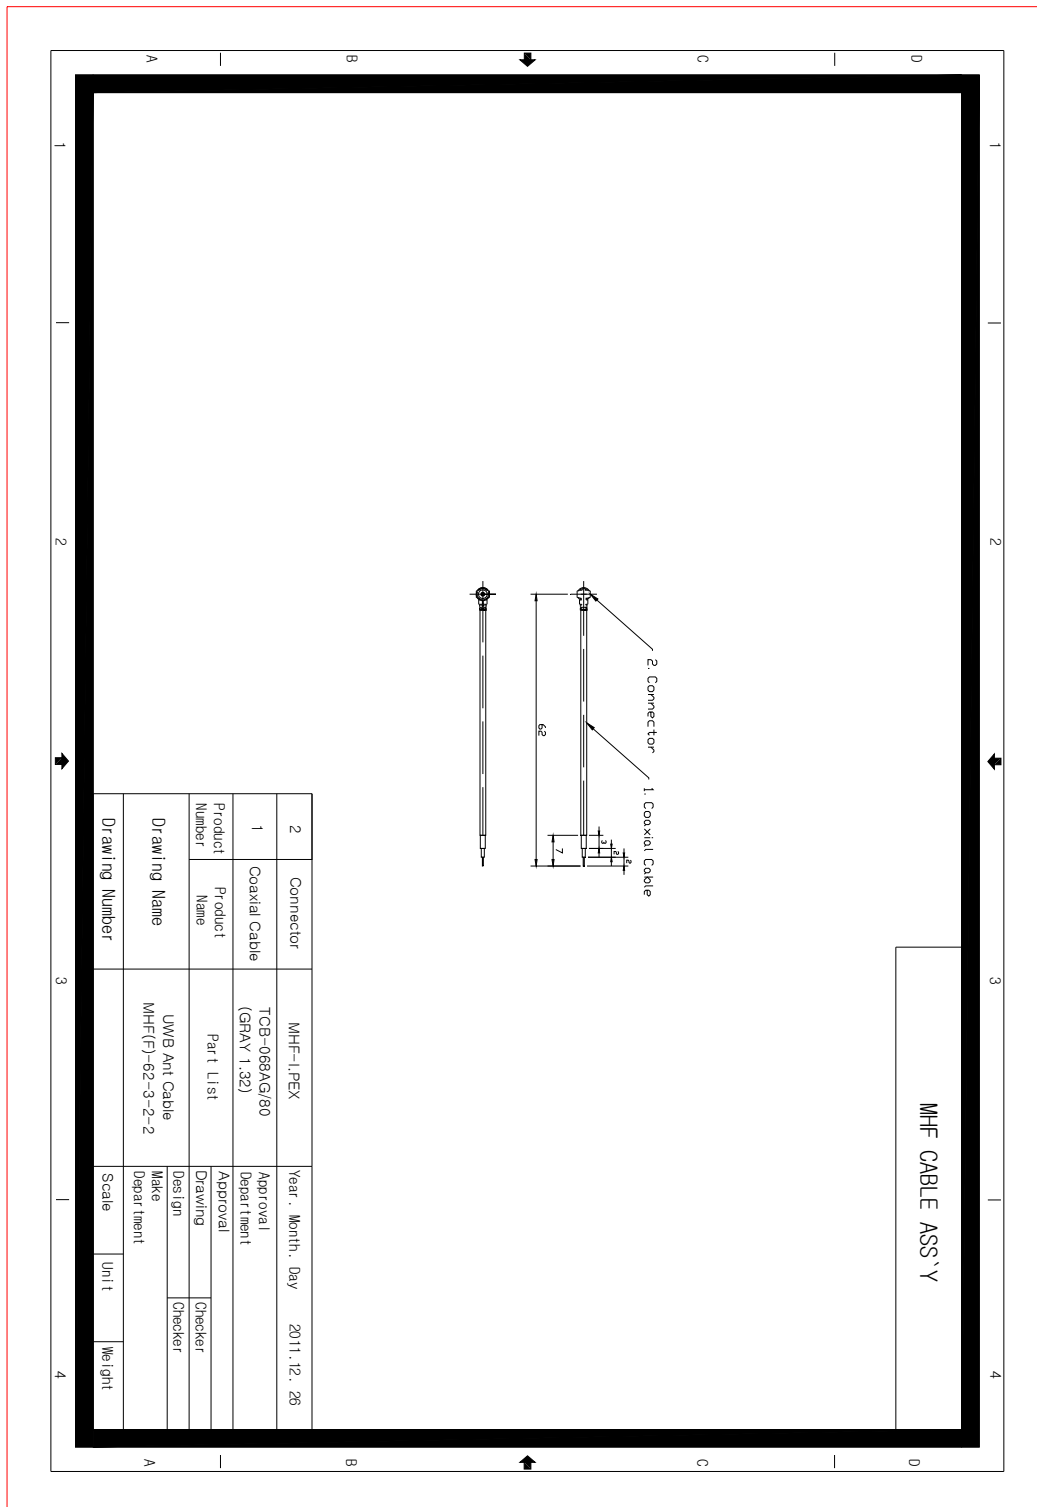

8. PACKAGE DIMENSION

8.1 ANTI SHIELDING BAG


Material : PP

T=0.075mm


Size :70mm X 90mm




8.2 CARTON

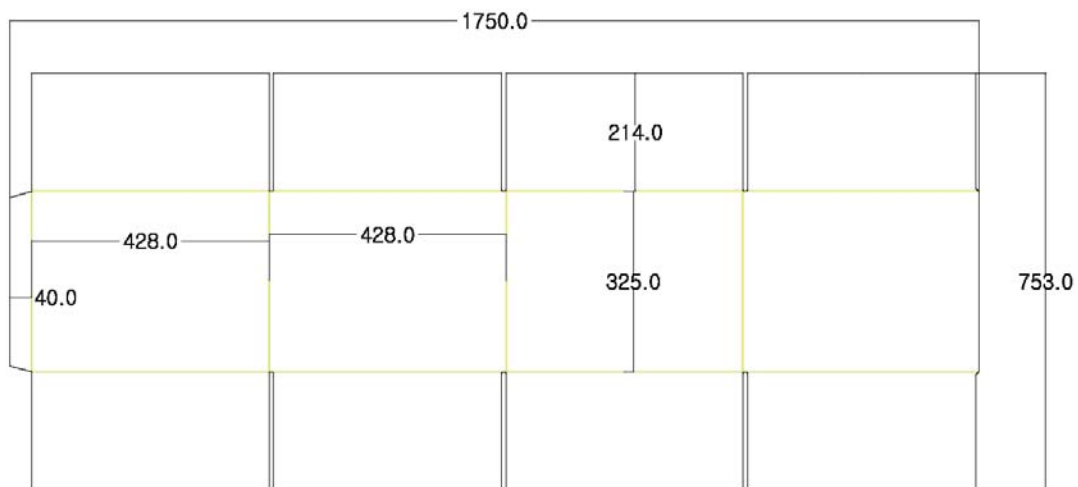


8.3 PAD

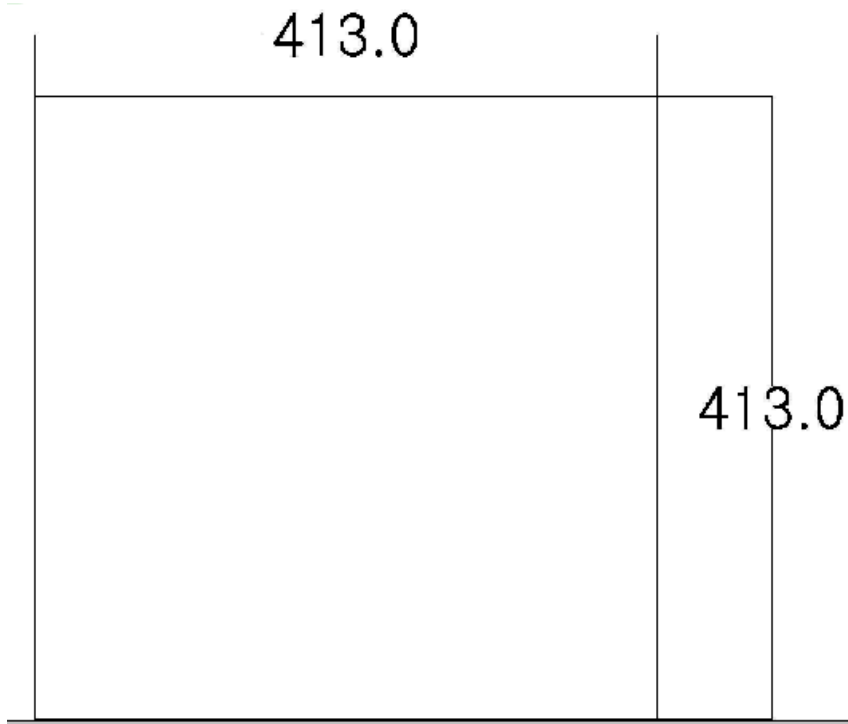


8.4 TRAY

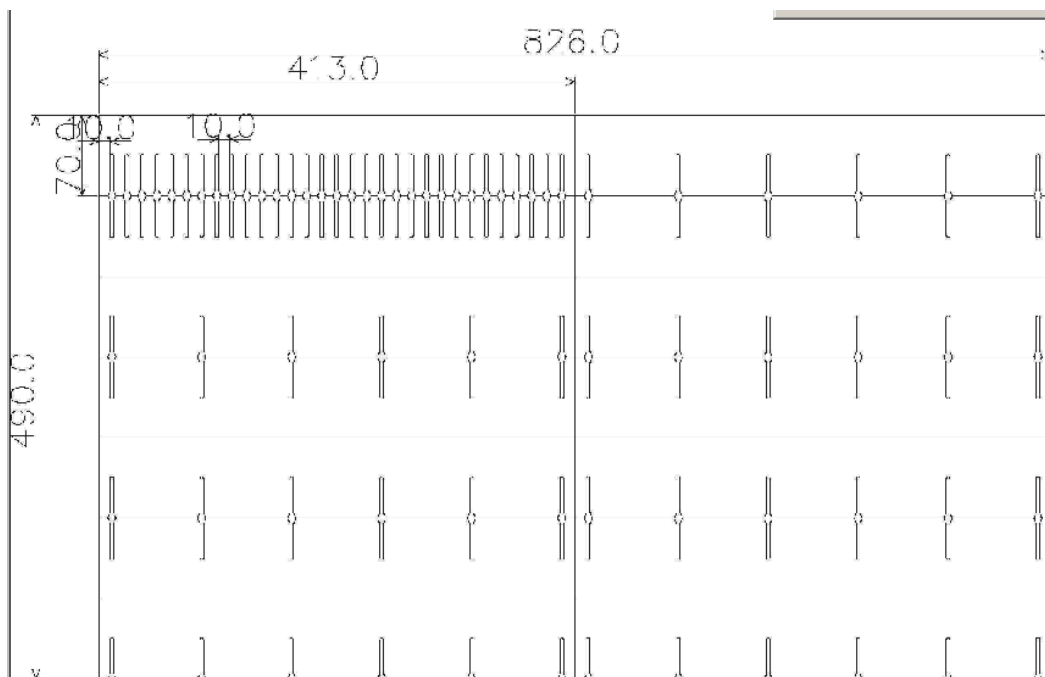

8.5 CARTON ASSY DRAWING (TRAY STACK DRAWING)

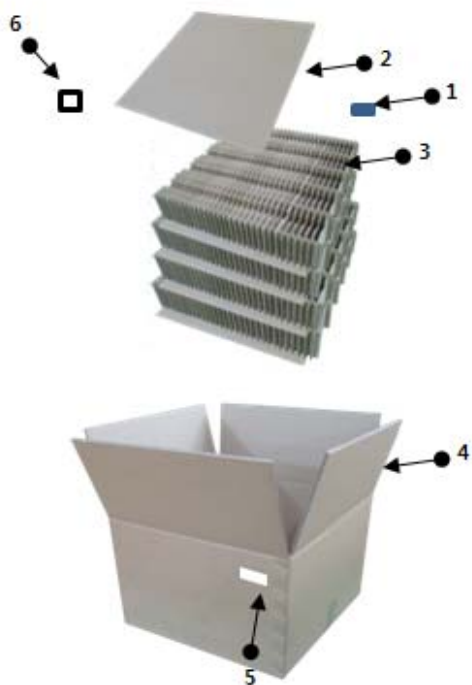

Item	Description	QTY
1	BN59-01157A	1
2	PAD	5/600
3	TRAY	4/600
4	CARTON	1/600
5	CARTON LABEL	1/600
6	DRIER	3/600

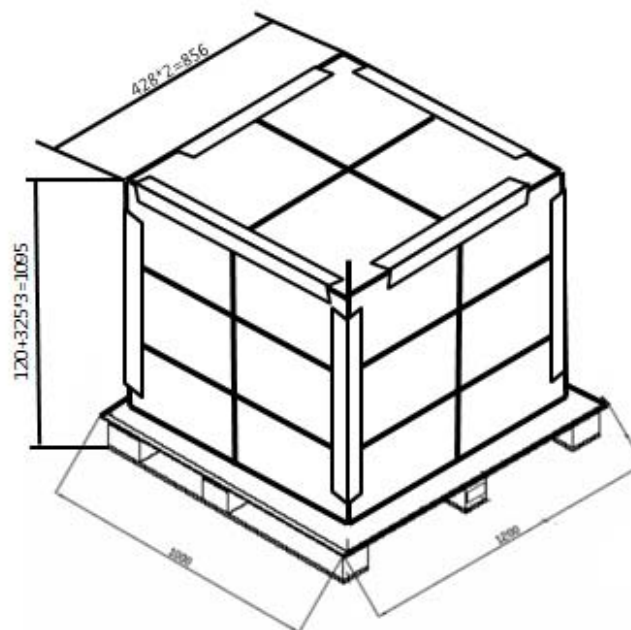

1 pallet= 3layers=3*4*504=9072pcs

9. HANSHIN IT CONTACT INFORMATION

Headquarter Address	#201 IT Venture Town, 694 Tamnip-dong, Yusung-gu, Daejeon, Korea
Headquarter Telephone Number	+82-42-9338507
Factory Address	#209 IT Venture Town, 694 Tamnip-dong, Yusung-gu, Daejeon, Korea
Factory Telephone Number	+82-42-9338507(Ext.26)

10. IC Statement

This UWB RF module apparatus complies with RSS-GEN.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF exposure

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

The module is designed for use in host systems, and installed with a minimum of 0.29 mm separation between the antenna and persons when the device is operating.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

LABEL OF THE END PRODUCT

The final end product must be labeled in a visible area with the following "Contains IC:
649E-CYWDCB7UR".