www.samsung.com/register.

Holder-Wire stand 1(EA)



List of Parts



Remote Control (AA59-00817A) & Batteries (AAA x 2)	Power Cord	Owner's Instructions Safety Guide
•	5	

Hotel Mount Kit




Installing the LED TV Stand

♦ HG32ND478 / HG40ND478


Components

When installing the stand, use the provided components and parts

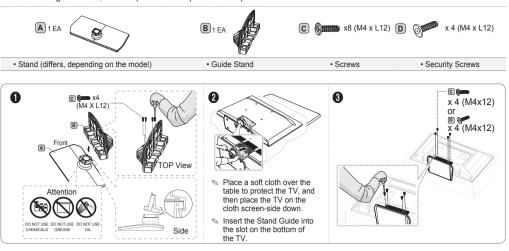


- Nake sure to distinguish between the front and back of the Stand and Stand Guide when connecting them.
- Make sure that at least two people lift and move the LED TV.
- when connecting the stand, lay the product down on a soft surface, with the screen facing down, and then fasten the screws. The number of screws may differ depending on the model.
- ♦ Assembling the swivel

The 32" and larger LED TVs have swivel stands. You can set these stands so that the TV swivels 20 degrees left and right, 60 degrees left and right, or 90 degrees left and right.

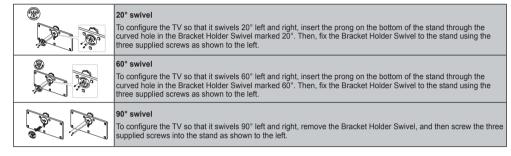

♦ Hotel Mount Kit

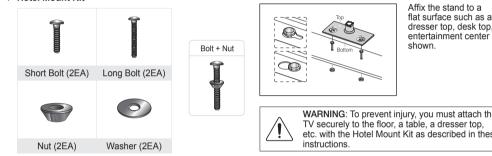

Sound Bar

♦ Samsung Sound-Bars and Hospitality TVs in 2015

- Samsung Sound-Bars and hospitality TVs support the ARC feature in HDMI 1.4. If you connect a compatible Samsung Sound-Bar to a compatible Samsung hospitality TV using a single HDMI cable, guests can listen to the TV's sound through
- The item of Sound bar Out in Hospitality Option Menu makes you control to where the TV sound is outputted when the TV
- If Sound bar Out is On, the TV sound is automatically outputted in the Sound Bar device only whenever TV is turned on.
- If Sound bar Out is Off, the TV sound is automatically outputted in the TV speaker only whenever TV is turned on.
- Models supporting the ARC function are listed below:
- Sound-Bars: HW-E350/E450/E550 HW-F350/F355/FM35/F450/FM45/FM45C/ F550/F551/FM55/FM55C/F750/F751


♦ Setting the Sound-Bar to Hotel Mode.

- Set the following Hotel menu options:

- Hotel option > System > Sound Bar Out = On.
 Hotel option > Power On > Power On Volume = User Defined.
 Hotel option > Power On > Power On Volume Num > Set greater than 0.
 Hotel option > Power On > Max Volume > Set greater than 0.
- Connect an HDMI cable from the HDMI OUT jack at the back of the Sound-Bar to the HDMI3 port (supporting ARC) on the
- After the Sound-Bar is connected to the hospitality TV, when the TV turns on, the Sound-Bar automatically detects the TV,

Sound Bar Hotel mode functional characteristics:

- Power On/Off is synchronized with the TV
- HDMI_CEC defaults to On
- Functions through the "HDMI OUT" port only
- Disables the "Input mode" key on the VFD to prevent unexpected audio-source changes.
- Acquires adjustable Power On and Max Volume settings from the TV's Hotel option menu. The Sound-Bar's Power On Joliume and May Volume values, however, are 1/2 of the Pow
- Example: If the TV's Power On Volume=20 and Max Volume=90, then the Sound Bar's Power On Volume=10 and Max

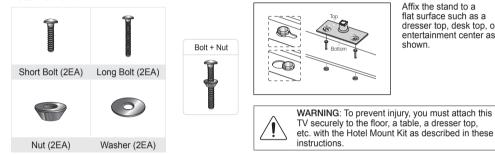


Wall Mount Kit Specifications (VESA)

Install your wall mount on a solid wall perpendicular to the floor. If you are attaching the wall mount to building materials other than plaster board, contact your nearest dealer. If installed on a ceiling or slanted wall, the TV may fall and cause severe personal injury.


- > Standard dimensions for wall mount kits are shown in the table below.
- > Samsung wall mount kits contain a detailed installation manual. All parts necessary for assembly are provided.
- > Do not use screws that do not comply with the VESA standard screw specifications.
- > Do not use screws that are longer than the standard dimension or do not comply with the VESA standard screw specifications. Screws that are too long may cause damage to the inside of the TV set.
- > For wall mounts that do not comply with the VESA standard screw specifications, the length of the screws may differ
- > Do not fasten the screws too firmly. This may damage the product or cause the product to fall, leading to personal injury.
- Samsung is not liable for these kinds of accidents.
- > Samsung is not liable for product damage or personal injury when a non-VESA or non-specified wall mount is used or the consumer fails to follow the product installation instructions
- > Do not mount the TV at more than a 15 degree tilt.
- Always have two people mount the TV onto a wall.

- / iii ayo naro tii	o poopio mount	the TV onto a wan.			
Product Family	TV size in inches	VESA screw hole specs (A * B) in millimeters	Standard Screw (Length* Pitch in mm)	Quantity	A
LED-TV	32	- 200 × 200	M8	4	В
LED-1V	40 200 × 200	IVIO 4	4		



Do not install your Wall Mount Kit while your TV is turned on. This may result in personal injury due to electric

Viewing the Connection Panel

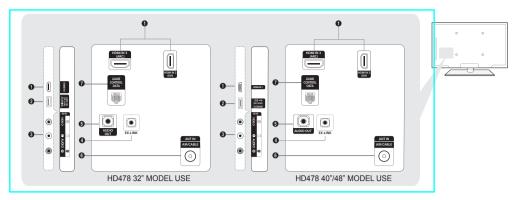


- > The product color and shape may vary depending on the model.
- HDMI IN 1, 2(DVI), 3(ARC)
- 2 USB (5V 0.5A) / CLONING 3 VIDEO / L-AUDIO-R
- 4 EX-LINK
- **5** AUDIO OUT
- 6 ANT IN (AIR/CABLE) GAME CONTROL DATA

Notice When in Hotel mode (Interactive or Standalone), all Channel menu items in the Menu OSD except for the Channel List are deactivated. If you need to change the channel line up, use the Channel Setup item in the Hotel options

Using the TV's Controller


The TV's Controller, a small joy stick like button on the rear right side of the TV, lets you control the TV without the remote

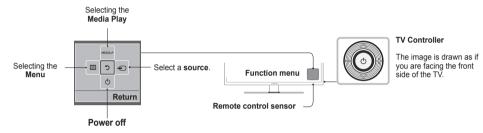


- The product color and shape may vary depending on the model.
- To exit the menu, press the Controller for more than 1 second.
- 🔈 When selecting a function by moving the controlle<mark>r up/down/</mark>left/right, be sure not to press up on the controller. If you press up first, it will not operate correctly.

Your TV enters Standby mode when you turn it off and continues to consume a small amount of electric power. To be safe and to decrease power consumption, do not leave your TV in standby mode for long periods of time (when you are away on vacation, for example). It is best to unplug the power cord.

Connecting the TV with an SBB or STB

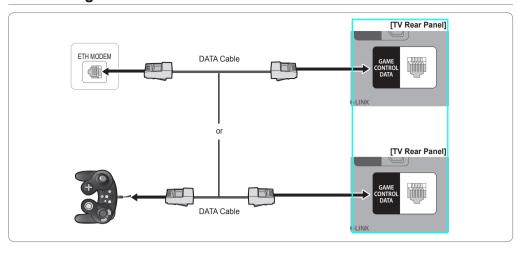

List of Vendors and Compatible Data Cables Supplied with the TV



1. Connect the Lodgenet game controller to the [GAME CONTROLLER/DATA] jack of the TV.

2. Connect the [DATA] jack of the TV to the [ETH MODEM] jack of the STB (SBB) with the data cable. ■ The "ETH MODEM" jack name that you connect the Data Cable to may differ depending on the SBB or STB type.

Vendor	Cable code
OCC	BN39-00865B
NXTV	BN39-01011B
nStreams	BN39-01110A
MTI	BN39-01011C

Licence

DOLBY.	Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories



Manufactured under a license from U.S. Patent No's: 5,956,674, 5,974,380, 5,978,762, 6,487,535, 6,226,616, 7,212,872, 7,003,467, 7,272,567, 7,668,723, 7,392,195, 7,930,184, 7,333,929 and 7,548,853. DTS, the Symbol, and DTS and the Symbol together are registered trademarks & DTS Premium Sound | 5.1



Manufactured under a license from U.S. Patent No's: 6,285,767, 8,027,477, 5,319,713, 5,333,201, 5,638,452, 5,771,295, 5,970,152, 5,912,976, 7,200,236, 7,492,907, 8,050,434, 7,720,240, 7,031,474, 7,907,736 and 7,764,802. DTS, the Symbol, and DTS and the Symbol together are registered trademarks & DTS Studio Sound is a trademark of DTS, Inc. ©2012 DTS, Inc. All Rights Reserved.



The terms HDMI and HDMI High-Defi nition Multimedia Interface, and the HDMI Logo are



trademarks or registered trademarks of HDMI Licensing LLC in the United States and other



DivX Certified® to play DivX® video up to HD 1080p, including premium content.

ABOUT DIVX VIDEO: DivX® is a digital video format created by DivX_LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified® device that has passed rigorous testing to verify that it plays DivX video. Visit divx.com for more information and software tools to convert your files into DivX videos.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies.

To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod.divx.com for more information on how to complete your registration. DivX®, DivX Certified® and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under

Covered by one or more of the following U.S. patents: 7,295,673; 7,460,668; 7,515,710; 7,519,274

Open Source used in this product can be found on the following webpage. (http://opensource.samsung.com)

Open Source License Notice is written only English.

Specifications


Environmental onsiderations			
Operating Temperature	50°F to 104°F (10°C to 40°C)		
Operating Humidity	10% to 80%, non-condensing		
Storage Temperature	-4°F to 113°F (-20°C to 45°C)		
Storage Humidity	5% to 95%, non-condensing		
Model Name	HG32ND478	HG40ND470 / HG40ND477	
Display Resolution	1366 x 768	1920 x 1080	
Screen Size	32" Class	40" Class	
(Diagonal)	(32.0" measured diagonally)	(40.0" measured diagonally)	
Sound (Output)	5W x 2	10W x 2	
Dimensions (WxDxH)			
Body	738.4 x 93.1 x 441.7 mm	905.2 x 91.1 x 525.4 mm	
With stand	738.4 x 191.7 x 498.1 mm	905.2 x 226.5 x 562.7 mm	
Weight			
Without Stand	5.4kg	6.4kg	
With Stand	5.9kg	9.4kg	
Stand Swivel (Left / Right)	20° / 60° / 90°		

Design and specifications are subject to change without prior notice.

> This device is a Class B digital apparatus.

WARNING: This product contains chemicals known to the State of California to cause cancer and reproductive toxicity.

Dimensions

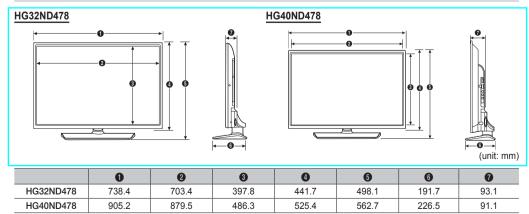

[HD478-ZA-QSG]BN68-07039E-X0L02.indd 1 2015-01-26 🗆 🗆 10:50:57