



The new Senco SNS41 Construction Stapler is perfect for anyone with a need for speed! It's fast, multi-directional stitching is a major benefit in applications like ridge beams and all types of sheathing.

## Applications:

Roof and sidewall sheathing, sub-flooring, fascia and soffits, aluminum and vinyl siding applications, cedar shingles, furring, ridge beam assembly, and metal tie down straps.

**Industrial:** Crate and box assembly and light furniture framing.

## Features and Benefits:


- Durable construction; driver has high-strength rib design, threaded piston/driver connection, and aluminum cylinder sleeve. Minimizes downtime and operating costs
- One year warranty
- Multi-directional stitching at up to 14 staples per second
- Lightweight and compact with excellent balance and an impressive power-to-weight ratio
- Adjustable depth of drive for consistent and controllable staple set
- EZ-clear latch provides quick and easy clearing of occasional jams
- Ergonomic comfort grip handle
- Quiet operation with adjustable exhaust for user comfort
- Reload indicator lets user know it's time to add more fasteners

## Tool Specifications:

Item #: 3L0003N: Contact Actuation (Dual Action)  
3L0004N: Sequential Actuation (Restrictive)  
Weight: 4.6 lbs. ( 2.09 kg)  
Height: 11" (273 mm)  
Length: 14" (380 mm)  
Width: 3" (75 mm)  
Staple Capacity: 160  
Operating Pressure: 80 –120 psig (5.5 – 8.3 Bar)  
Mode of Operation: Tool is available with either sequential or contact actuation trigger mechanism.  
Hose Fitting:  $\frac{3}{8}$ " (10 mm) NPT

## Fastener Specifications:

Crown  $\frac{7}{16}$ " (11 mm)  
Width: .062 (1.57 mm)  
Thickness: .055 (1.4 mm)  
Capacity 160  
Staples: Drives 16 ga. staples from 1" (25 mm) - 2" (50 mm)\*

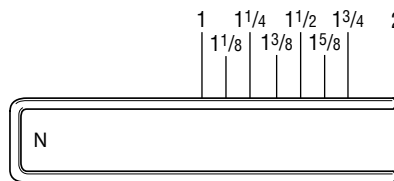

\* Note: 2" staples in soft wood applications only





Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions or contact SENC0 for more information on our trigger systems. Choose the right trigger system for your specific needs! For additional information on how SENC0 Fastening Solutions will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor. Visit our web site at: [www.senco.com](http://www.senco.com)

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.