

**R-25JT  
2100 Watts of Power**

The space-efficient R-25JT stands ready with all the staying power a heavy-duty, high-volume oven can deliver for fast-food or full-service restaurants, hospitals, nursing homes, schools and cafeterias.

R-25JT



**Dual Magnetrons**

Designed for dependability and even heating. If one magnetron fails, the oven continues to work at half power – it's great for crisis control!

**Top and Bottom Feeding**

Provides unparalleled cooking, heating and defrosting performance. Both the top antenna and the bottom antenna have a motor to distribute the microwaves evenly throughout the oven.

**Stacking Option**

Makes the most efficient use of space. Comes with a mounting plate for easily securing one oven on top of another.

**Computerized Touch Control Operation**

10 microprocessor-controlled programmable Memory pads provide one-second increment timing. They're extra easy and always reliable. Built-in safeguards prevent unauthorized changes.

**Stainless Steel Cabinet and Cavity**

An enduring investment in quality that stands up to high-volume demands. Heavy duty grab handle offers easy access. Rubber-sealed ceramic shelf ensures ease of cleaning. Oven light and see-through door for maximum visibility.

**Two-way Programming**

Use any of 10 preprogrammed Memory pads which can easily be converted to 20 memories or program manually for special needs or times. Also features 3-stage programming for added flexibility.

**SelectaPower™**

Provides 10 variable power levels for precise control. It's great for hard-to-heat foods.

**Memory Check**

Lets user confirm time setting and power level for each Memory pad.

**Double Quantity Pad**

Automatically adjusts to provide optimum heating times for two portions. No guesswork!

**Express Defrost**

Divides total defrosting time into 3 stages (using 3 power levels) for quick results.

**Memory Lock**

Prevents stored information from being erased during power interruptions or off times.

**Counter Check**

Keeps tabs on oven usage; "remembering" how often each feature is used and number of manual uses.

**Lighted Digital Display**

Shows programmed and elapsed heating times, plus percentage of microwave power, all with the highest level of accuracy.

**Convenient Extras**

Signal Control adapts to the needs of the operation by offering 2 tones; signals end of cycle.

**Menu Labels**

Handy peel-off labels can be used for each Memory pad.

**Service Door**

Lets user replace cavity light easily; no need for a service call or tools.

**Demonstration Mode**

Lets dealer demonstrate or user practice oven programming with no power in the oven. The timer will count down rapidly.




Built to meet rugged commercial standards. Complies with DHHS & FCC.


**R-25JT**

2100 watts


**HEAVY DUTY**

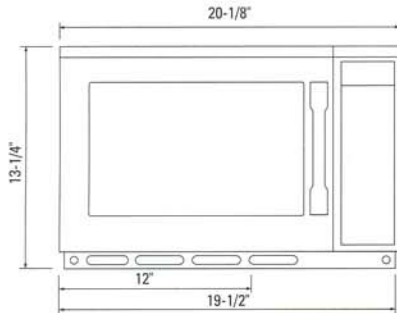

Front view

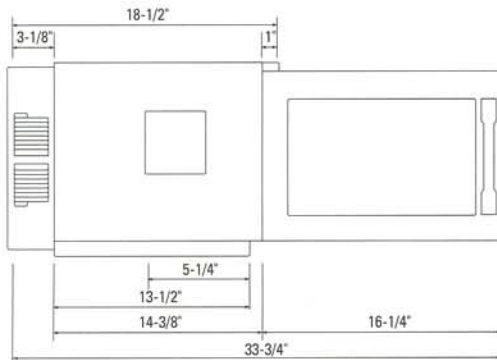

Side view with door open

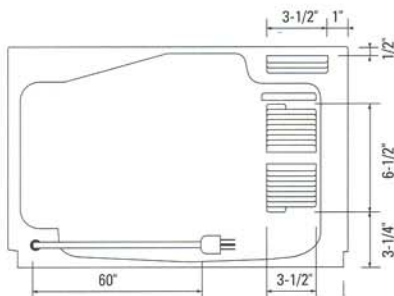

Rear view

**R-25JT Specifications**

|                      |   |
|----------------------|---|
| AC Line Voltage:     | Single phase, 230/208V, 60Hz, A.C. only   |
| Receptacle Required: | 20 Amp., NEMA 6-20R   |
| AC Power Required:   | 3.2 kW, 17.5A   |
| Output Power:        | 2100W (IEC-705-1988 Test Procedure)   |
| Frequency:           | 2450 MHz  |
| Outside Dimensions:  | 20 1/8"(W) x 13 1/4"(H) x 18 1/2"(D)  |
| Cavity Dimensions:   | 13"(W) x 7 1/8"(H) x 13"(D)   |
| Cavity:              | Stainless steel   |
| Cabinet:             | Stainless steel   |
| Anti-Theft:          | Screw hole for 3/16" self-tapping screw, located 12" from hinge side of door and 5 1/4" back from front edge of removable filter. |
| Safety Switches:     | Double safety switches include concealed interlock plus interlock monitor circuit   |
| Safety Standards:    | Commercial UL, FCC, DHHS and NSF-4  |
| Net Weight:          | Approx. 68 lbs.   |
| Shipping Weight:     | Approx. 77 lbs.   |

UPC: 074000607880

**To Specify a Sharp R-25JT Commercial Microwave Oven**

Oven shall comply with standards set by the U.S. Department of Health and Human Services, FCC, NSF-4 and UL and shall display such labels. Oven shall be equipped with 10 programmable microprocessor-controlled Memory pads, each adjustable in one-second increments from 0 to 30 minutes, without tools. Oven shall also be equipped with optional manual programming. Signal level shall be adjustable. Oven shall have Electrically Alterable Read Only Memory (EAROM) to prevent programmed information from being erased due to power interruptions. Output wattage shall be 2100 watts. Top and bottom antennae feed distribution system with covers shall provide uniform heating pattern. Oven shall be equipped with SelectaPower™ control from 0 to 100 percent power in 10-percent increments. Oven shall have capacity to expand Memory pads from 10 to 20; a 3-stage, 3-power-level defrost system; and an automatic Double Quantity feature. Digital display must show heating time and percentage of power. Oven must have Demonstration Mode. Exterior cabinet shall be of stainless steel construction with see-through oven door. Cavity shall be stainless steel with interior oven light. Bottom of cavity shall consist of rubber-sealed ceramic shelf. Oven shall be equipped with double magnetron tubes with self-diagnostics. Voltage must be adjustable from 230 to 208V by simply changing voltage select cover plate. Oven shall have a three-year limited warranty on parts and labor in the end user's place of business.

**Warranty**

Sharp Commercial Microwave Ovens have a reputation for unsurpassed quality in the food-service industry. Sharp Commercial Microwave Ovens are backed by a three-year warranty on parts and labor with service provided in the end-user's place of business. See operation manual for complete details.

Specifications subject to change without notice.

**Distributed By:**

**Sharp Electronics Corporation**

Corporate Headquarters and Executive Offices  
 Sharp Plaza, Mahwah, New Jersey 07430-2135  
 (201) 529-8711 Fax: (201) 512-2040

[www.sharppusa.com](http://www.sharppusa.com)