

SIM2 D80E PROJECTOR

Outstanding Home Theater



key points

- 0,95" 1080p DLP® chipset by Texas Instruments
- 1920x1080 pixel HDTV resolution
- Optimum contrast (>4500:1) and black level detail
- Future-proof input: HDMI™-HDCP
- 160W lamp
- BrilliantColor™ Technology
- Unishape™ Technology
- Proprietary SIM2 ALPHA PATH™ light engine
- New Live Colors Management software

The DOMINO D80E is the latest addition to SIM2's DOMINO home theater projector series. Based on the award-winning D80 model, this new 'Evolution' version builds on the outstanding performance of the impressive original.

The "Evolution" enhancement of the D80E makes great use of a sophisticated technology originally developed for use in SIM2's Grand Cinema series' models, namely Unishape™ lamp technology. When used in conjunction with BrilliantColor™ color enhancement, the millisecond-precision of the dynamic Unishape™ lamp system takes the performance of D80E to an altogether higher level. With a wider, more vivid color palette on offer, along with improved contrast and increased light output.

This Full HD specification home theater projector utilizes Texas Instruments' DarkChip3™ 0,95" 1080p DLP® (1920 x 1080 pixel resolution) chipset in its design, this is integrated into SIM2's patented ALPHAPATH™ light engine to deliver outstanding high definition images on-screen. The D80E also enables standard definition sources to be reproduced at 1080p resolution, thanks to sophisticated 10-bit video processing electronics.


The DOMINO D80E is compatible with all video standards (including 1080p@24fps) and offers a wide choice of both analog and digital source inputs, including HDCP compliant HDMI, making it eminently suitable for use with today's HD devices.

Available in either Matte Black or Matte White cabinet color.



SIM2 D80E PROJECTOR

Technical Specifications

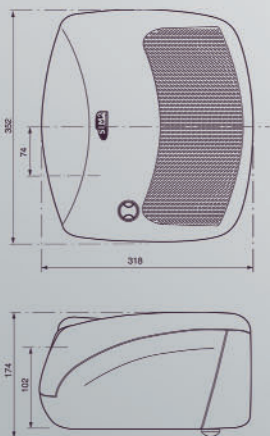

LIGHT ENGINE

Technology: 1 chip DMD 0,95" 1080p DarkChip3™
 Resolution: 1920 x 1080 pixels
 Lens: High quality, high resolution optics with both motorized zoom and focus adj.
 Full BrilliantColor™ technology and new color wheel (with primary and secondary colors)
 Lamp power & average life time*: 160W, 4000 hours

INSTALLATION

Throw ratio: 1,5-2,0:1
 Lens shift: V +50% / -33%
 Digital keystone adjustment: V+/-18°
 Picture size (inches diagonal): 50-200
 Aspect ratio: 4:3, 16:9 Anamorphic, LetterBox, panoramic, pixel to pixel + 3 custom-user adjustments

ELECTRONICS

Horiz. & vertical scan frequency: 15-80kHz/48-100Hz; 24 Hz (1080p only)
 Video & Graphic standards: PAL (B,G,H,I,M,N,60); SECAM; NTSC 3,58; NTSC 4,43 automatically selected; HDTV: ATSC (480p, 720p, 1080i, 1080p); 576p + 1080i 50Hz + 1080p 24Hz
 PC graphic: VGA, SVGA, XGA, SXGA, UXGA
 Contrast ratio (Full ON/ Full OFF): >4500:1
 Format Board: 10 Bit
 Video processor: built in
 Special video adjustments: Memories/Overscan
 New Live Colors Management software
 Full BrilliantColor™ and Unishape™ technologies

INPUTS/OUTPUTS

1 x Composite Video (RCA)
 1 x S-Video (mini Din 4 pin)
 1 x RGBs/YCrCb (4x RCA)
 1 x RGBHV (D-Sub 15 pin)
 1 x HDMI™-HDCP (vers. 1.3 with DeepColor)
 2 x OUT 12V 100mA on Jack connectors
 Control: 1 x RS232 (D-Sub 9 pin)

GENERAL SPECIFICATIONS

Software control: upgradable via RS232 serial interface
 Power consumption: 250W max
 Mains voltage range: 110-240Vac ±10% (48/62Hz)
 Dimensions (WxHxD): 350x173x318 mm (13.9"x6.85"x12.5")

SUPPLIED ACCESSORIES

Installation and User Manual
 AC power cords (EU, UK and USA) 6.6 ft (2m)
 Remote control and batteries

CABINET COLORS

Matte White or Matte Black

(*) Lamp life: the hours quoted have been measured in a lab under ideal test conditions. Lamp life varies depending on usage conditions and the surrounding environment. This is an average value that cannot be guaranteed and is not protected by warranty.

The DLP® logo and DLP® medallion are trademarks of Texas Instruments.

Due to constant product development, specifications and design might be subject to change without notice. Leaflet D80E USA - March 2008

Headquarters:
 SIM2 MULTIMEDIA S.p.A.
 Viale Lino Zanussi, 11
 33170 Pordenone - Italy
 Tel. +39.0434.383256
 Telefax +39.0434.383260
 E-mail: info@sim2.it

Germany:
 SIM2 DEUTSCHLAND GmbH
 ArndStr. 34-36
 D-60325 Frankfurt Am Main
 Tel. +49.163.5007462
 Telefax 0800.9007462
 E-mail: info@sim2.de

UK:
 SIM2 UK LTD
 Steinway House, Worth Farm
 Little Horsted, Nr. Uckfield
 East Sussex TN22 5TT
 Tel. +44.(0)1825.750850
 E-mail: info@sim2.co.uk

USA:
 SIM2 USA INC.
 10108 USA Today Way
 Miramar, FL 33025
 Tel. +1.954.442.2999
 Telefax +1.954.442.2998
 E-mail: sales@sim2usa.com

CHINA:
 Shanghai Representative Office
 Room 905, Jing'an Tower
 1701, Beijing Road West
 200040, China
 Tel: +86.21.62881991
 E-mail: vsheng@sim2.com

