

SA9065XS

freestanding cooker, 90cm wide

90cm giant electric oven and five-burner gas hob with flame failure device





bakers function

convection



Canali knobs



fan forced



fan grill



static grill

dimensions: 900mmW x 600mmD x 900mmH NB: height excludes fitted 63mmH rear splashguard.

NB: actual overall height can be adjusted — from 785mm without supplied telescopic legs to a maximum 925mm height with telescopic legs fitted. The cooker can be positioned on a kitchen cabinet plinth.

EAN 801*77*09101121

OVEN

- 126 litre oven
- 108 litre net cooking capacity
- five cooking functions
- twin fan forced 2 x 2000 watt rear wall elements
- full programmable digital time of day fully automatic cooking semi automatic cooking minute minder manual override
- double glazed, thermo-reflective door
- forced air door cooling
- Ever Clean enamel
- safety-notch trays and shelves
- 41 litre full-width storage compartment
- insulated control panel dials and door handle

NB 63mm high rear splashguard supplied for optional fitment

Option: stainless steel splashback:

650mmH x 900mmW, code 14202


HOB

- spacious five-burner hob, 43.3mj/hr maximum
- three heavy-duty cast-iron trivets
- flame failure device (FFD) fitted to each burner
- automatic electronic flame ignition
- ultra-rapid triple-crown all-purpose burner (wok)
- rapid burner
- two semi-rapid burners
- one low-simmer auxiliary burner
- single-pressed stainless steel hob with rolled edging
- no metal joins eliminates difficult grime accumulation
- satin stainless steel finish
- set for natural gas, regulator supplied
- ULPG adaptable, test point supplied
- 60mm high splashguard supplied (optional fitment to rear of cooktop zone)
- burner skirts, burner caps removable for easy maintenance



SA9065XS

freestanding cooker, 90cm wide

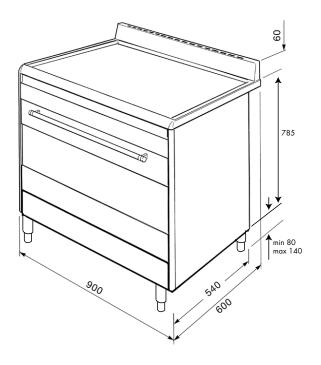

height minimum 785mm without legs, maximum 925mm with legs fully extended and excluding 63mmH rear splashguard width 898mm 600mm depth 74kg net weight 80kg gross weight

OVEN

 $350mmH \times 770mmW \times 450mmD = 121.3$ litres internal oven dimensions net cooking dimensions 340mmH x 750mmW x 420mmD = 107.8 litres 760mmW x 450mmD x 120mmH = 41 litres storage compartment 240 volt, 50 Hz electricity supply electrical connection hard-wired single phase

maximum current 18.67 amp

НОВ 43.3 mj/hour maximum over five burners supplied

three heavy-duty cast-iron trivets for full gas

60mmH x 898mmW splashguard for rear of hob, optional fitment

baking/grill tray two chromed-wire shelves one teflon biscuit tray

4 x telescopic legs

 $\frac{1}{2}''$ BSP gas inlet connection $\frac{1}{2}''$ BSP 1.0 kPa natural gas, regulator supplied gas connection

adapt for ULPG - test point supplied



| Burners | | | | | |
|---------|------------|--|--|--|--|
| 1 | Auxiliary | | | | |
| 2 | Semi rapid | | | | |
| 3 | Rapid | | | | |
| 4 | Wok | | | | |

| element | | roof | | floor | rear wall | rear wall | cooling | light (2) | | |
|-----------------|----------|-------|-------|-------|-----------|-----------|---------|-----------|--------------------|-------------|
| | | inner | outer | 11001 | rear wall | fan (2) | fan | lighi (2) | maximum wattage | current amp |
| ٧ | wattage | 1600 | 1200 | 1800 | 1500x2 | 25×2 | 20 | 15x2 | Ü | |
| static grill | *** | • | • | | | | • | • | 2850 | 11.88 |
| fan grill | Ï | • | • | | | • | • | • | 2900 | 12.09 |
| convection | _ | | • | • | | | • | • | 3050 | 12.71 |
| fan forced | | | | | • | • | • | • | 3080 | 12.84 |
| bakers function | ₹ | | 700 | 700 | • | • | • | • | 4480 | 18.67 |

NB: drawings are not to scale — they are to be used as a guide only.