




www.screeninnovations.com



Solo Connect

Wireless integration

Solo Connect integrates Solo into your control system through IR or direct contact input, and wirelessly triggers the Solo screen via RF.

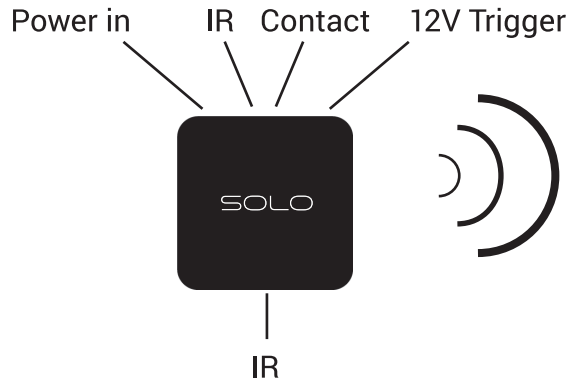

RJ-12 Pinout: 

HEX CODES



UP

```
0000 006c 0000 000c 0006 011b 0006 011b 0006
00bb 0006 00bb 0006 00bb 0006 00bb 0006
00bb 0006 00bb 0006 00bb 0006 00bb 0006
011b 0006 08a4
```



STOP

```
0000 006c 0000 000c 0006 011b 0006 011b 0006
00bb 0006 00bb 0006 00bb 0006 00bb 0006
00bb 0006 00bb 0006 00bb 0006 011b 0006 011b
0006 08a4
```



DOWN

```
0000 006c 0000 000c 0006 011b 0006 011b 0006
00bb 0006 00bb 0006 00bb 0006 00bb 0006
00bb 0006 00bb 0006 00bb 0006 011b 0006
00bb 0006 08a4
```

FCC warning: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC ID: DWNSOLO

Solo, the Solo wordmark, and the Screen Innovations logo are registered trademarks, and the exclusive property of Screen Innovations.

Change Notice:

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.