

SS-MF750H

Floor Standing Speaker



Key Features

- 3 Way, 4 Driver Floor-Standing Speaker
- Dual 8" HOP Diaphragm Material Reinforced with Kevlar® Fiber - Bass Driver
- 3¼" HOP Diaphragm Material Reinforced with Kevlar® Fiber - Mid Driver
- 1" Nano-Fine® Balanced Dome Tweeter
- 200W Maximum Input Power
- Frequency Range 35Hz - 50kHz
- Screw Type Binding Posts

Additional Features

General Features

- Black Ash Type Finish
- 3 Way, 4 Driver Floor-Standing speaker
- Dual 8" HOP Diaphragm Material Reinforced with Kevlar® Fiber - Bass Driver
- 3¼" HOP Diaphragm Material Reinforced with Kevlar® Fiber - Mid Driver
- 1" Nano-Fine® Balanced Dome Tweeter
- Bass Reflex Enclosure
- One Pair Per Package

Audio Features

- Sound Reproduction to 50 kHz (for High Resolution Audio)
- 200W Maximum Input Power
- 8 ohm Impedance
- Frequency Range 35Hz - 50kHz


Inputs

- Screw Type Binding Posts

Convenience Features

- Magnetically Shielded
- Removable Grille Cloth
- Includes Speaker Cable

Key Technology

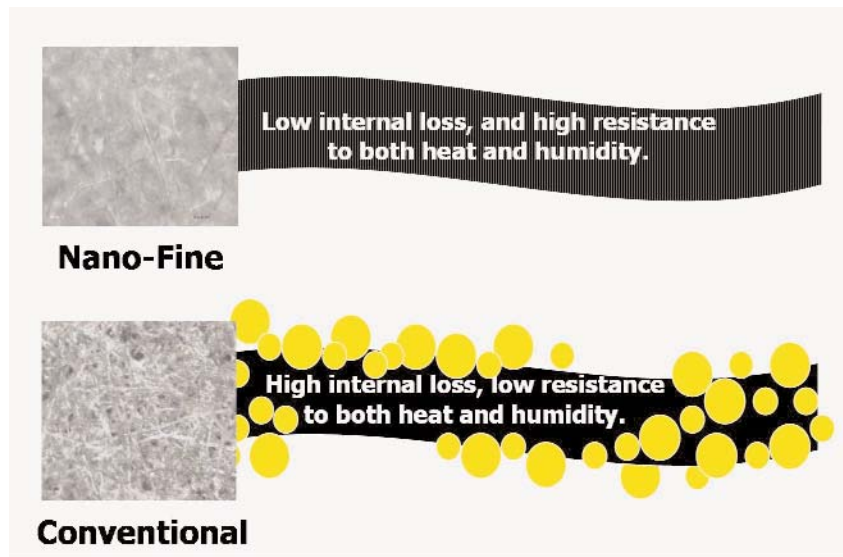

Nano-Fine vs. Conventional

Specifications

Specifications

- Power Handling: 200W
- Frequency Range: 35-50,000 Hz
- Sensitivity: 90 dB

Accessories

Supplied Accessories

- Instruction Manual
- Speaker Wire: 8.2' x 2 (2.5M x 2)

Weights & Measures

- Approx. Dimensions (w/h/d): 9.5" x 41.3" x 11.6" (240 x 1050 x 295 mm)
- Approx. Weight: 31.3 lbs. (14.2 kg)

UPC Code

- 027242621749