

STR-DE595

Receiver



Key Features

- 5 Channel Power Rating: 100W Per Channel x 5 (8 ohms 1 kHz, THD 0.7%)
- Dolby® Digital, dts®, Dolby® Pro Logic® II Decoding
- A & B / A or B Speaker Switch
- 2 Component Video Inputs: HD Pass (80 MHz)
- UniCommander® Remote Control
- 5.1 Multi-Channel Analog Input



Additional Features

Amplifier Section

- Black Finish A/V Receiver
- 5 Channel Power Rating: 100 Watts Per Channel x 5 (8 ohms 1 kHz, THD 0.7%)
- Dolby® Digital, dts®, Dolby® Pro Logic® II Decoding
- 32-bit Dolby® Digital, Dolby® Pro Logic® and dts® decoder
- 32-bit DSP with 11 Acoustic Environments
- Digital Cinema Sound™ System with Cinema Studio EX modes
- Sound Field Modes (Movie, Music, AFD, 2 Channel):
Movie: 3 Modes;
Music: 3 Modes;
AFD: 4 Modes;
2 Channel: 1 Mode
- Station Presets: 30 Total
- A & B/A or B Speaker Switch
- Sound Field Link
- Circuit Device (Discrete)

Inputs and Outputs

- Multi-Channel IN (Analog) 5.1 Channel Input
- Headphone Jack 1/4" Jack
- Analog Audio Input x 2
- Analog Audio Output x 1
- Optical Digital Input x 2
- Coaxial Digital Input x 1
- Pre-Out x 1 (Subwoofer)
- Composite Video Input x 3
- Composite Video Output x 1
- Component Video Input x 2 (HD Pass 80 MHz)
- Component Video Output x 1 (HD Pass 80 MHz)
- Monitor Out x 1 (Composite)
- AC Outlet (switched) x 1

Convenience Features

- UniCommander® Pre-Programmed Remote Control




▲ = Step-Up Feature

Preliminary and Confidential


SONY

STR-DE595

Receiver

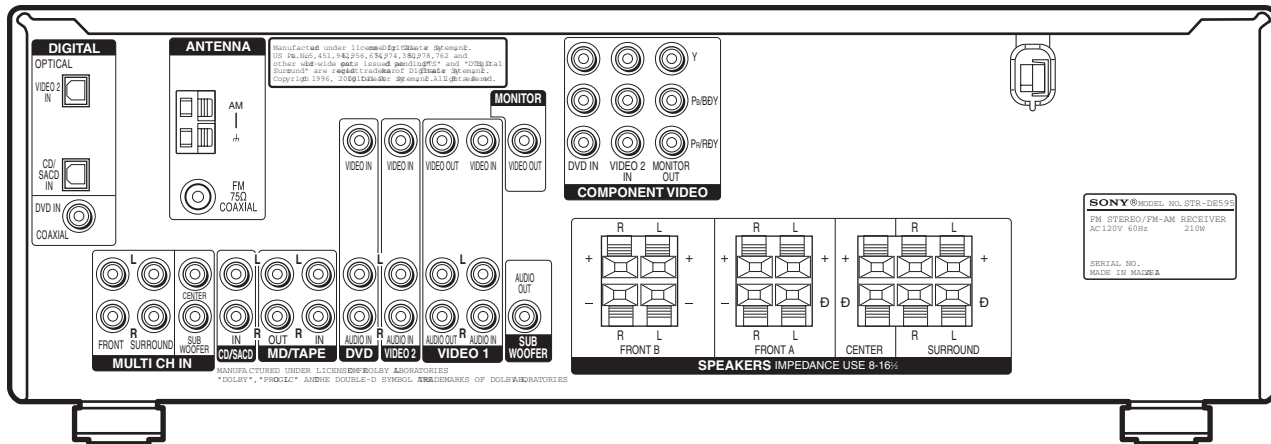


Key Technology

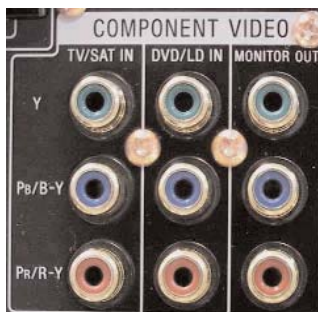

Component Video Switching

2 Component Video Inputs, 1 Component Video Output
HD Switching, 80 MHz Bandwidth
Ensures Minimal Signal Loss

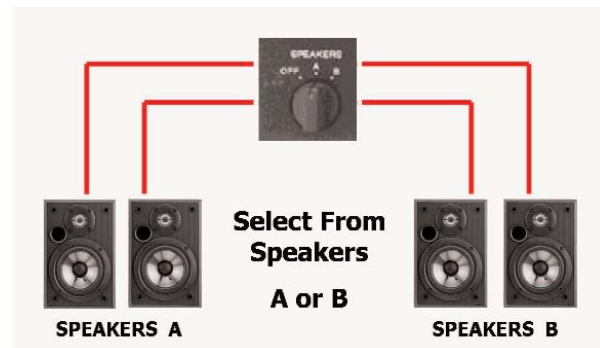

A/B Switching

Specifications

Specifications

Amplifier Section

- 5 Channel Power Rating: 100 Watts Per Channel x 5 (8 ohms 1 kHz, THD 0.7%)
- Stereo Power Rating: 90 Watts Per Channel x 2 (8 ohms 40 Hz-20 kHz, THD .09%)
- FM Tuning Range: 87.5 - 108 MHz
- AM Tuning Range: 530 - 1710 kHz
- Display Type (8 Seg.)
- Line Input S/N Ratio: 96 dB
- Frequency Response Line (CD): 10 Hz-70kHz +.5 dB/-2 dB
- Line (CD) Input Sensitivity Impedance: 500mV/50 kohm

- Record Out Level Impedance: 500mV/10 k ohm
- Subwoofer Pre-Out Level Impedance: 2V/1 k ohm

Video Section

- Composite Video Input Sensitivity Impedance: 1 Vp-p/75 ohm
- Component Video (Y/Pb/Pr) Input Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm
- Composite Video Output Sensitivity Impedance: 1 Vp-p/75 ohm

- Component Video (Y/Pb/Pr) Output Sensitivity Impedance: (Y) 1 Vp-p/75 ohm; (Pb) .7 Vp-p/75 ohm; (Pr) .7 Vp-p/75 ohm

General

- Power Requirements: 120V AC, 60 Hz
- Power Consumption: 210 Watts
- Power Consumption (Standby): 0.3 Watts

Accessories

Supplied Accessories

- Instruction Manual
- Remote Model: RM-U306A
- AM Loop Antenna
- FM Wire Antenna

Weights & Measures

- Approx. Dimensions (w/h/d): 17" x 5.7" x 11.8" (430 x 145 x 300mm)
- Approx. Weight: 15.4 lbs. (7 kg)

UPC Code

- 027242618190