



# WUBR-507N (M)

## Feature

- Chipsets: Ralink RT3572
- Compliant with 802.11a/b/g/n Dual-Band standard
- Interface: 6-Pin or USB 2.0 Type A (optional)
- Antenna: 2 x U.FL connector
- Speeds up to 300Mbps
- Advanced security: 64/128-bits WEP, WPA, WPA2
- Support Windows 2000/ XP/ Win CE/ Vista/ Win7, Linux, MAC



## 802.11a/b/g/n USB Module

*6-Pin or Type A Connection with Ralink RT3572, 2T2R*

### Latest 802.11n Wi-Fi Technology

SparkLAN WUBR-507N(M) is an 802.11n Wi-Fi USB module, which is backward compatible with 802.11a/b/g standard. With advanced 2T2R MIMO technology, WUBR-507N(M) delivers ultimate wireless data rate for up to 300Mbps. It is designed properly for any wireless enabled devices with standard 6-Pin connector USB Type A (optional).


### Secure Wireless Connection

WUBR-507N(M) also features advanced WEP encryption, WPA, and WPA2 to help to protect data over wireless communication without sacrificing the performance.

## Application

- Networking Equipment
- USB Dongle
- Industrial Computers
- Medical Device
- POS (Point-of-Sale) System
- Self-Service KIOSK
- Gaming Machine
- Consumer Electronics


## Mechanical Dimension (mm)

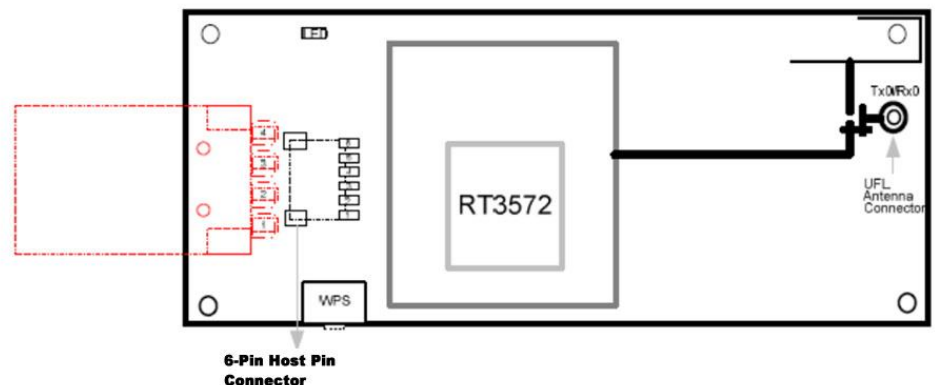


# WUBR-507N (M)

## Related Product

- WUBR-506N  
802.11a/b/g/n dual band USB  
Module

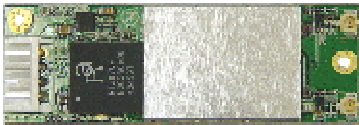

- WUBR-125GN  
802.11b/g/n USB Module

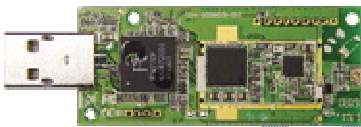

## Ordering Info

- WUBR-507N(M)  
802.11a/b/g/n USB Module

WUBR-507N(M)	U.FL+6-Pin
WUBR-507N(MU)	U.FL+USB Type A
WUBR-507N(P)	Printed Antenna +USB Type A
WUBR-507N(P6)	Printed Antenna +6-Pin

## Specifications

### Standard

802.11a/b/g/n

### Chipset

Mac/BB/RF Ralink RT3572

### Host Interface

6-Pin Connector (Pin 1: v+, Pin 2: D-, Pin 3: D+, Pin 4: GND, Pin 5: LED, Pin 6: RF) or Type A (optional)

### Radio

Antenna 2 x U.FL connector (2T2R)

Operating Frequency 802.11a ISM Band: 5.1 ~ 5.8GHz  
802.11g ISM Band: 2.4 ~ 2.4835GHz

Modulation 802.11b: DSSS (DBPSK, DQPSK, CCK)  
802.11g/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)  
802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

Output Power 802.11a: 11dBm ± 1.5dBm@54Mbps  
802.11b: 16dBm ± 1.5dBm@11Mbps  
802.11g: 13dBm ± 1.5dBm@54Mbps  
802.11an HT20: 10dBm ± 1.5dBm 802.11an HT40: 10dBm ± 1.5dBm  
802.11gn HT20: 12dBm ± 1.5dBm 802.11gn HT20: 12dBm ± 1.5dBm

Receive Sensitivity 802.11a: -72dBm ± 2dBm 802.11b: -86dBm ± 2dBm  
802.11g: -72dBm ± 2dBm  
802.11an HT20: -68dBm ± 2dBm 802.11an HT40: -65dBm ± 2dBm  
802.11gn HT20: -68dBm ± 2dBm 802.11gn HT40: -65dBm ± 2dBm

### Power consumption

Continue TX Max 400mA@2TX  
Continue RX Max 250mA@2RX

### Operating Voltage

DC 5V ± 10%

### Environmental

Temperature Range 0 ~ 60°C (Operating) -20 ~ 70°C (Storing)  
Humidity 5 ~ 90% (Operating) 5 ~ 95% (Storing)  
(Non-Condensing)

### Physical Specification

Dimensions 60mm X 25mm (±0.5mm)  
Weight TBD

### Software

Driver Windows 2000/XP/ WinCE/ Vista,/ Win7, Linux, MAC  
Security 64/128-bits WEP, WPA, WPA2

# Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device is restricted to indoor use when operated in the 5.15 to 5.25 GHz frequency range.

## **FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This module is intended for OEM integrator. The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates this module.

20cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

## **LABEL OF THE END PRODUCT:**

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: RYK-WUBR507N ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label:

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.