




PREMIER®

Self-Cleaning™ Residential Electric Water Heaters



Our most efficient residential electric water heaters – 3"-thick CFC-free foam insulation, Silencer™ heat trap nipples and other features combine to produce a new, higher .95 energy factor to maximize savings on operating costs.



Self-Cleaning Turbo Coil™ Dip Tube –

Features jet ports that direct incoming cold water to create turbulence that reduces sediment buildup in the tank. This self-cleaning action helps prolong tank life and maintain high energy-efficiency.

Blue Diamond® Glass Coating – Provides ultimate protection... over twice the corrosion resistance compared to industry-standard glass lining.

Sandhog® Low-Watt Density Incoloy Steel Upper and Lower Heating Elements – Designed to operate more efficiently and last 2-3 times longer than standard copper heating elements.

Long-Lasting PEXAN™ Dip Tube – Like all State residential water heater dip tubes, the Turbo Coil is made of PEXAN™, a cross-link PEX polymer that can withstand long-term exposure to water temperatures up to 400°F.

Magnesium Anode Rod – Helps protect against corrosion for longer life.

Durable Tamper-Resistant Brass Drain Valve

Factory-Installed Side-Mounted Temperature & Pressure (T&P) Relief Valve

10-Year Limited Tank and Parts Warranty

Code Compliance – All models meet or exceed federal minimum energy standards effective January 20, 2004, according to latest editions of the National Appliance Energy Conservation Act (NAECA). They also comply with the latest editions of the BOCA National Codes, CEC, UBC, SBCC, CABO and HUD standards. All models UL Listed according to safety specifications outlined in Underwriters Laboratories Inc. Standards for Safety (UL 174).



For more information on State® contact:
State Water Heaters
500 Tennessee Waltz Parkway, Ashland City, TN 37015
800-365-0024 Toll-free USA
www.statewaterheaters.com

SRESS00506

September 2007R

SOLID. STATE.






PREMIER[®]

Self-Cleaning[™] Residential Electric Water Heaters

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GALLON CAPACITY	ELEMENT WATTAGE 240 VAC		RECOVERY 90°F RISE	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS)
				STANDARD	MAXIMUM			A HEIGHT	B DIAMETER	C	
TALL MODELS											
EPX 40 DXRT	56	.95	40	4500	5500	21	24	60-1/2	20	53-1/2	125
EPX 52 DXRT	60	.95	50	4500	5500	21	24	57	22-1/2	47-1/2	140
EPX 66 DXRT	72	.95	66	4500	5500	21	24	62	24	53	185
EPX 80 DXRT	81	.95	80	4500	5500	21	24	62	26	52	225
MEDIUM MODELS											
EPX 40 DXRS	52	.95	40	4500	5500	21	24	47	22-1/2	37-3/4	125
EPX 50 DXRS	62	.95	50	4500	5500	21	24	50	24	40-1/2	155

Recoveries are rounded to nearest gallon
 Water Connections - 3/4" male NPT on all models
 Top-mount T&P Valve not available

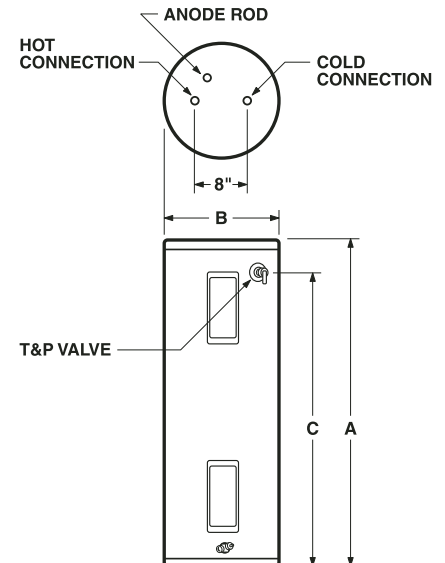

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on State[®] contact:
 State Water Heaters
 500 Tennessee Waltz Parkway, Ashland City, TN 37015
 800-365-0024 Toll-free USA
 www.statewaterheaters.com

SOLID. STATE.

