

POWER REQUIREMENTS

- Utilizes standard 9V alkaline battery (not included). To install, simply remove battery door.
(NOTE: The *Input* activates battery. To conserve energy, unplug when not in use.)
Power Consumption: approx. 4mA.
- **USE DC POWER SUPPLY ONLY!** Failure to do so may damage the unit and void warranty.
DC Power Supply Specifications:
 - 9V DC regulated or unregulated, 100mA minimum;
 - 2.1mm female plug, center negative (-).
- **Optional factory power supply is available**, Model #DC2.

WARNINGS

- Attempting to repair unit is not recommended and may void warranty.
- Missing or altered serial numbers automatically void warranty. For your own protection, be sure serial number labels on the unit's back plate and exterior box are intact.


ONE YEAR LIMITED WARRANTY . PROOF OF PURCHASE REQUIRED

Manufacturer warrants unit to be free from defects in materials and workmanship for one (1) year from date of purchase to the original purchaser and is not transferable. This warranty does not include damage resulting from accident, misuse, abuse, alteration, or incorrect current or voltage. If unit becomes defective within warranty period, Tech 21 will elect to repair or replace it free of charge. After warranty expires, Tech 21 will repair defective unit for a fee.

ALL REPAIRS for residents of U.S. Call Tech 21 for **Return Authorization Number**. Manufacturer will **not** accept packages without prior authorization, pre-paid freight (UPS preferred) and proper insurance. International purchasers should contact the authorized Tech 21 distributor in their particular country.

FOR PERSONAL ASSISTANCE & SERVICE

Contact Tech 21, Inc., weekdays from 9:00 AM to 5:00 PM, EST.

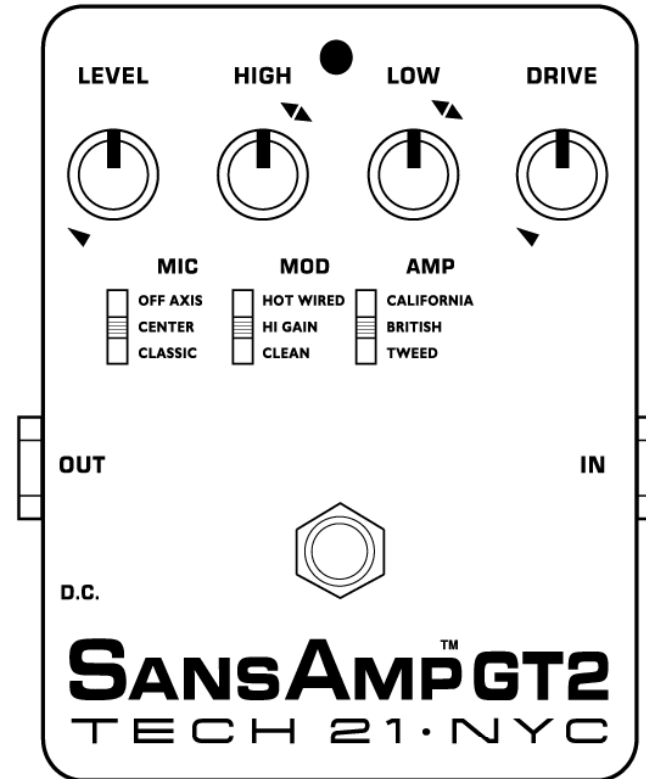

OWNER'S MANUAL

DESIGNED AND MANUFACTURED IN THE U.S.A.

TECH 21
NEW YORK CITY

T: 973-777-6996 • E: info@tech21nyc.com • W: www.tech21nyc.com
© 1993 Tech 21, Inc.



THE HISTORY OF SANSAMP™

SansAmp Tube Amplifier Emulators are engineered for direct recording and live performances. They offer players and engineers the warm, natural, unprocessed sounds of a wide spectrum of tube amplifiers --without altering the tonal personality of the instrument.

The original SansAmp pedal (SansAmp Classic) was conceived and developed by a guitarist who possesses the unusual combination of a trained ear and electronics expertise. The revolutionary F.E.T. hybrid-based technology was designed in the true tradition of tube amplifiers in their **totality** --with a pre-amp stage and an output stage. It incorporates the harmonics and sweet overdrive characteristics unique to tube amplifiers --largely caused by what is referred to as "push-pull" symmetrical clipping. (A single tube is physically incapable of accomplishing the same results.) SansAmp captures these characteristics and uniquely does so even at low volume levels.

Voiced for full-range systems and available in various formats, SansAmp delivers **consistent** professional quality sound studio to studio, club to club, arena to arena. One convenient unit gives you the most coveted trademarked sounds and the flexibility to refine and redefine your own. Each SansAmp responds and interacts with the dynamic as of your individual playing style, your individual musical style, and your instrument's individual tonality. All of these factors play an important role in the resulting sound, which will ultimately be yours alone.

THE CONCEPT OF SANSAMP GT2

Tech 21's proprietary Tube Amplifier Emulation Circuitry has been engineered into a new, high performance module. With this design, you can "architecturally" create your own rig in an instant.

Simple to operate, SansAmp GT2 gives you immediate access to your choice of amplifier, how you would modify it, and which cabinet/mic placement is best for your purposes. On-board post-equalization has been incorporated to give you optimum control.

Here, we've taken the best parts of the most-wanted tube amplifier set-ups and broken them down into components. You can mix and match specific sound characteristics in intriguing ways that would otherwise be physically improbable, probably impractical, and definitely not cost effective.

As your needs change and as your imagination flourishes, SansAmp GT2 gives you the freedom and opportunity to explore, create, build and rebuild sound instantly.

SIGNAL LEVEL TO INPUT

Signal level to the *Input* should be close to that of a standard electric guitar (approx -10dB/250mV). Hotter signals can over-drive the *Input* of SansAmp GT2, even in the cleanest settings. Should you purposely or accidentally send a hot signal, it will not harm the unit.

GETTING STARTED IS WAY ENTIRELY TOO EASY

Get your SansAmp GT2 up and running before reading the entire manual. However, by not reading the manual, you'll miss getting the most out of your new investment.

1. Plug your instrument into the **Input**.
2. Send the **Output** direct to tape, amp or mixer.
3. Decide which amp style you want to start with first and set all three **Character Switches** as follows, STRAIGHT ACROSS:

the top (California) for	Mesa/Boogie®-style
the middle (British) for	Marshall®-style
the bottom (Tweed) for	Fender®-style
4. Set **Knob Controls** :

Low and High	11 o'clock
Drive and Level	12 o'clock
5. Tweak as desired.

OVERVIEW OF CONTROLS

Input to Output, the signal path travels from **right to left**. Begin building your rig with the **Character Switches**. First choose the amplifier tonal character you want. Then the modification to suit your musical preferences. Match it up with the best speaker cabinet/mic placement combination accordingly. The **Knob Controls** fine tune the sound for use in any application, be it direct recording or live performances.

GUIDE TO CHARACTER SWITCHES

AMP

Each of the three positions affects multiple dimensions of the personality traits inherent to each amplifier type. This switch is not a simple EQ change, nor does it just affect the gain structure. Each amplifier type has its own tonality and its own input sensitivity. Each reacts differently to the dynamics of the player and to the signal level of the instrument.

CALIFORNIA	=	Mesa/Boogie®-style
BRITISH	=	Marshall®-style
TWEED	=	Fender®-style

MOD

Influences the gain structure of the **AMP** style selected.

- CLEAN** : Gives you a stock tube amp set-up.
HI GAIN : Gives you an extra gain stage, as if you were to install an additional 12AX7 tube in the pre-amp stage.
HOT-WIRED : Produces a "spitty, tube-driven-past-the-brink texture."*
*This descriptive quote is taken from Tom Mulhern's review of the SansAmp Classic pedal published in *Guitar Player* magazine.

MIC

Determines orientation and distance of mic placement in relation to the cabinet. Regardless of the position of this switch, it is as if the cabinet is being miked in a "dead room" or isolation booth, without ambiance.

CLASSIC : Achieves a flat response associated with distant mic placement. Similar to a combo amp loaded with original "blue frame" Jensen®-type speakers. This position increases mid-range content and there's greater definition of notes to cut through a cluttered mix. It is recommended for classic *early* tube amp sounds, and live applications, in particular.

CENTER : Has peaks and valleys associated with close miking. Similar to a 4x12 cabinet with Celestion®-type speakers having a mic at the center of a cone. There is greater high mid-range content and increased low end. It is recommended for achieving big, mega crunch, balls-to-the-wall results.

OFF-AXIS : Has peaks and valleys associated with close miking, except the mic is positioned at the edge of a speaker cone. Similar to *Center*, but it produces a smoother, softer sound with less upper mid-range content. When used in conjunction with the *Hot-Wired MOD* position, it will round off the tone.

GUIDE TO KNOB CONTROLS

DRIVE

Adjusts the overall amount of gain and overdrive. Similar to when the output section of a tube amp is being pushed.

LOW, HIGH

These are **active** tone controls. Cut or boost from arrow indicators. This on-board post-EQ section gives you full control at your fingertips. Boosting *Low* and *High* compensates for the limited range of speaker cabinets and combos. (See *Universal Output*.)

Hint: Set EQ at mixing board flat and adjust SansAmp GT2 to taste. If additional or more complex EQ curves are desired, use equalization at console or an outboard unit.

LEVEL

Adjusts the output level without altering any of the tonal characteristics.

For recording applications, we recommend setting at least halfway (12 o'clock).

For best results with an amplifier, the output level of SansAmp GT2 should be close or equal to the signal in bypass. Otherwise, it could overload the input of the amp and result in undesirable, ratty distortion. (Don't say we didn't warn you!)

UNIVERSAL OUTPUT

Another aspect of the technological advancement of SansAmp, is a **single** output that is physically compatible for **any** application. SansAmp's Universal Output makes it possible to use the same output with the following:

FULL RANGE(HiFi):

Tape
Studio Monitors
P.A.
Stereo

LIMITED RANGE (LoFi):

Rack Systems
Pre-Amps
Head & Cabinet
Combos
Practice Amps

OTHER INSTRUMENTS & APPLICATIONS

Be creative! SansAmp GT2 is not just for guitar. Try other instruments: bass, keyboards, drums, sax, vocals, etc. (Just remember to be aware of the input signal level as noted previously.) Also try using SansAmp GT2 in other applications, such as in mixdowns to liven up existing tracks.

For experimentation, start with a clean, flat setting:

- Set all 3 Character Switches at the bottom position.
- Set Knob Controls: Low and High at 11 o'clock
Drive and Level at 12 o'clock
Adjust EQ and gain structure to taste.

NOTEWORTHY NOTES & SUGGESTIONS

1. SansAmp GT2 is an interactive tool. It will react differently to various signal levels, as well as your individual touch. For instance, a hotter signal and a heavy hand will increase the gain structure and result in more overdrive. A cooler signal and a light touch decreases gain structure for a cleaner sound.
2. SansAmp GT2 has a very low noise level. If you experience noise, be aware of the following:
 - SansAmp GT2 may be amplifying noise emanating from the input source.
 - Check for pickup interference by moving guitar or turning the volume off. NOTE: Single coil pickups are much more likely to generate hum; and on-board active electronics have a tendency to create hiss.
 - As with the use of any tube amplifier or electronic device, particularly in high gain settings, you may be getting outside interference caused by lights, transformers, etc.
 - Be conscious of how the controls of SansAmp GT2 interact. They are atypically sensitive. You need not set everything at max to get maximum results.
3. The *Input* activates the battery. Don't forget to unplug or you will waste your battery. The highly efficient, low power consuming LED will fade as battery runs low (<6.5V). While SansAmp GT2 will continue to operate, we recommend replacing the battery at this time.
4. Buffered bypass ensures no high frequency signal loss through long cable lengths.


PLACEMENT ORDER OF OTHER EFFECTS

Place the following effects **BEFORE** SansAmp GT2:
Compression, Wah-wah, Envelope Filter


Place the following effects **AFTER** SansAmp GT2:
Chorus, Delay, EQ, Pitch Shifter, Reverb

SANSAMP GT2 SAMPLE SETTINGS


FENDER BASSMAN® STYLE

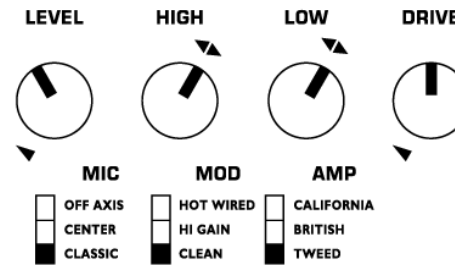


MARSHALL® PLEXI STYLE

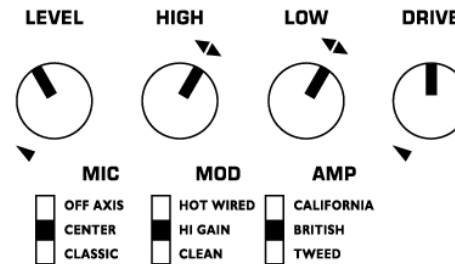

BOOGIE® ORIGINAL STYLE

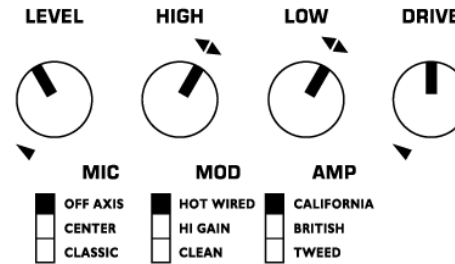

FENDER® FUNK STYLE

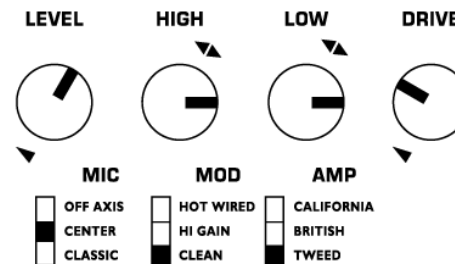


®Registered trademarks of their respective companies.


Names of sample settings are intended for descriptive purposes only and should not be construed as an endorsement or affiliation with the companies or artists named.

SANSAMP GT2 SAMPLE SETTINGS


FENDER®
SRV
STYLE

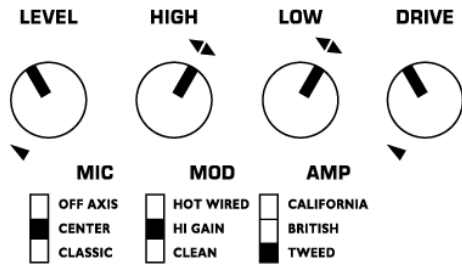


MARSHALL®
BLUES-
BREAKER
STYLE

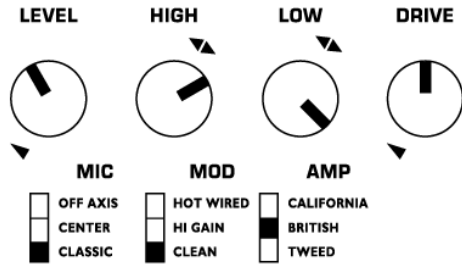

VAN HALEN
STYLE

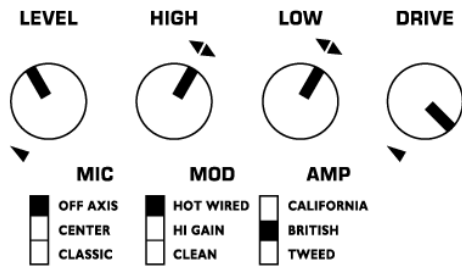


METALLICA
STYLE

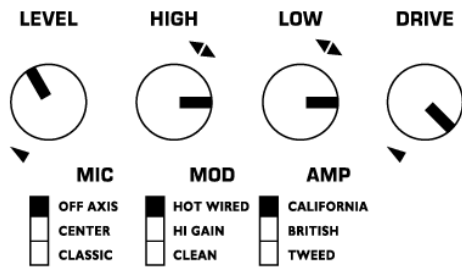


SANSAMP GT2 SAMPLE SETTINGS


KILLER METAL
STYLE

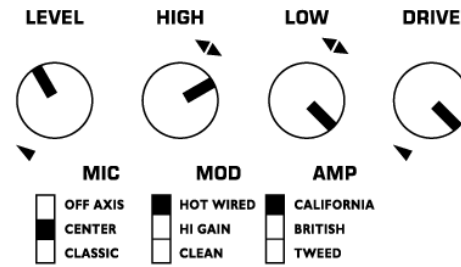


SLAP BASS

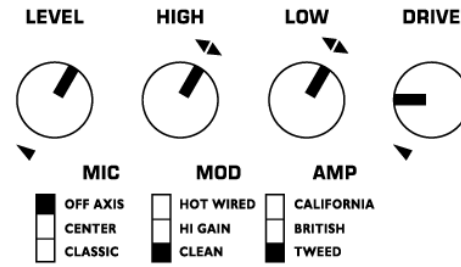

SVT® BASS
STYLE

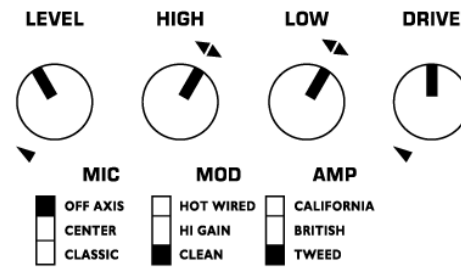

KING'S X
STYLE

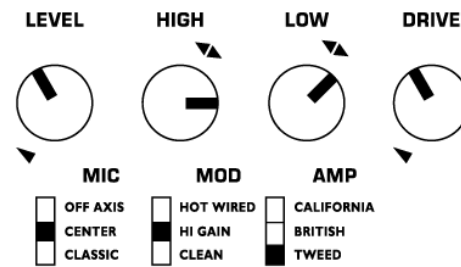

SANSAMP GT2 CUSTOM SETTINGS

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

SANSAMP GT2 CUSTOM SETTINGS

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED

NOTES:

LEVEL HIGH LOW DRIVE

MIC MOD AMP

<input type="checkbox"/> OFF AXIS	<input type="checkbox"/> HOT WIRED	<input type="checkbox"/> CALIFORNIA
<input type="checkbox"/> CENTER	<input type="checkbox"/> HI GAIN	<input type="checkbox"/> BRITISH
<input type="checkbox"/> CLASSIC	<input type="checkbox"/> CLEAN	<input type="checkbox"/> TWEED