



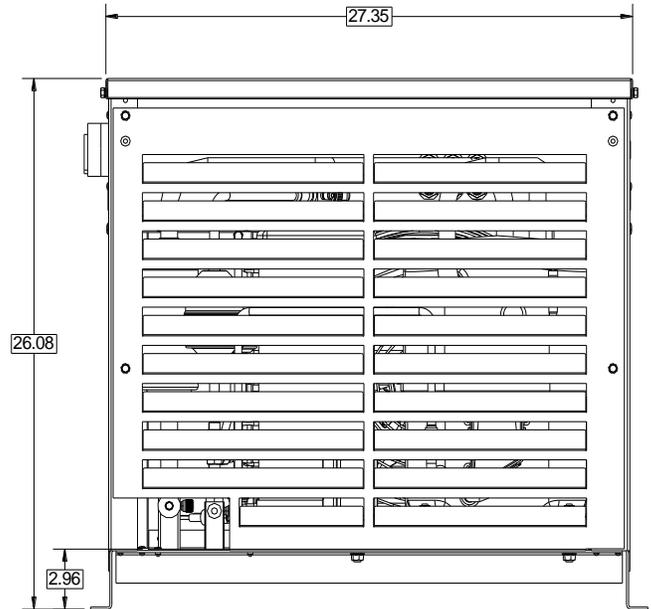

TECUMSEH OUTDOOR CONDENSING UNIT

Model AVA2510ZXTHS
BOM 32L2117-2E*

Air Cooled 2 1/2 HP
Application Low Temp
Refrigerant R404A
Volts-Hz-Ph 200-230/60/3

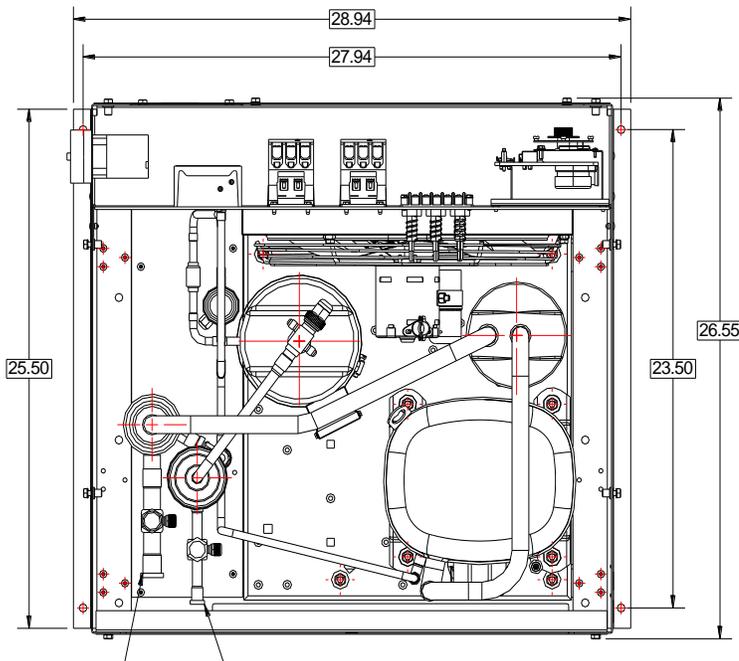

AVA2510ZXTHS	Dim. Enclosure, inch (mm)			Line connections		Pumpdown	Air flow	Oil Ch.	Gross weight
	L	W	H	Suction	Liquid	90% @ 90°F	SCFM	Oz.	Lbs. (kg)
	26.55 (674)	28.94 (735)	26.08 (662)	7/8"	1/2"	15.70	750	54.9	250 (113)

Factory charge 20 psig dry air, **MUST BE EVACUATED**

Evaporator		Ambient Temperatures														
		80°F			90°F			95°F			100°F			110°F		
T, °F	PSIG	BTUH	Watts	Cond T	BTUH	Watts	Cond T	BTUH	Watts	Cond T	BTUH	Watts	Cond T	BTUH	Watts	Cond T
-40	5.5	4400	1500	93	3700	1500	100	3300	1480	104	3000	1460	109	2200	1390	118
-35	8.0	5600	1710	95	4700	1690	103	4300	1670	107	3900	1640	111	3000	1570	120
-30	10.7	6800	1930	98	5800	1890	106	5300	1870	110	4800	1840	114	3900	1760	122
-25	14.0	8000	2150	101	6800	2100	109	6200	2080	113	5700	2040	117	4700	1960	125
-20	17.1	9200	2370	104	7800	2320	112	7200	2290	116	6600	2260	120	5500	2180	128
-15	19.3	10400	2600	107	8900	2550	115	8200	2520	119	7500	2490	123	6300	2420	130
-10	24.5	11600	2830	110	10000	2780	118	9200	2760	122	8400	2730	126	7100	2670	133
-5	28.8	12900	3070	114	11000	3030	122	10200	3010	126	9300	2980	129	7900	2940	136
0	33.5	14100	3310	117	12100	3280	125	11100	3260	129	10300	3250	133	8600	3220	140
5	36.5	15400	3550	121	13200	3540	129	12100	3530	133	11200	3530	136	9400	3520	143
10	43.7	16700	3800	125	14200	3810	133	13100	3810	137	12100	3810	140	10200	3830	146

Performance @ 60 Hz, Return gas 40°F, SubCooling 5°F

* **OPTION CODE:** See reverse side for Available Options

