

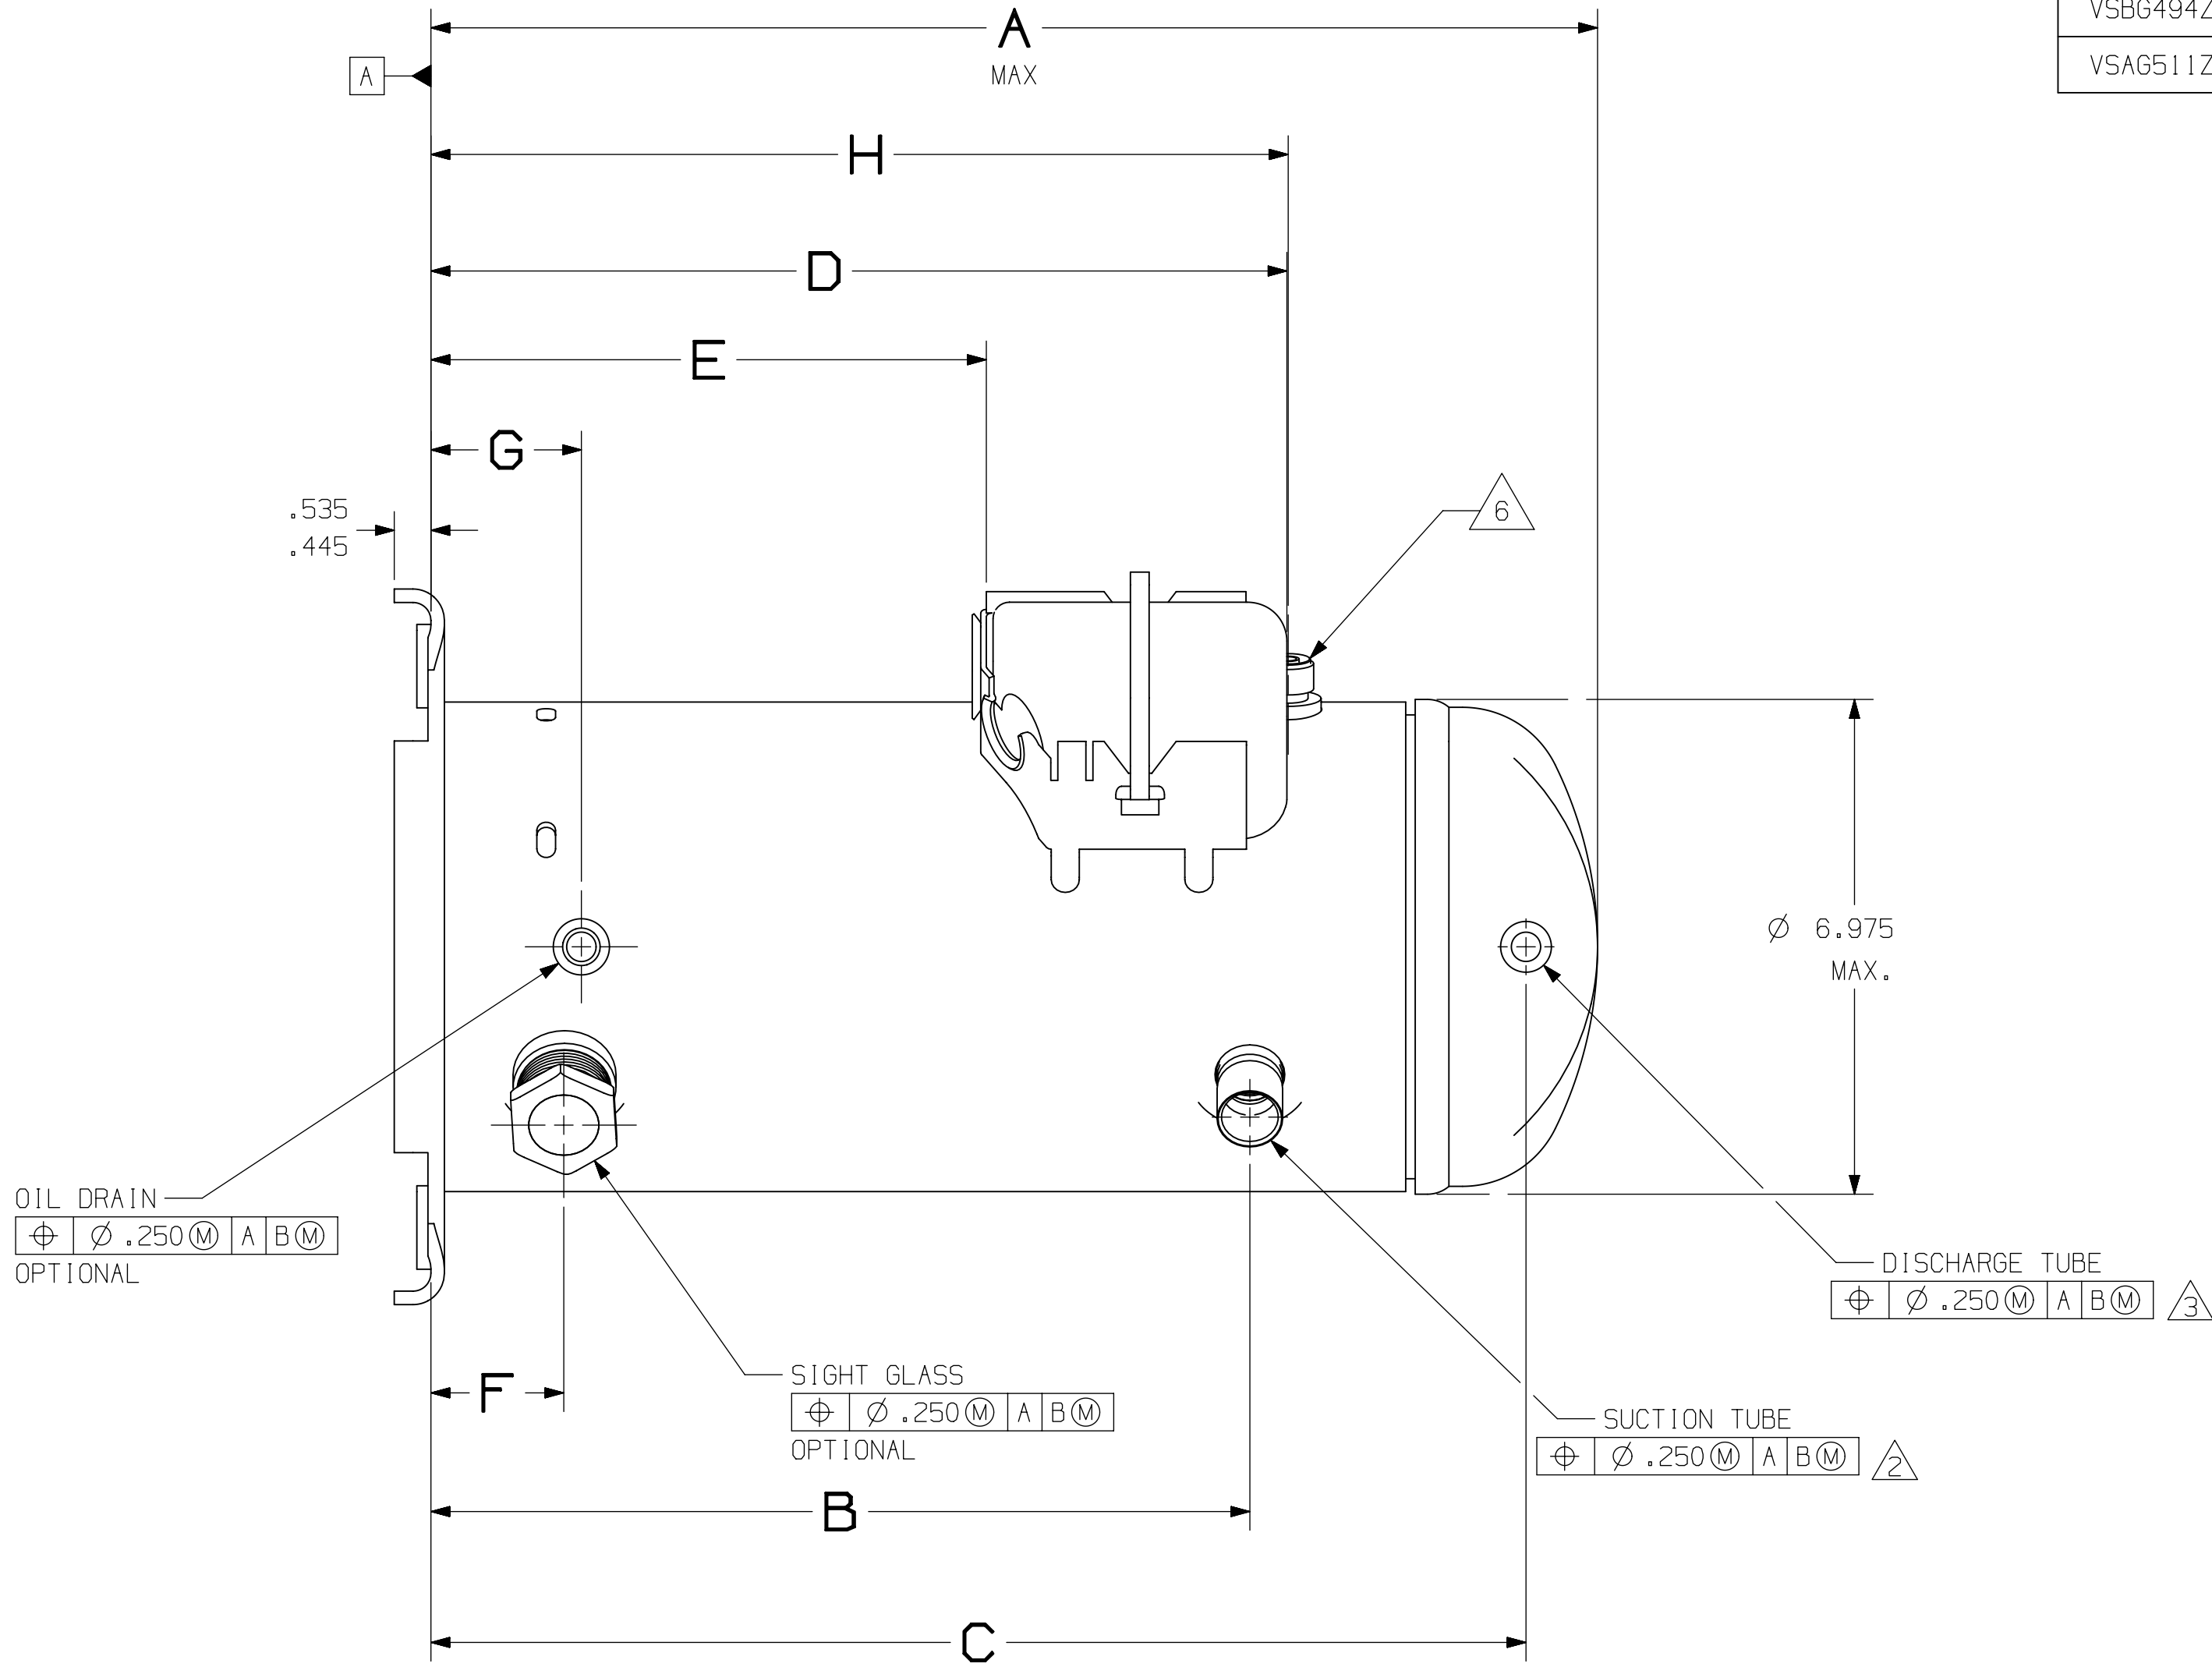


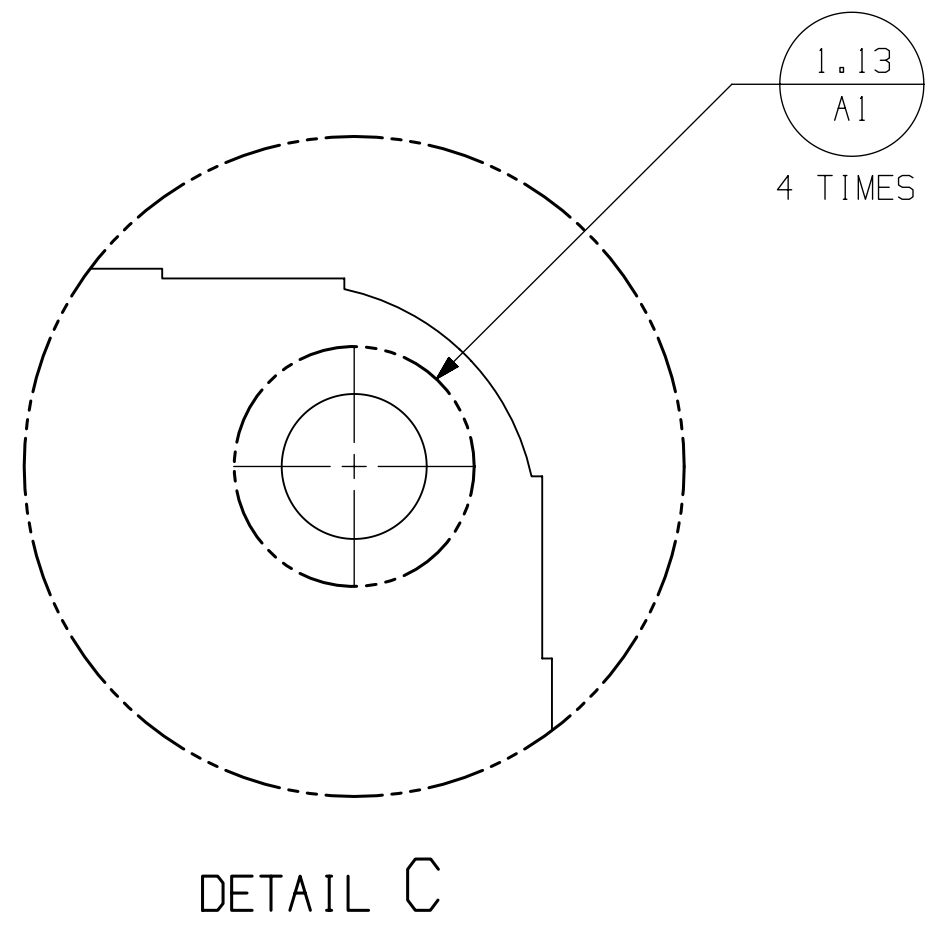

MODEL	VOLTAGE CODE	A MAX	B	C	D	E	F	G	H
VSAG475Z	XT	15.433	10.410	14.410	11.216	7.200	1.785	2.010	11.420
VSAG494Z	XT	15.433	10.410	14.410	11.216	7.200	1.785	2.010	11.420
VSAG511Z	XT	15.650	10.941	14.631	11.436	7.420	1.785	2.010	11.640
VSAG513Z	XT	15.650	10.941	14.631	11.436	7.420	1.785	2.010	11.640
VSBG475Z	NA	15.433	10.410	14.410	11.216	7.200	1.785	2.010	11.420
VSBG494Z	NA	15.433	10.410	14.410	11.216	7.200	1.785	2.010	11.420
VSBG511Z	NA	15.650	10.941	14.631	11.436	7.420	1.785	2.010	11.640

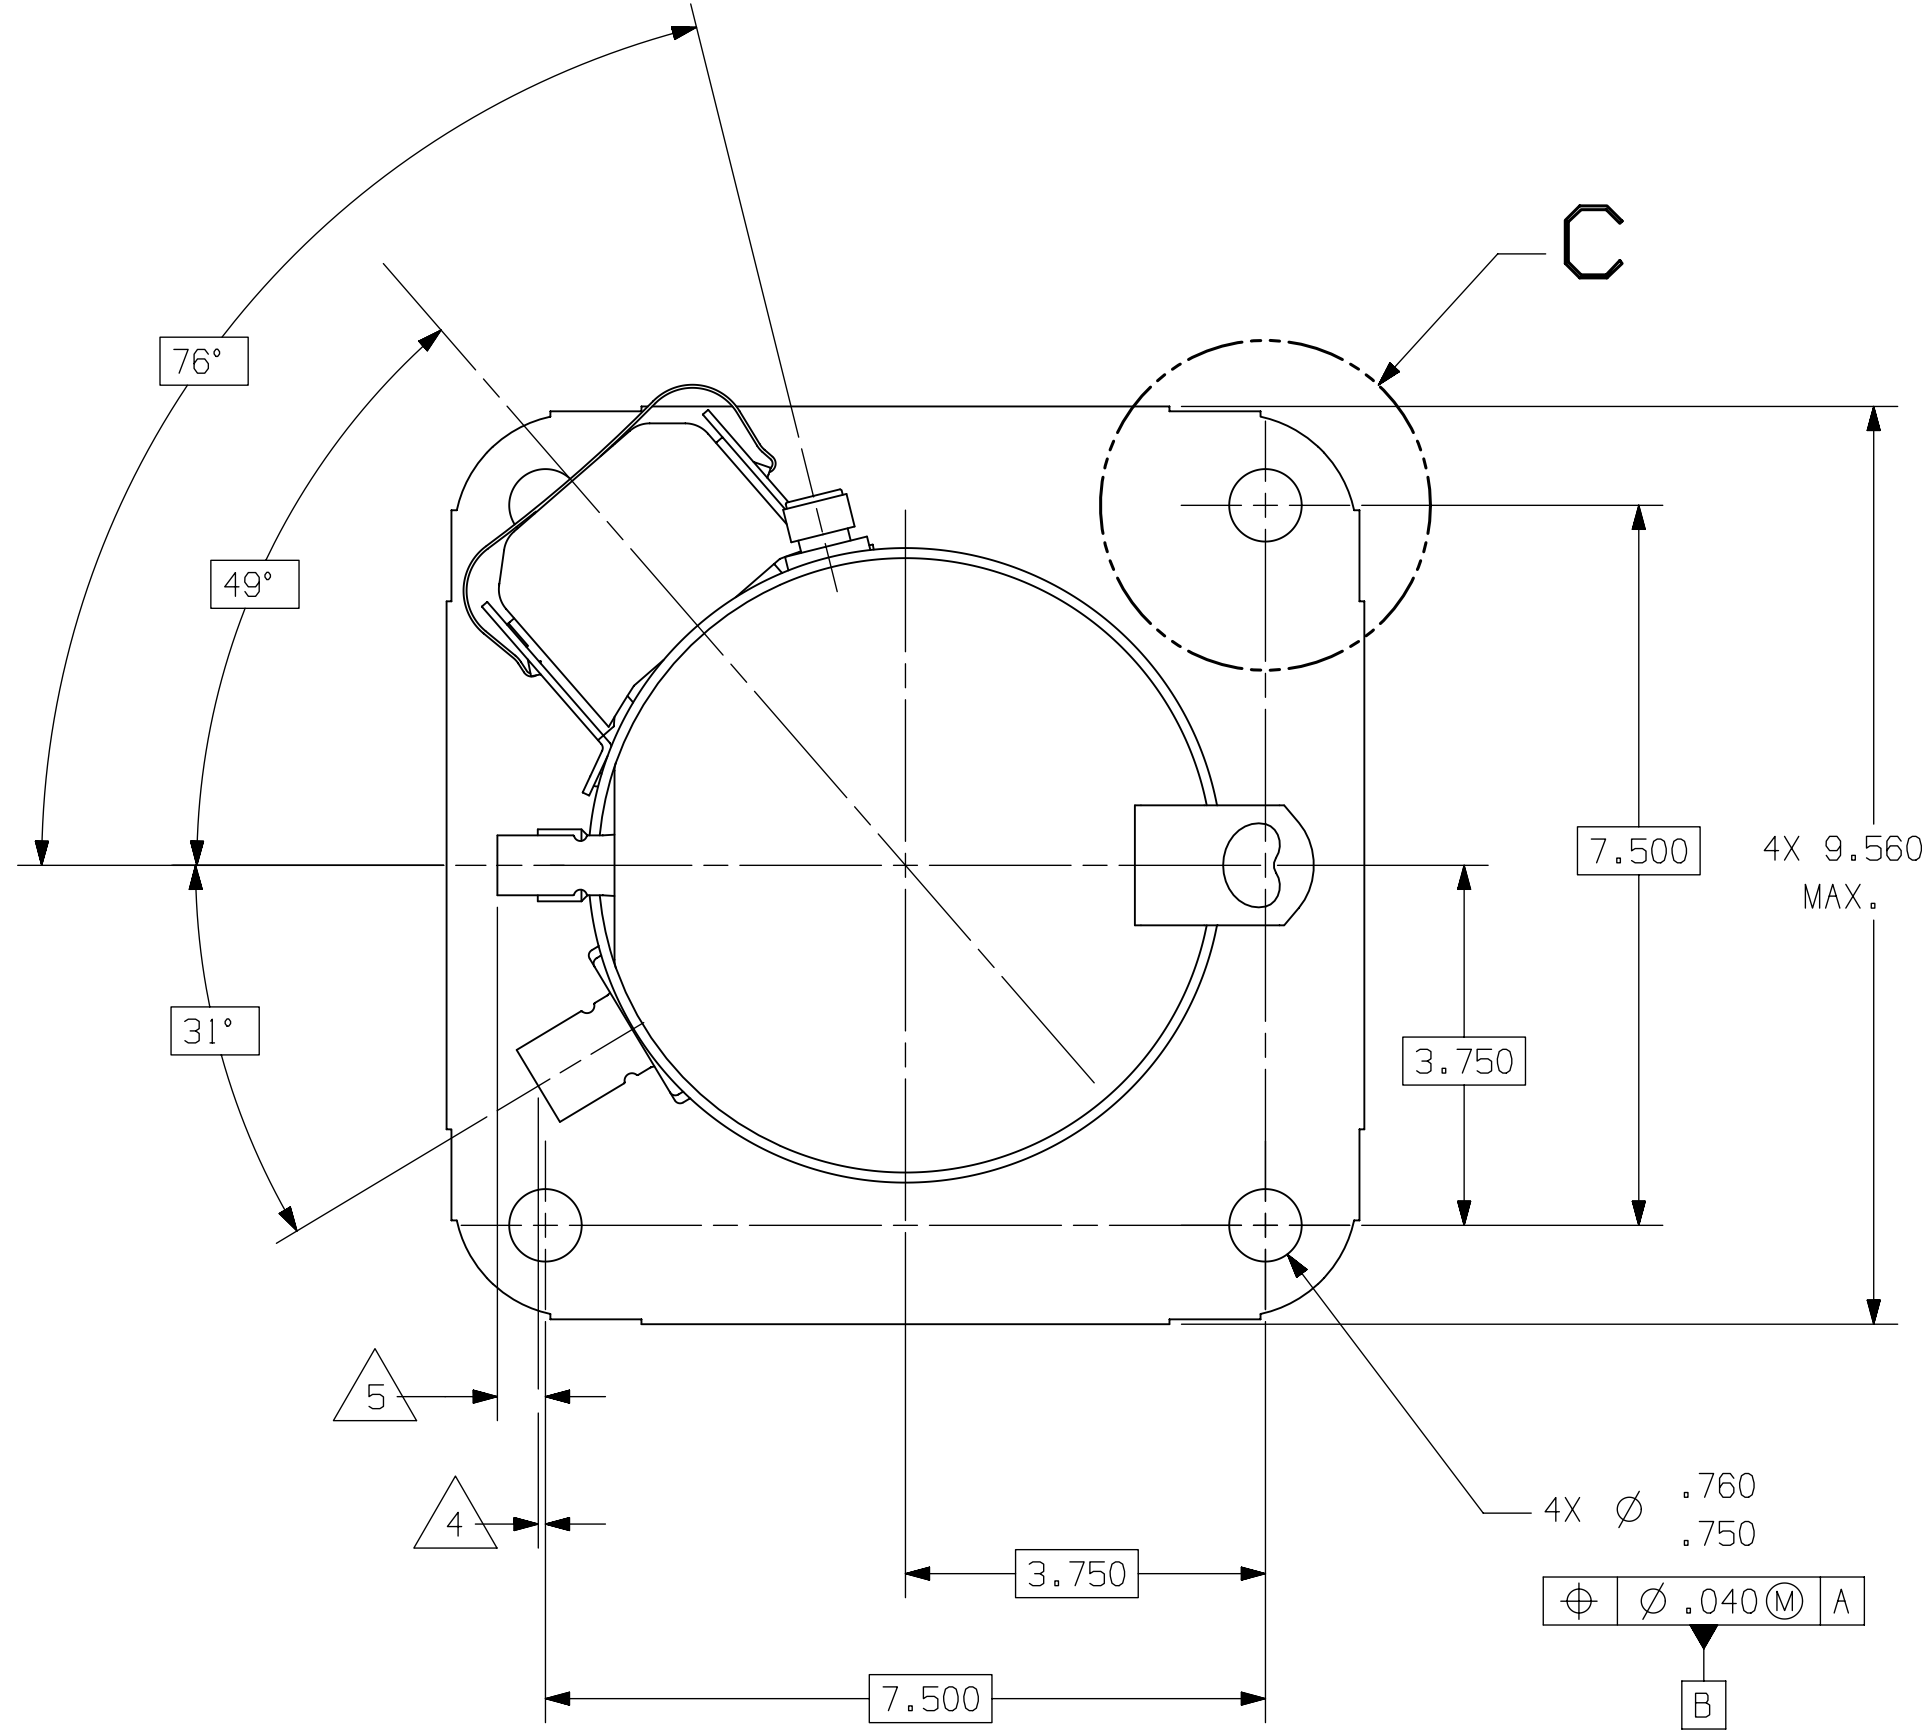

- NOTES:
- DIMENSIONS TOL $\pm .06$ UNLESS OTHERWISE SPECIFIED.
 - SUCTION TUBE COPPER PLATED STEEL (I.D. .762-.756)
 - DISCHARGE TUBE COPPER PLATED STEEL (I.D. .511-.505)
 - SUCTION TUBE = 0.138-0.018
 - DISCHARGE TUBE = 0.561-0.441
 - INJECTION ROTOLOCK STEEL (I.D. .220-.230) 11/16"-16 UNF 2A THREAD.
 - COMPRESSOR OPENINGS MUST BE PLUGGED.
 - MUST COMPLY WITH T.P.Co. GLOBAL SPEC 08.

ENGLISH

Q.A. SYMBOLS

★ = CATEGORY I

▲ = CATEGORY II

■ = CATEGORY III

VS = CATEGORY IV

REV	EC38474	DATE	23 JUN 11	NAME	SALES COMPRESSOR				DRAWING NO.	DCVS011	
Q.A.	ON FILE	APR.	ON FILE	SCALE	1:2				THIS PRINT SUPERSEDES ALL PRINTS PRIOR TO		
MATERIAL					NOTED					DRAWING NO. DCVS011	