

SPECIFICATIONS



CM302 30" Double Convection Oven W/ Microwave Upper

Appearance

Curved Glass / Steel frame	✓
Sens-A-Touch™ Electronic Control In Glass	✓
Oven Capacity - Cubic Feet, Upper or Single Oven	4.1
Oven Capacity - Cubic Feet, Lower	4.1
Finish: Black, White or Stainless Steel: Monochromatic Handle	✓

Performance

4 Cooksmart™ Combination Cooking Models	Upper Oven
Microwave Power Levels	10
Dual Element Bake	Yes
Roast	✓
Variable Broil	Yes
Third Element Convection	Yes
Convection - Bake	✓
Convection - Roast	Yes
Convection - Broil	Yes
Proof Mode	✓
Dehydrate Mode	✓
Sabbath Mode	✓
Temperature Probe	Upper Oven
Timed & Delay Timed Mode	✓

Convenience

Self-Cleaning Oven(s)	✓
Interior Venting	✓
Motorized Door Lock(s)	✓
Minute Timers	2
Child Lock-Out	Control Panel
Rack Positions	6
Number of Racks	6
Dual-Level Halogen Lights	A/M

General Information


Microwave Wattage	650
Broil/Bake Wattage	3,600 / 2,300
Third Element Wattage	2750
Dual-Rated 120/208-240 Volts, 3-Wire, 60HZ	✓
AMPS	50
Approximate Shipping Weight (LBS.)	370

Dimensions

Overall Dimensions - A*†	51 1/2
--------------------------	--------

Overall Dimensions - B* †	29 3/4
Overall Dimensions - C*	23 7/8
Overall Dimensions - D* **	22
Upper / Single Oven Interior Dimensions - Height	16 1/4
Upper / Single Oven Interior Dimensions - Width	25
Upper / Single Oven Interior Dimensions - Depth	17 1/2
Lower Oven Interior Dimensions - Height	16 1/4
Lower Oven Interior Dimensions - Width	25
Lower Oven Interior Dimensions - Depth	17 1/2
Custom Panel Dimensions - Height	-
Custom Panel Dimensions - Depth	-

Overall Dimensions

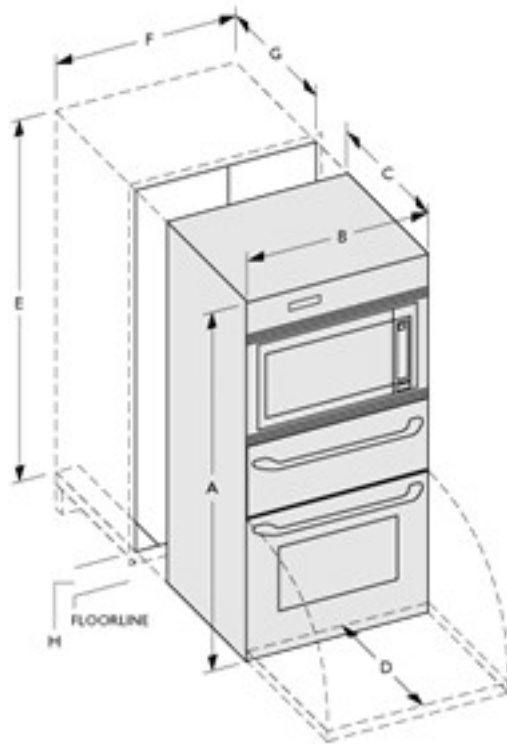

Sens-A-Touch is a trademark of Touch Sensor Technologies

Notes: All height, width and depth dimensions are shown in inches. For a detailed listing of approved cooktop models for this installation please refer to oven installation instructions.

*Please refer to installation instructions prior to making cutout.

**Largest door.

†Add 1/16" height and 1/8" width for stainless steel models (S-Series only.)

All models are UL approved. Select 30" models are CUL approved for sales in Canada. For immediate critical installation dimensions by fax, use your fax handset and call (775) 833-3600. Use code #8030 for a directory of Thermador products.