

HOME WEATHER STATION WITH WIND SPEED USER MANUAL

1. Features

- 1.1 Weather Forecast**
 - Sunny, Slightly Cloudy, Cloudy, Rainy and Cloudburst animation

- 1.2 Wind**
 - Wind Speed, Wind Chill and Gust
 - Displays m/s, knots, kmph and mph user selectable
 - Beaufort scale 1 ~ 12 [calm ~ hurricane]

- 1.2 Time**
 - Radio controlled time with Manual Time setting option
 - 12/24 hour user selectable
 - Dual Daily Alarm function
 - Daily Sunrise/Sunset, Moonrise/Moonset for 239 cities in USA, Canada & Mexico
 - Moon Phase display
 - Perpetual Calendar Up to Year 2099


- 1.3 Barometric Pressure**
 - Current and past 30hr Absolute and Relative Barometric Pressure reading
 - Barometric Pressure bar chart
 - Measures mb/hPa, inHg user selectable

- 1.3 Humidity**
 - Measurable range: 20 ~ 99%
 - Max/Min Memory

- 1.4 Temperature**
 - Indoor measurable range: 0 ~ 50°C [+32 ~ +122°F]
 - Measures °C / °F user selectable
 - Outdoor measurable range: -20 ~ 50°C [-4 ~+ 122°F]
 - Max/Min Memory [indoor & outdoor]

- 1.5 Wireless Outdoor Sensor**
 - Low-battery indicator for Outdoor Thermo Sensor
 - Wall Mount or Table Stand
 - One Wireless Thermo Sensor Included
 - 433MHz RF transmitting frequency
 - 30 meter [98 feet] transmission range in an open area

2. Main Unit Appearance

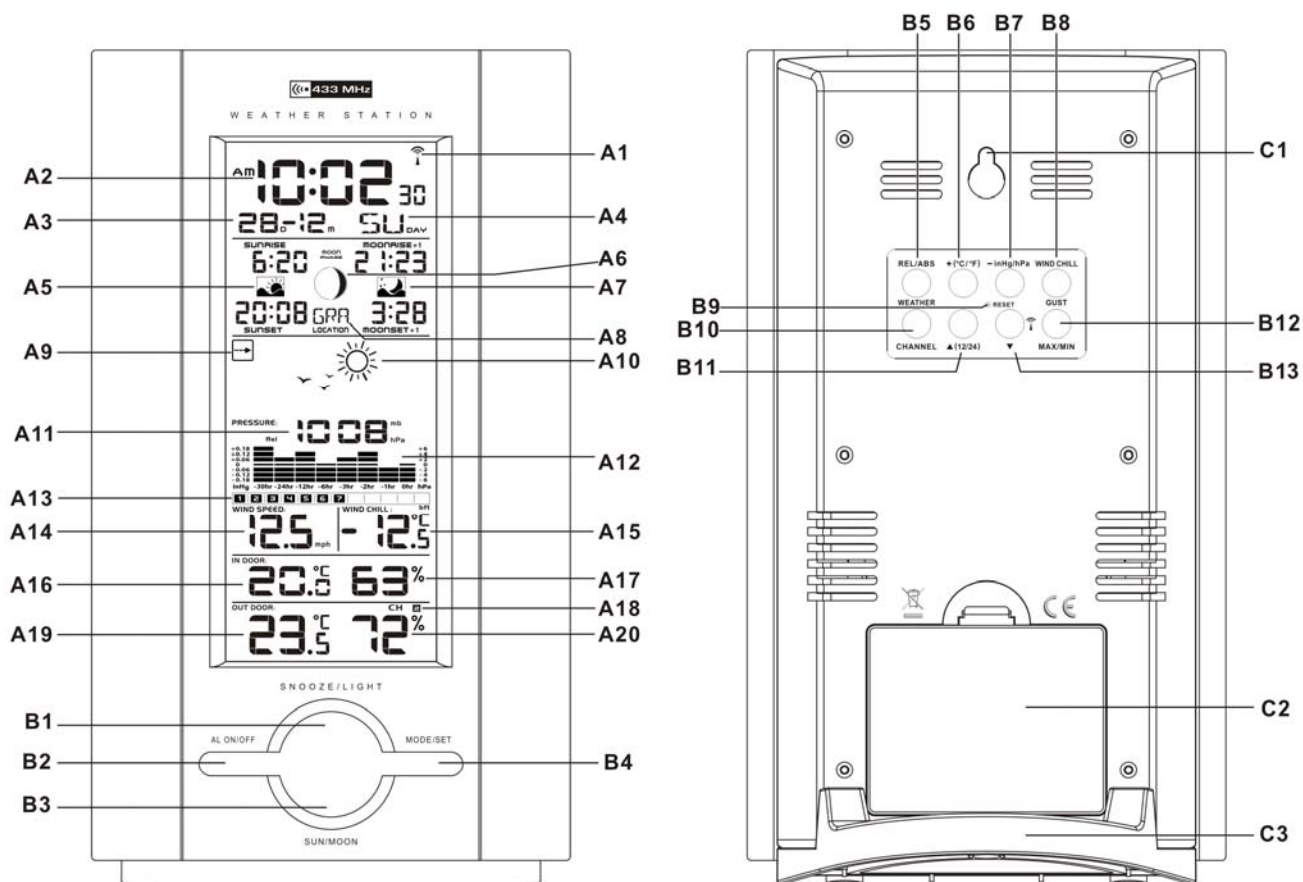

2.1 Part A- LCD

- A1: Radio Controlled Icon
- A2: Time
- A3: Date
- A4: Day of Week
- A5: Sunset & Sunrise Time
- A6: Moon Phase
- A7: Moonset & Moonrise Time
- A8: Location
- A9: Barometric Pressure Trend
- A10: Weather Forecast

- A11: Absolute/Relative Barometric Pressure Reading
- A12: Barometric Pressure Bar Graph
- A13: Beaufort scale
- A14: Wind Speed
- A15: Wind Chill
- A16: Indoor Temperature
- A17: Indoor Humidity
- A18: Channel
- A19: Outdoor Temperature
- A20: Outdoor Humidity

2.2 Part B- Buttons

- B1: "SNOOZE/LIGHT" button
- B2: "AL ON/OFF" button
- B3: "SUN/MOON" button
- B4: "MODE/SET" button
- B5: "REL/ABS/ WEATHER" button
- B6: "+ (C/F)" button
- B7: "-/inHg/hPa" button

- B8: "WIND CHILL/GUST" button
- B9: "RESET" button
- B10: "CHANNEL" button
- B11: "▲/ 12/24" button
- B12: "MAX/MIN" button
- B13: "▼/📶" button


2.3 Part C- Structure

C1: Wall Mount Hole

C3: Stand

C2: Battery Cover

3. Wind speed with thermo Sensor Unit Appearance.

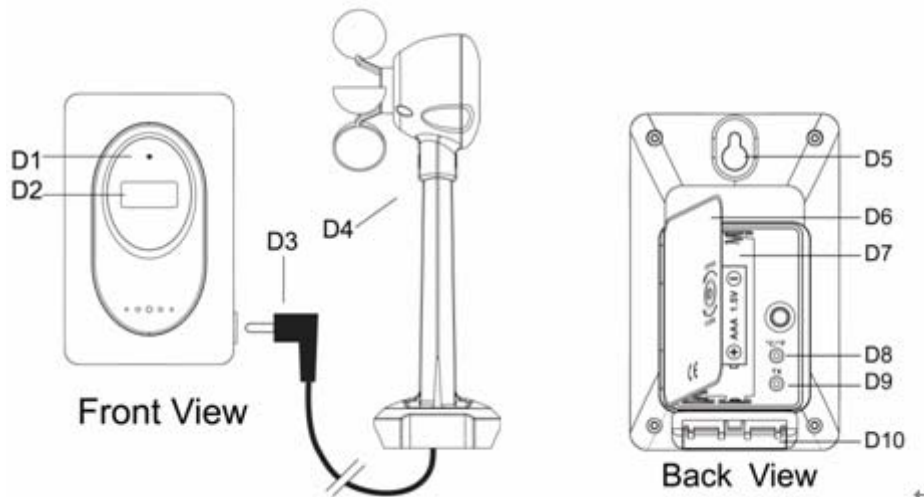

D1: Transmission Indication LED

D2: Outdoor Temp. & Humidity

D3: Wind Sensor Plug

D4: Wind Speed Sensor

D5: Wall Mount Hole

D6: Battery Cover

D7: Battery Compartment

D8: "C/F" button

D9: "TX" button

D10: Stand

4. Getting Started:

4.1 Main Unit:

- Open main unit battery compartment cover [C2]
- Insert 3 x AA batteries observing polarity ["+" and "-" marks]
- Replace main unit battery compartment cover [C2]
- Use a pin to press the RESET [B9] button on the rear of the main unit, the main unit is now ready for use

4.2 Outdoor Remote Sensor & Wind Sensor

- Batteries compartment (D7) of thermo sensor is locating behind the back cover, unscrews the batteries cover to open.
- Insert 2 x AAA batteries observing polarity ["+" and "-" marks]
- Plug the Wind Speed sensor into the side of remote sensor (D3)

5. Installation

5.1 Main Unit

The main unit can be placed onto any flat surface (C3), or wall mounted by the hanging hole (C1) at the back of the unit.

5.2 Outdoor Thermo sensor

The remote sensor should be securely mounted onto a horizontal surface.

Note: *Transmissions between receiver and transmitter can reach up to 30m in open area. Open Area: there are no interfering obstacles such as buildings, trees, vehicles, high voltage lines, etc.*

5.3 Wind Sensor

Using the U-bolt, 2x nuts and 2 x washers, secure the wind speed sensor to a stable mast/antenna/pole.


6. Weather Forecast Function

6.1 Operation


- After Batteries inserted, or holding “WEATHER” button (B5) for 3 seconds, weather icon flash (A10) on the LCD. Enter the current weather pressing “-” (B7) or “+” (B6) button. Press “WEATHER” (B5) button to confirm the setting. The weather forecast may not be accurate if the current weather entered is not correct.
- The current weather status should be entered again if the altitude of the Main Unit is changed. (Barometric pressure is lower at higher altitude location. Therefore, altitude change will affect the weather forecast). The weather station will start the first forecast at 6 hours later after the current weather status is entered.

6.2 Weather Conditions

There are totally 5 different weather status animations in the weather forecast.

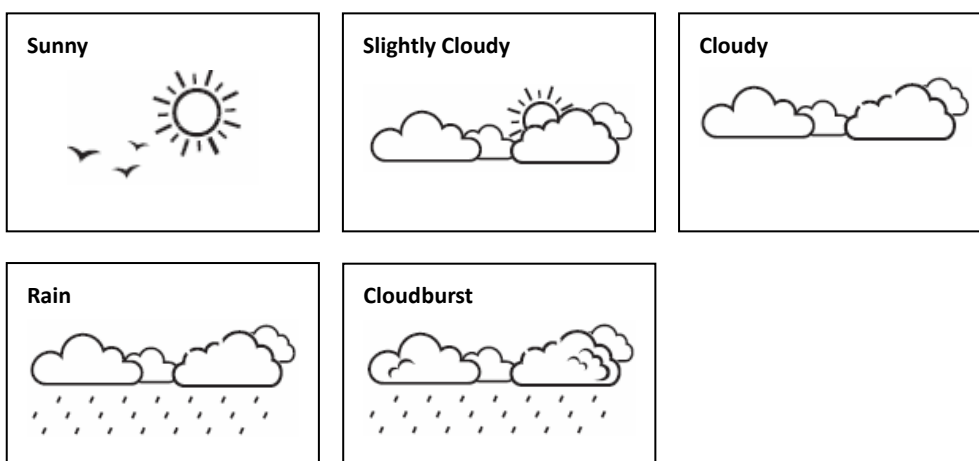

Note:



is shown if the weather forecast is Rainy OR Cloudburstand and outdoor temperature under 0 ° C.




- If there is any inconsistency of weather forecast between Local Weather Station and this unit, the Local Weather Station's forecast should prevail. We will not hold responsible for any trouble that may come up due to wrong forecasting from this unit.

7. Barometric Pressure Reading

Press “-“button (B7) to select the barometric pressure readout in inHg or mb/hPa

7.1 Barometric Trend Pointer (A9)

The trend pointer displayed on the LCD (A9) indicates the trend of the Barometric pressure.

| | | |
|--|--|--|
|  |  |  |
| Indicating the barometric pressure trend is rising | Indicating the barometric pressure trend is steady | Indicating the barometric pressure trend is falling |

7.2 Absolute / Relative Air Pressure

- Press the “REL/ABS” button [B5] to toggle between Absolute or Relative pressure display.

“**Abs**” is shown for Absolute Pressure; “**Rel**” is shown for Relative pressure

- Absolute pressure is the actual pressure measured by the Main Unit
- Hold “REL/ABS/WEATHER” button [B5] for 3 seconds, to set the current weather forecast firstly. Once the current weather forecast icon is set and confirmed, the relative air pressure digit will begin to flash. Press “-” (B7) or “+” (B6) button to set the local relative air pressure, and press “REL/ABS/WEATHER” button (B5) to confirm.

Note: Check your local weather station for Sea Level pressure information

7.3 Barometric Pressure Bar Graph

The Barometric Pressure Reading at 0hr, -1hr (pressure one hour ago),-2hr (pressure 2 hours ago),-3hr,-6hr, -12hr,-24hr, -30hr is recorded and shown on Barometric Pressure Bar Graph [A12]. The Graph is displayed in both hPa and inHg

8. Thermometer

8.1 RF Transmission Procedure:

- The main unit automatically starts receiving transmission from outdoor thermo sensor for outdoor temperature after batteries are inserted.
- The remote sensor unit will automatically transmit temperature & humidity signal to the main unit after batteries inserted.
- If main unit failed to receive transmission from outdoor thermo sensor (“- . -”display on the LCD), manually by pressing TX (D9) button of the remote sensor to transmit temperature & humidity signal to the main unit manually. The main unit gives a “beep” sound if it received the signal.

8.2 Temperature & Humidity

(1) Maximum / Minimum Temperature and Humidity


- Press “MAX/MIN” button (B4) to show the maximum recorded Indoor /Outdoor Temperature and Humidity. “**MAX**” is shown on the LCD
- Press “MAX/MIN” button (B4) again to show the minimum recorded Indoor/Outdoor Temperature and Humidity. “**MIN**” is shown on the LCD.
- Hold “MAX/MIN” button (B4) for 3 seconds to clear the recorded outdoor maximum and minimum reading.

(2) Celsius / Fahrenheit

- Press “°C /°F” button (B6) to select Indoor & Outdoor Temperature in Celsius mode or Fahrenheit mode.
- Press the “°C /°F” button [D8] on the rear thermo sensor inside the battery compartment to select the temperature to be displayed in Celsius or Fahrenheit mode
- If the temperature is out of the measurable range, LL.L (beyond the minimum temperature) or HH.H (beyond the maximum temperature) will be shown on the LCD.

9. Wind Speed


- Plug the wind sensor into the side of the remote sensor (D3).
- The wind speed reading will change from dashes (- . -) to “0.0” indicating that the wind speed sensor is connected to the remote sensor.
- Press the “Wind Chill/Gust” (B8) button to toggle wind chill or gust display
- Hold the “Wind Chill/Gust” (B8) button for 3 seconds to change the wind unit: m/s → knots → kmph → mph
- Wind speed bar

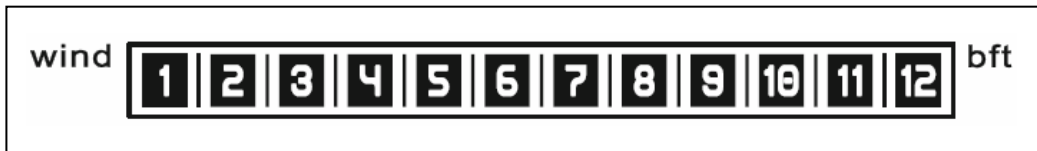








- Wind speed bar display with 1-12 Beaufort unit

10. Time and Alarm Setting

10.1 Radio Controlled Clock:

- At 2 minutes after batteries have been inserted into the main unit, the clock automatically starts to scan the WWVB time signal. Radio Control Icon “” (A1) flashes on LCD.

| | | |
|---|--|--|
|  (A1) flashes, , Indicating now is receiving WWVB signal |  (A1) turns on, Indicating signal received successfully |  (A1) disappear, Indicating signal reception failed |
|---|--|--|

- The clock automatically synchronized with the WWVB radio signal every day at 2:00 a.m. to maintain accurate time keeping. If synchronization with the WWVB radio signal fails, “” on LCD disappear and the clock then attempts to synchronize with the WWVB radio signal at 3:00 am, 4am, and 5am.
- The clock can be set to scan the radio signal manually by holding “” button (B13) for 3 seconds. Each reception takes several minutes. If the WWVB signal reception fail, scanning stops (“” disappear from the LCD) and the clock then attempt to scan the radio signal again on next full hour. E.g. scanning failed at 8:20a.m., it will scan again at 9:00a.m.
- Stop scanning WWVB radio signal by holding “” button (B13) for 3 seconds.
- “DST” shown on the LCD if it is in Daylight Saving Time Mode

Note:

Buttons will not function while scanning for WWVB radio signal unless they are well received or stopped manually.

10.2 Manual Time Setting:

- Hold “MODE” button (B4) for 3 seconds to enter Clock/Calendar setting mode.
- Press “▲” (B11) or “▼” (B13) button to adjust the setting and press “MODE” button (B4) to confirm each setting.

- The setting sequence is shown as follow: Hour, Minutes, Second, Year, Month, Day, Country, City.

Note:

(1) Second adjusted to zero only.


(2) The Time Setting Mode will automatically exit in 15 seconds without any adjustment.





10.3 12/24 Hour Display mode:

Press “12/24” button (B11) to select 12 or 24 hours mode.

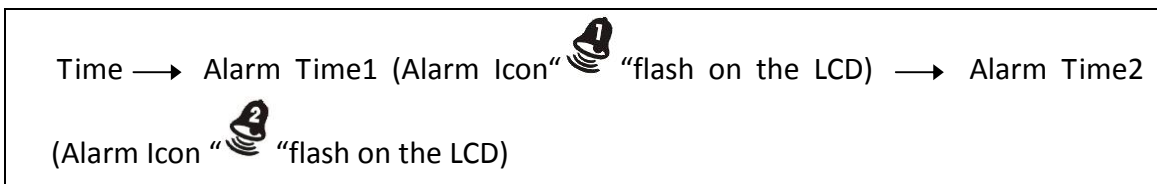10.4 Dual Daily Alarm Function:

- Press “MODE” button (B5) to select to view:



- When viewing Alarm Time 1 or Alarm Time 2, hold “MODE” button (B4) for 3 seconds to enter that Alarm Time setting. Press “▲” (B11) or “▼” (B13) button to adjust the alarm time, press “MODE” button (B4) to confirm the setting.
- When viewing Alarm Time 1 or Alarm Time 2, press “AL ON/OFF” (B2) button to switch that alarm ON or OFF. If it is on, alarm icon “” or “” will be shown on the LCD.
- When Alarming, press “SNOOZE” button (B1) to activate the snooze alarm, alarm icon (“” or “”) flashes on LCD. The alarm will snooze for approximately 5 minutes, then it alarms again.
- Press any of “SUN/MOON” (B3), “MODE/SET” (B4), “ALARM ON/OFF” (B5), “▲/12/24” (B7) or “▼/📶” (B8) button to stop the snooze alarm. Otherwise, the alarm signal sounds for about 2 minutes, then stops automatically.

11. Sunrise/Sunset, Moonset/Moonrise Display Function

- After setting the Calendar, Local Country and home city in the Time Setting Mode, the main unit calculates the Sunrise/Sunset & Moonrise/Moonset. The Sunrise/Sunset & Moonrise/Moonset time digits blink during the calculation.
- Press the “SUN/MOON” button (B3) to the display the Sun Hours of the selected day.
- Hold the “SUN/MOON” button (B3) for 3 seconds to enter Sunrise/ Sunset,

Moonrise/Moonset Time search mode, location digits (A8) blink.


- Enter the “Country”, “City”, “Year”, “Month” and “Day” which you would like to check. Press the “▲” [B11] or “▼”[B13] button to adjust and press the “SUN/MOON” button (B3) to confirm setting.
- The Sunrise / Sunset, Moonrise/Moonset time digits blink during the calculation. After calculation, Sunrise/Sunset and Moonset/Moonrise time is shown.
- If moonrise or moonset occurs at next day, then “MOONRISE +1” or “MOONSET +1” will be displayed. If there is no moonrise or moonset occur on someday, “-:- - -” will be displayed on the LCD
- The Sunrise/Sunset and Moonrise/ Moonset time display is just for reference only. For exact Sunrise/Sunset and Moonrise/Moonset time, please refer to your Local Weather Station

Note:

During Daylight Saving Time in Canada and the USA, select DST mode manually to adjust the sunrise and sunset times.

- (1) Hold "▲"button (B11) for 3 seconds to select DST mode or exit DST mode.
- (2) If in DST mode, “DST” icon would be display on the LCD, and the current SUNSET/SUNRISE times would be adjusted (+ 1 hour) accordingly.

12. Moon Phase Display

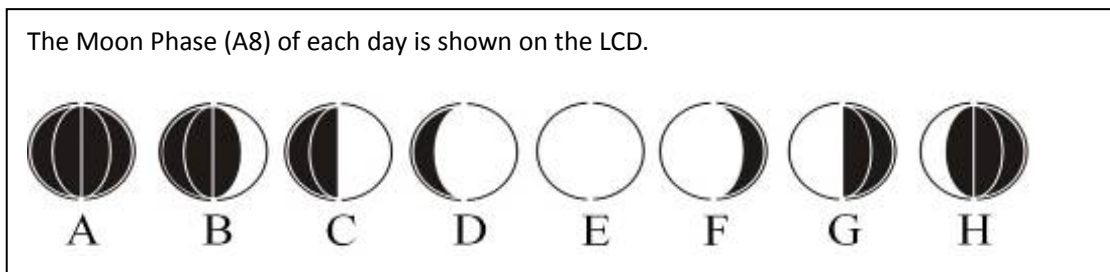

A: New Moon

B: Waxing Crescent

C: First Quarter

D: Waxing Gibbous


E: Full Moon

F: Waning Gibbous

G: Last Quarter

H: Waning Crescent

13. Low battery indication:

The low battery icon “” will appear indicating that outdoor remote sensor is in low battery status. The batteries should be replaced.

14. Backlight

Press “SNOOZE/LIGHT” button (B1), back light states for 3 seconds.

15. Precautions

- Use a pin to press the reset button (B9) if the Unit does not work properly.
- Avoid placing the clock near interference sources/metal frames such as computer or TV sets.
- The clock loses its time information when the battery is removed.
- Do not expose it to direct sunlight, heavy heat, cold, high humidity or wet areas
- The outdoor sensor must not be set up and installed under water. Set it up in away direct sunlight and Rain
- Never clean the device using abrasive or corrosive materials or products. Abrasive cleaning agents may scratch plastic parts and corrode electronic circuits
- If there is any inconsistency of weather forecast between Local Weather Station and this unit, the Local Weather Station's forecast should prevail. The manufacturer will not take responsible for incorrect forecasting from this unit

Countries and Cities : there are 3 countries can be chosen from the Time Setting Mode. They are listed in the following table.

| | | | | | |
|-------------------|------------|-----------------|-----------|-----------------------|-----------|
| USA | USA | Iowa | IA | Mississippi | MS |
| Alaska | AK | Waterloo | ALO | Greenwood | GWO |
| Juneau | JNU | Des Moines | DSM | Huntsville | HUV |
| Alabama | AL | Davenport | DVN | Jackson | JAN |
| Birmingham | BHM | Sioux City | SUX | Tupelo | TUP |
| Gadsden | GAD | Idaho | ID | Montana | MT |
| Montgomery | MGM | Boise | BOI | Billings | BIL |
| Mobile | MOB | Gibbonsville | GIB | Ft. Peck | FTP |
| Arkansas | AR | Pocatello | PIH | Great Falls | GFT |
| Fort Smith | FSM | Sandpoint | SZT | Helena | HLN |
| Little Rock | LIT | Illinois | IL | Sidney | SDY |
| Texarkana | TXK | Champaign | CMI | Whitefish | WTF |
| Arizona | AZ | Chicago | ORD | North Carolina | NC |
| Flagstaff | FLG | Springfield | SPI | Asheville | AVL |
| Phoenix | PHX | Indiana | IN | Charlotte | CLT |
| Tucson | TUS | Evansville | EVV | Fayetteville | FAY |
| Yuma | YUM | Terre Haute | HUF | Wilmington | ILM |
| California | CA | Indianapolis | IND | Winston-Salem | INT |
| Bakersfield | BFL | South Bend | SBN | Williamston | MCZ |
| Blythe | BLH | Kansas | KS | Raleigh | RDU |
| Eureka | EKA | Dodge City | DDC | North Dakota | ND |
| Fresno | FAT | Wichita | K32 | Bismarck | BIS |

| | | | | | |
|----------------------|-----|---------------------|-----|---------------|-----|
| Fort Bragg | FTB | Kansas City | KCK | Bowbells | BWB |
| Los Angeles | LAX | Wakeeney | OH1 | Fargo | FAR |
| Redding | ROD | Topeka | TOP | Grand Forks | GFK |
| Sacramento | SAC | Kentucky | KY | Nebraska | NE |
| San Diego | SAN | Frankfort | FFT | Grand Island | GRI |
| San Bernardino | SBD | Lexington | LEX | Lincoin | LNK |
| San Francisco | SFO | Louisville | LOU | Omaha | OMA |
| Colorado | CO | Louisiana | LA | Sidney | SNY |
| Denver | DEN | Baton Rouge | BTR | Valentine | VTN |
| Durango | DRO | Lake Charles | CWF | New Hampshire | NH |
| Fort Collins | FNL | Natchitoches | IER | Concord | CON |
| Grand Junction | GJT | New Orleans | NEW | New Jersey | NJ |
| Burlington | ITR | Shreveport | SHV | Newark | EWR |
| Pueblo | PUB | Massachusetts | MA | Trenton | TTN |
| Connecticut | CT | Boston | BOS | New Mexico | NM |
| Hartford | HFD | Maryland | MD | Albuquerque | ABQ |
| District of Columbia | DC | Baltimore | BWI | Magdalene | MAG |
| Washington | DCA | Maine | ME | Roswell | ROW |
| Delaware | DE | Augusta | AUG | Raton | RTN |
| Dover | ON5 | Bangor | BGR | Santa Fe | SAF |
| Florida | FLG | Caribou | CAR | Nevada | NV |
| Key West | EYW | Portland | PWM | Austin | AIN |
| Jacksonville | JAX | Michigan | MIA | Carson City | CXP |
| Miami | MIA | Kalamazoo | AZO | Ely | ELY |
| Orlando | ORL | Detroit | DET | Las Vegas | LAS |
| Pensacola | PNS | Flint | FNT | Wells | LWL |
| Tallahassee | TLH | Lansing | LAN | Reno | RNO |
| Tampa | TPA | Rogers City | PZQ | New York | NY |
| Georgia | GA | Marquette | SAW | Albany | ALB |
| Albany | ABY | Traverse City | TVC | Buffalo | BUF |
| Augusta | AGS | Minnesota | MN | New York City | JFK |
| Atlanta | ATL | Albert Lea | AEL | Lake Placid | LKP |
| Columbus | CSG | Bemidji | BJI | Syracuse | SYR |
| Macon | MAC | Duluth | DLH | Ohio | OH |
| Savanna | SAV | Grand Protage | GPO | Cleveland | CLE |
| Hawaii | HI | International Falls | INL | Columbus | CMH |
| Honolulu | HNL | St. Paul | STP | Cincinnati | ISZ |
| Hilo | ITO | Missouri | MO | Toledo | TOL |
| Kahului | OGC | Jefferson City | JEF | Youngstown | YNG |
| Waimea | WAI | Kansas City | MKC | Oklahoma | OK |

| | | | | | |
|--|--|--------------|-----|---------------|-----|
| | | Memphis | MPH | Boise City | 17K |
| | | Poplar Bluff | POF | Lawton | LAW |
| | | Springfield | SGF | Oklahoma City | OKC |
| | | St. Louis | STL | Tulsa | TUL |

| | | | | | |
|-----------------------|------------|-------------------|-----------|----------------------|------------|
| Oregon | OR | Utah | UT | West Virginia | WV |
| Burns | BNO | Saline | SAL | Charleston | CRW |
| Eugene | EUG | St. George | SGU | Wheeling | HLG |
| Medford | MFR | Salt Lake City | SLC | Wyoming | WY |
| Portland | PDX | Thompson | TSN | Buffalo | BYG |
| Salem | SLE | Virginia | VA | Casper | CPR |
| Pennsylvania | PA | Vienna | DON | Cheyenne | CYS |
| Harrisburg | CXY | Lynchburg | LYH | Little America | LAA |
| Philadelphia | PHL | Norfolk | ORF | West Yellowstone | WYE |
| Pittsburgh | PIT | Richmond | RIC | Canada | CAN |
| Scranton | SCR | Roanoke | ROA | Calgary | CAL |
| Puerto Rico | PR | Vermont | VT | Charlotte Town | CHT |
| San Juan | SJU | Burlington | BTM | Edmonton | EDM |
| Rhode Island | RI | Montpelier | MPR | Fredericton | FRE |
| Providence | PVD | Washington | WA | Halifax | HAL |
| South Carolina | SCR | Aberdeen | ABE | Montreal | MON |
| Charleston | CHS | Walla Walla | ALW | Ottawa | OTT |
| Columbia | CUB | Kettle Falls | KTF | Quebec | QUE |
| Greenville | GMU | Mount Vernon | MVN | Regina | REG |
| South Dakota | SD | Olympia | OLM | Sudbury | SUD |
| Sioux Falls | FSD | Seattle | SEA | Thunder Bay | THU |
| Pierre | PIR | Spokane | SFF | Toronto | TOR |
| Rapid City | RAP | Tonasket | TON | Vancouver | VAN |
| Tennessee | TN | Yakima | YKM | Winnipeg | WIN |
| Nashville | BNA | Wisconsin | WI | Mexico | MEX |
| Chattanooga | CHA | Wausau | AUW | Chihuahua | CHH |
| Knoxville | DKX | Green Bay | GRB | Durango | DUR |
| Memphis | MFR | La Crosse | LSE | Guadalupe | GUA |
| Texas | TX | Madison | MSN | Hermosillo | HER |
| Abilene | ABI | Milwaukee | MWC | Mexico City | MEC |
| Amarillo | AMA | Spooner | SSQ | | |
| Austin | AUS | | | | |
| Brownsville | BRO | | | | |
| Dallas/Ft. Worth | DFW | | | | |

| | | |
|-------------|-----|--|
| El Paso | ELP | |
| Houston | HOU | |
| Laredo | LRD | |
| Odessa | ODO | |
| San Antonio | SAT | |

16. Specifications

| | |
|---------------------------------------|--|
| Indoor Data: | |
| Temperature range: | 0 to 50°C [+32 to +122°F] |
| Temperature Units Measured: | °C or °F [switchable] |
| Humidity Range: | 20% to 99% |
| Air Pressure Range: | 850 – 1050 hPa |
| Air Pressure Units Measured: | mb/hPa, inHg [switchable] |
| Weather Forecast: | 5 icons [sunny, slightly cloudy, cloudy, rainy & cloudburst] |
| Outdoor Data: | |
| Transmission distance: (open area) | 30m @ 433MHz |
| Temperature range: | -20°C to 50°C [-4 to +122°F] |
| Mount: | wall / table |
| Main Unit Dimensions: | W118 x h200 x d27 mm |
| Remote Sensor Dimensions: | w62 x h95 x d25 mm |
| Wind Sensor Dimensions: | W73 x h68 x L203 mm |
| Battery Requirements: | |
| Base Station [indoor]: | 3 x AA batteries |
| Sensors [outdoor]: | 2 x AAA batteries |

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.