






Landscape Drip



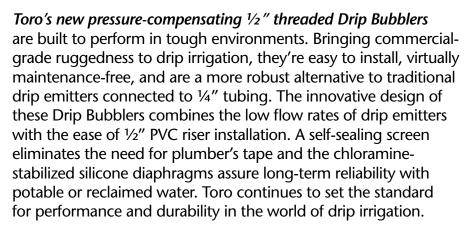

Easy to Install

Easily threads on to a ½" threaded riser. The self-sealing screen eliminates the cost and labor of having to use plumber's tape on every riser.

Easy to Maintain

Self-cleaning mechanism flushes at every startup, ensuring reliable operation and fewer maintenance headaches.

Durable Construction


Commercial-grade plastic and chloramine-stabilized silicone diaphragm provide dependable UV- and chemical-resistant performance in the least forgiving of environments.

Pressure Compensating

Pressure compensating to 2 and 4 GPH over a range of 5-50 PSI.





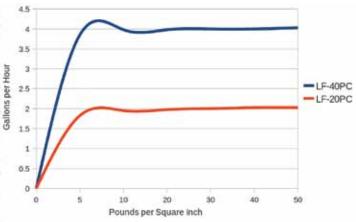

Effluent Model

Non-effluent Model

Specifications

Operating Range

- Flow Rates: 2.0 GPH & 4.0 GPH
- Pressure Compensation: 5 50 PSI
- Minimum Filtration Requirement: 80 Mesh

Operating Specifications

- ½" FIPT inlet; diffuser cap outlet
- Self-sealing screen eliminates need for plumber's tape
- Self-cleaning flush at startup minimizes clogging and maintenance
- Flow rate molded into the identification
- Commercial-grade plastic and chloramine-stabilized silicone diaphragm provide dependable UV- and chemical-resistant performance
- Effluent and non-effluent models

Warranty

• Two years

Specifying Information — Drip Bubblers

Model Number	Description
LF20-PC LF40-PC LF20-PCE LF40-PCE	2.0 GPH PC Bubbler 4.0 GPH PC Bubbler 2.0 GPH PC Bubbler, Effluent 4.0 GPH PC Bubbler. Effluent
E1 40-1 CE	4.0 GFH PC bubbler, Ellidefit



www.toro.com • The Toro Company • Irrigation Division

5825 Jasmine St. • Riverside, CA • 92504 • 877-345-8676

Specifications subject to change without notice. For more information, contact your local Toro distributor. ©2012 The Toro Company. All rights reserved. P/N 12-1109-IRC