




Count on it.

ProCore® SR Series deep-tine aerators

F E A T U R E S

- Multiple high-performance units for a wide variety of aeration applications
- Aeration widths of 48-75"
- Aeration depths of up to 16"
- Hydraulic remote depth adjustment—no need to get off the tractor to change depths
- Solid and coring tines available for your specific aeration application

The deep tine difference.

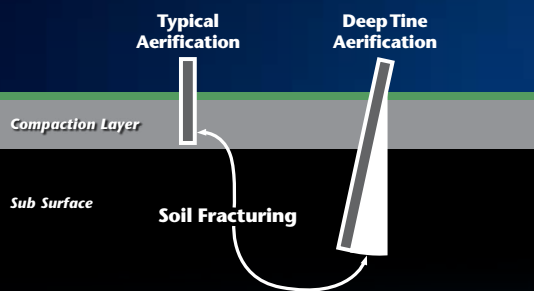

Deep-tine aerification relieves soil compaction at lower soil levels than typical aerification.

The tines fracture the soil creating channels through the root zone allowing oxygen, water and critical nutrients to penetrate deep into the soil profile.

Reduce soil compaction for healthier turf.

ProCore SR Series deep-tine aerators offer a variety of solutions to alleviate subsurface soil compaction on greens, fairways, sports fields, parks and many other areas. These durable and time-tested products are capable of withstanding the most extreme aeration conditions. The ProCore SR Series aerators also have hydraulic remote depth adjustment, which allows the operator to change depths with out getting off the tractor, resulting in increased operator productivity.

From lightweight, precision machines for smoother, softer greens to robust, heavy-duty machines to break up soil on even the most compacted surfaces, the ProCore SR Series deep-tine aerators are the ultimate choice for performance and quality.



©2011 The Toro Company
8111 Lyndale Ave. S.
Bloomington, MN 55420-1196
Printed in the U.S.A.
Part No. 11-032-T

Specifications subject to change. Please contact your Toro distributor for details.

**Call your Toro distributor
at 1-800-803-8676**

ProCore® SR Series Specifications*



	PROCORE SR48	PROCORE SR54	PROCORE SR54-S	PROCORE SR70	PROCORE SR70-S	PROCORE SR72	PROCORE SR75-HD
WEIGHT WITH PTO & TOP LINK	1,530 lbs. (694 kg)	1,165 lbs. (528 kg)	1,250 lbs. (567 kg)	1,500 lbs. (681 kg)	1,655 lbs. (750 kg)	2,091 lbs. (945 kg)	3,250 lbs. (1,475 kg)
WORKING WIDTH	48" (1.22 m)	54" (1.37 m)	54" (1.37 m)	73" (1.85 m)	73" (1.85 m)	72" (1.83 m)	78" (1.98 m)
WORKING DEPTH (ADJUSTABLE)	1" - 14" (75-300 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 10" (25-250 mm)	1" - 16" (25-400 mm)	1" - 16" (25-400 mm)
HOLE SPACING	3" - 6" (75-150 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	2.5" - 4" (64-102 mm)	3" - 6" (75-150 mm)	3" - 6" (75-150 mm)
PRODUCTIVITY	25,000 sq.ft./hr. (2,325 sq. m/hr.)	36,000 sq.ft./hr. (3,345 sq. m/hr.)	36,000 sq.ft./hr. (3,345 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)	38,000 sq.ft./hr. (3,530 sq. m/hr.)	48,000 sq.ft./hr. (4,460 sq. m/hr.)
RECOMMENDED TRACTOR SIZE	25 HP	16-18 HP	18 HP	25-35 HP	25-35 HP	45 HP	55+ HP
RECOMMENDED LIFT CAPACITY	1,800 lbs. (817 kg)	1,200 lbs. (682 kg)	1,500 lbs. (682 kg)	1,700 lbs. (773 kg)	1,800 lbs. (817 kg)	2,800 lbs. (1,270 kg)	4,000 lbs. (1,815 kg)
RECOMMENDED COUNTER WEIGHT	300 lbs. (135 kg)	150 lbs. (70 kg)	150 lbs. (70 kg)	250 lbs. (115 kg)	250 lbs. (115 kg)	300-500 lbs. (135-225 kg)	700-900 lbs. (315-410 kg)
RECOMMENDED PTO SPEED	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm
ACTUAL WORKING SPEED @ 400 PTO RPM (VARIES WITH HOLE SPACING)	.8 -1.3 mph	1.5 -2.5 mph	1.5 -2.5 mph	1.5 -2.5 mph	1.5 -2.5 mph	.8 -1.5 mph	.8 -1.5 mph
LIFT SYSTEM	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point
CERTIFICATION	ANSI B71.4-1999, CE and EU machinery directives						
WARRANTY	Two-year limited warranty. Refer to Operator's Manual for further details						

*Specifications subject to change. Please contact your Toro distributor for details.