

300Mbps

Wireless N 4G LTE Router

TL-MR6400




Highlights

- **Share Your 4G LTE Network** – Share your 4G LTE network with multiple Wi-Fi devices and enjoy download speeds of up to 150Mbps
- **Great Coverage** – Integrated antennas provide stable wireless connections
- **No Configuration** – Simply insert your SIM card into the built-in 4G LTE modem and turn on the router
- **300Mbps Wi-Fi** – Provides the 300Mbps Wi-Fi connections that you need for online gaming, HD streaming video, ultra-fast downloads
- **Available LAN/WAN Port** – Allows you to connect to any standard cable, fiber, or xDSL modem



4G LTE
150Mbps




SIM Card
Slot



300Mbps



Guest
Network



Parental
Control



EWAN
Connection

Features



4G LTE

- **4G LTE** – Ideal for cutting-edge 4G LTE networks
- **150Mbps/50Mbps** – 150Mbps Download speeds and 50Mbps upload speeds
- **Backward Compatible** – Compatible with 4G/3G/2G network



Wi-Fi Speed

- **300Mbps Wireless Speed** – Provides the 300Mbps Wi-Fi connections that you need for online gaming, HD streaming video, ultra-fast downloads



Wi-Fi Range

- **Better Coverage** – Integrated antennas provide stable wireless connections and better coverage

Features



Reliability

- **IP QoS** – Advanced QoS automatically prioritizes streaming and gaming applications



Ease of Use

- **No Configuration** – Simply insert your SIM card into the built-in 4G LTE modem and turn on the router
- **Available LAN/WAN port** – Allows you to connect to any standard cable, fiber, or xDSL modem
- **Fast Encryption** – Easy one-touch WPA wireless security encryption with the WPS button
- **Easy Wi-Fi On/Off** – Wi-Fi On/Off Button allows users to turn wireless radio on or off



Security


- **Access Control** – Guest Network Access provides secure Wi-Fi access for guests
- **Parental Control** – Establish restricted access policies for all connected devices
- **Easy Bandwidth Management** – Bandwidth Control makes it easier for you to manage the bandwidth of connected devices
- **Encryptions for Secure Network** – WPA-PSK/WPA2- PSK encryptions provide active defense against security threats for user networks

Diagrams

Unlimited Applications



Typical Network Connection

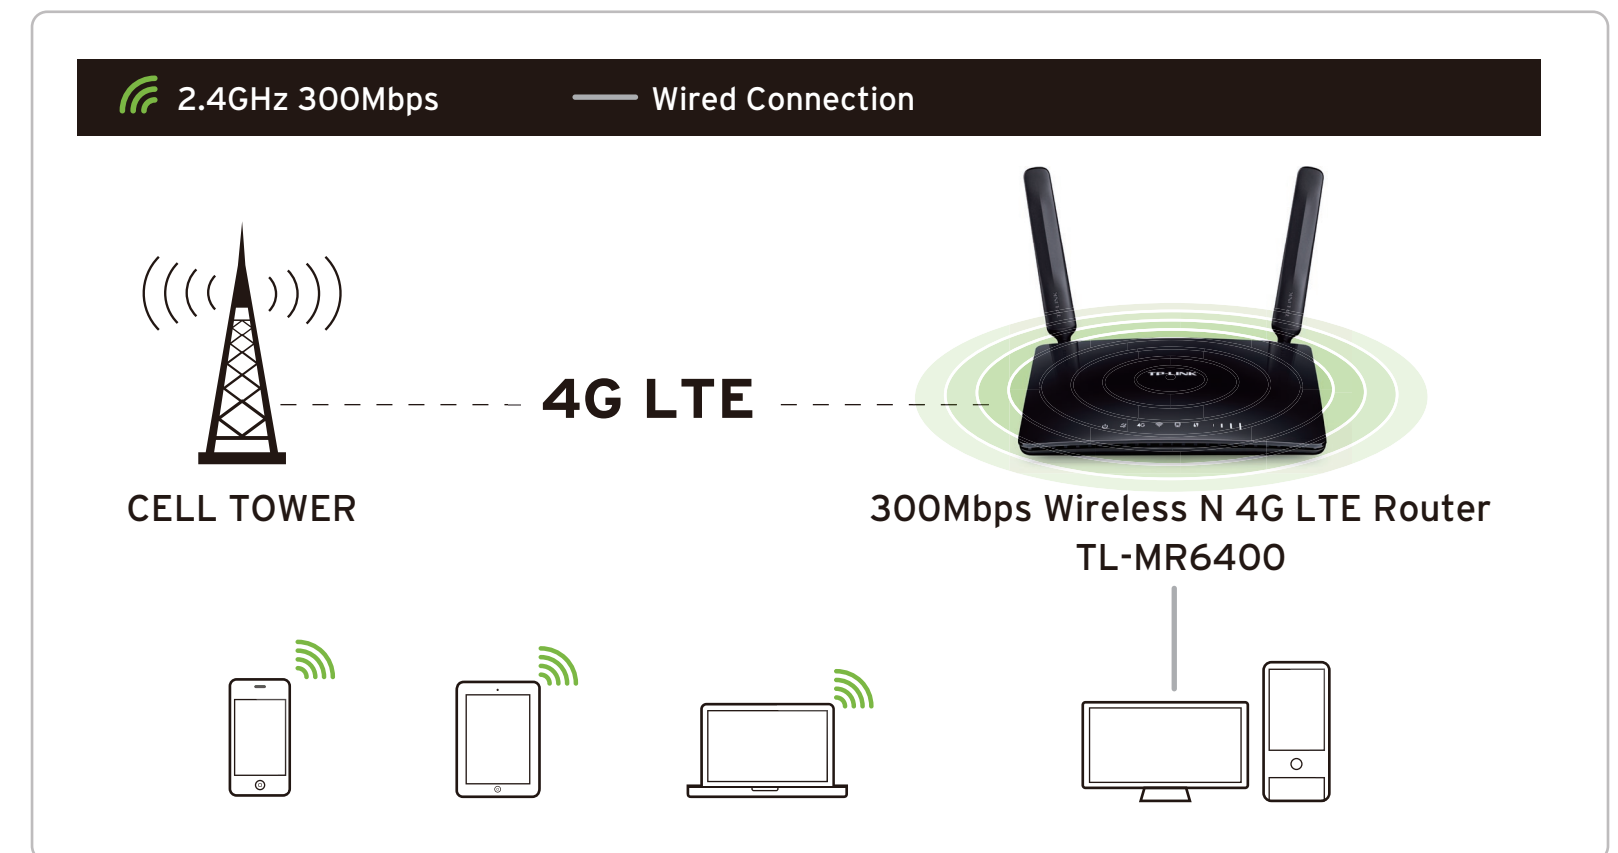


Specifications

Hardware

- **Ethernet Ports:** 3 10/100Mbps LAN Ports & 1 10/100Mbps LAN/WAN Port
- **Button:** WPS/Reset Button, Wireless On/Off Button, Power On/Off Button
- **External Power Supply:** 12V/1A
- **Dimensions (W x D x H):** 7.95 x 5.55 x 1.32 in. (202 x 141 x 33.6 mm)
- **Antenna:** 2 Internal Wi-Fi Antennas,
2 Detachable External 4G LTE Antennas

Wireless

- **Network Type:** 4G: FDD-LTE Cat4 (800/900/1800/2100/2600MHz)
TDD-LTE (2300/2600MHz)
3G: DC-HSPA+/HSPA+/HSPA/UMTS (900/2100MHz)
2G: EDGE/GPRS/GSM (850/900/1800/1900MHz)
- **Wireless Standards:** IEEE 802.11b/g/n 2.4GHz
- **Frequency:** 2.4GHz
- **Signal Rate:** 300Mbps at 2.4GHz
- **Transmit Power:** CE: <20dBm(2.4GHz)
- **Reception Sensitivity:** 11g 54M: -74dBm
11n HT20: -71dBm
11n HT40: -67dBm
- **Wireless Function:** Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
- **Wireless Security:** 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK encryptions

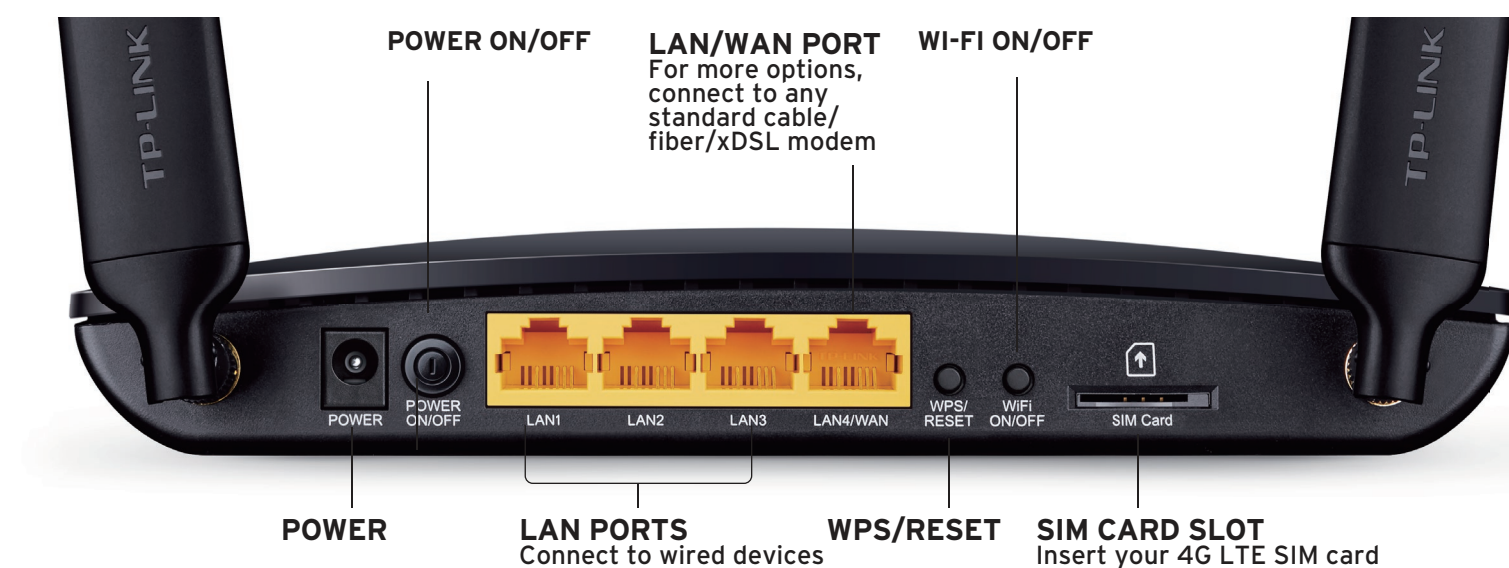

Specifications

Software

- **Operating Modes:** 3G/4G Router, Wireless Router
- **WAN Type:** Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- **DHCP:** Server, Client, DHCP Client List, Address Reservation
- **Quality of Service:** Traffic Control(IP QoS)
- **Port Forwarding:** Virtual Server, Port Triggering, UPnP, DMZ
- **Dynamic DNS:** DynDns, NO-IP
- **VPN Passthrough:** PPTP, L2TP, IPSec
- **Access Control:** Parental Control, Local Management Control, Host List, Access Schedule, Rule Management
- **Firewall Security:** DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
- **Protocols:** Supports IPv4 and IPv6
- **Management:** Access Control, Local Management, Remote Management
- **Guest Network:** 2.4GHz guest network x 1

Others

Package Contents

- 300Mbps Wireless N 4G LTE Router, TL-MR6400
- RJ45 Ethernet Cable
- Power Adapter
- Quick Installation Guide
- Micro to Standard SIM Card Adapter
- Nano to Standard SIM Card Adapter

Certification

- CE, FCC, RoHS

System Requirements

- Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, MAC OS, NetWare, UNIX or Linux
- Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0 browsers or higher, or other Java-enabled browsers
- SIM Card

Environment

- Operating Temperature: 0°C~40°C (32°F ~104°F)
- Storage Temperature: -40°C~70°C (-40°F ~158°F)
- Operating Humidity: 10%~90% non-condensing
- Storage Humidity: 5%~90% non-condensing

Others

Ideal to use with



- AC600 Wireless Dual Band USB Adapter Archer T2U



- AC600 High Gain Wireless Dual Band USB Adapter Archer T2UH

Similar Products



- AC750 Wireless Dual Band 4G LTE Router Archer MR6400



For more information, please visit

<http://www.tp-link.com/en/products/details/?categoryid=&model=TL-MR6400>

or scan the QR code left

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies CO., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies CO., Ltd.

Maximum wireless speed of up to 300Mbps is the theoretical data rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage will vary due to network conditions and environmental factors including volume of network traffic, building materials and construction, network overhead, actual data throughput rate, and wireless coverage. TP-LINK makes no express or implied representations or warranties about this product's compatibility with any future standards.

www.tp-link.com