



# Product Catalog

## Packaged Rooftop Air Conditioners Voyager™ Cooling and Gas/Electric 12½–25 Tons, 60 Hz



January 2015

**RT-PRC028X-EN**





# Introduction

## Packaged Rooftop Air Conditioners

Through the years, Trane has designed and developed the most complete line of Packaged Rooftop products available in the market today. Trane was the first to introduce the Micro—microelectronic unit controls—and has continued to improve and revolutionize this design concept.

The ReliaTel™ control platform offers the same great features and functionality as the original Micro, with additional benefits for greater application flexibility.

Voyager continues to provide the highest standards in quality and reliability, comfort, ease of service, and the performance of Trane light commercial products.

Trane customers demand products that provide exceptional reliability, meet stringent performance requirements, and are competitively priced. Trane delivers with Voyager.

Voyager features cutting edge technologies: reliable compressors, Trane engineered ReliaTel controls, computer-aided run testing, and Integrated Comfort™ Systems. So, whether you're the contractor, the engineer, or the owner, you can be certain Voyager products are built to meet your needs.

## Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

## Trademarks

Trane and the Trane logo, CompleteCoat, Froststat, Integrated Comfort Systems, ReliaTel, Tracer, Voyager, are trademarks of Trane in the United States and other countries. All trademarks referenced in this document are the trademarks of their respective owners.

## Revision Summary

RT-PRC028X-EN (20 January 2015)

- Title 24 - ASHRAE 90.1-2013
- Updated Features & Benefits, Model Number Description, General Data, Performance Data, Weights, Electrical Data, and Mechanical Specifications




# Table of Contents

|   |     |
|---|-----|
| Features and Benefits .....                             | 4   |
| Standard and Optional Features at a Glance .....        | 4   |
| Standard Features .....                                 | 4   |
| Factory Installed Options <sup>15</sup> * .....         | 5   |
| Factory* or Field Installed Options <sup>15</sup> ..... | 5   |
| Field Installed Options .....                           | 6   |
| Other Benefits .....                                    | 6   |
| Outstanding Standard Features .....                     | 7   |
| Variety of Options .....                                | 10  |
| Factory Installed Options .....                         | 10  |
| Factory or Field Installed Options .....                | 14  |
| Field Installed Options .....                           | 15  |
| Other Benefits .....                                    | 17  |
| Application Considerations .....                        | 20  |
| Selection Procedure .....                               | 22  |
| Cooling Capacity .....                                  | 22  |
| Heating Capacity .....                                  | 23  |
| Air Delivery Selection .....                            | 23  |
| Model Number Description .....                          | 24  |
| Model Number Notes .....                                | 25  |
| General Data .....                                      | 26  |
| Performance Data .....                                  | 38  |
| Controls .....  | 106 |
| Economizer Controls .....                               | 106 |
| Zone Sensors .....                                      | 106 |
| Communication Interfaces .....                          | 109 |
| Electrical Data .....                                   | 110 |
| Typical Wiring .....                                    | 122 |
| Jobsite Connections .....                               | 130 |
| Dimensional Data .....                                  | 131 |
| Weights .....   | 140 |
| Mechanical Specifications .....                         | 143 |
| Factory Installed Options .....                         | 145 |
| Factory or Field Installed Options .....                | 147 |
| Field Installed Options .....                           | 149 |



## Features and Benefits

Voyager has the features and benefits that make it first class in the light commercial rooftop market. Designed with input from field contractors and engineers, its U-shaped airflow performance is outstanding.

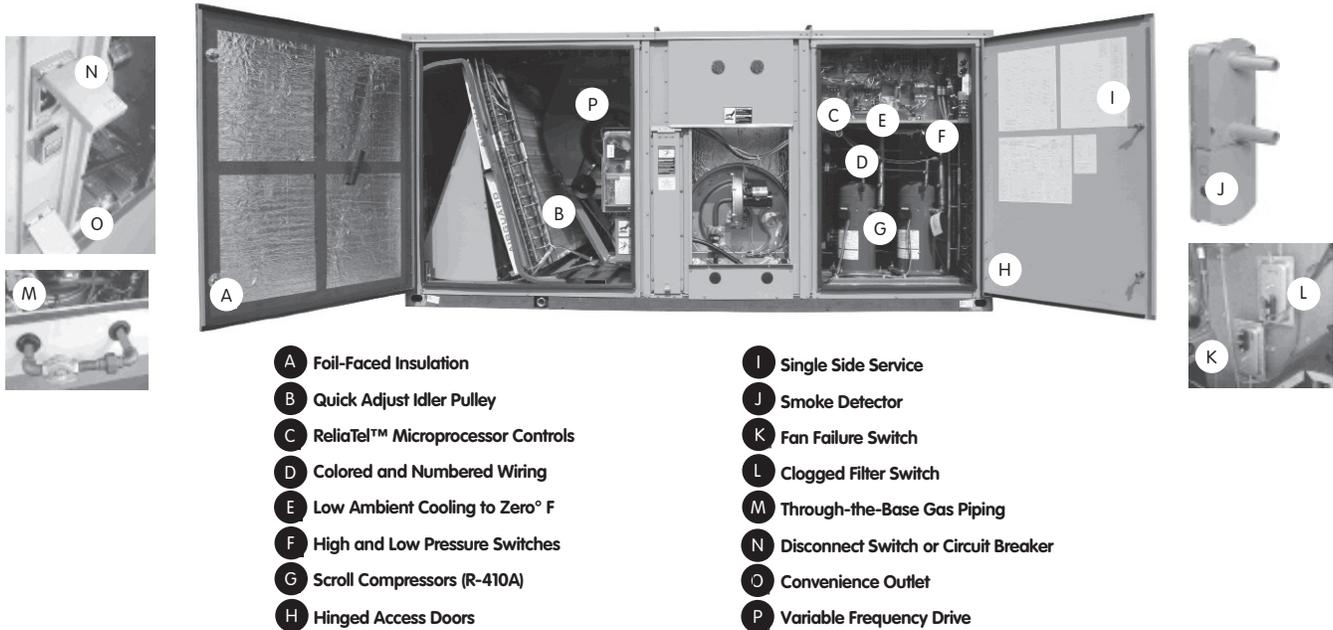

- |  |   |
|--|---|
| <b>A</b> Foil-Faced Insulation             | <b>I</b> Single Side Service                  |
| <b>B</b> Quick Adjust Idler Pulley         | <b>J</b> Smoke Detector                       |
| <b>C</b> ReliaTel™ Microprocessor Controls | <b>K</b> Fan Failure Switch                   |
| <b>D</b> Colored and Numbered Wiring       | <b>L</b> Clogged Filter Switch                |
| <b>E</b> Low Ambient Cooling to Zero° F    | <b>M</b> Through-the-Base Gas Piping          |
| <b>F</b> High and Low Pressure Switches    | <b>N</b> Disconnect Switch or Circuit Breaker |
| <b>G</b> Scroll Compressors (R-410A)       | <b>O</b> Convenience Outlet                   |
| <b>H</b> Hinged Access Doors               | <b>P</b> Variable Frequency Drive             |

## Standard and Optional Features at a Glance

### Standard Features

- 2" throwaway filters
- 5 year Limited Compressor Warranty
- 5 year Limited Heat Exchanger (12½–17½ Tons); 1 Year on 20 and 25 Tons
- 1 year Limited Parts Warranty
- 3 Stages of Cooling Capability on 12½–20 Tons, 4 Stages of Cooling Capability on 25 Tons (High Efficiency Units Only)
- Anti-Short Cycle Timer
- Belt Drive Motors
- Colored and Numbered Wiring
- Crankcase Heaters
- Dedicated Airflow
- Discharge Line Thermostat
- Easy Access Low Voltage Terminal Board (LTB)
- Foil-Faced and Edge Captured Insulation
- High Efficiency Drum and Tube Heat Exchanger
- High Efficiency Gas Heat with Hot Surface Ignition
- High Pressure Cutout
- IAQ Sloped Condensate Drain Pan
- Liquid Line Refrigerant Drier
- Low Ambient Cooling to 0°F
- Microchannel Type Condenser Coils
- Operating Charge of R-410A
- Patented Hybrid Condenser Coil for Easy Cleaning

- Phase Monitor
- Provisions for Through-the-Base Gas and Condensate Drain Connections
- Quick Access Panels
- Quick Adjust Idler Arm Pulley
- ReliaTel™ Microprocessor Controls
- Single Point Power
- Single Side Service
- Standardized Components
- Thermal Expansion Valve<sup>14</sup>
- U-shaped Airflow Pattern
- Variable Frequency Drive (Multispeed Indoor Fan, VAV, and Single Zone VAV)

### **Factory Installed Options<sup>15</sup> \***

- 2" MERV 8 or MERV 13 Pleated Filters<sup>6</sup> with Filter Removal Tool
- CO<sub>2</sub> Sensor Wiring (Wiring Only)
- Complete Coat™ Microchannel Condenser Coil
- Condensate Overflow Switch
- Dehumidification (Hot Gas Reheat)<sup>14</sup>
- Fault Detection Diagnostics (FDD)
- High Efficiency Motors<sup>6</sup>
- High Short Circuit Current Rated (SCCR) Electrical Subsystem<sup>23, 24</sup>
- Hinged Access Doors
- Human Interface - 5 inch Color Touchscreen
- Modulating Gas Heat Furnace with a 2.5:1 Turndown Ratio<sup>2, 9</sup>
- Multi-Speed Indoor Fans
- Multiple Zone Variable Air Volume (MZVAV)
- Novar Return Air Sensor<sup>13, 19</sup>
- Novar Unit Controls<sup>16, 19</sup>
- Powered or Unpowered Convenience Outlet<sup>5</sup>
- Single Zone Variable Air Volume (SZ VAV)
- Stainless Steel Drain Pan
- Stainless Steel Heat Exchanger with 10 Year Warranty<sup>6</sup>
- Supply and/or Return Air Smoke Detector<sup>2, 10</sup>
- Through the Base Electrical Access<sup>12</sup>
- Through the Base Electrical with Circuit Breaker<sup>11, 12</sup>
- Through the Base Electrical with Disconnect Switch<sup>7, 11, 12</sup>
- Through the Base Gas Piping

### **Factory\* or Field Installed Options<sup>15</sup>**

- BACnet™ Communications Interface<sup>1</sup>
- Barometric Relief<sup>1</sup>
- Clogged Filter/Fan Failure Switch<sup>2, 6</sup>
- Discharge Air Temperature Sensing Kit<sup>2, 6</sup>
- Economizer - Standard, Downflow<sup>1</sup>
- Electric Heaters<sup>6, 8, 12</sup>
- Froststat™<sup>2, 4, 6, 21</sup>
- Indoor Fan Motor Shaft Grounding Ring<sup>18</sup>
- LonTalk® Communications Interface (LCI)<sup>6</sup>
- Low Leak Economizer - Downflow
- Oversized Motors<sup>6</sup>
- Reference or Comparative Enthalpy<sup>3, 6</sup>



## Features and Benefits

---

- ReliaTel Options Module<sup>9</sup>
- Tool-less Hail Guards<sup>6</sup>
- Trane Communications Interface (TCI)<sup>6, 17</sup>

### Field Installed Options

- CO<sub>2</sub> Sensor
- Digital Display Zone Sensor
- Economizer - Standard, Horizontal
- High and Low Static Drive Kits
- Humidity Sensor
- Low Leak Economizer - Downflow
- LP Conversion Kit
- Manual Outside Air Dampers
- Motorized Outside Air Dampers
- Powered Exhaust
- Remote Potentiometer
- Roof Curb (Downflow Only)
- Thermostat
- Ventilation Override Accessory<sup>2</sup>
- Wireless Zone Sensor
- Zone Sensors and Remote Zone Sensors

**Note:** \*Most Factory Installed Options (FIOPS) available for Downflow Air Discharge units only. Please verify with ordering system for availability.

**Note:** Explanation of Note<sup>1</sup>-Note<sup>20</sup> located in "Model Number Description," p. 24.

### Other Benefits

- Cabinet Design Ensures Water Integrity
- Ease of Service, Installation and Maintenance
- Mixed Model Build Enables "Fastest in the Industry" Ship Cycle Times
- Outstanding Airflow Distribution
- ReliaTel Controls Benefits
- Rigorous Testing
- Unmatched Product Support
- Varitrac

## Outstanding Standard Features

### Anti-Short Cycle Timer

Provides a 3 minute minimum “ON” time and 3 minute “OFF” time for compressors to enhance compressor reliability by assuring proper oil return.

### Colored and Numbered Wiring

Save time and money tracing wires and diagnosing the unit.

### Compressors



Voyager contains the best compressor technology available to achieve the highest possible performance. Dual compressors are outstanding for humidity control, light load cooling conditions and system back-up applications. Dual compressors are available on all models and allow for efficient cooling utilizing three stages of compressor operation (high efficiency 12½–20 Tons models only). 25 tons high efficiency units have 4 stages of cooling with a single compressor and tandem set (similar to variable speed).

### Controls—ReliaTel™

ReliaTel microprocessor controls provide unit control for heating, cooling and ventilating utilizing input from sensors that measure indoor and outdoor temperature and other zone sensors. ReliaTel also provides outputs for building automation systems and expanded diagnostics. For a complete list of ReliaTel offerings, refer to [“Other Benefits,” p. 17.](#)

### Conversionless Units

The dedicated design units (either downflow or horizontal) require no panel removal or alteration time to convert in the field — a major cost savings during installation. Horizontal units come complete with duct flanges so the contractor doesn’t have to field fabricate them. These duct flanges are a time and cost saver.

### Crankcase Heaters

These band or insertion heaters provide improved compressor reliability by warming the oil to prevent migration during off-cycles or low ambient conditions. These are standard on all Voyager models.

### Discharge Line Thermostat

A bi-metal element discharge line thermostats installed as a standard feature on the discharge line of each system. This standard feature provides extra protection to the compressors against high discharge temperatures in case of loss of charge, extremely high ambient and other conditions which could drive the discharge temperature higher.

### Efficiencies

Standard or High Efficiency Cooling available.

## Features and Benefits

---

### Easy Access Low Voltage Terminal Board



Voyager's Low Voltage Terminal Board is external to the electrical control cabinet. It is extremely easy to locate and attach the thermostat wire and test operation of all unit functions. This is another cost and time saving installation feature.

### Foil Faced Insulation




All panels in the evaporator section of the unit have cleanable foil-faced insulation. All edges are either captured or sealed to ensure no insulation fibers get into the airstream.

### Heat Exchanger—Drum and Tube

The cabinet features a drum and tube heat exchanger (pictured right) that is manufactured using aluminized steel with stainless steel components for maximum durability.

The requirement for cycle testing of heat exchangers is 10,000 cycles by ANSI Z21.47. This is the standard required by both UL and AGA for cycle test requirements.

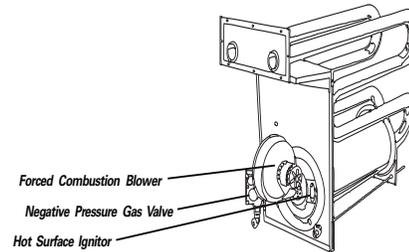

Trane requires the design to be tested to 2½ times this current standard. The drum and tube design has been tested and passed over 150,000 cycles, which is over 15 times the current ANSI cycling requirements. The negative pressure gas valve is used in the standard furnaces. This is one of our unique safety features. Modulating heaters use a pressure switch to ensure that the blower motor is operating before the gas valve is allowed to open.


The forced combustion blower supplies pre-mixed fuel through a single stainless steel burner screen into a sealed drum where ignition takes place. It is more reliable to operate and maintain than a multiple burner system. Modulating furnaces contain a metal fiber material to ensure proper flame distribution at low fire. The hot surface ignitor is a gas ignition device which doubles as a safety device utilizing a continuous test to prove the flame. The design is cycle tested at the factory for quality and reliability. Our gas/electric rooftops exceed all California seasonal efficiency requirements and perform even better than the California NO<sub>x</sub> emission requirements.

### Low Ambient Cooling


All Voyager microprocessor units have cooling capabilities down to 0°F as standard.

### Low Voltage Connections

The wiring of the low voltage connections to the unit and the zone sensors is as simple as 1-1, 2-2, and 3-3. This simplified system makes it easy for the installer to wire.

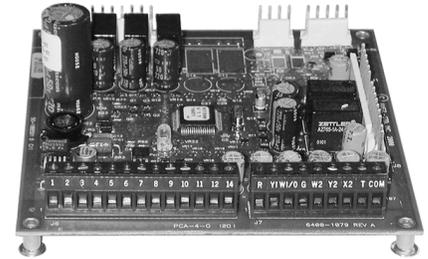

### Microchannel Condenser Coil

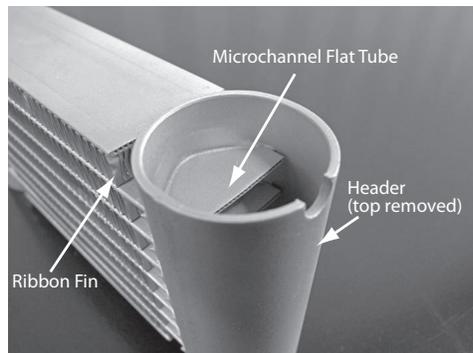

Microchannel coils have better heat transfer performance due to flat streamlined tubes with small ports, and metallurgical tube-to-fin bond.

Microchannel condenser coil can reduce system refrigerant charge by up to 50% (potential LEED credit) because of smaller internal volume, which can lead to better compressor reliability. Compact all aluminum microchannel coils also help to reduce the unit weight. All-aluminum construction improves re-cyclability. Galvanic corrosion is also minimized due to all aluminum construction. Strong aluminum brazed structure provides better fin protection.

### Motors

All indoor fan motors are belt drive as standard.

### Pressure Cutouts

Low and high pressure cutouts are standard on all Voyager models.

### Phase Monitor

Voyager features a three-phase line monitor module that protects against phase loss, phase reversal and phase unbalance. It is intended to protect compressors from reverse rotation. It has an operating input voltage range of 190–600 Vac, and LED indicators for ON and FAULT. There are no field adjustments and the module will automatically reset from a fault condition.

### Quick-Access Panels

Remove three or more screws for access to the standardized internal components and wiring.

### Quick-Adjust Slider Plate

With the Quick-Adjust Slider Plate (pictured right), the belt and sheaves can be quickly adjusted without moving the mounted fan motor. The result is a major savings in time and money.

### Single Point Power

A single electrical connection powers the unit.

### Single Side Service

Single side service is standard on all units.





## Features and Benefits

---

### Sloped Drain Pans

Every Voyager unit has a non-corrosive, sloped drain pan made of pre-painted steel and standard on all units.

### Standardized Components

Components are placed in the same location on all Voyager units. Familiarize yourself with one Voyager and you are familiar with every Voyager. Due to standardized components throughout the Voyager line, contractors/owners can stock fewer parts.

### U-Shaped Airflow Pattern

The U-shaped airflow allows for improved static capabilities.

### Variable Frequency Drives - VFD (Multispeed Indoor Fan, VAV, and SZ VAV Only)

Variable Frequency Drives are factory installed and tested to provide supply fan motor speed modulation. VFDs on the supply fan, as compared to inlet guide vanes or discharge dampers, are quieter, more efficient, and are eligible for utility rebates. All VFDs are designed to allow bypass if required. Bypass control will simply provide full nominal airflow in the event of drive failure. Bypass mode is indicated in the unit wiring manual. Modulating gas heat models with SZVAV allow tighter space temperature control with less temperature swing.

## Variety of Options<sup>1</sup>

### Factory Installed Options

#### CO<sub>2</sub> Sensor Wiring

This is the unit wiring for field installed CO<sub>2</sub> sensors. Factory-installed CO<sub>2</sub> sensor wiring saves time and ensures proper unit connections for the field installed CO<sub>2</sub> sensor kits.

#### Complete Coat™ Condenser Coil

The cathodic epoxy type electrodisposition coating is formulated for high edge build to a number of different types of heat exchangers. The coating is selected to provide excellent resistance and durability to corrosive effects of alkalies, acids, alcohols, petroleum, seawater, salt air, and corrosive environments. This coating is available for microchannel coils only.

#### Circuit Breaker (Required with Through-the-Base Electrical)

This option is a factory installed thermal magnetic, molded case, HACR Circuit Breaker with provisions for through the base electrical connections. Available on all models.

#### Condensate Overflow Switch

A condensate overflow switch is available to shut the unit down in the event that the condensate drain line becomes clogged. This option protects the unit from water overflowing from the drain pan and entering the base of the units.

#### Dehumidification (Hot Gas Reheat)

This option allows for increased outdoor air ventilation. It reduces humidity levels while increasing comfort level in the air space. Cooling can operate without a demand for dehumidification. The hot gas reheat coil is designed to deliver maximum reheat temperature.

---

<sup>1</sup> Refer to "Model Number Description," p. 24 for option availability.

### Disconnect Switch (Required with Through-the-Base Electrical)



Factory installed 3-pole, molded case, disconnect switch with provisions for through the base electrical connections are available. Available on all models.

Codes require a method of assured unit shutdown for servicing. Field-installed disconnects sometimes interfere with service access. Factory installation of unit disconnects reduces costs, assures proper mounting and provides the opportunity to upgrade to unit circuit breaker protection.

### Fault Detection & Diagnostics (FDD)

This offering meets the mandatory requirement of CA Title 24 of fully configurable diagnostics allowing fault history and reading fault codes at the unit. This option provides detection of the following faults: Air temperature sensor failure/fault and notification of acceptable economizer mode. The FDD system shall be certified by the Energy Commission as meeting the requirements.

### High Efficiency Filtration

Voyager units offer a variety of high efficiency filtration options. MERV 8 and MERV 13 filters provide additional filtration beyond the capabilities of typical 2" throwaway filters. Also, when MERV 8 or MERV 13 filters are ordered, units come equipped with a filter removal tool.

### High Efficiency Motors

High efficiency motors are available with efficiency ratings from 86.5 up to 91.0. It is not available for all models.

### High Short Circuit Current Rating (SCCR)

Voyager rooftop units now have an optional high short circuit current rated electrical subsystem for units with an MOP above 60A. This option is a perfect fit for applications that need protection against high potential fault currents. This option also includes individual over current protection for each compressor and the indoor fan, as well as a dedicated over current protection to the condenser fan motor(s). When the high SCCR is ordered, the control box will have components separated into two sections - high and low voltage components.

### Hinged Access Doors



These doors permit easy access to the filter, fan/heat, and compressor/control sections. They reduce the potential roof damage from screws or sharp access door corners.



## Features and Benefits

### Human Interface

The 5 inch Color Touchscreen Human Interface provides an intuitive user interface to the rooftop unit that speeds up unit commissioning, shortens unit troubleshooting times, and enhances preventative maintenance measures. The human interface includes several features such as:

- Data trending capabilities by means of time series graphs
- Historical alarm messages
- Real-time sensor measurements
- On board system setpoints
- USB port that enables the downloading of component runtime information as well as trended historical sensor data
- Customizable reports



### Modulating Gas Heat with a 2.5:1 Turndown Ratio

Upon receiving a call for heat, modulating gas heat units with a 2.5:1 turndown ratio light their burner at full fire (100%). After the burner is lit, the unit controls will monitor the discharge air temperature and modulate the input rate down to match the load.

**Note:** Modulating gas heat units are equipped with a stainless steel heat exchanger as standard.

### Multi-Speed Indoor Fan System

Multi-speed indoor fan system is designed for use in applications for meeting the minimum requirement of CA Title 24. This system incorporates a multi-speed fan control to change the speed of the fan to 67% of full airflow based off compressor stages.

### Multiple-Zone VAV Control

A multiple-zone VAV (MZVAV) system consists of a packaged rooftop unit that serves several individually controlled zones. Each zone is equipped with a VAV terminal unit that varies the quantity of air delivered to maintain the desired temperature in that zone. The rooftop unit controller varies the speed of the indoor fan to maintain the static pressure in the supply ductwork at a setpoint, ensuring that all zones receive the necessary quantity of air. In addition, cooling capacity is cycled to maintain the supply air temperature at the desired setpoint.

For decades, Trane has been an industry leader in rooftop VAV systems. Now, multiple-zone VAV control is available in Trane's light commercial rooftop platform (3-25 tons).

### Novar Unit Controls

Novar 3051 and 2024 are available for Voyager Cooling and Gas/Electric models.

### Powered or Unpowered Convenience Outlet

This option is a GFCI, 120V/15amp, 2-plug, convenience outlet, either powered or unpowered. This option can only be ordered when Through the Base Electrical with either the Disconnect Switch or Circuit Breaker option is ordered. This option is available on all models.

### Single Zone VAV - One Zone Variable Air Volume Mode

**Note:** *Single Zone VAV is designed to be used with a zone sensor. If a unit is configured for Single Zone VAV operation but is connected to a thermostat, the control will revert to multi-speed (2-Speed) indoor fan control. (See "Multi-Speed Indoor Fan System" above.)*

Single zone VAV is designed for use in single zone applications like gymnasiums, auditoriums, manufacturing facilities, retail box stores, and any large open spaces, where there is a lot of diversity in the load profile. Single Zone VAV (SZ VAV) is an ideal replacement to "yesterday's" constant volume (CV) systems, by reducing operating costs while improving occupant comfort. SZ VAV systems combine Trane application, control and system integration knowledge to exactly match fan speed with cooling and heating loads, regardless of the operating condition. Trane algorithms meet/exceed ASHRAE 90.1- 2010, SZ VAV energy-saving recommendations, and those of CA Title 24. The result is an optimized balance between zone temperature control and system energy savings. Depending on your specific application, energy savings can be as much as 20%.

**Note:** *Building system modeling in energy simulation software like TRACE is recommended to evaluate performance improvements for your application.*

SZ VAV is fully integrated into the ReliaTel Control system and is available today. It provides the simplest and fastest commissioning in the industry through proven factory-installed, wired, and tested system controllers. All control modules, logic and sensors are factory installed, and tested to assure the highest quality and most reliable system available. This means no special programming of algorithms, or hunting at the jobsite for sensors, boards, etc. that need to be installed in the field. Single zone VAV is a quick and simple solution for many applications and is available from your most trusted rooftop VAV system solution provider- Trane.

### Stainless Steel Drain Pan

For excellent corrosion and oxidation resistance, the optional stainless steel drain pan provides a cleanable surface that complement other IAQ solutions such as high efficiency filtration (MERV 8 or 13), demand control ventilation (CO<sub>2</sub>), and hot gas reheat.

### Stainless Steel Heat Exchanger

The optional stainless steel heat exchanger is constructed of 304 stainless steel. It is resistant to corrosion and oxidation and easy to clean. The high strength to weight ratio allows for high ventilation rates with gas units and comes standard with a modulating gas heat option. With this option, a 10-year stainless steel heat exchanger warranty is standard.

### Supply, Return, and Plenum Air Smoke Detector

With this option (pictured right) installed, if smoke is detected, all unit operation will be shut down. Reset will be manual at the unit. Return Air Smoke Detectors require minimum allowable airflow when used with certain models.

Supply and/or Return Smoke Detectors may not be used with the Plenum Smoke Detector.



### Through-the-Base Electrical Utility Access

An electrical service entrance shall be provided allowing electrical access for both control and main power connections inside the curb and through the base of the unit. Option will allow for field installation of liquid-tight conduit and an external field installed disconnect switch.


Factory provided through the base openings simplify wiring and piping. Because these utility openings frequently minimize the number of roof penetrations, the integrity of roofing materials is enhanced.

## Features and Benefits

---

### Through-the-Base Gas Piping (Gas/Electric Only)

This option (pictured right) shall have all piping necessary including, black steel, manual gas shut-off valve, elbows, and union. This assembly will require minor field labor to install.



## Factory or Field Installed Options<sup>1</sup>

### BACnet™ Communications Interface

The BACnet communications interface allows the unit to communicate directly with a generic open protocol BACnet MS/TP Network Building Automation System Controls.

### Barometric Relief

Designed to be used on downflow units, barometric relief is an unpowered means of relieving excess building pressure.

### Clogged Filter/Fan Failure Switch

A dedicated differential pressure switch is available to achieve active fan failure indication and/or clogged filter indication. These sensors allow a zone sensor service light or Integrated Comfort System to indicate a dirty filter or a fan that's not working. The field installation charges for these valuable feedback devices often eliminate them from consideration. Factory installation can make such features a good investment.

### Discharge Air Temperature Sensing Kit

Provides true discharge air temperature sensing in heating models. The kit is functional only with the ReliaTel Options Module.

### Economizer - Standard, Downflow

Economizers are equipped with either dry bulb, reference, or comparative enthalpy sensing. These economizers provide free cooling as the outdoor temperature and/or humidity decreases. Correctly installed, they offer a valuable energy savings. Factory-installed economizers save time and ensure proper installation.

**Note:** *Factory-installed economizers require some field set-up.*

### Economizer - Low Leak, Downflow

This accessory meets low leak requirements for ASHRAE 90.1, IECC, and CA Title 24 standards (3 cfm/ft<sup>2</sup>@1" wg exterior air, 4 cfm/ft<sup>2</sup>@1" wg return air). This option allows 100% outdoor air supply from 0-100% modulating dampers and is standard with barometric relief. It can be paired with powered exhaust for additional building pressure relief. This option can be paired with or without Fault Detection & Diagnostics (FDD) to meet current mandatory CA Title 24 requirements. Available on downflow units only. The economizers come with three control options, dry bulb and reference or comparative enthalpy (optional).

### Electric Heaters

Electric heat modules are available within the basic unit. If ordering the Through the Base Electrical option with an Electrical Heater, the heater must be factory installed.

---

<sup>1</sup> Refer to "Model Number Description," p. 24 for option availability.

### Frostat™

This capillary bulb embedded in the face of the evaporator coil monitors coil temperature to prevent evaporator icing and protect the compressor. Recommended for applications with low leaving air temperatures, low airflow and/or high latent load applications.

**Note:** Frostat is standard on all Single-Zone VAV, Multiple-Zone VAV, and high efficiency units.

### Indoor Fan Motor Shaft Grounding Ring

Shaft grounding rings are used on all VFD driven motors to provide a conductive discharge path away from the motor bearings to ground. Bearing Protection Rings shall be maintenance free circumferential rings of conductive micro fibers that discharge voltages to ground.

### LonTalk® Communications Interface

The LonTalk communications interface allows the unit to communicate as a Tracer™ LCI-V device or directly with generic LonTalk Network Building Automation System Controls.

### Oversized Motors

Factory or field installed oversized motors are available for high static applications.

### Reference or Comparative Enthalpy

Measures and communicates humidity while maximizing comfort control.

### ReliaTel Options Module (RTOM)

The RTOM monitors the supply fan proving, clogged filter, supply air temperature, exhaust fan setpoint, dehumidification setpoint, supply air tempering, Frostat™ and smoke detector.

**Note:** The RTOM is standard on high efficiency units.

### Tool-less Hail Guards

Tool-less, hail protection quality coil guards (pictured right) shall be either factory or field-installed for condenser coil protection. This option protects the condenser coil from vandalism and/or hail damage.



### Trane Communication Interface (TCI)

Available factory or field installed. This module when applied with the ReliaTel™ easily interfaces with Trane's Integrated Comfort™ System.

## Field Installed Options<sup>1</sup>

### CO<sub>2</sub> Sensor - Demand Control Ventilation (DCV)

Demand-controlled ventilation (DCV) is a control strategy that responds to the actual demand (need) for ventilation by regulating the rate at which the HVAC system brings outdoor air into the building. A CO<sub>2</sub> sensor measures the concentration (parts per million, ppm) of CO<sub>2</sub> (Carbon Dioxide) in the air. As the CO<sub>2</sub> concentration changes, the outside air damper modulates to meet the current ventilation needs of the zone. The CO<sub>2</sub> sensor kit is available as a field installed accessory. Two field installed kits are offered; CO<sub>2</sub> sensor and wiring or CO<sub>2</sub> sensor only. The CO<sub>2</sub> sensor only kit should be ordered with factory installed CO<sub>2</sub> sensor wiring. Factory installed CO<sub>2</sub> sensor wiring saves set-up time and ensures proper unit connections for the CO<sub>2</sub> sensor.

### Dampers

0–25 percent manual or 0–50 percent motorized outside air dampers are available.

<sup>1</sup> Refer to "Model Number Description," p. 24 for option availability.



## Features and Benefits

---

### **Digital Display Zone Sensor**

The Digital LCD (Liquid Crystal Display) zone sensor has the look and functionality of standard zone sensors.

### **Economizer - Standard, Horizontal**

Economizers are equipped with either dry bulb or reference or comparative enthalpy sensing. These economizers provide free cooling as the outdoor temperature and/or humidity decreases. Correctly installed, they offer a valuable energy savings.

### **Economizer - Low Leak, Downflow**

This accessory meets low leak requirements for ASHRAE 90.1, IECC, and CA Title 24 standards (3 cfm/ft<sup>2</sup>@1" wg exterior air, 4 cfm/ft<sup>2</sup>@1" wg return air). This option allows 100% outdoor air supply from 0-100% modulating dampers and is standard with barometric relief. It can be paired with powered exhaust for additional building pressure relief. Available on downflow units only.

### **Humidity Sensor/Humidistat**

Used in conjunction with our Dehumidification (Hot Gas Reheat) units to provide outstanding humidity control and comfort. Humidity sensors can be wall or duct mounted and set for levels between 40% and 60%.

### **LP Conversion Kit**

Provided for field conversion of gas/electric units from natural gas to propane.

### **Powered Exhaust**

This option is available on downflow units and provides exhaust of the return air, when using a downflow economizer, to maintain proper building pressurization. Great for relieving most building overpressurization problems.

### **Remote Potentiometer**

When properly installed in the economizer control circuitry, this accessory provides a remote variable resistance to enable the operator to adjust the minimum damper position.

### **Roof Curbs**

Available for downflow units. Only two roof curbs for the entire Voyager line simplifies curb selection.

### **Static Drive Accessories**

Available on many models, this high and low static drive accessories extend the capability of the standard motor. Avoid expensive motors and operating costs by installing this optimized sheave accessory.

### **Ventilation Override Accessory**

With the Ventilation Override Accessory installed, the unit can be set to transition to up to 3 different pre-programmed sequences for Smoke Purge, Pressurization and Exhaust. The transition occurs when a binary input on the RTOM is closed (shorted). This would typically be a hard wired relay output from a smoke detector or fire control panel. The ventilation override kit is available as a field installed accessory.

### **Wireless Zone Sensor**

LCD display that provides heat, cool, auto, or off. Includes two temperature setpoints and a lockable setting with °F or °C indicators.

### **Zone Sensors/Thermostats**

Available in programmable, automatic and manual styles.

**Note:** Zone sensors required for units configured for Single Zone VAV indoor fan system control to enable Single Zone VAV functionality.

## Other Benefits

### Cabinet Integrity

For added water integrity, Voyager has a raised 1-1/8" lip around the supply and return of the downflow units to prevent water from blowing into the ductwork.

### Easy to Install, Service and Maintain

Because today's owners are very cost-conscious when it comes to service and maintenance, Voyager was designed with direct input from service contractors. This valuable information helped to design a product that would get the serviceman off the job quicker and save the owner money. Voyager does this by offering outstanding standard features enhanced by a variety of factory and field installed options, multiple control options, rigorously tested proven designs and superior product and technical support.

### Outstanding Airflow Distribution


Airflow is outstanding. The Voyager can replace an older machine with old ductwork and, in many cases, improve the comfort through better air distribution.

### ReliaTel™ Controls Benefits

ReliaTel controls provide unit control for heating, cooling and ventilating by utilizing input from sensors that measure outdoor and indoor temperature.

Quality and Reliability are enhanced through ReliaTel control and logic:

- Prevents the unit from short cycling, considerably improving compressor life.
- Ensures the compressor will run for a specific amount of time which allows oil to return for better lubrication, enhancing the reliability of the compressor.



Voyager with ReliaTel reduces the number of components required to operate the unit, thereby reducing possibilities for component failure.

### ReliaTel Makes Installing and Servicing Easy

ReliaTel eliminates the need for field installed anti-shortcycle timer and time delay relays.

ReliaTel controls provide these functions as an integral part of the unit. The contractor no longer has to purchase these controls as options and pay to install them. The wiring of the low voltage connections to the unit and the zone sensors is as easy as 1-1, 2-2, and 3-3. This simplified system makes wiring easier for the installer.

### ReliaTel Makes Testing Easy

ReliaTel requires no special tools to run Voyager unit through its paces. Simply place a jumper between Test 1 and Test 2 terminals on the Low Voltage Terminal Board and the unit will walk through its operational steps automatically.

The unit automatically returns control to the zone sensor after stepping through the test mode a single time, even if the jumper is left on the unit.

As long as the unit has power and the "system on" LED is lit, ReliaTel is operational. The light indicates that the controls are functioning properly.

ReliaTel features expanded diagnostic capabilities when utilized with Trane Integrated Comfort™



## Features and Benefits

---

Systems.

Some zone sensor options have central control panel lights which indicate the mode the unit is in and possible diagnostic information (dirty filters for example).

### ***Other ReliaTel Benefits***

The ReliaTel built-in anti-shortcycle timer, time delay relay and minimum “on” time control functions are factory tested to assure proper operation. ReliaTel softens electrical “spikes” by staging on fans, compressors and heaters. Intelligent Fallback is a benefit to the building occupant. If a component goes astray, the unit will continue to operate at predetermined temperature setpoint.

Intelligent Anticipation is a standard ReliaTel feature. It functions continuously as ReliaTel and zone sensor(s) work together in harmony to provide much tighter comfort control than conventional electro-mechanical thermostats.

The same ReliaTel Board fits all Packaged Gas/Electric, Cooling, and Heat Pump models. This provides standardization of parts for contractors. Less money is tied up in inventory with ReliaTel.

### **Rigorous Testing**

All of Voyager’s designs were rigorously rain tested at the factory to ensure water integrity. Voyager units incorporate either a one piece top or the Trane-Tite-Top (T3). Each part of the top (either two or three pieces) overlaps in such a way that water cannot leak into the unit. These overlapped edges are gasketed and sealed to ensure superior water integrity.

Actual shipping tests were performed to determine packaging requirements. Units were test shipped around the country to determine the best packaging. Factory shake and drop tests were used as part of the package design process to help assure that the unit arrives at the job site in top condition.

Rigging tests include lifting a unit into the air and letting it drop one foot, assuring that the lifting lugs and rails hold up under stress. For the microchannel coils, the supplier will perform the leak check at 450 psig. The completely assembled refrigerant system is leak tested at a minimum of 225 psig with a refrigerant and nitrogen mixture.


All parts are inspected at the point of final assembly. Sub-standard parts are identified and rejected immediately. Every unit receives a 100% unit run test before leaving the production line to make sure it lives up to rigorous Trane requirements.

### **Unmatched Support**

Trane Sales Representatives are a Support Group that can assist you with:

- Product
- Application
- Service
- Training
- Special Applications
- Specifications
- Computer Programs and much more

### VariTrac® – Changeover-Bypass System

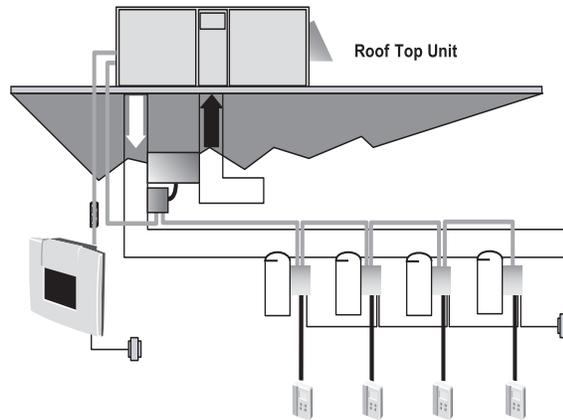

A changeover-bypass system consists of a packaged rooftop unit that serves several individually controlled zones. Each zone is equipped with a damper that varies the quantity of air delivered to maintain the desired temperature in that zone. However, unlike a conventional multiple-zone VAV system, the fan inside the rooftop unit operates at a constant speed. Any unneeded air is diverted to the return air stream through a bypass damper.

The term “changeover” refers to how this system handles the cooling and heating requirements of the building. The central rooftop unit can provide either cooled or heated air, and it makes this decision by periodically “polling” the zones.

**Note:** *VariTrac is for Voyager units with constant-speed indoor fan control. It is not recommended for use with Multiple-Speed Indoor Fan Control, Single-Zone VAV Control, or Multiple-Zone VAV Control.*



# Application Considerations

Application of this product should be within the cataloged airflow and cooling considerations.

## Barometric Relief

This product line offers an optional barometric relief damper for use in conjunction with economizer option. This accessory consists of gravity dampers which open with increased pressure. As the building air pressure increases, the pressure in the unit return air section also increases, opening the dampers and relieving the conditioned space.

**Note:** *The effectiveness of barometric relief damper during economizing operation is limited, depending on the pressure drop of the return-air path. For some applications, powered exhaust may be better suited for preventing over-pressurization when economizing.*

## Clearance Requirements

The recommended clearances identified with unit dimensions should be maintained to ensure adequate serviceability, maximum capacity and peak operating efficiency. Actual clearances which appear inadequate should be reviewed with local Trane sales personnel.

## Complete Coat™ Microchannel Condenser Coil

The cathodic epoxy type electrodisposition coating is formulated for high edge build to a number of different types of heat exchangers. The coating is selected to provide excellent resistance and durability to corrosive effects of alkalies, acids, alcohols, petroleum, seawater, salt air, and corrosive environments. This coating shall be available on microchannel condenser coils.

## Condensate Trap

The evaporator is a draw-through configuration. A trap must be field provided prior to start-up on the cooling cycle.

## Dual Compressors — 3 Stages of Cooling (12½–20 Tons)

Using the ReliaTel™ microprocessor controls, the Voyager™ high efficiency line can provide three stages of cooling, allowing for a more efficient and comfortable cooling operation.

**Important:** *All high efficiency products will have intertwined evaporator coils as standard. No face split coils are allowed with 3 or 4 stages of cooling.*

## 4 Stages of Cooling (25 Tons)

25 tons high efficiency units have 4 stages of cooling with a single compressor and tandem set (similar to variable speed).

## Heating Operation

The heat exchanger is manufactured with aluminized steel. To prevent condensation within the heat exchanger, do not exceed 50 percent outside air or a minimum mixed air temperature of 40°F.

## Optional Stainless Steel Heat Exchanger

The optional stainless steel heat exchanger is manufactured with 304 stainless steel. To prevent corrosion and prolong heat exchanger reliability, the minimum mixed air temperature allowed across the heat exchanger is 20°F. The stainless steel heat exchanger option is an excellent option that compliments the dehumidification package and is used in conjunction with the modulating heat option. Whenever high outside air or outside applications exist, these options should be utilized.

## Low Ambient Cooling

The Voyager line features, with ReliaTel™ microprocessor controls, low ambient cooling down to 0°F. The following options need to be included/considered when low ambient applications are required: continuous fan operation, crankcase heaters (standard), thermal expansion valves,

frostat. Contact your local Trane Representative for more assistance with low ambient cooling applications.

**Unit Pitch**

These units have sloped condensate drain pans. Units must be installed level. Any unit slope must be toward access side of the unit.

**Low Airflow**

Unit applications designed for airflow below 320 cfm/ton are available on cooling only units and gas heat units equipped with modulating gas heat. Units must be high efficiency units with dehumidification (hot gas reheat) or TXV with Frostat and Crankcase heaters. Electric heat is restricted below 320 cfm/ton. Multi-speed or single zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**VariTrac®**

VariTrac is for Voyager units with constant-speed indoor fan control. It is not recommended for use with Multiple-Speed Indoor Fan Control, Single-Zone VAV Control, or Multiple-Zone VAV Control.



# Selection Procedure

## Cooling Capacity

**Note:** Cooling Capacity Procedure is the same for cooling (T\*) and gas/electric (Y\*).

### Step 1.

Calculate the building’s total and sensible cooling loads at design conditions. Use the following calculation methods or any other standard accepted method. Factors used in unit selection:

Total Cooling Load: 180 MBh

Sensible Cooling Load: 126 MBh

Airflow: 6000 cfm

Electrical Characteristics: 460/60/3

Summer Design Conditions: Entering Evaporator Coil: 80 DB, 67 WB Outdoor Ambient: 95 DB

External Static Pressure: 0.39 in. wg

Rooftop—downflow configuration

Accessories

- Roof curb
- Economizer
- Electric Heat

### Step 2.

As a starting point, a rough determination must be made of the size of the unit. The final selection will be made after examining the performance at the given conditions. Divide the total cooling load by nominal Btu/h per ton (12 MBh per ton); then round up to the nearest unit size.

$$180 \text{ MBh} / 12 \text{ MBh} = 15.0 \text{ tons}$$

### Step 3.

Table 14, p. 39 shows that a TSD180F4 has a **gross** cooling capacity of 186.1 MBh and 139.1 MBh sensible capacity at 6000 cfm and 95 DB outdoor ambient with 80 DB, 67 WB air entering the evaporator.

### To Find Capacity at Intermediate Conditions Not in the Table.

When the design conditions are between two numbers that are in the capacity table, interpolation is required to approximate the capacity.

**Note:** Extrapolation outside of the table conditions is not recommended.

### Step 4.

In order to select the correct unit which meets the building’s requirements, the fan motor heat must be deducted from the gross cooling capacity. The amount of heat that the fan motor generates is dependent on the effort by the motor—cfm and static pressure. To determine the total unit static pressure you add the external static pressure to the additional static related by the added features:

|  |         |
|--|---------|
| External Static Duct System  | 0.39 wg |
| Standard Filter 2 in. from Table 70, p. 101  | 0.06 wg |
| Economizer from Table 70, p. 101 (100% Return Air)   | 0.04 wg |
| Electric Heater Size 36 kW from Table 70, p. 101   | 0.07 wg |
| (Reference “Heating Capacity,” p. 23 for determination of heater size.) No additional static add for gas/heat exchanger. |         |
| Total Static Pressure  | 0.56 wg |

**Note:** The Evaporator Fan Performance Table 40, p. 74 has already accounted for the pressure drop for standard filters and wet coils (see note below Table 40). Therefore, the actual total static pressure is 0.56 - 0.06 (from Table 70, p. 101 = 0.50 wg).

With 6000 cfm and 0.50 wg.

[Table 40, p. 74](#) shows 1.95 bhp for this unit. Note below the table gives a formula to calculate Fan Motor Heat,

$$3.15 \times \text{bhp} = \text{MBh.}$$

$$3.15 \times 1.95 = 6.14 \text{ MBh.}$$

Now subtract the fan motor heat from the gross cooling capacity of the unit:

**Net** Total Cooling Capacity  
 $= 186.1 \text{ MBh} - 6.14 = 179.96 \text{ MBh.}$

**Net** Sensible Cooling Capacity  
 $= 139.1 \text{ MBh} - 6.14 = 132.96 \text{ MBh.}$

#### **Step 5.**

If the performance will not meet the required load of the building—total or sensible cooling load, try a selection at the next higher size unit.

## **Heating Capacity**

**Note:** Heating capacity procedures DIFFER for cooling (T\*) and gas/electric (Y\*) units.

#### **Step 1.**

Calculate the building heating load.

#### **Step 2.**

Size the system heating capacity to match the calculated building heating load. The following are building heating requirements:

T\* cooling units:

460 volt/3 phase Power Supply

Total heating load of 115.0 MBh

6000 cfm

The electric heat accessory capacities are listed in [Table 72, p. 103](#). From the table, a 36 kW heater will deliver 122.94 MBh at 480 volts. In order to determine capacity at 460 volts, the heater voltage correction factor from [Table 73, p. 104](#) must be used. Therefore,  $122.94 \text{ MBh} \times .94$  (voltage correction factor) = 115.6 MBh.

Y\* gas/electric: Fuel natural gas total heating load of 195 MBh. [Table 71, p. 103](#) shows 250 MBh and 350 MBh input models. The output capacities of these furnaces are 203 MBh and 284 MBh respectively. The low heat model with 203 MBh output best matches the building requirements.

## **Air Delivery Selection**

**Note:** Air Delivery procedures is the same for cooling (T\*) and gas/electric (Y\*) units.

External static pressure drop through the air distribution system has been calculated to be 0.50 inches of water. From [Table 70, p. 101](#) static pressure drop through the economizer is 0.04 and the 36 kW heater is 0.07 inches of water (0.39 + 0.04 + 0.07). Enter [Table 40, p. 74](#) for a TSD180F4 at 6000 cfm and 0.50 static pressure. The standard motor at 585 rpm will give the desired airflow at a rated bhp of 1.95.



# Model Number Description

| Y   | S | D | 1  | 5 | 0 | G  | 3 | R | Z   | B  | 0  | 0  |
|---|---|---|--|---|---|--|---|---|---|----|----|----|
| 1   | 2 | 3 | 4  | 5 | 6 | 7  | 8 | 9 | 10  | 11 | 12 | 13 |
| <b>Digit 1 – Unit Type</b>                                  |   |   | <b>Digit 14 – Fresh Air Selection</b>  |   |   | 5 = CompleteCoat™ Condenser Coil with Hail Guard |   |   | <b>Digit 18 – Through The Base Provisions</b>   |    |    |    |
| T = Packaged Cooling, Electric Heat                         |   |   | 0 = No Fresh Air   |   |   |  |   |   | <b>Note:</b> <i>Applicable to Digit 1, T or Y models.</i>                             |    |    |    |
| Y = Packaged Gas/Electric                                   |   |   | D = Econ Dry Bulb w/ Barometric Relief <sup>1</sup>                              |   |   |  |   |   | 0 = No Through The Base Provisions  |    |    |    |
| <b>Digit 2 – Efficiency</b>                                 |   |   | F = Econ Reference Enthalpy w/ Barometric Relief <sup>1</sup>                    |   |   |  |   |   | A = Through The Base Electric <sup>12</sup>   |    |    |    |
| S = Standard Efficiency                                     |   |   | H = Econ Comparative Enthalpy w/ Barometric Relief <sup>1</sup>                  |   |   |  |   |   | <b>Note:</b> <i>Applicable to Digit1, Y models only.</i>                              |    |    |    |
| H = High Efficiency   |   |   | K = Low Leak Econ w/ Barometric Relief <sup>1</sup>                              |   |   |  |   |   | B = Through The Base Gas  |    |    |    |
| <b>Digit 3 – Airflow Configuration</b>                      |   |   | M = Low Leak Econ Reference Enthalpy w/ Barometric Relief <sup>1</sup>           |   |   |  |   |   | C = Through The Base Electric/Gas <sup>12</sup>                                       |    |    |    |
| D = Downflow  |   |   | P = Low Leak Econ Comparative Enthalpy w/ Barometric Relief <sup>1</sup>         |   |   |  |   |   | D = Through The Base Access   |    |    |    |
| H = Horizontal  |   |   | <b>Digit 15 – Supply Fan/Drive Type/Motor</b>                                    |   |   |  |   |   | <b>Digit 19 – Disconnect Switch/Circuit Breaker<sup>11</sup></b>                      |    |    |    |
| <b>Digit 4, 5, 6 – Nominal Gross Cooling Capacity (MBh)</b> |   |   | 0 = Standard Motor   |   |   |  |   |   | 0 = No Disconnect/circuit break   |    |    |    |
| 150 = 12½ Tons  |   |   | 1 = Oversized Motor <sup>6</sup>   |   |   |  |   |   | 1 = Unit Mounted Non-Fused Disconnect Switch  |    |    |    |
| 180 = 15 Tons   |   |   | 3 = High Efficiency Motor <sup>6</sup>   |   |   |  |   |   | 2 = Unit Mounted Circuit Breaker  |    |    |    |
| 210 = 17½ Tons  |   |   | 6 = Single Zone Variable Air Volume Standard Motor                               |   |   |  |   |   | <b>Digit 20 – Convenience Outlet Option</b>   |    |    |    |
| 240 = 20 Tons   |   |   | 7 = Multi-Speed Standard Motor   |   |   |  |   |   | 0 = Without Convenience Outlet  |    |    |    |
| 300 = 25 Tons   |   |   | 8 = Single Zone Variable Air Volume Oversized Motor                              |   |   |  |   |   | A = Unpowered Convenience Outlet <sup>5</sup>   |    |    |    |
| <b>Digit 7 – Major Design Sequence</b>                      |   |   | 9 = Multi-Speed Oversized Motor  |   |   |  |   |   | B = Powered Convenience Outlet <sup>5</sup>   |    |    |    |
| F = Microchannel Type Condenser Coils                       |   |   | A = Single Zone Variable Air Volume Standard Motor w/ Shaft Grounding Ring       |   |   |  |   |   | <b>Digit 21 – Communications Options</b>  |    |    |    |
| G = ASHRAE 90.1-2013 (fan/compressor staging) <sup>14</sup> |   |   | B = Multi-Speed Standard Motor w/ Shaft Grounding Ring                           |   |   |  |   |   | 0 = Without Communications Options  |    |    |    |
| <b>Digit 8 – Voltage Selection</b>                          |   |   | C = Single Zone Variable Air Volume Oversized Motor w/ Shaft Grounding Ring      |   |   |  |   |   | 1 = Trane Communications Interface <sup>6, 17</sup>                                   |    |    |    |
| 3 = 208-230/60/3  |   |   | D = Multi-Speed Oversized Motor w/ Shaft Grounding Ring                          |   |   |  |   |   | 2 = Lontalk Communications Interface <sup>6</sup>                                     |    |    |    |
| 4 = 460/60/3  |   |   | E = VAV Supply Air Temperature Control - Standard Motor                          |   |   |  |   |   | 3 = Novar 2024 Controls Interface <sup>19</sup>                                       |    |    |    |
| W = 575/60/3  |   |   | F = VAV Supply Air Temperature Control - Oversized Motor                         |   |   |  |   |   | 4 = Novar 3051 Controls Interface <sup>19</sup>                                       |    |    |    |
| K = 380/60/3  |   |   | G = VAV Supply Air Temperature Control - Standard Motor w/ Shaft Grounding Ring  |   |   |  |   |   | 5 = Novar 3051 Communications Interface with Demand Control Ventilation <sup>19</sup> |    |    |    |
| <b>Digit 9 – Unit Controls</b>                              |   |   | H = VAV Supply Air Temperature Control - Oversized Motor w/ Shaft Grounding Ring |   |   |  |   |   | 6 = Building Automation Control Network Communications Interface                      |    |    |    |
| R = Reliatel  |   |   | <b>Digit 16 – Hinged Service Access / Filters</b>                                |   |   |  |   |   | <b>Digit 22 – Refrigeration System Option</b>   |    |    |    |
| <b>Digit 10 – Heating Capacity</b>                          |   |   | 0 = Standard Panels/Standard Filters <sup>25</sup>                               |   |   |  |   |   | 0 = Standard refrigeration system   |    |    |    |
| <b>Note:</b> <i>(Applicable to Digit 1 T models only)</i>   |   |   | A = Hinged Access/Standard Filters <sup>25</sup>                                 |   |   |  |   |   | B = Dehumidification (Hot Gas Reheat) <sup>4,14</sup>                                 |    |    |    |
| 0 = No Heat   |   |   | B = Standard Panels/MERV 8 Filters <sup>6</sup>                                  |   |   |  |   |   | <b>Digit 23 – Refrigeration Controls</b>  |    |    |    |
| G = 18 kW Electric Heat                                     |   |   | C = Hinged Access/MERV 8 Filters <sup>6</sup>                                    |   |   |  |   |   | 0 = Without Refrigeration Controls  |    |    |    |
| K = 27 kW Electric Heat                                     |   |   | D = Standard Panels/MERV 13 Filters <sup>6</sup>                                 |   |   |  |   |   | 1 = Frostat <sup>9, 21</sup>  |    |    |    |
| N = 36 kW Electric Heat                                     |   |   | E = Hinged Access/MERV 13 Filters <sup>6</sup>                                   |   |   |  |   |   | <b>Digit 24 – Smoke Detector<sup>2, 10</sup></b>                                      |    |    |    |
| P = 54 kW Electric Heat                                     |   |   | <b>Digit 17 – Condenser Coil Protection</b>                                      |   |   |  |   |   | 0 = Without Smoke Detector  |    |    |    |
| R = 72 kW Electric Heat                                     |   |   | 0 = Standard Coil  |   |   |  |   |   | A = Return Air Smoke Detector   |    |    |    |
| <b>Note:</b> <i>(Applicable to Digit 1 Y models only)</i>   |   |   | 1 = Standard Coil With Hail Guard  |   |   |  |   |   | B = Supply Air Smoke Detector   |    |    |    |
| H = Gas Heat - High   |   |   | 4 = CompleteCoat™ Condenser Coil   |   |   |  |   |   | C = Return/Supply Air Smoke Detector  |    |    |    |
| L = Gas Heat - Low  |   |   |  |   |   |  |   |   | D = Plenum Smoke Detector <sup>22</sup>   |    |    |    |
| V = Gas Heat - SS Ht Ex - Modulating                        |   |   |  |   |   |  |   |   | <b>Digit 25 – System Monitoring Controls</b>  |    |    |    |
| X = Gas Heat - SS Ht Ex - Low                               |   |   |  |   |   |  |   |   | 0 = No Monitoring Controls  |    |    |    |
| Z = Gas Heat - SS Ht Ex - High                              |   |   |  |   |   |  |   |   | 1 = Clogged Filter Switch <sup>9</sup>  |    |    |    |
| <b>Digit 11 – Minor Design Sequence</b>                     |   |   |  |   |   |  |   |   |   |    |    |    |
| <b>Digit 12, 13 – Service Sequence</b>                      |   |   |  |   |   |  |   |   |   |    |    |    |
| 00 = None   |   |   |  |   |   |  |   |   |   |    |    |    |
| 01 = 18mm Microchannel Condenser Coil                       |   |   |  |   |   |  |   |   |   |    |    |    |
| <b>Note:</b> <i>'01' only available on select models.</i>   |   |   |  |   |   |  |   |   |   |    |    |    |

## Model Number Description

- 2 = Fan Failure Switch<sup>9</sup>
- 3 = Discharge Air Sensing<sup>9</sup>
- 4 = Clogged Filter Switch and Fan Failure switch<sup>9</sup>
- 5 = Clogged Filter Switch and Discharge Air Sensing<sup>9</sup>
- 6 = Fan Failure Switch and Discharge Air Sensing<sup>9</sup>
- 7 = Clogged Filter Switch, Fan Failure Switch and Discharge Air Sensing<sup>9</sup>
- 8 = NOVAR Return Air Sensor (Novar 2024)<sup>13,19</sup>
- 9 = NOVAR Zone Temp Sensor (Novar 3051)<sup>19</sup>
- A = Condensate Drain Pan Overflow Switch
- B = Clogged Filter Switch and Condensate Drain Pan Overflow Switch<sup>9</sup>
- C = Fan Failure Switch and Condensate Drain Pan Overflow Switch<sup>9</sup>
- D = Discharge Air Sensing and Condensate Drain Pan Overflow Switch<sup>9</sup>
- E = Clogged Filter Switch, Fan Failure Switch and Condensate Drain Pan Overflow Switch<sup>9</sup>
- F = Clogged Filter Switch, Discharge Air Sensing Tube and Condensate Drain Pan Overflow Switch<sup>9</sup>
- G = Fan Failure Switch, Discharge Air Sensing Tube and Condensate Drain Pan Overflow Switch<sup>9</sup>
- H = Clogged Filter Switch, Fan Failure Switch, Discharge Air Sensing and Condensate Drain Pan Overflow Switch<sup>9</sup>

### Digit 26 - System Monitoring Controls

- 0 = No Monitoring Controls
- A = Demand Control Ventilation (CO<sub>2</sub>)<sup>20</sup>
- B = FDD (Fault Detection and Diagnostics)
- C = FDD (Fault Detection Diagnostics) & Demand Control Ventilation (CO<sub>2</sub>)<sup>20</sup>

### Digit 27 - Unit Hardware Enhancements

- 0 = No Enhancements
- 1 = Stainless Steel Drain Pan

### Digit 28 - Short Circuit Current Rating

- 0 = Standard SCCR
- A = 65kA SCCR Option<sup>23, 24</sup>

### Digit 31 - Advanced Unit Controls

- 0 = Standard Unit Controls
- 1 = Human Interface<sup>26</sup>

**Note:** Most Factory Installed Options available for Downflow Air

*Discharge units only. Please verify with ordering system for availability.*

## Model Number Notes

1. Some field set up required.
  2. Requires ReliaTel Options Module.
  3. Requires Economizer.
  4. All 22<sup>nd</sup> digit model numbers for reheat coil (B) require additional factory installed options: Froststat, and 2" pleated filters.
  5. Must be ordered with Through-the-Base Electrical option or Horizontal-Side Access and either Unit Mounted Disconnect or Circuit Breaker.
  6. Available factory installed on downflow AND horizontal units. Verify with ordering system.
  7. Cannot be fused.
  8. Must be factory installed when using Through-the-Base Options.
  9. ReliaTel Options Module is required when ordering the following accessories: 4 Stage Cooling, Clogged Filter Switch, Fan Fail Switch, Condensate Overflow Switch, Discharge Air Sensing Kit, Froststat, Ventilation Override, Smoke Detector, Dehumidification and Modulating Gas Heat Furnace.
  10. Option cannot be ordered in conjunction with field installed economizer on downflow units. Must be factory installed. The return air smoke detector may not fit up or work properly on the Voyager units when used in conjunction with 3<sup>rd</sup> party accessories (such as bolt on heat wheels, economizers, and power exhaust). Do not order the return air smoke detectors when using this type of accessory.
  11. Unit mounted disconnect and circuit breakers are mutually exclusive of each other.
  12. Through-the-base electrical option or Horizontal-Side Access must be ordered with either unit mounted disconnect or circuit breaker. When adding heat, you must order Trane Electric Heat.
  13. This option consists of the Novar return air sensor (Novar #WTS-10) that is wired and shipped in the return air section of the unit. The sensor ships with approximately 15' of extra wire for dropping down the return air duct (downflow only).
  14. Available on high efficiency units only.
  15. All Factory Installed Options are Built-to-Order. Check order services for estimated production cycle.
  16. The Novar control option includes the following factory installed and wired devices: Novar ETM-2024 or Novar 3051 rooftop controller, fan proving switch, clogged filter or unit shutdown switch, Cool 1, Cool 2, Heat switch and discharge air sensor (Novar 2024 is downflow only).
- Note:** Option cannot be ordered in conjunction with a factory installed smoke detector.
17. TCI is for use with non-VariTrac systems and VariTrac systems.
  18. For use with multi-speed and SZVAV units only.
  19. Novar is not available with SZ VAV products.
  20. Demand Control Ventilation Option includes wiring only. The CO<sub>2</sub> sensor is a field-installed only option.
  21. Froststat is standard on VAV and high efficiency units.
  22. Supply and/or return smoke detector may not be used with the plenum smoke detector.
  23. Only available where MOP is above 60A.
  24. 575 VAC option is 25kA.
  25. Standard filters are not available with Low Leak Economizers.
  26. Human Interface is standard with FDD (Fault Detection Diagnostics).



# General Data

**Table 1. General data—cooling 12½–15 tons standard efficiency**

|  | <b>12½ Tons Downflow &amp; Horizontal Units</b> |                       | <b>15 Tons Downflow &amp; Horizontal Units</b> |                       |
|--|---|-----------------------|--|-----------------------|
|  | <b>TS*150F3,4,W,K</b>                           | <b>YS*150F3,4,W,K</b> | <b>TS*180F3,4,W,K</b>                          | <b>YS*180F3,4,W,K</b> |
| <b>Cooling Performance<sup>(a)</sup></b>   |   |                       |  |                       |
| Gross Cooling Capacity   | 150,000   | 150,000               | 186,000  | 186,000               |
| EER (Downflow/Horizontal) <sup>(b)</sup>   | 11  | 11                    | 11   | 11                    |
| Nominal Airflow CFM / ARI Rated CFM  | 5,000 / 4,400                                   | 5,000 / 4,400         | 6,000 / 5,300                                  | 6,000 / 5,300         |
| ARI Net Cooling Capacity   | 140,000   | 140,000               | 176,000  | 176,000               |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 12.2/13.5                                       | 12.2/13.5             | 12.2/13.2                                      | 12.2/13.2             |
| Percent Capacity @ part load (Stage 1/Stage 2)   | 55/100  | 55/100                | 68/100   | 68/100                |
| System Power (kW)  | 12.73   | 12.73                 | 16.00  | 16.00                 |
| <b>Compressor</b>  |   |                       |  |                       |
| Number/Type  | 2 / Scrolls                                     | 2 / Scrolls           | 2 / Scrolls                                    | 2 / Scrolls           |
| <b>Sound</b>   |   |                       |  |                       |
| Outdoor Sound Rating (BELS) <sup>(d)</sup>   | 9.2   | 9.2                   | 9.2  | 9.2                   |
| <b>Outdoor Coil</b>  |   |                       |  |                       |
| Type   | Microchannel                                    | Microchannel          | Microchannel                                   | Microchannel          |
| Coil Width (in.)   | 0.71  | 0.71                  | 0.71/1.0                                       | 0.71                  |
| Face Area (sq. ft.)  | 25.9  | 25.9                  | 35.2   | 35.2                  |
| Rows/FPI   | 1/23  | 1/23                  | 1/23 / 1/20                                    | 1/23                  |
| <b>Indoor Coil</b>   |   |                       |  |                       |
| Type   | Hi-Performance                                  | Hi-Performance        | Hi-Performance                                 | Hi-Performance        |
| Tube Size (in.) ID   | 0.3125  | 0.3125                | 0.3125   | 0.3125                |
| Face Area (sq. ft.)  | 17.50   | 17.50                 | 26.00  | 26.00                 |
| Rows/FPI   | 3 / 15  | 3 / 15                | 3 / 15   | 3 / 15                |
| Refrigerant Control  | Short Orifice                                   | Short Orifice         | Short Orifice                                  | Short Orifice         |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                                      | 1/1.00 NPT            | 1/1.00 NPT                                     | 1/1.00 NPT            |
| <b>Outdoor Fan</b>   |   |                       |  |                       |
| Type   | Propeller                                       | Propeller             | Propeller                                      | Propeller             |
| Number Used/Diameter (in.)   | 2 / 26  | 2 / 26                | 2 / 26   | 2 / 26                |
| Drive Type/No. Speeds  | Direct / 1                                      | Direct / 1            | Direct / 1                                     | Direct / 1            |
| cfm  | 11,000  | 11,000                | 11,000   | 11,000                |
| Number Motors/hp   | 2 / 0.50  | 2 / 0.50              | 2 / 0.50                                       | 2 / 0.50              |
| Motor rpm  | 1,100   | 1,100                 | 1,100  | 1,100                 |
| <b>Indoor Fan</b>  |   |                       |  |                       |
| Type   | FC Centrifugal                                  | FC Centrifugal        | FC Centrifugal                                 | FC Centrifugal        |
| Number Used/Diameter (in.)   | 1 / 15x15                                       | 1 / 15x15             | 1 / 18x18                                      | 1 / 18x18             |
| Drive Type/No. Speeds  | Belt / 1  | Belt / 1              | Belt / 1                                       | Belt / 1              |
| Number Motors  | 1   | 1                     | 1  | 1                     |
| Motor hp (Standard/Oversized) <sup>(e)</sup>   | 3.0 / 5.0                                       | 3.0 / 5.0             | 3.0 / 5.0                                      | 3.0 / 5.0             |
| Motor rpm (Standard/Oversized)   | 1,740 / 3,450                                   | 1,740 / 3,450         | 1,740 / 3,450                                  | 1,740 / 3,450         |
| Motor Frame Size (Standard/Oversized)  | 145T / 145T                                     | 145T / 145T           | 145T / 145T                                    | 145T / 145T           |

**Table 1. General data—cooling 12½–15 tons standard efficiency**

|  | <b>12½ Tons Downflow &amp; Horizontal Units</b> |                          | <b>15 Tons Downflow &amp; Horizontal Units</b> |                          |
|--|---|--------------------------|--|--------------------------|
|  | <b>TS*150F3,4,W,K</b>                           | <b>YS*150F3,4,W,K</b>    | <b>TS*180F3,4,W,K</b>                          | <b>YS*180F3,4,W,K</b>    |
| <b>Filters</b>   |   |                          |  |                          |
| Type Furnished <sup>(f)</sup>                                  | Throwaway                                       | Throwaway                | Throwaway                                      | Throwaway                |
| Number Size Recommended  |   |                          |  |                          |
| Downflow   | (2)20x20x2<br>(4)20x25x2                        | (2)20x20x2<br>(4)20x25x2 | (4)20x20x2<br>(4)20x25x2                       | (4)20x20x2<br>(4)20x25x2 |
| Horizontal   | (2)20x20x2<br>(4)20x25x2                        | (2)20x20x2<br>(4)20x25x2 | (8)20x25x2                                     | (8)20x25x2               |
| <b>Refrigerant Charge<br/>(Pounds of R-410A)<sup>(g)</sup></b> |   |                          |  |                          |
| 25mm Coil: Cir#1 / Cir#2                                       | 6.25/5.85                                       | 6.25/5.85                | 11.4 / 6.0                                     | 11.4 / 6.0               |
| 18mm Coil: Cir#1 / Cir#2                                       | 6.6/6.2   | 6.6/6.2                  |  |                          |

- (a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.
- (b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.
- (c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.
- (d) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.
- (e) For 380V/60Hz units, the oversized motor (Indoor Fan) is used as the standard motor. Refer to oversized motor data.
- (f) An optional 2-inch pleated filter is also available.
- (g) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.
- \* Indicates both downflow and horizontal units.

**Table 2. General data—heating—12½–15 tons standard efficiency**

|  | <b>12½ Tons Downflow &amp; Horizontal Units</b>             |               |   | <b>15 Tons Downflow &amp; Horizontal Units</b> |               |   |
|--|---|---------------|---|--|---------------|---|
|  | <b>Heating Performance<sup>(a)</sup>(Gas/Electric Only)</b> |               |   |  |               |   |
| <b>Heating Models</b>                    | <b>Low</b>  | <b>High</b>   | <b>Modulating<br/>Turn Down<br/>= 2.5:1</b> | <b>Low</b>                                     | <b>High</b>   | <b>Modulating<br/>Turn Down<br/>= 2.5:1</b> |
| <b>Heating Input (Btu/h)</b>             | 150,000   | 250,000       | 350,000                                     | 250,000  | 350,000       | 350,000                                     |
| 1st Stage (Btu)                          | 100,000   | 175,000       | 70,000                                      | 175,000  | 250,000       | 70,000                                      |
| <b>Heating Output (Btu/h)</b>            | 122,000   | 203,000       | 283,500                                     | 203,000  | 284,000       | 283,500                                     |
| 1st Stage (Btu)                          | 81,000  | 142,000       | 56,700                                      | 142,000  | 203,000       | 56,700                                      |
| <b>AFUE% (DF/HF)<sup>(b)</sup></b>       |   |               |   |  |               |   |
| Downflow/Horizontal                      | 81.0/81.0   | 80.7/79.9     | 80.1/79.1                                   | 80.7/79.9                                      | 80.1/79.1     | 80.1/79.1                                   |
| <b>Steady State Efficiency%</b>          | 81.0  | 81.0          | 81.0  | 81.0   | 81.0          | 81.0  |
| <b>No. Burners</b>                       | 1   | 1             | 1   | 1  | 1             | 1   |
| <b>No. Stages</b>                        | 2   | 2             | N/A   | 2  | 2             | N/A   |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5/14.0  | 2.5/14.0      | 2.5/14.0                                    | 2.5/14.0                                       | 2.5/14.0      | 2.5/14.0                                    |
| Natural or LP (minimum/maximum)          | Natural or LP   | Natural or LP | Natural Only                                | Natural or LP                                  | Natural or LP | Natural Only                                |
| <b>Gas Connection Pipe Size (in.)</b>    | 1/2   | 1/2           | 3/4   | 1/2  | 3/4           | 3/4   |

- (a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.
- (b) AFUE is rated in accordance with DOE test procedures.



## General Data

**Table 3. General data – 17½–20 tons standard efficiency**

|  | 17½ Tons Downflow & Horizontal Units |                | 20 Tons Downflow & Horizontal Units |                |
|--|--------------------------------------|----------------|-------------------------------------|----------------|
|  | TS*210F3,4,W,K                       | YS*210F3,4,W,K | TS*240F3,4,W,K                      | YS*240F3,4,W,K |
| <b>Cooling Performance<sup>(a)</sup></b>   |                                      |                |                                     |                |
| Gross Cooling Capacity   | 210,000                              | 210,000        | 259,000                             | 259,000        |
| EER (Downflow/Horizontal) <sup>(b)</sup>   | 11                                   | 11             | 10                                  | 10             |
| Nominal Airflow CFM / ARI Rated CFM  | 7,000 / 6,125                        | 7,000 / 6,125  | 8,000 / 7,000                       | 8,000 / 7,000  |
| ARI Net Cooling Capacity   | 196,000                              | 196,000        | 240,000                             | 240,000        |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 11.8/12.9                            | 11.8/12.9      | 11.5/12.3                           | 11.5/12.3      |
| Percent Capacity @ part load (Stage 1/Stage 2)   | 73/100                               | 73/100         | 66/100                              | 66/100         |
| System Power (kW)  | 17.82                                | 17.82          | 24.00                               | 24.00          |
| <b>Compressor</b>  |                                      |                |                                     |                |
| Number/Type  | 2 / Scrolls                          | 2 / Scrolls    | 2 / Scrolls                         | 2 / Scrolls    |
| <b>Sound</b>   |                                      |                |                                     |                |
| Outdoor Sound Rating (BELS) <sup>(d)</sup>   | 9.4                                  | 9.4            | 9.4                                 | 9.4            |
| <b>Outdoor Coil</b>  |                                      |                |                                     |                |
| Type   | Microchannel                         | Microchannel   | Microchannel                        | Microchannel   |
| Coil Width (in.)   | 0.71/1.0                             | 0.71/1.0       | 1.0                                 | 1.0            |
| Face Area (sq. ft.)  | 35.2                                 | 35.2           | 35.2                                | 35.2           |
| Rows/FPI   | 1/23 / 1/20                          | 1/23 / 1/20    | 1 / 20                              | 1 / 20         |
| <b>Indoor Coil</b>   |                                      |                |                                     |                |
| Type   | Hi-Performance                       | Hi-Performance | Hi-Performance                      | Hi-Performance |
| Tube Size (in.) ID   | 0.3125                               | 0.3125         | 0.3125                              | 0.3125         |
| Face Area (sq. ft.)  | 26.00                                | 26.00          | 26.00                               | 26.00          |
| Rows/FPI   | 4 / 15                               | 4 / 15         | 4 / 15                              | 4 / 15         |
| Refrigerant Control  | Short Orifice                        | Short Orifice  | Short Orifice                       | Short Orifice  |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                           | 1/1.00 NPT     | 1/1.00 NPT                          | 1/1.00 NPT     |
| <b>Outdoor Fan</b>   |                                      |                |                                     |                |
| Type   | Propeller                            | Propeller      | Propeller                           | Propeller      |
| Number Used/Diameter (in.)   | 2 / 26                               | 2 / 26         | 2 / 26                              | 2 / 26         |
| Drive Type/No. Speeds  | Direct / 1                           | Direct / 1     | Direct / 1                          | Direct / 1     |
| cfm  | 14,500                               | 14,500         | 15,500                              | 15,500         |
| Number Motors/hp   | 2 / 1.0                              | 2 / 1.0        | 2 / 1.0                             | 2 / 1.0        |
| Motor rpm  | 1125                                 | 1125           | 1125                                | 1125           |
| <b>Indoor Fan</b>  |                                      |                |                                     |                |
| Type   | FC Centrifugal                       | FC Centrifugal | FC Centrifugal                      | FC Centrifugal |
| Number Used/Diameter (in.)   | 1 / 18x18                            | 1 / 18x18      | 1 / 18x18                           | 1 / 18x18      |
| Drive Type/No. Speeds  | Belt / 1                             | Belt / 1       | Belt / 1                            | Belt / 1       |
| Number Motors  | 1                                    | 1              | 1                                   | 1              |
| Motor hp (Standard/Oversized) <sup>(e)</sup>   | 5.0 / 7.5                            | 5.0 / 7.5      | 5.0 / 7.5                           | 5.0 / 7.5      |
| Motor rpm (Standard/Oversized)   | 3,450 / 3,470                        | 3,450 / 3,470  | 3,450 / 3,470                       | 3,450 / 3,470  |
| Motor Frame Size (Standard/Oversized)  | 145T / 184T                          | 145T / 184T    | 145T / 184T                         | 145T / 184T    |

**Table 3. General data—17½–20 tons standard efficiency (continued)**

|  | 17½ Tons Downflow & Horizontal Units |                          | 20 Tons Downflow & Horizontal Units |                          |
|--|--------------------------------------|--------------------------|-------------------------------------|--------------------------|
|  | TS*210F3,4,W,K                       | YS*210F3,4,W,K           | TS*240F3,4,W,K                      | YS*240F3,4,W,K           |
| <b>Filters</b>                                   |                                      |                          |                                     |                          |
| Type Furnished <sup>(f)</sup>                    | Throwaway                            | Throwaway                | Throwaway                           | Throwaway                |
| Number Size Recommended                          |                                      |                          |                                     |                          |
| Downflow   | (4)20x20x2<br>(4)20x25x2             | (4)20x20x2<br>(4)20x25x2 | (4)20x20x2<br>(4)20x25x2            | (4)20x20x2<br>(4)20x25x2 |
| Horizontal                                       | (8)20x25x2                           | (8)20x25x2               | (8)20x25x2                          | (8)20x25x2               |
| <b>Refrigerant Charge<br/>(Pounds of R-410A)</b> |                                      |                          |                                     |                          |
| Downflow & Horizontal (Cir#1/Cir#2)              | 14.4 / 7.4                           | 14.4 / 7.4               | 13.5 / 7                            | 13.5 / 7                 |

(a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.

(b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.

(c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.

(d) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.

(e) For 380V/60Hz units, the oversized motor (Indoor Fan) is used as the standard motor. Refer to oversized motor data.

(f) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.

\* Indicates both downflow and horizontal units.

**Table 4. General data—heating—17½–20 tons standard efficiency**

|  | 17½ Tons Downflow & Horizontal Units                   |               |                                    | 20 Tons Downflow & Horizontal Units |               |                                       |
|--|--|---------------|------------------------------------|-------------------------------------|---------------|---------------------------------------|
|  | Heating Performance <sup>(a)</sup> (Gas/Electric Only) |               |                                    |                                     |               |                                       |
| Heating Models                           | Low  | High          | Modulating<br>Turn<br>Down = 2.5:1 | Low                                 | High          | Modulating<br>Turn<br>Down =<br>2.5:1 |
| <b>Heating Input (Btu/h)</b>             | 250,000  | 350,000       | 350,000                            | 250,000                             | 400,000       | 350,000                               |
| 1st Stage (Btu)                          | 175,000  | 250,000       | 70,000                             | 175,000                             | 300,000       | 80,000                                |
| <b>Heating Output (Btu/h)</b>            | 203,000  | 284,000       | 283,500                            | 203,000                             | 324,000       | 283,500                               |
| 1st Stage (Btu)                          | 142,000  | 203,000       | 56,700                             | 142,000                             | 243,000       | 64,800                                |
| <b>AFUE%<sup>(b)</sup></b>               |  |               |                                    |                                     |               |                                       |
| Downflow/Horizontal                      | 80.2/81.0  | 79.3/79.7     | 79.3/79.7                          | 80.2/81.0                           | 79.8/79.7     | 79.8/79.7                             |
| <b>Steady State Efficiency%</b>          | 81.0   | 81.0          | 81.0                               | 81.0                                | 81.0          | 81.0                                  |
| <b>No. Burners</b>                       | 1  | 1             | 1                                  | 1                                   | 1             | 1                                     |
| <b>No. Stages</b>                        | 2  | 2             | N/A                                | 2                                   | 2             | N/A                                   |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5/14.0   | 2.5/14.0      | 2.5/14.0                           | 2.5/14.0                            | 2.5/14.0      | 2.5/14.0                              |
| Natural or LP (minimum/maximum)          | Natural or LP  | Natural or LP | Natural Only                       | Natural or LP                       | Natural or LP | Natural Only                          |
| <b>Gas Connection Pipe Size (in.)</b>    | 1/2  | 3/4           | 3/4                                | 1/2                                 | 3/4           | 3/4                                   |

(a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.

(b) AFUE is rated in accordance with DOE test procedures.



## General Data

**Table 5. General data—25 ton standard efficiency**

|  | <b>25 Tons Downflow &amp; Horizontal Units</b> |                       |
|--|--|-----------------------|
|  | <b>TS*300F3,4,W,K</b>                          | <b>YS*300F3,4,W,K</b> |
| <b>Cooling Performance<sup>(a)</sup></b>   |  |                       |
| Gross Cooling Capacity   | 296,400  | 296,400               |
| EER (Downflow/Horizontal) <sup>(b)</sup>   | 10   | 10                    |
| Nominal Airflow CFM / ARI Rated CFM  | 10,000 / 8,000                                 | 10,000 / 8,000        |
| ARI Net Cooling Capacity   | 272,000  | 272,000               |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 10.4/12.0                                      | 10.4/12.0             |
| Percent Capacity @ part load (Stage 1/Stage 2)   | 50/100   | 50/100                |
| System Power (kW)  | 27.20  | 27.20                 |
| <b>Compressor</b>  |  |                       |
| Number/Type  | 2 / Scrolls                                    | 2 / Scrolls           |
| <b>Sound</b>   |  |                       |
| Outdoor Sound Rating (BELS) <sup>(d)</sup>   | 9.4  | 9.4                   |
| <b>Outdoor Coil</b>  |  |                       |
| Type   | Microchannel                                   | Microchannel          |
| Coil Width (in.)   | 1.0  | 1.0                   |
| Face Area (sq. ft.)  | 35.2   | 35.2                  |
| Rows/FPI   | 1 / 20   | 1 / 20                |
| <b>Indoor Coil</b>   |  |                       |
| Type   | Hi-Performance                                 | Hi-Performance        |
| Tube Size (in.) ID   | 0.3125   | 0.3125                |
| Face Area (sq. ft.)  | 26.00  | 26.00                 |
| Rows/FPI   | 4 / 15   | 4 / 15                |
| Refrigerant Control  | Short Orifice                                  | Short Orifice         |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                                     | 1/1.00 NPT            |
| <b>Outdoor Fan</b>   |  |                       |
| Type   | Propeller                                      | Propeller             |
| Number Used/Diameter (in.)   | 2 / 28   | 2 / 28                |
| Drive Type/No. Speeds  | Direct / 1                                     | Direct / 1            |
| cfm  | 16,100   | 16,100                |
| Number Motors/hp   | 2 / 1.0  | 2 / 1.0               |
| Motor rpm  | 1125   | 1125                  |
| <b>Indoor Fan</b>  |  |                       |
| Type   | FC Centrifugal                                 | FC Centrifugal        |
| Number Used/Diameter (in.)   | 1 / 18x18                                      | 1 / 18x18             |
| Drive Type/No. Speeds  | Belt / 1                                       | Belt / 1              |
| Number Motors  | 1  | 1                     |
| Motor hp (Standard/Oversized)  | 7.5 / N/A                                      | 7.5 / N/A             |
| Motor rpm (Standard/Oversized)   | 3,470 / N/A                                    | 3,470 / N/A           |
| Motor Frame Size (Standard/Oversized)  | 184T / N/A                                     | 184T / N/A            |

**Table 5. General data—25 ton standard efficiency (continued)**

|  | 25 Tons Downflow & Horizontal Units |                       |
|--|-------------------------------------|-----------------------|
|  | TS*300F3,4,W,K                      | YS*300F3,4,W,K        |
| <b>Filters</b>   |                                     |                       |
| Type Furnished <sup>(e)</sup>                              | Throwaway                           | Throwaway             |
| Number Size Recommended                                    |                                     |                       |
| Downflow   | (4)20x20x2 (4)20x25x2               | (4)20x20x2 (4)20x25x2 |
| Horizontal   | (8)20x25x2                          | (8)20x25x2            |
| <b>Refrigerant Charge (Pounds of R-410A)<sup>(f)</sup></b> |                                     |                       |
| Downflow & Horizontal (Cir#1/Cir#2)                        | 10.5 / 10.5                         | 10.5 / 10.5           |

- (a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.
- (b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.
- (c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.
- (d) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.
- (e) An optional 2-inch pleated filter is also available.
- (f) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.
- \* Indicates both downflow and horizontal units.

**Table 6. General data—heating—25 tons**

|  | 25 Tons Downflow & Horizontal Units                    |               |                              |
|--|--|---------------|------------------------------|
|  | Heating Performance <sup>(a)</sup> (Gas/Electric Only) |               |                              |
| Heating Models                           | Low  | High          | Modulating Turn Down = 2.5:1 |
| <b>Heating Input (Btu/h)</b>             | 250,000  | 400,000       | 350,000                      |
| 1st Stage (Btu)                          | 175,000  | 300,000       | 80,000                       |
| <b>Heating Output (Btu/h)</b>            | 203,000  | 324,000       | 283,500                      |
| 1st Stage (Btu)                          | 142,000  | 243,000       | 64,800                       |
| <b>AFUE%<sup>(b)</sup></b>               |  |               |                              |
| Downflow/Horizontal                      | 80.2 / 81.0  | 79.8 / 79.7   | 79.8 / 79.7                  |
| <b>Steady State Efficiency%</b>          | 81.0   | 81.0          | 81.0                         |
| <b>No. Burners</b>                       | 1  | 1             | 1                            |
| <b>No. Stages</b>                        | 2  | 2             | N/A                          |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5 / 14.0   | 2.5 / 14.0    | 2.5 / 14.0                   |
| Natural or LP (minimum/maximum)          | Natural or LP  | Natural or LP | Natural Only                 |
| <b>Gas Connection Pipe Size (in.)</b>    | ½  | ¾             | ¾                            |

- (a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.
- (b) AFUE is rated in accordance with DOE test procedures.



## General Data

**Table 7. General data – 12½–15 ton high efficiency**

|  | <b>12½ Tons Downflow &amp; Horizontal Units</b> |                     | <b>15 Tons Downflow &amp; Horizontal Units</b> |                     |
|--|---|---------------------|--|---------------------|
|  | <b>TH*150G3,4,W</b>                             | <b>YH*150G3,4,W</b> | <b>TH*180G3,4,W</b>                            | <b>YH*180G3,4,W</b> |
| <b>Cooling Performance<sup>(a)</sup></b>   |   |                     |  |                     |
| Gross Cooling Capacity   | 152,400   | 152,400             | 180,500  | 180,500             |
| EER <sup>(b)</sup>   | 12.1  | 12.1                | 12.1   | 12.1                |
| Nominal CFM / ARI Rated CFM  | 5,000 / 4,000                                   | 5,000 / 4,000       | 6,000 / 5,250                                  | 6,000 / 5,250       |
| ARI Net Cooling Capacity   | 144,000   | 144,000             | 174,000  | 174,000             |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 13.5/15.0                                       | 13.5/15.0           | 14.0/15.0                                      | 14.0/15.0           |
| Percent Capacity @ part load (Stage 1/Stage 2/Stage 3) <sup>(d)</sup>                                  | 30/70/100                                       | 30/70/100           | 32/68/100                                      | 32/68/100           |
| System Power (kW)  | 11.90   | 11.90               | 14.38  | 14.38               |
| <b>Compressor</b>  |   |                     |  |                     |
| Number/Type  | 2 / Scrolls                                     | 2 / Scrolls         | 2 / Scrolls                                    | 2 / Scrolls         |
| <b>Sound</b>   |   |                     |  |                     |
| Outdoor Sound Rating (BELS) <sup>(e)</sup>   | 9.2   | 9.2                 | 9.2  | 9.2                 |
| <b>Outdoor Coil</b>  |   |                     |  |                     |
| Type   | Microchannel                                    | Microchannel        | Microchannel                                   | Microchannel        |
| Coil Width (in.)   | 1.0   | 1.0                 | 1.0  | 1.0                 |
| Face Area (sq. ft.)  | 35.2  | 35.2                | 42.6   | 42.6                |
| Rows/FPI   | 1 / 20  | 1 / 20              | 1 / 20   | 1 / 20              |
| <b>Indoor Coil</b>   |   |                     |  |                     |
| Type   | Hi-Performance                                  | Hi-Performance      | Hi-Performance                                 | Hi-Performance      |
| Tube Size (in.) ID   | 0.3125  | 0.3125              | 0.3125   | 0.3125              |
| Face Area (sq. ft.)  | 26.00   | 26.00               | 31.42  | 31.42               |
| Rows/FPI   | 4 / 15  | 4 / 15              | 4 / 15   | 4 / 15              |
| Refrigerant Control  | TXV   | TXV                 | TXV  | TXV                 |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                                      | 1/1.00 NPT          | 1/1.00 NPT                                     | 1/1.00 NPT          |
| <b>Outdoor Fan</b>   |   |                     |  |                     |
| Type   | Propeller                                       | Propeller           | Propeller                                      | Propeller           |
| Number Used/Diameter (in.)   | 2 / 26  | 2 / 26              | 2 / 26   | 2 / 26              |
| Drive Type/No. Speeds  | Direct / 1                                      | Direct / 1          | Direct / 1                                     | Direct / 1          |
| cfm  | 11,400  | 11,400              | 11,700   | 11,700              |
| Number Motors/hp   | 2 / 0.50  | 2 / 0.50            | 2 / 0.50                                       | 2 / 0.50            |
| Motor rpm  | 1,100   | 1,100               | 1,100  | 1,100               |
| <b>Indoor Fan</b>  |   |                     |  |                     |
| Type   | FC Centrifugal                                  | FC Centrifugal      | FC Centrifugal                                 | FC Centrifugal      |
| Number Used/Diameter (in.)   | 1 / 18x18                                       | 1 / 18x18           | 1 / 18x18                                      | 1 / 18x18           |
| Drive Type/No. Speeds  | Belt / 1  | Belt / 1            | Belt / 1                                       | Belt / 1            |
| Number Motors  | 1   | 1                   | 1  | 1                   |
| Motor hp (Standard/Oversized)  | 3.0 / 5.0                                       | 3.0 / 5.0           | 3.0 / 5.0                                      | 3.0 / 5.0           |
| Motor rpm (Standard/Oversized)   | 1,740 / 3,450                                   | 1,740 / 3,450       | 1,740 / 3,450                                  | 1,740 / 3,450       |
| Motor Frame Size (Standard/Oversized)  | 145T / 145T                                     | 145T / 145T         | 145T / 145T                                    | 145T / 145T         |

**Table 7. General data—12½–15 ton high efficiency**

|  | 12½ Tons Downflow & Horizontal Units |                       | 15 Tons Downflow & Horizontal Units |                          |
|--|--------------------------------------|-----------------------|-------------------------------------|--------------------------|
|  | TH*150G3,4,W                         | YH*150G3,4,W          | TH*180G3,4,W                        | YH*180G3,4,W             |
| <b>Filters</b>                                   |                                      |                       |                                     |                          |
| Type Furnished <sup>(f)</sup>                    | Throwaway                            | Throwaway             | Throwaway                           | Throwaway                |
| Number Size Recommended                          |                                      |                       |                                     |                          |
| Downflow   | (4)20x20x2 (4)20x25x2                | (4)20x20x2 (4)20x25x2 | (8)20x20x2<br>(4)20x16x2            | (8)20x20x2<br>(4)20x16x2 |
| Horizontal                                       | (8)20x25x2                           | (8)20x25x2            | (12)20x20x2                         | (12)20x20x2              |
| <b>Refrigerant Charge (Pounds of R-410A) (g)</b> |                                      |                       |                                     |                          |
| Downflow & Horizontal (Cir#1/Cir#2)              | 12.5/7.1                             | 12.5/7.1              | 13.0/8.5                            | 13.0/8.5                 |
| Optional Hot Gas Reheat Coil (Cir#1/Cir#2)       | 9.2 / 6.9                            | 9.2 / 6.9             | 10.9 / 8.9                          | 10.9 / 8.9               |

- (a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.
- (b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.
- (c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.
- (d) 3 stages not available with Reheat models.
- (e) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.
- (f) An optional 2 inch pleated filter is also available.
- (g) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.
- \* Indicates both downflow and horizontal units.

**Table 8. General data—heating—12½-15 ton high efficiency**

|  | 12½ Tons Downflow & Horizontal Units                   |             |                              | 15 Tons Downflow & Horizontal Units |             |                              |
|--|--|-------------|------------------------------|-------------------------------------|-------------|------------------------------|
|  | Heating Performance <sup>(a)</sup> (Gas/Electric Only) |             |                              |                                     |             |                              |
| Heating Models                           | Low  | High        | Modulating Turn Down = 2.5:1 | Low                                 | High        | Modulating Turn Down = 2.5:1 |
| <b>Heating Input (Btu/h)</b>             | 150,000  | 250,000     | 350,000                      | 250,000                             | 350,000     | 350,000                      |
| 1st Stage (Btu)                          | 100,000  | 175,000     | 70,000                       | 175,000                             | 250,000     | 70,000                       |
| <b>Heating Output (Btu/h)</b>            | 122,000  | 203,000     | 283,500                      | 203,000                             | 284,000     | 283,500                      |
| 1st Stage (Btu)                          | 81,000   | 142,000     | 56,700                       | 142,000                             | 203,000     | 56,700                       |
| <b>AFUE% (DF/HF)<sup>(b)</sup></b>       |  |             |                              |                                     |             |                              |
| Downflow/Horizontal                      | 81.0 / 81.0  | 80.7 / 79.9 | 80.1 / 79.1                  | 81.7 / 79.9                         | 80.1 / 79.1 | 80.1 / 79.1                  |
| <b>Steady State Efficiency%</b>          | 81   | 81          | 81                           | 81                                  | 81          | 81                           |
| <b>No. Burners</b>                       | 1  | 1           | 1                            | 1                                   | 1           | 1                            |
| <b>No. Stages</b>                        | 2  | 2           | N/A                          | 2                                   | 2           | N/A                          |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5 / 14.0   | 2.5 / 14.0  | 2.5 / 14.0                   | 2.5 / 14.0                          | 2.5 / 14.0  | 2.5 / 14.0                   |
| Natural or LP (minimum/maximum)          |  |             | Natural Only                 |                                     |             | Natural Only                 |
| <b>Gas Connection Pipe Size (in.)</b>    | ½  | ½           | ¾                            | ½                                   | ¾           | ¾                            |

- (a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.
- (b) AFUE is rated in accordance with DOE test procedures.



## General Data

**Table 9. General data – 17½–20 ton high efficiency**

|  | 17½ Tons Downflow & Horizontal Units |                | 20 Tons Downflow & Horizontal Units |                |
|--|--------------------------------------|----------------|-------------------------------------|----------------|
|  | TH*210G3,4,W                         | YH*210G3,4,W   | TH*240G3,4,W                        | YH*240G3,4,W   |
| <b>Cooling Performance<sup>(a)</sup></b>   |                                      |                |                                     |                |
| Gross Cooling Capacity   | 214,800                              | 214,800        | 248,500                             | 248,500        |
| EER <sup>(b)</sup>   | 11.8                                 | 11.8           | 11.0                                | 11.0           |
| Nominal CFM / ARI Rated CFM  | 7,000 / 5,600                        | 7,000 / 5,600  | 8,000 / 6,400                       | 8,000 / 6,400  |
| ARI Net Cooling Capacity   | 204,000                              | 204,000        | 234,000                             | 234,000        |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 13.0/14.0                            | 13.0/14.0      | 12.4/14.0                           | 12.4/14.0      |
| Percent Capacity @ part load (Stage 1/Stage 2/Stage 3) <sup>(d)</sup>                                  | 31/69/100                            | 31/69/100      | 30/70/100                           | 30/70/100      |
| System Power (kW)  | 17.29                                | 17.29          | 21.27                               | 21.27          |
| <b>Compressor</b>  |                                      |                |                                     |                |
| Number/Type  | 2 / Scrolls                          | 2 / Scrolls    | 2 / Scrolls                         | 2 / Scrolls    |
| <b>Sound</b>   |                                      |                |                                     |                |
| Outdoor Sound Rating (BELS) <sup>(e)</sup>   | 9.2                                  | 9.2            | 9.4                                 | 9.4            |
| <b>Outdoor Coil</b>  |                                      |                |                                     |                |
| Type   | Microchannel                         | Microchannel   | Microchannel                        | Microchannel   |
| Coil Width (in.)   | 1.0                                  | 1.0            | 1.0                                 | 1.0            |
| Face Area (sq. ft.)  | 42.6                                 | 42.6           | 42.6                                | 42.6           |
| Rows/FPI   | 1 / 20                               | 1 / 20         | 1 / 20                              | 1 / 20         |
| <b>Indoor Coil</b>   |                                      |                |                                     |                |
| Type   | Hi-Performance                       | Hi-Performance | Hi-Performance                      | Hi-Performance |
| Tube Size (in.) ID   | 0.3125                               | 0.3125         | 0.3125                              | 0.3125         |
| Face Area (sq. ft.)  | 31.42                                | 31.42          | 31.42                               | 31.42          |
| Rows/FPI   | 4 / 15                               | 4 / 15         | 4 / 15                              | 4 / 15         |
| Refrigerant Control  | TXV                                  | TXV            | TXV                                 | TXV            |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                           | 1/1.00 NPT     | 1/1.00 NPT                          | 1/1.00 NPT     |
| <b>Outdoor Fan</b>   |                                      |                |                                     |                |
| Type   | Propeller                            | Propeller      | Propeller                           | Propeller      |
| Number Used/Diameter (in.)   | 2 / 26                               | 2 / 26         | 2 / 28                              | 2 / 28         |
| Drive Type/No. Speeds  | Direct / 1                           | Direct / 1     | Direct / 1                          | Direct / 1     |
| cfm  | 15,800                               | 15,800         | 16,500                              | 16,500         |
| Number Motors/hp   | 2 / 1.0                              | 2 / 1.0        | 2 / 1.0                             | 2 / 1.0        |
| Motor rpm  | 1,125                                | 1,125          | 1,125                               | 1,125          |
| <b>Indoor Fan</b>  |                                      |                |                                     |                |
| Type   | FC Centrifugal                       | FC Centrifugal | FC Centrifugal                      | FC Centrifugal |
| Number Used/Diameter (in.)   | 1 / 18x18                            | 1 / 18x18      | 1 / 18x18                           | 1 / 18x18      |
| Drive Type/No. Speeds  | Belt / 1                             | Belt / 1       | Belt / 1                            | Belt / 1       |
| Number Motors  | 1                                    | 1              | 1                                   | 1              |
| Motor hp (Standard/Oversized)  | 5.0 / 7.5                            | 5.0 / 7.5      | 5.0 / 7.5                           | 5.0 / 7.5      |
| Motor rpm (Standard/Oversized)   | 3,450 / 3,470                        | 3,450 / 3,470  | 3,450 / 3,470                       | 3,450 / 3,470  |
| Motor Frame Size (Standard/Oversized)  | 145T / 184T                          | 145T / 184T    | 145T / 184T                         | 145T / 184T    |

**Table 9. General data – 17½–20 ton high efficiency**

|  | 17½ Tons Downflow & Horizontal Units |                          | 20 Tons Downflow & Horizontal Units |                          |
|--|--------------------------------------|--------------------------|-------------------------------------|--------------------------|
|  | TH*210G3,4,W                         | YH*210G3,4,W             | TH*240G3,4,W                        | YH*240G3,4,W             |
| <b>Filters</b>   |                                      |                          |                                     |                          |
| Type Furnished <sup>(f)</sup>                                  | Throwaway                            | Throwaway                | Throwaway                           | Throwaway                |
| Number Size Recommended  |                                      |                          |                                     |                          |
| Downflow   | (8)20x20x2<br>(4)20x16x2             | (8)20x20x2<br>(4)20x16x2 | (8)20x20x2<br>(4)20x16x2            | (8)20x20x2<br>(4)20x16x2 |
| Horizontal   | (12)20x20x2                          | (12)20x20x2              | (12)20x20x2                         | (12)20x20x2              |
| <b>Refrigerant Charge<br/>(Pounds of R-410A)<sup>(g)</sup></b> |                                      |                          |                                     |                          |
| Downflow & Horizontal (Cir#1/Cir#2)                            | 14.0 / 7.3                           | 14.0 / 7.3               | 15.5 / 7.5                          | 15.5 / 7.5               |
| Optional Hot Gas Reheat Coil (Cir#1/Cir#2)                     | 12.2/8.9                             | 12.2/8.9                 | 11.9 / 9.6                          | 11.9 / 9.6               |

- (a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.
- (b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.
- (c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.
- (d) 3 stages not available with Reheat models.
- (e) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.
- (f) An optional 2 inch pleated filter is also available.
- (g) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.
- \* Indicates both downflow and horizontal units.

**Table 10. General data—heating—17½–20 ton high efficiency**

|  | 17½ Tons Downflow & Horizontal Units                   |             |                              | 20 Tons Downflow & Horizontal Units |             |                              |
|--|--|-------------|------------------------------|-------------------------------------|-------------|------------------------------|
|  | Heating Performance <sup>(a)</sup> (Gas/Electric Only) |             |                              |                                     |             |                              |
| Heating Models                           | Low  | High        | Modulating Turn Down = 2.5:1 | Low                                 | High        | Modulating Turn Down = 2.5:1 |
| <b>Heating Input (Btu/h)</b>             | 250,000  | 350,000     | 350,000                      | 250,000                             | 400,000     | 350,000                      |
| 1st Stage (Btu)                          | 175,000  | 250,000     | 70,000                       | 175,000                             | 300,000     | 80,000                       |
| <b>Heating Output (Btu/h)</b>            | 203,000  | 284,000     | 283,500                      | 203,000                             | 324,000     | 283,500                      |
| 1st Stage (Btu)                          | 142,000  | 203,000     | 56,700                       | 142,000                             | 243,000     | 64,800                       |
| <b>AFUE% (DF/HF)<sup>(b)</sup></b>       |  |             |                              |                                     |             |                              |
| Downflow/Horizontal                      | 80.2 / 81.0  | 79.3 / 79.7 | 79.3/79.7                    | 80.2 / 81.0                         | 79.8 / 79.7 | 79.8/79.7                    |
| <b>Steady State Efficiency%</b>          | 81   | 81          | 81.0                         | 81                                  | 81          | 81.0                         |
| <b>No. Burners</b>                       | 1  | 1           | 1                            | 1                                   | 1           | 1                            |
| <b>No. Stages</b>                        | 2  | 2           | N/A                          | 2                                   | 2           | N/A                          |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5 / 14.0   | 2.5 / 14.0  | 2.5/14.0                     | 2.5 / 14.0                          | 2.5 / 14.0  | 2.5/14.0                     |
| Natural or LP (minimum/maximum)          |  |             | Natural Only                 |                                     |             | Natural Only                 |
| <b>Gas Connection Pipe Size (in.)</b>    | ½  | ¾           | ¾                            | ½                                   | ¾           | ¾                            |

- (a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.
- (b) AFUE is rated in accordance with DOE test procedures.



## General Data

**Table 11. General data—25 ton high efficiency**

|  | <b>25 Tons Downflow &amp; Horizontal Units</b> |                     |
|--|--|---------------------|
|  | <b>TH*300G3,4,W</b>                            | <b>YH*300G3,4,W</b> |
| <b>Cooling Performance<sup>(a)</sup></b>   |  |                     |
| Gross Cooling Capacity   | 292,300  | 292,300             |
| EER <sup>(b)</sup>   | 10.6   | 10.6                |
| Nominal CFM / ARI Rated CFM  | 10,000 / 8,000                                 | 10,000 / 8,000      |
| ARI Net Cooling Capacity   | 274,000  | 274,000             |
| Integrated Energy Efficiency Ratio (IEER) (One Speed Fan / Multi or Variable Speed Fan) <sup>(c)</sup> | 12.4/15.0                                      | 12.4/15.0           |
| Percent Capacity @ part load (Stage 1/Stage 2/Stage 3/Stage 4)   | 25/50/75/100                                   | 25/50/75/100        |
| System Power (kW)  | 25.85  | 25.85               |
| <b>Compressor</b>  |  |                     |
| Number/Type  | 3 / Scrolls                                    | 3 / Scrolls         |
| <b>Sound</b>   |  |                     |
| Outdoor Sound Rating (BELS) <sup>(d)</sup>   | 9.4  | 9.4                 |
| <b>Outdoor Coil</b>  |  |                     |
| Type   | Microchannel                                   | Microchannel        |
| Coil Width (in.)   | 1.0  | 1.0                 |
| Face Area (sq. ft.)  | 42.58  | 42.58               |
| Rows/FPI   | 1 / 20   | 1 / 20              |
| <b>Indoor Coil</b>   |  |                     |
| Type   | Hi-Performance                                 | Hi-Performance      |
| Tube Size (in.) ID   | 0.3125   | 0.3125              |
| Face Area (sq. ft.)  | 31.42  | 31.42               |
| Rows/FPI   | 4 / 15   | 4 / 15              |
| Refrigerant Control  | TXV  | TXV                 |
| Drain Connection Number/Size (in.)   | 1/1.00 NPT                                     | 1/1.00 NPT          |
| <b>Outdoor Fan</b>   |  |                     |
| Type   | Propeller                                      | Propeller           |
| Number Used/Diameter (in.)   | 2 / 28   | 2 / 28              |
| Drive Type/No. Speeds  | Direct / 1                                     | Direct / 1          |
| cfm  | 16,500   | 16,500              |
| Number Motors/hp   | 2 / 1.0  | 2 / 1.0             |
| Motor rpm  | 1,125  | 1,125               |
| <b>Indoor Fan</b>  |  |                     |
| Type   | FC Centrifugal                                 | FC Centrifugal      |
| Number Used/Diameter (in.)   | 1 / 18x18                                      | 1 / 18x18           |
| Drive Type/No. Speeds  | Belt / 1                                       | Belt / 1            |
| Number Motors  | 1  | 1                   |
| Motor hp (Standard)  | 7.5  | 7.5                 |
| Motor rpm (Standard)   | 3,470  | 3,470               |
| Motor Frame Size (Standard)  | 184T   | 184T                |

**Table 11. General data—25 ton high efficiency**

|  | 25 Tons Downflow & Horizontal Units |                       |
|--|-------------------------------------|-----------------------|
|  | TH*300G3,4,W                        | YH*300G3,4,W          |
| <b>Filters</b>   |                                     |                       |
| Type Furnished <sup>(e)</sup>                              | Throwaway                           | Throwaway             |
| Number Size Recommended                                    |                                     |                       |
| Downflow   | (8)20x20x2 (4)20x16x2               | (8)20x20x2 (4)20x16x2 |
| Horizontal   | (12)20x20x2                         | (12)20x20x2           |
| <b>Refrigerant Charge (Pounds of R-410A)<sup>(f)</sup></b> |                                     |                       |
| Downflow & Horizontal (Cir#1/Cir#2)                        | 11.8 / 10.6                         | 11.8 / 10.6           |

(a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Certified in accordance with the Unitary Large Equipment Certification Program, which is based on ARI Standard 340/360.

(b) EER is rated at ARI conditions and in accordance with ARI Standard 210/240 or 340/360.

(c) Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI standard 210/240 or 340/360.

(d) Outdoor Sound Rating shown is tested in accordance with ARI Standard 270 or 370.

(e) An optional 2-inch pleated filter is also available.

(f) Refrigerant charge is an approximate value. For a more precise value, see unit nameplate and service instructions.

\* Indicates both downflow and horizontal units.

**Table 12. General data—heating—25 ton high efficiency**

|  | 25 Tons Downflow & Horizontal Units                    |             |                              |
|--|--|-------------|------------------------------|
|  | Heating Performance <sup>(a)</sup> (Gas/Electric Only) |             |                              |
| Heating Models                           | Low  | High        | Modulating Turn Down = 2.5:1 |
| <b>Heating Input (Btu/h)</b>             | 250,000  | 400,000     | 350,000                      |
| 1st Stage (Btu)                          | 175,000  | 300,000     | 80,000                       |
| <b>Heating Output (Btu/h)</b>            | 203,000  | 324,000     | 283,500                      |
| 1st Stage (Btu)                          | 142,000  | 243,000     | 64,800                       |
| <b>AFUE% (DF/HF)<sup>(b)</sup></b>       |  |             |                              |
| Downflow/Horizontal                      | 80.2 / 81.0  | 79.3 / 79.7 | 79.8 / 79.7                  |
| <b>Steady State Efficiency%</b>          | 81   | 81          | 81.0                         |
| <b>No. Burners</b>                       | 1  | 1           | 1                            |
| <b>No. Stages</b>                        | 2  | 2           | N/A                          |
| <b>Gas Supply Line Pressure (in. wc)</b> | 2.5 / 14.0   | 2.5 / 14.0  | 2.5/14.0                     |
| Natural or LP (minimum/maximum)          |  |             | Natural Only                 |
| <b>Gas Connection Pipe Size (in.)</b>    | ½  | ¾           | ¾                            |

(a) Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standards Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.

(b) AFUE is rated in accordance with DOE test procedures.



# Performance Data

**Table 13. Gross cooling capacities 12½ tons three phase standard efficiency T/YS\*150F3,4,W,K**

| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4000            | 75                | 137.8               | 116.1 | 149.6 | 83.0  | 166.0 | 58.1  | 126.4 | 109.6 | 138.2 | 79.4  | 154.7 | 54.1  | 113.8 | 102.0 | 125.6 | 74.8  | 142.1 | 49.7  |
|                 | 80                | 143.7               | 136.2 | 152.7 | 110.3 | 166.3 | 65.0  | 133.8 | 129.4 | 142.8 | 106.5 | 156.5 | 64.2  | 122.6 | 121.7 | 131.7 | 101.7 | 145.4 | 62.4  |
|                 | 85                | 149.0               | 149.0 | 155.1 | 132.9 | 166.0 | 94.9  | 140.6 | 140.6 | 146.8 | 128.9 | 157.7 | 93.9  | 130.9 | 130.9 | 137.2 | 124.0 | 148.1 | 91.9  |
|                 | 90                | 153.6               | 153.6 | 157.0 | 150.8 | 165.1 | 120.1 | 146.7 | 146.7 | 150.1 | 146.7 | 158.3 | 118.9 | 140.6 | 140.6 | 142.0 | 141.5 | 150.2 | 116.7 |
| 4500            | 75                | 142.4               | 121.2 | 153.2 | 87.7  | 168.7 | 59.0  | 131.0 | 114.8 | 141.9 | 84.3  | 157.5 | 55.1  | 118.4 | 107.4 | 129.3 | 79.8  | 145.0 | 50.7  |
|                 | 80                | 148.5               | 141.3 | 156.5 | 115.1 | 169.2 | 69.5  | 138.6 | 134.8 | 146.7 | 111.5 | 159.5 | 68.8  | 127.5 | 127.2 | 135.7 | 106.9 | 148.5 | 67.2  |
|                 | 85                | 153.9               | 153.9 | 159.2 | 137.8 | 169.1 | 99.4  | 145.6 | 145.6 | 150.9 | 134.0 | 160.9 | 98.6  | 136.0 | 136.0 | 141.4 | 129.2 | 151.4 | 96.8  |
|                 | 90                | 158.8               | 158.8 | 161.3 | 155.8 | 168.4 | 124.7 | 152.0 | 152.0 | 154.5 | 151.9 | 161.7 | 123.7 | 146.4 | 146.4 | 146.4 | 146.4 | 153.7 | 121.7 |
| 5000            | 75                | 146.3               | 125.8 | 156.2 | 91.9  | 170.8 | 59.8  | 135.1 | 119.6 | 145.0 | 88.7  | 159.7 | 55.9  | 122.6 | 112.3 | 132.6 | 84.4  | 147.3 | 51.6  |
|                 | 80                | 152.6               | 146.0 | 159.8 | 119.4 | 171.6 | 73.4  | 142.9 | 139.6 | 150.1 | 116.0 | 161.9 | 73.0  | 131.9 | 131.9 | 139.1 | 111.5 | 151.0 | 71.5  |
|                 | 85                | 158.3               | 158.3 | 162.7 | 142.2 | 171.7 | 103.5 | 150.1 | 150.1 | 154.5 | 138.6 | 163.6 | 102.8 | 140.6 | 140.6 | 145.0 | 134.0 | 154.2 | 101.2 |
|                 | 90                | 163.4               | 163.4 | 165.0 | 160.3 | 171.2 | 128.8 | 156.7 | 156.7 | 158.3 | 156.5 | 164.6 | 128.0 | 150.3 | 150.3 | 150.3 | 150.3 | 156.7 | 126.2 |
| 5500            | 75                | 149.7               | 129.9 | 158.7 | 95.6  | 172.5 | 60.4  | 138.6 | 123.9 | 147.6 | 92.6  | 161.4 | 56.5  | 126.1 | 116.8 | 135.2 | 88.5  | 149.1 | 52.2  |
|                 | 80                | 156.3               | 150.2 | 162.5 | 123.2 | 173.4 | 76.9  | 146.6 | 144.0 | 152.9 | 120.0 | 163.9 | 76.6  | 135.7 | 135.7 | 142.0 | 115.7 | 153.0 | 75.3  |
|                 | 85                | 162.2               | 162.2 | 165.6 | 146.1 | 173.8 | 107.0 | 154.0 | 154.0 | 157.5 | 142.7 | 165.7 | 106.6 | 144.6 | 144.6 | 148.1 | 138.3 | 156.4 | 105.1 |
|                 | 90                | 167.5               | 167.5 | 168.1 | 164.3 | 173.5 | 132.5 | 159.9 | 159.9 | 161.5 | 160.8 | 166.9 | 131.9 | 153.6 | 153.6 | 153.6 | 153.6 | 159.1 | 130.2 |
| 6000            | 75                | 152.6               | 133.5 | 160.7 | 98.9  | 173.5 | 60.7  | 141.5 | 127.7 | 149.6 | 96.0  | 162.5 | 56.9  | 129.1 | 120.8 | 137.3 | 92.1  | 150.3 | 52.6  |
|                 | 80                | 159.3               | 154.0 | 164.7 | 126.6 | 174.7 | 79.9  | 149.7 | 147.9 | 155.1 | 123.5 | 165.2 | 79.8  | 138.9 | 138.9 | 144.3 | 119.4 | 154.5 | 78.6  |
|                 | 85                | 165.5               | 165.5 | 168.0 | 149.6 | 175.3 | 110.2 | 157.4 | 157.4 | 160.0 | 146.4 | 167.3 | 109.9 | 148.0 | 148.0 | 150.7 | 142.1 | 158.0 | 108.5 |
|                 | 90                | 171.0               | 171.0 | 170.8 | 167.9 | 175.2 | 135.7 | 164.2 | 164.2 | 164.2 | 164.2 | 168.7 | 135.3 | 156.4 | 156.4 | 156.4 | 156.4 | 161.0 | 133.8 |
| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4000            | 75                | 99.8                | 93.4  | 111.7 | 69.1  | 128.3 | 44.9  | 92.4  | 88.7  | 104.3 | 65.9  | 120.9 | 42.3  | 84.6  | 83.7  | 96.6  | 62.4  | 113.2 | 39.6  |
|                 | 80                | 110.2               | 110.2 | 119.3 | 95.9  | 133.1 | 59.5  | 103.5 | 103.5 | 112.6 | 92.6  | 126.4 | 57.7  | 96.5  | 96.5  | 105.7 | 89.0  | 119.5 | 55.6  |
|                 | 85                | 120.0               | 120.0 | 126.3 | 118.0 | 137.3 | 88.8  | 114.0 | 114.0 | 120.4 | 114.6 | 131.4 | 86.9  | 107.8 | 107.8 | 114.1 | 110.9 | 125.2 | 84.7  |
|                 | 90                | 132.6               | 132.6 | 132.6 | 132.6 | 140.8 | 113.5 | 127.5 | 127.5 | 127.5 | 127.5 | 135.7 | 111.5 | 122.0 | 122.0 | 122.0 | 122.0 | 130.3 | 109.2 |
| 4500            | 75                | 104.6               | 98.9  | 115.5 | 74.3  | 131.2 | 45.9  | 97.2  | 94.3  | 108.2 | 71.2  | 123.9 | 43.4  | 89.5  | 89.4  | 100.5 | 67.7  | 116.2 | 40.7  |
|                 | 80                | 115.2               | 115.2 | 123.4 | 101.2 | 136.3 | 64.4  | 108.5 | 108.5 | 116.7 | 97.9  | 129.7 | 62.7  | 101.6 | 101.6 | 109.8 | 94.5  | 122.7 | 60.7  |
|                 | 85                | 125.2               | 125.2 | 130.6 | 123.4 | 140.7 | 93.9  | 119.3 | 119.3 | 124.7 | 120.0 | 134.8 | 92.0  | 117.3 | 113.1 | 118.5 | 116.5 | 128.7 | 90.0  |
|                 | 90                | 137.1               | 137.1 | 137.1 | 137.1 | 144.5 | 118.6 | 132.0 | 132.0 | 132.0 | 132.0 | 139.4 | 116.7 | 126.6 | 126.6 | 126.6 | 126.6 | 134.0 | 114.5 |
| 5000            | 75                | 108.8               | 104.0 | 118.8 | 79.0  | 133.6 | 46.8  | 101.4 | 99.5  | 111.5 | 76.0  | 126.3 | 44.2  | 93.8  | 93.8  | 103.9 | 72.6  | 118.7 | 41.5  |
|                 | 80                | 119.6               | 119.6 | 126.9 | 106.0 | 138.9 | 68.9  | 113.0 | 113.0 | 120.3 | 102.9 | 132.3 | 67.2  | 106.1 | 106.1 | 113.4 | 99.5  | 125.4 | 65.3  |
|                 | 85                | 129.8               | 129.8 | 134.3 | 128.3 | 143.5 | 98.5  | 123.9 | 123.9 | 128.5 | 125.1 | 137.7 | 96.7  | 121.1 | 121.1 | 122.3 | 121.6 | 131.6 | 94.7  |
|                 | 90                | 141.1               | 141.1 | 141.1 | 141.1 | 147.5 | 123.3 | 136.0 | 136.0 | 136.0 | 136.0 | 142.5 | 121.5 | 130.6 | 130.6 | 130.6 | 130.6 | 137.1 | 119.4 |
| 5500            | 75                | 112.4               | 108.7 | 121.6 | 83.3  | 135.5 | 47.4  | 105.1 | 104.2 | 114.3 | 80.3  | 128.2 | 44.9  | 97.5  | 97.5  | 106.7 | 77.1  | 120.6 | 42.2  |
|                 | 80                | 123.5               | 123.5 | 129.9 | 110.4 | 140.9 | 72.9  | 116.9 | 116.9 | 123.3 | 107.3 | 134.4 | 71.3  | 110.0 | 110.0 | 116.5 | 104.0 | 127.6 | 69.5  |
|                 | 85                | 133.9               | 133.9 | 137.5 | 132.8 | 145.8 | 102.5 | 128.1 | 128.1 | 131.7 | 129.6 | 140.0 | 100.9 | 125.6 | 125.6 | 125.6 | 125.6 | 133.9 | 98.9  |
|                 | 90                | 144.5               | 144.5 | 144.5 | 144.5 | 150.0 | 127.5 | 139.5 | 139.5 | 139.5 | 139.5 | 145.0 | 125.8 | 134.1 | 134.1 | 134.1 | 134.1 | 139.7 | 123.7 |
| 6000            | 75                | 115.5               | 112.8 | 123.8 | 87.1  | 136.8 | 47.9  | 108.2 | 108.2 | 116.5 | 84.2  | 129.5 | 45.3  | 100.7 | 100.7 | 109.0 | 81.0  | 122.0 | 42.7  |
|                 | 80                | 126.8               | 126.8 | 132.3 | 114.2 | 142.4 | 76.4  | 120.3 | 120.3 | 125.8 | 111.3 | 136.0 | 74.9  | 113.4 | 113.4 | 118.9 | 108.0 | 129.2 | 73.1  |
|                 | 85                | 137.4               | 137.4 | 140.1 | 136.7 | 147.5 | 106.2 | 133.0 | 133.0 | 134.4 | 133.7 | 141.8 | 104.6 | 128.3 | 128.3 | 128.3 | 128.3 | 135.8 | 102.7 |
|                 | 90                | 147.3               | 147.3 | 147.3 | 147.3 | 152.0 | 131.2 | 142.3 | 142.3 | 142.3 | 142.3 | 147.0 | 129.6 | 137.0 | 137.0 | 137.0 | 137.0 | 141.7 | 127.6 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
2. MBh = Total Gross Capacity
3. SHC = Sensible Heat Capacity
4. \* Stands for both downflow and horizontal unit.

**Table 14. Gross cooling capacities 15 tons three phase standard efficiency T/YS\*180F3,4,W,K**

| Air Flow<br>cfm | Ent DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                 |                | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC            | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4800            | 75             | 168.1               | 135.5 | 183.1 | 96.5  | 202.7 | 71.0  | 154.6 | 127.0 | 169.8 | 90.8  | 189.7 | 66.4  | 139.2 | 117.7 | 154.8 | 84.2  | 174.9 | 61.2  |
|                 | 80             | 175.9               | 160.8 | 187.5 | 130.9 | 203.7 | 78.0  | 163.8 | 152.0 | 175.6 | 124.8 | 192.0 | 74.7  | 149.8 | 142.4 | 161.9 | 117.9 | 178.5 | 70.4  |
|                 | 85             | 184.1               | 181.6 | 192.2 | 160.8 | 204.9 | 116.9 | 173.3 | 172.5 | 181.6 | 154.4 | 194.6 | 113.2 | 160.6 | 160.6 | 169.2 | 147.1 | 182.4 | 108.7 |
|                 | 90             | 192.5               | 192.5 | 197.1 | 186.2 | 206.3 | 151.3 | 183.0 | 183.0 | 187.9 | 179.4 | 197.4 | 147.3 | 171.7 | 171.7 | 176.9 | 171.8 | 186.6 | 142.4 |
| 5400            | 75             | 174.7               | 142.9 | 188.4 | 103.5 | 206.6 | 72.3  | 161.5 | 134.7 | 175.4 | 98.0  | 193.9 | 67.9  | 146.4 | 125.7 | 160.6 | 91.6  | 179.3 | 62.8  |
|                 | 80             | 182.9               | 168.5 | 193.0 | 138.1 | 207.8 | 84.7  | 171.0 | 160.0 | 181.4 | 132.3 | 196.4 | 81.6  | 157.2 | 150.6 | 167.9 | 125.6 | 183.2 | 77.6  |
|                 | 85             | 191.2               | 189.6 | 197.9 | 168.2 | 209.2 | 123.8 | 180.7 | 180.7 | 187.6 | 162.1 | 199.2 | 120.4 | 168.3 | 168.3 | 175.5 | 155.0 | 187.3 | 116.1 |
|                 | 90             | 199.9               | 199.9 | 203.1 | 193.8 | 210.9 | 158.5 | 190.7 | 190.7 | 194.2 | 187.4 | 202.2 | 154.7 | 179.7 | 179.7 | 183.4 | 180.0 | 191.7 | 150.1 |
| 6000            | 75             | 180.3               | 149.8 | 192.5 | 109.8 | 209.4 | 73.3  | 167.3 | 141.8 | 179.8 | 104.6 | 196.9 | 68.9  | 152.5 | 133.0 | 165.3 | 98.4  | 182.6 | 63.9  |
|                 | 80             | 188.7               | 175.6 | 197.4 | 144.7 | 210.8 | 90.7  | 177.0 | 167.3 | 186.1 | 139.1 | 199.7 | 87.9  | 163.6 | 158.2 | 172.9 | 132.7 | 186.7 | 84.1  |
|                 | 85             | 197.3               | 196.9 | 202.6 | 175.0 | 212.5 | 130.1 | 187.0 | 187.0 | 192.6 | 169.1 | 202.7 | 126.9 | 174.9 | 174.9 | 180.7 | 162.4 | 191.1 | 122.9 |
|                 | 90             | 206.2               | 206.2 | 208.0 | 200.9 | 214.4 | 165.1 | 197.2 | 197.2 | 199.3 | 194.7 | 206.0 | 161.5 | 187.0 | 186.5 | 188.8 | 187.6 | 195.8 | 157.1 |
| 6600            | 75             | 184.8               | 156.0 | 195.6 | 115.5 | 211.1 | 73.9  | 172.0 | 148.3 | 183.1 | 110.5 | 198.8 | 69.6  | 157.5 | 139.7 | 168.9 | 104.7 | 184.8 | 64.7  |
|                 | 80             | 193.4               | 182.1 | 200.7 | 150.6 | 212.7 | 96.2  | 182.0 | 174.1 | 189.6 | 145.3 | 201.9 | 93.6  | 168.8 | 165.2 | 176.7 | 139.1 | 189.2 | 90.1  |
|                 | 85             | 202.2               | 202.2 | 206.1 | 181.2 | 214.7 | 135.8 | 192.2 | 192.2 | 196.4 | 175.6 | 205.2 | 132.9 | 180.4 | 180.4 | 184.8 | 169.1 | 193.8 | 129.1 |
|                 | 90             | 211.3               | 211.3 | 211.8 | 207.4 | 216.9 | 171.0 | 201.4 | 201.4 | 203.4 | 201.4 | 208.7 | 167.7 | 193.2 | 193.2 | 193.2 | 193.2 | 198.7 | 163.6 |
| 7200            | 75             | 188.1               | 161.6 | 197.6 | 120.6 | 211.6 | 74.1  | 175.7 | 154.2 | 185.4 | 115.9 | 199.7 | 69.9  | 161.4 | 145.8 | 171.4 | 110.2 | 185.9 | 65.1  |
|                 | 80             | 197.0               | 187.9 | 203.0 | 156.0 | 213.6 | 101.0 | 185.9 | 180.2 | 192.1 | 150.9 | 203.0 | 98.6  | 173.0 | 171.5 | 179.4 | 145.0 | 190.5 | 95.4  |
|                 | 85             | 206.1               | 206.1 | 208.6 | 186.9 | 215.7 | 140.9 | 196.3 | 196.3 | 199.1 | 181.4 | 206.5 | 138.2 | 184.8 | 184.8 | 187.8 | 175.2 | 195.4 | 134.6 |
|                 | 90             | 212.4               | 212.4 | 214.5 | 213.2 | 218.2 | 176.3 | 206.4 | 206.4 | 206.4 | 206.4 | 210.3 | 173.3 | 196.4 | 196.4 | 196.4 | 196.4 | 200.6 | 169.4 |

| Air Flow<br>cfm | Ent DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                 |                | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC            | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4800            | 75             | 122.1               | 107.6 | 137.9 | 76.7  | 158.3 | 55.4  | 112.9 | 102.1 | 128.8 | 72.7  | 149.3 | 52.2  | 103.1 | 96.5  | 119.2 | 68.4  | 139.8 | 48.9  |
|                 | 80             | 134.0               | 131.9 | 146.3 | 110.1 | 163.3 | 65.3  | 125.5 | 125.5 | 137.9 | 105.9 | 154.9 | 62.4  | 116.4 | 116.4 | 129.0 | 101.4 | 146.2 | 59.3  |
|                 | 85             | 146.2               | 146.2 | 155.1 | 139.0 | 168.5 | 103.2 | 138.3 | 138.3 | 147.3 | 134.6 | 160.9 | 100.2 | 130.0 | 130.0 | 139.1 | 129.9 | 152.8 | 96.9  |
|                 | 90             | 162.4               | 162.4 | 164.0 | 163.3 | 174.0 | 136.6 | 157.0 | 157.0 | 157.0 | 157.0 | 167.1 | 133.4 | 149.4 | 149.4 | 149.4 | 149.4 | 159.6 | 130.0 |
| 5400            | 75             | 129.6               | 115.7 | 143.9 | 84.4  | 162.9 | 57.0  | 120.4 | 110.4 | 134.9 | 80.5  | 154.1 | 53.9  | 110.9 | 104.9 | 125.5 | 76.3  | 144.7 | 50.7  |
|                 | 80             | 141.7               | 140.3 | 152.6 | 118.0 | 168.2 | 72.7  | 133.3 | 133.3 | 144.3 | 113.9 | 160.0 | 69.9  | 124.4 | 124.4 | 135.6 | 109.6 | 151.3 | 67.0  |
|                 | 85             | 154.2               | 154.2 | 161.6 | 147.1 | 173.7 | 110.9 | 146.4 | 146.4 | 154.0 | 142.9 | 166.2 | 107.9 | 138.2 | 138.2 | 145.9 | 138.4 | 158.2 | 104.8 |
|                 | 90             | 170.8               | 170.8 | 170.8 | 170.8 | 179.4 | 144.5 | 163.9 | 163.9 | 163.9 | 163.9 | 172.6 | 141.4 | 156.5 | 156.5 | 156.5 | 156.5 | 165.3 | 138.1 |
| 6000            | 75             | 135.9               | 123.3 | 148.9 | 91.5  | 166.5 | 58.3  | 126.9 | 118.1 | 140.0 | 87.6  | 157.8 | 55.2  | 117.5 | 112.8 | 130.7 | 83.6  | 148.6 | 52.0  |
|                 | 80             | 148.3               | 148.2 | 157.9 | 125.3 | 172.0 | 79.5  | 140.0 | 140.0 | 149.7 | 121.3 | 163.9 | 76.9  | 131.3 | 131.3 | 141.0 | 117.1 | 155.4 | 74.0  |
|                 | 85             | 161.0               | 161.0 | 167.1 | 154.7 | 177.7 | 117.9 | 153.4 | 153.4 | 159.6 | 150.6 | 170.4 | 115.1 | 145.3 | 145.3 | 151.6 | 146.2 | 162.5 | 112.1 |
|                 | 90             | 176.5               | 176.5 | 176.5 | 176.5 | 183.7 | 151.8 | 169.7 | 169.7 | 169.7 | 169.7 | 177.0 | 148.9 | 162.4 | 162.4 | 162.4 | 162.4 | 169.9 | 145.7 |
| 6600            | 75             | 141.2               | 130.3 | 152.8 | 97.9  | 169.0 | 59.1  | 132.3 | 125.2 | 144.0 | 94.2  | 160.4 | 56.1  | 123.0 | 120.0 | 134.9 | 90.3  | 151.3 | 53.0  |
|                 | 80             | 153.8               | 153.8 | 162.0 | 132.0 | 174.7 | 85.7  | 145.6 | 145.6 | 153.9 | 128.2 | 166.8 | 83.2  | 137.0 | 137.0 | 145.4 | 124.1 | 158.4 | 80.4  |
|                 | 85             | 166.7               | 166.7 | 171.4 | 161.7 | 180.7 | 124.4 | 159.2 | 159.2 | 164.1 | 157.6 | 173.5 | 121.7 | 151.3 | 151.3 | 156.2 | 153.4 | 165.8 | 118.8 |
|                 | 90             | 181.1               | 181.1 | 181.1 | 181.1 | 187.0 | 158.5 | 174.4 | 174.4 | 174.4 | 174.4 | 180.4 | 155.7 | 167.3 | 167.3 | 167.3 | 167.3 | 173.4 | 152.6 |
| 7200            | 75             | 145.3               | 136.6 | 155.5 | 103.7 | 170.3 | 59.6  | 136.6 | 131.7 | 146.9 | 100.2 | 161.9 | 56.7  | 127.4 | 126.6 | 137.9 | 96.4  | 153.0 | 53.5  |
|                 | 80             | 158.2               | 158.2 | 165.0 | 138.1 | 176.3 | 91.3  | 150.2 | 150.2 | 157.1 | 134.4 | 168.5 | 88.9  | 141.7 | 141.7 | 148.7 | 130.4 | 160.3 | 86.3  |
|                 | 85             | 171.4               | 171.4 | 174.7 | 168.0 | 182.6 | 130.2 | 164.0 | 164.0 | 167.4 | 164.1 | 175.4 | 127.6 | 159.7 | 159.7 | 159.7 | 159.7 | 167.9 | 124.8 |
|                 | 90             | 184.6               | 184.6 | 184.6 | 184.6 | 189.1 | 164.6 | 178.1 | 178.1 | 178.1 | 178.1 | 182.6 | 161.9 | 171.1 | 171.1 | 171.1 | 171.1 | 175.7 | 158.9 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
2. MBh = Total Gross Capacity
3. SHC = Sensible Heat Capacity
4. \*Stands for both downflow and horizontal unit.



## Performance Data

**Table 15. Gross cooling capacities 17½ tons three phase standard efficiency T/YS\*210F3,4,W,K**

| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 5600            | 75                | 192.6               | 161.9 | 209.2 | 118.9 | 233.5 | 81.7  | 177.6 | 153.2 | 194.3 | 113.7 | 218.6 | 76.5  | 159.8 | 141.8 | 176.5 | 105.7 | 200.8 | 70.3  |
|                 | 80                | 200.0               | 188.6 | 212.7 | 155.2 | 232.9 | 98.9  | 187.3 | 180.0 | 200.0 | 150.0 | 220.2 | 97.2  | 171.7 | 168.7 | 184.4 | 142.2 | 204.6 | 92.8  |
|                 | 85                | 206.9               | 206.9 | 215.5 | 185.1 | 231.8 | 138.4 | 196.4 | 196.4 | 205.0 | 180.1 | 221.3 | 136.8 | 183.0 | 183.0 | 191.7 | 172.3 | 207.9 | 132.5 |
|                 | 90                | 213.2               | 213.2 | 217.9 | 208.6 | 230.1 | 171.5 | 204.9 | 204.9 | 209.6 | 203.7 | 221.8 | 170.1 | 193.7 | 193.7 | 198.4 | 196.1 | 210.7 | 165.9 |
| 6300            | 75                | 198.8               | 169.9 | 214.4 | 126.6 | 237.6 | 83.1  | 184.1 | 161.5 | 199.7 | 121.6 | 222.8 | 78.0  | 166.4 | 150.5 | 182.0 | 114.0 | 205.2 | 71.8  |
|                 | 80                | 206.5               | 196.7 | 218.1 | 163.0 | 237.3 | 106.3 | 194.0 | 188.5 | 205.6 | 158.1 | 224.8 | 104.9 | 178.6 | 177.5 | 190.2 | 150.6 | 209.3 | 100.8 |
|                 | 85                | 213.7               | 213.7 | 221.3 | 193.0 | 236.4 | 145.9 | 203.4 | 203.4 | 211.0 | 188.3 | 226.1 | 144.7 | 190.2 | 190.2 | 197.8 | 180.9 | 212.9 | 140.7 |
|                 | 90                | 220.3               | 220.3 | 223.9 | 216.7 | 235.0 | 179.2 | 212.2 | 212.2 | 215.8 | 212.2 | 227.0 | 178.1 | 204.8 | 204.8 | 204.8 | 204.8 | 216.0 | 174.3 |
| 7000            | 75                | 204.1               | 176.7 | 218.6 | 132.9 | 240.7 | 84.3  | 189.6 | 168.6 | 204.1 | 128.3 | 226.2 | 79.2  | 172.1 | 157.9 | 186.6 | 121.0 | 208.7 | 73.1  |
|                 | 80                | 212.1               | 203.6 | 222.6 | 169.5 | 240.7 | 112.4 | 199.8 | 195.7 | 210.3 | 165.0 | 228.4 | 111.4 | 184.6 | 184.6 | 195.1 | 157.8 | 213.2 | 107.6 |
|                 | 85                | 219.6               | 219.6 | 226.1 | 199.7 | 240.2 | 152.2 | 209.5 | 209.5 | 216.0 | 195.3 | 230.1 | 151.3 | 196.5 | 196.5 | 203.0 | 188.3 | 217.0 | 147.7 |
|                 | 90                | 226.6               | 226.6 | 229.0 | 223.6 | 239.1 | 185.7 | 218.9 | 218.6 | 221.1 | 219.3 | 231.2 | 184.9 | 210.3 | 210.3 | 210.3 | 210.3 | 220.4 | 181.4 |
| 7700            | 75                | 208.5               | 182.1 | 222.0 | 138.0 | 243.0 | 85.0  | 194.1 | 174.4 | 207.6 | 133.7 | 228.6 | 80.0  | 176.9 | 164.0 | 190.3 | 126.8 | 211.3 | 74.0  |
|                 | 80                | 216.8               | 209.2 | 226.3 | 174.7 | 243.3 | 117.3 | 204.7 | 201.6 | 214.1 | 170.6 | 231.1 | 116.6 | 189.6 | 189.6 | 199.1 | 163.7 | 216.1 | 113.2 |
|                 | 85                | 224.6               | 224.6 | 230.0 | 205.1 | 243.0 | 157.2 | 214.7 | 214.7 | 220.1 | 201.1 | 233.1 | 156.7 | 201.8 | 201.8 | 207.3 | 194.4 | 220.3 | 153.4 |
|                 | 90                | 231.9               | 231.9 | 233.3 | 229.1 | 242.2 | 190.9 | 223.3 | 223.3 | 225.5 | 225.2 | 234.5 | 190.4 | 214.9 | 214.9 | 214.9 | 214.9 | 223.9 | 187.3 |
| 8400            | 75                | 212.0               | 186.3 | 224.4 | 141.8 | 244.3 | 85.5  | 197.8 | 178.9 | 210.2 | 137.9 | 230.1 | 80.5  | 180.7 | 168.9 | 193.1 | 131.3 | 213.0 | 74.6  |
|                 | 80                | 220.6               | 213.6 | 229.0 | 178.7 | 244.9 | 120.9 | 208.7 | 206.3 | 217.0 | 174.9 | 232.9 | 120.5 | 193.8 | 193.8 | 202.1 | 168.4 | 218.1 | 117.5 |
|                 | 85                | 228.7               | 228.7 | 233.1 | 209.2 | 244.9 | 161.0 | 219.0 | 219.0 | 223.3 | 205.5 | 235.2 | 160.8 | 206.3 | 206.3 | 210.6 | 199.2 | 222.5 | 157.8 |
|                 | 90                | 236.3               | 236.3 | 236.6 | 233.4 | 244.5 | 194.8 | 229.0 | 229.0 | 229.0 | 229.0 | 236.9 | 194.7 | 218.6 | 218.6 | 218.6 | 218.6 | 226.5 | 191.9 |

| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 5600            | 75                | 139.1               | 127.7 | 155.8 | 95.1  | 180.1 | 63.0  | 127.7 | 119.7 | 144.4 | 88.8  | 168.7 | 59.0  | 115.5 | 111.0 | 132.2 | 81.8  | 156.5 | 54.8  |
|                 | 80                | 153.2               | 153.2 | 165.9 | 131.7 | 186.1 | 85.7  | 142.8 | 142.8 | 155.5 | 125.4 | 175.8 | 81.2  | 131.8 | 131.8 | 144.5 | 118.5 | 164.8 | 76.0  |
|                 | 85                | 166.7               | 166.7 | 175.4 | 162.0 | 191.6 | 125.6 | 157.5 | 157.5 | 166.2 | 155.8 | 182.4 | 121.1 | —     | —     | —     | —     | —     | —     |
|                 | 90                | 184.4               | 184.4 | 184.4 | 184.4 | 196.6 | 159.1 | 176.2 | 176.2 | 176.2 | 176.2 | 188.5 | 154.7 | —     | —     | —     | —     | —     | —     |
| 6300            | 75                | 145.9               | 136.7 | 161.5 | 103.7 | 184.7 | 64.6  | 134.5 | 128.9 | 150.2 | 97.6  | 173.4 | 60.7  | 122.5 | 120.3 | 138.1 | 90.7  | 161.3 | 56.5  |
|                 | 80                | 160.3               | 160.3 | 171.9 | 140.5 | 191.0 | 94.1  | 150.0 | 150.0 | 161.6 | 134.4 | 180.8 | 89.8  | 139.0 | 139.0 | 150.7 | 127.6 | 169.8 | 84.7  |
|                 | 85                | 174.1               | 174.1 | 181.7 | 170.9 | 196.8 | 134.1 | 164.9 | 164.9 | 172.5 | 164.9 | 187.7 | 129.8 | —     | —     | —     | —     | —     | —     |
|                 | 90                | 190.9               | 190.9 | 190.9 | 190.9 | 202.1 | 167.8 | 182.9 | 182.9 | 182.9 | 182.9 | 194.1 | 163.6 | —     | —     | —     | —     | —     | —     |
| 7000            | 75                | 151.8               | 144.5 | 166.3 | 111.1 | 188.4 | 65.9  | 140.5 | 136.7 | 155.0 | 105.1 | 177.2 | 62.0  | 128.5 | 128.4 | 143.1 | 98.4  | 165.2 | 57.8  |
|                 | 80                | 166.4               | 166.4 | 176.9 | 148.0 | 195.0 | 101.3 | 156.3 | 156.3 | 166.8 | 142.1 | 184.9 | 97.1  | 145.4 | 145.4 | 155.9 | 135.5 | 174.0 | 92.2  |
|                 | 85                | 180.5               | 180.5 | 187.1 | 178.6 | 201.1 | 141.4 | 171.5 | 171.5 | 178.0 | 172.7 | 192.1 | 137.3 | —     | —     | —     | —     | —     | —     |
|                 | 90                | 196.6               | 196.6 | 196.6 | 196.6 | 206.7 | 175.3 | 188.7 | 188.7 | 188.7 | 188.7 | 198.8 | 171.2 | —     | —     | —     | —     | —     | —     |
| 7700            | 75                | 156.7               | 150.9 | 170.2 | 117.1 | 191.2 | 66.9  | 145.6 | 143.4 | 159.0 | 111.3 | 180.0 | 63.0  | 133.7 | 133.7 | 147.1 | 104.8 | 168.1 | 58.9  |
|                 | 80                | 171.7               | 171.7 | 181.1 | 154.2 | 198.1 | 107.1 | 161.6 | 161.6 | 171.1 | 148.5 | 188.1 | 103.1 | 150.8 | 150.8 | 160.3 | 142.0 | 177.3 | 98.4  |
|                 | 85                | 186.1               | 186.1 | 191.5 | 185.0 | 204.5 | 147.5 | 177.2 | 177.2 | 182.6 | 179.3 | 195.6 | 143.5 | —     | —     | —     | —     | —     | —     |
|                 | 90                | 201.4               | 201.4 | 201.4 | 201.4 | 210.4 | 181.5 | 193.6 | 193.6 | 193.6 | 193.6 | 202.6 | 177.5 | —     | —     | —     | —     | —     | —     |
| 8400            | 75                | 160.8               | 156.1 | 173.1 | 122.0 | 193.1 | 67.6  | 149.7 | 148.7 | 162.1 | 116.3 | 182.0 | 63.7  | 137.9 | 137.9 | 150.3 | 110.0 | 170.2 | 59.6  |
|                 | 80                | 176.0               | 176.0 | 184.4 | 159.2 | 200.3 | 111.7 | 166.1 | 166.1 | 174.4 | 153.6 | 190.3 | 107.9 | 155.4 | 155.4 | 163.7 | 147.4 | 179.7 | 103.3 |
|                 | 85                | 190.8               | 190.8 | 195.1 | 190.1 | 207.0 | 152.2 | 184.4 | 181.9 | 186.2 | 184.6 | 198.2 | 148.4 | —     | —     | —     | —     | —     | —     |
|                 | 90                | 205.3               | 205.3 | 205.3 | 205.3 | 213.2 | 186.4 | 197.5 | 197.5 | 197.5 | 197.5 | 205.4 | 182.6 | —     | —     | —     | —     | —     | —     |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
2. MBh = Total Gross Capacity
3. SHC = Sensible Heat Capacity
4. \*Stands for both downflow and horizontal unit.

**Table 16. Gross cooling capacities 20 tons three phase standard efficiency T/YS\*240F3,4,W,K**

| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 6400            | 75                | 234.9               | 192.8 | 259.0 | 144.3 | 293.2 | 102.6 | 214.7 | 181.4 | 238.3 | 136.6 | 272.1 | 95.2  | 193.0 | 168.4 | 216.2 | 127.4 | 249.4 | 87.3  |
|                 | 80                | 244.0               | 225.2 | 262.7 | 187.7 | 291.6 | 121.9 | 226.3 | 213.8 | 244.5 | 180.0 | 272.9 | 118.0 | 207.0 | 200.7 | 224.8 | 170.8 | 252.8 | 112.5 |
|                 | 85                | 253.0               | 251.5 | 266.4 | 225.0 | 289.9 | 170.3 | 237.7 | 237.7 | 250.7 | 217.3 | 273.7 | 166.4 | 221.0 | 221.0 | 233.4 | 208.1 | 256.1 | 160.9 |
|                 | 90                | 261.9               | 261.9 | 270.0 | 256.3 | 288.2 | 212.6 | 249.1 | 249.1 | 256.7 | 248.5 | 274.5 | 208.6 | 234.9 | 234.9 | 242.0 | 239.3 | 259.3 | 203.1 |
| 7200            | 75                | 243.3               | 202.0 | 266.0 | 152.5 | 298.7 | 104.5 | 223.3 | 190.6 | 245.4 | 144.9 | 277.7 | 97.2  | 201.7 | 177.7 | 223.4 | 135.7 | 255.2 | 89.3  |
|                 | 80                | 253.2               | 235.2 | 270.5 | 196.7 | 297.9 | 129.9 | 235.6 | 223.8 | 252.4 | 189.0 | 279.4 | 126.0 | 216.5 | 210.8 | 232.8 | 179.8 | 259.3 | 120.6 |
|                 | 85                | 263.0               | 262.2 | 274.9 | 234.7 | 297.0 | 179.0 | 247.9 | 247.9 | 259.4 | 227.0 | 281.0 | 175.1 | 231.2 | 231.2 | 242.2 | 217.8 | 263.4 | 169.6 |
|                 | 90                | 272.7               | 272.7 | 279.3 | 266.7 | 296.1 | 222.0 | 260.1 | 260.1 | 266.2 | 259.  | 282.5 | 218.1 | 249.1 | 245.9 | 251.6 | 249.8 | 267.4 | 212.6 |
| 8000            | 75                | 250.4               | 210.6 | 271.6 | 160.0 | 302.9 | 106.0 | 230.5 | 199.2 | 251.1 | 152.5 | 282.0 | 98.7  | 209.0 | 186.3 | 229.2 | 143.3 | 259.5 | 90.8  |
|                 | 80                | 261.1               | 244.5 | 276.9 | 204.9 | 302.8 | 137.1 | 243.6 | 233.1 | 258.9 | 197.3 | 284.4 | 133.3 | 224.6 | 220.2 | 239.5 | 188.2 | 264.5 | 127.9 |
|                 | 85                | 271.7               | 271.7 | 282.1 | 243.7 | 302.7 | 187.0 | 256.6 | 256.6 | 266.7 | 236.1 | 286.8 | 183.1 | 240.1 | 240.1 | 249.6 | 226.9 | 269.3 | 177.7 |
|                 | 90                | 282.2               | 282.2 | 287.3 | 276.4 | 302.6 | 230.7 | 269.6 | 269.6 | 274.3 | 268.8 | 289.1 | 226.8 | 257.2 | 257.2 | 259.8 | 259.6 | 274.1 | 221.4 |
| 8800            | 75                | 256.1               | 218.5 | 275.8 | 166.9 | 305.6 | 107.0 | 236.2 | 207.2 | 255.5 | 159.4 | 284.8 | 99.7  | 214.9 | 194.3 | 233.6 | 150.3 | 262.5 | 91.9  |
|                 | 80                | 267.5               | 253.1 | 281.9 | 212.5 | 306.4 | 143.7 | 250.2 | 241.8 | 264.0 | 205.0 | 288.0 | 140.0 | 231.3 | 228.9 | 244.7 | 195.9 | 268.2 | 134.6 |
|                 | 85                | 278.9               | 278.9 | 287.9 | 252.1 | 307.0 | 194.3 | 264.0 | 264.0 | 272.5 | 244.5 | 291.2 | 190.5 | 247.6 | 247.6 | 255.6 | 235.4 | 273.8 | 185.2 |
|                 | 90                | 290.2               | 290.2 | 293.9 | 285.5 | 307.7 | 238.8 | 277.8 | 277.8 | 281.0 | 277.9 | 294.3 | 235.  | 266.5 | 266.5 | 266.5 | 266.5 | 279.4 | 229.6 |
| 9600            | 75                | 260.4               | 225.7 | 278.6 | 173.1 | 306.9 | 107.4 | 240.6 | 214.4 | 258.4 | 165.6 | 286.3 | 100.2 | 219.4 | 201.6 | 236.6 | 156.6 | 264.1 | 92.4  |
|                 | 80                | 272.6               | 261.0 | 285.5 | 219.5 | 308.5 | 149.7 | 255.3 | 249.7 | 267.7 | 212.0 | 290.3 | 145.9 | 236.5 | 236.5 | 248.5 | 202.9 | 270.6 | 140.7 |
|                 | 85                | 284.7               | 284.7 | 292.3 | 259.7 | 310.0 | 201.0 | 270.0 | 270.0 | 277.0 | 252.2 | 294.2 | 197.2 | 253.6 | 253.6 | 260.2 | 243.1 | 277.0 | 191.9 |
|                 | 90                | 296.8               | 296.8 | 299.0 | 293.9 | 311.4 | 246.2 | 286.3 | 286.3 | 286.3 | 286.3 | 298.1 | 242.4 | 271.9 | 271.9 | 271.9 | 271.9 | 283.3 | 237.1 |

| Air Flow<br>cfm | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |     |     |       |       |     |     |     |     |
|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-------|-------|-----|-----|-----|-----|
|                 |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |     |     |       |       |     |     |     |     |
|                 |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |     |     |       |       |     |     |     |     |
|                 |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73  |     | 61    |       | 67  |     | 73  |     |
| MBh             | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh | SHC | MBh   | SHC   | MBh | SHC | MBh | SHC |
| 6400            | 75                | 169.8               | 153.8 | 192.5 | 116.6 | 225.3 | 78.8  | 157.6 | 145.9 | 180.0 | 110.6 | —   | —   | 145.0 | 137.7 | —   | —   | —   | —   |
|                 | 80                | 186.3               | 186.2 | 203.6 | 159.9 | 231.1 | 105.5 | 175.3 | 175.3 | 192.4 | 154.0 | —   | —   | 164.0 | 164.0 | —   | —   | —   | —   |
|                 | 85                | 202.7               | 202.7 | 214.7 | 197.2 | 236.8 | 153.8 | 193.0 | 193.0 | 204.7 | 191.2 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 90                | 225.7               | 225.7 | 225.7 | 225.7 | 242.5 | 196.0 | 217.0 | 217.0 | 217.0 | 217.0 | —   | —   | —     | —     | —   | —   | —   | —   |
| 7200            | 75                | 178.6               | 163.2 | 199.8 | 124.9 | 231.1 | 80.9  | 166.4 | 155.3 | 187.4 | 119.0 | —   | —   | 153.9 | 147.1 | —   | —   | —   | —   |
|                 | 80                | 195.9               | 195.9 | 211.7 | 169.0 | 237.7 | 113.6 | 185.0 | 185.0 | 200.6 | 163.1 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 85                | 213.1               | 213.1 | 223.6 | 207.1 | 244.3 | 162.6 | 203.4 | 203.4 | 213.7 | 201.1 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 90                | 235.4               | 235.4 | 235.4 | 235.4 | 250.7 | 205.6 | 226.7 | 226.7 | 226.7 | 226.7 | —   | —   | —     | —     | —   | —   | —   | —   |
| 8000            | 75                | 186.0               | 171.9 | 205.7 | 132.6 | 235.6 | 82.5  | 173.9 | 164.1 | 193.4 | 126.7 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 80                | 204.0               | 204.0 | 218.4 | 177.5 | 243.0 | 121.0 | 193.2 | 193.2 | 207.4 | 171.5 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 85                | 222.0               | 222.0 | 231.1 | 216.2 | 250.3 | 170.8 | 212.4 | 212.4 | 221.3 | 210.3 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 90                | 243.7               | 243.7 | 243.7 | 243.7 | 257.6 | 214.5 | 235.1 | 235.1 | 235.1 | 235.1 | —   | —   | —     | —     | —   | —   | —   | —   |
| 8800            | 75                | 192.0               | 179.9 | 210.2 | 139.7 | 238.7 | 83.5  | 179.9 | 172.1 | 198.0 | 133.8 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 80                | 210.8               | 210.8 | 223.8 | 185.2 | 246.8 | 127.7 | 200.0 | 200.0 | 212.7 | 179.3 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 85                | 229.6               | 229.6 | 237.2 | 224.7 | 254.9 | 178.3 | 220.0 | 220.0 | 227.4 | 218.8 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 90                | 250.6               | 250.6 | 250.6 | 250.6 | 263.0 | 222.7 | 242.0 | 242.0 | 242.0 | 242.0 | —   | —   | —     | —     | —   | —   | —   | —   |
| 9600            | 75                | 196.6               | 187.3 | 213.4 | 146.0 | 240.3 | 84.1  | 184.6 | 179.5 | 201.2 | 140.1 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 80                | 216.2               | 216.2 | 227.7 | 192.3 | 249.3 | 133.8 | 205.5 | 205.5 | 216.7 | 186.4 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 85                | 235.8               | 235.8 | 241.9 | 232.5 | 258.2 | 185.1 | 226.3 | 226.3 | 232.2 | 226.6 | —   | —   | —     | —     | —   | —   | —   | —   |
|                 | 90                | 256.1               | 256.1 | 256.1 | 256.1 | 267.0 | 230.2 | 247.6 | 247.6 | 247.6 | 247.6 | —   | —   | —     | —     | —   | —   | —   | —   |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
2. MBh = Total Gross Capacity
3. SHC = Sensible Heat Capacity
4. \*Stands for both downflow and horizontal unit.



## Performance Data

**Table 17. Gross cooling capacities 25 tons three phase standard efficiency T/YS\*300F3,4,W,K**

| Air Flow<br>cfm | Ent DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                 |                | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                 |                | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh             | SHC            | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 7000            | 75             | 261.6               | 209.9 | 284.7 | 144.7 | 316.2 | 110.7 | 240.1 | 196.8 | 262.7 | 136.2 | 293.9 | 102.9 | 217.6 | 184.6 | 239.9 | 128.5 | 270.6 | 94.7  |
|                 | 80             | 273.8               | 249.2 | 292.2 | 198.6 | 319.0 | 112.1 | 254.8 | 235.7 | 272.7 | 189.6 | 299.2 | 107.7 | 234.8 | 223.1 | 252.3 | 181.5 | 278.4 | 104.2 |
|                 | 85             | 284.0               | 279.1 | 297.6 | 243.0 | 319.7 | 171.0 | 267.4 | 265.1 | 280.6 | 233.6 | 302.3 | 166.2 | 250.0 | 250.0 | 262.7 | 225.0 | 284.0 | 162.2 |
|                 | 90             | 292.0               | 292.0 | 300.9 | 277.9 | 318.2 | 220.4 | 278.0 | 278.0 | 286.4 | 268.0 | 303.4 | 215.2 | 263.0 | 263.0 | 271.0 | 259.1 | 287.6 | 210.8 |
| 8000            | 75             | 272.0               | 224.0 | 293.7 | 159.4 | 323.8 | 113.3 | 250.7 | 211.0 | 271.9 | 150.9 | 301.7 | 105.6 | 228.4 | 198.8 | 249.3 | 143.3 | 278.6 | 97.5  |
|                 | 80             | 284.3               | 263.3 | 301.2 | 213.2 | 326.7 | 127.3 | 265.5 | 249.8 | 282.0 | 204.3 | 307.0 | 122.9 | 245.7 | 237.2 | 261.8 | 196.3 | 286.4 | 119.5 |
|                 | 85             | 294.5               | 293.2 | 306.7 | 257.6 | 327.4 | 186.2 | 278.2 | 278.2 | 290.0 | 248.2 | 310.3 | 181.4 | 260.9 | 260.9 | 272.3 | 239.8 | 292.1 | 177.5 |
|                 | 90             | 302.7               | 302.7 | 310.1 | 292.5 | 326.0 | 235.6 | 288.8 | 288.8 | 295.8 | 282.7 | 311.4 | 230.4 | 274.0 | 274.0 | 280.6 | 273.8 | 295.8 | 226.1 |
| 9000            | 75             | 281.1               | 236.4 | 301.3 | 172.3 | 330.0 | 115.5 | 259.9 | 223.3 | 279.7 | 163.8 | 308.1 | 107.8 | 237.8 | 211.2 | 257.2 | 156.3 | 285.2 | 99.8  |
|                 | 80             | 293.4               | 275.7 | 308.9 | 226.1 | 332.9 | 140.7 | 274.8 | 262.2 | 289.9 | 217.2 | 313.5 | 136.4 | 255.2 | 249.7 | 269.9 | 209.3 | 293.1 | 133.0 |
|                 | 85             | 303.7               | 303.7 | 314.5 | 270.5 | 333.8 | 199.6 | 287.6 | 287.6 | 297.9 | 261.1 | 316.8 | 194.9 | 270.5 | 270.5 | 280.4 | 252.7 | 298.9 | 191.0 |
|                 | 90             | 311.9               | 311.9 | 317.9 | 305.3 | 332.5 | 249.0 | 298.3 | 298.3 | 303.9 | 295.6 | 318.0 | 243.8 | 283.7 | 283.7 | 288.9 | 286.8 | 302.6 | 239.6 |
| 10000           | 75             | 288.7               | 246.9 | 307.5 | 183.4 | 334.8 | 117.2 | 267.7 | 233.9 | 286.1 | 175.0 | 313.1 | 109.6 | 245.8 | 221.9 | 263.8 | 167.5 | 290.4 | 101.6 |
|                 | 80             | 301.1               | 286.2 | 315.2 | 237.2 | 337.8 | 152.4 | 282.7 | 272.8 | 296.4 | 228.4 | 318.6 | 148.1 | 263.3 | 260.3 | 276.6 | 220.4 | 298.3 | 144.8 |
|                 | 85             | 311.5               | 311.5 | 320.8 | 281.5 | 338.7 | 211.2 | 295.5 | 295.5 | 304.5 | 272.3 | 321.9 | 206.6 | 278.6 | 278.6 | 287.2 | 263.9 | 304.2 | 202.8 |
|                 | 90             | 319.8               | 319.8 | 324.4 | 316.4 | 337.5 | 260.6 | 306.3 | 306.3 | 310.5 | 306.7 | 323.2 | 255.5 | 295.7 | 295.7 | 295.7 | 295.7 | 308.0 | 251.3 |
| 11000           | 75             | 294.9               | 255.7 | 312.3 | 192.7 | 338.2 | 118.4 | 274.1 | 242.7 | 291.1 | 184.4 | 316.7 | 110.8 | 252.4 | 230.7 | 269.0 | 176.9 | 294.1 | 103.0 |
|                 | 80             | 307.4               | 294.9 | 320.1 | 246.5 | 341.3 | 162.2 | 289.2 | 281.6 | 301.4 | 237.7 | 322.2 | 158.0 | 270.0 | 269.1 | 281.8 | 229.9 | 302.2 | 154.7 |
|                 | 85             | 317.9               | 317.9 | 325.8 | 290.8 | 342.3 | 221.1 | 302.1 | 302.1 | 309.6 | 281.6 | 325.7 | 216.5 | 285.4 | 285.4 | 292.5 | 273.3 | 308.2 | 212.7 |
|                 | 90             | 326.2               | 326.2 | 329.4 | 325.7 | 341.1 | 270.5 | 315.7 | 315.7 | 315.7 | 315.7 | 327.1 | 265.4 | 301.1 | 301.1 | 301.1 | 301.1 | 312.0 | 261.2 |

| Air Flow<br>cfm | Ent DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |
|-----------------|----------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|
|                 |                | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |     |     |
|                 |                | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |     |     |
|                 |                | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73  |     |
| MBh             | SHC            | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh | SHC |
| 7000            | 75             | 194.2               | 173.3 | 216.0 | 121.8 | 246.4 | 86.2  | 182.1 | 168.0 | 203.7 | 118.8 | 233.9 | 81.9  | 169.8 | 162.9 | 191.2 | 116.0 | —   | —   |
|                 | 80             | 213.9               | 211.3 | 231.0 | 174.4 | 256.6 | 101.6 | 203.1 | 203.1 | 220.0 | 171.1 | 245.4 | 100.6 | 192.0 | 192.0 | 208.7 | 168.1 | —   | —   |
|                 | 85             | 231.5               | 231.5 | 243.9 | 217.4 | 264.8 | 159.2 | 221.9 | 221.9 | 234.1 | 214.0 | 254.8 | 158.0 | 212.1 | 212.1 | 224.1 | 210.7 | —   | —   |
|                 | 90             | 247.0               | 247.0 | 254.7 | 251.0 | 270.8 | 207.3 | 246.1 | 246.1 | 246.1 | 246.1 | 262.1 | 205.9 | 237.4 | 237.4 | 237.4 | 237.4 | —   | —   |
| 8000            | 75             | 205.2               | 187.5 | 225.6 | 136.6 | 254.5 | 89.1  | 193.2 | 182.2 | 213.4 | 133.6 | 242.2 | 84.8  | 181.0 | 177.2 | 201.0 | 130.8 | —   | —   |
|                 | 80             | 225.0               | 225.0 | 240.7 | 189.2 | 264.9 | 116.9 | 214.3 | 214.3 | 229.7 | 185.9 | 253.7 | 116.0 | 203.3 | 203.3 | 218.6 | 182.9 | —   | —   |
|                 | 85             | 242.7               | 242.7 | 253.6 | 232.2 | 273.1 | 174.5 | 233.2 | 233.2 | 243.9 | 228.8 | 263.2 | 173.4 | 223.5 | 223.5 | 234.0 | 225.6 | —   | —   |
|                 | 90             | 264.5               | 264.5 | 264.5 | 264.5 | 279.2 | 222.7 | 256.0 | 256.0 | 256.0 | 256.0 | 270.6 | 221.3 | 247.4 | 247.4 | 247.4 | 247.4 | —   | —   |
| 9000            | 75             | 214.8               | 200.0 | 233.8 | 149.6 | 261.3 | 91.5  | 202.9 | 194.7 | 221.7 | 146.7 | 249.0 | 87.2  | 190.8 | 189.7 | 209.4 | 143.9 | —   | —   |
|                 | 80             | 234.7               | 234.7 | 248.9 | 202.2 | 271.7 | 130.5 | 224.0 | 224.0 | 238.1 | 199.0 | 260.7 | 129.6 | 213.2 | 213.2 | 227.0 | 196.0 | —   | —   |
|                 | 85             | 252.4               | 252.4 | 262.0 | 245.2 | 280.0 | 188.1 | 243.0 | 243.0 | 252.4 | 241.8 | 270.2 | 187.0 | 233.4 | 233.4 | 242.5 | 238.6 | —   | —   |
|                 | 90             | 272.9               | 272.9 | 272.9 | 272.9 | 286.2 | 236.2 | 264.6 | 264.6 | 264.6 | 264.6 | 277.7 | 234.9 | —     | —     | —     | —     | —   | —   |
| 10000           | 75             | 223.0               | 210.7 | 240.6 | 160.9 | 266.7 | 93.3  | 211.2 | 205.5 | 228.6 | 157.9 | 254.5 | 89.1  | 199.2 | 199.2 | 216.4 | 155.2 | —   | —   |
|                 | 80             | 242.9               | 242.9 | 255.8 | 213.4 | 277.2 | 142.3 | 232.4 | 232.4 | 245.1 | 210.2 | 266.2 | 141.4 | 221.6 | 221.6 | 234.1 | 207.3 | —   | —   |
|                 | 85             | 260.8               | 260.8 | 268.9 | 256.5 | 285.6 | 199.9 | 251.5 | 251.5 | 259.4 | 253.1 | 275.9 | 198.8 | —     | —     | —     | —     | —   | —   |
|                 | 90             | 279.9               | 279.9 | 279.9 | 279.9 | 291.8 | 248.0 | 271.7 | 271.7 | 271.7 | 271.7 | 283.4 | 246.7 | —     | —     | —     | —     | —   | —   |
| 11000           | 75             | 229.8               | 219.6 | 246.0 | 170.4 | 270.7 | 94.7  | 218.1 | 214.4 | 234.1 | 167.4 | 258.6 | 90.5  | 206.2 | 206.2 | 222.0 | 164.7 | —   | —   |
|                 | 80             | 249.8               | 249.8 | 261.3 | 222.9 | 281.2 | 152.3 | 239.4 | 239.4 | 250.6 | 219.7 | 270.4 | 151.5 | 228.7 | 228.7 | 239.7 | 216.8 | —   | —   |
|                 | 85             | 267.7               | 267.7 | 274.4 | 265.9 | 289.7 | 209.9 | 258.5 | 258.5 | 265.1 | 262.5 | 280.1 | 208.8 | —     | —     | —     | —     | —   | —   |
|                 | 90             | 285.5               | 285.5 | 285.5 | 285.5 | 296.1 | 258.0 | 306.5 | 306.5 | 306.5 | 306.5 | 306.5 | 306.5 | —     | —     | —     | —     | —   | —   |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
2. MBh = Total Gross Capacity
3. SHC = Sensible Heat Capacity
4. \*Stands for both downflow and horizontal unit.

**Table 18. Gross cooling capacities 12½ tons three phase high efficiency T/YH\*150G3,4,W (stage 1)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|-------------------|---------------------|------|------|------|------|------|------|------|------|------|------|------|
|                                |                   | 85                  |      |      |      |      |      | 95   |      |      |      |      |      |
|                                |                   | Entering Wet Bulb   |      |      |      |      |      |      |      |      |      |      |      |
|                                |                   | 61                  |      | 67   |      | 73   |      | 61   |      | 67   |      | 73   |      |
| MBh                            | SHC               | MBh                 | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  |      |      |
| 2000                           | 75                | 42.0                | 39.3 | 45.3 | 31.2 | 49.8 | 15.0 | 39.2 | 37.2 | 42.3 | 29.4 | 46.7 | 13.6 |
|                                | 80                | 44.2                | 43.5 | 46.2 | 39.1 | 50.3 | 29.0 | 41.5 | 41.2 | 43.3 | 37.1 | 47.2 | 27.2 |
|                                | 85                | 46.9                | 46.6 | 48.0 | 44.3 | 50.7 | 38.0 | 44.1 | 44.1 | 45.1 | 42.1 | 47.6 | 36.1 |
|                                | 90                | 49.6                | 49.3 | 50.4 | 48.1 | 52.2 | 44.1 | 46.9 | 46.8 | 47.5 | 45.8 | 49.1 | 42.1 |
| 2500                           | 75                | 43.3                | 41.5 | 46.2 | 33.6 | 50.4 | 17.5 | 40.4 | 39.2 | 43.1 | 31.6 | 47.1 | 15.9 |
|                                | 80                | 45.7                | 45.7 | 47.4 | 41.6 | 51.1 | 31.5 | 42.8 | 42.8 | 44.3 | 39.3 | 47.9 | 29.6 |
|                                | 85                | 48.5                | 48.5 | 49.5 | 46.9 | 51.8 | 40.7 | 45.6 | 45.6 | 46.4 | 44.6 | 48.6 | 38.6 |
|                                | 90                | 51.5                | 51.5 | 52.0 | 50.9 | 53.5 | 47.0 | 48.5 | 48.5 | 48.9 | 48.4 | 50.3 | 44.7 |
| 3000                           | 75                | 44.4                | 43.3 | 46.9 | 35.5 | 50.8 | 19.5 | 41.3 | 40.8 | 43.7 | 33.3 | 47.3 | 17.7 |
|                                | 80                | 47.0                | 47.0 | 48.4 | 43.6 | 51.7 | 33.6 | 44.0 | 44.0 | 45.1 | 41.2 | 48.3 | 31.6 |
|                                | 85                | 50.0                | 50.0 | 50.6 | 49.1 | 52.7 | 42.9 | 46.9 | 46.9 | 47.4 | 46.5 | 49.3 | 40.6 |
|                                | 90                | 53.0                | 53.0 | 53.3 | 53.2 | 54.6 | 49.3 | 49.9 | 49.9 | 50.1 | 50.1 | 51.2 | 46.9 |
| 3500                           | 75                | 45.2                | 44.7 | 47.4 | 37.0 | 50.9 | 21.1 | 42.0 | 42.0 | 44.0 | 34.6 | 47.7 | 19.1 |
|                                | 80                | 48.1                | 48.1 | 49.1 | 45.2 | 52.1 | 35.3 | 44.8 | 44.8 | 45.7 | 42.6 | 48.5 | 33.0 |
|                                | 85                | 51.2                | 51.2 | 51.6 | 50.8 | 53.3 | 44.7 | 48.1 | 47.9 | 48.2 | 48.0 | 49.8 | 42.2 |
|                                | 90                | 54.3                | 54.3 | 54.4 | 54.4 | 55.4 | 51.3 | 50.6 | 50.6 | 51.0 | 51.0 | 51.9 | 48.6 |
| 4000                           | 75                | 45.8                | 45.6 | 47.6 | 38.0 | 51.3 | 22.3 | 42.4 | 42.4 | 44.3 | 35.4 | 48.4 | 20.0 |
|                                | 80                | 48.9                | 48.9 | 49.6 | 46.3 | 52.2 | 36.6 | 45.5 | 45.5 | 46.0 | 43.5 | 48.7 | 34.1 |
|                                | 85                | 52.1                | 52.1 | 52.3 | 52.1 | 53.7 | 46.1 | 48.6 | 48.6 | 48.7 | 48.7 | 50.0 | 43.4 |
|                                | 90                | 54.8                | 54.8 | 55.2 | 55.2 | 56.0 | 52.8 | 51.2 | 51.2 | 51.7 | 51.7 | 52.3 | 49.9 |
| 4375                           | 75                | 46.1                | 46.0 | 47.6 | 38.5 | 51.9 | 22.8 | 42.6 | 42.6 | 44.6 | 35.8 | 48.7 | 20.5 |
|                                | 80                | 49.3                | 49.3 | 49.8 | 46.9 | 52.4 | 37.2 | 45.8 | 45.8 | 46.1 | 43.9 | 48.9 | 34.6 |
|                                | 85                | 52.3                | 52.3 | 52.6 | 52.6 | 53.9 | 46.8 | 48.8 | 48.8 | 49.0 | 49.0 | 50.3 | 44.0 |
|                                | 90                | 55.2                | 55.2 | 55.7 | 55.7 | 56.3 | 53.6 | 52.0 | 52.0 | 52.1 | 52.1 | 52.5 | 50.6 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2000, 2500, 3000, and 3500 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Frostat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 19. Gross cooling capacities 12½ tons three phase high efficiency T/YH\*150G3,4,W (stage 2)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |      |       |       |       |       |       |      |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|------|
|                                |                   | 85                  |       |       |       |       |      | 95    |       |       |       |       |      |
|                                |                   | Entering Wet Bulb   |       |       |       |       |      |       |       |       |       |       |      |
|                                |                   | 61                  |       | 67    |       | 73    |      | 61    |       | 67    |       | 73    |      |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC  | MBh   | SHC   | MBh   | SHC   |       |      |
| 2000                           | 75                | 87.1                | 69.1  | 97.7  | 56.8  | 108.4 | 33.8 | 83.2  | 66.7  | 92.6  | 54.8  | 102.7 | 32.4 |
|                                | 80                | 88.4                | 76.3  | 98.3  | 68.1  | 110.1 | 52.4 | 84.5  | 73.5  | 93.8  | 65.7  | 104.8 | 50.5 |
|                                | 85                | 91.0                | 81.9  | 99.1  | 76.1  | 110.6 | 65.0 | 87.1  | 78.9  | 94.7  | 73.5  | 105.5 | 62.7 |
|                                | 90                | 94.6                | 86.6  | 101.5 | 82.3  | 111.0 | 73.9 | 90.6  | 83.5  | 97.0  | 79.4  | 106.0 | 71.4 |
| 2500                           | 75                | 92.4                | 75.4  | 101.4 | 62.0  | 112.8 | 37.9 | 88.1  | 72.7  | 96.9  | 59.7  | 105.9 | 36.2 |
|                                | 80                | 94.3                | 83.2  | 103.5 | 74.1  | 114.0 | 57.5 | 90.1  | 80.3  | 98.7  | 71.6  | 109.8 | 55.3 |
|                                | 85                | 97.5                | 89.5  | 105.0 | 83.0  | 115.8 | 71.0 | 93.3  | 86.3  | 100.2 | 80.1  | 110.4 | 68.5 |
|                                | 90                | 101.5               | 94.7  | 107.9 | 89.7  | 116.8 | 80.7 | 97.3  | 91.3  | 103.2 | 86.6  | 111.5 | 77.9 |
| 3000                           | 75                | 96.8                | 80.9  | 107.7 | 66.4  | 114.3 | 41.2 | 92.3  | 78.0  | 102.4 | 64.0  | 113.2 | 39.3 |
|                                | 80                | 99.4                | 89.5  | 107.8 | 79.5  | 118.5 | 61.9 | 94.9  | 86.3  | 102.7 | 76.7  | 114.1 | 59.5 |
|                                | 85                | 103.1               | 96.3  | 110.0 | 89.1  | 120.1 | 76.2 | 98.6  | 92.9  | 105.0 | 86.0  | 114.4 | 73.5 |
|                                | 90                | 107.6               | 102.0 | 113.5 | 96.4  | 121.8 | 86.7 | 103.1 | 98.4  | 108.5 | 93.1  | 116.2 | 83.7 |
| 3500                           | 75                | 100.3               | 85.7  | 110.4 | 70.2  | 120.2 | 43.8 | 95.6  | 82.5  | 104.8 | 67.5  | 115.7 | 41.7 |
|                                | 80                | 103.6               | 95.0  | 111.4 | 84.2  | 123.3 | 65.5 | 98.9  | 91.6  | 106.0 | 81.1  | 117.2 | 62.9 |
|                                | 85                | 107.9               | 102.4 | 114.2 | 94.5  | 123.6 | 80.8 | 103.2 | 98.8  | 108.9 | 91.1  | 117.7 | 77.8 |
|                                | 90                | 112.9               | 108.7 | 118.3 | 102.4 | 126.0 | 92.0 | 108.1 | 104.9 | 112.9 | 98.9  | 120.1 | 88.7 |
| 4000                           | 75                | 103.1               | 89.8  | 112.3 | 73.3  | 121.4 | 45.7 | 98.0  | 86.4  | 106.5 | 70.4  | 116.8 | 43.3 |
|                                | 80                | 107.0               | 99.8  | 114.1 | 88.1  | 125.2 | 68.5 | 102.0 | 96.2  | 108.4 | 84.9  | 118.8 | 65.7 |
|                                | 85                | 111.9               | 107.9 | 117.5 | 99.1  | 126.3 | 84.6 | 106.9 | 104.0 | 112.0 | 95.6  | 120.0 | 81.5 |
|                                | 90                | 117.4               | 114.6 | 122.2 | 107.7 | 129.3 | 96.5 | 112.3 | 110.6 | 116.6 | 103.9 | 123.2 | 93.1 |
| 4375                           | 75                | 104.6               | 92.4  | 113.2 | 75.1  | 122.6 | 46.7 | 99.3  | 88.8  | 107.1 | 72.0  | 117.4 | 44.1 |
|                                | 80                | 109.0               | 103.0 | 115.5 | 90.6  | 126.1 | 70.3 | 103.8 | 99.1  | 109.7 | 87.2  | 119.4 | 67.3 |
|                                | 85                | 114.3               | 111.5 | 119.5 | 102.2 | 127.7 | 87.1 | 109.1 | 107.4 | 113.7 | 98.5  | 121.3 | 83.7 |
|                                | 90                | 120.1               | 118.6 | 124.6 | 111.2 | 131.3 | 99.5 | 114.8 | 114.4 | 118.8 | 107.3 | 124.9 | 95.9 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2000, 2500, 3000, and 3500 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Frostat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Performance Data**

**Table 20. Gross cooling capacities 12½ tons three phase high efficiency T/YH\*150G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 2500                           | 75                | 125.0               | 96.9  | 138.0 | 75.5  | 153.6 | 38.3  | 118.3 | 92.7  | 130.4 | 72.3  | 145.1 | 36.2  | 111.1 | 88.1  | 122.3 | 68.7  | 136.2 | 33.8  |
|                                | 80                | 127.7               | 109.0 | 139.6 | 94.4  | 154.2 | 68.6  | 121.0 | 104.1 | 132.0 | 90.4  | 145.7 | 65.6  | 113.8 | 98.9  | 123.9 | 86.0  | 136.7 | 62.2  |
|                                | 85                | 132.0               | 118.4 | 141.2 | 108.0 | 154.7 | 89.5  | 125.1 | 113.0 | 133.5 | 103.4 | 146.2 | 85.7  | 117.8 | 107.3 | 125.5 | 98.4  | 137.2 | 81.5  |
|                                | 90                | 137.2               | 126.3 | 144.6 | 118.4 | 155.2 | 104.6 | 130.0 | 120.5 | 136.8 | 113.3 | 146.7 | 100.1 | 122.5 | 114.3 | 128.6 | 107.7 | 137.8 | 95.3  |
| 3000                           | 75                | 131.2               | 104.5 | 143.4 | 82.5  | 158.2 | 44.6  | 124.1 | 99.9  | 135.4 | 78.9  | 149.3 | 42.1  | 116.5 | 94.9  | 126.9 | 74.9  | 140.0 | 39.3  |
|                                | 80                | 134.4               | 117.1 | 145.5 | 102.0 | 159.3 | 75.6  | 127.3 | 111.8 | 137.5 | 97.6  | 150.4 | 72.2  | 119.7 | 106.2 | 129.0 | 92.9  | 141.0 | 68.4  |
|                                | 85                | 139.1               | 127.0 | 147.6 | 116.2 | 160.4 | 97.2  | 131.8 | 121.2 | 139.6 | 111.1 | 151.4 | 93.0  | 124.1 | 115.1 | 131.1 | 105.7 | 142.1 | 88.4  |
|                                | 90                | 144.6               | 135.3 | 151.5 | 127.1 | 161.4 | 112.8 | 137.1 | 129.1 | 143.3 | 121.5 | 152.5 | 107.9 | 129.1 | 122.5 | 134.6 | 115.6 | 143.1 | 102.7 |
| 3500                           | 75                | 136.7               | 111.4 | 148.1 | 88.8  | 162.1 | 50.2  | 129.2 | 106.4 | 142.1 | 84.8  | 152.8 | 47.4  | 121.2 | 101.0 | 133.1 | 80.4  | 143.1 | 44.2  |
|                                | 80                | 140.5               | 124.5 | 150.7 | 108.9 | 163.7 | 82.0  | 132.9 | 118.8 | 142.3 | 104.1 | 154.4 | 78.2  | 124.9 | 112.8 | 133.4 | 99.0  | 144.6 | 74.0  |
|                                | 85                | 145.6               | 134.9 | 153.4 | 123.6 | 165.3 | 104.2 | 137.8 | 128.7 | 144.9 | 118.2 | 156.0 | 99.5  | 129.7 | 122.2 | 136.0 | 112.4 | 146.2 | 94.6  |
|                                | 90                | 151.4               | 143.6 | 157.6 | 135.0 | 166.9 | 120.3 | 143.4 | 137.0 | 149.0 | 129.0 | 157.6 | 115.1 | 135.0 | 130.0 | 140.0 | 122.7 | 147.8 | 109.5 |
| 4000                           | 75                | 141.5               | 117.6 | 154.6 | 94.4  | 165.3 | 55.2  | 133.5 | 112.2 | 145.6 | 90.0  | 155.6 | 51.9  | 125.1 | 106.4 | 136.1 | 85.3  | 145.4 | 48.3  |
|                                | 80                | 145.8               | 131.3 | 155.2 | 115.2 | 167.4 | 87.7  | 137.8 | 125.2 | 146.4 | 110.0 | 157.7 | 83.4  | 129.4 | 118.8 | 137.0 | 104.5 | 147.5 | 78.9  |
|                                | 85                | 151.3               | 142.1 | 158.4 | 130.4 | 169.6 | 110.5 | 143.2 | 135.5 | 149.5 | 124.6 | 159.8 | 105.5 | 134.6 | 128.6 | 140.2 | 118.4 | 149.6 | 100.1 |
|                                | 90                | 157.4               | 151.2 | 163.1 | 142.3 | 171.7 | 127.2 | 149.1 | 144.2 | 154.0 | 135.9 | 161.9 | 121.5 | 140.2 | 136.9 | 144.6 | 129.2 | 151.7 | 115.5 |
| 4500                           | 75                | 145.6               | 123.2 | 157.7 | 99.4  | 173.0 | 59.4  | 137.2 | 117.4 | 148.3 | 94.6  | 162.6 | 55.8  | 128.4 | 111.2 | 138.4 | 89.4  | 151.7 | 51.8  |
|                                | 80                | 150.4               | 137.3 | 159.0 | 120.8 | 173.0 | 92.7  | 142.0 | 130.9 | 149.7 | 115.2 | 162.7 | 88.1  | 133.2 | 124.1 | 140.0 | 109.3 | 152.0 | 83.1  |
|                                | 85                | 156.3               | 148.7 | 162.7 | 136.6 | 173.1 | 116.1 | 147.8 | 141.7 | 153.4 | 130.3 | 162.9 | 110.7 | 138.8 | 134.4 | 143.7 | 123.7 | 152.3 | 105.0 |
|                                | 90                | 162.8               | 158.2 | 167.8 | 148.9 | 175.8 | 133.4 | 154.0 | 150.8 | 158.4 | 142.1 | 165.6 | 127.3 | 144.7 | 143.1 | 148.5 | 135.0 | 155.0 | 120.9 |
| 5000                           | 75                | 149.0               | 128.0 | 160.1 | 103.7 | 174.5 | 63.1  | 140.2 | 121.8 | 150.2 | 98.5  | 163.6 | 59.0  | 130.9 | 115.3 | 139.9 | 92.9  | 152.3 | 54.6  |
|                                | 80                | 154.3               | 142.8 | 162.1 | 125.7 | 175.2 | 97.0  | 145.5 | 135.9 | 152.4 | 119.7 | 164.5 | 92.0  | 136.2 | 128.7 | 142.2 | 113.4 | 153.3 | 86.7  |
|                                | 85                | 160.6               | 154.5 | 166.3 | 142.0 | 175.9 | 121.1 | 151.6 | 147.2 | 156.6 | 135.4 | 165.3 | 115.3 | 142.2 | 139.5 | 146.5 | 128.4 | 154.3 | 109.1 |
|                                | 90                | 167.4               | 164.5 | 171.8 | 154.8 | 179.1 | 138.9 | 158.2 | 156.7 | 162.0 | 147.6 | 168.5 | 132.4 | 148.5 | 148.5 | 151.7 | 140.1 | 157.5 | 125.6 |
| 5500                           | 75                | 151.6               | 132.3 | 161.8 | 107.3 | 175.2 | 66.0  | 142.4 | 125.7 | 151.5 | 101.7 | 164.0 | 61.5  | 132.7 | 118.7 | 140.8 | 95.8  | 152.8 | 56.8  |
|                                | 80                | 157.5               | 147.5 | 164.5 | 129.9 | 176.6 | 100.7 | 148.2 | 140.3 | 154.3 | 123.6 | 165.5 | 95.3  | 138.6 | 132.7 | 143.8 | 116.8 | 153.9 | 89.5  |
|                                | 85                | 164.2               | 159.7 | 169.2 | 146.8 | 178.0 | 125.4 | 154.8 | 152.0 | 159.1 | 139.8 | 167.0 | 119.2 | 145.0 | 143.9 | 148.5 | 132.4 | 155.6 | 112.6 |
|                                | 90                | 171.3               | 170.1 | 175.1 | 160.0 | 181.8 | 143.7 | 161.7 | 161.7 | 164.9 | 152.5 | 170.7 | 136.9 | 151.6 | 151.6 | 154.2 | 144.6 | 159.3 | 129.7 |
| 6000                           | 75                | 153.6               | 135.8 | 162.8 | 110.2 | 175.3 | 68.2  | 143.9 | 128.8 | 152.1 | 104.2 | 164.5 | 63.4  | 133.8 | 121.5 | 140.9 | 97.9  | 153.2 | 58.2  |
|                                | 80                | 160.0               | 151.6 | 166.1 | 133.5 | 177.4 | 103.7 | 150.3 | 144.0 | 155.6 | 126.7 | 165.8 | 97.9  | 140.2 | 136.0 | 144.6 | 119.6 | 154.5 | 91.7  |
|                                | 85                | 167.1               | 164.3 | 171.4 | 150.9 | 179.4 | 129.0 | 157.3 | 156.1 | 160.9 | 143.5 | 168.0 | 122.4 | 147.0 | 147.0 | 149.9 | 135.7 | 156.2 | 115.5 |
|                                | 90                | 174.5               | 174.5 | 177.7 | 164.6 | 183.7 | 147.9 | 164.4 | 164.4 | 167.1 | 156.7 | 172.3 | 140.6 | 154.0 | 154.0 | 155.9 | 148.4 | 160.4 | 133.1 |



## Performance Data

**Table 20. Gross cooling capacities 12½ tons three phase high efficiency T/YH\*150G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 2500                           | 75                | 103.5               | 83.2  | 113.8 | 64.9  | 126.9 | 31.1  | 99.5  | 80.7  | 109.4 | 62.8  | 122.0 | 29.6  | 95.5  | 78.0  | 104.9 | 60.6  | 117.0 | 28.0  |
|                                | 80                | 106.2               | 93.3  | 115.4 | 81.4  | 127.4 | 58.5  | 102.2 | 90.4  | 110.9 | 78.9  | 122.5 | 56.5  | 98.1  | 87.5  | 106.4 | 76.4  | 117.5 | 54.4  |
|                                | 85                | 110.0               | 101.2 | 116.9 | 93.0  | 127.9 | 77.0  | 105.9 | 98.1  | 112.5 | 90.3  | 123.0 | 74.7  | 101.8 | 94.8  | 107.9 | 87.4  | 118.0 | 72.2  |
|                                | 90                | 114.5               | 107.9 | 119.9 | 101.9 | 128.4 | 90.2  | 110.3 | 104.5 | 115.4 | 98.8  | 123.5 | 87.5  | 106.0 | 101.1 | 110.8 | 95.7  | 118.5 | 84.7  |
| 3000                           | 75                | 108.5               | 89.6  | 118.0 | 70.6  | 130.2 | 36.2  | 104.3 | 86.8  | 113.3 | 68.4  | 125.1 | 34.5  | 100.0 | 84.0  | 108.6 | 66.0  | 120.0 | 32.7  |
|                                | 80                | 111.7               | 100.3 | 120.0 | 87.8  | 131.2 | 64.3  | 107.5 | 97.2  | 115.4 | 85.1  | 126.2 | 62.1  | 103.2 | 94.0  | 110.7 | 82.4  | 121.0 | 59.9  |
|                                | 85                | 115.9               | 108.6 | 122.1 | 100.0 | 132.3 | 83.5  | 111.6 | 105.3 | 117.5 | 97.0  | 127.2 | 80.9  | 107.3 | 101.8 | 112.7 | 94.0  | 122.0 | 78.3  |
|                                | 90                | 120.7               | 115.7 | 125.5 | 109.3 | 133.3 | 97.2  | 116.3 | 112.1 | 120.8 | 106.1 | 128.2 | 94.3  | 111.8 | 108.5 | 116.0 | 102.7 | 123.1 | 91.3  |
| 3500                           | 75                | 112.7               | 95.3  | 123.6 | 75.8  | 132.9 | 40.6  | 108.3 | 92.4  | 118.7 | 73.3  | 127.6 | 38.7  | 103.8 | 89.3  | 113.7 | 70.8  | 122.2 | 36.8  |
|                                | 80                | 116.4               | 106.5 | 124.0 | 93.5  | 134.4 | 69.5  | 112.0 | 103.2 | 119.2 | 90.7  | 129.1 | 67.1  | 107.5 | 99.8  | 114.2 | 87.7  | 123.8 | 64.7  |
|                                | 85                | 121.1               | 115.3 | 126.6 | 106.3 | 136.0 | 89.3  | 116.6 | 111.8 | 121.8 | 103.1 | 130.7 | 86.5  | 112.0 | 108.2 | 116.8 | 99.8  | 125.3 | 83.7  |
|                                | 90                | 126.2               | 122.8 | 130.5 | 116.1 | 137.6 | 103.5 | 121.6 | 119.0 | 125.5 | 112.6 | 132.3 | 100.4 | 116.9 | 115.2 | 120.5 | 109.1 | 126.9 | 97.3  |
| 4000                           | 75                | 116.3               | 100.4 | 126.2 | 80.2  | 134.8 | 44.4  | 111.7 | 97.2  | 121.0 | 77.5  | 129.3 | 42.3  | 107.0 | 94.0  | 115.8 | 74.8  | 123.7 | 40.1  |
|                                | 80                | 120.5               | 112.1 | 127.3 | 98.6  | 136.9 | 74.0  | 115.9 | 108.6 | 122.2 | 95.5  | 131.4 | 71.4  | 111.2 | 105.0 | 117.1 | 92.4  | 125.8 | 68.8  |
|                                | 85                | 125.6               | 121.4 | 130.4 | 111.9 | 139.0 | 94.4  | 120.9 | 117.6 | 125.4 | 108.5 | 133.5 | 91.5  | 116.1 | 113.8 | 120.2 | 105.1 | 127.9 | 88.4  |
|                                | 90                | 131.0               | 129.2 | 134.7 | 122.1 | 141.1 | 109.2 | 126.2 | 125.3 | 129.5 | 118.5 | 135.6 | 105.9 | 121.3 | 121.2 | 124.3 | 114.8 | 130.0 | 102.5 |
| 4500                           | 75                | 119.1               | 104.7 | 128.0 | 84.0  | 140.3 | 47.5  | 114.3 | 101.4 | 122.7 | 81.1  | 134.5 | 45.2  | 109.4 | 97.9  | 117.3 | 78.2  | 128.6 | 42.8  |
|                                | 80                | 123.9               | 117.0 | 129.8 | 103.0 | 140.8 | 77.8  | 119.0 | 113.3 | 124.5 | 99.7  | 135.0 | 75.1  | 114.1 | 109.6 | 119.2 | 96.4  | 129.2 | 72.2  |
|                                | 85                | 129.3               | 126.7 | 133.5 | 116.8 | 141.3 | 98.9  | 124.4 | 122.8 | 128.2 | 113.3 | 135.6 | 95.7  | 119.4 | 118.8 | 122.8 | 109.6 | 129.8 | 92.5  |
|                                | 90                | 135.1               | 135.0 | 138.1 | 127.6 | 143.9 | 114.2 | 130.0 | 130.0 | 132.8 | 123.7 | 138.2 | 110.7 | 124.9 | 124.9 | 127.4 | 119.8 | 132.4 | 107.1 |
| 5000                           | 75                | 121.2               | 108.4 | 129.2 | 87.1  | 140.6 | 49.9  | 116.2 | 104.9 | 123.6 | 84.0  | 134.5 | 47.4  | 111.1 | 101.2 | 118.0 | 80.9  | 129.0 | 44.9  |
|                                | 80                | 126.5               | 121.2 | 131.6 | 106.7 | 141.7 | 81.0  | 121.5 | 117.4 | 126.2 | 103.3 | 135.7 | 78.0  | 116.4 | 113.4 | 120.6 | 99.7  | 129.6 | 75.0  |
|                                | 85                | 132.4               | 131.4 | 135.8 | 121.1 | 142.8 | 102.7 | 127.3 | 127.3 | 130.4 | 117.3 | 136.9 | 99.3  | 122.1 | 122.1 | 124.8 | 113.5 | 130.9 | 95.9  |
|                                | 90                | 138.4               | 138.4 | 140.9 | 132.3 | 146.0 | 118.5 | 133.2 | 133.2 | 135.4 | 128.3 | 140.1 | 114.8 | 127.9 | 127.9 | 129.7 | 124.1 | 134.1 | 111.1 |
| 5500                           | 75                | 122.6               | 111.5 | 129.6 | 89.5  | 141.0 | 51.7  | 117.4 | 107.7 | 123.9 | 86.3  | 134.8 | 49.0  | 112.1 | 103.9 | 118.0 | 82.9  | 130.0 | 46.2  |
|                                | 80                | 128.4               | 124.8 | 132.7 | 109.8 | 141.9 | 83.5  | 123.2 | 120.7 | 127.1 | 106.1 | 136.2 | 80.3  | 117.9 | 116.6 | 121.3 | 102.4 | 130.7 | 77.1  |
|                                | 85                | 134.7               | 134.7 | 137.5 | 124.7 | 143.7 | 105.8 | 129.4 | 129.4 | 131.8 | 120.7 | 137.6 | 102.2 | 124.0 | 124.0 | 126.0 | 116.7 | 131.4 | 98.6  |
|                                | 90                | 141.1               | 141.1 | 143.0 | 136.4 | 147.4 | 122.2 | 135.7 | 135.7 | 137.2 | 132.1 | 141.3 | 118.3 | 130.1 | 130.1 | 131.4 | 127.8 | 135.1 | 114.3 |
| 6000                           | 75                | 123.3               | 113.8 | 130.0 | 91.3  | 142.0 | 52.7  | 117.9 | 109.9 | 125.0 | 87.8  | 135.3 | 49.9  | 112.3 | 105.8 | 119.0 | 84.3  | 130.2 | 46.9  |
|                                | 80                | 129.7               | 127.7 | 133.2 | 112.2 | 143.0 | 85.3  | 124.2 | 123.4 | 127.3 | 108.3 | 137.0 | 81.9  | 118.7 | 118.7 | 124.0 | 104.4 | 131.6 | 78.5  |
|                                | 85                | 136.4               | 136.4 | 138.4 | 127.6 | 143.8 | 108.2 | 130.8 | 130.8 | 132.5 | 123.5 | 139.0 | 104.5 | 125.2 | 125.2 | 126.5 | 119.2 | 133.0 | 100.6 |
|                                | 90                | 143.0               | 143.0 | 144.3 | 139.8 | 148.1 | 125.2 | 137.4 | 137.4 | 138.4 | 135.3 | 141.8 | 121.1 | 131.6 | 131.6 | 132.3 | 130.8 | 135.3 | 116.9 |

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat formula, refer to appropriate airflow table notes.
- MBh = Total Gross Capacity
- SHC = Sensible Heat Capacity
- \*Indicates both downflow and horizontal units.

(a) For 2500, 3000, and 3500 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

Performance Data

**Table 21. Gross cooling capacities 12½ tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD150G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm     | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|---------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                     |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       | 105   |       |       |       |       |       |
|                     |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                     |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                 | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 2500 <sup>(a)</sup> | 75                | 119.6               | 86.9  | 135.0 | 60.0  | 154.5 | 54.1  | 112.4 | 82.4  | 127.1 | 56.5  | 145.9 | 51.1  | 104.7 | 77.6  | 118.6 | 52.7  | 136.8 | 47.9  |
|                     | 80                | 121.1               | 102.6 | 134.0 | 82.6  | 151.3 | 52.9  | 114.0 | 97.4  | 126.2 | 78.4  | 142.8 | 50.0  | 106.3 | 92.0  | 117.9 | 74.0  | 133.7 | 46.8  |
|                     | 85                | 123.7               | 114.7 | 134.3 | 101.6 | 149.2 | 75.1  | 116.7 | 108.9 | 126.6 | 96.8  | 140.8 | 71.4  | 109.2 | 102.8 | 118.4 | 91.7  | 131.9 | 67.4  |
|                     | 90                | 127.5               | 123.2 | 135.8 | 116.9 | 148.3 | 97.4  | 120.6 | 116.7 | 128.2 | 111.5 | 140.0 | 93.0  | 113.2 | 110.0 | 120.1 | 105.8 | 131.2 | 88.4  |
| 3250 <sup>(a)</sup> | 75                | 129.1               | 96.7  | 143.2 | 68.4  | 161.5 | 56.5  | 121.5 | 91.9  | 134.9 | 64.6  | 152.5 | 53.4  | 113.3 | 86.8  | 126.0 | 60.5  | 142.9 | 50.0  |
|                     | 80                | 131.4               | 113.6 | 143.2 | 92.1  | 159.1 | 57.4  | 123.9 | 108.1 | 134.9 | 87.7  | 150.2 | 54.0  | 115.8 | 102.4 | 126.1 | 83.0  | 140.7 | 50.4  |
|                     | 85                | 134.9               | 126.9 | 144.3 | 112.3 | 157.9 | 84.4  | 127.5 | 120.8 | 136.2 | 107.2 | 149.1 | 80.4  | 119.5 | 114.4 | 127.5 | 101.9 | 139.7 | 76.2  |
|                     | 90                | 139.7               | 136.5 | 146.7 | 128.8 | 157.9 | 107.9 | 132.3 | 129.8 | 138.6 | 123.1 | 149.2 | 103.2 | 124.4 | 122.8 | 130.0 | 117.2 | 139.9 | 98.3  |
| 4000                | 75                | 137.1               | 105.6 | 149.9 | 75.8  | 167.0 | 58.4  | 129.0 | 100.4 | 141.1 | 71.7  | 157.4 | 55.1  | 120.3 | 95.0  | 131.7 | 67.4  | 147.4 | 51.6  |
|                     | 80                | 140.2               | 123.6 | 150.7 | 100.7 | 165.4 | 64.5  | 132.2 | 117.8 | 142.0 | 96.0  | 156.0 | 60.9  | 123.7 | 111.8 | 132.7 | 91.0  | 146.1 | 57.0  |
|                     | 85                | 144.6               | 138.0 | 152.7 | 122.0 | 165.1 | 92.7  | 136.7 | 131.6 | 144.1 | 116.7 | 155.8 | 88.5  | 128.3 | 124.9 | 135.0 | 111.1 | 145.9 | 83.9  |
|                     | 90                | 150.2               | 148.8 | 156.0 | 139.7 | 166.0 | 117.4 | 142.4 | 141.8 | 147.5 | 133.7 | 156.8 | 112.4 | 134.0 | 134.0 | 138.4 | 127.5 | 147.0 | 107.2 |
| 4500                | 75                | 141.5               | 110.9 | 153.5 | 80.1  | 169.7 | 59.4  | 133.1 | 105.5 | 144.3 | 75.9  | 159.9 | 56.0  | 124.1 | 100.0 | 134.7 | 71.3  | 149.5 | 52.3  |
|                     | 80                | 145.2               | 129.7 | 154.9 | 105.8 | 168.8 | 68.7  | 136.9 | 123.7 | 145.8 | 100.9 | 159.0 | 64.9  | 128.1 | 117.5 | 136.3 | 95.8  | 148.8 | 60.8  |
|                     | 85                | 150.2               | 144.9 | 157.5 | 127.9 | 169.0 | 97.7  | 142.0 | 138.3 | 148.6 | 122.4 | 159.4 | 93.2  | 133.2 | 131.4 | 139.1 | 116.6 | 149.2 | 88.5  |
|                     | 90                | 156.3               | 156.3 | 161.3 | 146.4 | 170.5 | 123.1 | 148.2 | 148.2 | 152.5 | 140.3 | 161.0 | 118.0 | 139.6 | 139.6 | 143.1 | 133.8 | 150.9 | 112.6 |
| 5000                | 75                | 145.2               | 115.7 | 156.3 | 84.0  | 171.8 | 60.1  | 136.5 | 110.2 | 146.9 | 79.6  | 161.6 | 56.6  | 127.2 | 104.5 | 137.0 | 74.9  | 151.0 | 52.8  |
|                     | 80                | 149.5               | 135.3 | 158.3 | 110.5 | 171.4 | 72.5  | 140.9 | 129.2 | 149.0 | 105.4 | 161.4 | 68.4  | 131.7 | 122.8 | 139.1 | 100.1 | 150.8 | 64.2  |
|                     | 85                | 155.0               | 151.3 | 161.5 | 133.4 | 172.2 | 102.3 | 146.5 | 144.5 | 152.3 | 127.7 | 162.3 | 97.6  | 137.5 | 137.5 | 142.5 | 121.7 | 151.8 | 92.7  |
|                     | 90                | 161.8               | 161.8 | 165.9 | 152.7 | 174.3 | 128.4 | 153.4 | 153.4 | 156.8 | 146.3 | 164.4 | 123.1 | 144.4 | 144.4 | 147.1 | 139.7 | 154.1 | 117.6 |
| 5500                | 75                | 148.2               | 120.1 | 158.5 | 87.5  | 173.1 | 60.6  | 139.2 | 114.4 | 148.8 | 82.9  | 162.7 | 56.9  | 129.6 | 108.5 | 138.5 | 78.0  | 151.7 | 53.1  |
|                     | 80                | 153.1               | 140.5 | 161.1 | 114.8 | 173.3 | 75.8  | 144.2 | 134.2 | 151.4 | 109.5 | 163.0 | 71.6  | 134.7 | 127.6 | 141.3 | 104.0 | 152.1 | 67.1  |
|                     | 85                | 159.2               | 157.2 | 164.8 | 138.4 | 174.7 | 106.3 | 150.4 | 150.3 | 155.3 | 132.5 | 164.5 | 101.5 | 141.0 | 141.0 | 145.3 | 126.3 | 153.7 | 96.4  |
|                     | 90                | 166.5               | 166.5 | 169.8 | 158.5 | 177.3 | 133.3 | 157.8 | 157.8 | 160.4 | 151.9 | 167.2 | 127.8 | 148.6 | 148.6 | 150.4 | 145.1 | 156.6 | 122.0 |
| 6000                | 75                | 150.5               | 124.1 | 160.0 | 90.5  | 173.7 | 60.8  | 141.2 | 118.2 | 150.0 | 85.7  | 163.0 | 57.1  | 131.3 | 112.1 | 139.4 | 80.6  | 151.7 | 53.1  |
|                     | 80                | 156.0               | 145.2 | 163.1 | 118.6 | 174.5 | 78.6  | 146.8 | 138.7 | 153.2 | 113.1 | 163.9 | 74.2  | 137.0 | 131.9 | 142.7 | 107.4 | 152.7 | 69.6  |
|                     | 85                | 162.7               | 162.7 | 167.5 | 143.0 | 176.5 | 110.0 | 153.6 | 153.6 | 157.6 | 136.9 | 166.0 | 104.9 | 143.9 | 143.9 | 147.3 | 130.5 | 154.9 | 99.6  |
|                     | 90                | 170.6               | 170.6 | 173.0 | 163.8 | 179.7 | 137.7 | 161.5 | 161.5 | 163.3 | 157.1 | 169.3 | 132.0 | 152.0 | 152.0 | 153.0 | 150.1 | 158.3 | 126.1 |



**Performance Data**

**Table 21. Gross cooling capacities 12½ tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD150G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm     | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |                   |       |       |       |       |       |                   |       |       |       |       |       |
|---------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|
|                     |                   | 115                 |       |       |       |       |       | 120               |       |       |       |       |       | 125               |       |       |       |       |       |
|                     |                   | Entering Wet Bulb   |       |       |       |       |       | Entering Wet Bulb |       |       |       |       |       | Entering Wet Bulb |       |       |       |       |       |
|                     |                   | 61                  |       | 67    |       | 73    |       | 61                |       | 67    |       | 73    |       | 61                |       | 67    |       | 73    |       |
|                     |                   | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh               | SHC   | MBh   | SHC   | MBh   | SHC   | MBh               | SHC   | MBh   | SHC   | MBh   | SHC   |
| 2500 <sup>(a)</sup> | 75                | 96.4                | 72.5  | 109.7 | 48.7  | 127.1 | 44.5  | 92.1              | 69.8  | 105.0 | 46.6  | 122.1 | 42.7  | 87.7              | 67.2  | 100.2 | 44.4  | 116.9 | 40.9  |
|                     | 80                | 98.2                | 86.3  | 109.0 | 69.4  | 124.1 | 43.5  | 93.9              | 83.3  | 104.4 | 66.9  | 119.2 | 41.7  | 89.5              | 80.3  | 99.6  | 64.4  | 114.0 | 39.9  |
|                     | 85                | 101.1               | 96.4  | 109.6 | 86.4  | 122.4 | 63.2  | 96.9              | 93.2  | 105.0 | 83.7  | 117.5 | 60.9  | 92.5              | 89.8  | 100.3 | 80.9  | 112.4 | 58.7  |
|                     | 90                | 105.3               | 103.0 | 111.4 | 99.9  | 121.8 | 83.5  | 101.1             | 99.4  | 106.9 | 96.9  | 116.9 | 81.0  | 96.8              | 95.8  | 102.2 | 93.7  | 111.9 | 78.4  |
| 3250 <sup>(a)</sup> | 75                | 104.6               | 81.4  | 116.5 | 56.2  | 132.7 | 46.5  | 100.0             | 78.7  | 111.6 | 54.0  | 127.5 | 44.6  | 95.3              | 75.8  | 106.6 | 51.7  | 122.1 | 42.7  |
|                     | 80                | 107.2               | 96.4  | 116.8 | 78.1  | 130.7 | 46.5  | 102.7             | 93.3  | 111.9 | 75.5  | 125.4 | 44.5  | 98.0              | 90.2  | 106.9 | 72.9  | 120.1 | 42.3  |
|                     | 85                | 111.0               | 107.7 | 118.3 | 96.3  | 129.8 | 71.6  | 106.5             | 104.3 | 113.4 | 93.4  | 124.6 | 69.3  | 101.9             | 100.9 | 108.5 | 90.5  | 119.3 | 66.9  |
|                     | 90                | 116.0               | 115.5 | 120.9 | 111.0 | 130.1 | 93.2  | 111.6             | 111.6 | 116.2 | 107.8 | 125.0 | 90.5  | 107.1             | 107.1 | 111.3 | 104.5 | 119.7 | 87.8  |
| 4000                | 75                | 111.1               | 89.4  | 121.8 | 62.8  | 136.8 | 47.9  | 106.3             | 86.5  | 116.7 | 60.4  | 131.3 | 46.0  | 101.4             | 83.5  | 111.4 | 57.9  | 125.7 | 44.0  |
|                     | 80                | 114.6               | 105.5 | 123.0 | 85.8  | 135.6 | 52.8  | 109.9             | 102.3 | 117.9 | 83.1  | 130.1 | 50.6  | 105.0             | 99.0  | 112.7 | 80.3  | 124.6 | 48.4  |
|                     | 85                | 119.3               | 118.0 | 125.3 | 105.2 | 135.6 | 79.1  | 114.6             | 114.5 | 120.3 | 102.2 | 130.2 | 76.6  | 109.8             | 109.8 | 115.1 | 99.1  | 124.7 | 74.0  |
|                     | 90                | 125.2               | 125.2 | 128.8 | 121.0 | 136.7 | 101.8 | 120.5             | 120.5 | 123.8 | 117.7 | 131.4 | 99.0  | 115.8             | 115.8 | 118.7 | 114.3 | 125.9 | 96.1  |
| 4500                | 75                | 114.6               | 94.1  | 124.5 | 66.6  | 138.6 | 48.5  | 109.7             | 91.1  | 119.2 | 64.1  | 133.0 | 46.5  | 104.6             | 88.1  | 113.8 | 61.5  | 127.2 | 44.5  |
|                     | 80                | 118.7               | 111.0 | 126.2 | 90.4  | 138.0 | 56.4  | 113.8             | 107.7 | 121.0 | 87.6  | 132.4 | 54.2  | 108.8             | 104.3 | 115.6 | 84.7  | 126.7 | 51.8  |
|                     | 85                | 123.9               | 123.9 | 129.1 | 110.6 | 138.6 | 83.5  | 119.1             | 119.1 | 123.9 | 107.4 | 133.0 | 80.9  | 114.1             | 114.1 | 118.6 | 104.3 | 127.3 | 78.3  |
|                     | 90                | 130.4               | 130.4 | 133.2 | 127.1 | 140.3 | 107.0 | 125.6             | 125.6 | 128.1 | 123.7 | 134.8 | 104.1 | 120.7             | 120.7 | 122.8 | 120.2 | 129.2 | 101.1 |
| 5000                | 75                | 117.4               | 98.4  | 126.5 | 69.9  | 139.8 | 48.9  | 112.3             | 95.3  | 121.0 | 67.4  | 134.0 | 46.9  | 107.1             | 92.2  | 115.4 | 64.7  | 128.0 | 44.8  |
|                     | 80                | 122.1               | 116.1 | 128.8 | 94.5  | 139.7 | 59.6  | 117.0             | 112.7 | 123.4 | 91.6  | 134.0 | 57.2  | 111.8             | 109.2 | 117.8 | 88.6  | 128.1 | 54.8  |
|                     | 85                | 127.9               | 127.9 | 132.2 | 115.5 | 140.8 | 87.5  | 122.9             | 122.9 | 126.9 | 112.3 | 135.1 | 84.8  | 117.8             | 117.8 | 121.4 | 109.0 | 129.3 | 82.0  |
|                     | 90                | 134.9               | 134.9 | 136.9 | 132.8 | 143.2 | 111.7 | 130.0             | 130.0 | 131.6 | 129.3 | 137.5 | 108.7 | 125.0             | 125.0 | 126.2 | 125.7 | 131.8 | 105.7 |
| 5500                | 75                | 119.5               | 102.3 | 127.7 | 72.8  | 140.2 | 49.1  | 114.3             | 99.1  | 122.1 | 70.2  | 134.2 | 47.0  | 108.9             | 95.8  | 116.4 | 67.4  | 128.2 | 44.9  |
|                     | 80                | 124.7               | 120.7 | 130.6 | 98.2  | 140.7 | 62.3  | 119.5             | 117.2 | 125.0 | 95.2  | 134.8 | 59.9  | 114.2             | 113.6 | 119.4 | 92.1  | 128.8 | 57.4  |
|                     | 85                | 131.1               | 131.1 | 134.7 | 119.9 | 142.4 | 91.0  | 126.0             | 126.0 | 129.2 | 116.6 | 136.6 | 88.2  | 120.7             | 120.7 | 123.5 | 113.2 | 130.6 | 85.4  |
|                     | 90                | 138.5               | 138.5 | 139.9 | 138.1 | 145.4 | 116.0 | 133.1             | 133.1 | 134.5 | 134.4 | 139.6 | 112.9 | 128.9             | 128.9 | 128.9 | 128.9 | 133.6 | 109.8 |
| 6000                | 75                | 120.9               | 105.7 | 128.3 | 75.3  | 139.9 | 49.0  | 115.5             | 102.4 | 122.5 | 72.5  | 133.8 | 46.8  | 110.0             | 99.0  | 116.7 | 69.7  | 127.6 | 44.7  |
|                     | 80                | 126.7               | 124.9 | 131.7 | 101.4 | 141.0 | 64.6  | 121.4             | 121.3 | 126.0 | 98.3  | 135.0 | 62.1  | 115.9             | 115.9 | 120.2 | 95.2  | 128.8 | 59.5  |
|                     | 85                | 133.7               | 133.7 | 136.4 | 123.9 | 143.3 | 94.1  | 128.4             | 128.4 | 130.7 | 120.5 | 137.3 | 91.2  | 123.0             | 123.0 | 125.0 | 117.1 | 131.2 | 88.2  |
|                     | 90                | 142.2               | 142.2 | 142.2 | 142.2 | 146.8 | 119.9 | 136.6             | 136.6 | 136.6 | 136.6 | 140.9 | 116.7 | 130.9             | 130.9 | 130.9 | 130.9 | 134.8 | 113.4 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
- (a) For 2500 and 3250 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Dehumidification (Hot Gas Reheat) with Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed or single zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 22. Gross cooling capacities 15 tons three phase high efficiency T/YH\*180G3,4,W (stage 1)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|-------------------|---------------------|------|------|------|------|------|------|------|------|------|------|------|
|                                |                   | 85                  |      |      |      |      |      | 95   |      |      |      |      |      |
|                                |                   | Entering Wet Bulb   |      |      |      |      |      |      |      |      |      |      |      |
|                                |                   | 61                  |      | 67   |      | 73   |      | 61   |      | 67   |      | 73   |      |
| MBh                            | SHC               | MBh                 | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  |      |      |
| 2400                           | 75                | 54.8                | 51.5 | 59.2 | 40.6 | 65.3 | 18.6 | 51.8 | 49.1 | 56.0 | 38.5 | 60.9 | 17.0 |
|                                | 80                | 57.4                | 56.8 | 60.0 | 50.8 | 65.5 | 37.2 | 54.3 | 54.2 | 56.8 | 48.5 | 62.1 | 35.2 |
|                                | 85                | 60.3                | 60.3 | 61.9 | 57.4 | 65.5 | 48.8 | 57.1 | 57.1 | 58.6 | 54.8 | 62.1 | 46.6 |
|                                | 90                | 63.3                | 63.3 | 64.3 | 61.8 | 66.8 | 56.5 | 60.1 | 60.1 | 61.0 | 59.1 | 63.3 | 54.1 |
| 3000                           | 75                | 56.6                | 54.6 | 60.5 | 44.0 | 66.3 | 22.4 | 53.4 | 52.0 | 57.1 | 41.7 | 61.6 | 20.5 |
|                                | 80                | 59.5                | 59.5 | 61.7 | 54.3 | 66.7 | 40.9 | 56.2 | 56.2 | 58.2 | 51.8 | 63.1 | 38.7 |
|                                | 85                | 62.6                | 62.6 | 63.8 | 60.9 | 67.1 | 52.6 | 59.3 | 59.3 | 60.4 | 58.2 | 63.4 | 50.2 |
|                                | 90                | 65.7                | 65.7 | 66.4 | 65.5 | 68.6 | 60.4 | 62.3 | 62.3 | 62.9 | 62.6 | 64.9 | 57.7 |
| 3600                           | 75                | 58.1                | 57.2 | 61.5 | 46.8 | 66.9 | 25.5 | 54.7 | 54.3 | 57.9 | 44.3 | 62.0 | 23.4 |
|                                | 80                | 61.2                | 61.2 | 63.0 | 57.2 | 67.5 | 44.0 | 57.8 | 57.8 | 59.4 | 54.4 | 63.8 | 41.6 |
|                                | 85                | 64.5                | 64.5 | 65.4 | 63.9 | 68.2 | 55.8 | 61.0 | 61.0 | 61.8 | 60.9 | 64.4 | 53.1 |
|                                | 90                | 67.9                | 67.9 | 68.3 | 68.3 | 70.0 | 63.7 | 64.3 | 64.3 | 64.6 | 64.6 | 66.2 | 60.7 |
| 4200                           | 75                | 59.3                | 59.1 | 62.2 | 49.1 | 67.0 | 28.1 | 55.7 | 55.7 | 58.4 | 46.3 | 62.1 | 25.7 |
|                                | 80                | 62.6                | 62.6 | 64.0 | 59.5 | 68.1 | 46.6 | 59.0 | 59.0 | 60.2 | 56.4 | 64.1 | 43.9 |
|                                | 85                | 66.2                | 66.2 | 66.7 | 66.3 | 69.1 | 58.4 | 62.5 | 62.5 | 62.9 | 62.9 | 65.1 | 55.5 |
|                                | 90                | 69.7                | 69.7 | 69.7 | 69.7 | 71.2 | 66.3 | 64.6 | 64.6 | 65.9 | 65.9 | 67.2 | 63.2 |
| 4800                           | 75                | 60.1                | 60.1 | 62.5 | 50.7 | 67.1 | 30.0 | 56.4 | 56.4 | 58.6 | 47.7 | 62.7 | 27.4 |
|                                | 80                | 63.7                | 63.7 | 64.7 | 61.1 | 68.3 | 48.5 | 59.9 | 59.9 | 60.7 | 57.9 | 64.1 | 45.6 |
|                                | 85                | 67.5                | 67.5 | 67.6 | 67.6 | 69.6 | 60.4 | 63.6 | 63.6 | 63.6 | 63.6 | 65.5 | 57.3 |
|                                | 90                | 69.8                | 69.8 | 70.9 | 70.9 | 72.0 | 68.5 | 65.9 | 65.9 | 66.8 | 66.8 | 67.8 | 65.1 |
| 5250                           | 75                | 60.5                | 60.5 | 62.5 | 51.6 | 67.2 | 31.1 | 56.6 | 56.6 | 58.8 | 48.4 | 63.0 | 28.4 |
|                                | 80                | 64.3                | 64.3 | 65.0 | 62.0 | 68.5 | 49.6 | 60.4 | 60.4 | 60.9 | 58.6 | 64.1 | 46.5 |
|                                | 85                | 67.8                | 67.8 | 68.1 | 68.1 | 69.8 | 61.6 | 63.8 | 63.8 | 64.0 | 64.0 | 65.5 | 58.2 |
|                                | 90                | 70.7                | 70.7 | 71.5 | 71.5 | 72.4 | 69.6 | 66.7 | 66.7 | 67.4 | 67.4 | 68.0 | 66.1 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2400, 3000, 3600, and 4200 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 23. Gross cooling capacities 15 tons three phase high efficiency T/YH\*180G3,4,W (stage 2)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 2400                           | 75                | 102.0               | 81.9  | 111.7 | 65.6  | 123.0 | 36.1  | 96.8  | 78.4  | 105.8 | 62.6  | 116.0 | 33.6  |
|                                | 80                | 104.0               | 90.7  | 113.0 | 79.9  | 123.8 | 59.7  | 98.9  | 86.9  | 107.3 | 76.5  | 117.7 | 56.7  |
|                                | 85                | 107.1               | 97.4  | 114.3 | 89.8  | 124.6 | 75.5  | 102.0 | 93.4  | 108.8 | 86.1  | 118.5 | 72.1  |
|                                | 90                | 111.0               | 102.8 | 117.0 | 97.1  | 125.4 | 86.5  | 105.8 | 98.6  | 111.5 | 93.2  | 119.3 | 82.9  |
| 3000                           | 75                | 107.2               | 88.8  | 117.9 | 71.7  | 126.6 | 41.1  | 101.7 | 85.0  | 111.7 | 68.3  | 120.0 | 38.3  |
|                                | 80                | 109.8               | 98.2  | 118.0 | 86.6  | 128.0 | 65.6  | 104.4 | 94.1  | 112.0 | 82.9  | 121.5 | 62.3  |
|                                | 85                | 113.4               | 105.4 | 120.0 | 97.2  | 129.4 | 82.2  | 108.0 | 101.1 | 114.1 | 93.2  | 123.0 | 78.5  |
|                                | 90                | 117.8               | 111.3 | 123.2 | 105.1 | 130.8 | 93.9  | 112.3 | 106.7 | 117.3 | 100.8 | 124.5 | 89.9  |
| 3600                           | 75                | 111.5               | 94.8  | 121.2 | 76.7  | 133.1 | 45.2  | 105.7 | 90.6  | 114.7 | 73.0  | 125.9 | 42.1  |
|                                | 80                | 114.7               | 104.8 | 122.0 | 92.5  | 133.2 | 70.6  | 109.0 | 100.4 | 115.7 | 88.4  | 126.2 | 67.0  |
|                                | 85                | 118.9               | 112.5 | 124.7 | 103.7 | 133.3 | 87.9  | 113.2 | 107.9 | 118.5 | 99.3  | 126.5 | 84.0  |
|                                | 90                | 123.7               | 118.9 | 128.4 | 112.1 | 135.3 | 100.3 | 117.8 | 114.0 | 122.2 | 107.5 | 128.7 | 96.0  |
| 4200                           | 75                | 114.9               | 99.8  | 123.6 | 80.9  | 134.5 | 48.4  | 108.8 | 95.3  | 116.8 | 76.9  | 127.0 | 44.9  |
|                                | 80                | 118.8               | 110.4 | 125.2 | 97.4  | 135.4 | 74.7  | 112.7 | 105.7 | 118.6 | 93.0  | 128.1 | 70.7  |
|                                | 85                | 123.5               | 118.7 | 128.5 | 109.2 | 136.3 | 92.8  | 117.4 | 113.7 | 122.0 | 104.6 | 129.2 | 88.5  |
|                                | 90                | 128.6               | 125.5 | 132.8 | 118.2 | 139.0 | 105.7 | 122.5 | 120.3 | 126.3 | 113.2 | 132.0 | 101.1 |
| 4800                           | 75                | 117.4               | 103.9 | 125.1 | 84.1  | 135.0 | 50.6  | 111.0 | 99.1  | 117.9 | 79.7  | 128.0 | 46.8  |
|                                | 80                | 121.9               | 115.2 | 127.5 | 101.4 | 136.7 | 77.8  | 115.6 | 110.1 | 120.6 | 96.7  | 129.1 | 73.5  |
|                                | 85                | 127.1               | 123.9 | 131.5 | 113.9 | 138.4 | 96.7  | 120.8 | 118.6 | 124.6 | 108.8 | 131.0 | 92.0  |
|                                | 90                | 132.7               | 131.1 | 136.3 | 123.3 | 141.8 | 110.3 | 126.3 | 125.6 | 129.4 | 118.1 | 134.5 | 105.3 |
| 5250                           | 75                | 118.7               | 106.3 | 125.6 | 85.9  | 135.5 | 51.7  | 112.0 | 101.3 | 118.2 | 81.3  | 129.0 | 47.6  |
|                                | 80                | 123.7               | 118.1 | 128.7 | 103.7 | 137.1 | 79.5  | 117.1 | 112.7 | 121.5 | 98.8  | 129.3 | 75.0  |
|                                | 85                | 129.3               | 127.3 | 133.1 | 116.7 | 139.4 | 99.0  | 122.7 | 121.7 | 126.0 | 111.4 | 131.8 | 94.1  |
|                                | 90                | 135.2               | 134.8 | 138.3 | 126.6 | 143.3 | 113.0 | 128.5 | 128.5 | 131.2 | 121.1 | 135.7 | 107.9 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2400, 3000, 3600, and 4200 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Frostat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

Table 24. Gross cooling capacities 15 tons three phase high efficiency T/YH\*180G3,4,W (full load)

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3000                           | 75                | 149.8               | 116.6 | 163.9 | 91.6  | 180.9 | 48.7  | 142.5 | 112.1 | 155.7 | 88.3  | 172.0 | 46.6  | 134.3 | 106.9 | 146.7 | 84.2  | 162.1 | 43.8  |
|                                | 80                | 153.0               | 130.6 | 165.9 | 113.6 | 181.8 | 83.7  | 145.7 | 125.4 | 157.8 | 109.4 | 172.9 | 80.6  | 137.5 | 119.5 | 148.7 | 104.5 | 163.1 | 76.8  |
|                                | 85                | 157.9               | 141.6 | 167.9 | 129.4 | 182.8 | 108.0 | 150.5 | 135.8 | 159.8 | 124.5 | 173.8 | 104.0 | 142.2 | 129.4 | 150.8 | 118.9 | 164.0 | 99.3  |
|                                | 90                | 163.8               | 150.7 | 171.9 | 141.5 | 183.7 | 125.5 | 156.2 | 144.5 | 163.7 | 136.0 | 174.7 | 120.8 | 147.7 | 137.7 | 154.6 | 129.9 | 164.9 | 115.5 |
| 3600                           | 75                | 156.6               | 125.2 | 169.8 | 99.5  | 186.1 | 55.7  | 148.9 | 120.2 | 161.3 | 95.7  | 176.7 | 53.2  | 140.3 | 114.6 | 151.8 | 91.2  | 166.5 | 50.1  |
|                                | 80                | 160.4               | 139.8 | 172.4 | 122.2 | 187.5 | 91.6  | 152.7 | 134.2 | 163.9 | 117.5 | 178.2 | 88.1  | 144.1 | 127.9 | 154.4 | 112.2 | 168.0 | 83.9  |
|                                | 85                | 165.7               | 151.3 | 175.0 | 138.6 | 189.0 | 116.6 | 157.9 | 145.1 | 166.5 | 133.2 | 179.7 | 112.2 | 149.2 | 138.3 | 157.0 | 127.2 | 169.4 | 107.1 |
|                                | 90                | 172.0               | 160.9 | 179.5 | 151.2 | 190.5 | 134.7 | 163.9 | 154.2 | 170.8 | 145.3 | 181.2 | 129.6 | 155.0 | 147.0 | 161.3 | 138.7 | 170.9 | 123.8 |
| 4200                           | 75                | 162.6               | 133.0 | 177.9 | 106.6 | 190.4 | 62.0  | 154.5 | 127.6 | 168.8 | 102.4 | 180.7 | 59.1  | 145.5 | 121.6 | 158.9 | 97.5  | 170.0 | 55.5  |
|                                | 80                | 166.9               | 148.2 | 178.1 | 129.9 | 192.5 | 98.7  | 158.8 | 142.1 | 169.2 | 124.9 | 182.7 | 94.8  | 149.8 | 135.4 | 159.4 | 119.1 | 172.1 | 90.1  |
|                                | 85                | 172.7               | 160.2 | 181.3 | 147.0 | 194.5 | 124.4 | 164.5 | 153.6 | 172.3 | 141.2 | 184.8 | 119.5 | 155.4 | 146.3 | 162.5 | 134.8 | 174.1 | 114.1 |
|                                | 90                | 179.3               | 170.2 | 186.2 | 160.1 | 196.6 | 143.1 | 170.9 | 163.1 | 177.2 | 153.8 | 186.8 | 137.6 | 161.6 | 155.5 | 167.2 | 146.8 | 176.2 | 131.4 |
| 4800                           | 75                | 167.9               | 139.9 | 182.2 | 112.8 | 194.0 | 67.4  | 159.3 | 134.2 | 172.7 | 108.2 | 183.8 | 64.1  | 149.9 | 127.7 | 162.3 | 102.9 | 172.8 | 60.2  |
|                                | 80                | 172.7               | 155.7 | 183.1 | 136.9 | 196.6 | 105.0 | 164.2 | 149.3 | 173.7 | 131.4 | 186.5 | 100.6 | 154.8 | 142.2 | 163.5 | 125.3 | 175.4 | 95.6  |
|                                | 85                | 179.0               | 168.2 | 186.8 | 154.5 | 199.2 | 131.4 | 170.3 | 161.2 | 177.5 | 148.4 | 189.1 | 126.1 | 160.8 | 153.6 | 167.2 | 141.5 | 178.0 | 120.2 |
|                                | 90                | 185.9               | 178.7 | 192.2 | 168.2 | 201.9 | 150.7 | 177.1 | 171.3 | 182.7 | 161.4 | 191.7 | 144.7 | 167.3 | 163.2 | 172.4 | 154.0 | 180.7 | 138.2 |
| 5400                           | 75                | 172.3               | 146.1 | 185.6 | 118.3 | 202.7 | 72.1  | 163.4 | 139.9 | 175.7 | 113.3 | 191.8 | 68.4  | 153.6 | 133.1 | 164.9 | 107.6 | 180.1 | 64.0  |
|                                | 80                | 177.8               | 162.5 | 187.3 | 143.1 | 202.9 | 110.5 | 168.8 | 155.6 | 177.5 | 137.2 | 192.2 | 105.7 | 159.0 | 148.1 | 166.9 | 130.6 | 180.6 | 100.3 |
|                                | 85                | 184.4               | 175.5 | 191.6 | 161.3 | 203.2 | 137.6 | 175.4 | 168.1 | 181.8 | 154.7 | 192.6 | 131.9 | 165.5 | 160.0 | 171.2 | 147.5 | 181.2 | 125.6 |
|                                | 90                | 191.7               | 186.4 | 197.4 | 175.5 | 206.4 | 157.5 | 182.5 | 178.6 | 187.5 | 168.3 | 195.8 | 151.1 | 172.3 | 170.1 | 176.8 | 160.5 | 184.4 | 144.1 |
| 6000                           | 75                | 176.0               | 151.5 | 188.3 | 123.0 | 204.4 | 76.0  | 166.7 | 144.9 | 178.0 | 117.5 | 193.1 | 71.9  | 156.5 | 137.6 | 166.8 | 111.4 | 181.0 | 67.1  |
|                                | 80                | 182.0               | 168.5 | 190.7 | 148.5 | 205.4 | 115.2 | 172.7 | 161.2 | 180.5 | 142.2 | 194.3 | 110.0 | 162.5 | 153.3 | 169.5 | 135.2 | 182.3 | 104.1 |
|                                | 85                | 189.1               | 182.0 | 195.5 | 167.3 | 206.3 | 143.0 | 179.7 | 174.2 | 185.4 | 160.3 | 195.4 | 136.9 | 169.3 | 165.7 | 174.3 | 152.6 | 183.5 | 130.2 |
|                                | 90                | 196.8               | 193.3 | 201.8 | 181.9 | 210.1 | 163.5 | 187.1 | 185.1 | 191.5 | 174.4 | 199.1 | 156.7 | 176.6 | 176.2 | 180.4 | 166.2 | 187.3 | 149.3 |
| 6600                           | 75                | 178.9               | 156.1 | 190.2 | 126.9 | 205.4 | 79.1  | 169.2 | 149.1 | 179.5 | 121.0 | 193.7 | 74.5  | 158.6 | 141.4 | 167.9 | 114.5 | 181.2 | 69.3  |
|                                | 80                | 185.5               | 173.7 | 193.3 | 153.1 | 207.0 | 119.1 | 175.7 | 166.0 | 182.7 | 146.3 | 195.5 | 113.5 | 165.1 | 157.6 | 171.3 | 139.0 | 183.1 | 107.2 |
|                                | 85                | 193.0               | 187.7 | 198.7 | 172.5 | 208.7 | 147.6 | 183.2 | 179.5 | 188.2 | 165.1 | 197.3 | 141.1 | 172.4 | 170.6 | 176.7 | 157.0 | 185.1 | 134.0 |
|                                | 90                | 201.0               | 199.5 | 205.5 | 187.6 | 213.0 | 168.7 | 190.9 | 190.8 | 194.8 | 179.7 | 201.7 | 161.5 | 180.0 | 180.0 | 183.2 | 171.1 | 189.4 | 153.7 |
| 7200                           | 75                | 181.0               | 159.9 | 191.4 | 130.0 | 205.6 | 81.4  | 170.9 | 152.5 | 180.3 | 123.7 | 194.3 | 76.4  | 159.9 | 144.4 | 168.3 | 116.8 | 181.3 | 70.8  |
|                                | 80                | 188.2               | 178.1 | 195.2 | 156.8 | 207.9 | 122.2 | 178.0 | 170.0 | 184.2 | 149.7 | 196.0 | 116.2 | 167.0 | 161.2 | 172.3 | 141.9 | 183.2 | 109.5 |
|                                | 85                | 196.1               | 192.6 | 201.1 | 176.9 | 210.3 | 151.4 | 185.9 | 184.0 | 190.2 | 169.0 | 198.5 | 144.5 | 174.7 | 174.6 | 178.3 | 160.6 | 185.9 | 137.0 |
|                                | 90                | 204.5               | 204.5 | 208.3 | 192.5 | 215.2 | 173.1 | 194.0 | 194.0 | 197.2 | 184.2 | 203.4 | 165.5 | 182.7 | 182.7 | 185.3 | 175.1 | 190.8 | 157.3 |



## Performance Data

**Table 24. Gross cooling capacities 15 tons three phase high efficiency T/YH\*180G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3000                           | 75                | 125.3               | 101.0 | 136.8 | 79.5  | 151.4 | 40.4  | 120.4 | 97.8  | 131.5 | 76.9  | 145.7 | 38.5  | 115.3 | 94.5  | 126.0 | 74.1  | 139.8 | 36.4  |
|                                | 80                | 128.5               | 113.0 | 138.8 | 98.9  | 152.4 | 72.3  | 123.6 | 109.5 | 133.6 | 95.9  | 146.7 | 69.9  | 118.5 | 105.8 | 128.1 | 92.7  | 140.8 | 67.2  |
|                                | 85                | 133.0               | 122.3 | 140.9 | 112.6 | 153.3 | 94.0  | 128.1 | 118.5 | 135.6 | 109.3 | 147.6 | 91.1  | 122.9 | 114.6 | 130.1 | 105.7 | 141.7 | 88.1  |
|                                | 90                | 138.3               | 130.2 | 144.6 | 123.1 | 154.2 | 109.5 | 133.3 | 126.2 | 139.2 | 119.4 | 148.5 | 106.2 | 128.0 | 122.0 | 133.7 | 115.6 | 142.6 | 102.8 |
| 3600                           | 75                | 130.9               | 108.3 | 141.5 | 86.1  | 155.4 | 46.3  | 125.8 | 105.0 | 138.6 | 83.3  | 149.5 | 44.1  | 120.5 | 101.4 | 132.9 | 80.4  | 143.4 | 41.8  |
|                                | 80                | 134.6               | 120.9 | 144.1 | 106.2 | 156.8 | 79.0  | 129.5 | 117.2 | 138.7 | 103.0 | 151.0 | 76.3  | 124.3 | 113.3 | 133.0 | 99.6  | 144.9 | 73.5  |
|                                | 85                | 139.6               | 130.8 | 146.7 | 120.6 | 158.3 | 101.4 | 134.5 | 126.8 | 141.3 | 117.0 | 152.5 | 98.3  | 129.1 | 122.6 | 135.6 | 113.3 | 146.4 | 95.0  |
|                                | 90                | 145.2               | 139.0 | 150.9 | 131.5 | 159.8 | 117.4 | 140.0 | 134.8 | 145.3 | 127.7 | 153.9 | 113.9 | 134.5 | 130.5 | 139.6 | 123.6 | 147.9 | 110.3 |
| 4200                           | 75                | 135.7               | 114.9 | 148.0 | 92.0  | 158.5 | 51.3  | 130.4 | 111.3 | 142.2 | 88.9  | 152.4 | 48.9  | 124.9 | 107.5 | 136.3 | 85.8  | 146.1 | 46.4  |
|                                | 80                | 140.0               | 128.0 | 148.7 | 112.7 | 160.6 | 84.8  | 134.7 | 124.1 | 143.0 | 109.3 | 154.5 | 82.0  | 129.2 | 120.0 | 137.1 | 105.7 | 148.2 | 78.9  |
|                                | 85                | 145.4               | 138.4 | 151.8 | 127.7 | 162.6 | 107.9 | 140.1 | 134.2 | 146.1 | 123.9 | 156.5 | 104.6 | 134.5 | 129.8 | 140.2 | 120.0 | 150.2 | 101.1 |
|                                | 90                | 151.4               | 147.1 | 156.4 | 139.2 | 164.7 | 124.6 | 145.9 | 142.7 | 150.7 | 135.1 | 158.6 | 120.9 | 140.3 | 138.1 | 144.7 | 130.9 | 152.3 | 117.1 |
| 4800                           | 75                | 139.7               | 120.6 | 151.0 | 97.0  | 160.9 | 55.5  | 134.2 | 116.8 | 145.1 | 93.8  | 159.7 | 53.0  | 128.5 | 112.9 | 138.9 | 90.4  | 153.1 | 50.2  |
|                                | 80                | 144.6               | 134.4 | 152.4 | 118.5 | 163.5 | 89.9  | 139.1 | 130.2 | 146.5 | 114.8 | 159.8 | 86.8  | 133.4 | 125.9 | 140.4 | 111.0 | 153.2 | 83.5  |
|                                | 85                | 150.4               | 145.3 | 156.1 | 134.0 | 166.1 | 113.7 | 144.9 | 140.8 | 150.2 | 130.0 | 159.8 | 110.2 | 139.1 | 136.3 | 144.1 | 125.9 | 153.3 | 106.5 |
|                                | 90                | 156.7               | 154.4 | 161.2 | 146.0 | 168.7 | 130.9 | 151.1 | 149.8 | 155.2 | 141.7 | 162.5 | 127.0 | 145.2 | 145.0 | 149.1 | 137.3 | 156.0 | 123.0 |
| 5400                           | 75                | 142.9               | 125.6 | 153.3 | 101.2 | 167.5 | 59.0  | 137.3 | 121.6 | 147.1 | 97.8  | 160.8 | 56.2  | 131.4 | 117.4 | 140.7 | 94.2  | 154.0 | 53.2  |
|                                | 80                | 148.4               | 139.9 | 155.4 | 123.4 | 168.2 | 94.2  | 142.7 | 135.6 | 149.3 | 119.6 | 161.6 | 90.9  | 136.8 | 131.1 | 143.0 | 115.6 | 154.8 | 87.4  |
|                                | 85                | 154.7               | 151.3 | 159.7 | 139.6 | 168.8 | 118.6 | 148.9 | 146.7 | 153.6 | 135.4 | 162.4 | 114.9 | 143.0 | 141.9 | 147.3 | 131.0 | 155.6 | 111.0 |
|                                | 90                | 161.3               | 160.9 | 165.1 | 152.1 | 172.0 | 136.5 | 155.5 | 155.5 | 159.0 | 147.6 | 165.6 | 132.4 | 149.4 | 149.4 | 152.6 | 142.9 | 158.8 | 128.2 |
| 6000                           | 75                | 145.4               | 129.7 | 154.8 | 104.7 | 168.0 | 61.6  | 139.5 | 125.5 | 148.4 | 101.0 | 161.2 | 58.6  | 133.4 | 121.1 | 141.8 | 97.3  | 154.1 | 55.5  |
|                                | 80                | 151.4               | 144.7 | 157.6 | 127.6 | 169.4 | 97.6  | 145.5 | 140.1 | 151.3 | 123.5 | 162.6 | 94.1  | 139.4 | 135.4 | 144.8 | 119.3 | 155.6 | 90.5  |
|                                | 85                | 158.1               | 156.6 | 162.4 | 144.3 | 170.8 | 122.8 | 152.2 | 151.7 | 156.1 | 139.9 | 164.1 | 118.9 | 146.0 | 146.0 | 149.6 | 135.4 | 157.2 | 114.8 |
|                                | 90                | 165.1               | 165.1 | 168.4 | 157.3 | 174.6 | 141.2 | 159.1 | 159.1 | 162.0 | 152.6 | 167.9 | 137.0 | 152.8 | 152.8 | 155.4 | 147.8 | 161.0 | 132.5 |
| 6600                           | 75                | 147.1               | 133.1 | 155.5 | 107.3 | 168.5 | 63.4  | 141.0 | 128.7 | 148.9 | 103.5 | 161.5 | 60.3  | 134.7 | 124.1 | 142.1 | 99.5  | 154.2 | 56.9  |
|                                | 80                | 153.6               | 148.6 | 159.0 | 130.9 | 169.9 | 100.3 | 147.6 | 143.9 | 152.5 | 126.7 | 162.9 | 96.6  | 141.3 | 138.9 | 145.8 | 122.2 | 155.7 | 92.7  |
|                                | 85                | 160.8               | 160.8 | 164.4 | 148.3 | 172.0 | 126.2 | 154.7 | 154.7 | 157.9 | 143.7 | 165.1 | 122.0 | 148.3 | 148.3 | 151.2 | 138.9 | 158.0 | 117.7 |
|                                | 90                | 168.2               | 168.2 | 170.8 | 161.8 | 176.3 | 145.2 | 161.9 | 161.9 | 164.2 | 156.9 | 169.4 | 140.7 | 155.5 | 155.5 | 157.5 | 151.8 | 162.3 | 136.1 |
| 7200                           | 75                | 148.0               | 135.6 | 156.1 | 109.2 | 169.1 | 64.5  | 141.7 | 131.0 | 149.4 | 105.1 | 161.8 | 61.1  | 135.2 | 126.2 | 142.4 | 100.9 | 154.4 | 57.5  |
|                                | 80                | 155.1               | 151.8 | 159.6 | 133.5 | 170.3 | 102.2 | 148.8 | 146.8 | 152.9 | 129.0 | 163.2 | 98.3  | 142.3 | 141.7 | 146.0 | 124.4 | 155.8 | 94.2  |
|                                | 85                | 162.7               | 162.7 | 165.6 | 151.4 | 172.4 | 128.8 | 156.4 | 156.4 | 158.9 | 146.6 | 165.3 | 124.4 | 149.8 | 149.8 | 152.0 | 141.6 | 158.7 | 119.9 |
|                                | 90                | 170.4               | 170.4 | 172.4 | 165.4 | 177.3 | 148.4 | 164.0 | 164.0 | 165.7 | 160.4 | 170.2 | 143.7 | 157.3 | 157.3 | 158.7 | 155.1 | 162.8 | 138.8 |

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat formula, refer to appropriate airflow table notes.
  - MBh = Total Gross Capacity
  - SHC = Sensible Heat Capacity
  - \*Indicates both downflow and horizontal units.
- (a) For 3000, 3600, and 4200 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Dehumidification (Hot Gas Reheat) with Froststat and Crankcage heaters are required on applications below 320 cfm/ton.
  - Multi-speed or single zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

Performance Data

**Table 25. Gross cooling capacities 15 tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD180G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3000                           | 75                | 149.8               | 108.9 | 167.7 | 71.3  | 190.8 | 66.8  | 141.5 | 104.7 | 158.6 | 68.7  | 180.8 | 63.3  | 132.6 | 99.7  | 148.8 | 65.2  | 170.1 | 59.5  |
|                                | 80                | 151.5               | 129.2 | 166.7 | 101.1 | 187.0 | 65.5  | 143.4 | 124.3 | 157.7 | 97.7  | 177.1 | 62.0  | 134.7 | 118.5 | 148.1 | 93.4  | 166.7 | 58.3  |
|                                | 85                | 154.6               | 144.8 | 167.0 | 126.0 | 184.5 | 89.1  | 146.7 | 139.2 | 158.2 | 121.9 | 174.9 | 86.5  | 138.1 | 132.6 | 148.8 | 116.9 | 164.6 | 83.0  |
|                                | 90                | 159.1               | 155.7 | 168.7 | 146.3 | 183.5 | 118.7 | 151.3 | 149.2 | 160.1 | 141.4 | 174.0 | 115.3 | 143.0 | 141.9 | 150.9 | 135.6 | 163.9 | 111.1 |
| 3900                           | 75                | 160.4               | 120.9 | 176.9 | 82.0  | 198.6 | 69.5  | 151.6 | 116.3 | 167.3 | 79.0  | 188.1 | 65.8  | 142.3 | 110.9 | 157.1 | 75.1  | 177.0 | 61.9  |
|                                | 80                | 163.1               | 142.6 | 176.9 | 113.1 | 195.8 | 68.5  | 154.6 | 137.2 | 167.5 | 109.3 | 185.5 | 64.9  | 145.4 | 131.0 | 157.4 | 104.6 | 174.5 | 61.1  |
|                                | 85                | 167.2               | 159.5 | 178.2 | 139.4 | 194.4 | 101.1 | 158.8 | 153.4 | 169.0 | 134.8 | 184.2 | 98.1  | 149.8 | 146.4 | 159.1 | 129.4 | 173.5 | 94.2  |
|                                | 90                | 172.7               | 171.6 | 180.9 | 160.9 | 194.3 | 132.0 | 164.5 | 164.5 | 171.9 | 155.6 | 184.3 | 128.2 | 155.7 | 155.7 | 162.2 | 149.4 | 173.8 | 123.5 |
| 4800                           | 75                | 169.3               | 131.7 | 184.4 | 91.5  | 204.6 | 71.6  | 160.0 | 126.7 | 174.3 | 88.0  | 193.7 | 67.8  | 150.2 | 120.8 | 163.6 | 83.7  | 182.1 | 63.7  |
|                                | 80                | 173.0               | 154.7 | 185.4 | 123.8 | 202.8 | 74.8  | 164.0 | 148.9 | 175.5 | 119.6 | 192.1 | 72.1  | 154.3 | 142.3 | 164.9 | 114.5 | 180.7 | 68.6  |
|                                | 85                | 178.1               | 172.9 | 187.7 | 151.4 | 202.4 | 111.8 | 169.3 | 166.4 | 178.0 | 146.5 | 191.8 | 108.4 | 159.8 | 159.0 | 167.7 | 140.6 | 180.6 | 104.0 |
|                                | 90                | 184.6               | 184.6 | 191.4 | 174.3 | 203.4 | 144.0 | 176.0 | 176.0 | 181.9 | 168.5 | 192.9 | 139.8 | 166.7 | 166.7 | 171.7 | 161.9 | 181.9 | 134.7 |
| 5400                           | 75                | 174.2               | 138.2 | 188.4 | 97.1  | 207.7 | 72.7  | 164.7 | 132.9 | 178.0 | 93.4  | 196.4 | 68.7  | 154.6 | 126.8 | 167.0 | 88.8  | 184.5 | 64.6  |
|                                | 80                | 178.6               | 162.0 | 190.0 | 130.3 | 206.6 | 80.4  | 169.3 | 156.0 | 179.8 | 125.8 | 195.5 | 77.4  | 159.3 | 149.1 | 169.0 | 120.4 | 183.8 | 73.6  |
|                                | 85                | 184.4               | 181.1 | 193.1 | 158.8 | 206.8 | 118.2 | 175.3 | 174.3 | 183.0 | 153.5 | 195.9 | 114.5 | 165.5 | 165.5 | 172.4 | 147.4 | 184.4 | 109.9 |
|                                | 90                | 191.6               | 191.6 | 197.4 | 182.5 | 208.4 | 151.4 | 182.6 | 182.6 | 187.6 | 176.5 | 197.7 | 146.9 | 173.0 | 173.0 | 177.2 | 169.5 | 186.4 | 141.5 |
| 6000                           | 75                | 178.4               | 144.1 | 191.6 | 102.1 | 210.0 | 73.5  | 168.5 | 138.6 | 180.9 | 98.1  | 198.4 | 69.4  | 158.1 | 132.1 | 169.6 | 93.2  | 186.2 | 65.2  |
|                                | 80                | 183.5               | 168.8 | 193.9 | 136.2 | 209.5 | 85.4  | 173.8 | 162.5 | 183.4 | 131.4 | 198.1 | 82.2  | 163.6 | 155.3 | 172.3 | 125.8 | 186.1 | 78.1  |
|                                | 85                | 189.9               | 188.8 | 197.6 | 165.5 | 210.4 | 124.1 | 180.5 | 180.5 | 187.3 | 160.0 | 199.2 | 120.1 | 170.4 | 170.4 | 176.4 | 153.6 | 187.4 | 115.3 |
|                                | 90                | 197.8               | 197.8 | 202.7 | 190.1 | 212.7 | 158.1 | 188.5 | 188.5 | 192.6 | 183.8 | 201.7 | 153.4 | 178.6 | 178.6 | 181.8 | 176.6 | 190.1 | 147.7 |
| 6600                           | 75                | 181.8               | 149.5 | 194.1 | 106.6 | 211.5 | 74.0  | 171.6 | 143.7 | 183.0 | 102.3 | 199.6 | 69.9  | 160.9 | 137.0 | 171.4 | 97.1  | 187.1 | 65.5  |
|                                | 80                | 187.5               | 175.0 | 197.1 | 141.5 | 211.7 | 89.9  | 177.6 | 168.5 | 186.2 | 136.5 | 200.0 | 86.4  | 167.0 | 161.0 | 174.8 | 130.6 | 187.7 | 82.0  |
|                                | 85                | 194.7               | 194.7 | 201.4 | 171.8 | 213.3 | 129.5 | 184.9 | 184.9 | 190.8 | 166.0 | 201.8 | 125.2 | 174.5 | 174.5 | 179.5 | 159.2 | 189.7 | 120.0 |
|                                | 90                | 203.2               | 203.2 | 207.2 | 197.2 | 216.3 | 164.3 | 193.6 | 193.6 | 196.7 | 190.6 | 204.9 | 159.3 | 183.4 | 183.4 | 185.6 | 183.2 | 193.0 | 153.3 |
| 7200                           | 75                | 184.4               | 154.3 | 195.7 | 110.5 | 212.2 | 74.3  | 173.9 | 148.2 | 184.4 | 105.9 | 200.0 | 70.0  | 162.9 | 141.2 | 172.5 | 100.5 | 187.2 | 65.5  |
|                                | 80                | 190.8               | 180.7 | 199.4 | 146.3 | 213.1 | 93.8  | 180.6 | 173.9 | 188.3 | 141.0 | 201.1 | 90.0  | 169.7 | 166.1 | 176.5 | 134.8 | 188.5 | 85.3  |
|                                | 85                | 198.7               | 198.7 | 204.5 | 177.4 | 215.4 | 134.2 | 188.6 | 188.6 | 193.5 | 171.3 | 203.6 | 129.7 | 177.9 | 177.9 | 181.9 | 164.3 | 191.1 | 124.2 |
|                                | 90                | 207.8               | 207.8 | 210.9 | 203.8 | 219.0 | 170.0 | 198.0 | 198.0 | 200.1 | 196.9 | 207.4 | 164.6 | 188.7 | 188.7 | 188.7 | 188.7 | 195.1 | 158.4 |



## Performance Data

**Table 25. Gross cooling capacities 15 tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD180G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |                   |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       | 120   |       |       |                   |       |       | 125   |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | Entering Wet Bulb |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh               | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 3000                           | 75                | 123.1               | 93.8  | 138.4 | 60.9  | 158.9 | 55.6  | 118.1             | 90.5  | 133.0 | 58.3  | 153.0 | 53.5  | 112.9 | 87.0  | 127.4 | 55.6  | 147.0 | 51.4  |
|                                | 80                | 125.3               | 111.8 | 137.9 | 88.3  | 155.6 | 54.5  | 120.4             | 108.1 | 132.6 | 85.4  | 149.8 | 52.4  | 115.4 | 104.2 | 127.1 | 82.2  | 143.9 | 50.4  |
|                                | 85                | 129.0               | 125.1 | 138.8 | 111.0 | 153.7 | 78.6  | 124.2             | 121.1 | 133.5 | 107.7 | 148.0 | 76.1  | 119.2 | 116.8 | 128.1 | 104.1 | 142.2 | 73.3  |
|                                | 90                | 134.0               | 133.7 | 141.0 | 128.9 | 153.1 | 105.9 | 129.3             | 129.2 | 135.9 | 125.2 | 147.6 | 103.0 | 124.4 | 124.4 | 130.6 | 121.3 | 141.8 | 99.9  |
| 3900                           | 75                | 132.3               | 104.6 | 146.2 | 70.3  | 165.3 | 57.8  | 127.1             | 101.1 | 140.6 | 67.6  | 159.2 | 55.7  | 121.7 | 97.3  | 134.7 | 64.6  | 152.9 | 53.5  |
|                                | 80                | 135.6               | 123.9 | 146.7 | 99.0  | 163.0 | 57.1  | 130.5             | 120.0 | 141.2 | 95.9  | 157.0 | 54.9  | 125.2 | 115.9 | 135.4 | 92.6  | 150.8 | 52.8  |
|                                | 85                | 140.2               | 138.5 | 148.6 | 123.0 | 162.1 | 89.3  | 135.2             | 134.2 | 143.1 | 119.5 | 156.2 | 86.6  | 130.0 | 129.7 | 137.5 | 115.8 | 150.1 | 83.6  |
|                                | 90                | 146.3               | 146.3 | 151.9 | 142.3 | 162.6 | 118.0 | 141.3             | 141.3 | 146.5 | 138.4 | 156.8 | 114.8 | 136.2 | 136.2 | 140.9 | 134.2 | 150.8 | 111.5 |
| 4800                           | 75                | 139.8               | 114.1 | 152.3 | 78.5  | 169.9 | 59.5  | 134.3             | 110.4 | 146.4 | 75.5  | 163.6 | 57.3  | 128.7 | 106.4 | 140.4 | 72.4  | 157.1 | 55.0  |
|                                | 80                | 144.1               | 134.7 | 153.8 | 108.5 | 168.7 | 64.1  | 138.7             | 130.6 | 148.0 | 105.2 | 162.4 | 61.6  | 133.2 | 126.3 | 142.1 | 101.6 | 156.0 | 58.8  |
|                                | 85                | 149.8               | 149.8 | 156.7 | 133.8 | 168.8 | 98.8  | 144.5             | 144.5 | 151.0 | 130.1 | 162.6 | 95.9  | 139.1 | 139.1 | 145.1 | 126.2 | 156.4 | 92.7  |
|                                | 90                | 156.8               | 156.8 | 161.0 | 154.4 | 170.3 | 128.7 | 151.6             | 151.6 | 155.4 | 150.3 | 164.2 | 125.4 | 146.3 | 146.3 | 149.6 | 145.9 | 158.0 | 121.8 |
| 5400                           | 75                | 143.8               | 119.7 | 155.4 | 83.3  | 172.0 | 60.2  | 138.2             | 115.9 | 149.3 | 80.2  | 165.6 | 57.9  | 132.4 | 111.8 | 143.1 | 76.9  | 158.9 | 55.6  |
|                                | 80                | 148.8               | 141.3 | 157.6 | 114.2 | 171.5 | 68.9  | 143.3             | 137.0 | 151.6 | 110.7 | 165.1 | 66.2  | 137.6 | 132.6 | 145.5 | 107.0 | 158.5 | 63.3  |
|                                | 85                | 155.1               | 155.1 | 161.1 | 140.3 | 172.3 | 104.4 | 149.7             | 149.7 | 155.3 | 136.5 | 166.0 | 101.3 | 144.1 | 144.1 | 149.3 | 132.4 | 159.5 | 98.0  |
|                                | 90                | 162.8               | 162.8 | 166.1 | 161.7 | 174.4 | 135.2 | 157.5             | 157.5 | 160.3 | 157.5 | 168.2 | 131.7 | 152.9 | 152.0 | 154.4 | 153.0 | 161.9 | 128.0 |
| 6000                           | 75                | 147.1               | 124.8 | 157.7 | 87.5  | 173.4 | 60.7  | 141.3             | 120.8 | 151.5 | 84.2  | 166.8 | 58.4  | 135.4 | 116.6 | 145.1 | 80.8  | 160.0 | 56.0  |
|                                | 80                | 152.7               | 147.2 | 160.5 | 119.2 | 173.5 | 73.1  | 147.0             | 142.8 | 154.4 | 115.6 | 167.0 | 70.2  | 141.2 | 138.2 | 148.2 | 111.8 | 160.3 | 67.2  |
|                                | 85                | 159.7               | 159.7 | 164.8 | 146.3 | 175.0 | 109.5 | 154.2             | 154.2 | 158.8 | 142.3 | 168.5 | 106.2 | 148.4 | 148.4 | 152.6 | 138.0 | 161.9 | 102.8 |
|                                | 90                | 168.7               | 168.1 | 170.4 | 168.5 | 177.8 | 141.1 | 162.8             | 162.8 | 164.5 | 164.2 | 171.5 | 137.5 | 158.4 | 158.4 | 158.4 | 158.4 | 165.0 | 133.7 |
| 6600                           | 75                | 149.5               | 129.4 | 159.2 | 91.1  | 174.0 | 60.9  | 143.6             | 125.2 | 152.8 | 87.7  | 167.2 | 58.5  | 137.6 | 120.9 | 146.3 | 84.1  | 160.3 | 56.1  |
|                                | 80                | 155.9               | 152.6 | 162.7 | 123.7 | 174.8 | 76.7  | 150.0             | 148.1 | 156.5 | 120.0 | 168.1 | 73.7  | 144.1 | 143.4 | 150.1 | 116.0 | 161.2 | 70.5  |
|                                | 85                | 163.6               | 163.6 | 167.7 | 151.6 | 176.9 | 114.0 | 157.8             | 157.8 | 161.5 | 147.5 | 170.3 | 110.6 | 151.9 | 151.9 | 155.2 | 143.1 | 163.6 | 107.0 |
|                                | 90                | 174.0               | 174.0 | 174.0 | 174.0 | 180.4 | 146.5 | 167.9             | 167.9 | 167.9 | 167.9 | 173.9 | 142.7 | 161.7 | 161.7 | 161.7 | 161.7 | 167.3 | 138.8 |
| 7200                           | 75                | 151.2               | 133.3 | 159.9 | 94.2  | 173.8 | 60.8  | 145.2             | 129.0 | 153.4 | 90.7  | 166.9 | 58.4  | 138.9 | 124.6 | 146.8 | 86.9  | 159.8 | 55.9  |
|                                | 80                | 158.2               | 157.5 | 164.2 | 127.7 | 175.2 | 79.7  | 152.3             | 152.3 | 157.8 | 123.8 | 168.4 | 76.6  | 146.1 | 146.1 | 151.2 | 119.7 | 161.4 | 73.3  |
|                                | 85                | 166.6               | 166.6 | 169.8 | 156.5 | 178.1 | 117.9 | 160.7             | 160.7 | 163.5 | 152.2 | 171.3 | 114.4 | 154.7 | 154.7 | 157.0 | 147.7 | 164.4 | 110.7 |
|                                | 90                | 176.7               | 176.7 | 176.7 | 176.7 | 182.3 | 151.3 | 170.5             | 170.5 | 170.5 | 170.5 | 175.6 | 147.4 | 164.1 | 164.1 | 164.1 | 164.1 | 168.8 | 143.3 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
- (a) For 3000 and 3900 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Dehumidification (Hot Gas Reheat) with Froststat and Crankcage heaters are required on applications below 320 cfm/ton.
  - Multi-speed or single zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 26. Gross cooling capacities 17½ tons three phase high efficiency T/YH\*210G3,4,W (stage 1)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|-------------------|---------------------|------|------|------|------|------|------|------|------|------|------|------|
|                                |                   | 85                  |      |      |      |      |      | 95   |      |      |      |      |      |
|                                |                   | Entering Wet Bulb   |      |      |      |      |      |      |      |      |      |      |      |
|                                |                   | 61                  |      | 67   |      | 73   |      | 61   |      | 67   |      | 73   |      |
| MBh                            | SHC               | MBh                 | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  |      |      |
| 2800                           | 75                | 63.9                | 60.0 | 68.3 | 47.4 | 74.6 | 22.7 | 59.8 | 56.7 | 64.0 | 44.6 | 70.2 | 20.3 |
|                                | 80                | 67.5                | 66.8 | 70.0 | 59.7 | 75.7 | 44.0 | 63.4 | 63.4 | 65.8 | 56.6 | 71.3 | 41.4 |
|                                | 85                | 71.6                | 71.6 | 73.0 | 68.1 | 76.7 | 58.1 | 67.5 | 67.5 | 68.8 | 64.8 | 72.4 | 55.2 |
|                                | 90                | 75.8                | 75.8 | 76.7 | 74.3 | 79.2 | 67.9 | 71.7 | 71.7 | 72.5 | 70.9 | 74.8 | 64.8 |
| 3500                           | 75                | 65.8                | 63.2 | 69.7 | 50.8 | 75.5 | 26.3 | 61.5 | 59.7 | 65.2 | 47.7 | 70.8 | 23.7 |
|                                | 80                | 69.8                | 69.8 | 71.9 | 63.3 | 77.0 | 47.8 | 65.5 | 65.5 | 67.4 | 59.9 | 72.3 | 44.9 |
|                                | 85                | 74.1                | 74.1 | 75.2 | 71.9 | 78.4 | 62.1 | 69.8 | 69.8 | 70.8 | 68.3 | 73.8 | 58.9 |
|                                | 90                | 78.6                | 78.6 | 79.1 | 78.4 | 81.2 | 72.1 | 74.2 | 74.2 | 74.7 | 74.7 | 76.7 | 68.7 |
| 4200                           | 75                | 67.3                | 65.7 | 70.6 | 53.5 | 76.0 | 29.2 | 62.8 | 61.9 | 65.9 | 50.1 | 71.1 | 26.3 |
|                                | 80                | 71.6                | 71.6 | 73.2 | 66.2 | 77.8 | 50.9 | 67.0 | 67.0 | 68.5 | 62.5 | 73.0 | 47.7 |
|                                | 85                | 76.2                | 76.2 | 76.9 | 75.0 | 79.7 | 65.4 | 71.6 | 71.6 | 72.2 | 71.2 | 74.9 | 61.9 |
|                                | 90                | 80.9                | 80.9 | 81.1 | 81.1 | 82.8 | 75.6 | 76.3 | 76.3 | 76.4 | 76.4 | 78.0 | 71.9 |
| 4900                           | 75                | 68.4                | 67.6 | 71.1 | 55.5 | 76.8 | 31.5 | 63.6 | 63.5 | 66.2 | 51.9 | 71.5 | 28.2 |
|                                | 80                | 72.9                | 72.9 | 74.1 | 68.4 | 77.9 | 53.3 | 68.2 | 68.2 | 69.2 | 64.5 | 73.1 | 49.7 |
|                                | 85                | 77.8                | 77.8 | 78.1 | 77.4 | 80.5 | 67.9 | 73.0 | 73.0 | 73.2 | 73.2 | 75.5 | 64.1 |
|                                | 90                | 81.0                | 81.0 | 82.6 | 82.6 | 84.0 | 78.3 | 76.5 | 75.0 | 77.7 | 77.7 | 79.0 | 74.4 |
| 5600                           | 75                | 68.9                | 68.7 | 71.2 | 56.9 | 77.0 | 33.0 | 63.7 | 63.7 | 67.0 | 52.9 | 72.2 | 29.5 |
|                                | 80                | 73.9                | 73.9 | 74.6 | 69.9 | 78.2 | 55.0 | 68.9 | 68.9 | 69.5 | 65.7 | 73.9 | 51.1 |
|                                | 85                | 78.0                | 78.0 | 78.9 | 78.9 | 80.9 | 69.8 | 73.2 | 71.0 | 73.8 | 73.8 | 75.6 | 65.7 |
|                                | 90                | 82.1                | 82.1 | 83.7 | 83.7 | 84.7 | 80.4 | 77.0 | 77.0 | 78.6 | 78.6 | 79.4 | 76.1 |
| 6125                           | 75                | 69.1                | 69.1 | 71.6 | 57.4 | 77.4 | 33.7 | 63.9 | 63.9 | 68.0 | 53.2 | 73.0 | 30.0 |
|                                | 80                | 74.3                | 74.3 | 74.7 | 70.5 | 78.4 | 55.8 | 69.1 | 69.1 | 71.0 | 66.1 | 74.4 | 51.7 |
|                                | 85                | 78.6                | 78.6 | 79.3 | 79.3 | 81.8 | 70.7 | 73.5 | 73.5 | 74.0 | 74.0 | 77.0 | 66.4 |
|                                | 90                | 83.5                | 83.5 | 84.2 | 84.2 | 84.9 | 81.5 | 77.2 | 77.2 | 78.9 | 78.9 | 79.5 | 77.0 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2800, 3500, 4200, and 4900 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 27. Gross cooling capacities 17½ tons three phase high efficiency T/YH\*210G3,4,W (stage 2)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 2800                           | 75                | 123.5               | 100.2 | 134.4 | 80.1  | 147.8 | 44.0  | 117.3 | 96.3  | 127.4 | 77.0  | 139.9 | 41.8  |
|                                | 80                | 126.3               | 111.0 | 136.4 | 97.8  | 148.9 | 73.2  | 120.1 | 106.7 | 129.4 | 94.1  | 141.1 | 70.2  |
|                                | 85                | 130.4               | 119.4 | 138.3 | 110.3 | 150.0 | 92.9  | 124.2 | 114.7 | 131.3 | 106.1 | 142.3 | 89.4  |
|                                | 90                | 135.4               | 126.3 | 141.8 | 119.6 | 151.1 | 106.9 | 129.0 | 121.3 | 134.8 | 115.0 | 143.4 | 102.8 |
| 3500                           | 75                | 129.9               | 108.5 | 142.2 | 87.5  | 152.2 | 50.4  | 123.2 | 104.2 | 134.6 | 84.0  | 143.9 | 47.6  |
|                                | 80                | 133.3               | 120.2 | 142.4 | 106.1 | 154.0 | 80.6  | 126.7 | 115.4 | 135.0 | 102.0 | 145.8 | 77.2  |
|                                | 85                | 138.0               | 129.2 | 145.1 | 119.4 | 155.8 | 101.2 | 131.3 | 124.0 | 137.7 | 114.7 | 147.7 | 97.2  |
|                                | 90                | 143.5               | 136.7 | 149.2 | 129.3 | 157.7 | 115.9 | 136.7 | 131.2 | 141.7 | 124.3 | 149.6 | 111.4 |
| 4200                           | 75                | 135.1               | 115.8 | 146.3 | 93.8  | 160.5 | 55.6  | 128.0 | 111.0 | 138.3 | 89.8  | 151.6 | 52.4  |
|                                | 80                | 139.3               | 128.2 | 147.4 | 113.3 | 160.5 | 86.9  | 132.2 | 122.9 | 139.6 | 108.7 | 151.8 | 83.0  |
|                                | 85                | 144.5               | 137.8 | 150.7 | 127.3 | 160.6 | 108.4 | 137.4 | 132.2 | 142.9 | 122.2 | 152.0 | 103.9 |
|                                | 90                | 150.5               | 145.9 | 155.4 | 137.9 | 163.1 | 123.8 | 143.2 | 139.9 | 147.6 | 132.5 | 154.6 | 118.9 |
| 4900                           | 75                | 139.2               | 121.9 | 149.3 | 99.0  | 162.4 | 59.6  | 131.7 | 116.7 | 140.9 | 94.5  | 153.0 | 56.0  |
|                                | 80                | 144.1               | 135.1 | 151.3 | 119.4 | 163.3 | 92.0  | 136.6 | 129.4 | 143.0 | 114.3 | 154.1 | 87.7  |
|                                | 85                | 149.9               | 145.4 | 155.3 | 134.1 | 164.2 | 114.4 | 142.4 | 139.3 | 147.1 | 128.6 | 155.2 | 109.5 |
|                                | 90                | 156.3               | 153.9 | 160.6 | 145.4 | 167.5 | 130.6 | 148.6 | 147.5 | 152.3 | 139.5 | 158.5 | 125.3 |
| 5600                           | 75                | 142.3               | 126.9 | 151.2 | 103.0 | 163.2 | 62.6  | 134.3 | 121.2 | 142.3 | 98.1  | 153.4 | 58.5  |
|                                | 80                | 147.8               | 140.8 | 154.1 | 124.3 | 165.0 | 96.0  | 139.9 | 134.7 | 145.3 | 118.8 | 155.4 | 91.2  |
|                                | 85                | 154.2               | 151.7 | 158.8 | 139.8 | 166.8 | 119.3 | 146.3 | 145.2 | 150.1 | 133.8 | 157.4 | 114.0 |
|                                | 90                | 161.1               | 160.8 | 164.6 | 151.7 | 170.7 | 136.3 | 152.9 | 152.9 | 155.9 | 145.4 | 161.4 | 130.5 |
| 6125                           | 75                | 143.8               | 129.9 | 151.9 | 105.3 | 164.1 | 64.0  | 135.5 | 123.9 | 142.7 | 100.0 | 154.0 | 59.6  |
|                                | 80                | 149.9               | 144.4 | 155.4 | 127.3 | 165.5 | 98.3  | 141.7 | 137.9 | 146.4 | 121.4 | 155.6 | 93.2  |
|                                | 85                | 156.7               | 155.8 | 160.7 | 143.3 | 168.0 | 122.3 | 148.4 | 148.4 | 151.7 | 137.0 | 158.2 | 116.6 |
|                                | 90                | 163.9               | 163.9 | 167.0 | 155.7 | 172.5 | 139.8 | 155.4 | 155.4 | 157.9 | 149.0 | 162.8 | 133.6 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 2800, 3500, 4200, and 4900 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 28. Gross cooling capacities 17½ tons three phase high efficiency T/YH\*210G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3500                           | 75                | 178.2               | 140.1 | 193.8 | 111.1 | 207.3 | 60.7  | 169.5 | 134.8 | 186.6 | 107.2 | 204.8 | 58.4  | 159.9 | 128.9 | 174.5 | 102.7 | 183.6 | 55.5  |
|                                | 80                | 182.3               | 156.6 | 197.4 | 136.9 | 211.8 | 102.1 | 173.6 | 150.4 | 187.6 | 132.0 | 205.4 | 98.5  | 164.0 | 143.7 | 177.0 | 126.4 | 187.8 | 94.3  |
|                                | 85                | 188.5               | 169.5 | 200.2 | 155.6 | 217.6 | 130.7 | 179.6 | 162.7 | 190.4 | 149.7 | 206.7 | 126.0 | 169.9 | 155.2 | 179.7 | 143.3 | 195.0 | 120.8 |
|                                | 90                | 195.9               | 180.3 | 205.3 | 169.8 | 219.0 | 151.3 | 186.7 | 172.9 | 195.3 | 163.3 | 208.1 | 145.8 | 176.7 | 164.9 | 184.5 | 156.2 | 196.4 | 139.7 |
| 4200                           | 75                | 186.2               | 150.2 | 194.6 | 120.2 | 212.8 | 68.8  | 177.0 | 144.4 | 193.2 | 115.8 | 211.6 | 66.0  | 166.9 | 138.0 | 183.6 | 110.8 | 196.3 | 62.6  |
|                                | 80                | 191.0               | 167.4 | 205.2 | 147.0 | 223.4 | 111.3 | 181.8 | 160.8 | 194.9 | 141.5 | 212.2 | 107.2 | 171.7 | 153.5 | 183.7 | 135.5 | 198.7 | 102.5 |
|                                | 85                | 197.7               | 181.0 | 208.6 | 166.4 | 225.1 | 140.8 | 188.3 | 173.7 | 198.3 | 160.1 | 213.7 | 135.6 | 178.1 | 165.7 | 187.1 | 153.2 | 201.5 | 129.9 |
|                                | 90                | 205.5               | 192.4 | 214.2 | 181.3 | 227.2 | 162.2 | 195.9 | 184.5 | 203.8 | 174.3 | 215.8 | 156.2 | 185.3 | 176.0 | 192.4 | 166.7 | 203.5 | 149.6 |
| 4900                           | 75                | 193.4               | 159.4 | 211.5 | 128.5 | 229.7 | 76.0  | 183.6 | 153.0 | 200.5 | 123.6 | 217.5 | 72.7  | 173.0 | 146.1 | 188.6 | 118.0 | 204.6 | 68.8  |
|                                | 80                | 198.8               | 177.4 | 212.0 | 156.2 | 230.6 | 119.6 | 189.1 | 170.2 | 201.2 | 150.2 | 218.2 | 114.9 | 178.5 | 162.4 | 189.5 | 143.6 | 205.4 | 109.7 |
|                                | 85                | 206.0               | 191.6 | 216.1 | 176.3 | 231.7 | 150.0 | 196.1 | 183.7 | 205.2 | 169.5 | 219.8 | 144.3 | 185.4 | 175.3 | 193.6 | 162.1 | 207.0 | 138.0 |
|                                | 90                | 214.3               | 203.5 | 222.3 | 191.9 | 234.4 | 172.2 | 204.1 | 195.1 | 211.3 | 184.4 | 222.5 | 165.6 | 193.0 | 186.1 | 199.4 | 176.3 | 209.8 | 158.5 |
| 5600                           | 75                | 199.6               | 167.6 | 216.7 | 135.8 | 236.2 | 82.3  | 189.4 | 160.8 | 205.1 | 130.4 | 223.6 | 78.5  | 178.3 | 153.3 | 192.7 | 124.3 | 206.4 | 74.0  |
|                                | 80                | 205.7               | 186.4 | 218.0 | 164.4 | 237.1 | 126.9 | 195.5 | 178.7 | 206.6 | 157.9 | 224.2 | 121.8 | 184.4 | 170.4 | 194.4 | 150.8 | 211.7 | 116.0 |
|                                | 85                | 213.5               | 201.3 | 222.7 | 185.3 | 237.4 | 158.2 | 203.1 | 192.9 | 211.4 | 178.0 | 225.0 | 152.0 | 191.8 | 183.9 | 199.1 | 170.0 | 211.7 | 145.2 |
|                                | 90                | 222.1               | 213.8 | 229.4 | 201.6 | 240.8 | 181.2 | 211.4 | 204.9 | 217.9 | 193.6 | 228.4 | 174.2 | 199.8 | 195.3 | 205.5 | 184.9 | 215.1 | 166.5 |
| 6300                           | 75                | 205.0               | 174.9 | 220.9 | 142.2 | 240.8 | 87.7  | 194.2 | 167.6 | 208.8 | 136.2 | 227.7 | 83.3  | 182.6 | 159.6 | 195.9 | 129.7 | 208.9 | 78.4  |
|                                | 80                | 211.7               | 194.5 | 223.1 | 171.7 | 241.7 | 133.3 | 201.0 | 186.3 | 211.2 | 164.7 | 228.6 | 127.7 | 189.4 | 177.4 | 198.5 | 157.1 | 214.6 | 121.4 |
|                                | 85                | 220.0               | 210.0 | 228.4 | 193.4 | 242.2 | 165.6 | 209.1 | 201.1 | 216.6 | 185.6 | 229.3 | 158.8 | 197.3 | 191.6 | 203.8 | 177.1 | 215.5 | 151.5 |
|                                | 90                | 229.1               | 223.1 | 235.7 | 210.4 | 246.2 | 189.3 | 217.8 | 213.7 | 223.6 | 201.8 | 233.3 | 181.8 | 205.7 | 203.6 | 210.8 | 192.6 | 219.5 | 173.6 |
| 7000                           | 75                | 209.4               | 181.3 | 224.2 | 147.7 | 243.2 | 92.1  | 198.2 | 173.4 | 211.7 | 141.2 | 230.3 | 87.2  | 186.0 | 165.0 | 198.2 | 134.1 | 210.2 | 81.8  |
|                                | 80                | 216.9               | 201.6 | 227.2 | 178.1 | 244.8 | 138.8 | 205.6 | 192.9 | 214.8 | 170.5 | 231.2 | 132.7 | 193.4 | 183.6 | 201.6 | 162.4 | 216.7 | 125.9 |
|                                | 85                | 225.6               | 217.8 | 233.3 | 200.6 | 246.1 | 172.0 | 214.2 | 208.4 | 220.9 | 192.2 | 232.7 | 164.7 | 201.9 | 198.4 | 207.6 | 183.2 | 218.4 | 156.9 |
|                                | 90                | 235.1               | 231.5 | 241.0 | 218.2 | 250.8 | 196.5 | 223.4 | 221.5 | 228.5 | 209.1 | 237.4 | 188.4 | 210.8 | 210.8 | 215.1 | 199.4 | 223.1 | 179.7 |
| 7700                           | 75                | 213.0               | 186.8 | 226.7 | 152.2 | 245.6 | 95.6  | 201.2 | 178.4 | 213.6 | 145.2 | 231.9 | 90.2  | 188.6 | 169.4 | 199.6 | 137.6 | 210.6 | 84.2  |
|                                | 80                | 221.1               | 207.9 | 230.5 | 183.5 | 247.0 | 143.4 | 209.3 | 198.6 | 217.6 | 175.5 | 232.8 | 136.7 | 196.6 | 188.8 | 203.8 | 166.8 | 217.9 | 129.4 |
|                                | 85                | 230.4               | 224.7 | 237.2 | 206.8 | 249.1 | 177.5 | 218.4 | 214.8 | 224.3 | 197.9 | 235.2 | 169.7 | 205.6 | 204.3 | 210.5 | 188.4 | 220.4 | 161.4 |
|                                | 90                | 240.3               | 238.9 | 245.5 | 225.1 | 254.5 | 202.8 | 228.0 | 228.0 | 232.4 | 215.5 | 240.5 | 194.2 | 214.9 | 214.9 | 218.5 | 205.3 | 225.7 | 185.0 |
| 8400                           | 75                | 215.7               | 191.3 | 228.2 | 155.8 | 246.8 | 98.2  | 203.4 | 182.4 | 214.6 | 148.3 | 232.7 | 92.3  | 190.2 | 172.9 | 200.2 | 140.2 | 220.4 | 85.8  |
|                                | 80                | 224.4               | 213.2 | 232.9 | 188.1 | 248.3 | 147.1 | 212.1 | 203.4 | 219.5 | 179.5 | 233.6 | 139.9 | 199.0 | 193.1 | 205.2 | 170.3 | 220.8 | 132.1 |
|                                | 85                | 234.2               | 230.7 | 240.2 | 212.1 | 251.3 | 182.0 | 221.8 | 220.3 | 226.8 | 202.7 | 236.8 | 173.8 | 208.4 | 208.4 | 212.6 | 192.7 | 221.5 | 164.9 |
|                                | 90                | 244.5               | 244.5 | 249.1 | 231.1 | 257.3 | 208.1 | 231.8 | 231.8 | 235.5 | 221.0 | 242.8 | 199.0 | 218.1 | 218.1 | 221.1 | 210.2 | 227.5 | 189.3 |



## Performance Data

**Table 28. Gross cooling capacities 17½ tons three phase high efficiency T/YH\*210G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3500                           | 75                | 149.5               | 122.4 | 158.0 | 97.6  | 172.5 | 52.1  | 144.0 | 119.0 | 155.8 | 94.8  | 165.9 | 50.1  | 138.2 | 115.3 | 148.3 | 91.9  | 160.8 | 48.0  |
|                                | 80                | 153.6               | 136.3 | 165.4 | 120.3 | 176.7 | 89.5  | 148.1 | 132.4 | 159.3 | 117.0 | 169.4 | 86.9  | 142.3 | 128.4 | 153.0 | 113.5 | 163.4 | 84.1  |
|                                | 85                | 159.3               | 147.2 | 168.2 | 136.3 | 182.4 | 114.9 | 153.7 | 143.0 | 162.1 | 132.6 | 175.8 | 111.8 | 147.8 | 138.6 | 155.8 | 128.7 | 169.0 | 108.4 |
|                                | 90                | 165.8               | 156.4 | 172.8 | 148.5 | 183.8 | 133.0 | 160.1 | 151.8 | 166.7 | 144.4 | 177.2 | 129.4 | 154.1 | 147.2 | 160.3 | 140.2 | 170.4 | 125.7 |
| 4200                           | 75                | 156.0               | 131.0 | 171.4 | 105.2 | 184.6 | 58.6  | 150.2 | 127.2 | 164.9 | 102.2 | 174.8 | 56.4  | 144.2 | 123.3 | 158.3 | 99.0  | 162.4 | 54.0  |
|                                | 80                | 160.8               | 145.6 | 171.6 | 128.8 | 186.8 | 97.2  | 155.0 | 141.5 | 165.3 | 125.2 | 175.3 | 94.3  | 149.0 | 137.2 | 158.7 | 121.5 | 168.6 | 91.2  |
|                                | 85                | 167.0               | 157.2 | 175.0 | 145.6 | 188.4 | 123.5 | 161.1 | 152.7 | 168.7 | 141.6 | 181.5 | 120.1 | 155.0 | 148.0 | 162.1 | 137.5 | 174.4 | 116.5 |
|                                | 90                | 173.9               | 166.9 | 180.2 | 158.5 | 190.4 | 142.3 | 167.9 | 162.1 | 173.8 | 154.1 | 183.6 | 138.5 | 161.6 | 157.2 | 167.1 | 149.6 | 176.5 | 134.5 |
| 4900                           | 75                | 161.6               | 138.6 | 175.9 | 111.9 | 190.2 | 64.3  | 155.5 | 134.6 | 169.2 | 108.6 | 180.7 | 61.8  | 149.3 | 130.4 | 162.3 | 105.2 | 175.1 | 59.2  |
|                                | 80                | 167.0               | 154.0 | 176.9 | 136.4 | 192.8 | 103.9 | 161.0 | 149.6 | 170.3 | 132.6 | 181.3 | 100.7 | 154.7 | 145.0 | 163.5 | 128.6 | 176.4 | 97.4  |
|                                | 85                | 173.7               | 166.2 | 181.0 | 154.0 | 193.4 | 131.1 | 167.6 | 161.4 | 174.4 | 149.8 | 186.3 | 127.4 | 161.3 | 156.5 | 167.6 | 145.3 | 178.9 | 123.6 |
|                                | 90                | 181.1               | 176.5 | 186.7 | 167.5 | 196.1 | 150.7 | 174.8 | 171.5 | 180.0 | 162.9 | 189.0 | 146.6 | 168.3 | 166.3 | 173.1 | 158.2 | 181.7 | 142.4 |
| 5600                           | 75                | 166.3               | 145.3 | 179.4 | 117.7 | 192.5 | 69.0  | 160.0 | 141.0 | 172.5 | 114.1 | 184.5 | 66.3  | 153.5 | 136.6 | 165.3 | 110.4 | 176.9 | 63.4  |
|                                | 80                | 172.4               | 161.5 | 181.4 | 143.1 | 197.4 | 109.7 | 166.1 | 156.8 | 174.5 | 139.0 | 189.9 | 106.3 | 159.6 | 152.0 | 167.4 | 134.8 | 182.2 | 102.7 |
|                                | 85                | 179.6               | 174.3 | 186.1 | 161.5 | 197.6 | 137.8 | 173.2 | 169.3 | 179.2 | 157.0 | 190.2 | 133.9 | 166.6 | 164.1 | 172.1 | 152.3 | 182.6 | 129.8 |
|                                | 90                | 187.4               | 185.2 | 192.3 | 175.7 | 201.0 | 158.2 | 180.9 | 179.9 | 185.4 | 170.8 | 193.6 | 153.9 | 174.1 | 174.1 | 178.2 | 165.8 | 186.0 | 149.3 |
| 6300                           | 75                | 170.1               | 151.0 | 182.1 | 122.5 | 194.1 | 72.8  | 163.6 | 146.5 | 174.9 | 118.7 | 185.6 | 69.8  | 156.8 | 141.9 | 167.5 | 114.8 | 178.3 | 66.7  |
|                                | 80                | 176.9               | 168.0 | 184.9 | 148.8 | 199.8 | 114.6 | 170.3 | 163.1 | 177.8 | 144.5 | 192.1 | 110.9 | 163.5 | 158.0 | 170.4 | 140.0 | 184.1 | 107.1 |
|                                | 85                | 184.6               | 181.5 | 190.2 | 168.0 | 200.8 | 143.6 | 178.0 | 176.2 | 183.1 | 163.2 | 193.2 | 139.4 | 171.1 | 170.8 | 175.8 | 158.3 | 185.3 | 135.1 |
|                                | 90                | 192.8               | 192.8 | 197.0 | 182.9 | 204.9 | 164.8 | 186.0 | 186.0 | 189.8 | 177.7 | 197.2 | 160.2 | 179.0 | 179.0 | 182.4 | 172.5 | 189.4 | 155.4 |
| 7000                           | 75                | 173.0               | 155.9 | 183.9 | 126.5 | 194.4 | 75.7  | 166.2 | 151.1 | 176.5 | 122.4 | 186.5 | 72.4  | 159.2 | 146.2 | 168.8 | 118.2 | 178.8 | 69.0  |
|                                | 80                | 180.4               | 173.6 | 187.5 | 153.7 | 201.3 | 118.5 | 173.6 | 168.4 | 180.1 | 149.1 | 193.3 | 114.6 | 166.6 | 163.1 | 172.5 | 144.3 | 185.1 | 110.5 |
|                                | 85                | 188.7               | 187.8 | 193.5 | 173.6 | 203.2 | 148.5 | 181.8 | 181.8 | 186.2 | 168.6 | 195.3 | 144.0 | 174.7 | 174.7 | 178.6 | 163.4 | 187.2 | 139.4 |
|                                | 90                | 197.3               | 197.3 | 200.8 | 189.1 | 207.9 | 170.4 | 190.2 | 190.2 | 193.4 | 183.8 | 200.0 | 165.5 | 183.0 | 183.0 | 185.7 | 178.2 | 191.9 | 160.5 |
| 7700                           | 75                | 175.1               | 159.8 | 184.8 | 129.4 | 195.2 | 77.6  | 168.0 | 154.8 | 177.1 | 125.1 | 187.2 | 74.1  | 160.7 | 149.6 | 169.2 | 120.7 | 179.2 | 70.5  |
|                                | 80                | 183.1               | 178.3 | 189.2 | 157.6 | 202.0 | 121.5 | 176.0 | 172.9 | 181.6 | 152.7 | 193.7 | 117.4 | 168.7 | 167.3 | 173.8 | 147.7 | 185.3 | 113.0 |
|                                | 85                | 191.9               | 191.9 | 195.9 | 178.3 | 204.7 | 152.4 | 184.8 | 184.8 | 188.3 | 173.0 | 196.5 | 147.7 | 177.4 | 177.4 | 180.4 | 167.6 | 188.1 | 142.8 |
|                                | 90                | 200.9               | 200.9 | 203.8 | 194.5 | 210.1 | 175.1 | 193.6 | 193.6 | 196.0 | 188.8 | 201.9 | 170.0 | 186.1 | 186.1 | 188.1 | 183.1 | 193.5 | 164.7 |
| 8400                           | 75                | 176.2               | 162.8 | 184.8 | 131.5 | 195.6 | 78.7  | 168.9 | 157.5 | 177.8 | 126.9 | 187.9 | 74.9  | 161.3 | 152.0 | 170.0 | 122.2 | 180.3 | 71.0  |
|                                | 80                | 184.9               | 182.1 | 190.1 | 160.6 | 202.4 | 123.6 | 177.6 | 176.4 | 182.2 | 155.4 | 194.3 | 119.2 | 170.0 | 170.0 | 174.1 | 150.2 | 184.4 | 114.6 |
|                                | 85                | 194.2               | 194.2 | 197.4 | 182.1 | 205.3 | 155.4 | 186.8 | 186.8 | 189.5 | 176.5 | 196.8 | 150.4 | 179.2 | 179.2 | 181.4 | 170.8 | 188.2 | 145.3 |
|                                | 90                | 203.6               | 203.6 | 205.8 | 198.9 | 211.3 | 178.9 | 196.1 | 196.1 | 197.8 | 193.0 | 202.9 | 173.5 | 188.3 | 188.3 | 189.6 | 187.0 | 194.2 | 168.0 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 3500, 4200, and 4900 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

Performance Data

**Table 29. Gross cooling capacities 17½ tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD210G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       | 95    |       |       |       |       | 105   |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 3500                           | 75                | 157.6               | 122.6 | 174.5 | 95.9  | 196.1 | 56.8  | 151.2 | 119.5 | 166.8 | 93.6  | 187.2 | 55.2  | 143.7 | 115.7 | 158.2 | 90.5  | 177.3 | 53.0  |
|                                | 80                | 160.6               | 140.5 | 174.2 | 120.6 | 192.5 | 88.1  | 154.0 | 136.7 | 166.5 | 117.6 | 183.6 | 85.9  | 146.5 | 132.2 | 157.8 | 113.8 | 173.6 | 83.0  |
|                                | 85                | 165.2               | 154.7 | 175.6 | 141.4 | 190.7 | 115.7 | 158.6 | 150.2 | 167.8 | 137.7 | 181.7 | 112.8 | 151.0 | 145.0 | 159.0 | 133.3 | 171.6 | 109.2 |
|                                | 90                | 171.5               | 165.0 | 178.7 | 158.5 | 190.5 | 139.5 | 164.8 | 159.9 | 170.8 | 154.1 | 181.4 | 135.9 | 157.2 | 154.0 | 161.9 | 149.1 | 171.3 | 131.6 |
| 4550                           | 75                | 167.1               | 138.7 | 182.4 | 110.5 | 202.3 | 69.8  | 160.1 | 134.8 | 174.2 | 107.4 | 192.8 | 67.5  | 152.2 | 130.2 | 164.9 | 103.5 | 182.4 | 64.4  |
|                                | 80                | 171.1               | 158.1 | 183.1 | 136.6 | 199.7 | 102.6 | 164.0 | 153.5 | 174.8 | 132.7 | 190.2 | 99.5  | 156.0 | 148.2 | 165.5 | 128.2 | 179.7 | 95.8  |
|                                | 85                | 176.7               | 173.6 | 185.5 | 158.8 | 198.9 | 131.5 | 169.6 | 168.3 | 177.1 | 154.3 | 189.3 | 127.8 | 161.4 | 161.4 | 167.7 | 149.1 | 178.7 | 123.4 |
|                                | 90                | 184.0               | 184.0 | 189.5 | 177.3 | 199.7 | 156.7 | 176.8 | 176.8 | 181.1 | 172.1 | 190.0 | 152.3 | 168.6 | 168.6 | 171.6 | 166.2 | 179.4 | 147.2 |
| 5600                           | 75                | 174.9               | 145.5 | 188.5 | 116.5 | 206.7 | 75.0  | 167.3 | 141.2 | 179.7 | 113.0 | 196.7 | 72.3  | 158.8 | 136.2 | 169.9 | 108.7 | 185.7 | 68.8  |
|                                | 80                | 179.8               | 165.5 | 190.1 | 143.2 | 205.1 | 108.5 | 172.2 | 160.6 | 181.3 | 139.0 | 195.1 | 105.0 | 163.6 | 154.9 | 171.5 | 134.1 | 184.0 | 100.9 |
|                                | 85                | 186.4               | 181.8 | 193.5 | 166.2 | 205.3 | 138.1 | 178.7 | 176.1 | 184.6 | 161.3 | 195.1 | 134.0 | 170.0 | 169.7 | 174.7 | 155.7 | 184.0 | 129.2 |
|                                | 90                | 194.7               | 194.2 | 198.5 | 185.3 | 207.0 | 164.0 | 186.9 | 186.9 | 189.5 | 179.8 | 196.8 | 159.2 | 178.1 | 178.1 | 179.6 | 173.5 | 185.7 | 153.7 |
| 6300                           | 75                | 179.1               | 151.4 | 191.5 | 121.6 | 208.6 | 79.4  | 171.1 | 146.7 | 182.4 | 117.7 | 198.3 | 76.2  | 162.2 | 141.3 | 172.3 | 113.1 | 187.0 | 72.4  |
|                                | 80                | 184.6               | 172.1 | 193.9 | 149.1 | 207.7 | 113.5 | 176.6 | 166.8 | 184.7 | 144.5 | 197.3 | 109.7 | 167.7 | 160.7 | 174.5 | 139.1 | 185.9 | 105.1 |
|                                | 85                | 191.9               | 189.1 | 197.9 | 172.7 | 208.5 | 143.9 | 183.8 | 183.0 | 188.6 | 167.4 | 198.0 | 139.3 | 174.8 | 174.8 | 178.3 | 161.4 | 186.5 | 134.1 |
|                                | 90                | 200.8               | 200.8 | 203.5 | 192.6 | 210.9 | 170.4 | 192.6 | 192.6 | 194.2 | 186.6 | 200.4 | 165.2 | 183.5 | 183.5 | 183.9 | 179.9 | 188.8 | 159.3 |
| 7000                           | 75                | 182.4               | 156.5 | 193.8 | 125.9 | 209.8 | 82.9  | 174.2 | 151.4 | 184.3 | 121.6 | 199.1 | 79.3  | 164.9 | 145.6 | 173.8 | 116.6 | 187.4 | 75.1  |
|                                | 80                | 188.6               | 177.9 | 196.8 | 154.0 | 209.5 | 117.7 | 180.3 | 172.1 | 187.2 | 149.0 | 198.8 | 113.5 | 171.0 | 165.6 | 176.7 | 143.3 | 187.0 | 108.5 |
|                                | 85                | 196.5               | 195.5 | 201.4 | 178.4 | 211.0 | 148.7 | 188.1 | 188.1 | 191.8 | 172.7 | 200.1 | 143.8 | 178.7 | 178.7 | 181.2 | 166.3 | 188.3 | 138.2 |
|                                | 90                | 206.1               | 206.1 | 207.7 | 198.9 | 214.1 | 176.0 | 197.6 | 197.6 | 198.0 | 192.5 | 203.1 | 170.4 | 185.5 | 185.5 | 187.3 | 185.5 | 191.2 | 164.1 |
| 7700                           | 75                | 185.0               | 160.6 | 195.3 | 129.3 | 210.2 | 85.5  | 176.4 | 155.2 | 185.4 | 124.6 | 199.1 | 81.5  | 166.7 | 149.0 | 174.6 | 119.2 | 187.0 | 76.9  |
|                                | 80                | 191.9               | 182.8 | 198.9 | 158.1 | 210.6 | 121.0 | 183.2 | 176.6 | 189.0 | 152.7 | 199.4 | 116.4 | 173.5 | 169.7 | 178.0 | 146.6 | 187.3 | 111.0 |
|                                | 85                | 200.4               | 200.4 | 204.2 | 183.1 | 212.6 | 152.7 | 191.6 | 191.6 | 194.2 | 177.1 | 201.4 | 147.4 | 181.9 | 181.9 | 183.2 | 170.3 | 189.2 | 141.4 |
|                                | 90                | 210.6               | 210.6 | 211.2 | 204.4 | 216.4 | 180.7 | 201.8 | 201.8 | 201.1 | 197.6 | 205.1 | 174.7 | 190.0 | 190.0 | 190.0 | 190.0 | 192.8 | 168.0 |
| 8400                           | 75                | 186.8               | 164.0 | 195.9 | 131.8 | 209.7 | 87.2  | 177.8 | 158.1 | 185.7 | 126.7 | 198.3 | 82.9  | 167.8 | 151.5 | 174.5 | 120.9 | 185.9 | 77.8  |
|                                | 80                | 194.3               | 186.8 | 200.2 | 161.3 | 210.8 | 123.5 | 185.2 | 180.2 | 189.9 | 155.6 | 199.3 | 118.4 | 175.2 | 172.9 | 178.6 | 149.0 | 186.8 | 112.7 |
|                                | 85                | 203.5               | 203.5 | 206.2 | 187.1 | 213.5 | 155.9 | 194.4 | 194.4 | 195.8 | 180.6 | 201.9 | 150.2 | 184.2 | 184.2 | 184.5 | 173.4 | 189.3 | 143.8 |
|                                | 90                | 214.4               | 214.4 | 213.8 | 209.0 | 217.9 | 184.5 | 201.3 | 201.3 | 203.4 | 201.8 | 206.2 | 178.1 | 191.9 | 191.9 | 191.9 | 191.9 | 193.6 | 171.1 |



## Performance Data

**Table 29. Gross cooling capacities 17½ tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD210G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       |       |       | 120   |       |       |       |       |       | 125   |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 3500                           | 75                | 135.3               | 111.1 | 148.5 | 86.8  | 166.4 | 50.0  | 130.7 | 108.6 | 143.3 | 84.7  | 160.6 | 48.2  | 125.9 | 105.9 | 137.9 | 82.4  | 154.5 | 46.3  |
|                                | 80                | 138.0               | 127.0 | 148.0 | 109.4 | 162.7 | 79.3  | 133.4 | 124.2 | 142.8 | 106.9 | 156.8 | 77.2  | 128.5 | 121.1 | 137.3 | 104.3 | 150.8 | 75.0  |
|                                | 85                | 142.4               | 139.2 | 149.2 | 128.2 | 160.6 | 104.8 | 137.8 | 136.0 | 143.9 | 125.4 | 154.8 | 102.4 | 132.9 | 132.6 | 138.4 | 122.4 | 148.6 | 99.8  |
|                                | 90                | 148.5               | 147.5 | 152.1 | 143.3 | 160.3 | 126.6 | 143.8 | 143.8 | 146.8 | 140.1 | 154.3 | 123.8 | 138.9 | 138.9 | 141.2 | 136.8 | 148.2 | 120.9 |
| 4550                           | 75                | 143.2               | 124.9 | 154.8 | 99.0  | 171.0 | 60.6  | 138.3 | 119.0 | 149.3 | 93.8  | 164.9 | 56.2  | 133.2 | 118.9 | 143.6 | 93.8  | 158.6 | 56.2  |
|                                | 80                | 146.9               | 142.2 | 155.2 | 123.0 | 168.2 | 91.3  | 142.0 | 135.6 | 149.7 | 117.2 | 162.1 | 86.3  | 136.9 | 135.5 | 144.0 | 117.1 | 155.8 | 86.2  |
|                                | 85                | 152.3               | 152.3 | 157.4 | 143.2 | 167.2 | 118.3 | 147.4 | 147.4 | 151.9 | 136.7 | 161.0 | 112.5 | 142.2 | 142.2 | 146.1 | 136.6 | 154.6 | 112.4 |
|                                | 90                | 159.6               | 159.6 | 161.2 | 159.6 | 167.8 | 141.4 | 154.4 | 154.4 | 155.7 | 152.4 | 161.6 | 134.9 | 149.8 | 149.8 | 149.8 | 149.8 | 155.1 | 134.9 |
| 5600                           | 75                | 149.3               | 130.5 | 159.2 | 103.8 | 173.8 | 64.6  | 144.2 | 127.4 | 153.5 | 101.1 | 167.4 | 62.3  | 138.8 | 124.1 | 147.5 | 98.2  | 160.8 | 59.8  |
|                                | 80                | 154.0               | 148.5 | 160.7 | 128.5 | 172.0 | 96.1  | 148.8 | 145.0 | 154.9 | 125.4 | 165.6 | 93.4  | 143.4 | 141.4 | 148.9 | 122.2 | 159.0 | 90.5  |
|                                | 85                | 160.4               | 160.4 | 163.8 | 149.4 | 171.9 | 123.7 | 155.2 | 155.2 | 158.0 | 146.0 | 165.5 | 120.6 | 149.7 | 149.7 | 151.9 | 142.4 | 158.8 | 117.4 |
|                                | 90                | 168.4               | 168.4 | 168.6 | 166.5 | 173.5 | 147.5 | 162.8 | 162.8 | 162.8 | 162.8 | 167.0 | 144.1 | 156.7 | 156.7 | 156.7 | 156.7 | 160.3 | 140.6 |
| 6300                           | 75                | 152.4               | 135.2 | 161.2 | 107.7 | 174.6 | 67.8  | 147.0 | 131.9 | 155.2 | 104.8 | 168.1 | 65.3  | 141.5 | 128.4 | 149.1 | 101.7 | 161.3 | 62.5  |
|                                | 80                | 157.7               | 153.9 | 163.3 | 133.1 | 173.5 | 99.9  | 152.4 | 150.2 | 157.3 | 129.9 | 166.9 | 97.0  | 146.8 | 146.4 | 151.1 | 126.4 | 160.1 | 94.0  |
|                                | 85                | 164.7               | 164.7 | 167.1 | 154.7 | 174.1 | 128.2 | 159.4 | 159.4 | 161.1 | 151.1 | 167.5 | 125.0 | 153.7 | 153.7 | 154.8 | 147.3 | 160.6 | 121.6 |
|                                | 90                | 172.5               | 172.5 | 172.5 | 172.5 | 176.3 | 152.7 | 166.5 | 166.5 | 166.5 | 166.5 | 169.7 | 149.2 | 160.2 | 160.2 | 160.2 | 160.2 | 162.8 | 145.4 |
| 7000                           | 75                | 154.6               | 139.1 | 162.3 | 110.8 | 174.7 | 70.1  | 149.1 | 135.5 | 156.2 | 107.7 | 168.0 | 67.4  | 143.4 | 131.9 | 149.9 | 104.4 | 161.0 | 64.4  |
|                                | 80                | 160.6               | 158.4 | 165.1 | 136.9 | 174.2 | 102.9 | 155.1 | 154.6 | 159.0 | 133.4 | 167.5 | 99.8  | 149.3 | 149.3 | 152.6 | 129.8 | 160.5 | 96.6  |
|                                | 85                | 168.3               | 168.3 | 169.6 | 159.2 | 175.4 | 131.9 | 162.8 | 162.8 | 163.4 | 155.4 | 168.7 | 128.5 | 156.9 | 156.9 | 157.0 | 151.4 | 161.6 | 124.9 |
|                                | 90                | 175.7               | 175.7 | 175.7 | 175.7 | 178.3 | 157.1 | 169.4 | 169.4 | 169.4 | 169.4 | 171.5 | 153.3 | 163.0 | 163.0 | 163.0 | 163.0 | 164.4 | 149.4 |
| 7700                           | 75                | 156.1               | 142.0 | 162.7 | 113.0 | 174.0 | 71.5  | 150.5 | 138.3 | 156.4 | 109.7 | 167.1 | 68.6  | 144.5 | 134.4 | 149.9 | 106.2 | 159.9 | 65.5  |
|                                | 80                | 162.8               | 162.1 | 166.1 | 139.8 | 174.2 | 105.0 | 157.1 | 157.1 | 159.8 | 136.1 | 167.2 | 101.7 | 151.1 | 151.1 | 153.3 | 132.3 | 160.0 | 98.3  |
|                                | 85                | 171.1               | 171.1 | 171.2 | 162.8 | 176.0 | 134.7 | 165.4 | 165.4 | 164.9 | 158.8 | 169.0 | 131.1 | 159.4 | 159.4 | 158.3 | 154.6 | 161.8 | 127.3 |
|                                | 90                | 178.0               | 178.0 | 178.0 | 178.0 | 179.5 | 160.6 | 171.6 | 171.6 | 171.6 | 171.6 | 172.5 | 156.7 | 165.0 | 165.0 | 165.0 | 165.0 | 165.3 | 152.5 |
| 8400                           | 75                | 156.8               | 144.2 | 162.3 | 114.4 | 172.5 | 72.1  | 151.0 | 140.3 | 155.8 | 110.8 | 165.4 | 69.0  | 144.9 | 136.2 | 149.1 | 107.1 | 158.0 | 65.6  |
|                                | 80                | 164.1               | 164.1 | 166.4 | 141.8 | 173.3 | 106.3 | 158.2 | 158.2 | 159.9 | 138.0 | 166.2 | 102.8 | 152.1 | 152.1 | 153.1 | 133.9 | 158.8 | 99.1  |
|                                | 85                | 173.1               | 173.1 | 172.1 | 165.5 | 175.8 | 136.7 | 167.2 | 167.2 | 165.6 | 161.3 | 168.6 | 132.8 | 157.2 | 157.2 | 158.8 | 156.9 | 161.2 | 128.8 |
|                                | 90                | 179.5               | 179.5 | 179.5 | 179.5 | 180.0 | 163.3 | 173.0 | 173.0 | 173.0 | 173.0 | 172.8 | 159.1 | 166.1 | 166.1 | 166.1 | 166.1 | 165.3 | 154.8 |

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  - MBh = Total Gross Capacity
  - SHC = Sensible Heat Capacity
- (a) For 3500, and 4550 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 30. Gross cooling capacities 20 tons three phase high efficiency T/YH\*240G3,4,W (stage 1)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|-------------------|---------------------|------|------|------|------|------|------|------|------|------|------|------|
|                                |                   | 85                  |      |      |      |      |      | 95   |      |      |      |      |      |
|                                |                   | Entering Wet Bulb   |      |      |      |      |      |      |      |      |      |      |      |
|                                |                   | 61                  |      | 67   |      | 73   |      | 61   |      | 67   |      | 73   |      |
| MBh                            | SHC               | MBh                 | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  | MBh  | SHC  |      |      |
| 3200                           | 75                | 71.7                | 67.2 | 76.0 | 52.7 | 82.4 | 24.7 | 66.8 | 63.4 | 70.9 | 49.4 | 77.0 | 21.9 |
|                                | 80                | 76.1                | 75.4 | 78.6 | 67.1 | 84.3 | 49.4 | 71.3 | 71.3 | 73.5 | 63.4 | 78.9 | 46.1 |
|                                | 85                | 81.1                | 81.1 | 82.5 | 77.1 | 86.2 | 65.8 | 76.3 | 76.3 | 77.4 | 73.1 | 80.9 | 62.2 |
|                                | 90                | 86.3                | 86.3 | 87.1 | 84.6 | 89.5 | 77.4 | 81.4 | 81.4 | 82.0 | 80.5 | 84.3 | 73.6 |
| 4000                           | 75                | 73.6                | 70.6 | 77.4 | 56.5 | 83.2 | 28.8 | 68.4 | 66.4 | 71.9 | 52.7 | 79.9 | 25.6 |
|                                | 80                | 78.5                | 78.5 | 80.4 | 71.0 | 85.6 | 53.6 | 73.3 | 73.3 | 75.0 | 66.9 | 79.9 | 50.0 |
|                                | 85                | 83.8                | 83.8 | 84.8 | 81.2 | 88.0 | 70.2 | 78.6 | 78.6 | 79.4 | 76.9 | 82.3 | 66.3 |
|                                | 90                | 89.3                | 89.3 | 89.8 | 89.1 | 91.8 | 82.0 | 84.1 | 84.1 | 84.4 | 84.4 | 86.2 | 77.9 |
| 4800                           | 75                | 75.0                | 73.3 | 78.2 | 59.4 | 85.9 | 32.1 | 69.5 | 68.6 | 72.5 | 55.2 | 80.0 | 28.5 |
|                                | 80                | 80.3                | 80.3 | 81.8 | 74.2 | 86.4 | 57.1 | 74.8 | 74.8 | 76.1 | 69.7 | 80.4 | 53.0 |
|                                | 85                | 86.0                | 86.0 | 86.6 | 84.7 | 89.3 | 73.9 | 80.5 | 80.5 | 80.9 | 79.9 | 83.4 | 69.6 |
|                                | 90                | 91.8                | 91.8 | 91.9 | 91.9 | 93.6 | 86.0 | 85.0 | 85.0 | 86.2 | 86.2 | 87.6 | 81.4 |
| 5600                           | 75                | 76.0                | 75.2 | 78.6 | 61.6 | 86.0 | 34.7 | 70.2 | 70.1 | 72.5 | 57.1 | 80.2 | 30.7 |
|                                | 80                | 81.7                | 81.7 | 82.7 | 76.6 | 86.8 | 59.8 | 75.9 | 75.9 | 76.7 | 71.7 | 80.5 | 55.4 |
|                                | 85                | 87.8                | 87.8 | 87.9 | 87.3 | 90.2 | 76.8 | 81.0 | 81.0 | 81.9 | 81.9 | 83.9 | 72.1 |
|                                | 90                | 92.0                | 92.0 | 93.6 | 93.6 | 94.9 | 89.2 | 87.0 | 88.0 | 87.6 | 87.6 | 88.6 | 84.2 |
| 6400                           | 75                | 76.5                | 76.3 | 79.0 | 63.1 | 87.0 | 36.5 | 70.3 | 70.3 | 73.0 | 58.1 | 81.0 | 32.1 |
|                                | 80                | 82.6                | 82.6 | 83.2 | 78.3 | 88.0 | 61.8 | 76.5 | 76.5 | 76.8 | 73.0 | 82.5 | 56.9 |
|                                | 85                | 88.2                | 88.2 | 88.8 | 88.8 | 90.6 | 79.0 | 82.0 | 82.0 | 82.4 | 82.4 | 84.0 | 73.9 |
|                                | 90                | 93.5                | 93.5 | 94.8 | 94.8 | 95.7 | 91.6 | 88.2 | 88.2 | 88.5 | 88.5 | 89.1 | 86.2 |
| 7000                           | 75                | 76.5                | 76.5 | 81.0 | 63.7 | 88.0 | 37.4 | 70.2 | 70.2 | 75.0 | 58.4 | 82.0 | 32.7 |
|                                | 80                | 83.0                | 83.0 | 83.2 | 79.0 | 91.0 | 62.7 | 76.6 | 76.6 | 78.0 | 73.4 | 84.0 | 57.6 |
|                                | 85                | 89.0                | 89.0 | 89.1 | 89.1 | 94.0 | 80.1 | 82.2 | 82.2 | 82.5 | 82.5 | 86.0 | 74.7 |
|                                | 90                | 95.0                | 95.0 | 95.4 | 95.4 | 96.0 | 92.9 | 88.4 | 89.0 | 88.8 | 88.8 | 89.1 | 87.3 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 3200, 4000, 4800, and 5600 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 31. Gross cooling capacities 20 tons three phase high efficiency T/YH\*240G3,4,W (stage 2)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 3200                           | 75                | 147.4               | 116.5 | 161.9 | 94.0  | 179.6 | 54.5  | 139.3 | 111.3 | 153.0 | 89.7  | 169.9 | 51.2  |
|                                | 80                | 150.8               | 130.2 | 164.3 | 114.7 | 181.0 | 87.0  | 142.8 | 124.5 | 155.5 | 109.7 | 171.4 | 82.9  |
|                                | 85                | 155.8               | 141.5 | 166.7 | 130.2 | 182.4 | 110.0 | 147.8 | 135.4 | 158.0 | 124.7 | 172.9 | 105.2 |
|                                | 90                | 161.9               | 151.4 | 170.9 | 142.5 | 183.7 | 127.2 | 153.7 | 144.9 | 162.2 | 136.6 | 174.4 | 121.9 |
| 4000                           | 75                | 155.6               | 127.1 | 171.7 | 103.0 | 185.5 | 61.7  | 147.0 | 121.3 | 162.1 | 98.1  | 175.3 | 57.9  |
|                                | 80                | 160.1               | 142.0 | 172.3 | 125.2 | 187.9 | 96.0  | 151.5 | 135.8 | 163.0 | 119.7 | 177.7 | 91.4  |
|                                | 85                | 165.9               | 154.4 | 175.7 | 141.9 | 190.2 | 120.5 | 157.3 | 147.7 | 166.4 | 135.9 | 180.2 | 115.2 |
|                                | 90                | 172.5               | 165.2 | 180.7 | 155.4 | 192.5 | 138.9 | 163.9 | 158.2 | 171.5 | 148.9 | 182.6 | 133.1 |
| 4800                           | 75                | 162.5               | 136.3 | 177.1 | 110.6 | 195.7 | 67.6  | 153.4 | 130.0 | 167.0 | 105.3 | 184.6 | 63.2  |
|                                | 80                | 167.9               | 152.5 | 178.9 | 134.3 | 196.1 | 103.6 | 158.8 | 145.7 | 169.0 | 128.3 | 185.3 | 98.5  |
|                                | 85                | 174.5               | 166.0 | 183.2 | 152.3 | 196.6 | 129.6 | 165.4 | 158.8 | 173.5 | 145.8 | 186.0 | 123.8 |
|                                | 90                | 181.8               | 177.7 | 189.1 | 166.9 | 199.9 | 149.3 | 172.6 | 170.2 | 179.3 | 159.9 | 189.4 | 143.0 |
| 5600                           | 75                | 168.0               | 144.2 | 181.2 | 116.9 | 198.4 | 72.1  | 158.3 | 137.4 | 170.5 | 111.0 | 186.8 | 67.2  |
|                                | 80                | 174.3               | 161.7 | 184.1 | 142.1 | 200.0 | 109.9 | 164.7 | 154.3 | 173.7 | 135.6 | 188.6 | 104.2 |
|                                | 85                | 181.7               | 176.2 | 189.4 | 161.4 | 201.6 | 137.4 | 172.0 | 168.4 | 179.1 | 154.3 | 190.5 | 131.1 |
|                                | 90                | 189.6               | 188.8 | 196.1 | 177.1 | 205.9 | 158.4 | 179.9 | 179.9 | 185.7 | 169.6 | 194.9 | 151.5 |
| 6400                           | 75                | 172.1               | 150.7 | 183.8 | 121.9 | 199.6 | 75.3  | 161.8 | 143.4 | 172.6 | 115.5 | 187.5 | 69.9  |
|                                | 80                | 179.3               | 169.5 | 187.9 | 148.6 | 202.4 | 114.9 | 169.2 | 161.6 | 177.0 | 141.5 | 190.5 | 108.7 |
|                                | 85                | 187.5               | 185.1 | 194.2 | 169.2 | 205.2 | 143.9 | 177.3 | 176.8 | 183.3 | 161.6 | 193.5 | 137.0 |
|                                | 90                | 196.0               | 196.0 | 201.6 | 185.9 | 210.4 | 166.2 | 185.8 | 185.8 | 190.7 | 177.9 | 198.9 | 158.8 |
| 7000                           | 75                | 174.2               | 154.7 | 184.8 | 124.8 | 199.6 | 76.8  | 163.5 | 147.0 | 173.2 | 117.9 | 190.8 | 71.0  |
|                                | 80                | 182.2               | 174.4 | 189.9 | 152.6 | 203.3 | 117.8 | 171.6 | 166.2 | 178.5 | 145.1 | 191.0 | 111.1 |
|                                | 85                | 190.9               | 190.8 | 196.8 | 174.1 | 207.0 | 147.9 | 180.3 | 180.3 | 185.5 | 166.1 | 194.9 | 140.6 |
|                                | 90                | 199.9               | 199.9 | 204.9 | 191.6 | 212.9 | 171.1 | 189.3 | 189.3 | 193.6 | 183.2 | 201.0 | 163.3 |

**Notes:**

- All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  - MBh = Total Gross Capacity
  - SHC = Sensible Heat Capacity
  - \*Indicates both downflow and horizontal units.
- (a) For 3200, 4000, 4800, and 5600 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 32. Gross cooling capacities 20 tons three phase high efficiency T/YH\*240G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       | 105   |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 4000                           | 75                | 204.7               | 159.8 | 224.3 | 126.6 | 248.0 | 69.4  | 194.8 | 153.5 | 213.3 | 121.7 | 235.9 | 66.2  | 184.1 | 146.6 | 201.4 | 116.3 | 223.0 | 62.4  |
|                                | 80                | 209.6               | 179.2 | 227.5 | 156.5 | 249.7 | 116.6 | 199.7 | 172.0 | 216.5 | 150.5 | 237.6 | 112.1 | 189.0 | 164.2 | 204.7 | 143.9 | 224.8 | 106.9 |
|                                | 85                | 217.0               | 194.6 | 230.8 | 178.3 | 251.4 | 149.6 | 206.9 | 186.7 | 219.8 | 171.4 | 239.4 | 143.9 | 195.9 | 178.1 | 208.0 | 163.9 | 226.5 | 137.7 |
|                                | 90                | 225.7               | 207.7 | 236.9 | 195.3 | 253.2 | 173.8 | 215.3 | 199.2 | 225.7 | 187.6 | 241.1 | 167.2 | 204.1 | 190.1 | 213.7 | 179.4 | 228.2 | 160.0 |
| 4800                           | 75                | 214.2               | 171.5 | 232.6 | 137.1 | 255.1 | 78.6  | 203.7 | 164.6 | 225.1 | 131.7 | 242.5 | 74.8  | 192.4 | 157.1 | 212.5 | 125.6 | 229.0 | 70.4  |
|                                | 80                | 220.0               | 191.9 | 236.7 | 168.2 | 257.7 | 127.2 | 209.5 | 184.0 | 225.1 | 161.6 | 245.1 | 122.0 | 198.1 | 175.6 | 212.7 | 154.4 | 231.6 | 116.3 |
|                                | 85                | 228.0               | 208.1 | 240.9 | 191.0 | 260.3 | 161.4 | 217.3 | 199.6 | 229.2 | 183.5 | 247.7 | 155.1 | 205.7 | 190.4 | 216.8 | 175.4 | 234.2 | 148.2 |
|                                | 90                | 237.3               | 221.9 | 247.6 | 208.8 | 262.9 | 186.5 | 226.3 | 212.8 | 235.9 | 200.6 | 250.2 | 179.3 | 214.5 | 203.1 | 223.2 | 191.7 | 236.7 | 171.5 |
| 5600                           | 75                | 222.7               | 182.1 | 243.9 | 146.6 | 261.2 | 86.7  | 211.5 | 174.6 | 231.5 | 140.5 | 248.0 | 82.3  | 199.6 | 166.5 | 218.3 | 133.9 | 233.9 | 77.4  |
|                                | 80                | 229.3               | 203.5 | 244.8 | 178.8 | 264.7 | 136.7 | 218.1 | 195.0 | 232.6 | 171.6 | 251.4 | 130.9 | 206.2 | 186.0 | 219.5 | 163.8 | 237.3 | 124.6 |
|                                | 85                | 237.9               | 220.6 | 249.8 | 202.6 | 268.1 | 172.0 | 226.6 | 211.4 | 229.2 | 183.5 | 254.8 | 165.1 | 214.5 | 201.7 | 224.5 | 185.8 | 240.7 | 157.6 |
|                                | 90                | 247.8               | 235.1 | 257.3 | 221.2 | 271.6 | 198.1 | 236.2 | 225.3 | 244.9 | 212.4 | 258.3 | 190.3 | 223.7 | 215.0 | 231.6 | 203.0 | 244.2 | 181.9 |
| 6400                           | 75                | 230.0               | 191.6 | 249.9 | 154.9 | 274.8 | 93.8  | 218.3 | 183.5 | 236.8 | 148.3 | 260.5 | 88.8  | 205.7 | 174.8 | 223.0 | 141.0 | 245.5 | 83.2  |
|                                | 80                | 237.5               | 214.0 | 251.8 | 188.3 | 274.8 | 145.1 | 225.7 | 204.9 | 239.0 | 180.5 | 260.7 | 138.7 | 213.1 | 195.3 | 225.3 | 172.1 | 245.9 | 131.8 |
|                                | 85                | 246.8               | 231.9 | 257.6 | 213.1 | 274.8 | 181.6 | 234.9 | 222.1 | 244.8 | 204.4 | 260.9 | 174.1 | 222.1 | 211.8 | 231.1 | 195.1 | 246.2 | 166.0 |
|                                | 90                | 257.2               | 247.1 | 265.8 | 232.6 | 279.1 | 208.6 | 245.0 | 236.8 | 252.8 | 223.1 | 265.2 | 200.2 | 231.9 | 225.9 | 239.0 | 213.1 | 250.5 | 191.2 |
| 7200                           | 75                | 236.2               | 200.1 | 254.7 | 162.2 | 278.3 | 99.8  | 223.9 | 191.4 | 241.1 | 155.0 | 263.4 | 94.2  | 210.7 | 182.0 | 226.6 | 147.1 | 247.8 | 88.0  |
|                                | 80                | 244.5               | 223.4 | 257.7 | 196.7 | 279.4 | 152.5 | 232.2 | 213.7 | 244.3 | 188.3 | 264.7 | 145.5 | 219.0 | 203.5 | 230.0 | 179.4 | 249.2 | 137.9 |
|                                | 85                | 254.6               | 242.2 | 264.4 | 222.5 | 280.4 | 190.0 | 242.0 | 231.8 | 250.9 | 213.2 | 265.9 | 181.9 | 228.7 | 220.8 | 236.7 | 203.3 | 250.6 | 173.3 |
|                                | 90                | 265.5               | 258.1 | 273.2 | 242.8 | 285.6 | 218.1 | 252.6 | 247.2 | 259.6 | 232.8 | 271.1 | 209.1 | 239.0 | 235.6 | 245.2 | 222.2 | 255.8 | 199.5 |
| 8000                           | 75                | 241.4               | 207.5 | 258.4 | 168.5 | 280.7 | 104.7 | 228.4 | 198.1 | 244.2 | 160.6 | 265.2 | 98.5  | 214.6 | 188.2 | 229.1 | 152.1 | 249.0 | 91.7  |
|                                | 80                | 250.5               | 231.7 | 262.5 | 204.1 | 282.8 | 158.7 | 237.6 | 221.5 | 248.5 | 195.1 | 267.5 | 151.1 | 223.8 | 210.7 | 233.6 | 185.5 | 251.4 | 143.0 |
|                                | 85                | 261.2               | 251.3 | 270.1 | 230.8 | 284.9 | 197.4 | 248.1 | 240.4 | 256.0 | 220.9 | 269.8 | 188.7 | 234.1 | 228.8 | 241.1 | 210.5 | 253.9 | 179.4 |
|                                | 90                | 272.7               | 268.0 | 279.6 | 252.0 | 291.0 | 226.5 | 259.2 | 256.5 | 265.4 | 241.4 | 275.8 | 216.9 | 245.0 | 244.3 | 250.3 | 230.2 | 259.9 | 206.7 |
| 8800                           | 75                | 245.4               | 213.8 | 261.1 | 173.6 | 282.0 | 108.5 | 231.9 | 203.8 | 246.2 | 165.1 | 265.9 | 101.7 | 217.5 | 193.3 | 230.6 | 156.1 | 249.1 | 94.3  |
|                                | 80                | 255.4               | 239.0 | 266.2 | 210.4 | 285.2 | 163.9 | 241.8 | 228.2 | 251.6 | 200.8 | 269.3 | 155.7 | 227.4 | 216.7 | 236.1 | 190.6 | 252.6 | 146.9 |
|                                | 85                | 266.8               | 259.4 | 274.6 | 238.1 | 288.4 | 203.8 | 253.0 | 247.9 | 259.9 | 227.6 | 272.6 | 194.4 | 238.5 | 235.7 | 244.4 | 216.5 | 256.1 | 184.6 |
|                                | 90                | 278.8               | 276.8 | 284.8 | 260.1 | 295.2 | 233.8 | 264.7 | 264.7 | 270.0 | 248.9 | 279.5 | 223.6 | 249.9 | 249.9 | 254.3 | 237.1 | 263.0 | 212.8 |
| 9600                           | 75                | 248.4               | 219.0 | 262.6 | 177.6 | 282.2 | 111.2 | 234.2 | 208.4 | 247.2 | 168.6 | 265.5 | 103.8 | 219.2 | 197.3 | 230.9 | 158.9 | 248.1 | 95.8  |
|                                | 80                | 259.2               | 245.2 | 268.8 | 215.6 | 286.4 | 168.0 | 245.0 | 233.7 | 253.6 | 205.4 | 270.0 | 159.2 | 230.0 | 221.7 | 237.5 | 194.6 | 252.6 | 149.8 |
|                                | 85                | 271.3               | 266.5 | 278.1 | 244.3 | 290.7 | 209.0 | 256.9 | 254.3 | 262.8 | 233.2 | 274.4 | 199.1 | 241.7 | 241.5 | 246.7 | 221.5 | 257.2 | 188.6 |
|                                | 90                | 283.8               | 283.8 | 289.0 | 267.2 | 298.4 | 240.0 | 269.1 | 269.1 | 273.5 | 255.3 | 282.1 | 229.2 | 253.7 | 253.7 | 257.3 | 242.9 | 264.9 | 217.8 |



## Performance Data

**Table 32. Gross cooling capacities 20 tons three phase high efficiency T/YH\*240G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |                   |       |       |       |       |       |                   |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       |       |       | 120               |       |       |       |       |       | 125               |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       | Entering Wet Bulb |       |       |       |       |       | Entering Wet Bulb |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61                |       | 67    |       | 73    |       | 61                |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh               | SHC   | MBh   | SHC   | MBh   | SHC   | MBh               | SHC   | MBh   | SHC   |       |       |
| 4000                           | 75                | 172.5               | 139.1 | 188.8 | 110.3 | 209.3 | 58.1  | 166.4             | 135.1 | 182.1 | 107.1 | 202.2 | 55.7  | 160.1             | 131.0 | 175.3 | 103.7 | 194.8 | 53.1  |
|                                | 80                | 177.4               | 155.8 | 192.0 | 136.8 | 211.0 | 101.2 | 171.3             | 151.4 | 185.4 | 133.0 | 203.9 | 98.1  | 164.9             | 146.8 | 178.5 | 129.1 | 196.5 | 94.9  |
|                                | 85                | 184.2               | 169.0 | 195.3 | 155.9 | 212.8 | 130.8 | 178.0             | 164.3 | 188.6 | 151.7 | 205.6 | 127.2 | 171.6             | 159.4 | 181.8 | 147.3 | 198.2 | 123.4 |
|                                | 90                | 192.0               | 180.4 | 200.9 | 170.7 | 214.5 | 152.2 | 185.7             | 175.3 | 194.2 | 166.1 | 207.3 | 148.1 | 179.1             | 170.1 | 187.2 | 161.3 | 199.9 | 143.9 |
| 4800                           | 75                | 180.2               | 149.0 | 199.0 | 119.0 | 214.7 | 65.5  | 173.8             | 144.7 | 192.0 | 115.5 | 207.2 | 62.8  | 167.2             | 140.3 | 184.7 | 111.8 | 199.6 | 60.0  |
|                                | 80                | 185.9               | 166.6 | 199.4 | 146.7 | 217.3 | 110.0 | 179.5             | 161.9 | 192.4 | 142.6 | 209.8 | 106.6 | 172.9             | 157.1 | 185.3 | 138.4 | 202.1 | 103.1 |
|                                | 85                | 193.4               | 180.7 | 203.5 | 166.8 | 219.8 | 140.7 | 186.9             | 175.7 | 196.5 | 162.2 | 212.3 | 136.8 | 180.2             | 170.5 | 189.4 | 157.5 | 204.7 | 132.7 |
|                                | 90                | 201.8               | 192.8 | 209.8 | 182.4 | 222.4 | 163.1 | 195.2             | 187.4 | 202.7 | 177.5 | 214.9 | 158.7 | 188.3             | 181.9 | 195.5 | 172.4 | 207.2 | 154.2 |
| 5600                           | 75                | 186.8               | 157.8 | 204.2 | 126.7 | 219.0 | 71.8  | 180.1             | 153.2 | 196.9 | 122.8 | 211.2 | 68.8  | 173.2             | 148.5 | 189.3 | 118.9 | 203.2 | 65.7  |
|                                | 80                | 193.4               | 176.4 | 205.6 | 155.5 | 222.4 | 117.6 | 186.6             | 171.4 | 198.4 | 151.1 | 214.6 | 114.0 | 179.7             | 166.2 | 190.9 | 146.5 | 206.6 | 110.1 |
|                                | 85                | 201.5               | 191.3 | 210.6 | 176.5 | 225.8 | 149.6 | 194.7             | 186.0 | 203.3 | 171.7 | 218.0 | 145.3 | 187.7             | 180.5 | 195.9 | 166.7 | 210.0 | 141.0 |
|                                | 90                | 210.5               | 204.1 | 217.6 | 193.0 | 229.2 | 172.9 | 203.5             | 198.5 | 210.2 | 187.8 | 221.4 | 168.3 | 196.4             | 192.7 | 202.7 | 182.4 | 213.4 | 163.4 |
| 6400                           | 75                | 192.3               | 165.5 | 208.3 | 133.2 | 229.6 | 77.1  | 185.3             | 160.6 | 200.7 | 129.1 | 221.3 | 73.8  | 178.1             | 155.6 | 192.8 | 124.8 | 212.9 | 70.3  |
|                                | 80                | 199.7               | 185.1 | 210.8 | 163.2 | 230.1 | 124.3 | 192.7             | 179.8 | 203.3 | 158.5 | 222.0 | 120.3 | 185.5             | 174.3 | 195.5 | 153.7 | 213.6 | 116.1 |
|                                | 85                | 208.5               | 200.9 | 216.6 | 185.2 | 230.7 | 157.3 | 201.4             | 195.2 | 209.1 | 180.1 | 222.6 | 152.8 | 194.1             | 189.4 | 201.3 | 174.8 | 214.3 | 148.1 |
|                                | 90                | 218.0               | 214.4 | 224.3 | 202.5 | 235.0 | 181.7 | 210.8             | 208.4 | 216.7 | 197.0 | 226.9 | 176.7 | 203.3             | 202.3 | 208.8 | 191.4 | 218.6 | 171.5 |
| 7200                           | 75                | 196.7               | 172.1 | 211.3 | 138.7 | 231.3 | 81.2  | 189.4             | 167.0 | 203.4 | 134.3 | 222.7 | 77.7  | 181.9             | 161.7 | 195.2 | 129.7 | 213.9 | 73.9  |
|                                | 80                | 205.0               | 192.7 | 214.9 | 169.8 | 232.9 | 129.8 | 197.7             | 187.1 | 207.0 | 164.8 | 224.4 | 125.5 | 190.1             | 181.4 | 199.0 | 159.7 | 215.7 | 121.1 |
|                                | 85                | 214.5               | 209.3 | 221.6 | 192.9 | 234.5 | 164.0 | 207.1             | 203.4 | 213.7 | 187.4 | 226.1 | 159.2 | 199.4             | 197.2 | 205.6 | 181.8 | 217.5 | 154.2 |
|                                | 90                | 224.5               | 223.5 | 229.9 | 211.0 | 239.6 | 189.3 | 216.9             | 216.9 | 222.0 | 205.2 | 231.2 | 184.0 | 209.2             | 209.2 | 213.8 | 199.2 | 222.6 | 178.6 |
| 8000                           | 75                | 200.0               | 177.7 | 213.3 | 143.1 | 231.9 | 84.3  | 192.4             | 172.2 | 205.0 | 138.4 | 223.0 | 80.4  | 184.6             | 166.6 | 196.5 | 133.5 | 213.9 | 76.4  |
|                                | 80                | 209.1               | 199.3 | 217.9 | 175.4 | 234.5 | 134.2 | 201.5             | 193.4 | 209.7 | 170.1 | 225.7 | 129.6 | 193.7             | 187.3 | 201.3 | 164.7 | 216.7 | 124.9 |
|                                | 85                | 219.3               | 216.7 | 225.4 | 199.4 | 237.1 | 169.6 | 211.6             | 210.4 | 217.2 | 193.6 | 228.5 | 164.4 | 203.7             | 203.7 | 208.8 | 187.8 | 219.6 | 159.2 |
|                                | 90                | 229.9               | 229.9 | 234.4 | 218.4 | 243.1 | 195.9 | 222.0             | 222.0 | 226.2 | 212.3 | 234.4 | 190.3 | 214.0             | 214.0 | 217.7 | 206.0 | 225.5 | 184.6 |
| 8800                           | 75                | 202.2               | 182.2 | 214.1 | 146.4 | 231.3 | 86.3  | 194.3             | 176.4 | 205.5 | 141.4 | 222.2 | 82.2  | 186.2             | 170.5 | 196.7 | 136.2 | 213.5 | 77.8  |
|                                | 80                | 212.2               | 204.7 | 219.7 | 179.9 | 235.0 | 137.6 | 204.3             | 198.5 | 211.3 | 174.3 | 226.0 | 132.7 | 196.1             | 192.1 | 202.6 | 168.5 | 217.0 | 127.7 |
|                                | 85                | 223.1               | 223.0 | 228.1 | 204.8 | 238.7 | 174.1 | 215.0             | 215.0 | 219.6 | 198.8 | 229.7 | 168.7 | 206.8             | 206.8 | 211.0 | 192.6 | 220.5 | 163.1 |
|                                | 90                | 234.2               | 234.2 | 237.8 | 224.7 | 245.6 | 201.4 | 226.0             | 226.0 | 229.3 | 218.3 | 236.6 | 195.5 | 217.6             | 217.6 | 220.5 | 211.7 | 227.4 | 189.5 |
| 9600                           | 75                | 203.4               | 185.6 | 216.0 | 148.7 | 233.2 | 87.3  | 195.1             | 179.5 | 207.0 | 143.3 | 224.1 | 82.8  | 186.7             | 173.3 | 198.0 | 137.9 | 213.0 | 78.1  |
|                                | 80                | 214.2               | 209.1 | 220.5 | 183.2 | 236.2 | 139.9 | 205.9             | 202.6 | 211.8 | 177.4 | 227.0 | 134.7 | 197.5             | 195.9 | 202.8 | 171.3 | 218.0 | 129.4 |
|                                | 85                | 225.7               | 225.7 | 229.8 | 209.2 | 239.2 | 177.5 | 217.4             | 217.4 | 221.0 | 202.9 | 229.9 | 171.8 | 208.9             | 208.9 | 212.0 | 196.4 | 223.0 | 165.9 |
|                                | 90                | 237.4               | 237.4 | 240.2 | 229.9 | 246.9 | 205.8 | 228.9             | 228.9 | 231.3 | 223.2 | 237.6 | 199.6 | 220.2             | 220.2 | 222.3 | 216.3 | 228.1 | 193.3 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 4000, 4800, and 5600 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

Performance Data

**Table 33. Gross cooling capacities 20 tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD240G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4000                           | 75                | 203.7               | 145.0 | 228.5 | 96.2  | 259.7 | 90.9  | 193.4 | 139.5 | 217.0 | 92.5  | 247.0 | 86.4  | 182.4 | 133.4 | 204.8 | 88.3  | 233.5 | 81.7  |
|                                | 80                | 206.0               | 171.4 | 227.3 | 134.7 | 254.8 | 89.2  | 195.8 | 164.9 | 215.8 | 130.0 | 242.1 | 84.7  | 184.8 | 157.8 | 203.6 | 124.6 | 228.6 | 80.0  |
|                                | 85                | 210.1               | 191.8 | 227.8 | 167.0 | 251.7 | 118.8 | 199.9 | 184.2 | 216.3 | 161.3 | 239.0 | 114.9 | 189.0 | 176.0 | 204.1 | 154.9 | 225.5 | 110.4 |
|                                | 90                | 216.1               | 206.0 | 230.1 | 193.2 | 250.4 | 157.1 | 205.9 | 197.4 | 218.6 | 186.5 | 237.7 | 152.1 | 194.9 | 188.2 | 206.4 | 179.1 | 224.2 | 146.5 |
| 5200                           | 75                | 218.6               | 159.9 | 241.6 | 108.8 | 271.0 | 94.8  | 207.5 | 153.9 | 229.3 | 104.6 | 257.4 | 90.1  | 195.7 | 147.3 | 216.2 | 99.8  | 243.0 | 85.1  |
|                                | 80                | 222.2               | 188.3 | 241.6 | 149.2 | 267.3 | 93.6  | 211.1 | 181.3 | 229.3 | 144.0 | 253.7 | 88.8  | 199.3 | 173.6 | 216.2 | 138.2 | 239.4 | 83.8  |
|                                | 85                | 227.6               | 210.6 | 243.4 | 183.5 | 265.5 | 133.0 | 216.5 | 202.5 | 231.1 | 177.3 | 251.9 | 128.6 | 204.7 | 193.8 | 218.0 | 170.4 | 237.6 | 123.5 |
|                                | 90                | 234.8               | 226.8 | 247.0 | 211.7 | 265.4 | 173.2 | 223.7 | 217.7 | 234.6 | 204.4 | 251.9 | 167.7 | 211.9 | 207.9 | 221.6 | 196.5 | 237.5 | 161.6 |
| 6400                           | 75                | 231.3               | 173.2 | 252.5 | 119.7 | 280.0 | 98.0  | 219.3 | 166.7 | 239.3 | 115.1 | 265.9 | 92.9  | 206.6 | 159.6 | 225.3 | 109.8 | 250.3 | 87.6  |
|                                | 80                | 236.2               | 203.6 | 253.7 | 162.1 | 277.6 | 97.2  | 224.2 | 196.0 | 240.5 | 156.4 | 263.2 | 93.4  | 211.5 | 187.9 | 226.6 | 150.1 | 248.0 | 88.8  |
|                                | 85                | 242.8               | 227.8 | 256.8 | 198.4 | 277.0 | 145.5 | 230.9 | 219.3 | 243.6 | 191.6 | 262.6 | 140.6 | 218.2 | 210.0 | 229.7 | 184.2 | 247.4 | 135.0 |
|                                | 90                | 251.2               | 245.9 | 261.6 | 228.5 | 278.2 | 187.7 | 239.3 | 236.3 | 248.4 | 220.7 | 263.8 | 181.7 | 226.7 | 226.1 | 234.5 | 212.3 | 248.6 | 175.1 |
| 7200                           | 75                | 238.5               | 181.2 | 258.5 | 126.2 | 284.8 | 99.7  | 226.0 | 174.4 | 244.7 | 121.2 | 269.7 | 94.4  | 212.7 | 166.9 | 230.2 | 115.5 | 253.9 | 88.9  |
|                                | 80                | 244.2               | 212.9 | 260.6 | 169.9 | 283.2 | 103.4 | 231.7 | 205.0 | 246.8 | 163.8 | 268.2 | 99.2  | 218.5 | 196.5 | 232.3 | 157.1 | 252.4 | 94.3  |
|                                | 85                | 251.7               | 238.4 | 264.4 | 207.4 | 283.5 | 153.0 | 239.2 | 229.5 | 250.7 | 200.3 | 268.4 | 147.7 | 226.0 | 220.0 | 236.2 | 192.6 | 252.7 | 141.8 |
|                                | 90                | 261.0               | 257.9 | 270.1 | 238.9 | 285.5 | 196.5 | 248.5 | 247.9 | 256.3 | 230.7 | 270.5 | 190.2 | 235.3 | 235.3 | 241.9 | 222.0 | 254.7 | 183.2 |
| 8000                           | 75                | 244.8               | 188.5 | 263.5 | 131.9 | 288.6 | 101.0 | 231.7 | 181.3 | 249.2 | 126.5 | 272.9 | 95.5  | 217.8 | 173.5 | 234.1 | 120.5 | 256.6 | 89.8  |
|                                | 80                | 251.3               | 221.5 | 266.4 | 176.9 | 287.8 | 108.9 | 238.2 | 213.2 | 252.1 | 170.5 | 272.2 | 104.3 | 224.4 | 204.4 | 237.0 | 163.5 | 255.9 | 99.1  |
|                                | 85                | 259.6               | 248.3 | 271.1 | 215.8 | 288.9 | 159.8 | 246.5 | 239.1 | 256.8 | 208.3 | 273.3 | 154.2 | 232.7 | 229.2 | 241.7 | 200.2 | 257.0 | 147.9 |
|                                | 90                | 269.7               | 269.0 | 277.6 | 248.5 | 291.8 | 204.5 | 256.7 | 256.7 | 263.3 | 240.0 | 276.2 | 197.9 | 242.9 | 242.9 | 248.2 | 230.9 | 259.9 | 190.6 |
| 8800                           | 75                | 250.0               | 195.1 | 267.5 | 136.9 | 291.3 | 102.0 | 236.3 | 187.5 | 252.6 | 131.2 | 275.2 | 96.3  | 221.9 | 179.4 | 236.9 | 124.9 | 258.2 | 90.4  |
|                                | 80                | 257.4               | 229.3 | 271.3 | 183.2 | 291.5 | 113.6 | 243.7 | 220.8 | 256.4 | 176.5 | 275.3 | 108.7 | 229.3 | 211.6 | 240.7 | 169.1 | 258.4 | 103.2 |
|                                | 85                | 266.5               | 257.5 | 276.8 | 223.4 | 293.4 | 165.8 | 252.9 | 247.9 | 261.9 | 215.6 | 277.2 | 159.9 | 238.5 | 237.7 | 246.3 | 207.2 | 260.3 | 153.3 |
|                                | 90                | 277.5               | 277.5 | 284.1 | 257.4 | 297.1 | 211.9 | 263.8 | 263.8 | 269.2 | 248.6 | 280.9 | 204.9 | 249.5 | 249.5 | 253.6 | 239.2 | 264.0 | 197.3 |
| 9600                           | 75                | 254.3               | 200.9 | 270.6 | 141.2 | 293.1 | 102.6 | 240.0 | 193.1 | 255.1 | 135.2 | 276.4 | 96.7  | 225.0 | 184.6 | 238.8 | 128.5 | 258.9 | 90.6  |
|                                | 80                | 262.5               | 236.5 | 275.1 | 188.8 | 294.1 | 117.7 | 248.2 | 227.6 | 259.7 | 181.7 | 277.4 | 112.4 | 233.3 | 218.1 | 243.4 | 174.0 | 259.9 | 106.5 |
|                                | 85                | 272.4               | 266.0 | 281.5 | 230.3 | 296.8 | 171.2 | 258.2 | 256.0 | 266.0 | 222.2 | 280.1 | 164.9 | 243.3 | 243.3 | 249.8 | 213.4 | 262.6 | 157.9 |
|                                | 90                | 284.2               | 284.2 | 289.6 | 265.7 | 301.4 | 218.6 | 270.0 | 270.0 | 274.2 | 256.5 | 284.7 | 211.2 | 255.1 | 255.1 | 258.0 | 246.7 | 267.2 | 203.2 |



## Performance Data

**Table 33. Gross cooling capacities 20 tons three phase dehumidification (hot gas reheat) option high efficiency T/YHD240G3,4,W (Digit 22 = B)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       |       |       | 120   |       |       |       |       |       | 125   |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
|                                |                   | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 4000                           | 75                | 170.7               | 126.7 | 191.8 | 83.3  | 219.2 | 76.7  | 164.5 | 123.1 | 185.0 | 80.6  | 211.8 | 74.1  | 158.2 | 119.3 | 178.1 | 77.8  | 204.2 | 71.5  |
|                                | 80                | 173.1               | 150.0 | 190.6 | 118.7 | 214.4 | 75.0  | 166.9 | 145.9 | 183.8 | 115.5 | 207.0 | 72.4  | 160.6 | 141.6 | 176.8 | 112.1 | 199.4 | 69.8  |
|                                | 85                | 177.3               | 167.2 | 191.1 | 147.9 | 211.3 | 105.2 | 171.1 | 162.6 | 184.4 | 144.2 | 203.9 | 102.4 | 164.8 | 157.7 | 177.4 | 140.3 | 196.3 | 99.4  |
|                                | 90                | 183.2               | 178.3 | 193.5 | 171.0 | 210.0 | 140.3 | 177.1 | 173.1 | 186.7 | 166.8 | 202.6 | 137.0 | 170.8 | 167.8 | 179.8 | 162.3 | 195.1 | 133.5 |
| 5200                           | 75                | 183.1               | 140.0 | 202.3 | 94.4  | 227.9 | 79.8  | 176.5 | 136.2 | 195.1 | 91.4  | 220.1 | 77.0  | 169.7 | 132.1 | 187.7 | 88.3  | 212.0 | 74.2  |
|                                | 80                | 186.7               | 165.3 | 202.4 | 131.7 | 224.3 | 78.5  | 180.1 | 160.9 | 195.2 | 128.2 | 216.5 | 75.8  | 173.4 | 156.4 | 187.8 | 124.6 | 208.4 | 73.0  |
|                                | 85                | 192.1               | 184.5 | 204.2 | 162.9 | 222.5 | 117.8 | 185.6 | 179.6 | 197.0 | 158.9 | 214.7 | 114.7 | 178.8 | 174.5 | 189.6 | 154.7 | 206.7 | 111.5 |
|                                | 90                | 199.4               | 197.5 | 207.8 | 187.9 | 222.5 | 154.9 | 192.8 | 192.1 | 200.6 | 183.4 | 214.6 | 151.3 | 186.1 | 186.1 | 193.2 | 178.7 | 206.6 | 147.5 |
| 6400                           | 75                | 193.2               | 151.8 | 210.6 | 103.8 | 234.3 | 82.0  | 186.2 | 147.7 | 203.0 | 100.6 | 226.1 | 79.1  | 179.0 | 143.4 | 195.2 | 97.2  | 217.6 | 76.2  |
|                                | 80                | 198.1               | 165.3 | 211.9 | 143.1 | 232.0 | 80.8  | 191.1 | 174.4 | 204.3 | 139.3 | 223.7 | 80.8  | 183.9 | 169.6 | 196.5 | 135.4 | 215.3 | 77.8  |
|                                | 85                | 204.8               | 200.2 | 215.0 | 176.2 | 231.4 | 128.8 | 197.8 | 195.0 | 207.4 | 172.0 | 223.2 | 125.5 | 190.6 | 189.7 | 199.5 | 167.5 | 214.8 | 122.0 |
|                                | 90                | 213.3               | 213.3 | 219.8 | 203.2 | 232.7 | 167.8 | 206.3 | 206.3 | 212.2 | 198.5 | 224.4 | 164.0 | 199.1 | 199.1 | 204.4 | 193.5 | 216.0 | 160.0 |
| 7200                           | 75                | 198.7               | 158.8 | 214.9 | 109.2 | 237.4 | 83.1  | 191.4 | 154.5 | 207.0 | 105.8 | 228.9 | 80.1  | 183.9 | 150.0 | 198.9 | 102.3 | 220.1 | 77.0  |
|                                | 80                | 204.4               | 187.3 | 217.0 | 149.8 | 235.9 | 88.8  | 197.2 | 182.5 | 209.1 | 145.9 | 227.4 | 85.8  | 189.7 | 177.5 | 201.0 | 141.8 | 218.6 | 82.6  |
|                                | 85                | 212.0               | 209.8 | 220.9 | 184.2 | 236.2 | 135.3 | 204.7 | 204.4 | 213.0 | 179.8 | 227.6 | 131.7 | 197.2 | 197.2 | 204.9 | 175.2 | 218.9 | 128.1 |
|                                | 90                | 221.3               | 221.3 | 226.6 | 212.5 | 238.2 | 175.6 | 214.0 | 214.0 | 218.7 | 207.6 | 229.7 | 171.6 | 206.6 | 206.6 | 210.6 | 202.5 | 221.0 | 167.4 |
| 8000                           | 75                | 203.2               | 165.0 | 218.2 | 113.9 | 239.5 | 83.8  | 195.7 | 160.6 | 210.0 | 110.3 | 230.6 | 80.7  | 187.9 | 155.9 | 201.6 | 106.6 | 221.6 | 77.6  |
|                                | 80                | 209.8               | 194.9 | 221.2 | 155.8 | 238.8 | 93.2  | 202.2 | 189.9 | 213.0 | 151.7 | 230.0 | 90.1  | 194.5 | 184.7 | 204.6 | 147.5 | 221.0 | 86.7  |
|                                | 85                | 218.2               | 218.2 | 225.9 | 191.5 | 239.9 | 141.0 | 210.6 | 210.6 | 217.7 | 186.9 | 231.1 | 137.3 | 202.9 | 202.9 | 209.3 | 182.2 | 222.1 | 133.5 |
|                                | 90                | 228.3               | 228.3 | 232.4 | 221.2 | 242.8 | 182.7 | 220.8 | 220.8 | 224.2 | 216.0 | 234.0 | 178.4 | 213.0 | 213.0 | 215.9 | 210.8 | 225.0 | 174.1 |
| 8800                           | 75                | 206.8               | 170.6 | 220.5 | 117.9 | 240.6 | 84.2  | 198.9 | 165.9 | 212.0 | 114.2 | 231.4 | 81.0  | 190.9 | 161.1 | 203.3 | 110.3 | 222.1 | 77.7  |
|                                | 80                | 214.2               | 201.7 | 224.3 | 161.1 | 240.7 | 97.0  | 206.3 | 196.6 | 215.8 | 156.8 | 231.6 | 93.6  | 198.3 | 191.2 | 207.1 | 152.4 | 222.3 | 90.1  |
|                                | 85                | 223.4               | 223.4 | 229.9 | 198.1 | 242.7 | 146.0 | 215.5 | 215.5 | 221.4 | 193.3 | 233.6 | 142.2 | 207.5 | 207.5 | 212.7 | 188.4 | 224.3 | 138.1 |
|                                | 90                | 234.3               | 234.3 | 237.2 | 229.1 | 246.4 | 189.0 | 226.5 | 226.5 | 228.8 | 223.8 | 237.3 | 184.6 | 217.9 | 217.9 | 220.1 | 218.3 | 228.0 | 180.1 |
| 9600                           | 75                | 209.3               | 175.4 | 221.8 | 121.2 | 240.6 | 84.2  | 201.2 | 170.6 | 213.0 | 117.3 | 231.2 | 80.9  | 192.8 | 165.6 | 204.1 | 113.2 | 221.6 | 77.6  |
|                                | 80                | 217.5               | 207.9 | 226.4 | 165.6 | 241.6 | 100.0 | 209.4 | 202.5 | 217.7 | 161.2 | 232.2 | 96.5  | 201.1 | 197.0 | 208.7 | 156.6 | 222.6 | 92.8  |
|                                | 85                | 227.6               | 227.6 | 232.8 | 204.0 | 244.4 | 150.4 | 219.4 | 219.4 | 224.1 | 199.1 | 235.0 | 146.3 | 211.1 | 211.1 | 215.1 | 194.0 | 225.4 | 142.1 |
|                                | 90                | 239.4               | 239.4 | 241.0 | 236.2 | 249.0 | 194.6 | 230.0 | 230.0 | 232.3 | 230.8 | 239.6 | 190.1 | 223.3 | 223.3 | 223.3 | 223.3 | 230.0 | 185.3 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain **NET** cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity<sup>(a)</sup>
- (a) For 4000, and 5200 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 34. Gross cooling capacities 25 tons three phase high efficiency T/YH\*300G3,4,W (stage 1)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |      |      |      |      |      |      |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|
|                                |                   | 85                  |       |       |       |       |       | 95   |      |      |      |      |      |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |      |      |      |      |      |      |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61   |      | 67   |      | 73   |      |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh  | SHC  | MBh  | SHC  |      |      |
| 4000                           | 75                | 80.5                | 78.0  | 85.7  | 62.9  | 93.7  | 32.5  | 75.1 | 73.7 | 80.0 | 59.3 | 87.7 | 29.5 |
|                                | 80                | 85.2                | 85.2  | 87.8  | 78.2  | 94.6  | 59.2  | 79.7 | 79.7 | 82.1 | 74.1 | 88.6 | 55.8 |
|                                | 85                | 90.1                | 90.1  | 91.3  | 88.2  | 95.4  | 76.5  | 84.6 | 84.6 | 85.6 | 83.8 | 89.4 | 72.6 |
|                                | 90                | 94.9                | 94.9  | 95.3  | 95.3  | 97.8  | 88.2  | 89.3 | 89.3 | 89.5 | 89.5 | 91.8 | 83.9 |
| 5000                           | 75                | 83.0                | 82.1  | 87.6  | 67.4  | 95.0  | 37.4  | 77.3 | 77.3 | 81.6 | 63.4 | 88.7 | 34.1 |
|                                | 80                | 88.1                | 88.1  | 90.2  | 82.7  | 96.3  | 64.2  | 82.3 | 82.3 | 84.2 | 78.3 | 90.0 | 60.3 |
|                                | 85                | 93.3                | 93.3  | 94.0  | 92.9  | 97.6  | 81.6  | 87.5 | 87.5 | 88.0 | 88.0 | 91.3 | 77.2 |
|                                | 90                | 98.3                | 98.3  | 98.3  | 98.3  | 100.3 | 93.3  | 92.0 | 92.0 | 92.2 | 92.2 | 94.0 | 88.7 |
| 6000                           | 75                | 85.1                | 85.1  | 89.0  | 71.1  | 95.7  | 41.5  | 79.1 | 79.1 | 82.7 | 66.7 | 89.2 | 37.8 |
|                                | 80                | 90.5                | 90.5  | 92.0  | 86.5  | 97.5  | 68.3  | 84.5 | 84.5 | 85.8 | 81.6 | 90.9 | 64.1 |
|                                | 85                | 96.0                | 96.0  | 96.2  | 96.2  | 99.2  | 85.8  | 89.9 | 89.9 | 89.9 | 89.9 | 92.7 | 81.1 |
|                                | 90                | 99.8                | 99.8  | 100.8 | 100.8 | 102.3 | 97.7  | 94.0 | 94.0 | 94.4 | 94.4 | 95.8 | 92.6 |
| 7000                           | 75                | 86.6                | 86.6  | 89.8  | 74.0  | 96.0  | 44.9  | 80.3 | 80.3 | 83.3 | 69.2 | 89.5 | 40.7 |
|                                | 80                | 92.4                | 92.4  | 93.4  | 89.5  | 98.2  | 71.7  | 86.1 | 86.1 | 86.8 | 84.2 | 91.3 | 67.0 |
|                                | 85                | 96.0                | 96.0  | 97.9  | 97.9  | 100.4 | 89.2  | 91.0 | 91.0 | 91.3 | 91.3 | 93.6 | 84.1 |
|                                | 90                | 101.0               | 101.0 | 102.8 | 102.8 | 103.8 | 101.2 | 95.8 | 95.8 | 96.1 | 96.1 | 97.0 | 95.8 |
| 8000                           | 75                | 87.7                | 87.7  | 90.2  | 76.1  | 98.2  | 47.4  | 81.1 | 81.1 | 83.3 | 70.9 | 91.0 | 42.9 |
|                                | 80                | 93.8                | 93.8  | 94.2  | 91.6  | 98.4  | 74.2  | 87.2 | 87.2 | 87.3 | 86.0 | 92.0 | 69.1 |
|                                | 85                | 98.4                | 98.4  | 99.1  | 99.1  | 101.0 | 91.8  | 92.0 | 92.0 | 92.2 | 92.2 | 93.9 | 86.3 |
|                                | 90                | 103.7               | 103.7 | 104.2 | 104.2 | 104.8 | 104.0 | 96.0 | 96.0 | 97.3 | 97.3 | 97.7 | 97.7 |
| 8750                           | 75                | 88.1                | 88.1  | 91.0  | 77.1  | 98.5  | 48.8  | 81.3 | 81.3 | 84.0 | 71.6 | 92.0 | 43.9 |
|                                | 80                | 94.0                | 94.0  | 94.5  | 92.7  | 99.0  | 75.6  | 87.3 | 87.3 | 87.4 | 86.7 | 93.5 | 70.2 |
|                                | 85                | 99.0                | 99.0  | 99.7  | 99.7  | 101.2 | 93.2  | 92.4 | 92.4 | 92.6 | 92.6 | 95.0 | 87.4 |
|                                | 90                | 104.0               | 104.0 | 105.0 | 105.0 | 105.2 | 105.2 | 97.0 | 97.0 | 97.8 | 97.8 | 97.9 | 97.9 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 4000, 5000, 6000, and 7000 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 35. Gross cooling capacities 25 tons three phase high efficiency T/YH\*300G3,4,W (stage 2)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 4000                           | 75                | 135.6               | 118.7 | 146.9 | 92.7  | 156.4 | 43.8  | 127.9 | 113.4 | 138.5 | 88.3  | 147.4 | 40.5  |
|                                | 80                | 140.7               | 132.3 | 148.2 | 116.5 | 159.0 | 84.6  | 132.9 | 126.3 | 139.8 | 111.3 | 150.0 | 80.4  |
|                                | 85                | 146.9               | 142.2 | 152.0 | 132.5 | 161.5 | 111.5 | 138.9 | 135.7 | 143.6 | 126.7 | 152.5 | 106.4 |
|                                | 90                | 153.5               | 150.3 | 157.2 | 144.1 | 164.1 | 129.8 | 145.3 | 143.4 | 148.6 | 137.8 | 155.0 | 124.2 |
| 5000                           | 75                | 141.2               | 127.5 | 151.3 | 101.4 | 165.2 | 52.4  | 133.0 | 121.6 | 142.4 | 96.4  | 155.5 | 48.5  |
|                                | 80                | 147.0               | 141.5 | 153.5 | 125.6 | 165.8 | 93.7  | 138.7 | 134.9 | 144.5 | 119.9 | 156.2 | 88.8  |
|                                | 85                | 153.7               | 151.8 | 157.9 | 142.1 | 166.4 | 121.0 | 145.2 | 144.8 | 149.0 | 135.7 | 156.8 | 115.4 |
|                                | 90                | 160.7               | 160.3 | 163.6 | 154.1 | 169.7 | 139.7 | 152.0 | 152.0 | 154.5 | 147.2 | 160.0 | 133.5 |
| 6000                           | 75                | 145.8               | 134.8 | 154.6 | 108.6 | 167.3 | 59.5  | 137.0 | 128.2 | 145.1 | 103.0 | 157.1 | 55.0  |
|                                | 80                | 152.2               | 149.2 | 157.6 | 133.2 | 168.7 | 101.2 | 143.4 | 142.0 | 148.2 | 126.9 | 158.6 | 95.8  |
|                                | 85                | 159.4               | 159.4 | 162.7 | 150.1 | 170.2 | 128.9 | 150.4 | 150.4 | 153.3 | 143.2 | 160.1 | 122.7 |
|                                | 90                | 166.8               | 166.8 | 169.0 | 162.6 | 174.1 | 148.1 | 157.6 | 157.6 | 159.3 | 155.1 | 164.0 | 141.3 |
| 7000                           | 75                | 149.2               | 140.5 | 156.8 | 114.2 | 168.3 | 65.0  | 140.0 | 133.4 | 146.9 | 108.1 | 157.6 | 59.9  |
|                                | 80                | 156.3               | 155.3 | 160.7 | 139.3 | 170.6 | 107.2 | 147.0 | 147.0 | 150.8 | 132.4 | 160.0 | 101.2 |
|                                | 85                | 164.0               | 164.0 | 166.5 | 156.7 | 172.9 | 135.4 | 154.6 | 154.6 | 156.5 | 149.1 | 162.3 | 128.6 |
|                                | 90                | 171.8               | 171.8 | 173.2 | 169.5 | 177.5 | 155.0 | 162.1 | 162.1 | 163.1 | 161.4 | 166.8 | 147.6 |
| 8000                           | 75                | 151.6               | 144.7 | 158.0 | 118.3 | 169.0 | 69.0  | 141.9 | 137.0 | 147.5 | 111.6 | 158.0 | 63.4  |
|                                | 80                | 159.4               | 159.4 | 162.7 | 143.9 | 171.4 | 111.7 | 149.6 | 149.6 | 152.2 | 136.4 | 160.3 | 105.1 |
|                                | 85                | 167.6               | 167.6 | 169.1 | 161.6 | 174.5 | 140.3 | 157.6 | 157.6 | 158.7 | 153.5 | 163.5 | 132.9 |
|                                | 90                | 175.7               | 175.7 | 176.4 | 174.9 | 179.8 | 160.3 | 165.5 | 165.5 | 165.7 | 165.7 | 168.6 | 152.3 |
| 8750                           | 75                | 152.7               | 146.8 | 158.1 | 120.4 | 171.3 | 71.0  | 142.6 | 138.7 | 147.9 | 113.2 | 159.6 | 64.9  |
|                                | 80                | 161.0               | 161.0 | 163.4 | 146.3 | 172.0 | 114.0 | 150.8 | 150.8 | 152.7 | 138.3 | 161.0 | 107.0 |
|                                | 85                | 169.5               | 169.5 | 170.4 | 164.3 | 175.1 | 142.9 | 159.2 | 159.2 | 159.6 | 155.8 | 163.6 | 135.1 |
|                                | 90                | 178.0               | 178.0 | 178.0 | 177.9 | 180.8 | 163.3 | 166.0 | 167.4 | 167.0 | 167.0 | 169.3 | 154.9 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 4000, 5000, 6000, and 7000 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 36. Gross cooling capacities 25 tons three phase high efficiency T/YH\*300G3,4,W (stage 3)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       |       |       | 95    |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |       |       |
| 4000                           | 75                | 188.9               | 150.3 | 205.8 | 121.4 | 226.6 | 71.4  | 179.7 | 145.2 | 195.3 | 117.2 | 214.8 | 68.3  |
|                                | 80                | 193.3               | 167.2 | 208.8 | 147.0 | 228.3 | 111.8 | 184.1 | 161.3 | 198.4 | 142.0 | 216.6 | 107.6 |
|                                | 85                | 199.5               | 180.7 | 211.8 | 165.8 | 230.0 | 140.0 | 190.3 | 174.2 | 201.4 | 160.0 | 218.4 | 135.0 |
|                                | 90                | 207.0               | 192.0 | 217.1 | 180.3 | 231.7 | 160.6 | 197.5 | 185.0 | 206.7 | 174.0 | 220.2 | 154.9 |
| 5000                           | 75                | 199.5               | 162.2 | 218.5 | 131.4 | 234.4 | 79.3  | 189.4 | 156.2 | 206.9 | 126.4 | 221.8 | 75.4  |
|                                | 80                | 204.9               | 180.5 | 219.0 | 158.8 | 237.2 | 121.8 | 194.9 | 173.8 | 207.8 | 153.0 | 224.7 | 116.9 |
|                                | 85                | 212.0               | 195.3 | 223.1 | 179.1 | 240.0 | 151.8 | 202.0 | 188.0 | 211.9 | 172.5 | 227.6 | 146.0 |
|                                | 90                | 220.2               | 207.7 | 229.3 | 194.9 | 242.7 | 173.9 | 209.9 | 199.9 | 218.0 | 187.7 | 230.4 | 167.4 |
| 6000                           | 75                | 208.4               | 172.8 | 225.7 | 140.2 | 247.8 | 86.1  | 197.5 | 166.0 | 213.4 | 134.4 | 234.0 | 81.4  |
|                                | 80                | 214.8               | 192.7 | 227.6 | 169.4 | 248.1 | 130.7 | 204.1 | 185.1 | 215.6 | 162.7 | 234.6 | 124.9 |
|                                | 85                | 222.8               | 208.7 | 232.7 | 191.2 | 248.3 | 162.4 | 212.0 | 200.6 | 220.8 | 183.8 | 235.1 | 155.8 |
|                                | 90                | 231.7               | 222.2 | 239.8 | 208.3 | 252.1 | 186.0 | 220.6 | 213.6 | 227.8 | 200.3 | 239.0 | 178.7 |
| 7000                           | 75                | 215.6               | 182.2 | 231.3 | 147.8 | 251.9 | 91.6  | 204.0 | 174.6 | 218.2 | 141.2 | 237.3 | 86.1  |
|                                | 80                | 223.2               | 203.6 | 234.5 | 178.8 | 253.4 | 138.3 | 211.6 | 195.2 | 221.7 | 171.3 | 239.1 | 131.7 |
|                                | 85                | 232.0               | 220.9 | 240.7 | 202.1 | 255.0 | 171.8 | 220.4 | 211.9 | 228.0 | 193.8 | 241.0 | 164.4 |
|                                | 90                | 241.6               | 235.5 | 248.7 | 220.5 | 259.9 | 197.0 | 229.7 | 226.1 | 235.9 | 211.7 | 246.0 | 188.8 |
| 8000                           | 75                | 221.2               | 190.4 | 235.3 | 154.2 | 254.3 | 96.0  | 208.8 | 181.9 | 221.3 | 146.7 | 238.9 | 89.6  |
|                                | 80                | 229.8               | 213.3 | 239.8 | 187.0 | 257.1 | 144.7 | 217.5 | 204.1 | 226.2 | 178.6 | 242.0 | 137.3 |
|                                | 85                | 239.6               | 231.8 | 247.1 | 211.8 | 260.0 | 180.0 | 227.1 | 222.1 | 233.5 | 202.7 | 245.2 | 171.7 |
|                                | 90                | 249.9               | 247.6 | 255.9 | 231.5 | 266.0 | 206.7 | 237.2 | 237.2 | 242.3 | 221.8 | 251.3 | 197.7 |
| 8750                           | 75                | 224.3               | 195.7 | 237.2 | 158.2 | 255.0 | 98.4  | 211.3 | 186.6 | 222.6 | 150.1 | 239.0 | 91.4  |
|                                | 80                | 233.7               | 219.7 | 242.7 | 192.3 | 258.9 | 148.8 | 220.8 | 209.9 | 228.5 | 183.3 | 243.1 | 140.7 |
|                                | 85                | 244.1               | 239.3 | 250.8 | 218.2 | 262.7 | 185.4 | 231.1 | 228.9 | 236.6 | 208.5 | 247.3 | 176.5 |
|                                | 90                | 255.0               | 255.0 | 260.3 | 238.9 | 269.5 | 213.2 | 241.7 | 241.7 | 246.1 | 228.6 | 254.2 | 203.5 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 4000, 5000, 6000, and 7000 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Frostat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 37. Gross cooling capacities 25 tons three phase high efficiency T/YH\*300G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 85                  |       |       |       | 95    |       |       |       | 105   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 5000                           | 75                | 244.4               | 192.5 | 271.7 | 152.0 | 293.2 | 82.9  | 232.4 | 184.9 | 257.9 | 146.3 | 278.4 | 79.2  | 219.4 | 176.7 | 243.2 | 139.9 | 262.5 | 74.8  |
|                                | 80                | 250.0               | 215.3 | 270.3 | 187.5 | 295.4 | 139.2 | 238.0 | 206.6 | 256.8 | 180.3 | 280.5 | 133.8 | 225.0 | 197.3 | 242.2 | 172.5 | 264.5 | 127.7 |
|                                | 85                | 258.5               | 233.2 | 274.2 | 213.2 | 297.6 | 178.4 | 246.2 | 223.6 | 260.6 | 204.8 | 282.6 | 171.4 | 232.8 | 213.3 | 246.0 | 195.8 | 266.5 | 163.9 |
|                                | 90                | 268.6               | 248.1 | 281.3 | 232.8 | 299.8 | 206.6 | 255.9 | 237.7 | 267.4 | 223.5 | 284.7 | 198.6 | 242.1 | 226.7 | 252.6 | 213.6 | 268.6 | 189.9 |
| 6000                           | 75                | 255.4               | 206.3 | 281.1 | 164.5 | 301.6 | 93.9  | 242.7 | 198.1 | 266.6 | 158.1 | 286.0 | 89.5  | 228.9 | 189.1 | 251.1 | 150.9 | 269.3 | 84.3  |
|                                | 80                | 262.0               | 230.2 | 280.9 | 201.3 | 304.7 | 151.7 | 249.2 | 220.8 | 266.6 | 193.4 | 289.1 | 145.6 | 235.5 | 210.7 | 251.4 | 184.8 | 272.3 | 138.7 |
|                                | 85                | 271.2               | 249.0 | 285.7 | 228.0 | 307.8 | 192.1 | 258.2 | 238.7 | 271.4 | 219.0 | 292.1 | 184.5 | 244.1 | 227.7 | 256.1 | 209.2 | 275.3 | 176.2 |
|                                | 90                | 282.0               | 264.7 | 293.6 | 248.6 | 311.0 | 221.4 | 268.5 | 253.6 | 279.0 | 238.6 | 295.1 | 212.7 | 253.9 | 241.8 | 263.4 | 227.9 | 278.3 | 203.3 |
| 7000                           | 75                | 265.0               | 218.8 | 289.1 | 175.7 | 308.5 | 103.5 | 251.6 | 209.8 | 273.9 | 168.5 | 292.2 | 98.3  | 237.1 | 200.1 | 257.7 | 160.6 | 274.8 | 92.5  |
|                                | 80                | 272.6               | 243.7 | 290.1 | 213.7 | 312.6 | 162.9 | 259.1 | 233.6 | 275.1 | 205.1 | 296.2 | 156.0 | 244.6 | 222.8 | 259.1 | 195.8 | 278.8 | 148.4 |
|                                | 85                | 282.6               | 263.5 | 295.9 | 241.5 | 316.7 | 204.5 | 268.8 | 252.4 | 280.9 | 231.7 | 300.2 | 196.1 | 254.0 | 240.6 | 264.8 | 221.2 | 282.7 | 187.1 |
|                                | 90                | 293.9               | 279.9 | 304.6 | 263.0 | 320.8 | 234.9 | 279.7 | 268.1 | 289.2 | 252.2 | 304.2 | 225.4 | 264.4 | 255.6 | 272.9 | 240.8 | 286.7 | 215.3 |
| 8000                           | 75                | 273.3               | 229.9 | 295.7 | 185.4 | 324.1 | 111.8 | 259.1 | 220.1 | 279.8 | 177.5 | 306.4 | 105.9 | 243.9 | 209.7 | 262.8 | 168.9 | 287.8 | 99.3  |
|                                | 80                | 281.8               | 255.9 | 298.0 | 224.7 | 324.2 | 172.6 | 267.6 | 245.0 | 282.2 | 215.4 | 306.7 | 165.0 | 252.3 | 233.5 | 265.5 | 205.3 | 288.3 | 156.6 |
|                                | 85                | 292.5               | 276.6 | 304.7 | 253.7 | 324.2 | 215.6 | 278.0 | 264.7 | 288.9 | 243.1 | 307.0 | 206.4 | 262.5 | 252.2 | 272.1 | 231.9 | 288.7 | 196.7 |
|                                | 90                | 304.5               | 293.8 | 314.1 | 276.0 | 329.2 | 247.0 | 289.5 | 281.2 | 298.1 | 264.5 | 311.9 | 236.8 | 273.5 | 268.0 | 281.0 | 252.4 | 293.6 | 225.9 |
| 9000                           | 75                | 280.1               | 239.6 | 301.0 | 193.8 | 327.8 | 118.7 | 265.2 | 229.1 | 284.3 | 185.2 | 309.4 | 112.0 | 249.3 | 218.0 | 266.6 | 175.8 | 290.0 | 104.7 |
|                                | 80                | 289.6               | 266.7 | 304.4 | 234.4 | 329.1 | 181.0 | 274.7 | 255.1 | 288.0 | 224.3 | 310.9 | 172.6 | 258.7 | 242.8 | 270.5 | 213.5 | 291.7 | 163.6 |
|                                | 85                | 301.1               | 288.3 | 312.1 | 264.4 | 330.3 | 225.2 | 285.9 | 275.7 | 295.6 | 253.1 | 312.3 | 215.4 | 269.6 | 262.5 | 278.1 | 241.2 | 293.3 | 204.9 |
|                                | 90                | 313.7               | 306.3 | 322.3 | 287.7 | 336.3 | 257.8 | 297.9 | 293.0 | 305.5 | 275.5 | 318.3 | 246.8 | 281.2 | 279.0 | 287.7 | 262.6 | 299.2 | 235.1 |
| 10000                          | 75                | 285.6               | 247.9 | 304.9 | 200.8 | 330.2 | 124.2 | 270.0 | 236.7 | 287.4 | 191.4 | 311.0 | 116.8 | 253.3 | 224.8 | 269.0 | 181.3 | 290.9 | 108.7 |
|                                | 80                | 296.1               | 276.1 | 309.5 | 242.7 | 332.6 | 188.0 | 280.4 | 263.8 | 292.3 | 231.9 | 313.7 | 178.9 | 263.6 | 250.7 | 274.1 | 220.3 | 293.7 | 169.1 |
|                                | 85                | 308.3               | 298.6 | 318.2 | 273.8 | 335.0 | 233.5 | 292.3 | 285.3 | 300.9 | 261.7 | 316.3 | 222.9 | 275.3 | 271.3 | 282.6 | 249.0 | 296.6 | 211.7 |
|                                | 90                | 321.4               | 317.4 | 329.1 | 298.0 | 342.0 | 267.1 | 305.0 | 303.3 | 311.6 | 285.0 | 323.2 | 255.4 | 287.5 | 287.5 | 293.0 | 271.4 | 303.4 | 243.0 |
| 11000                          | 75                | 289.7               | 254.9 | 307.3 | 206.5 | 331.1 | 128.3 | 273.3 | 243.0 | 289.2 | 196.3 | 311.2 | 120.2 | 255.9 | 230.3 | 270.0 | 185.5 | 291.5 | 111.3 |
|                                | 80                | 301.1               | 284.2 | 313.2 | 249.6 | 334.7 | 193.7 | 284.7 | 271.1 | 295.2 | 238.0 | 315.1 | 183.8 | 267.2 | 257.3 | 276.3 | 225.8 | 294.4 | 173.2 |
|                                | 85                | 314.1               | 307.6 | 322.8 | 281.8 | 338.3 | 240.4 | 297.4 | 293.5 | 304.8 | 269.0 | 318.9 | 229.1 | 279.6 | 278.8 | 285.8 | 255.6 | 298.4 | 217.1 |
|                                | 90                | 327.9               | 327.1 | 334.5 | 306.9 | 346.3 | 275.1 | 310.7 | 310.7 | 316.3 | 293.2 | 326.8 | 262.7 | 292.5 | 292.5 | 297.0 | 278.8 | 306.2 | 249.5 |

**Table 37. Gross cooling capacities 25 tons three phase high efficiency T/YH\*300G3,4,W (full load)**

| Air Flow<br>cfm <sup>(a)</sup> | Ent<br>DB<br>(°F) | Ambient Temperature |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                |                   | 115                 |       |       |       | 120   |       |       |       | 125   |       |       |       |       |       |       |       |       |       |
|                                |                   | Entering Wet Bulb   |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                   | 61                  |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       | 61    |       | 67    |       | 73    |       |
| MBh                            | SHC               | MBh                 | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   | MBh   | SHC   |
| 5000                           | 75                | 205.4               | 167.9 | 227.4 | 132.8 | 245.5 | 69.7  | 198.0 | 163.2 | 219.2 | 129.0 | 236.7 | 66.9  | 190.4 | 158.3 | 210.7 | 125.0 | 227.6 | 64.0  |
|                                | 80                | 210.9               | 187.2 | 226.7 | 164.0 | 247.5 | 120.9 | 203.5 | 182.0 | 218.5 | 159.5 | 238.6 | 117.2 | 195.9 | 176.5 | 210.1 | 154.8 | 229.5 | 113.4 |
|                                | 85                | 218.5               | 202.3 | 230.4 | 186.2 | 249.5 | 155.7 | 211.0 | 196.6 | 222.2 | 181.1 | 240.6 | 151.3 | 203.2 | 190.7 | 213.8 | 175.8 | 231.4 | 146.8 |
|                                | 90                | 227.3               | 215.0 | 236.7 | 202.9 | 251.5 | 180.5 | 219.5 | 208.8 | 228.4 | 197.4 | 242.5 | 175.5 | 211.5 | 202.5 | 219.8 | 191.6 | 233.4 | 170.4 |
| 6000                           | 75                | 214.2               | 179.5 | 234.6 | 143.1 | 251.7 | 78.5  | 206.5 | 174.4 | 226.0 | 138.9 | 242.5 | 75.3  | 198.5 | 169.2 | 217.1 | 134.6 | 233.0 | 72.0  |
|                                | 80                | 220.7               | 199.9 | 235.1 | 175.6 | 254.6 | 131.2 | 212.9 | 194.3 | 226.6 | 170.7 | 245.4 | 127.1 | 204.9 | 188.5 | 217.8 | 165.6 | 235.9 | 122.9 |
|                                | 85                | 229.0               | 216.0 | 239.7 | 198.8 | 257.5 | 167.2 | 221.1 | 209.8 | 231.2 | 193.3 | 248.3 | 162.5 | 213.0 | 203.6 | 222.4 | 187.7 | 238.8 | 157.6 |
|                                | 90                | 238.4               | 229.3 | 246.8 | 216.5 | 260.5 | 193.1 | 230.3 | 222.9 | 238.1 | 210.6 | 251.2 | 187.8 | 221.9 | 216.2 | 229.2 | 204.5 | 241.6 | 182.3 |
| 7000                           | 75                | 221.7               | 189.7 | 240.4 | 152.0 | 256.4 | 85.9  | 213.6 | 184.3 | 231.5 | 147.5 | 246.8 | 82.4  | 205.2 | 178.7 | 222.2 | 142.8 | 237.0 | 78.7  |
|                                | 80                | 229.1               | 211.3 | 242.1 | 185.8 | 260.3 | 140.1 | 220.9 | 205.2 | 233.2 | 180.5 | 250.7 | 135.7 | 212.6 | 199.1 | 224.1 | 175.1 | 240.8 | 131.1 |
|                                | 85                | 238.2               | 228.2 | 247.7 | 210.1 | 264.2 | 177.4 | 229.9 | 221.7 | 238.8 | 204.3 | 254.6 | 172.3 | 221.4 | 215.1 | 229.6 | 198.2 | 244.7 | 167.0 |
|                                | 90                | 248.2               | 242.4 | 255.6 | 228.7 | 268.1 | 204.4 | 239.7 | 235.5 | 246.5 | 222.4 | 258.4 | 198.7 | 230.9 | 228.5 | 237.2 | 215.9 | 248.5 | 192.8 |
| 8000                           | 75                | 227.7               | 198.6 | 244.9 | 159.6 | 268.2 | 92.0  | 219.2 | 192.8 | 235.5 | 154.6 | 258.0 | 88.1  | 210.5 | 186.8 | 225.9 | 149.6 | 247.5 | 84.0  |
|                                | 80                | 236.1               | 221.2 | 247.7 | 194.6 | 268.8 | 147.6 | 227.6 | 214.8 | 238.5 | 189.0 | 258.7 | 142.8 | 218.8 | 208.3 | 229.0 | 183.2 | 248.4 | 137.9 |
|                                | 85                | 245.9               | 239.0 | 254.3 | 220.0 | 269.5 | 186.2 | 237.3 | 232.2 | 245.0 | 213.8 | 259.5 | 180.8 | 228.4 | 225.2 | 235.5 | 207.4 | 249.2 | 175.1 |
|                                | 90                | 256.5               | 254.0 | 262.9 | 239.5 | 274.3 | 214.3 | 247.7 | 246.8 | 253.5 | 232.9 | 264.3 | 208.2 | 238.5 | 238.5 | 243.9 | 226.0 | 254.0 | 202.0 |
| 9000                           | 75                | 232.4               | 206.1 | 247.9 | 165.7 | 269.7 | 96.6  | 223.5 | 200.0 | 238.2 | 160.5 | 259.1 | 92.4  | 214.4 | 193.6 | 228.2 | 155.0 | 248.3 | 87.9  |
|                                | 80                | 241.7               | 229.8 | 252.0 | 202.0 | 271.5 | 153.8 | 232.8 | 223.0 | 242.4 | 196.0 | 261.0 | 148.6 | 223.7 | 216.1 | 232.5 | 189.9 | 250.3 | 143.3 |
|                                | 85                | 252.3               | 248.5 | 259.5 | 228.5 | 273.4 | 193.7 | 243.3 | 241.3 | 249.9 | 221.9 | 263.0 | 187.8 | 234.1 | 233.9 | 240.0 | 215.2 | 252.4 | 181.8 |
|                                | 90                | 263.5               | 263.5 | 268.9 | 249.0 | 279.2 | 222.8 | 254.3 | 254.3 | 259.1 | 241.9 | 268.8 | 216.4 | 244.8 | 244.8 | 249.1 | 234.7 | 258.1 | 209.8 |
| 10000                          | 75                | 235.6               | 212.3 | 249.6 | 170.5 | 269.8 | 99.9  | 226.4 | 205.7 | 239.5 | 164.9 | 260.5 | 95.3  | 217.0 | 199.0 | 229.2 | 159.1 | 249.2 | 90.5  |
|                                | 80                | 245.9               | 237.0 | 254.9 | 208.1 | 272.8 | 158.6 | 236.7 | 229.9 | 244.9 | 201.7 | 262.0 | 153.1 | 227.2 | 222.6 | 234.6 | 195.2 | 250.9 | 147.4 |
|                                | 85                | 257.3               | 256.6 | 263.3 | 235.7 | 275.9 | 199.7 | 247.9 | 247.9 | 253.3 | 228.7 | 265.1 | 193.5 | 238.3 | 238.3 | 243.1 | 221.6 | 254.1 | 187.1 |
|                                | 90                | 269.1               | 269.1 | 273.5 | 257.1 | 282.7 | 229.9 | 259.5 | 259.5 | 263.4 | 249.6 | 271.9 | 223.2 | 249.6 | 249.6 | 253.0 | 242.0 | 260.9 | 216.2 |
| 11000                          | 75                | 237.5               | 217.0 | 249.9 | 174.0 | 271.0 | 101.8 | 228.0 | 210.1 | 240.5 | 167.9 | 261.3 | 96.8  | 218.1 | 203.0 | 229.8 | 161.7 | 252.3 | 91.6  |
|                                | 80                | 248.8               | 242.8 | 256.3 | 212.8 | 274.0 | 162.0 | 239.2 | 235.3 | 246.0 | 206.1 | 263.6 | 156.1 | 229.3 | 227.7 | 235.4 | 199.2 | 253.4 | 150.1 |
|                                | 85                | 260.9               | 260.9 | 265.8 | 241.4 | 277.0 | 204.4 | 251.2 | 251.2 | 255.4 | 234.1 | 265.9 | 197.9 | 241.2 | 241.2 | 244.8 | 226.6 | 254.5 | 191.1 |
|                                | 90                | 273.3               | 273.3 | 276.7 | 263.8 | 284.7 | 235.7 | 263.3 | 263.3 | 266.2 | 256.0 | 273.6 | 228.5 | 253.1 | 253.1 | 255.4 | 248.0 | 262.2 | 221.2 |

**Notes:**

1. All capacities shown are gross and have not considered indoor fan heat. To obtain NET cooling capacity subtract indoor fan heat. For indoor fan heat formula, refer to appropriate airflow table notes.
  2. MBh = Total Gross Capacity
  3. SHC = Sensible Heat Capacity
  4. \*Indicates both downflow and horizontal units.
- (a) For 5000, 6000, and 7000 cfm-Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 38. Evaporator fan performance 12½ tons TS\*150F downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |  |      |     |      |   |  |      |      |      |      |      |      |      |      |  |
|--|-----|------|-----|------|-----|------|--|------|-----|------|---|--|------|------|------|------|------|------|------|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |  | 0.40 |     | 0.50 |   | 0.60   |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |  |      |     |      | 3-hp Standard Motor Drive                                       |  |      |      |      |      |      |      |      |      |  |
| 4000   | 460 | 0.65 | 499 | 0.74 | 536 | 0.84 | 571  | 0.95 | 605 | 1.05 | 638   | 1.16   | 669  | 1.27 | 701  | 1.38 | 731  | 1.50 | 761  | 1.61 |  |
| 4500   | 507 | 0.89 | 543 | 1.00 | 577 | 1.11 | 610  | 1.22 | 640 | 1.34 | 671   | 1.46   | 700  | 1.58 | 729  | 1.70 | 757  | 1.83 | 785  | 1.95 |  |
| 5000   | 556 | 1.20 | 589 | 1.32 | 620 | 1.43 | 650  | 1.55 | 679 | 1.68 | 707   | 1.81   | 734  | 1.95 | 761  | 2.08 | 787  | 2.22 | 813  | 2.35 |  |
| 5500   | 607 | 1.59 | 635 | 1.69 | 664 | 1.82 | 692  | 1.95 | 719 | 2.09 | 745   | 2.23   | 771  | 2.37 | 796  | 2.52 | 821  | 2.67 | 845  | 2.82 |  |
| 6000   | 657 | 2.04 | 684 | 2.16 | 711 | 2.30 | 735  | 2.42 | 761 | 2.57 | 786   | 2.72   | 810  | 2.88 | 834  | 3.04 | 857  | 3.19 | 879  | 3.35 |  |
| <b>Continued</b>                                 |     |      |     |      |     |      |  |      |     |      | 3HP Standard Motor & High Static Drive Accessory <sup>(a)</sup> |  |      |      |      |      |      |      |      |      |  |
| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |  |      |     |      |   |  |      |      |      |      |      |      |      |      |  |
|  |     | 1.10 |     | 1.20 |     | 1.30 |  | 1.40 |     | 1.50 |   | 1.60   |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |  |
| 3-hp Standard Motor Drive                        |     |      |     |      |     |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |     |      |   | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |  |
| 4000   | 791 | 1.73 | 820 | 1.84 | 848 | 1.97 | 876  | 2.09 | 903 | 2.22 | 930   | 2.36   | 956  | 2.50 | 981  | 2.64 | 1006 | 2.80 | 1030 | 2.95 |  |
| 4500   | 812 | 2.08 | 839 | 2.21 | 865 | 2.34 | 892  | 2.47 | 917 | 2.60 | 943   | 2.74   | 967  | 2.88 | 992  | 3.02 | 1016 | 3.17 | 1040 | 3.32 |  |
| 5000   | 838 | 2.49 | 863 | 2.63 | 888 | 2.77 | 913  | 2.91 | 936 | 3.05 | 960   | 3.20   | 984  | 3.35 | 1007 | 3.49 | 1030 | 3.64 | 1053 | 3.79 |  |
| 5500   | 868 | 2.97 | 892 | 3.12 | 915 | 3.27 | 938  | 3.42 | 961 | 3.58 | 983   | 3.73   | 1005 | 3.89 | 1027 | 4.04 | 1049 | 4.20 | 1070 | 4.36 |  |
| 6000   | 901 | 3.51 | 924 | 3.67 | 945 | 3.84 | 967  | 4.01 | 988 | 4.17 | 1009  | 4.34   | 1030 | 4.50 | 1051 | 4.67 | 1071 | 4.84 | 1092 | 5.01 |  |
| 5-hp Oversized Motor & Drive                     |     |      |     |      |     |      |  |      |     |      |   |  |      |      |      |      |      |      |      |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
8. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

(a) 3-hp Standard Motor & High Static Drive Accessory.  
 (b) Fan Sheave BK90X1 3/16 and 1VP50X7/8 Required.  
 (c) Fan Sheave BK90X1 3/16 and 1VP56X7/8 Required.

**Table 39. Evaporator fan performance 12½ tons with gas heat YS\*150F downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |  |     |      |      |      |   |  |      |      |      |      |      |      |      |      |  |
|--|-----|------|-----|------|-----|--|-----|------|------|------|---|--|------|------|------|------|------|------|------|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30   |     | 0.40 |      | 0.50 |   | 0.60   |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |  |     |      |      |      | 3-hp Standard Motor Drive                                       |  |      |      |      |      |      |      |      |      |  |
| 4000   | 471 | 0.67 | 510 | 0.77 | 546 | 0.87   | 581 | 0.98 | 614  | 1.08 | 646   | 1.19   | 678  | 1.30 | 709  | 1.42 | 739  | 1.53 | 769  | 1.64 |  |
| 4500   | 521 | 0.93 | 556 | 1.04 | 588 | 1.14   | 621 | 1.26 | 651  | 1.38 | 681   | 1.50   | 710  | 1.62 | 739  | 1.75 | 767  | 1.87 | 794  | 2.00 |  |
| 5000   | 571 | 1.25 | 603 | 1.37 | 633 | 1.48   | 662 | 1.61 | 691  | 1.74 | 719   | 1.87   | 746  | 2.00 | 772  | 2.14 | 798  | 2.28 | 824  | 2.41 |  |
| 5500   | 621 | 1.64 | 650 | 1.76 | 679 | 1.89   | 706 | 2.02 | 733  | 2.16 | 759   | 2.30   | 784  | 2.45 | 809  | 2.60 | 833  | 2.75 | 857  | 2.90 |  |
| 6000   | 674 | 2.11 | 700 | 2.24 | 726 | 2.37   | 752 | 2.52 | 776  | 2.66 | 800   | 2.81   | 825  | 2.97 | 848  | 3.13 | 871  | 3.29 | 893  | 3.45 |  |
| <b>Continued</b>                                 |     |      |     |      |     |  |     |      |      |      | 3HP Standard Motor & High Static Drive Accessory <sup>(a)</sup> |  |      |      |      |      |      |      |      |      |  |
| External Static Pressure (Inches of Water)       |     |      |     |      |     |  |     |      |      |      |   |  |      |      |      |      |      |      |      |      |  |
|  |     | 1.10 |     | 1.20 |     | 1.30   |     | 1.40 |      | 1.50 |   | 1.60   |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |  |
| 3-hp Standard Motor Drive                        |     |      |     |      |     | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |     |      |      |      |   | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |  |
| 4000   | 799 | 1.76 | 827 | 1.88 | 856 | 2.00   | 883 | 2.13 | 910  | 2.26 | 937   | 2.40   | 963  | 2.54 | 988  | 2.68 | 1013 | 2.84 | 1037 | 3.00 |  |
| 4500   | 821 | 2.13 | 848 | 2.25 | 875 | 2.38   | 901 | 2.51 | 926  | 2.65 | 951   | 2.79   | 976  | 2.93 | 1000 | 3.07 | 1025 | 3.22 | 1048 | 3.37 |  |
| 5000   | 849 | 2.55 | 874 | 2.69 | 899 | 2.83   | 923 | 2.97 | 947  | 3.12 | 971   | 3.26   | 994  | 3.41 | 1017 | 3.55 | 1040 | 3.71 | 1063 | 3.86 |  |
| 5500   | 881 | 3.05 | 904 | 3.20 | 927 | 3.35   | 950 | 3.50 | 972  | 3.66 | 994   | 3.81   | 1016 | 3.97 | 1038 | 4.13 | 1060 | 4.28 | 1081 | 4.44 |  |
| 6000   | 915 | 3.61 | 937 | 3.78 | 959 | 3.94   | 980 | 4.11 | 1001 | 4.27 | 1022  | 4.44   | 1043 | 4.60 | 1064 | 4.78 | 1084 | 4.94 | 1104 | 5.11 |  |
| 5-hp Oversized Motor & Drive                     |     |      |     |      |     |  |     |      |      |      |   |  |      |      |      |      |      |      |      |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
8. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

(a) 3-hp Standard Motor & High Static Drive Accessory.

(b) Fan Sheave BK90X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK90X1 3/16 and 1VP56X7/8 Required.



## Performance Data

**Table 40. Evaporator fan performance 15 tons TS\*180F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |     |                              |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------------------------------|-----|------|-----|------|-----|------|-----|------|--|
| 0.10   |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |     | 0.60 |     | 0.70                         |     | 0.80 |     | 0.90 |     | 1.00 |     |      |  |
| cfm  | rpm | bhp                          | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |     |                              |     |      |     |      |     |      |     |      |  |
| 4800   | —   | —    | —   | —    | 462 | 0.98 | 494 | 1.10 | 526 | 1.24 | 559 | 1.40                         | 589 | 1.55 | 618 | 1.70 | 648 | 1.87 | 675 | 2.05 |  |
| 5400   | —   | —    | 464 | 1.14 | 496 | 1.28 | 525 | 1.42 | 554 | 1.56 | 582 | 1.71                         | 611 | 1.89 | 640 | 2.06 | 666 | 2.23 | 692 | 2.40 |  |
| 6000   | 463 | 1.30 | 500 | 1.48 | 531 | 1.65 | 559 | 1.80 | 585 | 1.95 | 611 | 2.11                         | 636 | 2.28 | 662 | 2.46 | 689 | 2.66 | 714 | 2.85 |  |
| 6600   | 502 | 1.70 | 537 | 1.88 | 567 | 2.08 | 594 | 2.27 | 619 | 2.42 | 643 | 2.59                         | 666 | 2.76 | 689 | 2.94 | 712 | 3.13 | 736 | 3.35 |  |
| 7200   | 541 | 2.16 | 574 | 2.37 | 603 | 2.58 | 630 | 2.79 | 654 | 2.98 | 676 | 3.16                         | 698 | 3.34 | 720 | 3.52 | 741 | 3.72 | 762 | 3.92 |  |
| 3-hp Standard Motor Drive                        |     |      |     |      |     |      |     |      |     |      |     | 5-hp Oversized Motor & Drive |     |      |     |      |     |      |     |      |  |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |   |     |      |     |      |     |                              |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|---|-----|------|-----|------|-----|------------------------------|-----|------|-----|------|-----|------|-----|------|--|
| 1.10                                       |     | 1.20 |     | 1.30 |     | 1.40  |     | 1.50 |     | 1.60 |     | 1.70                         |     | 1.80 |     | 1.90 |     | 2.00 |     |      |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp   | rpm | bhp  | rpm | bhp  | rpm | bhp                          | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & Drive                |     |      |     |      |     | 3-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     | 5-hp Oversized Motor & Drive |     |      |     |      |     |      |     |      |  |
| 4800                                       | 701 | 2.23 | 727 | 2.41 | 752 | 2.60  | 776 | 2.80 | 799 | 3.00 | 822 | 3.20                         | 844 | 3.39 | 865 | 3.59 | 886 | 3.78 | 907 | 3.98 |  |
| 5400                                       | 718 | 2.59 | 744 | 2.79 | 768 | 2.98  | 791 | 3.18 | 813 | 3.39 | 836 | 3.61                         | 857 | 3.83 | 879 | 4.05 | 899 | 4.27 | 920 | 4.50 |  |
| 6000                                       | 738 | 3.04 | 760 | 3.22 | 784 | 3.43  | 808 | 3.65 | 831 | 3.86 | 852 | 4.08                         | 873 | 4.30 | 893 | 4.53 | 913 | 4.77 | 933 | 5.01 |  |
| 6600                                       | 760 | 3.56 | 783 | 3.77 | 805 | 3.98  | 826 | 4.18 | 847 | 4.40 | 868 | 4.63                         | 890 | 4.87 | 911 | 5.10 | 930 | 5.35 | 949 | 5.59 |  |
| 7200                                       | 783 | 4.13 | 805 | 4.37 | 827 | 4.60  | 848 | 4.84 | 869 | 5.06 | 889 | 5.29                         | 907 | 5.51 | 927 | 5.75 | —   | —    | —   | —    |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 70, p. 101](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 71, p. 103](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 72, p. 103](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. Refer to [Table 73, p. 104](#) to determine additional static pressure drop due to other options/accessories.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
8. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

**Table 41. Evaporator fan performance 15 tons with gas heat YS\*180F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |                             |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|-----------------------------|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |                             | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00 |  |
| cfm  | rpm | bhp  | rpm                         | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      | 3-hp Standard Motor Drive   |      |     |      |     |      |     |      |     |      |  |
| 4800   | —   | —    | —   | —    | 475 | 1.02 | 506 | 1.15 | 539 | 1.30 | 571                         | 1.46 | 600 | 1.61 | 630 | 1.77 | 659 | 1.94 | 686 | 2.12 |  |
| 5400   | —   | —    | 481 | 1.22 | 511 | 1.35 | 540 | 1.49 | 568 | 1.63 | 596                         | 1.80 | 626 | 1.97 | 653 | 2.15 | 679 | 2.31 | 705 | 2.49 |  |
| 6000   | 486 | 1.41 | 520 | 1.59 | 549 | 1.75 | 576 | 1.89 | 601 | 2.05 | 627                         | 2.21 | 652 | 2.39 | 679 | 2.58 | 704 | 2.78 | 729 | 2.97 |  |
| 6600   | 529 | 1.84 | 560 | 2.03 | 588 | 2.22 | 613 | 2.38 | 637 | 2.55 | 660                         | 2.72 | 684 | 2.90 | 706 | 3.08 | 730 | 3.29 | 754 | 3.51 |  |
| 7200   | 572 | 2.36 | 601 | 2.56 | 627 | 2.77 | 651 | 2.96 | 674 | 3.14 | 696                         | 3.32 | 717 | 3.50 | 739 | 3.69 | 759 | 3.90 | 781 | 4.11 |  |
|  |     |      |     |      |     |      |     |      |     |      | 5hp Oversized Motor & Drive |      |     |      |     |      |     |      |     |      |  |

**Continued**

| External Static Pressure (Inches of Water) |     |      |     |                     |     |      |     |   |     |      |     |                              |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|---------------------|-----|------|-----|---|-----|------|-----|------------------------------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20                |     | 1.30 |     | 1.40  |     | 1.50 |     | 1.60                         |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp  | rpm | bhp                 | rpm | bhp  | rpm | bhp   | rpm | bhp  | rpm | bhp                          | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & Drive                |     |      |     |                     |     |      |     | 3-hp Standard Motor & High Static Drive Accessory |     |      |     | 5-hp Oversized Motor & Drive |     |      |     |      |     |      |     |      |  |
| 4800                                       | 711 | 2.30 | 737 | 2.49                | 761 | 2.68 | 785 | 2.88  | 808 | 3.08 | 831 | 3.27                         | 853 | 3.47 | 874 | 3.66 | 894 | 3.86 | 915 | 4.06 |  |
| 5400                                       | 732 | 2.69 | 756 | 2.88                | 779 | 3.08 | 802 | 3.29  | 825 | 3.50 | 847 | 3.72                         | 868 | 3.94 | 889 | 4.16 | 910 | 4.39 | 930 | 4.61 |  |
| 6000                                       | 752 | 3.15 | 775 | 3.35 <sup>(a)</sup> | 799 | 3.56 | 822 | 3.78  | 844 | 4.00 | 865 | 4.22                         | 885 | 4.44 | 906 | 4.68 | 926 | 4.92 | 946 | 5.16 |  |
| 6600                                       | 777 | 3.72 | 800 | 3.93                | 821 | 4.13 | 841 | 4.34  | 863 | 4.57 | 885 | 4.81                         | 906 | 5.04 | 925 | 5.28 | 945 | 5.53 | —   | —    |  |
| 7200                                       | 803 | 4.34 | 825 | 4.58                | 846 | 4.81 | 867 | 5.04  | 887 | 5.26 | 905 | 5.49                         | 924 | 5.72 | —   | —    | —   | —    | —   | —    |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 70, p. 101](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 71, p. 103](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 72, p. 103](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. Refer to [Table 73, p. 104](#) to determine additional static pressure drop due to other options/accessories.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
8. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating ranges.

(a) 3-hp Standard Motor &amp; High Static Drive Accessory



## Performance Data

**Table 42. Evaporator fan performance 17½ tons TS\*210F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|-----|---|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |     | 0.60  |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00 |  |
| cfm  | rpm | bhp   | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |  |
| 5600   | —   | —    | —   | —    | 516 | 1.44 | 545 | 1.58 | 572 | 1.73 | 599 | 1.88  | 628 | 2.07 | 656 | 2.25 | 682 | 2.43 | 707 | 2.60 |  |
| 6300   | —   | —    | 529 | 1.74 | 559 | 1.92 | 586 | 2.08 | 611 | 2.24 | 636 | 2.40  | 660 | 2.58 | 684 | 2.76 | 710 | 2.97 | 735 | 3.18 |  |
| 7000   | 541 | 2.07 | 575 | 2.28 | 603 | 2.50 | 629 | 2.69 | 653 | 2.87 | 675 | 3.04  | 698 | 3.22 | 720 | 3.41 | 741 | 3.61 | 763 | 3.82 |  |
| 7700   | 589 | 2.72 | 620 | 2.94 | 648 | 3.18 | 672 | 3.40 | 695 | 3.61 | 716 | 3.80  | 738 | 4.00 | 758 | 4.20 | 778 | 4.40 | 798 | 4.60 |  |
| 8400   | 636 | 3.47 | 666 | 3.74 | 693 | 3.98 | 716 | 4.23 | 738 | 4.47 | 759 | 4.69  | 779 | 4.91 | 798 | 5.11 | 817 | 5.33 | 836 | 5.55 |  |
| 5-hp Standard Motor Drive                        |     |      |     |      |     |      |     |      |     |      |     | 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |  |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor Drive                  |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |  |
| 5600                                       | 732 | 2.79 | 758 | 3.00 | 782 | 3.20 | 805 | 3.41 | 827 | 3.62 | 849   | 3.84 | 870 | 4.06 | 891 | 4.29 | 912 | 4.53 | 932 | 4.76 |  |
| 6300                                       | 759 | 3.38 | 781 | 3.58 | 803 | 3.77 | 826 | 3.99 | 849 | 4.22 | 870   | 4.45 | 891 | 4.68 | 911 | 4.92 | 930 | 5.15 | 950 | 5.40 |  |
| 7000                                       | 786 | 4.05 | 809 | 4.28 | 831 | 4.51 | 852 | 4.73 | 872 | 4.94 | 891   | 5.16 | 912 | 5.40 | 932 | 5.66 | 953 | 5.92 | 972 | 6.17 |  |
| 7700                                       | 817 | 4.82 | 837 | 5.06 | 858 | 5.31 | 879 | 5.56 | 900 | 5.82 | 919   | 6.06 | 938 | 6.31 | 956 | 6.55 | 974 | 6.79 | 992 | 7.04 |  |
| 8400                                       | 854 | 5.77 | 872 | 6.01 | 890 | 6.24 | 908 | 6.49 | 927 | 6.76 | 947   | 7.04 | 965 | 7.32 | 984 | 7.58 | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Drive             |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
9. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

**Table 43. Evaporator fan performance 17½ tons with gas heat YS\*210F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |     |   |     |      |     |                                |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|-----|---|-----|------|-----|--------------------------------|-----|------|-----|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |     | 0.60  |     | 0.70 |     | 0.80                           |     | 0.90 |     | 1.00 |  |
| cfm  | rpm | bhp   | rpm | bhp  | rpm | bhp                            | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |     |   |     |      |     |                                |     |      |     |      |  |
| 5600   | —   | —    | —   | —    | 532 | 1.51 | 560 | 1.66 | 587 | 1.81 | 615 | 1.98  | 643 | 2.16 | 671 | 2.35                           | 696 | 2.52 | 720 | 2.70 |  |
| 6300   | 519 | 1.68 | 550 | 1.87 | 577 | 2.03 | 603 | 2.19 | 628 | 2.35 | 653 | 2.52  | 676 | 2.70 | 702 | 2.90                           | 727 | 3.11 | 751 | 3.31 |  |
| 7000   | 571 | 2.26 | 599 | 2.46 | 625 | 2.66 | 649 | 2.84 | 672 | 3.01 | 694 | 3.19  | 716 | 3.38 | 738 | 3.58                           | 760 | 3.79 | 783 | 4.01 |  |
| 7700   | 622 | 2.97 | 649 | 3.19 | 673 | 3.41 | 695 | 3.61 | 717 | 3.81 | 738 | 4.00  | 758 | 4.19 | 778 | 4.40                           | 798 | 4.61 | 818 | 4.83 |  |
| 8400   | 672 | 3.79 | 698 | 4.03 | 721 | 4.28 | 744 | 4.53 | 763 | 4.74 | 783 | 4.95  | 802 | 5.16 | 821 | 5.37                           | 840 | 5.60 | 858 | 5.82 |  |
| 5-hp Standard Motor Drive                        |     |      |     |      |     |      |     |      |     |      |     | 5-hp Standard Motor & High Static Drive Accessory |     |      |     | 7.5-hp Oversized Motor & Drive |     |      |     |      |  |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|---|-----|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50  |     | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp   | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor Drive                  |     |      |     |      |     |      |     |      |     | 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |  |
| 5600                                       | 746 | 2.90 | 771 | 3.11 | 794 | 3.31 | 817 | 3.52 | 839 | 3.73  | 860 | 3.96 | 882 | 4.19 | 902 | 4.42 | 923 | 4.65 | 943 | 4.88 |  |
| 6300                                       | 774 | 3.51 | 796 | 3.71 | 818 | 3.92 | 842 | 4.15 | 864 | 4.38  | 884 | 4.61 | 905 | 4.84 | 924 | 5.08 | 944 | 5.32 | 963 | 5.57 |  |
| 7000                                       | 805 | 4.24 | 827 | 4.47 | 849 | 4.69 | 869 | 4.91 | 888 | 5.13  | 908 | 5.37 | 929 | 5.62 | 950 | 5.88 | 969 | 6.13 | 987 | 6.38 |  |
| 7700                                       | 838 | 5.07 | 859 | 5.32 | 880 | 5.57 | 900 | 5.82 | 920 | 6.07  | 939 | 6.31 | 956 | 6.55 | 974 | 6.79 | 992 | 7.05 | —   | —    |  |
| 8400                                       | 876 | 6.05 | 894 | 6.29 | 912 | 6.55 | 932 | 6.82 | 951 | 7.10  | 969 | 7.37 | 988 | 7.64 | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Drive             |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
9. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.



## Performance Data

**Table 44. Evaporator fan performance 20 tons TS\*240F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |                           |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|---------------------------|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |                           | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00 |  |
| cfm  | rpm | bhp  | rpm                       | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor Drive |      |     |      |     |      |     |      |     |      |  |
| 6400   | —   | —    | 536 | 1.81 | 565 | 2.00 | 592 | 2.16 | 617 | 2.32 | 642                       | 2.49 | 665 | 2.66 | 689 | 2.85 | 714 | 3.05 | 739 | 3.26 |  |
| 7200   | 555 | 2.25 | 588 | 2.46 | 616 | 2.68 | 641 | 2.89 | 665 | 3.06 | 687                       | 3.24 | 709 | 3.43 | 730 | 3.62 | 751 | 3.82 | 772 | 4.02 |  |
| 8000   | 610 | 3.03 | 639 | 3.26 | 667 | 3.50 | 691 | 3.74 | 714 | 3.97 | 735                       | 4.17 | 755 | 4.37 | 775 | 4.57 | 795 | 4.78 | 814 | 4.99 |  |
| 8800   | 666 | 4.01 | 693 | 4.25 | 718 | 4.49 | 742 | 4.76 | 764 | 5.02 | 784                       | 5.27 | 803 | 5.49 | 822 | 5.71 | 840 | 5.93 | 858 | 6.15 |  |
| 9600   | 718 | 5.07 | 747 | 5.42 | 770 | 5.66 | 794 | 5.97 | 814 | 6.26 | 834                       | 6.53 | 853 | 6.81 | 871 | 7.06 | 888 | 7.29 | 905 | 7.53 |  |
| 7.5-hp Oversized Motor & Drive                   |     |      |     |      |     |      |     |      |     |      |                           |      |     |      |     |      |     |      |     |      |  |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor Drive                  |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |  |
| 6400                                       | 763 | 3.47 | 786 | 3.67 | 807 | 3.87 | 829 | 4.08 | 851 | 4.31 | 873   | 4.55 | 894 | 4.78 | 914 | 5.01 | 934 | 5.26 | 953 | 5.50 |  |
| 7200                                       | 794 | 4.25 | 817 | 4.49 | 839 | 4.73 | 860 | 4.96 | 880 | 5.19 | 899   | 5.41 | 918 | 5.64 | 938 | 5.88 | 958 | 6.15 | 978 | 6.41 |  |
| 8000                                       | 833 | 5.21 | 852 | 5.44 | 871 | 5.69 | 891 | 5.94 | 911 | 6.21 | 931   | 6.47 | 950 | 6.72 | 968 | 6.98 | 986 | 7.23 | —   | —    |  |
| 8800                                       | 876 | 6.38 | 894 | 6.62 | 911 | 6.86 | 928 | 7.11 | 945 | 7.36 | 963   | 7.65 | 981 | 7.94 | —   | —    | —   | —    | —   | —    |  |
| 9600                                       | 921 | 7.77 | 938 | 8.01 | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Drive             |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
9. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

**Table 45. Evaporator fan performance 20 tons with gas heat YS\*240F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |                           |     |      |     |      |     |      |     |      |     |                     |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|---------------------------|-----|------|-----|------|-----|------|-----|------|-----|---------------------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50                      |     | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00                |  |
| cfm  | rpm | bhp                       | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp                 |  |
| 5-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     | 5-hp Standard Motor Drive |     |      |     |      |     |      |     |      |     |                     |  |
| 6400   | 527 | 1.76 | 557 | 1.95 | 584 | 2.11 | 610 | 2.27 | 634 | 2.44                      | 658 | 2.61 | 682 | 2.79 | 707 | 2.99 | 732 | 3.20 | 756 | 3.41                |  |
| 7200   | 585 | 2.45 | 613 | 2.66 | 638 | 2.86 | 662 | 3.05 | 685 | 3.22                      | 706 | 3.41 | 728 | 3.60 | 749 | 3.79 | 770 | 4.00 | 792 | 4.23                |  |
| 8000   | 641 | 3.27 | 670 | 3.54 | 693 | 3.76 | 716 | 3.99 | 737 | 4.19                      | 757 | 4.39 | 777 | 4.59 | 797 | 4.80 | 816 | 5.02 | 835 | 5.24 <sup>(a)</sup> |  |
| 8800   | 703 | 4.36 | 727 | 4.59 | 749 | 4.84 | 770 | 5.10 | 790 | 5.34                      | 810 | 5.57 | 828 | 5.79 | 847 | 6.01 | 864 | 6.23 | 882 | 6.47                |  |
| 9600   | 761 | 5.57 | 784 | 5.83 | 806 | 6.14 | 826 | 6.42 | 845 | 6.69                      | 864 | 6.96 | 881 | 7.19 | 898 | 7.44 | 914 | 7.66 | 931 | 7.92                |  |
| 7.5-hp Oversized Motor & Drive                   |     |      |     |      |     |      |     |      |     |                           |     |      |     |      |     |      |     |      |     |                     |  |

**Continued**

| External Static Pressure (Inches of Water) |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|---|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30  |     | 1.40 |     | 1.50 |     | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp   | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor Drive                  |     |      |     |      |     | 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |     |      |     |      |  |
| 6400                                       | 779 | 3.61 | 800 | 3.81 | 822 | 4.02  | 845 | 4.25 | 867 | 4.48 | 888 | 4.71 | 908 | 4.95 | 928 | 5.19 | 947 | 5.43 | 966 | 5.68 |  |
| 7200                                       | 814 | 4.46 | 836 | 4.70 | 857 | 4.93  | 878 | 5.16 | 897 | 5.38 | 916 | 5.61 | 936 | 5.86 | 956 | 6.12 | 976 | 6.39 | 994 | 6.64 |  |
| 8000                                       | 853 | 5.46 | 873 | 5.72 | 893 | 5.97  | 913 | 6.24 | 933 | 6.50 | 952 | 6.76 | 970 | 7.01 | 988 | 7.26 | —   | —    | —   | —    |  |
| 8800                                       | 899 | 6.70 | 916 | 6.94 | 934 | 7.19  | 951 | 7.46 | 969 | 7.74 | 988 | 8.03 | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 9600                                       | —   | —    | —   | —    | —   | —   | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Drive             |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.
9. For 380V/60 Hz units, the oversized motor is used as the standard motor. Refer to "Motor & Sheave/Fan Speed" tables to determine operating range.

(a) 5-hp Standard Motor &amp; High Static Drive Accessory



## Performance Data

**Table 46. Evaporator fan performance 25 tons TS\*300F standard refrigeration system downflow or horizontal**

| cfm  | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |      |
|--|--|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|------|------|
|  | 0.10                                       |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |   | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
|  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 7.5-hp Standard Motor & Low Static Drive Accessory |  |      |      |      |      |      |      |      |      | 7.5-hp Standard Motor & Drive                       |      |      |      |      |      |      |      |      |      |      |
| 7000   | —  | —    | —    | —    | 603  | 2.50 | 629  | 2.69 | 653  | 2.87  | 675  | 3.04 | 698  | 3.22 | 720  | 3.41 | 741  | 3.61 | 763  | 3.82 |
| 7500   | —  | —    | 607  | 2.74 | 635  | 2.97 | 660  | 3.18 | 683  | 3.38  | 704  | 3.57 | 726  | 3.76 | 747  | 3.95 | 767  | 4.16 | 787  | 4.36 |
| 8000   | 610  | 3.03 | 639  | 3.26 | 667  | 3.50 | 691  | 3.74 | 714  | 3.97  | 735  | 4.17 | 755  | 4.37 | 775  | 4.57 | 795  | 4.78 | 814  | 4.99 |
| 8500   | 644  | 3.61 | 673  | 3.86 | 699  | 4.09 | 723  | 4.36 | 745  | 4.61  | 765  | 4.83 | 785  | 5.04 | 804  | 5.26 | 823  | 5.48 | 841  | 5.69 |
| 9000   | 677  | 4.22 | 705  | 4.50 | 731  | 4.77 | 755  | 5.05 | 776  | 5.31  | 796  | 5.57 | 816  | 5.81 | 834  | 6.03 | 852  | 6.25 | 870  | 6.48 |
| 9500   | 714  | 4.98 | 739  | 5.25 | 764  | 5.53 | 787  | 5.81 | 807  | 6.08  | 828  | 6.37 | 846  | 6.63 | 864  | 6.87 | 882  | 7.10 | 899  | 7.34 |
| 10000  | 747  | 5.73 | 773  | 6.07 | 797  | 6.35 | 818  | 6.62 | 839  | 6.93  | 859  | 7.24 | 878  | 7.52 | 896  | 7.81 | 912  | 8.04 | 929  | 8.30 |
| 10500  | 785  | 6.68 | 806  | 6.93 | 829  | 7.25 | 851  | 7.54 | 872  | 7.86  | 891  | 8.18 | 908  | 8.48 | —    | —    | —    | —    | —    | —    |
| 11000  | 816  | 7.53 | 840  | 7.90 | 864  | 8.27 | 885  | 8.58 | —    | —   | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    |
| 7.5-hp Standard Motor & Drive                      |  |      |      |      |      |      |      |      |      | 7.5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |      |

Continued

| cfm   | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |
|---|--|------|------|------|------|------|------|------|------|------|
|   | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      |
|   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 7.5-hp Standard Motor & Sheaves                     |  |      |      |      |      |      |      |      |      |      |
| 7000  | 786  | 4.05 | 809  | 4.28 | 831  | 4.51 | 852  | 4.73 | 872  | 4.94 |
| 7500  | 808  | 4.59 | 829  | 4.82 | 850  | 5.07 | 871  | 5.31 | 892  | 5.56 |
| 8000  | 833  | 5.21 | 852  | 5.44 | 871  | 5.69 | 891  | 5.94 | 911  | 6.21 |
| 8500  | 860  | 5.92 | 877  | 6.15 | 895  | 6.39 | 913  | 6.64 | 932  | 6.91 |
| 9000  | 887  | 6.71 | 904  | 6.95 | 921  | 7.19 | 938  | 7.44 | 955  | 7.70 |
| 9500  | 915  | 7.58 | 932  | 7.83 | 949  | 8.08 | 965  | 8.33 | 981  | 8.60 |
| 10000   | 945  | 8.55 | —    | —    | —    | —    | —    | —    | —    | —    |
| 10500   | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    |
| 11000   | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    |
| 7.5-hp Standard Motor & High Static Drive Accessory |  |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

**Table 47. Evaporator fan performance 25 tons with gas heat YS\*300F standard refrigeration system downflow or horizontal**

| External Static Pressure (Inches of Water)          |     |      |     |      |     |      |     |      |     |      |                               |      |     |      |     |      |     |      |     |      |  |
|---|-----|------|-----|------|-----|------|-----|------|-----|------|-------------------------------|------|-----|------|-----|------|-----|------|-----|------|--|
|   |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |                               | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00 |  |
| cfm   | rpm | bhp  | rpm                           | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 7.5-hp Standard Motor & Low Static Drive Accessory  |     |      |     |      |     |      |     |      |     |      | 7.5-hp Standard Motor & Drive |      |     |      |     |      |     |      |     |      |  |
| 7000  | —   | —    | 599 | 2.46 | 625 | 2.66 | 649 | 2.84 | 672 | 3.01 | 694                           | 3.19 | 716 | 3.38 | 738 | 3.58 | 760 | 3.79 | 783 | 4.01 |  |
| 7500  | 607 | 2.75 | 634 | 2.97 | 659 | 3.18 | 682 | 3.38 | 704 | 3.57 | 725                           | 3.76 | 746 | 3.94 | 767 | 4.15 | 787 | 4.36 | 807 | 4.57 |  |
| 8000  | 641 | 3.27 | 670 | 3.54 | 693 | 3.76 | 716 | 3.99 | 737 | 4.19 | 757                           | 4.39 | 777 | 4.59 | 797 | 4.80 | 816 | 5.02 | 835 | 5.24 |  |
| 8500  | 678 | 3.89 | 705 | 4.16 | 728 | 4.42 | 750 | 4.67 | 770 | 4.89 | 790                           | 5.11 | 808 | 5.30 | 827 | 5.53 | 846 | 5.75 | 864 | 5.98 |  |
| 9000  | 717 | 4.63 | 740 | 4.86 | 763 | 5.14 | 785 | 5.43 | 804 | 5.66 | 823                           | 5.89 | 841 | 6.12 | 859 | 6.34 | 877 | 6.57 | 894 | 6.81 |  |
| 9500  | 752 | 5.38 | 777 | 5.68 | 799 | 5.97 | 818 | 6.23 | 838 | 6.50 | 856                           | 6.76 | 874 | 7.00 | 891 | 7.24 | 908 | 7.48 | 925 | 7.72 |  |
| 10000   | 791 | 6.27 | 814 | 6.56 | 834 | 6.86 | 854 | 7.16 | 872 | 7.43 | 891                           | 7.73 | 908 | 7.99 | 924 | 8.24 | 940 | 8.47 | —   | —    |  |
| 10500   | 828 | 7.23 | 850 | 7.55 | 869 | 7.80 | 889 | 8.15 | 907 | 8.45 | —                             | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 11000   | 867 | 8.33 | 886 | 8.60 | —   | —    | —   | —    | —   | —    | —                             | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |                               |      |     |      |     |      |     |      |     |      |  |

**Continued**

| External Static Pressure (Inches of Water)          |     |      |     |      |     |      |     |      |     |      |  |
|---|-----|------|-----|------|-----|------|-----|------|-----|------|--|
|   |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |  |
| cfm   | rpm | bhp  |  |
| 7.5-hp Standard Motor & Drive                       |     |      |     |      |     |      |     |      |     |      |  |
| 7000  | 805 | 4.24 | 827 | 4.47 | 849 | 4.69 | 869 | 4.91 | 888 | 5.13 |  |
| 7500  | 828 | 4.82 | 850 | 5.06 | 871 | 5.31 | 891 | 5.55 | 911 | 5.79 |  |
| 8000  | 853 | 5.46 | 873 | 5.72 | 893 | 5.97 | 913 | 6.24 | 933 | 6.50 |  |
| 8500  | 882 | 6.21 | 900 | 6.45 | 918 | 6.71 | 936 | 6.97 | 955 | 7.26 |  |
| 9000  | 911 | 7.04 | 928 | 7.29 | 945 | 7.55 | 961 | 7.80 | 979 | 8.08 |  |
| 9500  | 941 | 7.96 | 957 | 8.21 | 974 | 8.48 | —   | —    | —   | —    |  |
| 10000   | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 10500   | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 11000   | —   | —    | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.



## Performance Data

**Table 48. Evaporator fan performance—12½ tons—TH\*150G**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |      |  |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|--|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |  | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |     | 1.00 |  |
| cfm  | rpm | bhp  | rpm  | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     |      | 3-hp Standard Motor & Drive                                      |      |     |      |     |      |     |      |     |      |  |
| 2500 <sup>(a)</sup>                              | -   | -    | -   | -    | 370 | 0.32 | 417 | 0.43 | 458 | 0.54 | 496  | 0.66 | 531 | 0.79 | 564 | 0.91 | 593 | 1.03 | 623 | 1.16 |  |
| 3000 <sup>(a)</sup>                              | -   | -    | -   | -    | 386 | 0.42 | 430 | 0.54 | 472 | 0.67 | 508  | 0.80 | 543 | 0.94 | 576 | 1.08 | 606 | 1.22 | 635 | 1.35 |  |
| 3500 <sup>(a)</sup>                              | -   | -    | 360 | 0.43 | 404 | 0.55 | 447 | 0.68 | 486 | 0.81 | 522  | 0.96 | 556 | 1.11 | 588 | 1.26 | 619 | 1.40 | 647 | 1.55 |  |
| 4000   | -   | -    | 387 | 0.59 | 426 | 0.71 | 465 | 0.85 | 502 | 0.99 | 537  | 1.14 | 570 | 1.29 | 602 | 1.44 | 631 | 1.59 | 660 | 1.74 |  |
| 4500   | 377 | 0.66 | 417 | 0.79 | 452 | 0.92 | 486 | 1.06 | 521 | 1.20 | 555  | 1.36 | 586 | 1.50 | 617 | 1.65 | 645 | 1.80 | 673 | 1.95 |  |
| 5000   | 409 | 0.88 | 448 | 1.03 | 481 | 1.17 | 512 | 1.30 | 542 | 1.44 | 573  | 1.59 | 604 | 1.74 | 633 | 1.89 | 662 | 2.04 | 688 | 2.18 |  |
| 5500   | 441 | 1.14 | 479 | 1.30 | 510 | 1.44 | 539 | 1.58 | 567 | 1.71 | 594  | 1.85 | 624 | 2.01 | 652 | 2.16 | 679 | 2.31 | 705 | 2.46 |  |
| 6000   | 474 | 1.42 | 510 | 1.59 | 540 | 1.74 | 568 | 1.88 | 594 | 2.01 | 620  | 2.15 | 645 | 2.29 | 671 | 2.45 | 698 | 2.62 | 724 | 2.81 |  |
|  |     |      |     |      |     |      |     |      |     |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |     |      |     |      |     |      |     |      |  |

Continued

| External Static Pressure (Inches of Water)                       |     |      |     |      |     |      |     |      |     |      |  |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|--|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |  | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp  | rpm  | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |     |      |     |      |     |      |     |      |     |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |     |      |     |      |     |      |     |      |  |
| 2500 <sup>(a)</sup>  | 650 | 1.28 | 676 | 1.40 | 701 | 1.52 | 726 | 1.64 | 748 | 1.76 | 771  | 1.87 | 793 | 1.98 | 814 | 2.09 | 835 | 2.21 | 855 | 2.32 |  |
| 3000 <sup>(a)</sup>  | 662 | 1.48 | 688 | 1.61 | 713 | 1.74 | 737 | 1.86 | 760 | 1.98 | 783  | 2.11 | 806 | 2.23 | 827 | 2.36 | 847 | 2.48 | 867 | 2.61 |  |
| 3500 <sup>(a)</sup>  | 674 | 1.69 | 701 | 1.82 | 726 | 1.96 | 750 | 2.09 | 772 | 2.22 | 795  | 2.35 | 818 | 2.49 | 839 | 2.64 | 859 | 2.78 | 879 | 2.96 |  |
| 4000   | 687 | 1.89 | 713 | 2.04 | 738 | 2.18 | 762 | 2.32 | 785 | 2.47 | 808  | 2.62 | 829 | 2.79 | 851 | 2.97 | 871 | 3.17 | 891 | 3.40 |  |
| 4500   | 700 | 2.10 | 726 | 2.26 | 750 | 2.41 | 775 | 2.58 | 798 | 2.75 | 821  | 2.95 | 842 | 3.15 | 864 | 3.41 | 885 | 3.71 | 904 | 4.06 |  |
| 5000   | 714 | 2.34 | 740 | 2.50 | 765 | 2.68 | 788 | 2.87 | 811 | 3.09 | 834  | 3.36 | 855 | 3.66 | 875 | 4.02 | 897 | 4.49 | 917 | 5.04 |  |
| 5500   | 730 | 2.63 | 755 | 2.81 | 778 | 3.02 | 801 | 3.26 | 824 | 3.56 | 846  | 3.93 | 868 | 4.40 | 889 | 4.96 | 909 | 5.65 | -   | -    |  |
| 6000   | 748 | 3.02 | 772 | 3.26 | 795 | 3.54 | 818 | 3.89 | 839 | 4.32 | 860  | 4.85 | 881 | 5.51 | -   | -    | -   | -    | -   | -    |  |
|  |     |      |     |      |     |      |     |      |     |      | 5-hp Oversized Motor & Drive                                     |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.

**Table 49. Evaporator fan performance—12½ tons—THD150G—dehumidification (hot gas reheat) option**

|                     | External Static Pressure (Inches of Water)       |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |     |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|-----|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60   |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |     |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp |
|                     | 3-hp Standard Motor & Low Static Drive Accessory |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive                                      |      |      |      |      |      |      |      |      |      |     |
| 2500 <sup>(a)</sup> | —  | —    | —    | —    | 369  | 0.32 | 416  | 0.42 | 458  | 0.52 | 496  | 0.63 | 530  | 0.74 | 561  | 0.85 | 591  | 0.97 | 618  | 1.09 |     |
| 3000 <sup>(a)</sup> | —  | —    | —    | —    | 383  | 0.41 | 429  | 0.52 | 470  | 0.64 | 508  | 0.76 | 543  | 0.88 | 575  | 1.01 | 606  | 1.13 | 634  | 1.26 |     |
| 3500 <sup>(a)</sup> | —  | —    | 358  | 0.42 | 403  | 0.53 | 444  | 0.64 | 484  | 0.77 | 520  | 0.90 | 554  | 1.04 | 587  | 1.18 | 618  | 1.32 | 647  | 1.47 |     |
| 4000                | —  | —    | 386  | 0.57 | 424  | 0.67 | 464  | 0.80 | 500  | 0.93 | 535  | 1.07 | 569  | 1.21 | 600  | 1.36 | 629  | 1.52 | 658  | 1.69 |     |
| 4500                | 375  | 0.62 | 415  | 0.75 | 450  | 0.86 | 484  | 0.99 | 519  | 1.13 | 552  | 1.28 | 583  | 1.42 | 615  | 1.58 | 644  | 1.75 | 671  | 1.92 |     |
| 5000                | 407  | 0.82 | 446  | 0.97 | 479  | 1.09 | 510  | 1.22 | 540  | 1.37 | 572  | 1.53 | 602  | 1.69 | 630  | 1.84 | 658  | 2.01 | 686  | 2.20 |     |
| 5500                | 440  | 1.06 | 477  | 1.22 | 508  | 1.37 | 537  | 1.50 | 565  | 1.65 | 592  | 1.81 | 621  | 1.99 | 650  | 2.16 | 676  | 2.34 | 701  | 2.51 |     |
| 6000                | 471  | 1.34 | 508  | 1.52 | 538  | 1.69 | 566  | 1.84 | 592  | 1.99 | 617  | 2.15 | 643  | 2.32 | 669  | 2.51 | 695  | 2.71 | 721  | 2.90 |     |
|                     |  |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |     |

**Continued**

|                     | External Static Pressure (Inches of Water)                       |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |     |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|-----|
|                     | 1.10   |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      | 1.60   |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |     |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp |
|                     | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |      |     |
| 2500 <sup>(a)</sup> | 645  | 1.22 | 670  | 1.35 | 694  | 1.48 | 718  | 1.61 | 740  | 1.75 | 762  | 1.88 | 783  | 2.02 | 803  | 2.17 | 823  | 2.31 | 843  | 2.46 |     |
| 3000 <sup>(a)</sup> | 660  | 1.40 | 686  | 1.54 | 710  | 1.69 | 733  | 1.83 | 755  | 1.98 | 777  | 2.13 | 798  | 2.28 | 819  | 2.44 | 839  | 2.60 | 858  | 2.76 |     |
| 3500 <sup>(a)</sup> | 674  | 1.61 | 700  | 1.76 | 725  | 1.91 | 749  | 2.07 | 771  | 2.23 | 793  | 2.39 | 814  | 2.56 | 834  | 2.73 | 854  | 2.90 | 873  | 3.07 |     |
| 4000                | 686  | 1.85 | 712  | 2.02 | 737  | 2.18 | 762  | 2.35 | 785  | 2.51 | 808  | 2.68 | 830  | 2.86 | 850  | 3.04 | 870  | 3.22 | 889  | 3.41 |     |
| 4500                | 698  | 2.10 | 724  | 2.28 | 749  | 2.47 | 773  | 2.65 | 797  | 2.84 | 820  | 3.02 | 842  | 3.21 | 863  | 3.39 | 884  | 3.58 | 904  | 3.77 |     |
| 5000                | 712  | 2.38 | 737  | 2.57 | 762  | 2.76 | 785  | 2.97 | 809  | 3.17 | 831  | 3.38 | 853  | 3.58 | 875  | 3.79 | 895  | 3.99 | 916  | 4.20 |     |
| 5500                | 727  | 2.70 | 753  | 2.90 | 776  | 3.10 | 799  | 3.31 | 822  | 3.52 | 844  | 3.74 | 865  | 3.96 | 886  | 4.19 | 907  | 4.42 | 927  | 4.64 |     |
| 6000                | 744  | 3.09 | 767  | 3.28 | 791  | 3.49 | 815  | 3.71 | 837  | 3.92 | 858  | 4.15 | 879  | 4.37 | 899  | 4.60 | 919  | 4.84 | 939  | 5.08 |     |
|                     | 5-hp Oversized Motor & Drive                                     |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |     |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.



## Performance Data

**Table 50. Evaporator fan performance—12½ tons—YH\*150G**

| cfm  | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |      |
|--|--|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|------|
|  | 0.10                                       |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |  | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
|  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 3-hp Standard Motor & Low Static Drive Accessory |  |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive                                      |      |      |      |      |      |      |      |      |      |      |
| 2500 <sup>(a)</sup>                              | 263  | 0.15 | 322  | 0.23 | 375  | 0.33 | 421  | 0.44 | 463  | 0.56   | 501  | 0.68 | 536  | 0.80 | 568  | 0.92 | 599  | 1.04 | 627  | 1.16 |
| 3000 <sup>(a)</sup>                              | 292  | 0.23 | 344  | 0.33 | 393  | 0.43 | 436  | 0.55 | 477  | 0.69   | 515  | 0.82 | 549  | 0.96 | 582  | 1.10 | 612  | 1.23 | 640  | 1.36 |
| 3500 <sup>(a)</sup>                              | 324  | 0.35 | 369  | 0.45 | 413  | 0.57 | 455  | 0.71 | 494  | 0.84   | 529  | 0.99 | 563  | 1.14 | 595  | 1.29 | 626  | 1.43 | 655  | 1.57 |
| 4000   | 358  | 0.51 | 398  | 0.62 | 437  | 0.75 | 475  | 0.89 | 512  | 1.03   | 547  | 1.18 | 579  | 1.33 | 609  | 1.48 | 639  | 1.63 | 668  | 1.78 |
| 4500   | 392  | 0.71 | 429  | 0.84 | 464  | 0.97 | 499  | 1.11 | 532  | 1.25   | 566  | 1.41 | 597  | 1.55 | 627  | 1.70 | 655  | 1.85 | 682  | 2.00 |
| 5000   | 427  | 0.95 | 462  | 1.09 | 493  | 1.22 | 525  | 1.36 | 556  | 1.51   | 587  | 1.66 | 617  | 1.80 | 645  | 1.95 | 673  | 2.10 | 700  | 2.25 |
| 5500   | 462  | 1.23 | 496  | 1.38 | 525  | 1.51 | 553  | 1.64 | 582  | 1.79   | 610  | 1.93 | 638  | 2.08 | 666  | 2.23 | 692  | 2.38 | 718  | 2.54 |
| 6000   | 497  | 1.53 | 530  | 1.69 | 558  | 1.83 | 584  | 1.96 | 610  | 2.09   | 636  | 2.24 | 662  | 2.39 | 688  | 2.56 | 713  | 2.73 | 738  | 2.92 |
|  |  |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |      |

Continued

| cfm  | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |      |
|--|--|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|------|
|  | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |  | 1.60 |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |
|  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |  |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |      |      |
| 2500 <sup>(a)</sup>  | 655  | 1.28 | 681  | 1.40 | 706  | 1.51 | 730  | 1.63 | 754  | 1.74   | 776  | 1.85 | 798  | 1.96 | 820  | 2.07 | 839  | 2.17 | 860  | 2.28 |
| 3000 <sup>(a)</sup>  | 668  | 1.49 | 694  | 1.62 | 719  | 1.74 | 743  | 1.87 | 766  | 1.98   | 790  | 2.11 | 811  | 2.22 | 833  | 2.35 | 852  | 2.46 | 873  | 2.59 |
| 3500 <sup>(a)</sup>  | 681  | 1.71 | 708  | 1.85 | 732  | 1.97 | 756  | 2.10 | 780  | 2.24   | 803  | 2.37 | 824  | 2.50 | 846  | 2.65 | 866  | 2.79 | 887  | 2.96 |
| 4000   | 695  | 1.93 | 721  | 2.07 | 746  | 2.22 | 770  | 2.36 | 794  | 2.50   | 816  | 2.66 | 838  | 2.82 | 859  | 3.00 | 879  | 3.20 | 899  | 3.44 |
| 4500   | 708  | 2.15 | 735  | 2.31 | 760  | 2.47 | 784  | 2.63 | 807  | 2.81   | 830  | 3.01 | 852  | 3.24 | 873  | 3.50 | 893  | 3.79 | 913  | 4.18 |
| 5000   | 725  | 2.41 | 750  | 2.57 | 773  | 2.75 | 798  | 2.97 | 821  | 3.20   | 843  | 3.47 | 865  | 3.81 | 887  | 4.22 | 907  | 4.71 | 926  | 5.27 |
| 5500   | 744  | 2.73 | 767  | 2.92 | 790  | 3.14 | 813  | 3.41 | 836  | 3.75   | 857  | 4.16 | 878  | 4.65 | 900  | 5.31 | 920  | 6.07 | 940  | 7.01 |
| 6000   | 761  | 3.14 | 786  | 3.42 | 809  | 3.74 | 831  | 4.15 | 852  | 4.64   | 873  | 5.25 | 894  | 6.07 | 913  | 6.97 | 934  | 8.19 | 954  | 9.61 |
|  |  |      |      |      |      |      |      |      |      | 5-hp Oversized Motor & Drive                                     |      |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Frost and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.

**Table 51. Evaporator fan performance—12½ tons—YHD150G—dehumidification (hot gas reheat) option**

|                     | External Static Pressure (Inches of Water)       |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|------|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60   |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |      |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
|                     | 3-hp Standard Motor & Low Static Drive Accessory |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive                                      |      |      |      |      |      |      |      |      |      |      |
| 2500 <sup>(a)</sup> | —  | —    | —    | —    | —    | 374  | 0.33 | 420  | 0.43 | 462  | 0.54   | 500  | 0.64 | 534  | 0.75 | 565  | 0.87 | 594  | 0.99 | 621  | 1.11 |
| 3000 <sup>(a)</sup> | —  | —    | —    | —    | —    | 391  | 0.43 | 436  | 0.54 | 476  | 0.65   | 513  | 0.78 | 548  | 0.90 | 580  | 1.03 | 610  | 1.15 | 638  | 1.29 |
| 3500 <sup>(a)</sup> | —  | —    | 368  | 0.44 | 412  | 0.55 | 453  | 0.67 | 492  | 0.79 | 528  | 0.93 | 561  | 1.07 | 593  | 1.21 | 624  | 1.36 | 653  | 1.50 |      |
| 4000                | 356  | 0.49 | 397  | 0.60 | 435  | 0.71 | 474  | 0.84 | 509  | 0.96 | 545  | 1.11 | 577  | 1.25 | 608  | 1.41 | 638  | 1.57 | 666  | 1.74 |      |
| 4500                | 390  | 0.67 | 428  | 0.79 | 462  | 0.90 | 496  | 1.04 | 531  | 1.18 | 563  | 1.33 | 594  | 1.48 | 625  | 1.64 | 653  | 1.81 | 681  | 1.98 |      |
| 5000                | 425  | 0.89 | 460  | 1.02 | 492  | 1.15 | 522  | 1.28 | 554  | 1.43 | 585  | 1.60 | 614  | 1.76 | 642  | 1.91 | 671  | 2.09 | 698  | 2.27 |      |
| 5500                | 460  | 1.15 | 493  | 1.30 | 523  | 1.44 | 552  | 1.58 | 579  | 1.73 | 607  | 1.90 | 636  | 2.08 | 664  | 2.26 | 689  | 2.43 | 714  | 2.61 |      |
| 6000                | 495  | 1.45 | 527  | 1.63 | 555  | 1.78 | 582  | 1.93 | 608  | 2.09 | 633  | 2.25 | 659  | 2.44 | 685  | 2.64 | 711  | 2.83 | 736  | 3.02 |      |
|                     | 3-hp Standard Motor & Drive                      |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |      |

**Continued**

|                     | External Static Pressure (Inches of Water)                       |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |     |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|-----|
|                     | 1.10   |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      | 1.60   |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |     |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp |
|                     | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |      |     |
| 2500 <sup>(a)</sup> | 648  | 1.23 | 673  | 1.36 | 697  | 1.49 | 720  | 1.62 | 742  | 1.76 | 764  | 1.90 | 785  | 2.04 | 806  | 2.18 | 825  | 2.33 | 845  | 2.47 |     |
| 3000 <sup>(a)</sup> | 664  | 1.42 | 689  | 1.56 | 713  | 1.71 | 737  | 1.86 | 759  | 2.00 | 781  | 2.15 | 802  | 2.31 | 822  | 2.46 | 842  | 2.62 | 861  | 2.78 |     |
| 3500 <sup>(a)</sup> | 680  | 1.64 | 706  | 1.79 | 730  | 1.94 | 754  | 2.10 | 776  | 2.27 | 797  | 2.43 | 818  | 2.60 | 839  | 2.77 | 858  | 2.94 | 878  | 3.11 |     |
| 4000                | 693  | 1.90 | 719  | 2.06 | 744  | 2.23 | 768  | 2.39 | 792  | 2.56 | 814  | 2.73 | 835  | 2.91 | 855  | 3.09 | 875  | 3.27 | 894  | 3.46 |     |
| 4500                | 707  | 2.16 | 733  | 2.35 | 758  | 2.53 | 782  | 2.72 | 805  | 2.90 | 827  | 3.09 | 849  | 3.27 | 870  | 3.46 | 891  | 3.65 | 911  | 3.84 |     |
| 5000                | 723  | 2.46 | 748  | 2.65 | 772  | 2.85 | 795  | 3.05 | 818  | 3.26 | 841  | 3.47 | 862  | 3.67 | 884  | 3.88 | 904  | 4.08 | 924  | 4.28 |     |
| 5500                | 741  | 2.81 | 765  | 3.01 | 788  | 3.21 | 811  | 3.42 | 833  | 3.63 | 855  | 3.85 | 876  | 4.08 | 897  | 4.31 | 917  | 4.53 | 937  | 4.76 |     |
| 6000                | 758  | 3.21 | 782  | 3.41 | 806  | 3.62 | 829  | 3.84 | 850  | 4.06 | 871  | 4.28 | 892  | 4.51 | 912  | 4.75 | 932  | 4.99 | 951  | 5.24 |     |
|                     |  |      |      |      |      |      |      |      |      |      | 5-hp Oversized Motor & Drive                                     |      |      |      |      |      |      |      |      |      |     |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Frost and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.



## Performance Data

**Table 52. Evaporator fan performance— 15 tons— TH\*180G**

|  | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |      |
|--|--|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|------|
|  | 0.10                                       |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |  | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
| cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 3-hp Standard Motor & Low Static Drive Accessory |  |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive                                      |      |      |      |      |      |      |      |      |      |      |
| 3000 <sup>(a)</sup>                              | -  | -    | -    | -    | 369  | 0.38 | 411  | 0.47 | 448  | 0.57   | 483  | 0.68 | 514  | 0.78 | 543  | 0.89 | 570  | 1.00 | 596  | 1.11 |
| 3600 <sup>(a)</sup>                              | -  | -    | -    | -    | 391  | 0.50 | 429  | 0.61 | 465  | 0.72   | 499  | 0.84 | 530  | 0.96 | 560  | 1.08 | 587  | 1.21 | 614  | 1.33 |
| 4200 <sup>(a)</sup>                              | -  | -    | 378  | 0.55 | 416  | 0.66 | 451  | 0.78 | 485  | 0.90   | 516  | 1.03 | 547  | 1.16 | 575  | 1.30 | 603  | 1.44 | 629  | 1.58 |
| 4800   | 370  | 0.62 | 408  | 0.74 | 443  | 0.87 | 476  | 0.99 | 507  | 1.12   | 537  | 1.26 | 565  | 1.40 | 593  | 1.55 | 619  | 1.71 | 645  | 1.86 |
| 5400   | 405  | 0.84 | 439  | 0.97 | 472  | 1.11 | 502  | 1.25 | 532  | 1.39   | 560  | 1.54 | 587  | 1.69 | 613  | 1.85 | 638  | 2.01 | 662  | 2.18 |
| 6000   | 440  | 1.11 | 472  | 1.25 | 502  | 1.40 | 531  | 1.56 | 558  | 1.72   | 584  | 1.87 | 610  | 2.03 | 635  | 2.20 | 659  | 2.37 | 682  | 2.54 |
| 6600   | 476  | 1.43 | 505  | 1.58 | 533  | 1.74 | 560  | 1.92 | 586  | 2.09   | 611  | 2.26 | 635  | 2.44 | 659  | 2.61 | 682  | 2.79 | 704  | 2.97 |
| 7200   | 512  | 1.81 | 539  | 1.98 | 565  | 2.15 | 590  | 2.33 | 615  | 2.52   | 639  | 2.71 | 661  | 2.90 | 683  | 3.08 | 706  | 3.28 | 727  | 3.47 |
|  |  |      |      |      |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |      |
|  |  |      |      |      |      |      |      |      |      | 5-hp Oversized Motor & Drive                                     |      |      |      |      |      |      |      |      |      |      |

Continued

|  | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |      |
|--|--|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|------|------|
|  | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |   | 1.60 |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |
| cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |  |      |      |      |      |      |      |      |      | 3HP Standard Motor & High Static Drive Accessory <sup>(c)</sup> |      |      |      |      |      |      |      |      |      |      |
| 3000 <sup>(a)</sup>  | 620  | 1.23 | 643  | 1.35 | 664  | 1.47 | 684  | 1.59 | 703  | 1.72  | 722  | 1.86 | 740  | 1.99 | 757  | 2.13 | 775  | 2.27 | 791  | 2.41 |
| 3600 <sup>(a)</sup>  | 638  | 1.46 | 662  | 1.59 | 684  | 1.73 | 705  | 1.86 | 726  | 2.00  | 746  | 2.14 | 765  | 2.28 | 784  | 2.42 | 801  | 2.57 | 817  | 2.72 |
| 4200 <sup>(a)</sup>  | 654  | 1.73 | 678  | 1.87 | 701  | 2.02 | 723  | 2.17 | 744  | 2.32  | 764  | 2.47 | 784  | 2.62 | 802  | 2.78 | 821  | 2.94 | 839  | 3.10 |
| 4800   | 670  | 2.02 | 693  | 2.18 | 716  | 2.34 | 738  | 2.51 | 760  | 2.67  | 780  | 2.84 | 800  | 3.01 | 820  | 3.18 | 838  | 3.35 | 856  | 3.52 |
| 5400   | 686  | 2.35 | 709  | 2.52 | 732  | 2.70 | 753  | 2.88 | 775  | 3.06  | 795  | 3.24 | 815  | 3.42 | 835  | 3.61 | 854  | 3.80 | 872  | 3.98 |
| 6000   | 705  | 2.73 | 727  | 2.91 | 749  | 3.10 | 770  | 3.29 | 790  | 3.48  | 810  | 3.68 | 830  | 3.88 | 850  | 4.08 | 869  | 4.28 | 887  | 4.48 |
| 6600   | 725  | 3.16 | 747  | 3.35 | 767  | 3.55 | 788  | 3.75 | 808  | 3.96  | 827  | 4.17 | 846  | 4.37 | 865  | 4.59 | 884  | 4.80 | 902  | 5.02 |
| 7200   | 748  | 3.66 | 768  | 3.86 | 788  | 4.07 | 808  | 4.28 | 827  | 4.49  | 846  | 4.71 | 864  | 4.93 | 883  | 5.15 | 900  | 5.38 | 918  | 5.61 |
| 5-hp Oversized Motor & Drive                                     |  |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:  
 - Electric heaters on applications below 320 cfm/ton.  
 - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.  
 - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.

## Performance Data

**Table 53. Evaporator fan performance—15 tons—THD180G—dehumidification (hot gas reheat) option**

|                     | External Static Pressure (Inches of Water)                       |      |      |      |      |      |      |      |      |      |                              |      |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|------------------------------|------|------|------|------|------|------|------|------|------|------|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60                         |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |      |
|                     | cfm  | rpm  | bhp                          | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
|                     | 3-hp Standard Motor & Low Static Drive Accessory                 |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive  |      |      |      |      |      |      |      |      |      |      |
| 3000 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | —    | 387  | 0.49 | 424  | 0.61                         | 458  | 0.72 | 489  | 0.84 | 516  | 0.96 | 541  | 1.08 | 565  | 1.20 |
| 3600 <sup>(a)</sup> | —  | —    | —    | —    | —    | 367  | 0.51 | 407  | 0.63 | 441  | 0.76                         | 472  | 0.89 | 502  | 1.02 | 532  | 1.16 | 559  | 1.30 | 584  | 1.44 |
| 4200 <sup>(a)</sup> | —  | —    | 354  | 0.54 | 391  | 0.67 | 426  | 0.80 | 460  | 0.94 | 492                          | 1.08 | 520  | 1.23 | 546  | 1.38 | 572  | 1.54 | 598  | 1.70 |      |
| 4800                | —  | —    | 383  | 0.73 | 418  | 0.86 | 449  | 1.01 | 480  | 1.15 | 510                          | 1.31 | 540  | 1.48 | 567  | 1.65 | 591  | 1.81 | 614  | 1.98 |      |
| 5400                | 371  | 0.82 | 412  | 0.97 | 446  | 1.11 | 476  | 1.26 | 504  | 1.43 | 531                          | 1.59 | 558  | 1.76 | 585  | 1.94 | 611  | 2.13 | 635  | 2.32 |      |
| 6000                | 403  | 1.08 | 441  | 1.25 | 475  | 1.41 | 504  | 1.57 | 530  | 1.74 | 555                          | 1.93 | 580  | 2.11 | 604  | 2.29 | 629  | 2.48 | 653  | 2.69 |      |
| 6600                | 435  | 1.39 | 472  | 1.59 | 504  | 1.78 | 532  | 1.94 | 558  | 2.12 | 582                          | 2.31 | 605  | 2.51 | 628  | 2.71 | 650  | 2.91 | 672  | 3.11 |      |
| 7200                | 467  | 1.75 | 502  | 1.98 | 533  | 2.19 | 561  | 2.38 | 587  | 2.56 | 610                          | 2.76 | 632  | 2.97 | 653  | 3.19 | 674  | 3.41 | 694  | 3.62 |      |
|                     | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      | 5-hp Oversized Motor & Drive |      |      |      |      |      |      |      |      |      |      |

Continued

|                     | External Static Pressure (Inches of Water) |      |      |      |  |      |      |      |      |      |      |      |      |      |        |      |      |      |      |      |  |  |
|---------------------|--|------|------|------|--|------|------|------|------|------|------|------|------|------|--------|------|------|------|------|------|--|--|
|                     | 1.10                                       |      | 1.20 |      | 1.30   |      | 1.40 |      | 1.50 |      | 1.60 |      | 1.70 |      | 1.80   |      | 1.90 |      | 2.00 |      |  |  |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp    | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |  |
|                     | 3-hp Standard Motor & Drive                |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |        |      |      |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(c)</sup> |  |
| 3000 <sup>(a)</sup> | 587  | 1.32 | 609  | 1.44 | 629  | 1.57 | 649  | 1.70 | 668  | 1.83 | 687  | 1.97 | 705  | 2.11 | 723    | 2.25 | 740  | 2.39 | 758  | 2.54 |  |  |
| 3600 <sup>(a)</sup> | 608  | 1.58 | 629  | 1.72 | 650  | 1.87 | 670  | 2.01 | 689  | 2.16 | 708  | 2.30 | 725  | 2.45 | 743    | 2.61 | 760  | 2.76 | 776  | 2.92 |  |  |
| 4200 <sup>(a)</sup> | 623  | 1.86 | 647  | 2.03 | 669  | 2.19 | 690  | 2.36 | 709  | 2.52 | 728  | 2.68 | 746  | 2.85 | 764    | 3.01 | 781  | 3.18 | 797  | 3.35 |  |  |
| 4800                | 636  | 2.16 | 659  | 2.34 | 682  | 2.52 | 704  | 2.71 | 726  | 2.90 | 746  | 3.09 | 765  | 3.28 | 783    | 3.46 | 801  | 3.65 | 817  | 3.83 |  |  |
| 5400                | 656  | 2.51 | 677  | 2.70 | 698  | 2.89 | 717  | 3.09 | 738  | 3.29 | 758  | 3.50 | 778  | 3.71 | 798    | 3.92 | 817  | 4.13 | 835  | 4.34 |  |  |
| 6000                | 676  | 2.90 | 698  | 3.11 | 718  | 3.32 | 737  | 3.53 | 756  | 3.74 | 774  | 3.95 | 792  | 4.17 | 810    | 4.40 | 829  | 4.63 | 847  | 4.86 |  |  |
| 6600                | 694  | 3.33 | 716  | 3.56 | 737  | 3.79 | 758  | 4.02 | 777  | 4.25 | 795  | 4.48 | 812  | 4.71 | 829    | 4.94 | 846  | 5.18 | 862  | 5.42 |  |  |
| 7200                | 715  | 3.84 | 735  | 4.06 | 755  | 4.30 | 775  | 4.55 | 795  | 4.80 | 814  | 5.05 | 833  | 5.31 | 849.90 | 5.56 | —    | —    | —    | —    |  |  |
|                     | 5-hp Oversized Motor & Drive               |      |      |      |  |      |      |      |      |      |      |      |      |      |        |      |      |      |      |      |  |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

- (a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.
- (b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.
- (c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.



## Performance Data

**Table 54. Evaporator fan performance— 15 tons— YH\*180G**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |     |                             |     |      |     |      |     |      |     |      |  |      |                              |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|-----------------------------|-----|------|-----|------|-----|------|-----|------|--|------|------------------------------|--|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50                        |     | 0.60 |     | 0.70 |     | 0.80 |     | 0.90 |  | 1.00 |                              |  |
| cfm  | rpm | bhp                         | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  |                              |  |
| 3-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |     | 3-hp Standard Motor & Drive |     |      |     |      |     |      |     |      |  |      |                              |  |
| 3000 <sup>(a)</sup>                              | -   | -    | -   | -    | 376 | 0.39 | 417 | 0.49 | 454 | 0.59                        | 488 | 0.69 | 519 | 0.80 | 547 | 0.91 | 574 | 1.02 | 600  | 1.13 |                              |  |
| 3600 <sup>(a)</sup>                              | -   | -    | 359 | 0.42 | 400 | 0.52 | 438 | 0.63 | 473 | 0.75                        | 506 | 0.87 | 537 | 0.99 | 566 | 1.11 | 594 | 1.24 | 619  | 1.36 |                              |  |
| 4200 <sup>(a)</sup>                              | -   | -    | 390 | 0.59 | 427 | 0.70 | 462 | 0.81 | 495 | 0.94                        | 526 | 1.07 | 555 | 1.21 | 584 | 1.34 | 611 | 1.48 | 637  | 1.63 |                              |  |
| 4800   | 386 | 0.66 | 422 | 0.79 | 456 | 0.92 | 489 | 1.04 | 519 | 1.18                        | 548 | 1.32 | 577 | 1.46 | 604 | 1.61 | 630 | 1.77 | 655  | 1.92 |                              |  |
| 5400   | 422 | 0.90 | 456 | 1.04 | 487 | 1.18 | 517 | 1.32 | 546 | 1.47                        | 574 | 1.62 | 600 | 1.77 | 626 | 1.93 | 651 | 2.09 | 675  | 2.26 |                              |  |
| 6000   | 460 | 1.19 | 491 | 1.34 | 520 | 1.50 | 548 | 1.66 | 574 | 1.81                        | 601 | 1.97 | 626 | 2.14 | 650 | 2.30 | 673 | 2.48 | 696  | 2.66 |                              |  |
| 6600   | 498 | 1.54 | 526 | 1.70 | 554 | 1.87 | 580 | 2.05 | 605 | 2.22                        | 629 | 2.39 | 653 | 2.57 | 676 | 2.75 | 699 | 2.93 | 720  | 3.11 |                              |  |
| 7200   | 536 | 1.96 | 562 | 2.13 | 588 | 2.31 | 613 | 2.50 | 636 | 2.69                        | 659 | 2.88 | 681 | 3.07 | 703 | 3.26 | 725 | 3.45 | 746  | 3.65 |                              |  |
|  |     |      |     |      |     |      |     |      |     |                             |     |      |     |      |     |      |     |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      | 5-hp Oversized Motor & Drive |  |

Continued

| External Static Pressure (Inches of Water)                       |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |  |
|--|-----|------|-----|------|-----|------|-----|------|-----|---|-----|------|-----|------|-----|------|-----|------|-----|------|--|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50  |     | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm  | rpm | bhp   | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |     |      |     |      |     |      |     |      |     | 3HP Standard Motor & High Static Drive Accessory <sup>(c)</sup> |     |      |     |      |     |      |     |      |     |      |  |
| 3000 <sup>(a)</sup>  | 624 | 1.25 | 646 | 1.36 | 667 | 1.49 | 687 | 1.62 | 706 | 1.74  | 725 | 1.88 | 743 | 2.01 | 760 | 2.15 | 777 | 2.29 | 794 | 2.43 |  |
| 3600 <sup>(a)</sup>  | 643 | 1.49 | 667 | 1.62 | 689 | 1.76 | 710 | 1.89 | 731 | 2.03  | 750 | 2.17 | 769 | 2.31 | 788 | 2.45 | 804 | 2.60 | 821 | 2.76 |  |
| 4200 <sup>(a)</sup>  | 662 | 1.77 | 685 | 1.92 | 708 | 2.07 | 729 | 2.21 | 750 | 2.37  | 770 | 2.52 | 789 | 2.67 | 808 | 2.83 | 826 | 2.99 | 844 | 3.14 |  |
| 4800   | 679 | 2.08 | 703 | 2.24 | 725 | 2.41 | 747 | 2.57 | 768 | 2.74  | 789 | 2.91 | 808 | 3.08 | 827 | 3.25 | 845 | 3.42 | 863 | 3.59 |  |
| 5400   | 698 | 2.44 | 721 | 2.61 | 743 | 2.79 | 764 | 2.97 | 785 | 3.15  | 806 | 3.33 | 825 | 3.52 | 845 | 3.70 | 863 | 3.89 | 881 | 4.08 |  |
| 6000   | 719 | 2.84 | 741 | 3.03 | 762 | 3.22 | 783 | 3.41 | 803 | 3.61  | 823 | 3.80 | 842 | 4.00 | 862 | 4.20 | 880 | 4.40 | 898 | 4.61 |  |
| 6600   | 742 | 3.30 | 763 | 3.50 | 783 | 3.70 | 803 | 3.91 | 823 | 4.11  | 842 | 4.32 | 861 | 4.54 | 879 | 4.75 | 897 | 4.97 | 915 | 5.19 |  |
| 7200   | 766 | 3.84 | 786 | 4.05 | 806 | 4.26 | 825 | 4.47 | 844 | 4.68  | 863 | 4.91 | 881 | 5.13 | 899 | 5.36 | 916 | 5.58 | -   | -    |  |
| 5-hp Oversized Motor & Drive                                     |     |      |     |      |     |      |     |      |     |   |     |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:  
 - Electric heaters on applications below 320 cfm/ton.  
 - Frost and Crankcase heaters are required on applications below 320 cfm/ton.  
 - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.

**Table 55. Evaporator fan performance— 15 tons— YHD180G— dehumidification (hot gas reheat) option**

|                     | External Static Pressure (Inches of Water)                       |      |      |      |      |      |      |      |      |      |                             |      |      |      |      |                              |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|-----------------------------|------|------|------|------|------------------------------|------|------|------|------|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60                        |      | 0.70 |      | 0.80 |                              | 0.90 |      | 1.00 |      |
|                     | cfm  | rpm  | bhp                         | rpm  | bhp  | rpm  | bhp  | rpm                          | bhp  | rpm  | bhp  | rpm  |
|                     | 3-hp Standard Motor & Low Static Drive Accessory                 |      |      |      |      |      |      |      |      |      | 3-hp Standard Motor & Drive |      |      |      |      |                              |      |      |      |      |
| 3000 <sup>(a)</sup> | —  | —    | —    | —    | 355  | 0.40 | 393  | 0.51 | 429  | 0.63 | 463                         | 0.74 | 493  | 0.86 | 520  | 0.98                         | 545  | 1.10 | 568  | 1.22 |
| 3600 <sup>(a)</sup> | —  | —    | —    | —    | 377  | 0.53 | 415  | 0.66 | 448  | 0.79 | 478                         | 0.91 | 509  | 1.05 | 538  | 1.19                         | 565  | 1.33 | 590  | 1.47 |
| 4200 <sup>(a)</sup> | —  | —    | 366  | 0.58 | 402  | 0.71 | 436  | 0.84 | 470  | 0.98 | 501                         | 1.13 | 528  | 1.28 | 554  | 1.43                         | 580  | 1.59 | 606  | 1.75 |
| 4800                | 358  | 0.66 | 397  | 0.78 | 430  | 0.92 | 461  | 1.07 | 492  | 1.21 | 522                         | 1.38 | 551  | 1.54 | 576  | 1.71                         | 600  | 1.88 | 623  | 2.05 |
| 5400                | 393  | 0.90 | 430  | 1.04 | 461  | 1.19 | 490  | 1.35 | 517  | 1.51 | 545                         | 1.67 | 572  | 1.85 | 598  | 2.04                         | 623  | 2.23 | 646  | 2.41 |
| 6000                | 428  | 1.19 | 463  | 1.35 | 493  | 1.51 | 520  | 1.68 | 546  | 1.86 | 571                         | 2.04 | 595  | 2.22 | 619  | 2.41                         | 644  | 2.61 | 667  | 2.82 |
| 6600                | 463  | 1.54 | 496  | 1.73 | 525  | 1.90 | 552  | 2.07 | 576  | 2.26 | 599                         | 2.46 | 622  | 2.66 | 644  | 2.86                         | 666  | 3.06 | 688  | 3.27 |
| 7200                | 499  | 1.96 | 531  | 2.18 | 559  | 2.36 | 584  | 2.55 | 607  | 2.74 | 630                         | 2.95 | 651  | 3.17 | 672  | 3.38                         | 692  | 3.60 | 713  | 3.82 |
|                     | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |                             |      |      |      |      | 5-hp Oversized Motor & Drive |      |      |      |      |

Continued

|                     | External Static Pressure (Inches of Water) |      |      |      |  |      |      |      |      |      |      |      |        |      |      |      |      |      |      |   |
|---------------------|--|------|------|------|--|------|------|------|------|------|------|------|--------|------|------|------|------|------|------|---|
|                     | 1.10                                       |      | 1.20 |      | 1.30   |      | 1.40 |      | 1.50 |      | 1.60 |      | 1.70   |      | 1.80 |      | 1.90 |      | 2.00 |   |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp    | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm   |
|                     | 3-hp Standard Motor & Drive                |      |      |      | 3-hp Standard Motor & High Static Drive Accessory <sup>(b)</sup> |      |      |      |      |      |      |      |        |      |      |      |      |      |      | 3HP Standard Motor & High Static Drive Accessory <sup>(c)</sup> |
| 3000 <sup>(a)</sup> | 591  | 1.34 | 612  | 1.46 | 632  | 1.59 | 652  | 1.72 | 671  | 1.86 | 690  | 1.99 | 708    | 2.13 | 725  | 2.27 | 743  | 2.42 | 761  | 2.56  |
| 3600 <sup>(a)</sup> | 613  | 1.61 | 634  | 1.76 | 655  | 1.90 | 674  | 2.04 | 693  | 2.19 | 712  | 2.34 | 729    | 2.49 | 746  | 2.64 | 763  | 2.79 | 780  | 2.95  |
| 4200 <sup>(a)</sup> | 631  | 1.91 | 654  | 2.08 | 676  | 2.24 | 696  | 2.40 | 715  | 2.57 | 734  | 2.73 | 752    | 2.90 | 769  | 3.07 | 786  | 3.23 | 802  | 3.41  |
| 4800                | 645  | 2.23 | 668  | 2.41 | 691  | 2.60 | 713  | 2.79 | 734  | 2.98 | 754  | 3.16 | 772    | 3.35 | 790  | 3.54 | 807  | 3.72 | 824  | 3.91  |
| 5400                | 667  | 2.60 | 687  | 2.79 | 708  | 2.99 | 728  | 3.19 | 748  | 3.40 | 768  | 3.60 | 788    | 3.81 | 807  | 4.03 | 826  | 4.24 | 844  | 4.45  |
| 6000                | 690  | 3.03 | 711  | 3.24 | 730  | 3.45 | 749  | 3.66 | 767  | 3.87 | 785  | 4.09 | 803    | 4.31 | 822  | 4.54 | 840  | 4.77 | 858  | 5.00  |
| 6600                | 711  | 3.50 | 732  | 3.73 | 753  | 3.96 | 772  | 4.20 | 790  | 4.42 | 808  | 4.66 | 825    | 4.88 | 841  | 5.12 | 858  | 5.36 | 874  | 5.60  |
| 7200                | 733  | 4.04 | 753  | 4.28 | 773  | 4.52 | 793  | 4.77 | 812  | 5.02 | 831  | 5.28 | 848.25 | 5.53 | —    | —    | —    | —    | —    | —   |
|                     | 5-hp Oversized Motor & Drive               |      |      |      |  |      |      |      |      |      |      |      |        |      |      |      |      |      |      |   |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:  
 - Electric heaters on applications below 320 cfm/ton.  
 - Frost and Crankcase heaters are required on applications below 320 cfm/ton.  
 - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Fan Sheave BK110X1 3/16 and 1VP50X7/8 Required.

(c) Fan Sheave BK110X1 3/16 and 1VP56X7/8 Required.



## Performance Data

**Table 56. Evaporator fan performance— 17½ tons — TH\*210G**

|                     | External Static Pressure (Inches of Water)       |      |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|------|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60  |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
|                     | cfm  | rpm  | bhp   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  |
|                     | 5-hp Standard Motor & Low Static Drive Accessory |      |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |
| 3500 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    | 470   | 0.86 | 501  | 1.00 | 531  | 1.13 | 558  | 1.27 | 582  | 1.41 |
| 4200 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | —    | —    | 462  | 0.94 | 494   | 1.09 | 521  | 1.24 | 547  | 1.39 | 573  | 1.54 | 599  | 1.71 |
| 4900 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | 455  | 1.06 | 485  | 1.20 | 515   | 1.36 | 544  | 1.53 | 572  | 1.70 | 596  | 1.88 | 619  | 2.05 |
| 5600                | —  | —    | —    | —    | 458  | 1.21 | 487  | 1.37 | 514  | 1.54 | 541   | 1.71 | 567  | 1.88 | 593  | 2.07 | 619  | 2.26 | 643  | 2.46 |
| 6300                | —  | —    | 459  | 1.43 | 492  | 1.60 | 520  | 1.76 | 546  | 1.94 | 570   | 2.13 | 594  | 2.32 | 618  | 2.51 | 641  | 2.70 | 664  | 2.91 |
| 7000                | 460  | 1.65 | 495  | 1.86 | 526  | 2.07 | 554  | 2.24 | 580  | 2.42 | 603   | 2.63 | 625  | 2.83 | 646  | 3.05 | 668  | 3.25 | 689  | 3.47 |
| 7700                | 498  | 2.13 | 531  | 2.38 | 562  | 2.62 | 589  | 2.82 | 614  | 3.02 | 637   | 3.22 | 658  | 3.44 | 678  | 3.66 | 698  | 3.90 | 717  | 4.13 |
| 8400                | 537  | 2.71 | 568  | 2.99 | 597  | 3.26 | 624  | 3.50 | 648  | 3.71 | 670   | 3.93 | 692  | 4.15 | 711  | 4.38 | 730  | 4.63 | 748  | 4.88 |
|                     | 5-hp Standard Motor & Drive                      |      |      |      |      |      |      |      |      |      | 5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |

Continued

|                     | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|------|
|                     | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      | 1.60  |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |
|                     | cfm  | rpm  | bhp   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  |
|                     | 5-hp Standard Motor & Drive                |      |      |      |      |      |      |      |      |      | 5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |
| 3500 <sup>(a)</sup> | 605  | 1.54 | 627  | 1.68 | 648  | 1.82 | 667  | 1.96 | 686  | 2.11 | 705   | 2.25 | 723  | 2.40 | 740  | 2.55 | 757  | 2.70 | 773  | 2.86 |
| 4200 <sup>(a)</sup> | 624  | 1.87 | 648  | 2.04 | 670  | 2.20 | 691  | 2.36 | 710  | 2.53 | 729   | 2.69 | 747  | 2.86 | 765  | 3.03 | 782  | 3.19 | 798  | 3.36 |
| 4900 <sup>(a)</sup> | 641  | 2.22 | 663  | 2.41 | 686  | 2.59 | 708  | 2.79 | 729  | 2.98 | 750   | 3.17 | 769  | 3.36 | 788  | 3.55 | 805  | 3.74 | 822  | 3.93 |
| 5600                | 665  | 2.65 | 686  | 2.85 | 706  | 3.05 | 725  | 3.25 | 745  | 3.45 | 764   | 3.66 | 784  | 3.88 | 803  | 4.09 | 822  | 4.31 | 841  | 4.54 |
| 6300                | 687  | 3.13 | 709  | 3.35 | 730  | 3.57 | 750  | 3.79 | 768  | 4.01 | 786   | 4.23 | 804  | 4.46 | 821  | 4.69 | 838  | 4.92 | 856  | 5.15 |
| 7000                | 710  | 3.68 | 731  | 3.91 | 752  | 4.15 | 772  | 4.40 | 792  | 4.64 | 811   | 4.89 | 828  | 5.14 | 845  | 5.38 | 861  | 5.62 | 878  | 5.87 |
| 7700                | 737  | 4.36 | 756  | 4.59 | 775  | 4.83 | 794  | 5.07 | 813  | 5.33 | 832   | 5.60 | 850  | 5.87 | 868  | 6.14 | 886  | 6.41 | 902  | 6.68 |
| 8400                | 767  | 5.14 | 784  | 5.38 | 802  | 5.63 | 820  | 5.89 | 837  | 6.15 | 854   | 6.41 | 872  | 6.68 | 889  | 6.97 | 907  | 7.26 | 924  | 7.55 |
|                     | 7.5-hp Oversized Motor & Drive             |      |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 57. Evaporator fan performance — 17½ tons — THD210G — dehumidification (hot gas reheat) option**

|                     | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |  |      |      |      |                            |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|----------------------------|------|------|------|------|------|
|                     | 0.10                                       |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60   |      | 0.70 |      | 0.80                       |      | 0.90 |      | 1.00 |      |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp                        | rpm  | bhp  | rpm  | bhp  | rpm  |
|                     |  |      |      |      |      |      |      |      |      |      | 5HP Standard Motor & Low Static Drive Accessory  |      |      |      | 5HP Standard Motor & Drive |      |      |      |      |      |
| 3500 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    | 470  | 0.86 | 501  | 1.00 | 531                        | 1.13 | 558  | 1.27 | 582  | 1.41 |
| 4200 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | —    | —    | 462  | 0.94 | 494  | 1.09 | 521  | 1.24 | 547                        | 1.39 | 573  | 1.54 | 599  | 1.71 |
| 4900 <sup>(a)</sup> | —  | —    | —    | —    | —    | —    | 455  | 1.06 | 485  | 1.20 | 515  | 1.36 | 544  | 1.53 | 572                        | 1.70 | 596  | 1.88 | 619  | 2.05 |
| 5600                | —  | —    | —    | —    | 458  | 1.21 | 487  | 1.37 | 514  | 1.54 | 541  | 1.71 | 567  | 1.88 | 593                        | 2.07 | 619  | 2.26 | 643  | 2.46 |
| 6300                | —  | —    | 459  | 1.43 | 492  | 1.60 | 520  | 1.76 | 546  | 1.94 | 570  | 2.13 | 594  | 2.32 | 618                        | 2.51 | 641  | 2.70 | 664  | 2.91 |
| 7000                | 460  | 1.65 | 495  | 1.86 | 526  | 2.07 | 554  | 2.24 | 580  | 2.42 | 603  | 2.63 | 625  | 2.83 | 646                        | 3.05 | 668  | 3.25 | 689  | 3.47 |
| 7700                | 498  | 2.13 | 531  | 2.38 | 562  | 2.62 | 589  | 2.82 | 614  | 3.02 | 637  | 3.22 | 658  | 3.44 | 678                        | 3.66 | 698  | 3.90 | 717  | 4.13 |
| 8400                | 537  | 2.71 | 568  | 2.99 | 597  | 3.26 | 624  | 3.50 | 648  | 3.71 | 670  | 3.93 | 692  | 4.15 | 711                        | 4.38 | 730  | 4.63 | 748  | 4.88 |
|                     |  |      |      |      |      |      |      |      |      |      | 5HP Standard Motor & High Static Drive Accessory |      |      |      |                            |      |      |      |      |      |

**Continued**

|                     | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |  |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|------|
|                     | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      | 1.60   |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |
|                     | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  |
|                     | 5HP Standard Motor & Drive                 |      |      |      |      |      |      |      |      |      | 5HP Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |
| 3500 <sup>(a)</sup> | 605  | 1.54 | 627  | 1.68 | 648  | 1.82 | 667  | 1.96 | 686  | 2.11 | 705  | 2.25 | 723  | 2.40 | 740  | 2.55 | 757  | 2.70 | 773  | 2.86 |
| 4200 <sup>(a)</sup> | 624  | 1.87 | 648  | 2.04 | 670  | 2.20 | 691  | 2.36 | 710  | 2.53 | 729  | 2.69 | 747  | 2.86 | 765  | 3.03 | 782  | 3.19 | 798  | 3.36 |
| 4900 <sup>(a)</sup> | 641  | 2.22 | 663  | 2.41 | 686  | 2.59 | 708  | 2.79 | 729  | 2.98 | 750  | 3.17 | 769  | 3.36 | 788  | 3.55 | 805  | 3.74 | 822  | 3.93 |
| 5600                | 665  | 2.65 | 686  | 2.85 | 706  | 3.05 | 725  | 3.25 | 745  | 3.45 | 764  | 3.66 | 784  | 3.88 | 803  | 4.09 | 822  | 4.31 | 841  | 4.54 |
| 6300                | 687  | 3.13 | 709  | 3.35 | 730  | 3.57 | 750  | 3.79 | 768  | 4.01 | 786  | 4.23 | 804  | 4.46 | 821  | 4.69 | 838  | 4.92 | 856  | 5.15 |
| 7000                | 710  | 3.68 | 731  | 3.91 | 752  | 4.15 | 772  | 4.40 | 792  | 4.64 | 811  | 4.89 | 828  | 5.14 | 845  | 5.38 | 861  | 5.62 | 878  | 5.87 |
| 7700                | 737  | 4.36 | 756  | 4.59 | 775  | 4.83 | 794  | 5.07 | 813  | 5.33 | 832  | 5.60 | 850  | 5.87 | 868  | 6.14 | 886  | 6.41 | 902  | 6.68 |
| 8400                | 767  | 5.14 | 784  | 5.38 | 802  | 5.63 | 820  | 5.89 | 837  | 6.15 | 854  | 6.41 | 872  | 6.68 | 889  | 6.97 | 907  | 7.26 | 924  | 7.55 |
|                     |  |      |      |      |      |      |      |      |      |      | 7.5HP Oversized Motor & Drive                    |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 58. Evaporator fan performance—17½ tons—YH\*210G**

| External Static Pressure (Inches of Water)       |     |      |     |      |     |      |     |      |      |      |   |      |      |      |      |      |      |      |      |      |      |
|--|-----|------|-----|------|-----|------|-----|------|------|------|---|------|------|------|------|------|------|------|------|------|------|
|  |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |      | 0.50 |   | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
| cfm  |     | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp  | rpm  | bhp   | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 5-hp Standard Motor & Low Static Drive Accessory |     |      |     |      |     |      |     |      |      |      | 5-hp Standard Motor & Drive                       |      |      |      |      |      |      |      |      |      |      |
| 3500 <sup>(a)</sup>                              | —   | —    | —   | —    | —   | —    | —   | —    | —    | —    | —   | 476  | 0.89 | 508  | 1.02 | 537  | 1.16 | 563  | 1.30 | 587  | 1.43 |
| 4200 <sup>(a)</sup>                              | —   | —    | —   | —    | —   | —    | —   | —    | —    | 472  | 0.99  | 502  | 1.14 | 529  | 1.28 | 555  | 1.43 | 581  | 1.59 | 607  | 1.76 |
| 4900 <sup>(a)</sup>                              | —   | —    | —   | —    | —   | —    | —   | 468  | 1.12 | 497  | 1.27  | 527  | 1.43 | 556  | 1.60 | 582  | 1.78 | 605  | 1.95 | 628  | 2.12 |
| 5600   | —   | —    | —   | —    | 474 | 1.29 | 501 | 1.46 | 528  | 1.63 | 555   | 1.80 | 581  | 1.98 | 607  | 2.17 | 632  | 2.37 | 655  | 2.56 |      |
| 6300   | —   | —    | 482 | 1.55 | 512 | 1.71 | 538 | 1.88 | 563  | 2.07 | 587   | 2.26 | 610  | 2.45 | 634  | 2.64 | 657  | 2.84 | 680  | 3.06 |      |
| 7000   | 490 | 1.84 | 522 | 2.04 | 550 | 2.22 | 576 | 2.39 | 599  | 2.59 | 621   | 2.80 | 643  | 3.01 | 665  | 3.22 | 686  | 3.43 | 707  | 3.65 |      |
| 7700   | 532 | 2.39 | 562 | 2.62 | 589 | 2.83 | 614 | 3.02 | 637  | 3.22 | 658   | 3.44 | 679  | 3.67 | 698  | 3.90 | 718  | 4.13 | 737  | 4.36 |      |
| 8400   | 574 | 3.03 | 603 | 3.30 | 629 | 3.55 | 653 | 3.76 | 675  | 3.97 | 696   | 4.20 | 715  | 4.43 | 734  | 4.68 | 752  | 4.93 | 770  | 5.18 |      |
|  |     |      |     |      |     |      |     |      |      |      | 5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |      |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |     |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|-----|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |     |
| cfm  |     | rpm  | bhp   | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp |
| 5-hp Standard Motor & Drive                |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |     |
| 3500 <sup>(a)</sup>                        | 610 | 1.57 | 631 | 1.71 | 652 | 1.85 | 672 | 1.99 | 690 | 2.14 | 709   | 2.28 | 726 | 2.43 | 744 | 2.58 | 760 | 2.73 | 777 | 2.89 |     |
| 4200 <sup>(a)</sup>                        | 632 | 1.92 | 655 | 2.09 | 677 | 2.25 | 697 | 2.41 | 716 | 2.58 | 735   | 2.74 | 753 | 2.91 | 770 | 3.08 | 787 | 3.24 | 803 | 3.42 |     |
| 4900 <sup>(a)</sup>                        | 650 | 2.30 | 673 | 2.48 | 695 | 2.67 | 717 | 2.86 | 738 | 3.06 | 758   | 3.25 | 777 | 3.44 | 795 | 3.63 | 812 | 3.82 | 829 | 4.01 |     |
| 5600                                       | 677 | 2.76 | 697 | 2.96 | 717 | 3.15 | 736 | 3.36 | 755 | 3.56 | 775   | 3.78 | 795 | 3.99 | 814 | 4.21 | 832 | 4.43 | 850 | 4.65 |     |
| 6300                                       | 702 | 3.28 | 724 | 3.50 | 744 | 3.72 | 762 | 3.94 | 781 | 4.17 | 798   | 4.39 | 816 | 4.61 | 833 | 4.84 | 850 | 5.08 | 868 | 5.32 |     |
| 7000                                       | 727 | 3.88 | 748 | 4.11 | 769 | 4.36 | 789 | 4.60 | 808 | 4.85 | 826   | 5.10 | 843 | 5.34 | 859 | 5.59 | 875 | 5.83 | 891 | 6.08 |     |
| 7700                                       | 756 | 4.59 | 775 | 4.83 | 794 | 5.08 | 813 | 5.34 | 832 | 5.60 | 851   | 5.87 | 869 | 6.15 | 886 | 6.41 | 903 | 6.69 | 918 | 6.96 |     |
| 8400                                       | 788 | 5.44 | 806 | 5.69 | 824 | 5.95 | 841 | 6.21 | 858 | 6.46 | 876   | 6.74 | 893 | 7.03 | 910 | 7.32 | 927 | 7.61 | 944 | 7.91 |     |
|  |     |      |     |      |     |      |     |      |     |      | 7.5-hp Oversized Motor & Drive                    |      |     |      |     |      |     |      |     |      |     |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Frostat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 59. Evaporator fan performance – 17½ tons – YHD210G – dehumidification (hot gas reheat) option**

| External Static Pressure (Inches of Water)       |     |                     |      |                     |   |      |      |      |                            |      |      |      |      |      |      |      |      |      |      |      |
|--|-----|---------------------|------|---------------------|---|------|------|------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|
| 0.10   |     |                     | 0.20 |                     | 0.30  |      | 0.40 |      | 0.50                       |      | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
| cfm  | rpm | bhp                 | rpm  | bhp                 | rpm   | bhp  | rpm  | bhp  | rpm                        | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
|  |     |                     |      |                     | 5HP Standard Motor & Low Static Drive Accessory |      |      |      | 5HP Standard Motor & Drive |      |      |      |      |      |      |      |      |      |      |      |
| 5600   | —   | —                   | —    | —                   | 474   | 1.29 | 501  | 1.46 | 528                        | 1.63 | 555  | 1.80 | 581  | 1.98 | 607  | 2.17 | 632  | 2.37 | 655  | 2.56 |
| 6300   | —   | —                   | 482  | 1.55 <sup>(a)</sup> | 512   | 1.71 | 538  | 1.88 | 563                        | 2.07 | 587  | 2.26 | 610  | 2.45 | 634  | 2.64 | 657  | 2.84 | 680  | 3.06 |
| 7000   | 490 | 1.84 <sup>(a)</sup> | 522  | 2.04                | 550   | 2.22 | 576  | 2.39 | 599                        | 2.59 | 621  | 2.80 | 643  | 3.01 | 665  | 3.22 | 686  | 3.43 | 707  | 3.65 |
| 7700   | 532 | 2.39                | 562  | 2.62                | 589   | 2.83 | 614  | 3.02 | 637                        | 3.22 | 658  | 3.44 | 679  | 3.67 | 698  | 3.90 | 718  | 4.13 | 737  | 4.36 |
| 8400   | 574 | 3.03                | 603  | 3.30                | 629   | 3.55 | 653  | 3.76 | 675                        | 3.97 | 696  | 4.20 | 715  | 4.43 | 734  | 4.68 | 752  | 4.93 | 770  | 5.18 |
| 5HP Standard Motor & High Static Drive Accessory |     |                     |      |                     |   |      |      |      |                            |      |      |      |      |      |      |      |      |      |      |      |

Continued

| External Static Pressure (Inches of Water)       |     |                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--|-----|---------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1.10   |     |                     | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      | 1.60 |      | 1.70 |      | 1.80 |      | 1.90 |      | 2.00 |      |
| cfm  | rpm | bhp                 | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
| 5HP Standard Motor & High Static Drive Accessory |     |                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 5600   | 677 | 2.76 <sup>(b)</sup> | 697  | 2.96 | 717  | 3.15 | 736  | 3.36 | 755  | 3.56 | 775  | 3.78 | 795  | 3.99 | 814  | 4.21 | 832  | 4.43 | 850  | 4.65 |
| 6300   | 702 | 3.28                | 724  | 3.50 | 744  | 3.72 | 762  | 3.94 | 781  | 4.17 | 798  | 4.39 | 816  | 4.61 | 833  | 4.84 | 850  | 5.08 | 868  | 5.32 |
| 7000   | 727 | 3.88                | 748  | 4.11 | 769  | 4.36 | 789  | 4.60 | 808  | 4.85 | 826  | 5.10 | 843  | 5.34 | 859  | 5.59 | 875  | 5.83 | 891  | 6.08 |
| 7700   | 756 | 4.59                | 775  | 4.83 | 794  | 5.08 | 813  | 5.34 | 832  | 5.60 | 851  | 5.87 | 869  | 6.15 | 886  | 6.41 | 903  | 6.69 | 918  | 6.96 |
| 8400   | 788 | 5.44                | 806  | 5.69 | 824  | 5.95 | 841  | 6.21 | 858  | 6.46 | 876  | 6.74 | 893  | 7.03 | 910  | 7.32 | 927  | 7.61 | 944  | 7.91 |
| 7.5HP Oversized Motor & Drive                    |     |                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) 5HP Standard Motor & Low Static Drive Accessory

(b) 5HP Standard Motor & Drive



## Performance Data

**Table 60. Evaporator fan performance—20 tons—TH\*240G**

| External Static Pressure (Inches of Water)        |     |      |     |      |     |      |     |      |      |      |   |      |      |      |      |      |      |      |      |      |      |     |
|---|-----|------|-----|------|-----|------|-----|------|------|------|---|------|------|------|------|------|------|------|------|------|------|-----|
|   |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |      | 0.50 |   | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |     |
|   |     | cfm  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp |
| 5-hp Standard Motor & Low Static Drive Accessory  |     |      |     |      |     |      |     |      |      |      | 5-hp Standard Motor & Drive   |      |      |      |      |      |      |      |      |      |      |     |
| 4000 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | —    | —    | 456  | 0.88  | 486  | 1.02 | 514  | 1.16 | 541  | 1.31 | 569  | 1.46 | 595  | 1.62 |     |
| 4800 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | 451  | 1.02 | 481  | 1.16  | 512  | 1.32 | 541  | 1.49 | 568  | 1.66 | 592  | 1.82 | 615  | 1.99 |     |
| 5600 <sup>(a)</sup>                               | —   | —    | —   | —    | 458 | 1.21 | 487 | 1.37 | 514  | 1.54 | 541   | 1.71 | 567  | 1.88 | 593  | 2.07 | 619  | 2.26 | 643  | 2.46 |      |     |
| 6400  | —   | —    | 464 | 1.49 | 497 | 1.66 | 525 | 1.82 | 551  | 2.00 | 575   | 2.20 | 598  | 2.39 | 622  | 2.58 | 645  | 2.78 | 667  | 2.98 |      |     |
| 7200  | 470 | 1.77 | 505 | 2.00 | 536 | 2.21 | 564 | 2.40 | 589  | 2.58 | 612   | 2.78 | 634  | 3.00 | 655  | 3.21 | 676  | 3.43 | 697  | 3.65 |      |     |
| 8000  | 514 | 2.37 | 547 | 2.63 | 577 | 2.87 | 603 | 3.10 | 628  | 3.30 | 651   | 3.51 | 672  | 3.73 | 692  | 3.96 | 711  | 4.20 | 730  | 4.44 |      |     |
| 8800  | 560 | 3.10 | 590 | 3.38 | 618 | 3.65 | 644 | 3.92 | 667  | 4.16 | 690   | 4.39 | 711  | 4.61 | 731  | 4.84 | 749  | 5.09 | 767  | 5.35 |      |     |
| 9600  | 606 | 3.97 | 633 | 4.27 | 660 | 4.59 | 685 | 4.88 | 708  | 5.15 | 729   | 5.42 | 750  | 5.66 | 769  | 5.91 | 788  | 6.16 | 805  | 6.42 |      |     |
| 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |      |      | 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |      |     |

Continued

| External Static Pressure (Inches of Water) |     |      |     |                     |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |     |     |
|--|-----|------|-----|---------------------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|-----|-----|
|  |     | 1.10 |     | 1.20                |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |     |     |
|  |     | cfm  | rpm | bhp                 | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp |
| 5-hp Standard Motor & Drive                |     |      |     |                     |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory                   |      |     |      |     |      |     |      |     |      |     |     |
| 4000 <sup>(a)</sup>                        | 620 | 1.78 | 643 | 1.93                | 664 | 2.09 | 685 | 2.25 | 704 | 2.40 | 722   | 2.56 | 740 | 2.72 | 758 | 2.88 | 775 | 3.05 | 791 | 3.21 |     |     |
| 4800 <sup>(a)</sup>                        | 638 | 2.17 | 661 | 2.35                | 684 | 2.54 | 706 | 2.72 | 727 | 2.91 | 747   | 3.10 | 767 | 3.29 | 785 | 3.48 | 802 | 3.66 | 819 | 3.85 |     |     |
| 5600 <sup>(a)</sup>                        | 665 | 2.65 | 686 | 2.85                | 706 | 3.05 | 725 | 3.25 | 745 | 3.45 | 764   | 3.66 | 784 | 3.88 | 803 | 4.09 | 822 | 4.31 | 841 | 4.54 |     |     |
| 6400                                       | 690 | 3.20 | 712 | 3.43                | 733 | 3.65 | 753 | 3.88 | 772 | 4.10 | 790   | 4.32 | 807 | 4.55 | 824 | 4.78 | 841 | 5.01 | 858 | 5.25 |     |     |
| 7200                                       | 717 | 3.86 | 737 | 4.09                | 758 | 4.33 | 778 | 4.58 | 798 | 4.83 | 817   | 5.08 | 835 | 5.34 | 852 | 5.59 | 868 | 5.84 | 885 | 6.10 |     |     |
| 8000                                       | 749 | 4.68 | 768 | 4.92                | 786 | 5.16 | 804 | 5.41 | 823 | 5.66 | 841   | 5.93 | 859 | 6.20 | 877 | 6.48 | 895 | 6.76 | 912 | 7.04 |     |     |
| 8800                                       | 784 | 5.61 | 802 | 5.89 <sup>(b)</sup> | 819 | 6.15 | 836 | 6.41 | 853 | 6.67 | 869   | 6.95 | 886 | 7.21 | 902 | 7.49 | 919 | 7.78 | 936 | 8.09 |     |     |
| 9600                                       | 822 | 6.69 | 839 | 6.98                | 854 | 7.26 | 870 | 7.55 | 886 | 7.85 | 901   | 8.13 | 917 | 8.42 | —   | —    | —   | —    | —   | —    |     |     |
| 7.5-hp Oversized Motor & Drive             |     |      |     |                     |     |      |     |      |     |      | 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(c)</sup> |      |     |      |     |      |     |      |     |      |     |     |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Field Supplied Fan Sheave BK190 Required. Field Supplied Belt may be necessary.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Refer to [Table 70, p. 101](#) to determine additional static pressure drop due to other options/accessories.
8. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
9. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) 7.5-hp Oversized Motor & Field Supplied Motor Sheave<sup>(c)</sup>

(c) Field supplied motor sheave 1VP50 x 1 1/8 required.

**Table 61. Evaporator fan performance—20 tons—THD240G—dehumidification (hot gas reheat) option**

| External Static Pressure (Inches of Water)        |     |      |     |      |     |      |     |      |      |      |   |      |      |      |      |      |      |      |      |      |      |
|---|-----|------|-----|------|-----|------|-----|------|------|------|---|------|------|------|------|------|------|------|------|------|------|
|   |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |      | 0.50 |   | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
| cfm   | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm  | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |      |
| 5-hp Standard Motor & Low Static Drive Accessory  |     |      |     |      |     |      |     |      |      |      | 5-hp Standard Motor & Drive   |      |      |      |      |      |      |      |      |      |      |
| 4000 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | —    | —    | 454  | 0.88  | 485  | 1.01 | 513  | 1.16 | 540  | 1.30 | 568  | 1.46 | 594  | 1.61 |
| 4800 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | 449  | 1.01 | 480  | 1.15  | 510  | 1.31 | 540  | 1.48 | 567  | 1.65 | 591  | 1.81 | 614  | 1.98 |
| 5600 <sup>(a)</sup>                               | —   | —    | —   | —    | 456 | 1.20 | 485 | 1.36 | 512  | 1.53 | 539   | 1.70 | 565  | 1.87 | 591  | 2.05 | 617  | 2.24 | 641  | 2.44 |      |
| 6400  | —   | —    | 461 | 1.47 | 494 | 1.65 | 523 | 1.81 | 549  | 1.99 | 573   | 2.18 | 596  | 2.37 | 619  | 2.56 | 642  | 2.76 | 665  | 2.96 |      |
| 7200  | 467 | 1.75 | 502 | 1.98 | 533 | 2.19 | 561 | 2.38 | 587  | 2.56 | 610   | 2.76 | 632  | 2.97 | 653  | 3.19 | 674  | 3.41 | 694  | 3.62 |      |
| 8000  | 511 | 2.35 | 544 | 2.60 | 573 | 2.85 | 601 | 3.08 | 625  | 3.28 | 648   | 3.48 | 670  | 3.70 | 690  | 3.93 | 709  | 4.16 | 728  | 4.41 |      |
| 8800  | 556 | 3.06 | 586 | 3.34 | 614 | 3.62 | 640 | 3.89 | 664  | 4.13 | 687   | 4.36 | 708  | 4.58 | 728  | 4.80 | 746  | 5.05 | 764  | 5.31 |      |
| 9600  | 601 | 3.91 | 629 | 4.22 | 656 | 4.53 | 680 | 4.82 | 704  | 5.12 | 726   | 5.38 | 746  | 5.62 | 766  | 5.87 | 784  | 6.10 | 802  | 6.37 |      |
| 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |      |      | 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(b)</sup> |      |      |      |      |      |      |      |      |      |      |

**Continued**

| External Static Pressure (Inches of Water)                          |     |      |     |                     |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |
|---|-----|------|-----|---------------------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|--|
|   |     | 1.10 |     | 1.20                |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |  |
| cfm   | rpm | bhp  | rpm | bhp                 | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor & Drive   |     |      |     |                     |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |  |
| 4000 <sup>(a)</sup>   | 619 | 1.77 | 642 | 1.93                | 663 | 2.08 | 683 | 2.24 | 703 | 2.39 | 721   | 2.55 | 739 | 2.71 | 757 | 2.87 | 774 | 3.04 | 790 | 3.20 |  |
| 4800 <sup>(a)</sup>   | 636 | 2.16 | 659 | 2.34                | 682 | 2.52 | 704 | 2.71 | 726 | 2.90 | 746   | 3.09 | 765 | 3.28 | 783 | 3.46 | 801 | 3.65 | 817 | 3.83 |  |
| 5600 <sup>(a)</sup>   | 663 | 2.64 | 684 | 2.83                | 704 | 3.03 | 724 | 3.23 | 743 | 3.43 | 763   | 3.64 | 782 | 3.86 | 802 | 4.08 | 821 | 4.29 | 839 | 4.51 |  |
| 6400  | 688 | 3.18 | 710 | 3.40                | 731 | 3.63 | 751 | 3.85 | 770 | 4.08 | 788   | 4.30 | 805 | 4.52 | 822 | 4.75 | 839 | 4.98 | 856 | 5.22 |  |
| 7200  | 715 | 3.84 | 735 | 4.06                | 755 | 4.30 | 775 | 4.55 | 795 | 4.80 | 814   | 5.05 | 833 | 5.31 | 850 | 5.56 | 866 | 5.81 | 882 | 6.06 |  |
| 8000  | 747 | 4.65 | 765 | 4.89                | 784 | 5.12 | 802 | 5.37 | 820 | 5.62 | 838   | 5.89 | 856 | 6.16 | 874 | 6.44 | 892 | 6.71 | 909 | 7.00 |  |
| 8800  | 782 | 5.57 | 799 | 5.84 <sup>(c)</sup> | 816 | 6.10 | 833 | 6.36 | 850 | 6.63 | 866   | 6.89 | 883 | 7.16 | 899 | 7.44 | 916 | 7.73 | 933 | 8.03 |  |
| 9600  | 819 | 6.64 | 835 | 6.92                | 851 | 7.21 | 867 | 7.49 | 883 | 7.79 | 898   | 8.08 | 914 | 8.36 | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(b)</sup> |     |      |     |                     |     |      |     |      |     |      | 7.5-hp Oversized Motor & Drive                    |      |     |      |     |      |     |      |     |      |  |

**Notes:**

- For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
- For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
- For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
- Fan motor heat (MBh) = 3.15 x Fan bhp.
- Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
- For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
- Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Field supplied motor sheave 1VP50 x 1 1/8 required.

(c) 7.5-hp Oversized Motor & Field Supplied Motor Sheave<sup>(b)</sup>



## Performance Data

**Table 62. Evaporator fan performance—20 tons—YH\*240G**

| External Static Pressure (Inches of Water)        |     |      |     |      |     |      |     |      |      |   |                             |      |      |      |      |                                |      |      |      |      |      |
|---|-----|------|-----|------|-----|------|-----|------|------|---|-----------------------------|------|------|------|------|--------------------------------|------|------|------|------|------|
|   |     | 0.10 |     | 0.20 |     | 0.30 |     | 0.40 |      | 0.50  |                             | 0.60 |      | 0.70 |      | 0.80                           |      | 0.90 |      | 1.00 |      |
| cfm   |     | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp  | rpm   | bhp                         | rpm  | bhp  | rpm  | bhp  | rpm                            | bhp  | rpm  | bhp  | rpm  | bhp  |
| 5-hp Standard Motor & Low Static Drive Accessory  |     |      |     |      |     |      |     |      |      |   | 5-hp Standard Motor & Drive |      |      |      |      |                                |      |      |      |      |      |
| 4000 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | —    | —    | 465   | 0.92                        | 494  | 1.06 | 522  | 1.20 | 549                            | 1.35 | 576  | 1.51 | 602  | 1.66 |
| 4800 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | 463  | 1.07 | 493   | 1.22                        | 524  | 1.39 | 552  | 1.56 | 578                            | 1.72 | 601  | 1.89 | 624  | 2.06 |
| 5600 <sup>(a)</sup>                               | —   | —    | —   | —    | 474 | 1.29 | 501 | 1.46 | 528  | 1.63  | 555                         | 1.80 | 581  | 1.98 | 607  | 2.17                           | 632  | 2.37 | 655  | 2.56 |      |
| 6400  | 454 | 1.43 | 487 | 1.61 | 517 | 1.77 | 544 | 1.95 | 568  | 2.14  | 591                         | 2.33 | 615  | 2.52 | 638  | 2.72                           | 661  | 2.92 | 684  | 3.14 |      |
| 7200  | 502 | 1.98 | 533 | 2.19 | 561 | 2.38 | 587 | 2.56 | 610  | 2.76  | 632                         | 2.97 | 653  | 3.19 | 674  | 3.41                           | 695  | 3.63 | 715  | 3.84 |      |
| 8000  | 550 | 2.64 | 579 | 2.89 | 606 | 3.12 | 631 | 3.32 | 653  | 3.53  | 674                         | 3.75 | 694  | 3.98 | 713  | 4.22                           | 732  | 4.47 | 751  | 4.70 |      |
| 8800  | 599 | 3.46 | 627 | 3.75 | 652 | 4.00 | 675 | 4.23 | 697  | 4.45  | 718                         | 4.69 | 737  | 4.93 | 755  | 5.18                           | 773  | 5.44 | 790  | 5.71 |      |
| 9600  | 648 | 4.44 | 674 | 4.74 | 698 | 5.04 | 721 | 5.33 | 742  | 5.56  | 761                         | 5.80 | 780  | 6.05 | 798  | 6.30                           | 815  | 6.58 | 832  | 6.86 |      |
| 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |      | 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(b)</sup> |                             |      |      |      |      | 7.5-hp Oversized Motor & Drive |      |      |      |      |      |

Continued

| External Static Pressure (Inches of Water) |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |     |
|--|-----|------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|-----|
|  |     | 1.10 |     | 1.20 |     | 1.30 |     | 1.40 |     | 1.50 |   | 1.60 |     | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |     |
| cfm  |     | rpm  | bhp   | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp | rpm  | bhp |
| 5-hp Standard Motor Drive                  |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |     |
| 4000 <sup>(a)</sup>                        | 627 | 1.82 | 649 | 1.98 | 670 | 2.13 | 690 | 2.29 | 709 | 2.45 | 728   | 2.61 | 745 | 2.77 | 763 | 2.93 | 779 | 3.09 | 796 | 3.26 |     |
| 4800 <sup>(a)</sup>                        | 647 | 2.24 | 670 | 2.42 | 693 | 2.61 | 714 | 2.80 | 735 | 2.99 | 755   | 3.18 | 774 | 3.36 | 792 | 3.55 | 809 | 3.74 | 825 | 3.92 |     |
| 5600 <sup>(a)</sup>                        | 677 | 2.76 | 697 | 2.96 | 717 | 3.15 | 736 | 3.36 | 755 | 3.56 | 775   | 3.78 | 795 | 3.99 | 814 | 4.21 | 832 | 4.43 | 850 | 4.65 |     |
| 6400                                       | 706 | 3.36 | 727 | 3.58 | 748 | 3.81 | 766 | 4.03 | 784 | 4.26 | 802   | 4.48 | 819 | 4.71 | 836 | 4.94 | 853 | 5.18 | 870 | 5.42 |     |
| 7200                                       | 735 | 4.07 | 756 | 4.31 | 776 | 4.56 | 795 | 4.80 | 815 | 5.06 | 833   | 5.31 | 850 | 5.57 | 867 | 5.81 | 883 | 6.06 | 899 | 6.32 |     |
| 8000                                       | 770 | 4.94 | 788 | 5.18 | 806 | 5.44 | 825 | 5.69 | 843 | 5.96 | 861   | 6.23 | 879 | 6.51 | 896 | 6.79 | 913 | 7.07 | 930 | 7.36 |     |
| 8800                                       | 807 | 5.97 | 825 | 6.23 | 841 | 6.50 | 858 | 6.77 | 875 | 7.03 | 891   | 7.30 | 908 | 7.58 | 925 | 7.89 | 941 | 8.19 | 958 | 8.49 |     |
| 9600                                       | 848 | 7.14 | 864 | 7.43 | 879 | 7.73 | 895 | 8.01 | 911 | 8.30 | 926   | 8.59 | —   | —    | —   | —    | —   | —    | —   | —    |     |
| 7.5-hp Oversized Motor & Drive             |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |     |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:  
 - Electric heaters on applications below 320 cfm/ton.  
 - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.  
 - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.  
 (b) Field supplied motor sheave 1VP50 x 1 1/8 required.

**Table 63. Evaporator fan performance—20 tons—YHD240G—dehumidification (hot gas reheat) option**

| External Static Pressure (Inches of Water)        |     |      |     |      |     |      |     |      |     |      |   |      |     |      |     |                                |     |      |     |                     |  |
|---|-----|------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|--------------------------------|-----|------|-----|---------------------|--|
| 0.10  |     | 0.20 |     | 0.30 |     | 0.40 |     | 0.50 |     | 0.60 |   | 0.70 |     | 0.80 |     | 0.90                           |     | 1.00 |     |                     |  |
| cfm   | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp                            | rpm | bhp  | rpm | bhp                 |  |
| 5-hp Standard Motor & Low Static Drive Accessory  |     |      |     |      |     |      |     |      |     |      | 5-hp Standard Motor & Drive   |      |     |      |     |                                |     |      |     |                     |  |
| 4000 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | —   | —    | 464 | 0.91 | 493   | 1.05 | 521 | 1.20 | 548 | 1.34                           | 575 | 1.50 | 601 | 1.66                |  |
| 4800 <sup>(a)</sup>                               | —   | —    | —   | —    | —   | —    | 461 | 1.07 | 492 | 1.21 | 522   | 1.38 | 551 | 1.54 | 576 | 1.71                           | 600 | 1.88 | 623 | 2.05                |  |
| 5600 <sup>(a)</sup>                               | —   | —    | —   | —    | 472 | 1.28 | 500 | 1.45 | 527 | 1.62 | 553   | 1.79 | 579 | 1.96 | 605 | 2.15                           | 630 | 2.35 | 654 | 2.55                |  |
| 6400  | 451 | 1.42 | 485 | 1.60 | 515 | 1.76 | 541 | 1.93 | 566 | 2.12 | 589   | 2.32 | 613 | 2.51 | 636 | 2.70                           | 658 | 2.90 | 681 | 3.12                |  |
| 7200  | 499 | 1.96 | 531 | 2.18 | 559 | 2.36 | 584 | 2.55 | 607 | 2.74 | 630   | 2.95 | 651 | 3.17 | 672 | 3.38                           | 692 | 3.60 | 713 | 3.82                |  |
| 8000  | 548 | 2.64 | 577 | 2.88 | 603 | 3.10 | 627 | 3.29 | 650 | 3.50 | 672   | 3.72 | 691 | 3.95 | 711 | 4.19                           | 730 | 4.43 | 748 | 4.67                |  |
| 8800  | 596 | 3.45 | 623 | 3.71 | 649 | 3.97 | 672 | 4.21 | 694 | 4.43 | 715   | 4.66 | 734 | 4.89 | 752 | 5.13                           | 770 | 5.39 | 787 | 5.66 <sup>(b)</sup> |  |
| 9600  | 645 | 4.41 | 670 | 4.70 | 694 | 4.98 | 717 | 5.26 | 738 | 5.52 | 758   | 5.76 | 777 | 6.00 | 795 | 6.25                           | 812 | 6.52 | 829 | 6.80                |  |
| 5-hp Standard Motor & High Static Drive Accessory |     |      |     |      |     |      |     |      |     |      | 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(c)</sup> |      |     |      |     | 7.5-hp Oversized Motor & Drive |     |      |     |                     |  |

Continued

| External Static Pressure (Inches of Water)                          |     |                     |     |      |     |      |     |      |     |      |   |      |     |      |     |      |     |      |     |      |  |
|---|-----|---------------------|-----|------|-----|------|-----|------|-----|------|---|------|-----|------|-----|------|-----|------|-----|------|--|
| 1.10  |     | 1.20                |     | 1.30 |     | 1.40 |     | 1.50 |     | 1.60 |   | 1.70 |     | 1.80 |     | 1.90 |     | 2.00 |     |      |  |
| cfm   | rpm | bhp                 | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm   | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  | rpm | bhp  |  |
| 5-hp Standard Motor Drive   |     |                     |     |      |     |      |     |      |     |      | 5-hp Standard Motor & High Static Drive Accessory |      |     |      |     |      |     |      |     |      |  |
| 4000 <sup>(a)</sup>   | 626 | 1.81                | 648 | 1.97 | 669 | 2.12 | 689 | 2.28 | 708 | 2.44 | 726   | 2.60 | 744 | 2.76 | 762 | 2.92 | 778 | 3.08 | 795 | 3.25 |  |
| 4800 <sup>(a)</sup>   | 645 | 2.23                | 668 | 2.41 | 691 | 2.60 | 713 | 2.79 | 734 | 2.98 | 754   | 3.16 | 772 | 3.35 | 790 | 3.54 | 807 | 3.72 | 824 | 3.91 |  |
| 5600 <sup>(a)</sup>   | 675 | 2.74                | 695 | 2.94 | 715 | 3.14 | 734 | 3.34 | 753 | 3.54 | 773   | 3.76 | 793 | 3.97 | 812 | 4.19 | 831 | 4.41 | 849 | 4.63 |  |
| 6400  | 704 | 3.34                | 725 | 3.56 | 746 | 3.79 | 764 | 4.01 | 783 | 4.23 | 800   | 4.46 | 817 | 4.69 | 834 | 4.91 | 851 | 5.15 | 868 | 5.39 |  |
| 7200  | 733 | 4.04                | 753 | 4.28 | 773 | 4.52 | 793 | 4.77 | 812 | 5.02 | 831   | 5.28 | 848 | 5.53 | 865 | 5.78 | 881 | 6.03 | 896 | 6.29 |  |
| 8000  | 767 | 4.91                | 785 | 5.15 | 804 | 5.40 | 822 | 5.65 | 840 | 5.92 | 858   | 6.19 | 876 | 6.46 | 894 | 6.75 | 911 | 7.03 | 927 | 7.31 |  |
| 8800  | 805 | 5.93 <sup>(d)</sup> | 822 | 6.19 | 839 | 6.45 | 855 | 6.72 | 872 | 6.99 | 888   | 7.25 | 905 | 7.54 | 922 | 7.83 | 938 | 8.13 | 955 | 8.43 |  |
| 9600  | 845 | 7.09                | 861 | 7.38 | 876 | 7.67 | 892 | 7.96 | 907 | 8.24 | 923   | 8.52 | —   | —    | —   | —    | —   | —    | —   | —    |  |
| 7.5-hp Oversized Motor & Field Supplied Motor Sheave <sup>(c)</sup> |     |                     |     |      |     |      |     |      |     |      | 7.5-hp Oversized Motor & Drive                    |      |     |      |     |      |     |      |     |      |  |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

- (a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Frost and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.
- (b) 5-hp Standard Motor & High Static Drive Accessory
- (c) Field supplied motor sheave 1VP50 x 1 1/8 required.
- (d) 7.5-hp Oversized Motor & Field Supplied Motor Sheave<sup>(c)</sup>



## Performance Data

**Table 64. Evaporator fan performance—25 tons—TH\*300G**

| cfm                 | External Static Pressure (Inches of Water)         |      |      |      |      |      |      |      |      |      |   |      |      |      |      |      |      |      |      |      |
|---------------------|--|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|------|------|------|
|                     | 0.10   |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60  |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |
|                     | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
|                     | 7.5-hp Standard Motor & Low Static Drive Accessory |      |      |      |      |      |      |      |      |      | 7.5-hp Standard Motor & Drive                       |      |      |      |      |      |      |      |      |      |
| 5000 <sup>(a)</sup> | 353  | 0.68 | 394  | 0.81 | 429  | 0.95 | 459  | 1.10 | 489  | 1.25 | 518   | 1.41 | 547  | 1.58 | 575  | 1.75 | 599  | 1.93 | 622  | 2.10 |
| 6500 <sup>(a)</sup> | 432  | 1.35 | 469  | 1.55 | 501  | 1.72 | 530  | 1.89 | 555  | 2.07 | 579   | 2.26 | 603  | 2.46 | 626  | 2.65 | 648  | 2.85 | 671  | 3.06 |
| 7000 <sup>(a)</sup> | 460  | 1.65 | 495  | 1.86 | 526  | 2.07 | 554  | 2.24 | 580  | 2.42 | 603   | 2.63 | 625  | 2.83 | 646  | 3.05 | 668  | 3.25 | 689  | 3.47 |
| 7500 <sup>(a)</sup> | 487  | 1.98 | 521  | 2.22 | 551  | 2.45 | 579  | 2.65 | 604  | 2.84 | 627   | 3.04 | 648  | 3.26 | 669  | 3.48 | 689  | 3.71 | 709  | 3.93 |
| 8000                | 514  | 2.37 | 547  | 2.63 | 577  | 2.87 | 603  | 3.10 | 628  | 3.30 | 651   | 3.51 | 672  | 3.73 | 692  | 3.96 | 711  | 4.20 | 730  | 4.44 |
| 8500                | 543  | 2.81 | 574  | 3.09 | 602  | 3.34 | 628  | 3.60 | 653  | 3.83 | 675   | 4.04 | 696  | 4.25 | 716  | 4.49 | 735  | 4.74 | 753  | 5.00 |
| 9000                | 572  | 3.31 | 600  | 3.58 | 628  | 3.87 | 654  | 4.15 | 678  | 4.40 | 700   | 4.63 | 720  | 4.86 | 740  | 5.08 | 759  | 5.34 | 777  | 5.60 |
| 9500                | 600  | 3.85 | 628  | 4.17 | 655  | 4.47 | 680  | 4.75 | 703  | 5.02 | 724   | 5.27 | 745  | 5.52 | 764  | 5.76 | 783  | 6.00 | 801  | 6.28 |
| 10000               | 627  | 4.42 | 656  | 4.78 | 681  | 5.09 | 705  | 5.41 | 728  | 5.71 | 749   | 5.99 | 770  | 6.26 | 789  | 6.50 | 807  | 6.76 | 825  | 7.02 |
| 10500               | 657  | 5.13 | 683  | 5.45 | 708  | 5.80 | 731  | 6.13 | 753  | 6.44 | 775   | 6.76 | 794  | 7.04 | 813  | 7.31 | 831  | 7.57 | 849  | 7.84 |
| 11000               | 685  | 5.81 | 711  | 6.21 | 735  | 6.58 | 758  | 6.93 | 778  | 7.23 | 800   | 7.58 | 819  | 7.88 | 838  | 8.19 | 856  | 8.45 | —    | —    |
|                     | 7.5-hp Standard Motor & Drive                      |      |      |      |      |      |      |      |      |      | 7.5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |

Continued

| cfm                 | External Static Pressure (Inches of Water)          |      |      |      |      |      |      |      |      |      |
|---------------------|---|------|------|------|------|------|------|------|------|------|
|                     | 1.10  |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      |
|                     | rpm   | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  |
|                     | 7.5-hp Standard Motor & Drive                       |      |      |      |      |      |      |      |      |      |
| 5000 <sup>(a)</sup> | 644   | 2.28 | 666  | 2.46 | 688  | 2.65 | 710  | 2.85 | 731  | 3.04 |
| 6500 <sup>(a)</sup> | 693   | 3.28 | 715  | 3.50 | 736  | 3.73 | 757  | 3.96 | 775  | 4.19 |
| 7000 <sup>(a)</sup> | 710   | 3.68 | 731  | 3.91 | 752  | 4.15 | 772  | 4.40 | 792  | 4.64 |
| 7500 <sup>(a)</sup> | 729   | 4.16 | 748  | 4.38 | 768  | 4.62 | 787  | 4.87 | 807  | 5.13 |
| 8000                | 749   | 4.68 | 768  | 4.92 | 786  | 5.16 | 804  | 5.41 | 823  | 5.66 |
| 8500                | 771   | 5.25 | 789  | 5.51 | 806  | 5.76 | 824  | 6.02 | 841  | 6.28 |
| 9000                | 794   | 5.87 | 811  | 6.14 | 827  | 6.41 | 844  | 6.69 | 861  | 6.95 |
| 9500                | 817   | 6.55 | 834  | 6.83 | 850  | 7.12 | 866  | 7.41 | 882  | 7.69 |
| 10000               | 841   | 7.29 | 857  | 7.59 | 873  | 7.87 | 888  | 8.18 | 904  | 8.48 |
| 10500               | 865   | 8.11 | 881  | 8.41 | —    | —    | —    | —    | —    | —    |
| 11000               | —   | —    | —    | —    | —    | —    | —    | —    | —    | —    |
|                     | 7.5-hp Standard Motor & High Static Drive Accessory |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.
- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

**Table 65. Evaporator fan performance—25 tons—YH\*300G**

|   | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|   | 0.10                                       |      | 0.20 |      | 0.30 |      | 0.40 |      | 0.50 |      | 0.60 |      | 0.70 |      | 0.80 |      | 0.90 |      | 1.00 |      |      |
|   | cfm  | rpm  | bhp  |
| 7.5-hp Standard Motor & Drive                       |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 5000 <sup>(a)</sup>                                 | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | —    | 586  | 1.83 | 609  | 2.00 | 632  | 2.18 |
| 6500 <sup>(a)</sup>                                 | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    | 596  | 2.41 | 619  | 2.60 | 642  | 2.80 | 664  | 3.00 | 687  | 3.22 |      |
| 7000 <sup>(a)</sup>                                 | —  | —    | —    | —    | —    | —    | —    | —    | 599  | 2.59 | 621  | 2.80 | 643  | 3.01 | 665  | 3.22 | 686  | 3.43 | 707  | 3.65 |      |
| 7500 <sup>(a)</sup>                                 | —  | —    | —    | —    | —    | —    | 603  | 2.83 | 626  | 3.03 | 648  | 3.25 | 668  | 3.47 | 688  | 3.70 | 708  | 3.92 | 728  | 4.15 |      |
| 8000  | —  | —    | —    | —    | 606  | 3.12 | 631  | 3.32 | 653  | 3.53 | 674  | 3.75 | 694  | 3.98 | 713  | 4.22 | 732  | 4.47 | 751  | 4.70 |      |
| 8500  | 582  | 3.16 | 609  | 3.41 | 635  | 3.66 | 658  | 3.87 | 680  | 4.09 | 701  | 4.31 | 721  | 4.55 | 739  | 4.80 | 757  | 5.05 | 775  | 5.31 |      |
| 9000  | 611  | 3.68 | 639  | 3.99 | 664  | 4.25 | 687  | 4.49 | 708  | 4.73 | 728  | 4.95 | 748  | 5.18 | 766  | 5.44 | 783  | 5.71 | 800  | 5.98 |      |
| 9500  | 644  | 4.36 | 668  | 4.60 | 692  | 4.89 | 715  | 5.16 | 736  | 5.41 | 756  | 5.66 | 775  | 5.89 | 793  | 6.15 | 810  | 6.43 | 826  | 6.71 |      |
| 10000   | 676  | 5.05 | 698  | 5.31 | 722  | 5.62 | 744  | 5.93 | 764  | 6.19 | 784  | 6.44 | 802  | 6.68 | 820  | 6.95 | 837  | 7.22 | 853  | 7.51 |      |
| 10500   | 703  | 5.70 | 728  | 6.07 | 752  | 6.43 | 772  | 6.72 | 792  | 7.00 | 811  | 7.27 | 829  | 7.54 | 847  | 7.81 | 864  | 8.08 | 880  | 8.38 |      |
| 11000   | 739  | 6.65 | 759  | 6.93 | 780  | 7.27 | 801  | 7.58 | 821  | 7.92 | 840  | 8.23 | 857  | 8.48 | —    | —    | —    | —    | —    | —    |      |
| 7.5-hp Standard Motor & High Static Drive Accessory |  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

**Continued**

|   | External Static Pressure (Inches of Water) |      |      |      |      |      |      |      |      |      |
|---|--|------|------|------|------|------|------|------|------|------|
|   | 1.10                                       |      | 1.20 |      | 1.30 |      | 1.40 |      | 1.50 |      |
|   | cfm  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  | bhp  | rpm  |
| 7.5-hp Standard Motor & Drive                       |  |      |      |      |      |      |      |      |      |      |
| 5000 <sup>(a)</sup>                                 | 653  | 2.36 | 675  | 2.54 | 697  | 2.74 | 719  | 2.93 | 740  | 3.13 |
| 6500 <sup>(a)</sup>                                 | 709  | 3.44 | 731  | 3.67 | 751  | 3.90 | 770  | 4.13 | 788  | 4.35 |
| 7000 <sup>(a)</sup>                                 | 727  | 3.88 | 748  | 4.11 | 769  | 4.36 | 789  | 4.60 | 808  | 4.85 |
| 7500 <sup>(a)</sup>                                 | 748  | 4.37 | 767  | 4.61 | 787  | 4.86 | 806  | 5.12 | 825  | 5.38 |
| 8000  | 770  | 4.94 | 788  | 5.18 | 806  | 5.44 | 825  | 5.69 | 843  | 5.96 |
| 8500  | 793  | 5.57 | 811  | 5.83 | 828  | 6.08 | 845  | 6.34 | 862  | 6.61 |
| 9000  | 817  | 6.25 | 834  | 6.52 | 851  | 6.79 | 867  | 7.06 | 884  | 7.34 |
| 9500  | 843  | 6.99 | 858  | 7.27 | 875  | 7.57 | 890  | 7.84 | 906  | 8.13 |
| 10000   | 869  | 7.79 | 884  | 8.10 | 899  | 8.39 | —    | —    | —    | —    |
| 10500   | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    |
| 11000   | —  | —    | —    | —    | —    | —    | —    | —    | —    | —    |
| 7.5-hp Standard Motor & High Static Drive Accessory |  |      |      |      |      |      |      |      |      |      |

**Notes:**

1. For Standard Evaporator Fan Speed (rpm), reference [Table 67, p. 100](#).
2. For High Evaporator Fan Speed (rpm), reference [Table 68, p. 100](#).
3. For Oversized Evaporator Fan Speed (rpm), reference [Table 69, p. 101](#).
4. Fan motor heat (MBh) = 3.15 x Fan bhp.
5. Data includes pressure drop due to standard filters and wet coils. No accessories or options are included in pressure drop data.
6. For all non-standard sheave combinations, please refer to accessory installer's guides ACC-SVN34\*-EN and ACC-SVN72\*-EN.
7. Factory supplied motors, in commercial equipment, are definite purpose motors, specifically designed and tested to operate reliably and continuously at all cataloged conditions. Using the full horsepower range of our fan motors as shown in our tabular data will not result in nuisance tripping or premature motor failure. Our product's warranty will not be affected.

- (a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:
- Electric heaters on applications below 320 cfm/ton.
  - Froststat and Crankcase heaters are required on applications below 320 cfm/ton.
  - Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.



## Performance Data

**Table 66. Standard motor and drive/fan speed (rpm)**

| Tons | Unit Model Number | 6 Turns Open | 5 Turns Open | 4 Turns Open | 3 Turns Open | 2 Turns Open | 1 Turn Open | Closed |
|------|-------------------|--------------|--------------|--------------|--------------|--------------|-------------|--------|
| 12½  | T/YS*150F3,4,W,K  | 642          | 683          | 725          | 766          | 808          | 849         | N/A    |
|      | T/YH*150G3,4,W    | 452          | 485          | 518          | 551          | 584          | 619         | N/A    |
| 15   | T/YS*180F3,4,W,K  | 559          | 600          | 642          | 683          | 725          | 766         | N/A    |
|      | T/YH*180G3,4,W    | 452          | 485          | 518          | 551          | 584          | 619         | N/A    |
| 17½  | T/YS*210F3,4,W,K  | 605          | 650          | 695          | 740          | 785          | 829         | N/A    |
|      | T/YH*210G3,4,W    | 506          | 544          | 582          | 620          | 658          | 694         | N/A    |
| 20   | T/YS*240F3,4,W,K  | 605          | 650          | 695          | 740          | 785          | 829         | N/A    |
|      | T/YH*240G3,4,W    | 506          | 544          | 582          | 620          | 658          | 694         | N/A    |
| 25   | T/YS*300F3,4,W,K  | 694          | 731          | 768          | 805          | 842          | 881         | N/A    |
|      | T/YH*300G3,4,W    | 581          | 619          | 657          | 695          | 733          | 769         | N/A    |

Note: Factory set at 3 turns open.

**Table 67. Standard motor and low static fan drive**

| Tons | Unit Model Number | 6 Turns Open | 5 Turns Open | 4 Turns Open | 3 Turns Open | 2 Turns Open | 1 Turn Open | Closed |
|------|-------------------|--------------|--------------|--------------|--------------|--------------|-------------|--------|
| 12½  | T/YS*150F3,4,W,K  | 452          | 485          | 518          | 551          | 584          | 619         | N/A    |
|      | T/YH*150G3,4,W    | 351          | 377          | 403          | 429          | 455          | 480         | N/A    |
| 15   | T/YS*180F3,4,W,K  | 452          | 485          | 518          | 551          | 584          | 619         | N/A    |
|      | T/YH*180G3,4,W    | 351          | 377          | 403          | 429          | 455          | 480         | N/A    |
| 17½  | T/YS*210F3,4,W,K  | 506          | 544          | 582          | 620          | 658          | 694         | N/A    |
|      | T/YH*210G3,4,W    | 450          | 480          | 510          | 540          | 570          | 600         | N/A    |
| 20   | T/YS*240F3,4,W,K  | 506          | 544          | 582          | 620          | 658          | 694         | N/A    |
|      | T/YH*240G3,4,W    | 450          | 480          | 510          | 540          | 570          | 600         | N/A    |
| 25   | T/YS*300F3,4,W,K  | 581          | 619          | 657          | 695          | 733          | 769         | N/A    |

**Table 68. Standard motor and high static drive accessory sheave/fan speed (rpm)**

| Tons | Unit Model Number | 6 Turns Open | 5 Turns Open | 4 Turns Open | 3 Turns Open | 2 Turns Open | 1 Turn Open | Closed |
|------|-------------------|--------------|--------------|--------------|--------------|--------------|-------------|--------|
| 12½  | T/YS*150F3,4,W,K  | 766          | 808          | 849          | 891          | 891          | 974         | N/A    |
|      | T/YH*150G3,4,W    | 619          | 652          | 685          | 718          | 751          | 786         | N/A    |
| 15   | T/YS*180F3,4,W,K  | 719          | 753          | 786          | 820          | 853          | 887         | N/A    |
|      | T/YH*180G3,4,W    | 619          | 652          | 685          | 718          | 751          | 786         | N/A    |
| 17½  | T/YS*210F3,4,W,K  | 829          | 874          | 919          | 964          | 1009         | 1053        | N/A    |
|      | T/YH*210G3,4,W    | 694          | 731          | 768          | 805          | 842          | 881         | N/A    |
| 20   | T/YS*240F3,4,W,K  | 829          | 874          | 919          | 964          | 1009         | 1053        | N/A    |
|      | T/YH*240G3,4,W    | 694          | 731          | 768          | 805          | 842          | 881         | N/A    |
| 25   | T/YS*300F3,4,W,K  | 806          | 844          | 882          | 920          | 958          | 994         | N/A    |
|      | T/YH*300G3,4,W    | 694          | 739          | 784          | 829          | 874          | 919         | N/A    |

## Performance Data

**Table 69. Oversized motor and drive/fan speed (rpm)**

| Tons | Unit Model Number | 6 Turns Open | 5 Turns Open | 4 Turns Open | 3 Turns Open | 2 Turns Open | 1 Turn Open | Closed |
|------|-------------------|--------------|--------------|--------------|--------------|--------------|-------------|--------|
| 12½  | T/YS*150F3,4,W,K  | 863          | 919          | 974          | 1030         | 1085         | 1141        | N/A    |
|      | T/YH*150G3,4,W    | 695          | 747          | 799          | 851          | 903          | 953         | N/A    |
| 15   | T/YS*180F3,4,W,K  | 695          | 747          | 799          | 851          | 903          | 953         | N/A    |
|      | T/YH*180G3,4,W    | 695          | 747          | 799          | 851          | 903          | 953         | N/A    |
| 17½  | T/YS*210F3,4,W,K  | 806          | 844          | 882          | 920          | 958          | 994         | N/A    |
|      | T/YH*210G3,4,W    | 806          | 844          | 882          | 920          | 958          | 994         | N/A    |
| 20   | T/YS*240F3,4,W,K  | 806          | 844          | 882          | 920          | 958          | 994         | N/A    |
|      | T/YH*240G3,4,W    | 806          | 844          | 882          | 920          | 958          | 994         | N/A    |

**Table 70. Static pressure drop through accessories (inches water column)**

| Tons | Unit Model Number | cfm <sup>(a)</sup> | Std Filters <sup>(b)</sup> | Through Reheat Coil | 2" MERV 8 Filter <sup>(c)</sup> | 2" MERV 13 Filter <sup>(c)</sup> | Std Economizer with OA/RA Dampers <sup>(d)</sup> |         | Low Leak Economizer with OA/RA Dampers <sup>(d)</sup> |         | Electric Heater Accessory (kW) <sup>(e)</sup> |       |      |      |    |
|------|-------------------|--------------------|----------------------------|---------------------|---------------------------------|----------------------------------|--|---------|---|---------|---|-------|------|------|----|
|      |                   |                    |                            |                     |                                 |                                  | 100% OA  | 100% RA | 100% OA   | 100% RA | 5-12  | 14-27 | 36   | 54   | 72 |
| 12½  | T/YS*150F         | 4000               | 0.05                       | —                   | 0.08                            | 0.12                             | 0.19   | 0.02    | 0.27  | 0.18    | —   | 0.03  | 0.03 | 0.04 | —  |
|      |                   | 5000               | 0.07                       | —                   | 0.11                            | 0.15                             | 0.26   | 0.03    | 0.41  | 0.29    | —   | 0.04  | 0.05 | 0.06 | —  |
|      |                   | 6000               | 0.10                       | —                   | 0.15                            | 0.19                             | 0.33   | 0.04    | 0.58  | 0.44    | —   | 0.06  | 0.07 | 0.09 | —  |
|      | T/YHH150G         | 4000               | 0.02                       | —                   | 0.04                            | 0.07                             | 0.19   | 0.02    | —   | —       | —   | 0.03  | 0.03 | 0.04 | —  |
|      |                   | 5000               | 0.03                       | —                   | 0.05                            | 0.10                             | 0.26   | 0.03    | —   | —       | —   | 0.04  | 0.05 | 0.06 | —  |
|      |                   | 6000               | 0.05                       | —                   | 0.07                            | 0.13                             | 0.33   | 0.04    | —   | —       | —   | 0.06  | 0.07 | 0.09 | —  |
|      | T/YHD150G         | 2500               | 0.01                       | 0.00                | 0.01                            | 0.03                             | 0.07   | 0.01    | 0.07  | 0.04    | —   | *     | *    | *    | —  |
|      |                   | 4000               | 0.02                       | 0.01                | 0.04                            | 0.08                             | 0.19   | 0.02    | 0.16  | 0.10    | —   | 0.03  | 0.03 | 0.04 | —  |
|      |                   | 5000               | 0.03                       | 0.02                | 0.05                            | 0.11                             | 0.26   | 0.03    | 0.24  | 0.16    | —   | 0.04  | 0.05 | 0.06 | —  |
| 15   | T/YSH180F         | 4800               | 0.03                       | —                   | 0.06                            | 0.09                             | 0.14   | 0.03    | —   | —       | —   | 0.04  | 0.04 | 0.05 | —  |
|      |                   | 6000               | 0.05                       | —                   | 0.09                            | 0.13                             | 0.20   | 0.04    | —   | —       | —   | 0.06  | 0.07 | 0.08 | —  |
|      |                   | 7200               | 0.07                       | —                   | 0.11                            | 0.16                             | 0.27   | 0.05    | —   | —       | —   | 0.09  | 0.10 | 0.12 | —  |
|      | T/YSD180F         | 4800               | 0.04                       | —                   | 0.07                            | 0.11                             | 0.14   | 0.03    | 0.22  | 0.15    | —   | 0.04  | 0.04 | 0.05 | —  |
|      |                   | 6000               | 0.06                       | —                   | 0.10                            | 0.14                             | 0.20   | 0.04    | 0.33  | 0.24    | —   | 0.06  | 0.07 | 0.08 | —  |
|      |                   | 7200               | 0.09                       | —                   | 0.13                            | 0.18                             | 0.27   | 0.05    | 0.45  | 0.35    | —   | 0.09  | 0.10 | 0.12 | —  |
|      | T/YHH180G         | 4800               | 0.03                       | —                   | 0.04                            | 0.06                             | 0.14   | 0.03    | —   | —       | —   | 0.04  | 0.04 | 0.05 | —  |
|      |                   | 6000               | 0.05                       | —                   | 0.06                            | 0.1                              | 0.20   | 0.04    | —   | —       | —   | 0.06  | 0.07 | 0.08 | —  |
|      |                   | 7200               | 0.07                       | —                   | 0.08                            | 0.13                             | 0.27   | 0.05    | —   | —       | —   | 0.09  | 0.10 | 0.12 | —  |
|      | T/YHD180G         | 3000               | 0.02                       | 0.01                | 0.02                            | 0.03                             | 0.07   | 0.03    | 0.10  | 0.06    | —   | *     | *    | *    | —  |
|      |                   | 4800               | 0.04                       | 0.01                | 0.05                            | 0.08                             | 0.14   | 0.03    | 0.22  | 0.15    | —   | 0.04  | 0.04 | 0.05 | —  |
|      |                   | 6000               | 0.06                       | 0.02                | 0.06                            | 0.11                             | 0.2  | 0.04    | 0.33  | 0.24    | —   | 0.06  | 0.07 | 0.08 | —  |
|      |                   | 7200               | 0.09                       | 0.03                | 0.08                            | 0.14                             | 0.05   | 0.45    | 0.35  | —       | 0.09  | 0.1   | 0.12 | —    |    |



## Performance Data

**Table 70. Static pressure drop through accessories (inches water column) (continued)**

| Tons  | Unit Model Number | cfm <sup>(a)</sup> | Std Filters <sup>(b)</sup> | Through Reheat Coil | 2" MERV 8 Filter <sup>(c)</sup> | 2" MERV 13 Filter <sup>(c)</sup> | Std Economizer with OA/RA Dampers <sup>(d)</sup> |         | Low Leak Economizer with OA/RA Dampers <sup>(d)</sup> |         | Electric Heater Accessory (kW) <sup>(e)</sup> |       |      |      |      |
|-------|-------------------|--------------------|----------------------------|---------------------|---------------------------------|----------------------------------|--|---------|---|---------|---|-------|------|------|------|
|       |                   |                    |                            |                     |                                 |                                  | 100% OA  | 100% RA | 100% OA   | 100% RA | 5-12  | 14-27 | 36   | 54   | 72   |
|       |                   |                    |                            |                     |                                 |                                  |  |         |   |         |   |       |      |      |      |
| 17½   | T/YSH210F         | 5600               | 0.05                       | —                   | 0.08                            | 0.11                             | 0.18   | 0.04    | —   | —       | —   | —     | 0.05 | 0.06 | 0.07 |
|       |                   | 7000               | 0.07                       | —                   | 0.11                            | 0.15                             | 0.26   | 0.04    | —   | —       | —   | —     | 0.08 | 0.09 | 0.11 |
|       |                   | 8400               | 0.10                       | —                   | 0.14                            | 0.18                             | 0.35   | 0.06    | —   | —       | —   | —     | 0.12 | 0.13 | 0.16 |
|       | T/YSD210F         | 5600               | 0.06                       | —                   | 0.08                            | 0.13                             | 0.18   | 0.04    | 0.29  | 0.21    | —   | —     | 0.05 | 0.06 | 0.07 |
|       |                   | 7000               | 0.09                       | —                   | 0.11                            | 0.17                             | 0.26   | 0.04    | 0.43  | 0.33    | —   | —     | 0.08 | 0.09 | 0.11 |
|       |                   | 8400               | 0.12                       | —                   | 0.14                            | 0.21                             | 0.35   | 0.06    | 0.59  | 0.48    | —   | —     | 0.12 | 0.13 | 0.16 |
|       | T/YHH210G         | 5600               | 0.03                       | —                   | 0.05                            | 0.09                             | 0.18   | 0.04    | —   | —       | —   | —     | 0.05 | 0.06 | 0.07 |
|       |                   | 7000               | 0.05                       | —                   | 0.08                            | 0.12                             | 0.26   | 0.04    | —   | —       | —   | —     | 0.08 | 0.09 | 0.11 |
|       |                   | 8400               | 0.07                       | —                   | 0.10                            | 0.15                             | 0.35   | 0.06    | —   | —       | —   | —     | 0.12 | 0.13 | 0.16 |
|       | T/YHD210G         | 3500               | 0.01                       | 0.04                | 0.02                            | 0.04                             | 0.09   | 0.03    | 0.13  | 0.08    | —   | —     | *    | *    | *    |
|       |                   | 5600               | 0.04                       | 0.10                | 0.05                            | 0.10                             | 0.18   | 0.04    | 0.29  | 0.21    | —   | —     | 0.05 | 0.06 | 0.07 |
|       |                   | 7000               | 0.06                       | 0.13                | 0.08                            | 0.13                             | 0.26   | 0.04    | 0.43  | 0.33    | —   | —     | 0.08 | 0.09 | 0.11 |
| 8400  |                   | 0.08               | 0.16                       | 0.10                | 0.16                            | 0.35                             | 0.06   | 0.59    | 0.48  | —       | —   | 0.12  | 0.13 | 0.16 |      |
| 20    | T/YSH240F         | 6400               | 0.06                       | —                   | 0.10                            | 0.14                             | 0.22   | 0.04    | —   | —       | —   | —     | 0.06 | 0.08 | 0.09 |
|       |                   | 8000               | 0.09                       | —                   | 0.13                            | 0.18                             | 0.32   | 0.05    | —   | —       | —   | —     | 0.10 | 0.12 | 0.14 |
|       |                   | 9600               | 0.13                       | —                   | 0.17                            | 0.21                             | 0.44   | 0.07    | —   | —       | —   | —     | 0.14 | 0.17 | 0.20 |
|       | T/YSD240F         | 6400               | 0.07                       | —                   | 0.11                            | 0.15                             | 0.22   | 0.04    | 0.37  | 0.27    | —   | —     | 0.06 | 0.08 | 0.09 |
|       |                   | 8000               | 0.11                       | —                   | 0.15                            | 0.20                             | 0.32   | 0.05    | 0.54  | 0.43    | —   | —     | 0.10 | 0.12 | 0.14 |
|       |                   | 9600               | 0.16                       | —                   | 0.20                            | 0.25                             | 0.44   | 0.07    | 0.75  | 0.62    | —   | —     | 0.14 | 0.17 | 0.20 |
|       | T/YHH240G         | 6400               | 0.04                       | —                   | 0.07                            | 0.11                             | 0.22   | 0.04    | —   | —       | —   | —     | 0.06 | 0.08 | 0.09 |
|       |                   | 8000               | 0.06                       | —                   | 0.09                            | 0.14                             | 0.32   | 0.05    | —   | —       | —   | —     | 0.10 | 0.12 | 0.14 |
|       |                   | 9600               | 0.09                       | —                   | 0.12                            | 0.18                             | 0.44   | 0.07    | —   | —       | —   | —     | 0.14 | 0.17 | 0.20 |
|       | T/YHD240G         | 4000               | 0.02                       | 0.02                | 0.03                            | 0.06                             | 0.11   | 0.03    | 0.16  | 0.10    | —   | —     | *    | *    | *    |
|       |                   | 6400               | 0.05                       | 0.05                | 0.08                            | 0.12                             | 0.22   | 0.04    | 0.37  | 0.27    | —   | —     | 0.06 | 0.08 | 0.09 |
|       |                   | 8000               | 0.08                       | 0.07                | 0.10                            | 0.15                             | 0.32   | 0.05    | 0.54  | 0.43    | —   | —     | 0.10 | 0.12 | 0.14 |
| 9600  |                   | 0.11               | 0.11                       | 0.14                | 0.19                            | 0.44                             | 0.07   | 0.75    | 0.62  | —       | —   | 0.14  | 0.17 | 0.20 |      |
| 25    | T/YSH300F         | 7000               | 0.07                       | —                   | 0.11                            | 0.15                             | 0.26   | 0.04    | —   | —       | —   | —     | 0.08 | 0.10 | 0.11 |
|       |                   | 9000               | 0.11                       | —                   | 0.15                            | 0.20                             | 0.4  | 0.07    | —   | —       | —   | —     | 0.13 | 0.15 | 0.18 |
|       |                   | 11000              | 0.17                       | —                   | 0.22                            | 0.26                             | 0.6  | 0.1     | —   | —       | —   | —     | 0.18 | 0.22 | 0.26 |
|       | T/YSD300F         | 7000               | 0.09                       | —                   | 0.13                            | 0.17                             | 0.26   | 0.04    | 0.43  | 0.33    | —   | —     | 0.08 | 0.10 | 0.11 |
|       |                   | 9000               | 0.14                       | —                   | 0.18                            | 0.23                             | 0.4  | 0.07    | 0.67  | 0.55    | —   | —     | 0.13 | 0.15 | 0.18 |
|       |                   | 11000              | 0.21                       | —                   | 0.25                            | 0.32                             | 0.57   | 0.1     | 0.95  | 0.82    | —   | —     | 0.18 | 0.22 | 0.26 |
|       | T/YHH300G         | 7000               | 0.05                       | —                   | 0.08                            | 0.12                             | 0.26   | 0.04    | —   | —       | —   | —     | 0.08 | 0.10 | 0.11 |
|       |                   | 9000               | 0.08                       | —                   | 0.10                            | 0.16                             | 0.4  | 0.07    | —   | —       | —   | —     | 0.13 | 0.15 | 0.18 |
|       |                   | 11000              | 0.12                       | —                   | 0.15                            | 0.20                             | 0.6  | 0.1     | —   | —       | —   | —     | 0.18 | 0.22 | 0.26 |
|       | T/YHD300G         | 5000               | 0.03                       | —                   | 0.04                            | 0.08                             | 0.15   | 0.03    | 0.24  | 0.16    | —   | —     | *    | *    | *    |
|       |                   | 7000               | 0.06                       | —                   | 0.09                            | 0.13                             | 0.26   | 0.04    | 0.43  | 0.33    | —   | —     | 0.08 | 0.1  | 0.11 |
|       |                   | 9000               | 0.10                       | —                   | 0.12                            | 0.18                             | 0.4  | 0.07    | 0.67  | 0.55    | —   | —     | 0.13 | 0.15 | 0.18 |
| 11000 |                   | 0.10               | —                          | 0.17                | 0.22                            | 0.57                             | 0.10   | 0.95    | 0.82  | —       | —   | 0.18  | 0.22 | 0.26 |      |

(a) Unit applications below 320 cfm/ton are only applicable to Constant Volume THD models without electric heat and YHD models equipped with modulating gas heat. See below for restrictions:

- Electric heaters on applications below 320 cfm/ton.

- Froststat and Crankcase heaters are required on applications below 320 cfm/ton.

- Multi-speed, single zone VAV or multi-zone VAV applications are capable of running below 320 cfm/ton during low speed airflow operation, but "full" airflow must be set to 320 cfm/ton or higher.

(b) Tested with: 2" filters 12½-25 tons.

(c) Difference in pressure drop should be considered when utilizing optional 2" pleated filters.

(d) OA = Outside Air and RA = Return Air.

(e) Nominal kW ratings at 240, 480, 600 volts.

**Table 71. Gas fired heating capacities**

| Tons | Unit Model Number | Heating Input MBh <sup>(a)</sup> | Heating Output MBh <sup>(a)</sup> | Air Temp. Rise, °F |
|------|-------------------|----------------------------------|-----------------------------------|--------------------|
| 12½  | YS/H*150F/G-L1    | 150/100                          | 122/81                            | 10–40              |
|      | YS/H*150F/G-H1    | 250/175                          | 203/142                           | 25–55              |
|      | YS/H*150F/G-V1    | 350/75                           | 284/56                            | 35–65              |
| 15   | YS/H*180F/G-L1    | 250/175                          | 203/142                           | 25–55              |
|      | YS/H*180F/G-H1    | 350/250                          | 284/203                           | 35–65              |
|      | YS/H*180F/G-V1    | 350/75                           | 284/56                            | 35–65              |
| 17½  | YS/H*210F/G-L1    | 250/175                          | 203/142                           | 25–55              |
|      | YS/H*210F/G-H1    | 350/250                          | 284/203                           | 35–65              |
|      | YS/H*210F/G-V1    | 350/75                           | 284/56                            | 35–65              |
| 20   | YS/H*240F/G-L1    | 250/175                          | 203/142                           | 15–45              |
|      | YS/H*240F/G-H1    | 400/300                          | 324/243                           | 25–55              |
|      | YS/H*240F/G-V1    | 350/75                           | 284/56                            | 35–65              |
| 25   | YS/H*300F/G-L1    | 250/175                          | 203/142                           | 15–45              |
|      | YS/H*300F/G-H1    | 400/300                          | 324/243                           | 25–55              |
|      | YS/H*300F/G-V1    | 350/75                           | 284/56                            | 35–65              |

(a) For two stage heaters (input or output), second stage is total heating capacity. Second stage/first stage.

**Table 72. Auxiliary electric heat capacity**

| Tons   | Unit Model Number.                                       | Total <sup>(a)</sup>    |            | No. of Stages | Stage1   |            | Stage 2  |            |
|--------|--|-------------------------|------------|---------------|----------|------------|----------|------------|
|        |  | kW Input <sup>(b)</sup> | MBh Output |               | kW Input | MBh Output | kW Input | MBh Output |
| 12½–15 | TS/H*150F/G3,4,W<br>TS/H*180F/G3,4,W                     | 18.00                   | 61.47      | 1             | 18.00    | 61.47      | —        | —          |
|        |  | 27.00 <sup>(c)</sup>    | 92.15      | 2             | 9.00     | 30.72      | 18.00    | 61.43      |
|        |  | 36.00                   | 122.94     | 2             | 18.00    | 61.47      | 18.00    | 61.47      |
|        |  | 54.00                   | 184.41     | 2             | 36.00    | 122.94     | 18.00    | 61.47      |
| 17½–25 | TS/H*210F/G3,4,W<br>TS/H*240F/G3,4,W<br>TS/H*300F/G3,4,W | 36.00                   | 122.94     | 2             | 18.00    | 61.47      | 18.00    | 61.47      |
|        |  | 54.00                   | 184.41     | 2             | 36.00    | 122.94     | 18.00    | 61.47      |
|        |  | 72.00                   | 245.88     | 2             | 36.00    | 122.94     | 36.00    | 122.94     |

(a) Heaters are rated at 240V, 380V, 480V, and 600V. For other than rated voltage, CAP = (voltage/rated voltage)<sup>2</sup> x rated cap.

(b) For all input/output categories, does not include fan power or heat.

(c) 27 kW heater can be used with TSD180F4, TSD210F4, TSD240F4, and TSD300F4 only. Cannot be used with oversized motor.

\* Indicates both downflow and horizontal units.



## Performance Data

**Table 73. Electric heater voltage correction factors (applicable to auxiliary heat capacity)**

| Nominal Voltage | Distribution Voltage | Capacity Multiplier |
|-----------------|----------------------|---------------------|
| 240             | 208                  | 0.75                |
|                 | 230                  | 0.92                |
|                 | 240                  | 1.00                |
| 480             | 440                  | 0.84                |
|                 | 460                  | 0.94                |
|                 | 480                  | 1.00                |
| 600             | 540                  | 0.81                |
|                 | 575                  | 0.92                |
|                 | 600                  | 1.00                |

**Table 74. Air temperature rise across electric heaters (°F)**

| kW    | Stages | 12½ Tons<br>5000 cfm<br>Three Phase<br>TS*150F<br>TH*150G | 15 Tons<br>6000 cfm<br>Three Phase<br>TS*180F<br>TH*180G | 17½ Tons<br>7000 cfm<br>Three Phase<br>TS*210F<br>TH*210G | 20 Tons<br>8000 cfm<br>Three Phase<br>TS*240F<br>TH*240G | 25 Ton<br>9000 cfm<br>Three Phase<br>TS*300F<br>TH*300G |
|-------|--------|---|--|---|--|---|
| 9.00  | 1      | —   | —  | —   | —  | —   |
| 17.30 | 1      | —   | —  | —   | —  | —   |
| 18.00 | 1      | 11.4  | 9.5  | —   | —  | —   |
| 27.00 | 2      | —   | 14.2 <sup>(a)</sup>                                      | 12.2  | 10.7   | 9.5   |
| 36.00 | 2      | 22.8  | 19.0   | 16.3  | 14.2   | 12.6  |
| 54.00 | 2      | 34.1  | 28.5   | 24.4  | 21.3   | 19.0  |
| 72.00 | 2      | —   | —  | 32.5  | 28.5   | 25.3  |

**Notes:**

- For minimum design airflow, see airflow performance table for each unit. To calculate temp rise at different airflow, use the following formula:  
Temp. rise across Electric Heater = kW x 3414/1.08 x cfm.
- \*Indicates both downflow and horizontal units.

(a) 27 kW heater can be used with TSD180F4, TSD210F4, TSD240F4, and TSD300F4 only. Cannot be used with oversized motor.

**Table 75. Hot gas reheat temperature rise<sup>(a), (b)</sup>**

| Tons | SCFM | Leaving Evaporator Dry Bulb [°F] <sup>(c)</sup> |      |      |      |      |      |      |
|------|------|---|------|------|------|------|------|------|
|      |      | 35  | 40   | 45   | 50   | 55   | 60   | 65   |
| 12½  | 2500 | 30.6  | 31.8 | 32.9 | 33.8 | 34.7 | 35.5 | 36.2 |
|      | 3000 | 25.7  | 26.8 | 27.8 | 28.7 | 29.5 | 30.2 | 30.8 |
|      | 3500 | 22.2  | 23.2 | 24.1 | 24.9 | 25.6 | 26.3 | 26.9 |
|      | 4000 | 19.4  | 20.4 | 21.2 | 22.0 | 22.6 | 23.2 | 23.8 |
|      | 4500 | 17.3  | 18.2 | 19.0 | 19.7 | 20.3 | 20.9 | 21.5 |
|      | 5000 | 15.6  | 16.4 | 17.2 | 17.8 | 18.4 | 19.0 | 19.5 |
|      | 5500 | 14.2  | 15.0 | 15.7 | 16.3 | 16.9 | 17.4 | 17.9 |
|      | 6000 | 13.0  | 13.8 | 14.5 | 15.1 | 15.6 | 16.1 | 16.5 |
| 15   | 3000 | 30.4  | 31.5 | 32.5 | 33.3 | 34.1 | 34.9 | 35.5 |
|      | 3600 | 25.4  | 26.4 | 27.3 | 28.1 | 28.8 | 29.4 | 30.0 |
|      | 4200 | 21.9  | 22.8 | 23.6 | 24.4 | 25.1 | 25.7 | 26.3 |
|      | 4800 | 19.1  | 20.0 | 20.8 | 21.5 | 22.2 | 22.7 | 23.3 |
|      | 5400 | 17.0  | 17.8 | 18.6 | 19.2 | 19.8 | 20.4 | 20.9 |
|      | 6000 | 15.3  | 16.1 | 16.8 | 17.4 | 18.0 | 18.5 | 19.0 |
|      | 6600 | 13.9  | 14.7 | 15.3 | 15.9 | 16.4 | 16.9 | 17.4 |
|      | 7200 | 12.7  | 13.5 | 14.1 | 14.7 | 15.2 | 15.6 | 16.1 |
| 17½  | 3500 | 34.5  | 37.9 | 41.5 | 45.2 | 48.5 | 50.6 | 50.6 |
|      | 4200 | 28.0  | 30.9 | 33.9 | 36.8 | 39.6 | 42.0 | 43.8 |
|      | 4900 | 23.5  | 26.0 | 28.6 | 31.4 | 34.0 | 36.2 | 37.9 |
|      | 5600 | 20.3  | 22.4 | 24.7 | 27.2 | 29.7 | 31.9 | 33.5 |
|      | 6300 | 17.9  | 19.7 | 21.7 | 23.8 | 26.1 | 28.3 | 29.9 |
|      | 7000 | 16.0  | 17.5 | 19.3 | 21.3 | 23.4 | 25.3 | 26.9 |
|      | 7700 | 14.4  | 15.8 | 17.4 | 19.2 | 21.1 | 23.0 | 24.5 |
|      | 8400 | 13.2  | 14.4 | 15.8 | 17.4 | 19.3 | 21.0 | 22.5 |
| 20   | 4000 | 30.5  | 31.8 | 33.0 | 34.0 | 35.0 | 35.8 | 36.6 |
|      | 4800 | 25.5  | 26.7 | 27.8 | 28.8 | 29.6 | 30.4 | 31.2 |
|      | 5600 | 21.8  | 23.0 | 24.0 | 24.9 | 25.7 | 26.4 | 27.1 |
|      | 6400 | 19.1  | 20.2 | 21.1 | 22.0 | 22.8 | 23.4 | 24.1 |
|      | 7200 | 17.0  | 18.0 | 18.9 | 19.6 | 20.3 | 21.0 | 21.6 |
|      | 8000 | 15.3  | 16.2 | 17.1 | 17.8 | 18.5 | 19.1 | 19.6 |
|      | 8800 | 13.9  | 14.8 | 15.6 | 16.3 | 16.9 | 17.5 | 18.0 |
|      | 9600 | 12.7  | 13.6 | 14.3 | 15.0 | 15.6 | 16.1 | 16.6 |

(a) 70°F OD Ambient Temperature.

(b) For units with the Dehumidification (Hot Gas Reheat) option.

(c) Temperature does not account for indoor fan heat.

# Controls

## Economizer Controls

The standard equipment offering is a fixed dry bulb changeover control. In addition, there are two optional controls, Enthalpy and Differential Enthalpy Control.

### Enthalpy Control

Replaces the dry bulb control with a wet bulb changeover controller which has a fully adjustable setpoint. Enthalpy control offers a higher level of comfort control, along with energy savings potential, than the standard dry bulb control. This is due to the additional wet bulb sensing capability.

### Differential Enthalpy Control

Differential Enthalpy replaces the standard dry bulb control with two enthalpy sensors that compare total heat content of the indoor air and outdoor air to determine the most efficient air source. This control option offers the highest level of comfort control, plus energy efficiency, available.

### Remote Potentiometer

Minimum position setting of economizer can be remotely adjusted with this accessory.

## Zone Sensors


Zone Sensors are the building occupant's comfort control devices. They replace the conventional electro-mechanical thermostats.

**Note:** Zone sensor required for units configured for Single Zone VAV indoor fan system control to enable Single Zone VAV functionality.

### Differential Pressure Switches


This factory or field-installed option allows individual fan failure and dirty filter indication. The fan failure switch will disable all unit functions and "flash" the Service LED on the zone sensor. The dirty filter switch will light the Service LED on the zone sensor and will allow continued unit operation.

#### Manual Changeover




Heat, Cool or Off System Switch. Fan Auto or Off Switch. One temperature setpoint lever.

#### Manual/Automatic Changeover



Auto, Heat, Cool or Off System Switch. Fan Auto or Off Switch. Two temperature setpoint levers.

#### Manual/Automatic Changeover




Auto, Heat, Cool or Off System Switch. Fan Auto or Off Switch. Two temperature setpoint levers. Status Indication LED lights, System On, Heat, Cool, or Service.

### RA Remote Sensor & Room Remote Sensor


The RA Remote Sensor is a Return Air Remote Sensor which can be mounted in the return air duct to report return air temperature. The Room Remote Sensor is a Space Remote Sensor which can be mounted on the wall to report/control from a remote location in the space.

### Wireless Zone Sensor




LCD display that provides heat, cool, auto, or off. Includes two temperature setpoints and a lockable setting with °F or °C indicators.

### Manual/Automatic Changeover




Auto, Heat, Cool or Off System Switch. Fan Auto or Off Switch. Two temperature setpoint levers.

### Remote Sensor




Sensor(s) available for all zone sensors to provide remote sensing capabilities.

### Integrated Comfort™ System




Sensor(s) available with optional temperature adjustment and override buttons to provide central control through a Trane Integrated Comfort™ system.

**Programmable Night Setback**




Auto or manual changeover with seven-day programming. Keyboard selection of Heat, Cool, Fan, Auto, or On. All programmable sensors have System On, Heat, Cool, Service LED/indicators as standard. Night Setback Sensors have one (1) Occupied, one (1) Un-occupied, and one (1) Override program per day.

**CO<sub>2</sub> Sensor**




The CO<sub>2</sub> sensor shall have the ability to monitor the concentration (parts per million, ppm) of CO<sub>2</sub> (Carbon Dioxide) in the air. As the CO<sub>2</sub> concentration changes, the outside air damper modulates to meet the current ventilation needs of the zone.

**Humidity Sensor**




Field installed, wall-mounted or duct-mounted humidity sensor is used to control activation of the hot gas reheat dehumidification option. The humidity sensor can be set for humidity levels between 40 percent and 60 percent relative humidity by adjusting the ReliaTel Options Module.

**Digital Display Programmable Thermostat with Built-In Relative Humidity Sensing (3H/2C)**




Three Heat/Two Cool digital display thermostat with built-in humidity control and display. This thermostat combines both humidity and dry bulb into one. Fully programmable with night setback.

**Digital Display Programmable Thermostat (3H/2C)**




Three Heat/Two Cool auto changeover digital display thermostat. 7-day programmable stat with night setback shall be available.

**Touchscreen Programmable Thermostat (2H/2C)**



Two Heat/Two Cool programmable thermostat with touch screen digital display. Menu-driven programming. Effortless set-up. Program each day separately with no need to copy multiple days. All programming can be done on one screen. Easy to read and use. Large, clear backlit digital display.

**Digital Display Thermostat (3H/2C)**

Three Heat, Two Cool auto changeover digital display thermostat.

**Communication Interfaces****BACnet™ Communications Interface - Factory or Field Installed**

The BACnet communications interface allows the unit to communicate directly with a generic open protocol BACnet MS/TP Network Building Automation System Controls.

**LonTalk® Communications Interface - Factory or Field Installed**

The LonTalk communications interface allows the unit to communicate as a Tracer™ LCI-V device or directly with generic LonTalk Network Building Automation System Controls.

**Trane Communication Interface (TCI) - Factory or Field Installed**

This factory or field-installed micro-processor interface allows the unit to communicate with Trane's Integrated Comfort™ system.



# Electrical Data

**Table 76. Unit wiring with cooling (no electric heat) or gas heat—standard refrigeration system**

| Tons | Unit Model Number | Unit Operating Voltage Range | Standard Indoor Fan Motor               |  | Oversize Indoor Fan Motor |  |
|------|-------------------|------------------------------|---|--|---------------------------|--|
|      |                   |                              | Minimum Circuit Ampacity <sup>(a)</sup> | Maximum Fuse Size or Maximum Circuit Breaker | Minimum Circuit Ampacity  | Maximum Fuse Size or Maximum Circuit Breaker |
| 12½  | T/YS*150F3        | 187-253                      | 64                                      | 80   | 70                        | 90   |
|      | T/YS*150F4        | 414-506                      | 31                                      | 40   | 34                        | 40   |
|      | T/YS*150FW        | 517-633                      | 23                                      | 30   | 26                        | 30   |
|      | T/YS*150FK        | 342-418                      | 37                                      | 45   | 40                        | 50   |
| 15   | T/YS*180F3        | 187-253                      | 75                                      | 100  | 81                        | 110  |
|      | T/YS*180F4        | 414-506                      | 38                                      | 50   | 40                        | 50   |
|      | T/YS*180FW        | 517-633                      | 31                                      | 40   | 33                        | 45   |
|      | T/YS*180FK        | 342-418                      | 45                                      | 60   | 49                        | 60   |
| 17½  | T/YS*210F3        | 187-253                      | 93                                      | 125  | 101                       | 125  |
|      | T/YS*210F4        | 414-506                      | 44                                      | 60   | 48                        | 60   |
|      | T/YS*210FW        | 517-633                      | 35                                      | 50   | 38                        | 50   |
|      | T/YS*210FK        | 342-418                      | 55                                      | 70   | 59                        | 80   |
| 20   | T/YS*240F3        | 187-253                      | 108                                     | 125  | 155                       | 150  |
|      | T/YS*240F4        | 414-506                      | 52                                      | 70   | 55                        | 70   |
|      | T/YS*240FW        | 517-633                      | 44                                      | 60   | 47                        | 60   |
|      | T/YS*240FK        | 342-418                      | 63                                      | 80   | 67                        | 90   |
| 25   | T/YS*300F3        | 187-253                      | 124                                     | 150  | —                         | —  |
|      | T/YS*300F4        | 414-506                      | 59                                      | 70   | —                         | —  |
|      | T/YS*300FW        | 517-633                      | 48                                      | 60   | —                         | —  |
|      | T/YS*300FK        | 342-418                      | 71                                      | 90   | —                         | —  |

(a) For Standard and Oversized Indoor Fan Motor, values do not include power exhaust accessory.

\* Indicates both downflow and horizontal units.

**Standard Efficiency**
**Table 77. Unit wiring with electric heat (single point connection)—standard refrigeration system (downflow and horizontal)**

| Tons                             | Unit Model Number | Heater Model Number <sup>(a)</sup>                 | Heater kW Rating | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |
|----------------------------------|-------------------|--|------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|
|                                  |                   |  |                  |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |
| <b>208/230 Volts Three Phase</b> |                   |  |                  |                |                       |                                      |                       |   |
| 12½                              | TS*150F3          | AYDHTRK318/AYHHTRN318                              | 13.5/18.0        | 1              | 64/69                 | 80/80                                | 70/77                 | 90/90   |
|                                  |                   | AYDHTRK336/AYHHTRP336                              | 27.0/36.0        | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |
|                                  |                   | AYDHTRK354/AYHHTRP354                              | 40.5/54.0        | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |
| 15                               | TS*180F3          | AYDHTRK318/AYHHTRN318                              | 13.5/18.0        | 1              | 75/75                 | 100/100                              | 81/81                 | 110/110   |
|                                  |                   | AYDHTRK336/AYHHTRM336                              | 27.0/36.0        | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |
|                                  |                   | AYDHTRK354/AYHHTRM354                              | 40.5/54.0        | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |
| 17½                              | TS*210F3          | AYDHTRL336/AYHHTRN336                              | 27.0/36.0        | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |
|                                  |                   | AYDHTRL354/AYHHTRN354                              | 40.5/54.0        | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |
|                                  |                   | AYDHTRK372/AYHHTRN372                              | 54.0/72.0        | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |
| 20                               | TS*240F3          | AYDHTRL336/AYHHTRN336                              | 27.0/36.0        | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |
|                                  |                   | AYDHTRL354/AYHHTRN354                              | 40.5/54.0        | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |
|                                  |                   | AYDHTRK372/AYHHTRN372                              | 54.0/72.0        | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |
| 25                               | TS*300F3          | AYDHTRL336/AYHHTRN336                              | 27.0/36.0        | 2              | 126/140               | 150/150                              | —                     | —   |
|                                  |                   | AYDHTRL354/AYHHTRN354                              | 40.5/54.0        | 2              | 172/162               | 175/175                              | —                     | —   |
|                                  |                   | AYDHTRK372/AYHHTRN372                              | 54.0/72.0        | 2              | 182/205               | 200/225                              | —                     | —   |
| <b>460 Volts Three Phase</b>     |                   |  |                  |                |                       |                                      |                       |   |
| 12½                              | TS*150F4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> /AYHHTRN418 | 18.0             | 1              | 35                    | 40                                   | 38                    | 40  |
|                                  |                   | AYDHTRK436/AYHHTRP436                              | 36.0             | 2              | 62                    | 70                                   | 65                    | 70  |
|                                  |                   | AYDHTRK454/AYHHTRP454                              | 54.0             | 2              | 72                    | 80                                   | 76                    | 80  |
| 15                               | TS*180F4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> /AYHHTRM418 | 18.0             | 1              | 38                    | 50                                   | 40                    | 50  |
|                                  |                   | AYDHTRK436/AYHHTRM436                              | 36.0             | 2              | 62                    | 70                                   | 65                    | 70  |
|                                  |                   | AYDHTRK454/AYHHTRM454                              | 54.0             | 2              | 72                    | 80                                   | 76                    | 80  |
| 17½                              | TS*210F4          | AYDHTRL436/AYHHTRN436                              | 36               | 2              | 65                    | 70                                   | 69                    | 70  |
|                                  |                   | AYDHTRL454/AYHHTRN454                              | 54               | 2              | 76                    | 80                                   | 80                    | 90  |
|                                  |                   | AYDHTRK472/AYHHTRN472                              | 72               | 2              | 98                    | 100                                  | 102                   | 110   |
| 20                               | TS*240F4          | AYDHTRL436/AYHHTRN436                              | 36               | 2              | 65                    | 70                                   | 69                    | 70  |
|                                  |                   | AYDHTRL454/AYHHTRN454                              | 54               | 2              | 76                    | 80                                   | 80                    | 90  |
|                                  |                   | AYDHTRK472/AYHHTRN472                              | 72               | 2              | 98                    | 100                                  | 102                   | 110   |
| 25                               | TS*300F4          | AYDHTRL436/AYHHTRN436                              | 36               | 2              | 69                    | 70                                   | —                     | —   |
|                                  |                   | AYDHTRL454/AYHHTRN454                              | 54               | 2              | 80                    | 90                                   | —                     | —   |
|                                  |                   | AYDHTRK472/AYHHTRN472                              | 72               | 2              | 102                   | 110                                  | —                     | —   |



## Electrical Data

Standard Efficiency

**Table 77. Unit wiring with electric heat (single point connection)—standard refrigeration system (downflow and horizontal) (continued)**

| Tons                         | Unit Model Number | Heater Model Number <sup>(a)</sup>                              | Heater kW Rating | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |
|------------------------------|-------------------|---|------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|
|                              |                   |   |                  |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |
| <b>575 Volts Three Phase</b> |                   |   |                  |                |                       |                                      |                       |   |
| 12½                          | TS*150FW          | AYDHTRKW18 (AYDHTRLW18) <sup>(a)</sup> /AYHHTRNW18              | 18.0             | 1              | 28                    | 30                                   | 31                    | 35  |
|                              |                   | AYDHTRMW36/AYHHTRPW36   | 36.0             | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54/AYHHTRPW54   | 54.0             | 2              | 58                    | 60                                   | 61                    | 70  |
| 15                           | TS*180FW          | AYDHTRKW18 (AYDHTRMW18) <sup>(a)</sup> /AYHHTRMW18 (AYHHTRQW18) | 18.0             | 1              | 31                    | 40                                   | 33                    | 45  |
|                              |                   | AYDHTRMW36 (AYDHTRKW36) <sup>(a)</sup> /AYHHTRMW36 (AYHHTRSW36) | 36.0             | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54/AYHHTRMW54   | 54.0             | 2              | 58                    | 60                                   | 61                    | 70  |
| 17½                          | TS*210FW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> /AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54/AYHHTRNW54   | 54               | 2              | 61                    | 60                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72/AYHHTRNW72   | 72               | 2              | 78                    | 80                                   | 82                    | 90  |
| 20                           | TS*240FW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> /AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54/AYHHTRNW54   | 54               | 2              | 61                    | 70                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72/AYHHTRNW72   | 72               | 2              | 78                    | 80                                   | 82                    | 90  |
| 25                           | TS*300FW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> /AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 56                    | 60                                   | —                     | —   |
|                              |                   | AYDHTRLW54/AYHHTRNW54   | 54               | 2              | 65                    | 70                                   | —                     | —   |
|                              |                   | AYDHTRKW72/AYHHTRNW72   | 72               | 2              | 82                    | 90                                   | —                     | —   |
| <b>380 Volts Three Phase</b> |                   |   |                  |                |                       |                                      |                       |   |
| 12½                          | TS*150FK          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> / AYHHTRN418             | 18               | 2              | 37                    | 45                                   | —                     | —   |
|                              |                   | AYDHTRK436/AYHHTRP436   | 36               | 2              | 52                    | 60                                   | —                     | —   |
|                              |                   | AYDHTRK454/AYHHTRP454   | 54               | 2              | 60                    | 60                                   | —                     | —   |
| 15                           | TS*180FK          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> / AYHHTRM418             | 18               | 2              | 45                    | 60                                   | —                     | —   |
|                              |                   | AYDTRK436/AYHHTRM436  | 36               | 2              | 52                    | 60                                   | —                     | —   |
|                              |                   | AYDTRK454/AYHHTRM454  | 54               | 2              | 60                    | 60                                   | —                     | —   |
| 17½                          | TS*210FK          | AYDHTRL436/AYHHTRN436   | 36               | 2              | 56                    | 70                                   | —                     | —   |
|                              |                   | AYDHTRL454/AYHHTRN454   | 54               | 2              | 64                    | 70                                   | —                     | —   |
| 20                           | TS*240FK          | AYDHTRL436/AYHHTRN436   | 36               | 2              | 63                    | 80                                   | —                     | —   |
|                              |                   | AYDHTRL454/AYHHTRN454   | 54               | 2              | 64                    | 80                                   | —                     | —   |
|                              |                   | AYDHTRK472/AYHHTRN472   | 72               | 2              | 82                    | 90                                   | —                     | —   |
| 25                           | TS*300FK          | AYDHTRL436/AYHHTRN436   | 36               | 2              | 71                    | 90                                   | —                     | —   |
|                              |                   | AYDHTRL454/AYHHTRN454   | 54               | 2              | 71                    | 90                                   | —                     | —   |
|                              |                   | AYDHTRK472/AYHHTRN472   | 72               | 2              | 87                    | 90                                   | —                     | —   |

(a) Heater model numbers in parenthesis apply to units with an optional high SCCR rating.

(b) Values do not include power exhaust accessory.

\* Indicates both downflow and horizontal units.

**Standard Efficiency**
**Table 78. Electrical characteristics—compressor motor and condenser motor—60 cycle—standard efficiency**

| Tons | Unit<br>Model No. | No. | Compressor Motors |       |                   |      |                     |          | Condenser Fan Motors |       |     |                     |      |  |
|------|-------------------|-----|-------------------|-------|-------------------|------|---------------------|----------|----------------------|-------|-----|---------------------|------|--|
|      |                   |     | Volts             | Phase | hp <sup>(b)</sup> | rpm  | Amps <sup>(a)</sup> |          | No.                  | Phase | hp  | Amps <sup>(a)</sup> |      |  |
|      |                   |     |                   |       |                   |      | RLA                 | LRA      |                      |       |     | FLA                 | LRA  |  |
| 12½  | T/YS*150F3        | 2   | 280-230           | 3     | 5.6/4.5           | 3450 | 22.4/18.2           | 149/137  | 2                    | 1     | 0.5 | 3.2                 | 8.8  |  |
|      | T/YS*150F4        | 2   | 460               | 3     | 5.6/4.5           | 3450 | 10.6/9.0            | 75/62    | 2                    | 1     | 0.5 | 1.6                 | 3.8  |  |
|      | T/YS*150FW        | 2   | 575               | 3     | 5.6/4.5           | 3450 | 7.7/6.8             | 54/50    | 2                    | 1     | 0.5 | 1.3                 | 3.2  |  |
|      | T/YS*150FK        | 2   | 380               | 3     | 5.6/4.5           | 3450 | 12.8/10.9           | 88/78    | 2                    | 1     | 0.5 | 1.9                 | 5.2  |  |
| 15   | T/YS*180F3        | 2   | 280-230           | 3     | 8.6/4.75          | 3450 | 31.9/17.6           | 267/123  | 2                    | 1     | 0.5 | 3.2                 | 8.8  |  |
|      | T/YS*180F4        | 2   | 460               | 3     | 8.6/4.75          | 3450 | 15.6/9.6            | 142/62   | 2                    | 1     | 0.5 | 1.6                 | 3.8  |  |
|      | T/YS*180FW        | 2   | 575               | 3     | 8.6/4.75          | 3450 | 14.1/6.1            | 103/40   | 2                    | 1     | 0.5 | 1.3                 | 3.2  |  |
|      | T/YS*180FK        | 2   | 380               | 3     | 8.6/4.75          | 3450 | 18.9/11.6           | 160/54   | 2                    | 1     | 0.5 | 1.9                 | 5.2  |  |
| 17½  | T/YS*210F3        | 2   | 280-230           | 3     | 10.0/4.5          | 3450 | 39.1/14.5           | 267/98   | 2                    | 1     | 1.0 | 5.0                 | 14.4 |  |
|      | T/YS*210F4        | 2   | 460               | 3     | 10.0/4.5          | 3450 | 18.6/6.3            | 142/55   | 2                    | 1     | 1.0 | 2.5                 | 5.8  |  |
|      | T/YS*210FW        | 2   | 575               | 3     | 10.0/4.5          | 3450 | 15.4/6.0            | 103/41   | 2                    | 1     | 1.0 | 2.0                 | 5.1  |  |
|      | T/YS*210FK        | 2   | 380               | 3     | 10.0/4.5          | 3450 | 22.5/10.3           | 160/54   | 2                    | 1     | 0.5 | 3.5                 | 8.5  |  |
| 20   | T/YS*240F3        | 2   | 280-230           | 3     | 11.7/6.9          | 3450 | 42.5/26.2           | 304/164  | 2                    | 1     | 1.0 | 5.0                 | 14.4 |  |
|      | T/YS*240F4        | 2   | 460               | 3     | 11.7/6.9          | 3450 | 20.0/13.2           | 147/100  | 2                    | 1     | 1.0 | 2.5                 | 5.8  |  |
|      | T/YS*240FW        | 2   | 575               | 3     | 11.7/6.9          | 3450 | 17.3/11.5           | 122/78   | 2                    | 1     | 1.0 | 2.0                 | 5.1  |  |
|      | T/YS*240FK        | 2   | 380               | 3     | 11.7/6.9          | 3450 | 24.2/16.0           | 168/94.3 | 2                    | 1     | 0.5 | 3.5                 | 8.5  |  |
| 25   | T/YS*300F3        | 2   | 280-230           | 3     | 10.0              | 3450 | 39.1                | 267      | 2                    | 1     | 1.0 | 5.0                 | 14.4 |  |
|      | T/YS*300F4        | 2   | 460               | 3     | 10.0              | 3450 | 18.6                | 142      | 2                    | 1     | 1.0 | 2.5                 | 5.8  |  |
|      | T/YS*300FW        | 2   | 575               | 3     | 10.0              | 3450 | 15.4                | 103      | 2                    | 1     | 1.0 | 2.0                 | 5.1  |  |
|      | T/YS*300FK        | 2   | 380               | 3     | 10.0              | 3450 | 22.5                | 160      | 2                    | 1     | 0.5 | 3.5                 | 8.5  |  |

(a) For Compressor Motors and Condenser Fan Motors: Amp draw for each motor; multiply value by number of motors to determine total amps.

(b) Horsepower for each compressor.

\*Indicates both downflow and horizontal units.



## Electrical Data

Standard Efficiency

**Table 79. Electrical characteristics—evaporator fan motor—60 cycle—standard and oversized**

| Tons | Unit Model Number | Standard Evaporator Fan Motor |         |       |                   |                     |       | Oversized Evaporator Fan Motor |         |       |      |      |       |
|------|-------------------|-------------------------------|---------|-------|-------------------|---------------------|-------|--------------------------------|---------|-------|------|------|-------|
|      |                   | No.                           | Volts   | Phase | hp <sup>(a)</sup> | Amps <sup>(b)</sup> |       | No.                            | Volts   | Phase | hp   | Amps |       |
|      |                   |                               |         |       |                   | FLA                 | LRA   |                                |         |       |      | FLA  | LRA   |
| 12½  | T/YS*150F3        | 1                             | 208-230 | 3     | 3.00              | 10.6                | 81.0  | 1                              | 208-230 | 3     | 5.00 | 16.7 | 109.8 |
|      | T/YS*150F4        | 1                             | 460     | 3     | 3.00              | 4.8                 | 40.5  | 1                              | 460     | 3     | 5.00 | 7.6  | 54.9  |
|      | T/YS*150FW        | 1                             | 575     | 3     | 3.00              | 3.9                 | 31.0  | 1                              | 575     | 3     | 5.00 | 6.1  | 41.6  |
|      | T/YS*150FK        | 1                             | 380     | 3     | 5.00              | 9.2                 | 66.5  | 1                              | —       | —     | —    | —    | —     |
| 15   | T/YS*180F3        | 1                             | 208-230 | 3     | 3.00              | 10.6                | 81.0  | 1                              | 208-230 | 3     | 5.00 | 16.7 | 109.8 |
|      | T/YS*180F4        | 1                             | 460     | 3     | 3.00              | 4.8                 | 40.5  | 1                              | 460     | 3     | 5.00 | 7.6  | 54.9  |
|      | T/YS*180FW        | 1                             | 575     | 3     | 3.00              | 3.9                 | 31.0  | 1                              | 575     | 3     | 5.00 | 6.1  | 41.6  |
|      | T/YS*180FK        | 1                             | 380     | 3     | 5.00              | 9.2                 | 66.5  | 1                              | —       | —     | —    | —    | —     |
| 17½  | T/YS*210F3        | 1                             | 208-230 | 3     | 5.00              | 16.7                | 109.8 | 1                              | 208-230 | 3     | 7.50 | 24.2 | 120.4 |
|      | T/YS*210F4        | 1                             | 460     | 3     | 5.00              | 7.6                 | 54.9  | 1                              | 460     | 3     | 7.50 | 11.0 | 74.0  |
|      | T/YS*210FW        | 1                             | 575     | 3     | 5.00              | 6.1                 | 41.6  | 1                              | 575     | 3     | 7.50 | 9.0  | 60.0  |
|      | T/YS*210FK        | 1                             | 380     | 3     | 7.50              | 13.3                | 83.5  | 1                              | —       | —     | —    | —    | —     |
| 20   | T/YS*240F3        | 1                             | 208-230 | 3     | 5.00              | 16.7                | 109.8 | 1                              | 208-230 | 3     | 7.50 | 24.2 | 120.4 |
|      | T/YS*240F4        | 1                             | 460     | 3     | 5.00              | 7.6                 | 54.9  | 1                              | 460     | 3     | 7.50 | 11.0 | 74.0  |
|      | T/YS*240FW        | 1                             | 575     | 3     | 5.00              | 6.1                 | 41.6  | 1                              | 575     | 3     | 7.50 | 9.0  | 60.0  |
|      | T/YS*240FK        | 1                             | 380     | 3     | 7.50              | 13.3                | 83.5  | 1                              | —       | —     | —    | —    | —     |
| 25   | T/YS*300F3        | 1                             | 208-230 | 3     | 7.50              | 24.2                | 120.4 | —                              | —       | —     | —    | —    | —     |
|      | T/YS*300F4        | 1                             | 460     | 3     | 7.50              | 11.0                | 74.0  | —                              | —       | —     | —    | —    | —     |
|      | T/YS*300FW        | 1                             | 575     | 3     | 7.50              | 9.0                 | 60    | —                              | —       | —     | —    | —    | —     |
|      | T/YS*300FK        | 1                             | 380     | 3     | 7.50              | 13.3                | 83.5  | —                              | —       | —     | —    | —    | —     |

(a) Horsepower for each compressor.

\* Indicates downflow and horizontal units.

(b) For Compressor Motors and Condenser Fan Motors: Amp draw for each motor; multiply value by number of motors to determine total amps.

**Table 80. Electrical characteristics—combustion blower motor (gas/electric)**

| Unit Model Number               | Heat       | Heating Stages | hp   | rpm <sup>(a)</sup> | Volts   | Phase | Amps |      |
|---------------------------------|------------|----------------|------|--------------------|---------|-------|------|------|
|                                 |            |                |      |                    |         |       | FLA  | LRA  |
| YS*150F                         | Low        | 2              | 1/20 | 3500/2800          | 208-230 | 1     | 0.5  | 0.78 |
| YS*180F, 210F, 240F, 300F       | Low        | 2              | 1/10 | 3500/2800          | 208-230 | 1     | 0.8  | 2.00 |
| YS*150F, 180F, 210F, 240F, 300F | Modulating | N/A            | 1/4  | 4600/950           | 208-230 | 3     | 0.8  | 2.00 |

(a) High/Low Speed.

\* Indicates both downflow and horizontal units.

**Table 81. Electrical characteristics—power exhaust (cooling and gas/electric)**

| Tons   | Volts   | Phase | hp  | rpm  | Amps |      |
|--------|---------|-------|-----|------|------|------|
|        |         |       |     |      | FLA  | LRA  |
| 12½-25 | 208-230 | 1     | 3/4 | 1040 | 6.6  | 13.5 |
|        | 460     | 1     | 3/4 | 1040 | 3.2  | 8.4  |
|        | 575     | 1     | 3/4 | 1040 | 2.1  | 5.2  |

**High Efficiency**
**Table 82. Unit wiring with cooling (no electric heat) or gas heat—high efficiency**

| Tons | Unit Model Number | Unit Operating Voltage Range | Standard Indoor Fan Motor               |  | Oversize Indoor Fan Motor |  |
|------|-------------------|------------------------------|---|--|---------------------------|--|
|      |                   |                              | Minimum Circuit Ampacity <sup>(a)</sup> | Maximum Fuse Size or Maximum Circuit Breaker | Minimum Circuit Ampacity  | Maximum Fuse Size or Maximum Circuit Breaker |
| 12½  | T/YH*150G3        | 187–253                      | 65                                      | 90   | 71                        | 90   |
|      | T/YH*150G4        | 414–506                      | 30                                      | 40   | 33                        | 45   |
|      | T/YH*150GW        | 517–633                      | 24                                      | 30   | 26                        | 35   |
| 15   | T/YH*180G3        | 187–253                      | 68                                      | 90   | 74                        | 100  |
|      | T/YH*180G4        | 414–506                      | 33                                      | 45   | 36                        | 50   |
|      | T/YH*180GW        | 517–633                      | 26                                      | 35   | 28                        | 35   |
| 17½  | T/YH*210G3        | 187–253                      | 86                                      | 110  | 93                        | 125  |
|      | T/YH*210G4        | 414–506                      | 43                                      | 60   | 46                        | 60   |
|      | T/YH*210GW        | 517–633                      | 33                                      | 45   | 35                        | 45   |
| 20   | T/YH*240G3        | 187–253                      | 99                                      | 125  | 106                       | 125  |
|      | T/YH*240G4        | 414–506                      | 46                                      | 60   | 50                        | 60   |
|      | T/YH*240GW        | 517–633                      | 38                                      | 50   | 40                        | 50   |
| 25   | T/YH*300G3        | 187–253                      | 121                                     | 150  | N/A                       | N/A  |
|      | T/YH*300G4        | 414–506                      | 57                                      | 70   | N/A                       | N/A  |
|      | T/YH*300GW        | 517–633                      | 44                                      | 50   | N/A                       | N/A  |

(a) For Standard and Oversized Indoor Fan Motor, values do not include power exhaust accessory.

\* Indicates both downflow and horizontal units.

**Table 83. Unit wiring with cooling (no electric heat) or gas heat—dehumidification (hot gas reheat) option (downflow only)**

| Tons | Unit Model Number | Unit Operating Voltage Range | Standard Indoor Fan Motor               |  | Oversize Indoor Fan Motor |  |
|------|-------------------|------------------------------|---|--|---------------------------|--|
|      |                   |                              | Minimum Circuit Ampacity <sup>(a)</sup> | Maximum Fuse Size or Maximum Circuit Breaker | Minimum Circuit Ampacity  | Maximum Fuse Size or Maximum Circuit Breaker |
| 12½  | T/YHD150G3        | 187–253                      | 67                                      | 80   | 74                        | 90   |
|      | T/YHD150G4        | 414–506                      | 32                                      | 40   | 35                        | 45   |
|      | T/YHD150GW        | 517–633                      | 24                                      | 30   | 26                        | 30   |
| 15   | T/YHD180G3        | 187–253                      | 73                                      | 90   | 79                        | 100  |
|      | T/YHD180G4        | 414–506                      | 35                                      | 45   | 38                        | 50   |
|      | T/YHD180GW        | 517–633                      | 28                                      | 35   | 30                        | 35   |
| 17½  | T/YHD210G3        | 187–253                      | 87                                      | 110  | 95                        | 110  |
|      | T/YHD210G4        | 414–506                      | 43                                      | 50   | 47                        | 60   |
|      | T/YHD210GW        | 517–633                      | 34                                      | 45   | 37                        | 45   |
| 20   | T/YHD240G3        | 187–253                      | 116                                     | 150  | 123                       | 150  |
|      | T/YHD240G4        | 414–506                      | 55                                      | 70   | 59                        | 70   |
|      | T/YHD240GW        | 517–633                      | 45                                      | 60   | 48                        | 60   |

(a) For Standard and Oversized Indoor Fan Motor, values do not include power exhaust accessory.



## Electrical Data

High Efficiency

**Table 84. Unit wiring with electric heat (single point connection) – high efficiency**

| Tons                               | Unit Model Number | Heater Model Number <sup>(a)</sup>                  | Heater kW Rating      | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |    |
|------------------------------------|-------------------|---|-----------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|----|
|                                    |                   |   |                       |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |    |
| <b>208 / 230 Volts Three Phase</b> |                   |   |                       |                |                       |                                      |                       |   |    |
| 12½                                | TH*150G3          | AYDHTRK318/AYHHTRM318                               | 13.5/18.0             | 1              | 65/69                 | 90/90                                | 72/77                 | 90/90   |    |
|                                    |                   | AYDHTRK336/AYHHTRM336                               | 27.0/36.0             | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |    |
|                                    |                   | AYDHTRK354/AYHHTRM354                               | 40.5/54.0             | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |    |
| 15                                 | TH*180G3          | AYDHTRK318/AYHHTRM318                               | 13.5/18.0             | 1              | 69/69                 | 90/90                                | 75/77                 | 100/100   |    |
|                                    |                   | AYDHTRK336/AYHHTRM336                               | 27.0/36.0             | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |    |
|                                    |                   | AYDHTRK354/AYHHTRM354                               | 40.5/54.0             | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |    |
| 17½                                | TH*210G3          | AYDHTRK336/AYHHTRN336                               | 27.0/36.0             | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |    |
|                                    |                   | AYDHTRK354/AYHHTRN354                               | 40.5/54.0             | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |    |
|                                    |                   | AYDHTRK372/AYHHTRN372                               | 54.0/72.0             | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |    |
| 20                                 | TH*240G3          | AYDHTRK336/AYHHTRN336                               | 27.0/36.0             | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |    |
|                                    |                   | AYDHTRK354/AYHHTRN354                               | 40.5/54.0             | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |    |
|                                    |                   | AYDHTRK372/AYHHTRN372                               | 54.0/72.0             | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |    |
| 25                                 | TH*300G3          | AYDHTRK336/AYHHTRN336                               | 27.0/36.0             | 2              | 126/140               | 150/150                              | –                     | –   |    |
|                                    |                   | AYDHTRK354/AYHHTRN354                               | 40.5/54.0             | 2              | 172/162               | 175/175                              | –                     | –   |    |
|                                    |                   | AYDHTRK372/AYHHTRN372                               | 54.0/72.0             | 2              | 182/205               | 200/225                              | –                     | –   |    |
| <b>460 Volts Three Phase</b>       |                   |   |                       |                |                       |                                      |                       |   |    |
| 12½                                | TH*150G4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> / AYHHTRM418 | 18                    | 1              | 35                    | 40                                   | 38                    | 45  |    |
|                                    |                   | AYDHTRK436/AYHHTRM436                               | 36                    | 2              | 62                    | 70                                   | 65                    | 70  |    |
|                                    |                   | AYDHTRK454/AYHHTRM454                               | 54                    | 2              | 72                    | 80                                   | 76                    | 80  |    |
| 15                                 | TH*180G4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> / AYHHTRM418 | 18                    | 1              | 35                    | 45                                   | 38                    | 50  |    |
|                                    |                   | THD180G4  | AYDHTRK427            | 27             | 2                     | 48                                   | 50                    | 52  | 60 |
|                                    |                   | TH*180G4  | AYDHTRK436/AYHHTRM436 | 36             | 2                     | 62                                   | 70                    | 65  | 70 |
| AYDHTRK454/AYHHTRM454              | 54                |   | 2                     | 72             | 80                    | 76                                   | 80                    |   |    |
| 17½                                | TH*210G4          | THD210G4  | AYDHTRL427            | 27             | 2                     | 52                                   | 60                    | 56  | 60 |
|                                    |                   | AYDHTRL436/AYHHTRN436                               | 36                    | 2              | 65                    | 70                                   | 69                    | 70  |    |
|                                    |                   |   | AYDHTRL454/AYHHTRN454 | 54             | 2                     | 76                                   | 80                    | 80  | 90 |
| 20                                 | TH*240G4          | AYDHTRK472/AYHHTRN472                               | 72                    | 2              | 98                    | 100                                  | 102                   | 110   |    |
|                                    |                   | THD240G4  | AYDHTRL427            | 27             | 2                     | 52                                   | 56                    | 56  | 70 |
|                                    |                   | AYDHTRL436/AYHHTRN436                               | 36                    | 2              | 65                    | 70                                   | 69                    | 70  |    |
| AYDHTRL454/AYHHTRN454              | 54                |   | 2                     | 76             | 80                    | 80                                   | 90                    |   |    |
| 25                                 | TH*300G4          | AYDHTRK472/AYHHTRN472                               | 72                    | 2              | 98                    | 100                                  | 102                   | 110   |    |
|                                    |                   | THD300G4  | AYDHTRL427            | 27             | 2                     | 56                                   | 70                    | –   | –  |
|                                    |                   | AYDHTRL436/AYHHTRN436                               | 36                    | 2              | 69                    | 70                                   | –                     | –   |    |
| AYDHTRL454/AYHHTRN454              | 54                |   | 2                     | 80             | 90                    | –                                    | –                     |   |    |
|                                    |                   | AYDHTRK472/AYHHTRN472                               | 72                    | 2              | 102                   | 110                                  | –                     | –   |    |

**High Efficiency**
**Table 84. Unit wiring with electric heat (single point connection)—high efficiency**

| Tons                         | Unit Model Number | Heater Model Number <sup>(a)</sup>                               | Heater kW Rating | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |
|------------------------------|-------------------|--|------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|
|                              |                   |  |                  |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |
| <b>575 Volts Three Phase</b> |                   |  |                  |                |                       |                                      |                       |   |
| 12½                          | TH*150GW          | AYDHTRKW18 (AYDHTRLW18) <sup>(a)</sup> / AYHHTRMW18 (AYHHTRPW18) | 18               | 1              | 28                    | 30                                   | 31                    | 35  |
|                              |                   | AYDHTRMW36/AYHHTRMW36 (AYHHTRRW36)                               | 36               | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54/AYHHTRMW54  | 54               | 2              | 58                    | 60                                   | 61                    | 70  |
| 15                           | TH*180GW          | AYDHTRKW18 (AYDHTRMW18) <sup>(a)</sup> / AYHHTRMW18 (AYHHTRQW18) | 18               | 1              | 28                    | 35                                   | 31                    | 35  |
|                              |                   | AYDHTRMW36 (AYDHTRKW36) <sup>(a)</sup> / AYHHTRMW36 (AYHHTRSW36) | 36               | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54/AYHHTRMW54  | 54               | 2              | 58                    | 60                                   | 61                    | 70  |
| 17½                          | TH*210GW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> / AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54/AYHHTRNW54  | 54               | 2              | 61                    | 70                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72/AYHHTRNW72  | 72               | 2              | 78                    | 80                                   | 82                    | 90  |
| 20                           | TH*240GW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> / AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54/AYHHTRNW54  | 54               | 2              | 61                    | 70                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72/AYHHTRNW72  | 72               | 2              | 78                    | 80                                   | 82                    | 90  |
| 25                           | TH*300GW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> / AYHHTRMW36 (AYHHTRNW36) | 36               | 2              | 56                    | 60                                   | —                     | —   |
|                              |                   | AYDHTRLW54/AYHHTRNW54  | 54               | 2              | 65                    | 70                                   | —                     | —   |
|                              |                   | AYDHTRKW72/AYHHTRNW72  | 72               | 2              | 82                    | 90                                   | —                     | —   |

(a) Heater model numbers in parenthesis apply to units with an optional high SCCR rating.

(b) Values do not include power exhaust accessory.

\* Indicates both downflow and horizontal units.



**Electrical Data**

*High Efficiency*

**Table 85. Unit wiring with electric heat (single point connection) – dehumidification (hot gas reheat) refrigeration system (downflow only)**

| Tons                             | Unit Model Number | Heater Model Number <sup>(a)</sup>     | Heater kW Rating | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |
|----------------------------------|-------------------|--|------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|
|                                  |                   |  |                  |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |
| <b>208/230 Volts Three Phase</b> |                   |  |                  |                |                       |                                      |                       |   |
| 12½                              | THD150G3          | AYDHTRK318                             | 13.5/18.0        | 1              | 68/69                 | 80/80                                | 74/77                 | 90/90   |
|                                  |                   | AYDHTRK336                             | 27.0/36.0        | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |
|                                  |                   | AYDHTRK354                             | 40.5/54.0        | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |
| 15                               | THD180G3          | AYDHTRK318                             | 13.5/18.0        | 1              | 74/74                 | 90/90                                | 80/80                 | 100/100   |
|                                  |                   | AYDHTRK336                             | 27.0/36.0        | 2              | 109/123               | 110/125                              | 116/131               | 125/150   |
|                                  |                   | AYDHTRK354                             | 40.5/54.0        | 2              | 155/145               | 175/150                              | 163/152               | 175/175   |
| 17½                              | THD210G3          | AYDHTRL336 / AYHHTRN336                | 27.0/36.0        | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |
|                                  |                   | AYDHTRL354/ AYHHTRN354                 | 40.5/54.0        | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |
|                                  |                   | AYDHTRK372/ AYHHTRN372                 | 54.0/72.0        | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |
| 20                               | THD240G3          | AYDHTRL336                             | 27.0/36.0        | 2              | 116/131               | 125/150                              | 126/140               | 150/150   |
|                                  |                   | AYDHTRL354                             | 40.5/54.0        | 2              | 163/152               | 175/175                              | 172/162               | 175/175   |
|                                  |                   | AYDHTRK372                             | 54.0/72.0        | 2              | 172/196               | 175/200                              | 182/205               | 200/225   |
| <b>460 Volts Three Phase</b>     |                   |  |                  |                |                       |                                      |                       |   |
| 12½                              | THD150G4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> | 18               | 1              | 35                    | 40                                   | 38                    | 45  |
|                                  |                   | AYDHTRK436                             | 36               | 2              | 62                    | 70                                   | 65                    | 70  |
|                                  |                   | AYDHTRK454                             | 54               | 2              | 72                    | 80                                   | 76                    | 80  |
| 15                               | THD180G4          | AYDHTRL418 (AYDHTRK418) <sup>(a)</sup> | 18               | 1              | 36                    | 45                                   | 39                    | 50  |
|                                  |                   | AYDHTRK427                             | 27               | 2              | 48                    | 50                                   | 52                    | 60  |
|                                  |                   | AYDHTRK436                             | 36               | 2              | 62                    | 70                                   | 65                    | 70  |
|                                  |                   | AYDHTRK454                             | 54               | 2              | 72                    | 80                                   | 75                    | 80  |
| 17½                              | THD210G4          | AYDHTRL427                             | 27               | 2              | 52                    | 60                                   | 56                    | 60  |
|                                  |                   | AYDHTRL436 / AYHHTRN436                | 36               | 2              | 65                    | 70                                   | 69                    | 70  |
|                                  |                   | AYDHTRL454/ AYHHTRN454                 | 54               | 2              | 76                    | 80                                   | 80                    | 90  |
|                                  |                   | AYDHTRK472/ AYHHTRN472                 | 72               | 2              | 98                    | 100                                  | 102                   | 110   |
| 20                               | THD240G4          | AYDHTRL427                             | 27               | 2              | 52                    | 70                                   | 59                    | 70  |
|                                  |                   | AYDHTRL436                             | 36               | 2              | 65                    | 70                                   | 69                    | 70  |
|                                  |                   | AYDHTRL454                             | 54               | 2              | 76                    | 80                                   | 80                    | 90  |
|                                  |                   | AYDHTRK472                             | 72               | 2              | 98                    | 100                                  | 102                   | 110   |

## Electrical Data

### High Efficiency

**Table 85. Unit wiring with electric heat (single point connection) – dehumidification (hot gas reheat) refrigeration system (downflow only)**

| Tons                         | Unit Model Number | Heater Model Number <sup>(a)</sup>     | Heater kW Rating | Control Stages | Standard Indoor Motor |                                      | Oversize Indoor Motor |   |
|------------------------------|-------------------|--|------------------|----------------|-----------------------|--------------------------------------|-----------------------|---|
|                              |                   |  |                  |                | MCA                   | Max Fuse Size or Max Circuit Breaker | MCA                   | Max Fuse Size or Max Circuit Breaker <sup>(b)</sup> |
| <b>575 Volts Three Phase</b> |                   |  |                  |                |                       |                                      |                       |   |
| 12½                          | THD150GW          | AYDHTRKW18 (AYDHTRLW18) <sup>(a)</sup> | 18               | 1              | 28                    | 30                                   | 31                    | 35  |
|                              |                   | AYDHTRMW36                             | 36               | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54                             | 54               | 2              | 58                    | 60                                   | 61                    | 70  |
| 15                           | THD180GW          | AYDHTRKW18 (AYDHTRMW18) <sup>(a)</sup> | 18               | 1              | 28                    | 35                                   | 31                    | 40  |
|                              |                   | AYDHTRMW36 (AYDHTRKW36) <sup>(a)</sup> | 36               | 2              | 50                    | 50                                   | 52                    | 60  |
|                              |                   | AYDHTRKW54                             | 54               | 2              | 58                    | 60                                   | 61                    | 70  |
| 17½                          | THD210GW          | AYDHTRLW36 / AYHHTRNW36                | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54/ AYHHTRNW54                 | 54               | 2              | 61                    | 70                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72/ AYHHTRNW72                 | 72               | 2              | 78                    | 80                                   | 82                    | 90  |
| 20                           | THD240GW          | AYDHTRMW36 (AYDHTRLW36) <sup>(a)</sup> | 36               | 2              | 52                    | 60                                   | 56                    | 60  |
|                              |                   | AYDHTRLW54                             | 54               | 2              | 61                    | 70                                   | 65                    | 70  |
|                              |                   | AYDHTRKW72                             | 72               | 2              | 78                    | 80                                   | 82                    | 90  |

(a) Heater model numbers in parenthesis apply to units with an optional high SCCR rating.

(b) Values do not include power exhaust accessory.

**Table 86. Electrical characteristics – compressor motor and condenser motor – 60 cycle – high efficiency**

| Tons | Unit Model No. | No. | Compressor Motors |       |                   |      |                     |                 | Condenser Fan Motors |       |     |                     |     |
|------|----------------|-----|-------------------|-------|-------------------|------|---------------------|-----------------|----------------------|-------|-----|---------------------|-----|
|      |                |     | Volts             | Phase | hp <sup>(b)</sup> | rpm  | Amps <sup>(a)</sup> |                 | No.                  | Phase | hp  | Amps <sup>(a)</sup> |     |
|      |                |     |                   |       |                   |      | RLA                 | LRA             |                      |       |     | FLA                 | LRA |
| 12½  | T/YH*150G3     | 2   | 280-230           | 3     | 5.6/3.67          | 3450 | 27.5/13.6           | 191/100         | 2                    | 1     | 0.5 | 3.2                 | 8.8 |
|      | T/YH*150G4     | 2   | 460               | 3     | 5.6/3.67          | 3450 | 12.8/6.1            | 100/41          | 2                    | 1     | 0.5 | 1.6                 | 3.8 |
|      | T/YH*150GW     | 2   | 575               | 3     | 5.6/3.67          | 3450 | 10.38/4.2           | 78/33           | 2                    | 1     | 0.5 | 1.3                 | 3.2 |
| 15   | T/YH*180G3     | 2   | 280-230           | 3     | 7.5/4.75          | 3450 | 28.3/15.9           | 240/110         | 2                    | 1     | 0.5 | 3.2                 | 8.8 |
|      | T/YH*180G4     | 2   | 460               | 3     | 7.5/4.75          | 3450 | 14.7/7.0            | 130/52          | 2                    | 1     | 0.5 | 1.6                 | 3.8 |
|      | T/YH*180GW     | 2   | 575               | 3     | 7.5/4.75          | 3450 | 11.3/5.1            | 93.7/39.5       | 2                    | 1     | 0.5 | 1.3                 | 3.2 |
| 17½  | T/YH*210G3     | 2   | 280-230           | 3     | 8.6/4.75          | 3450 | 34.1/15.6           | 240/110         | 2                    | 1     | 1.0 | 5.5                 | 9.5 |
|      | T/YH*210G4     | 2   | 460               | 3     | 8.6/4.75          | 3450 | 17.3/7.7            | 140/52          | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YH*210GW     | 2   | 575               | 3     | 8.6/4.75          | 3450 | 13.32/5.8           | 107.6/38.9      | 2                    | 1     | 1.0 | 2.0                 | 5.1 |
| 20   | T/YH*240G3     | 2   | 280-230           | 3     | 11.7/6.9          | 3450 | 41.0/19.6           | 304/136         | 2                    | 1     | 1.0 | 5.5                 | 9.5 |
|      | T/YH*240G4     | 2   | 460               | 3     | 11.7/6.9          | 3450 | 19.75/8.2           | 147/66.1        | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YH*240GW     | 2   | 575               | 3     | 11.7/6.9          | 3450 | 16.7/6.6            | 122/55.3        | 2                    | 1     | 1.0 | 2.0                 | 5.1 |
| 25   | T/YH*300G3     | 3   | 280-230           | 3     | 12.8/6.9          | 3450 | 19.6/19.6/36.63     | 136/136/240     | 2                    | 1     | 1.0 | 5.5                 | 9.5 |
|      | T/YH*300G4     | 3   | 460               | 3     | 12.8/6.9          | 3450 | 8.2/8.2/18.26       | 66.1/66.1/140   | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YH*300GW     | 3   | 575               | 3     | 12.8/6.9          | 3450 | 6.6/6.6/14.06       | 55.3/55.3/107.6 | 2                    | 1     | 1.0 | 2.0                 | 5.1 |

(a) For Compressor Motors and Condenser Fan Motors: Amp draw for each motor; multiply value by number of motors to determine total amps.

(b) Horsepower for each compressor.

\*Indicates both downflow and horizontal units.



**Electrical Data**

*High Efficiency*

**Table 87. Electrical characteristics—compressor motor and condenser motor—60 cycle—dehumidification (hot gas reheat) option (downflow only)**

| Tons | Unit Model No. | No. | Compressor Motors |       |                   |      |                     |           | Condenser Fan Motors |       |     |                     |     |
|------|----------------|-----|-------------------|-------|-------------------|------|---------------------|-----------|----------------------|-------|-----|---------------------|-----|
|      |                |     | Volts             | Phase | hp <sup>(b)</sup> | rpm  | Amps <sup>(a)</sup> |           | No.                  | Phase | hp  | Amps <sup>(a)</sup> |     |
|      |                |     |                   |       |                   |      | RLA                 | LRA       |                      |       |     | FLA                 | LRA |
| 12½  | T/YHD150G3     | 2   | 280-230           | 3     | 5.6               | 3450 | 22.4/22.4           | 149/149   | 2                    | 1     | 0.5 | 3.2                 | 8.8 |
|      | T/YHD150G4     | 2   | 460               | 3     | 5.6               | 3450 | 10.6/10.6           | 75/75     | 2                    | 1     | 0.5 | 1.6                 | 3.8 |
|      | T/YHD150GW     | 2   | 575               | 3     | 5.6               | 3450 | 7.7/7.7             | 54/54     | 2                    | 1     | 0.5 | 1.3                 | 3.2 |
| 15   | T/YHD180G3     | 2   | 280-230           | 3     | 6.9               | 3450 | 26.2/26.2           | 149/149   | 2                    | 1     | 1.0 | 4.6                 | 9.5 |
|      | T/YHD180G4     | 2   | 460               | 3     | 6.9               | 3450 | 13.2/13.2           | 75/75     | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YHD180GW     | 2   | 575               | 3     | 6.9               | 3450 | 11.5/11.5           | 54/54     | 2                    | 1     | 1.0 | 2.0                 | 5.1 |
| 17½  | T/YHD210G3     | 2   | 208-230           | 3     | 7.5 / 6.9         | 3450 | 27.6 / 26.2         | 203 / 164 | 2                    | 1     | 1.0 | 4.6                 | 9.5 |
|      | T/YHD210G4     | 2   | 460               | 3     | 7.5 / 6.9         | 3450 | 14.1 / 13.2         | 98 / 100  | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YHD210GW     | 2   | 575               | 3     | 7.5 / 6.9         | 3450 | 11.6 / 11.5         | 84 / 78   | 2                    | 1     | 1.0 | 2.0                 | 5.1 |
| 20   | T/YHD240G3     | 2   | 280-230           | 3     | 10                | 3450 | 39.1/39.1           | 267/267   | 2                    | 1     | 1.0 | 4.6                 | 9.5 |
|      | T/YHD240G4     | 2   | 460               | 3     | 10                | 3450 | 18.6/18.6           | 142/142   | 2                    | 1     | 1.0 | 2.9                 | 5.8 |
|      | T/YHD240GW     | 2   | 575               | 3     | 10                | 3450 | 15.4/15.4           | 103/103   | 2                    | 1     | 1.0 | 2.0                 | 5.1 |

(a) For Compressor Motors and Condenser Fan Motors: Amp draw for each motor; multiply value by number of motors to determine total amps.  
 (b) Horsepower for each compressor.

**Table 88. Electrical characteristics—evaporator fan motor—60 cycle—standard and oversized**

| Tons | Unit Model Number | No. | Standard Evaporator Fan Motor |       |                   |                     |       |     | Oversized Evaporator Fan Motor |       |     |      |       |  |
|------|-------------------|-----|-------------------------------|-------|-------------------|---------------------|-------|-----|--------------------------------|-------|-----|------|-------|--|
|      |                   |     | Volts                         | Phase | hp <sup>(a)</sup> | Amps <sup>(b)</sup> |       | No. | Volts                          | Phase | hp  | Amps |       |  |
|      |                   |     |                               |       |                   | FLA                 | LRA   |     |                                |       |     | FLA  | LRA   |  |
| 12½  | T/YH*150G3        | 1   | 208-230                       | 3     | 3                 | 10.6                | 81    | 1   | 208-230                        | 3     | 5   | 16.7 | 109.8 |  |
|      | T/YH*150G4        | 1   | 460                           | 3     | 3                 | 4.8                 | 40.5  | 1   | 460                            | 3     | 5   | 7.6  | 54.9  |  |
|      | T/YH*150GW        | 1   | 575                           | 3     | 3                 | 3.9                 | 31    | 1   | 575                            | 3     | 5   | 6.1  | 41.6  |  |
| 15   | T/YH*180G3        | 1   | 208-230                       | 3     | 3                 | 10.6                | 81    | 1   | 208-230                        | 3     | 5   | 16.7 | 109.8 |  |
|      | T/YH*180G4        | 1   | 460                           | 3     | 3                 | 4.8                 | 40.5  | 1   | 460                            | 3     | 5   | 7.6  | 54.9  |  |
|      | T/YH*180GW        | 1   | 575                           | 3     | 3                 | 3.9                 | 31    | 1   | 575                            | 3     | 5   | 6.1  | 41.6  |  |
| 17½  | T/YH*210G3        | 1   | 208-230                       | 3     | 5                 | 16.7                | 109.8 | 1   | 208-230                        | 3     | 7.5 | 24.2 | 120.4 |  |
|      | T/YH*210G4        | 1   | 460                           | 3     | 5                 | 7.6                 | 54.9  | 1   | 460                            | 3     | 7.5 | 11   | 74    |  |
|      | T/YH*210GW        | 1   | 575                           | 3     | 5                 | 6.1                 | 41.6  | 1   | 575                            | 3     | 7.5 | 9    | 60    |  |
| 20   | T/YH*240G3        | 1   | 208-230                       | 3     | 5                 | 16.7                | 109.8 | 1   | 208-230                        | 3     | 7.5 | 24.2 | 120.4 |  |
|      | T/YH*240G4        | 1   | 460                           | 3     | 5                 | 7.6                 | 54.9  | 1   | 460                            | 3     | 7.5 | 11   | 74    |  |
|      | T/YH*240GW        | 1   | 575                           | 3     | 5                 | 6.1                 | 41.6  | 1   | 575                            | 3     | 7.5 | 9    | 60    |  |
| 25   | T/YH*300G3        | 1   | 208-230                       | 3     | 7.5               | 24.2                | 120.4 | —   | —                              | —     | —   | —    | —     |  |
|      | T/YH*300G4        | 1   | 460                           | 3     | 7.5               | 11                  | 74    | —   | —                              | —     | —   | —    | —     |  |
|      | T/YH*300GW        | 1   | 575                           | 3     | 7.5               | 9                   | 60    | —   | —                              | —     | —   | —    | —     |  |

(a) Horsepower for each compressor.  
 \*Indicates both downflow and horizontal units.  
 (b) For Compressor Motors and Condenser Fan Motors: Amp draw for each motor; multiply value by number of motors to determine total amps.

**Table 89. Electrical characteristics—combustion blower motor (gas/electric)**

| Unit Model Number               | Heat       | Heating Stages | hp   | rpm <sup>(a)</sup> | Volts   | Phase | Amps |      |
|---------------------------------|------------|----------------|------|--------------------|---------|-------|------|------|
|                                 |            |                |      |                    |         |       | FLA  | LRA  |
| YH*150G                         | Low        | 2              | 1/20 | 3500/2800          | 208-230 | 1     | 0.5  | 0.78 |
| YH*180G, 210G, 240G, 300G       | Low        | 2              | 1/10 | 3500/2800          | 208-230 | 1     | 0.8  | 2.00 |
| YH*150G, 180G, 210G, 240G, 300G | Modulating | N/A            | 1/4  | 4600/950           | 208-230 | 3     | 0.8  | 2.00 |

(a) High/Low Speed.


\* Indicates both downflow and horizontal units.

**Table 90. Electrical characteristics—power exhaust (cooling and gas/electric)**

| Tons   | Volts   | Phase | hp  | rpm  | Amps |      |
|--------|---------|-------|-----|------|------|------|
|        |         |       |     |      | FLA  | LRA  |
| 12½-25 | 208-230 | 1     | 3/4 | 1040 | 6.6  | 13.5 |
|        | 460     | 1     | 3/4 | 1040 | 3.2  | 8.4  |
|        | 575     | 1     | 3/4 | 1040 | 2.1  | 5.2  |

# Typical Wiring

Figure 1. 12½–25 tons cooling with optional electric heat: power wiring

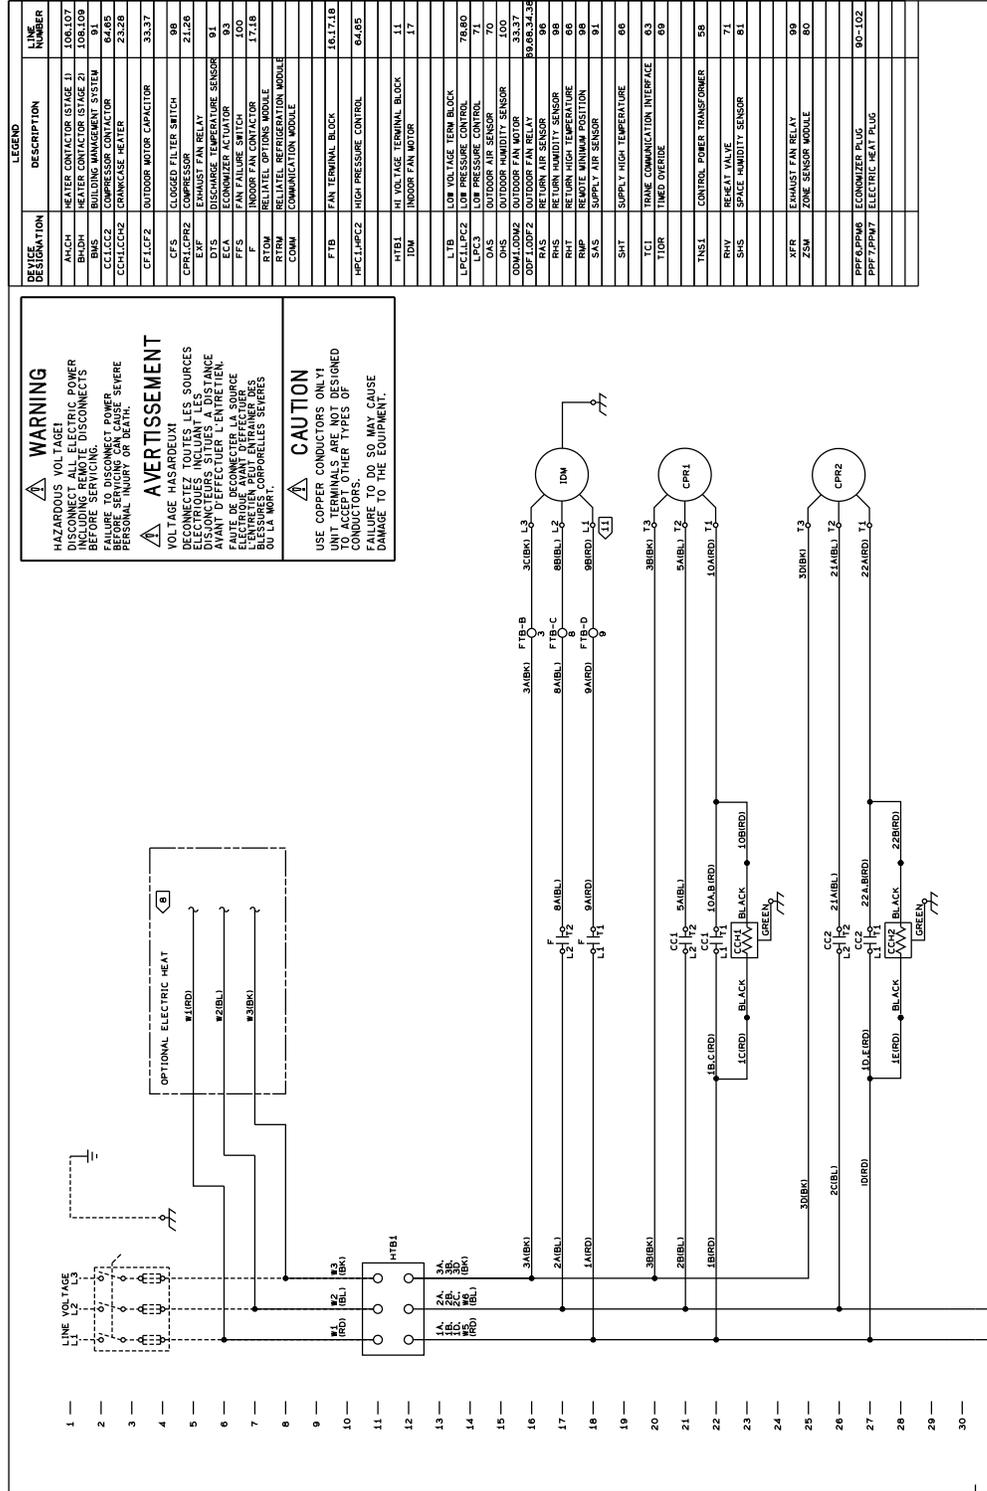



# Typical Wiring

Figure 2. 12½–25 tons cooling with optional electric heat: control wiring

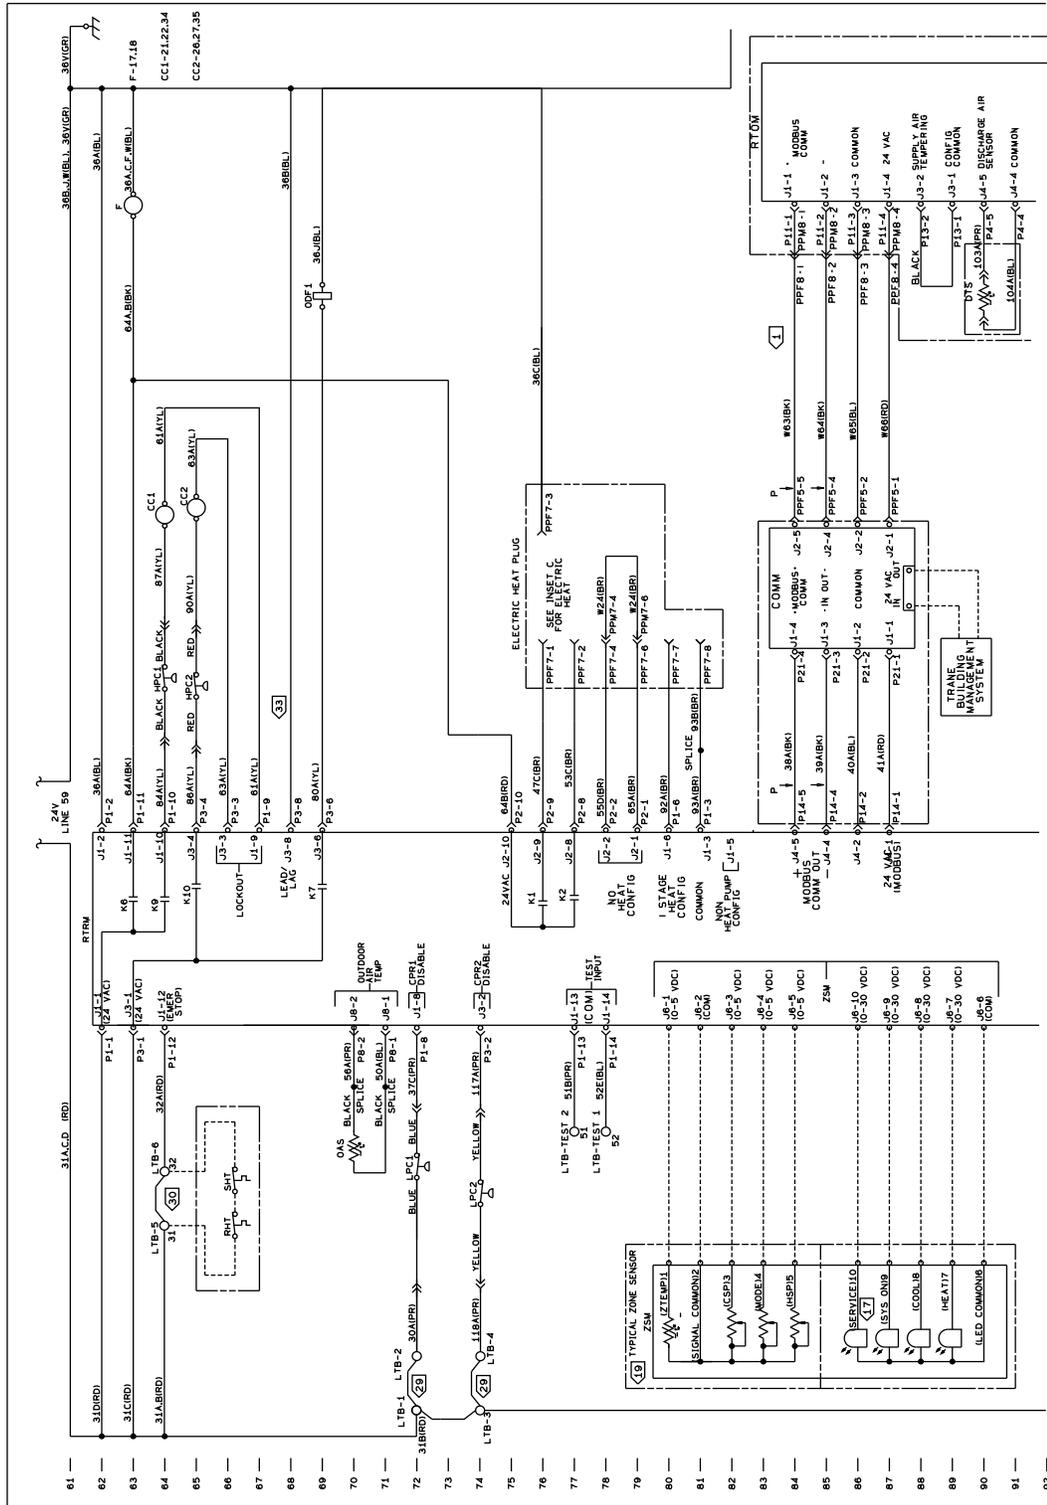






Figure 3. (continued from previous page) 12½–25 tons gas/electric: power wiring

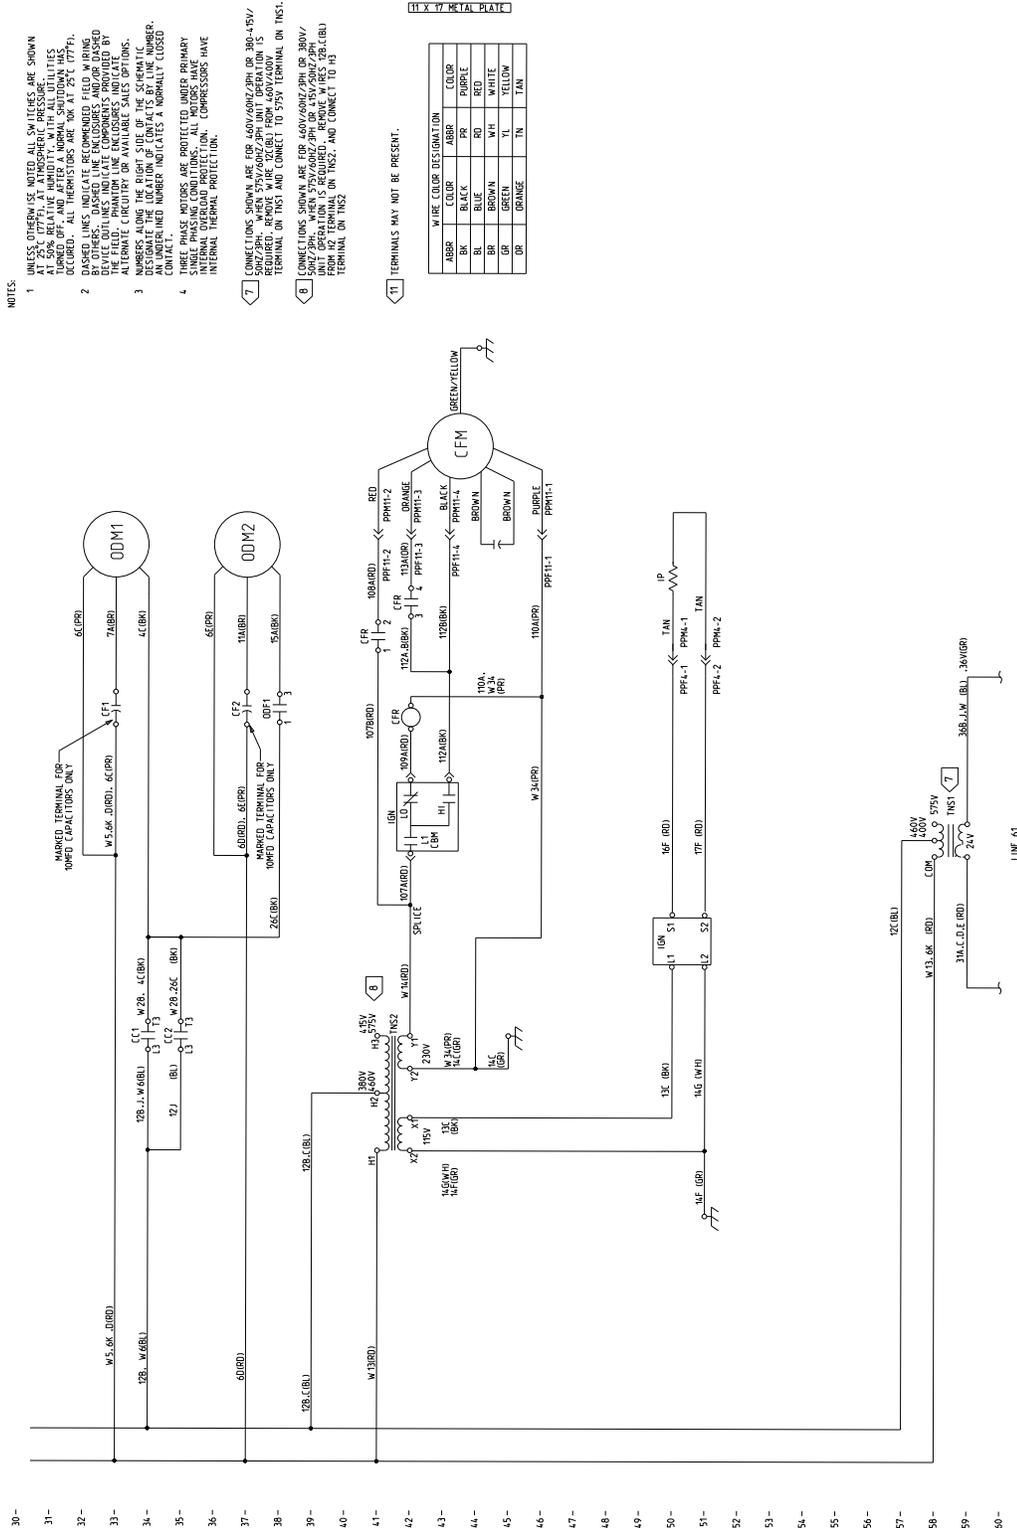


Figure 4. 12½–25 tons gas/electric: control wiring


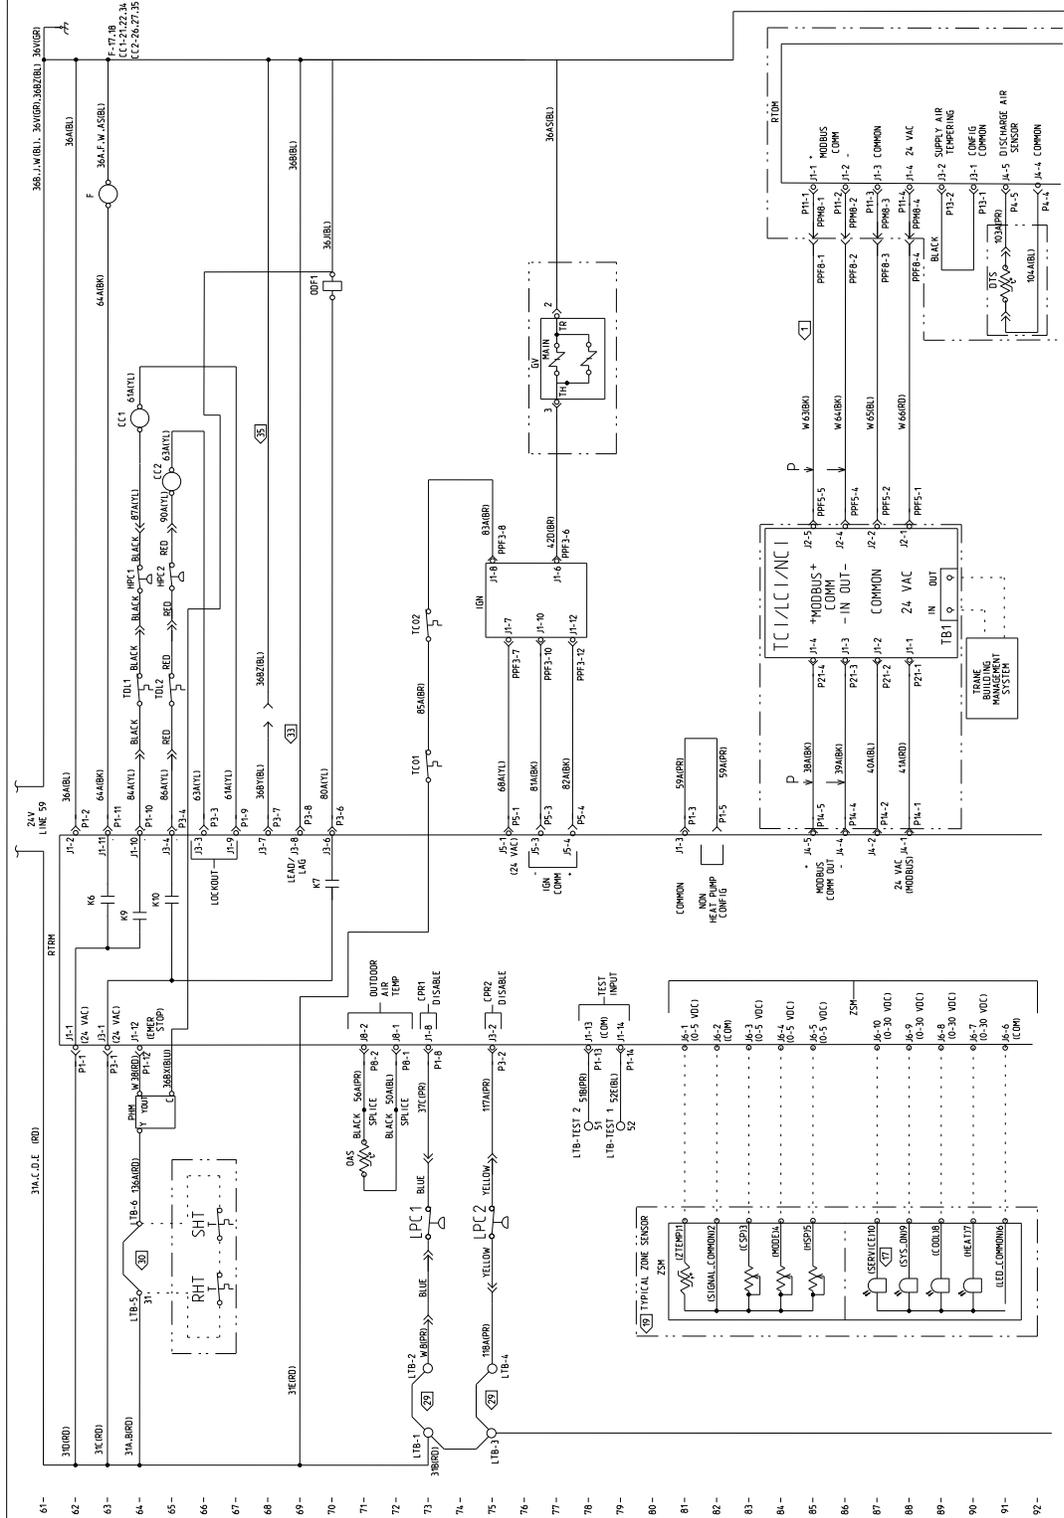



Figure 4. (continued from previous page) 12½–25 tons gas/electric: control wiring

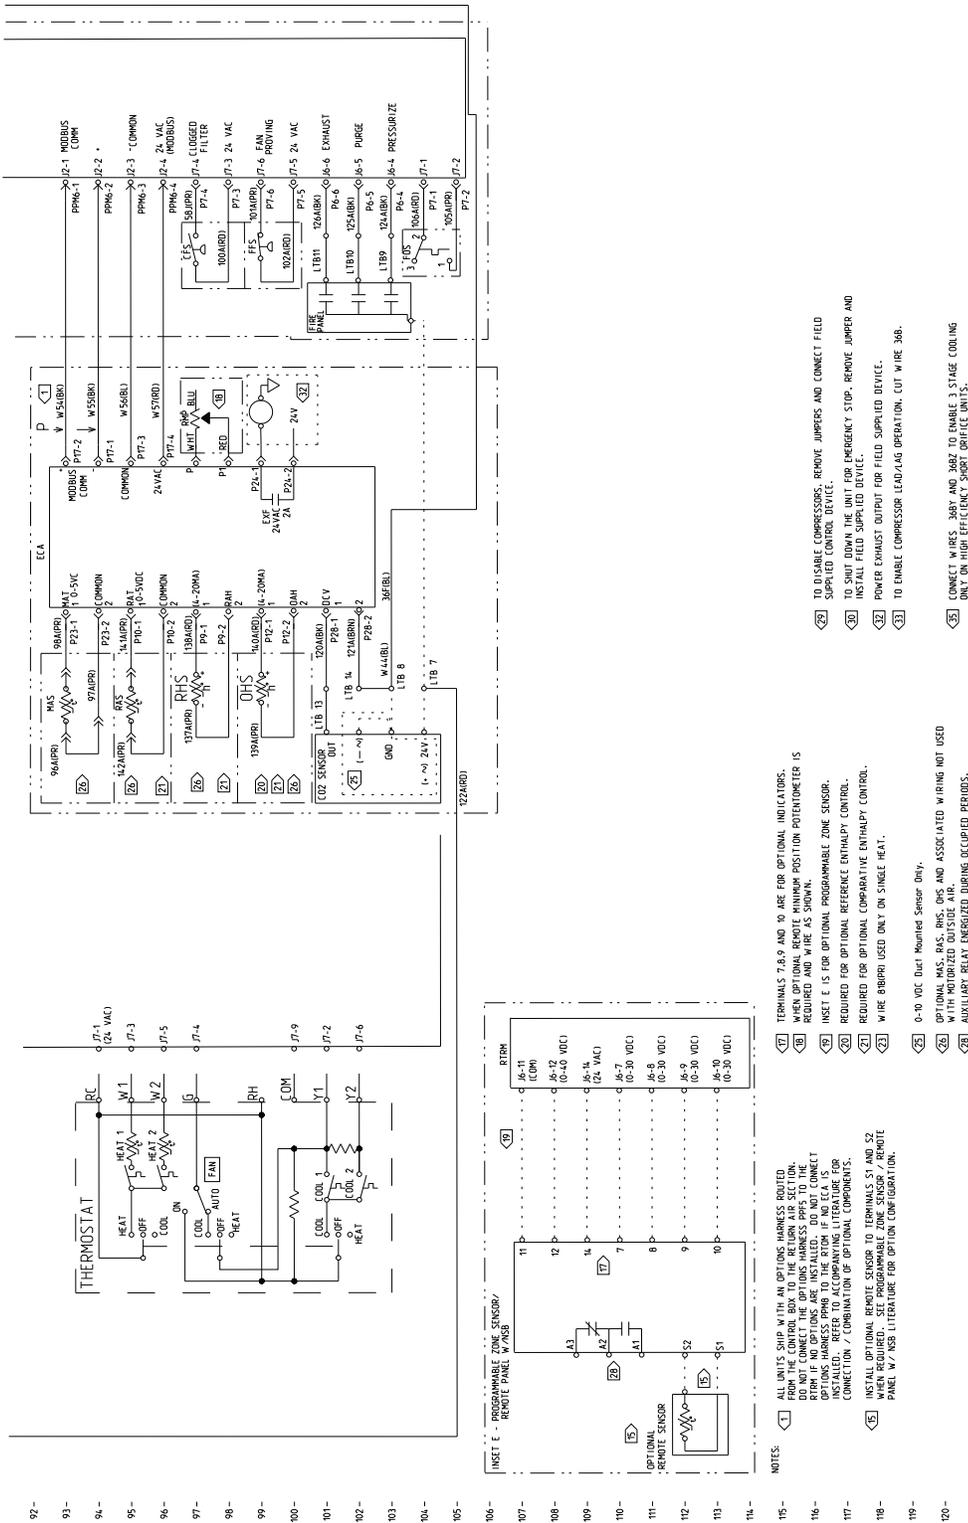

# Jobsite Connections

**Table 91. Typical number of wires**

| <b>Zone Sensors</b> |  |    |
|---------------------|--|----|
| A                   | Manual Changeover.....   | 4  |
|                     | Manual/Auto Changeover.....                                    | 5  |
|                     | Manual/Auto Changeover with<br>Status Indication LEDs.....     | 10 |
|                     | Programmable Night Setback<br>with Status Indication LEDs..... | 7  |
| <b>Thermostats</b>  |  |    |
| B                   | 3 Power Wires + 1 Ground Wire (three phase)                    |    |
|                     | 2 Power Wires + 1 Ground Wire (single phase)                   |    |

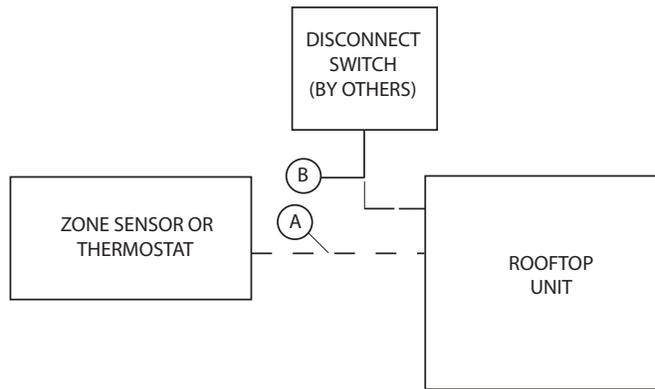


**Notes:**


- For specific wiring information, see the installation instructions.
- All wiring except power wire is low voltage.
- All customer supplied wiring to be copper and must conform to applicable electrical codes and local electric codes. Wiring shown dotted is to be furnished and installed by the customer.
- Zone sensors are required for units configured for Single Zone VAV indoor fan system control in order to enable Single Zone VAV functionality.

# Dimensional Data

**Figure 5. Cooling with optional electric heat and gas/electric models—12½ tons standard efficiency**

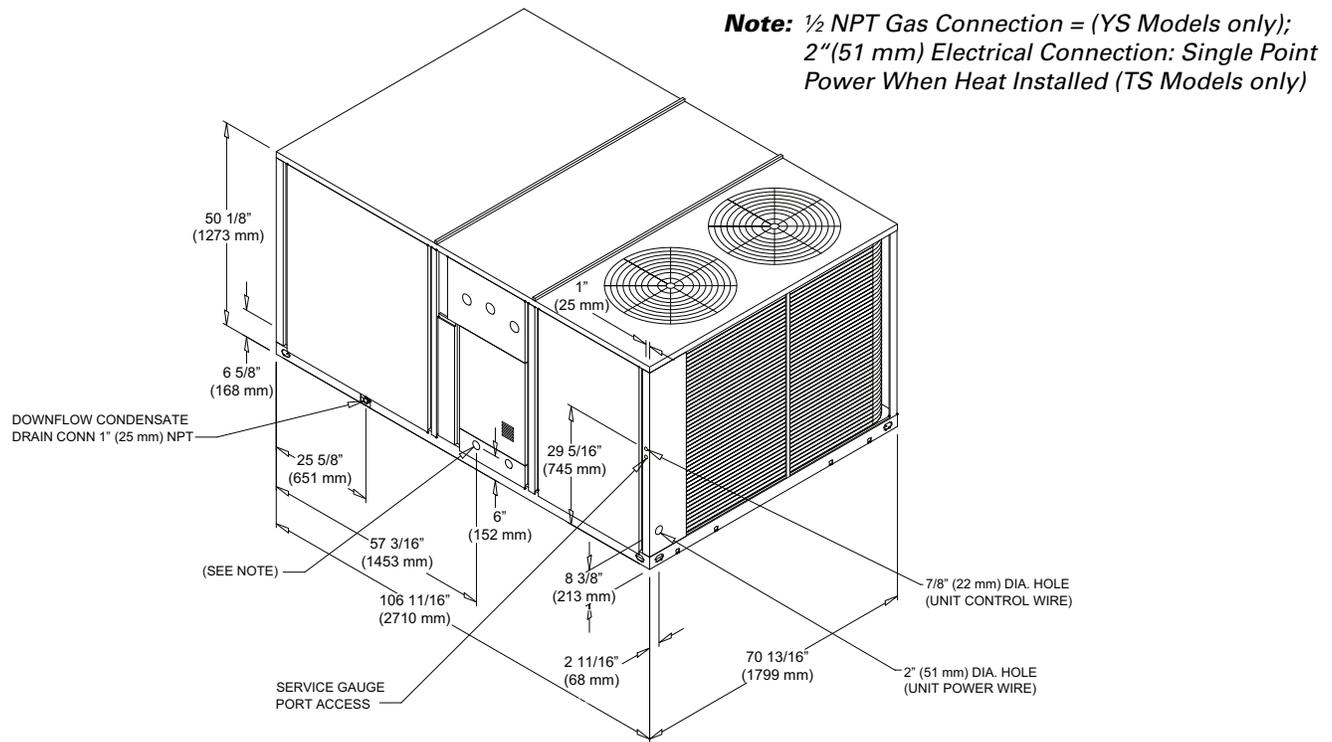


**Figure 6. Cooling with optional electric heat and gas/electric models—12½ tons standard efficiency horizontal unit clearance**

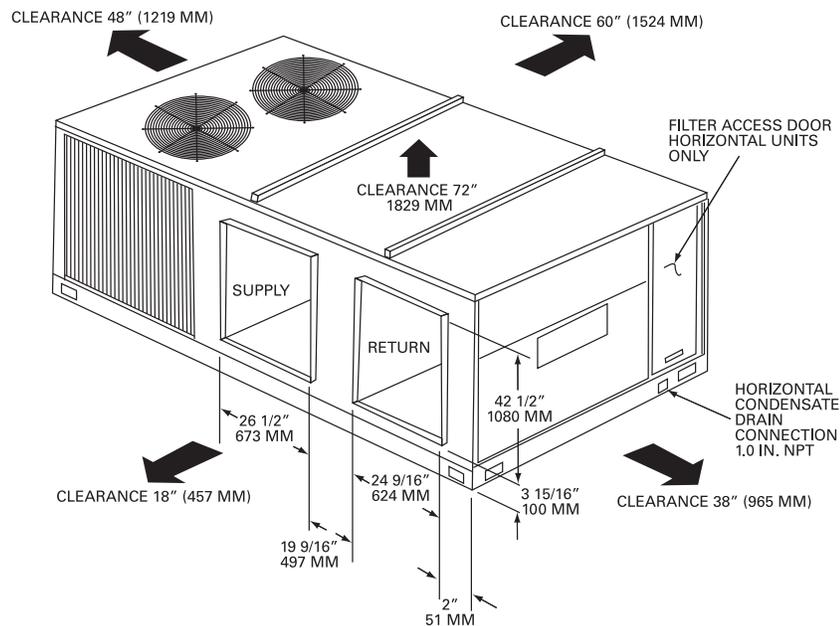


## Dimensional Data

**Figure 7. Cooling with optional electric heat and gas/electric models 12½ tons standard efficiency—roof curb**

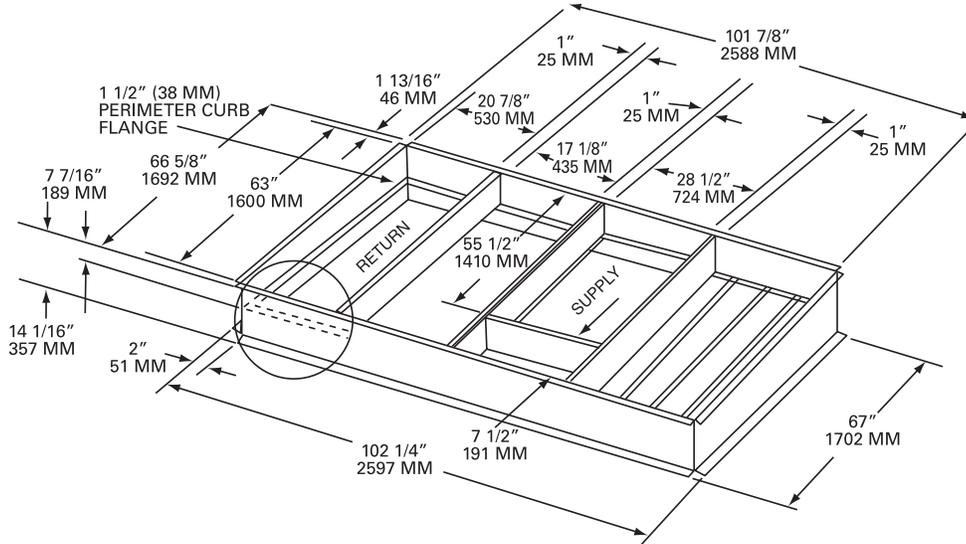


**Figure 8. Cooling with optional electric heat and gas/electric models 12½ tons standard efficiency—downflow duct connections—field fabricated**

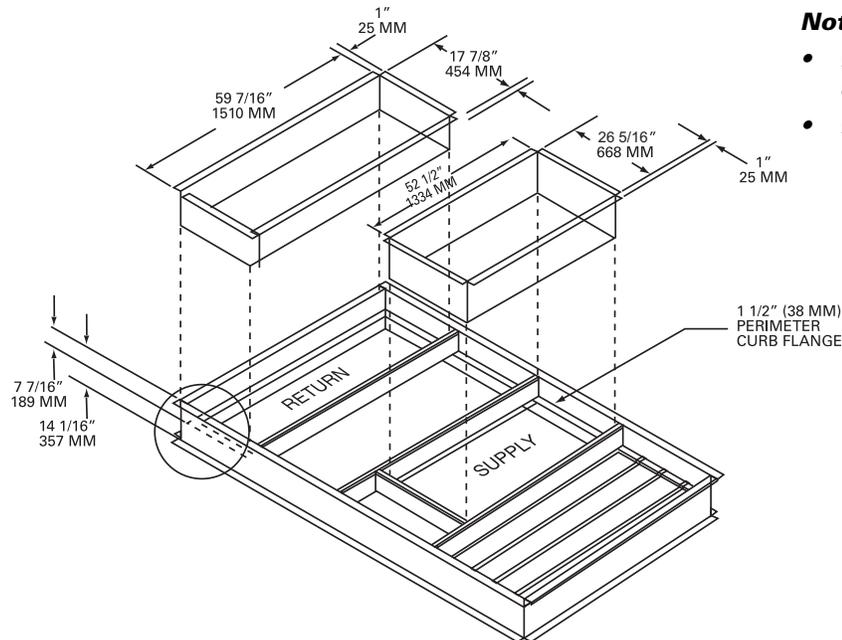

**Notes:**


- Duct flanges mount 7-7/16" down inside the curb on the 1-1/2" curb flanges.
- Roofcurb is intended for downflow use only.

**Figure 9. Cooling with optional electric heat and gas/electric models—12½ tons standard efficiency—downflow unit supply/return and unit clearance**

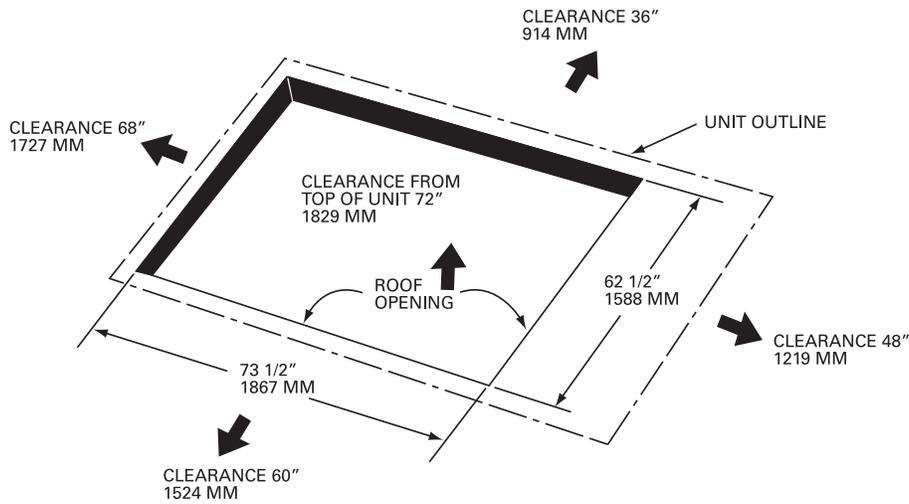


**Figure 10. Cooling with optional electric heat and gas/electric models—15–25 tons standard efficiency & 12.5 ton high efficiency**

**Note:** ½ NPT Gas Connection = (Y\* Models only);  
 2" (51 mm) Electrical Connection: Single Point  
 Power When Heat Installed (T\* Models only)

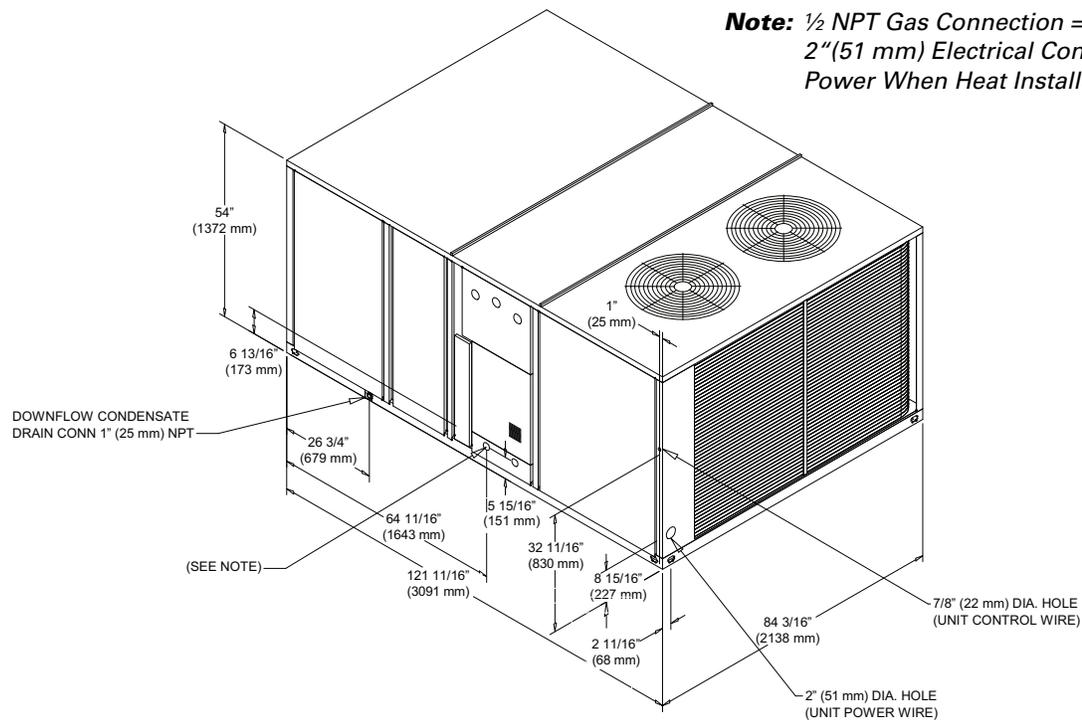


## Dimensional Data


**Figure 11. Cooling with optional electric heat and gas/electric models—15–25 tons high efficiency**

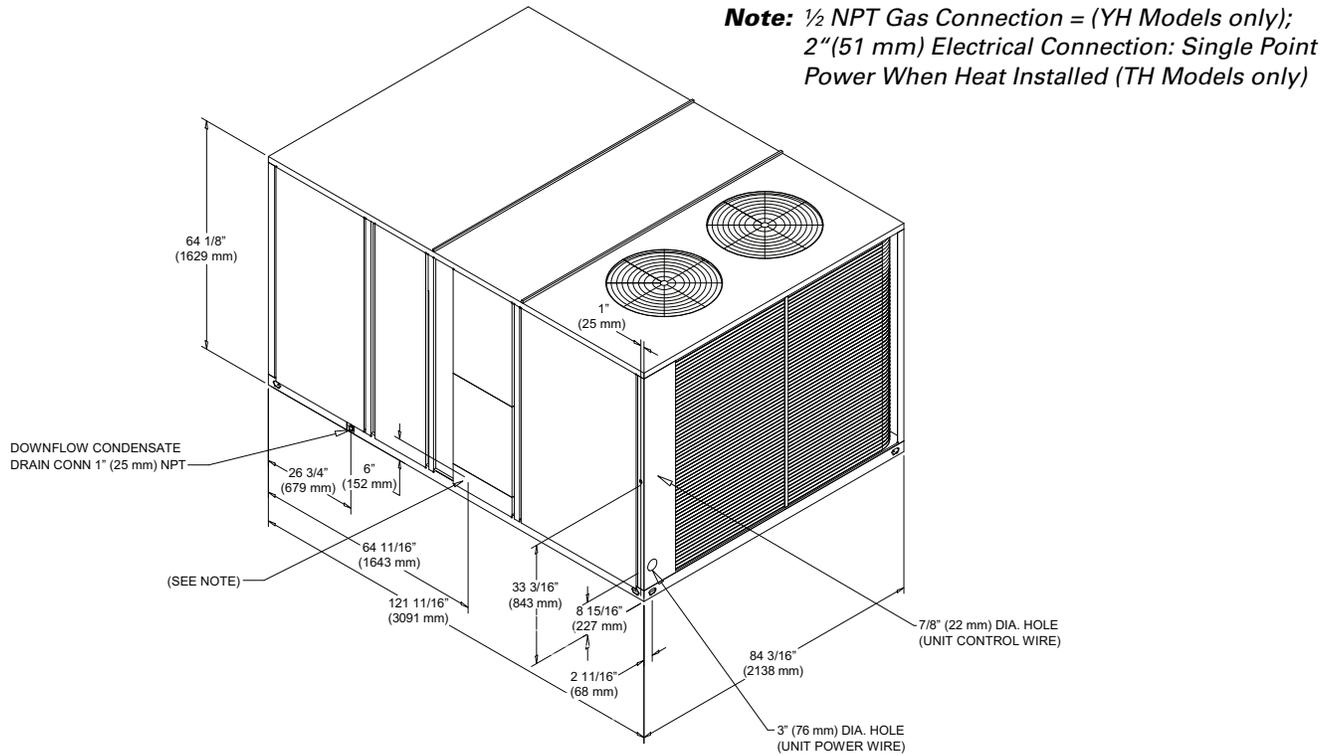


**Figure 12. Cooling with optional electric heat and gas/electric models—15–25 tons standard efficiency, 12½–25 tons high efficiency—unit clearance and horizontal unit supply/return**

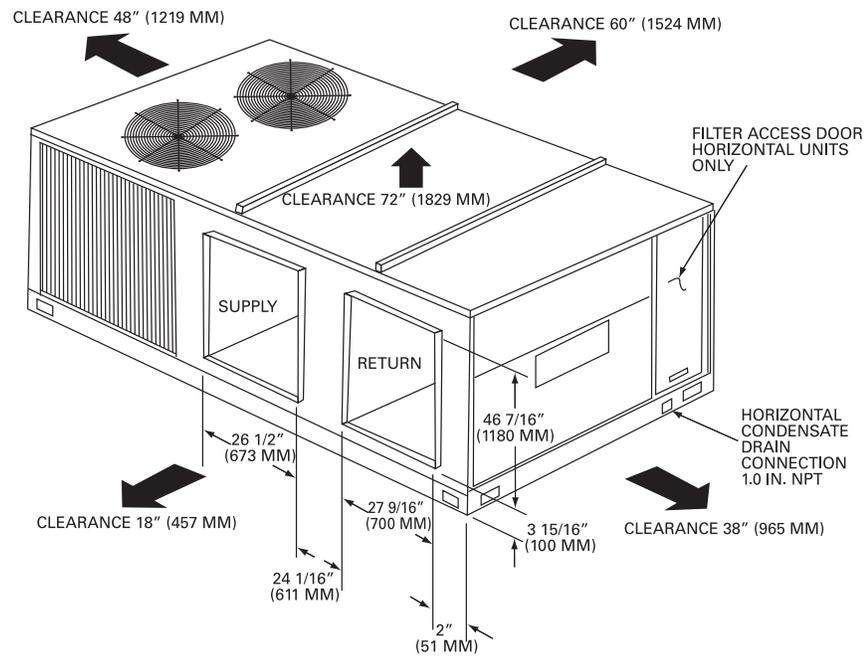

**Figure 13. Cooling with optional electric heat and gas/electric models—15–25 tons standard efficiency, 12½–25 tons high efficiency—roof curb**

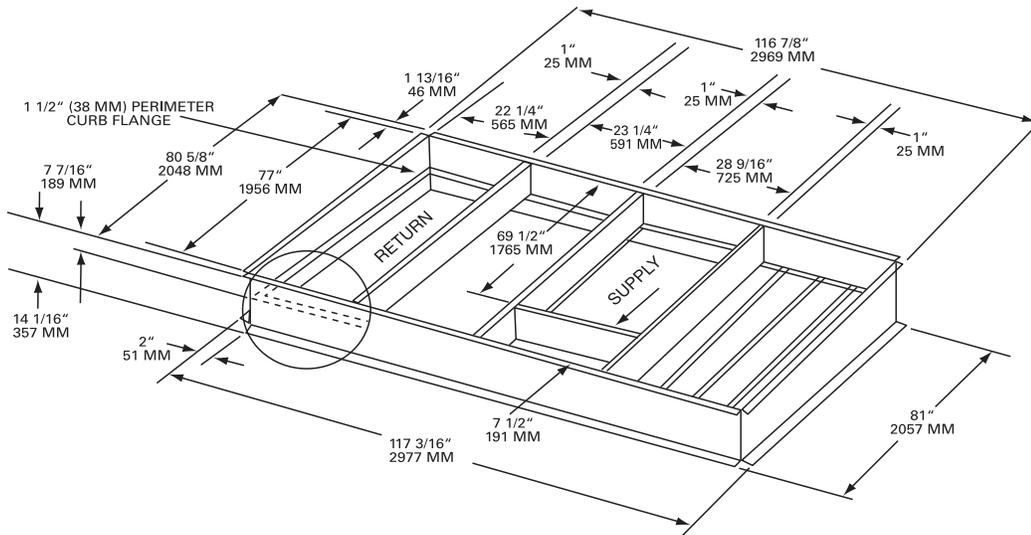

**Figure 14. Cooling with optional electric heat and gas/electric models—15–25 tons standard efficiency, 12½–25 tons high efficiency—downflow duct connections—field fabricated**

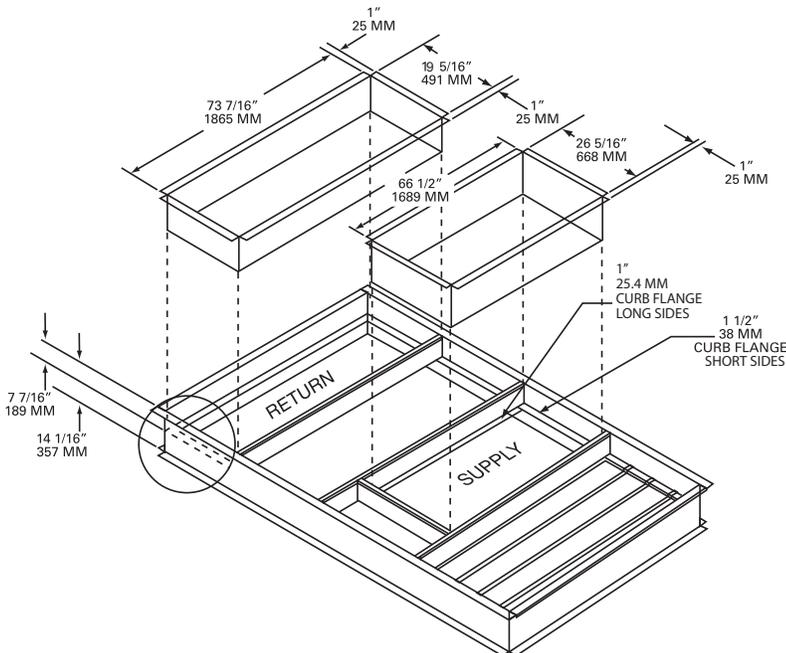


**Notes:**


- Duct flanges mount 7-7/16" down inside the curb on the 1-1/2" curb flanges.
- Roofcurb is intended for downflow use only.

## Dimensional Data

**Figure 15. Cooling with optional electric heat and gas/electric models—15–25 tons standard efficiency, 12½–25 tons high efficiency—downflow unit clearance**

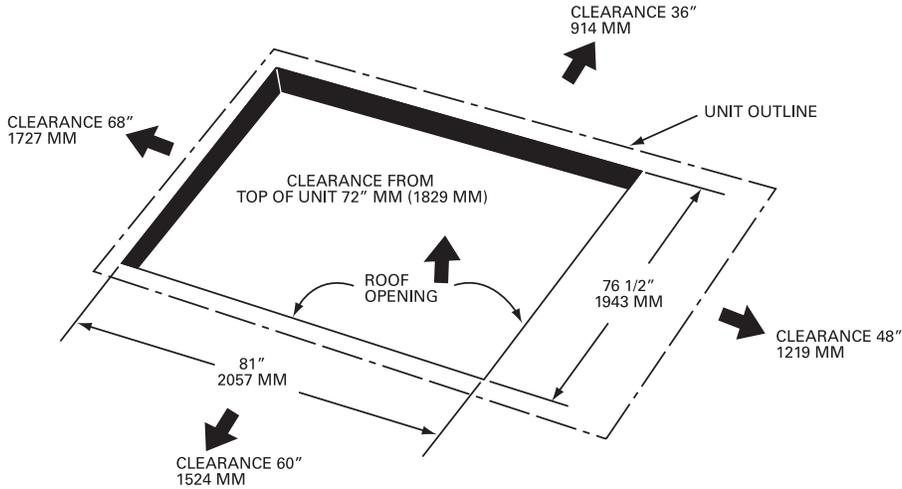

**Figure 16. Downflow & horizontal condensate locations**

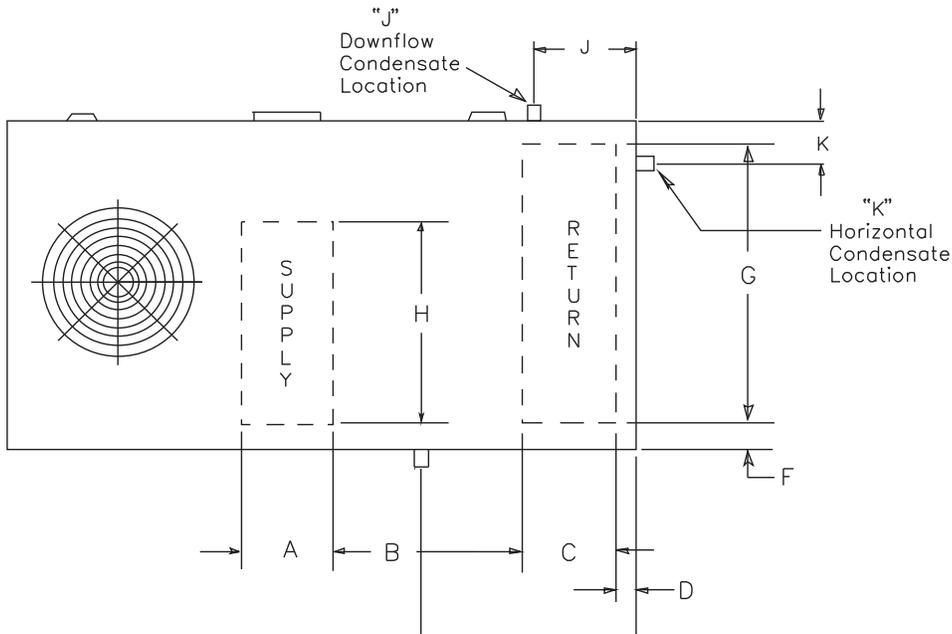

**Table 92. Standard efficiency units (cooling and gas/electric)**

| Tons  | Downflow Only |        |          |       |       |         |          | Condensate Drain Size | Condensate Drain Location |            |
|-------|---------------|--------|----------|-------|-------|---------|----------|-----------------------|---------------------------|------------|
|       | A             | B      | C        | D     | F     | G       | H        |                       | Downflow                  | Horizontal |
|       |               |        |          |       |       |         |          |                       | J                         | K          |
| 12½   | 26 7/16       | 22 1/2 | 18 11/16 | 4 1/4 | 4 1/4 | 62 7/16 | 54 11/16 | 1 NPT                 | 25 5/8                    | 6          |
| 15–25 | 26 7/16       | 28 3/4 | 19 15/16 | 4 1/4 | 4 1/4 | 76 5/16 | 68 11/16 | 1 NPT                 | 26 3/4                    | 5 3/8      |

**Table 93. High efficiency units (cooling and gas/electric)**


| Tons   | Downflow Only |        |          |       |       |         |          |          | Condensate Drain Size | Condensate Drain Location |  |
|--------|---------------|--------|----------|-------|-------|---------|----------|----------|-----------------------|---------------------------|--|
|        | A             | B      | C        | D     | F     | G       | H        | Downflow |                       | Horizontal                |  |
|        |               |        |          |       |       |         |          | J        |                       | K                         |  |
| 12½–25 | 26 7/16       | 28 3/4 | 19 15/16 | 4 1/4 | 4 1/4 | 76 5/16 | 68 11/16 | 1 NPT    | 26 3/4                | 5 3/8                     |  |

**Table 94. Cooling unit—swing diameter & through the base electrical**

| Unit Model #             | A      | B              | C      | D      | E   |
|--------------------------|--------|----------------|--------|--------|-----|
| TSD150F                  | 42 3/8 | 48 3/8         | 31     | N/A    | N/A |
| TSD180–300F, THD150–300G | 29 1/2 | 56             | 38 1/2 | 18 1/2 | N/A |
| TSH150F                  | 42 3/8 | N/A            | 31     | N/A    | 12  |
| TSH180–300F, THH150–300G | 29 1/2 | N/A <td 38 1/2 | 18 1/2 | 14     |     |

**Note:** All dimensions are in inches.

TOP VIEW SHOWING THROUGH THE BASE  
ELECTRICAL UTILITY LOCATIONS AND ACCESS PANEL SWING CLEARANCES.

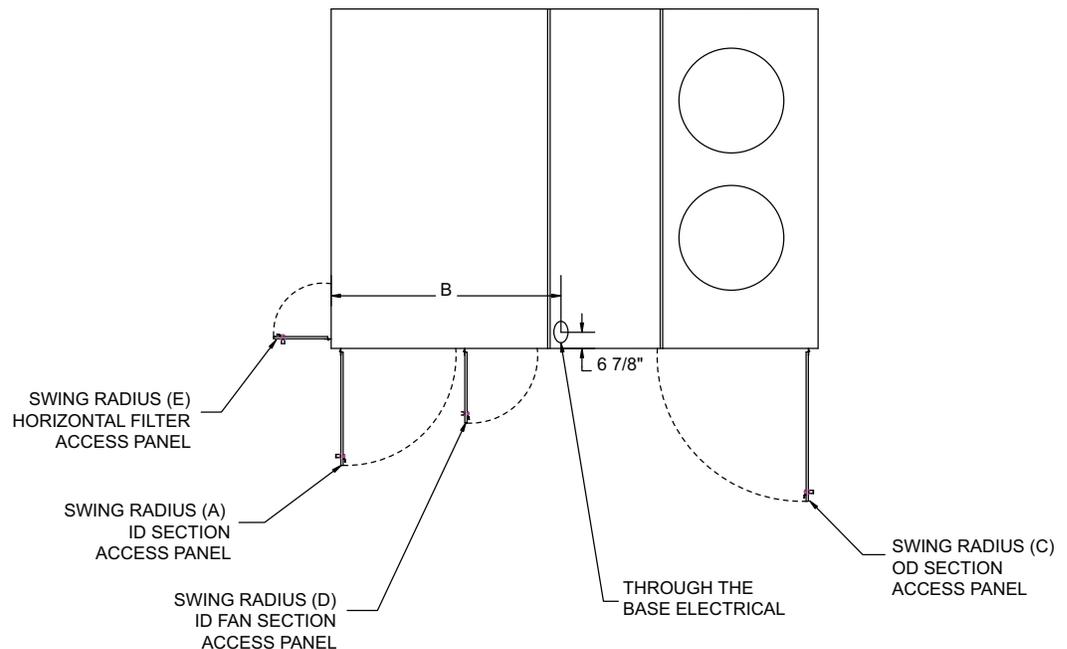


## Dimensional Data


**Table 95. Gas/electric unit—swing diameter & through the base electrical; height of gas pipe**

| Unit Model #             | A      | B      | C      | D      | E   | F      |
|--------------------------|--------|--------|--------|--------|-----|--------|
| YSD150F                  | 42 3/8 | 66 3/8 | 48 3/8 | N/A    | N/A | 31     |
| YSD180-300F, YHD150-300G | 29 1/2 | 77 7/8 | 56     | 18 1/2 | N/A | 38 1/2 |
| YSH150F                  | 42 3/8 | N/A    | N/A    | N/A    | 12  | 31     |
| YSH180-300F, YHH150-300G | 29 1/2 | N/A    | N/A    | 18 1/2 | 14  | 38 1/2 |

**Note:** All dimensions are in inches.

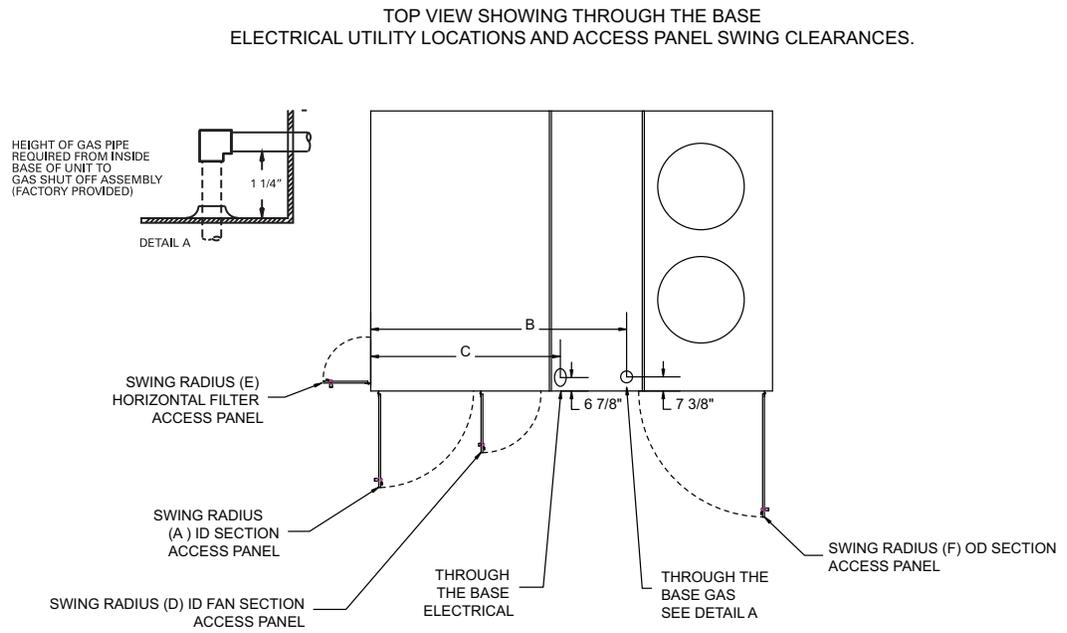

**Figure 17. Fresh air hood (horizontal units)**

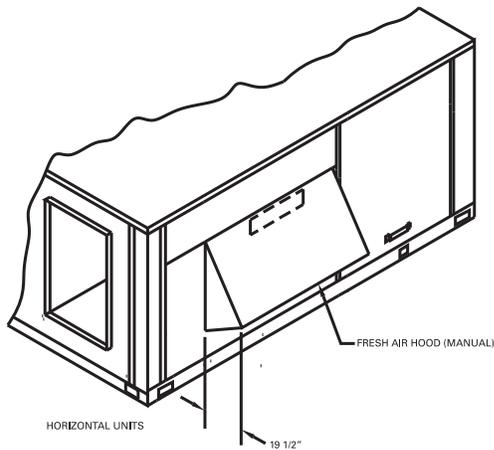

**Figure 18. Fresh air hood (downflow units)**

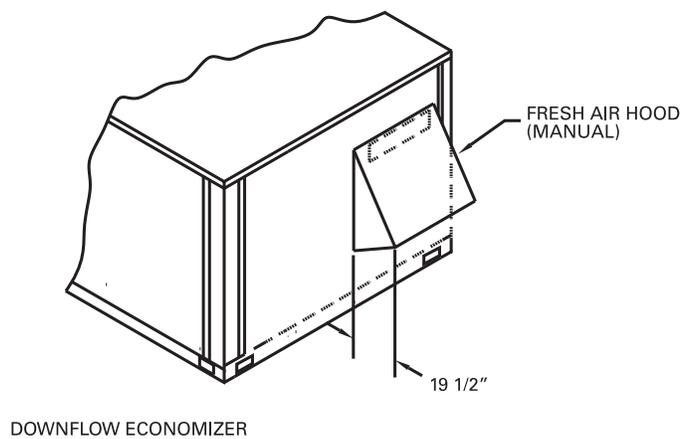


Figure 19. Power exhaust—downflow economizers

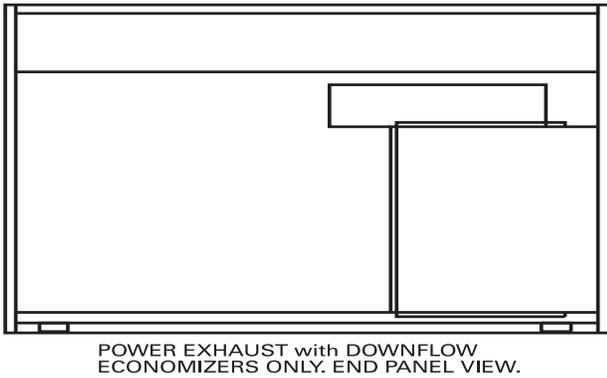


Figure 20. Power exhaust—downflow economizers—side view

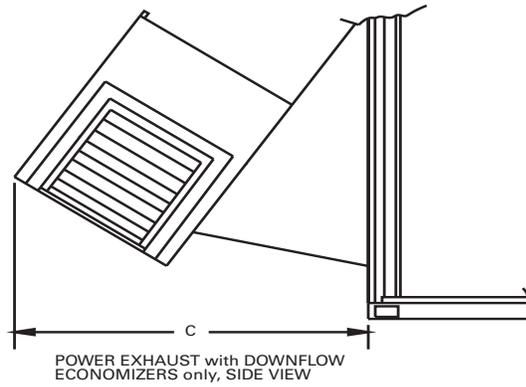


Figure 21. Economizer—horizontal units


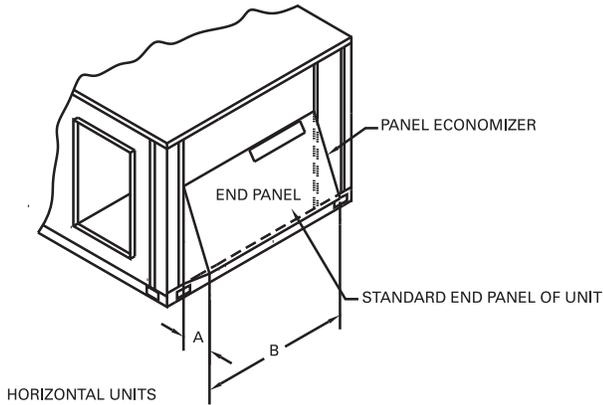


Figure 22. Economizer—downflow units

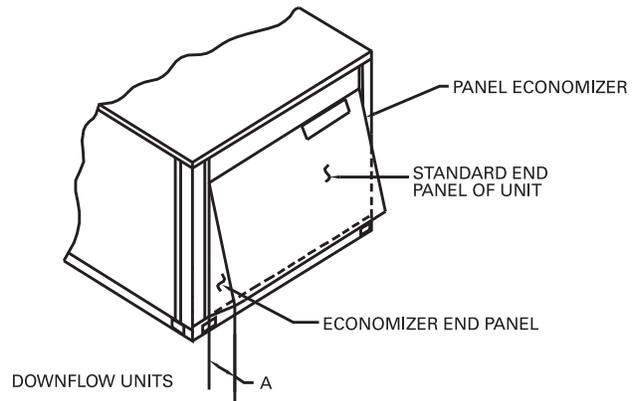

**Note:** When applying economizer to horizontal units, connected ductwork must be run full size to allow proper operation of economizer damper.

Table 96. Power exhaust dimensions

| Unit Model #                            | A   | B(a) | C(b) |
|---|-----|------|------|
| T/YS*150F                               | 17½ | 53¾  | 36   |
| T/YH*150, T/YS*180F-300F, T/YH*180-300F | 19½ | 64¾  | 39   |

(a) Horizontal dimension only. Downflow economizer is width of end panel.

(b) Power exhaust is applied on downflow economizer only.

# Weights

**Table 97. Maximum unit & corner weights (lb) and center of gravity dimensions (in.) cooling with optional electric heat units only**


| Tons | Unit Model No.         | Weights (lb) <sup>(a), (b)</sup> |      | Corner Weights <sup>(c)</sup> |     |     |     | Center of Gravity (in.) |       |
|------|------------------------|----------------------------------|------|-------------------------------|-----|-----|-----|-------------------------|-------|
|      |                        | Shipping                         | Net  | A                             | B   | C   | D   | Length                  | Width |
| 12½  | TS*150F                | 1781                             | 1413 | 475                           | 368 | 263 | 308 | 50"                     | 29"   |
|      | TH*150G                | 2514                             | 2062 | 640                           | 550 | 409 | 462 | 50"                     | 30"   |
|      | THD150G (Reheat Units) | 2451                             | 2000 | 636                           | 522 | 382 | 458 | 56"                     | 36"   |
| 15   | TS*180F                | 2281                             | 1822 | 618                           | 493 | 336 | 378 | 57"                     | 33"   |
|      | TH*180G                | 2482                             | 2030 | 605                           | 554 | 416 | 456 | 58"                     | 36"   |
|      | THD180G (Reheat Units) | 2445                             | 2002 | 637                           | 523 | 382 | 458 | 57"                     | 36"   |
| 17½  | TS*210F                | 2292                             | 1863 | 591                           | 510 | 372 | 388 | 61"                     | 35"   |
|      | TH*210G                | 2443                             | 1991 | 608                           | 532 | 390 | 461 | 56"                     | 36"   |
|      | THD210G (Reheat Units) | 2513                             | 2069 | 658                           | 540 | 396 | 474 | 58"                     | 35"   |
| 20   | TS*240F                | 2353                             | 1925 | 614                           | 514 | 375 | 422 | 57"                     | 35"   |
|      | TH*240G                | 2513                             | 2061 | 657                           | 542 | 392 | 470 | 55"                     | 35"   |
|      | THD240G (Reheat Units) | 2516                             | 2071 | 659                           | 541 | 396 | 474 | 58"                     | 35"   |
| 25   | TS*300F                | 2337                             | 1878 | 595                           | 510 | 372 | 402 | 60"                     | 35"   |
|      | TH*300G                | 2514                             | 2062 | 658                           | 546 | 391 | 468 | 55"                     | 35"   |

(a) Weights are approximate. Horizontal and downflow unit and corner weights may vary slightly.

(b) Weights do not include additional factory or field installed options/accessories. For option/accessory additional weights, reference [Table 99, p. 141](#) to be added to unit weights.

(c) Corner weights are given for information only. 12½–25 ton models must be supported continuously by a curb or equivalent frame support.

\* Indicates both downflow and horizontal units.

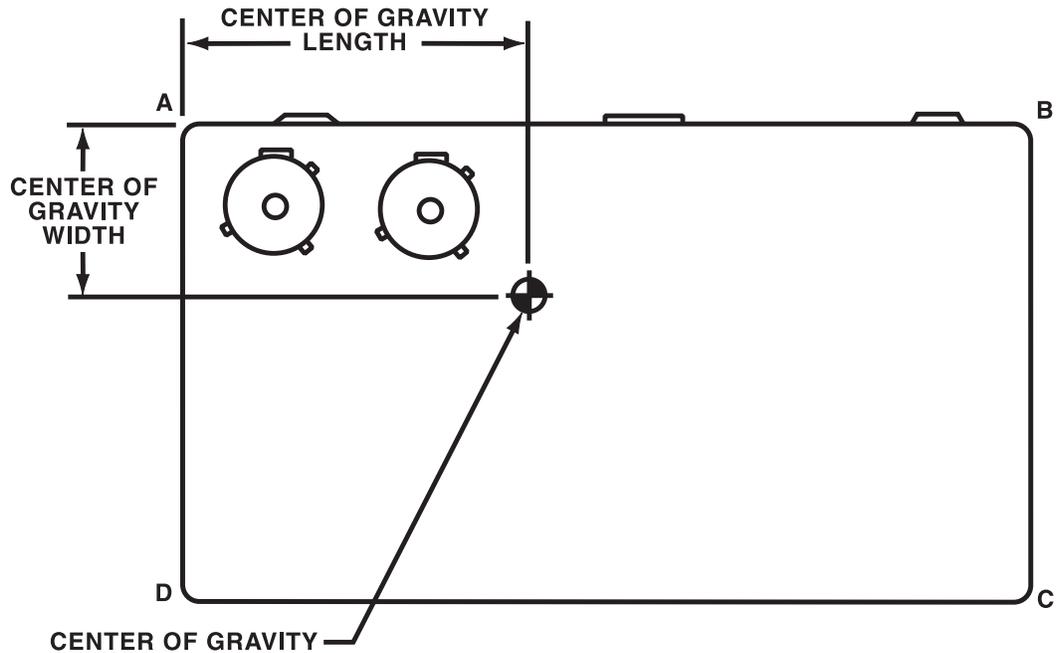

**Table 98. Maximum unit & corner weights (lb) and center of gravity dimensions (in.) gas/electric heat units only**

| Tons | Unit Model No.         | Weights (lb) <sup>(a),(b)</sup> |      | Corner Weights <sup>(c)</sup> |     |     |     | Center of Gravity (in.) |       |
|------|------------------------|---------------------------------|------|-------------------------------|-----|-----|-----|-------------------------|-------|
|      |                        | Shipping                        | Net  | A                             | B   | C   | D   | Length                  | Width |
| 12½  | YS*150F                | 1876                            | 1508 | 506                           | 390 | 275 | 337 | 55"                     | 34"   |
|      | YH*150G                | 2691                            | 2207 | 686                           | 588 | 437 | 495 | 50"                     | 30"   |
|      | YHD150G (Reheat Units) | 2630                            | 2146 | 682                           | 560 | 410 | 491 | 56"                     | 36"   |
| 15   | YS*180F                | 2384                            | 1925 | 666                           | 505 | 343 | 410 | 56"                     | 33"   |
|      | YH*180G                | 2660                            | 2176 | 651                           | 592 | 444 | 490 | 58"                     | 36"   |
|      | YHD180G (Reheat Units) | 2623                            | 2149 | 683                           | 561 | 410 | 492 | 57"                     | 36"   |
| 17½  | YS*210F                | 2467                            | 2007 | 639                           | 547 | 399 | 419 | 60"                     | 34"   |
|      | YH*210G                | 2619                            | 2140 | 656                           | 571 | 418 | 495 | 56"                     | 36"   |
|      | YHD210G (Reheat Units) | 2697                            | 2221 | 706                           | 579 | 424 | 508 | 58"                     | 35"   |
| 20   | YS*240F                | 2528                            | 2069 | 659                           | 551 | 402 | 455 | 57"                     | 35"   |
|      | YH*240G                | 2690                            | 2211 | 705                           | 581 | 421 | 504 | 55"                     | 35"   |
|      | YHD240G (Reheat Units) | 2700                            | 2223 | 707                           | 580 | 425 | 509 | 58"                     | 35"   |
| 25   | YS*300F                | 2513                            | 2054 | 655                           | 555 | 403 | 442 | 60"                     | 35"   |
|      | YH*300G                | 2719                            | 2245 | 720                           | 593 | 423 | 510 | 55"                     | 35"   |

(a) Weights are approximate. Horizontal and downflow unit and corner weights may vary slightly.

(b) Weights do not include additional factory or field installed options/accessories. For option/accessory additional weights, reference [Table 99, p. 141](#) to be added to unit weights.

(c) Corner weights are given for information only. 12½–25 ton models must be supported continuously by a curb or equivalent frame support.

\* Indicates both downflow and horizontal units.

**Table 99. Factory installed options (FIOPS)/accessory net weight (lb)<sup>(a), (b)</sup>**

| Accessories                          | B Cabinet |           | C Cabinet                              |  | C+ Cabinet                |                           |
|--------------------------------------|-----------|-----------|--|--|---------------------------|---------------------------|
|                                      | T/YSD150F | T/YSH150G | T/YSD180/<br>210/240/300F<br>T/YHD150G | T/YSH180/<br>210/240/300F<br>T/YHH150G | T/YHD180/<br>210/240/300G | T/YHH180/<br>210/240/300G |
| Standard Economizer                  | 65        | 50        | 80                                     | 65                                     | 80                        | 65                        |
| Low Leak Economizer                  | 180       | —         | 250                                    | —                                      | 250                       | —                         |
| Manual Outside Air Damper            | 32        | 32        | 32                                     | 32                                     | 32                        | 32                        |
| Motorized Outside Air Damper         | 60        | 60        | 75                                     | 75                                     | 75                        | 75                        |
| Power Exhaust <sup>(c)</sup>         | 95        | —         | 95                                     | —                                      | 95                        | —                         |
| Roof Curb <sup>(c)</sup>             | 205       | —         | 235                                    | —                                      | 235                       | —                         |
| Oversized Motor                      | 5         | 5         | 5                                      | 5                                      | 5                         | 5                         |
| Hail Guard                           | 34        | 34        | 43                                     | 43                                     | 51                        | 51                        |
| Hinged Access Doors                  | 27        | 27        | 27                                     | 27                                     | 27                        | 27                        |
| Powered Conv. Outlet                 | 38        | 38        | 38                                     | 38                                     | 38                        | 38                        |
| Through the Base Electrical          | 23        | 23        | 23                                     | 23                                     | 23                        | 23                        |
| Circuit Breaker                      | 10        | 10        | 10                                     | 10                                     | 10                        | 10                        |
| Disconnect                           | 10        | 10        | 10                                     | 10                                     | 10                        | 10                        |
| Smoke Detector Supply                | 5         | 5         | 5                                      | 5                                      | 5                         | 5                         |
| Smoke Detector Return                | 5         | 5         | 5                                      | 5                                      | 5                         | 5                         |
| Novar                                | 7         | 7         | 7                                      | 7                                      | 7                         | 7                         |
| High Static Drive Kit <sup>(d)</sup> | 2         | 2         | 2                                      | 2                                      | 2                         | 2                         |
| Low Static Drive Kit <sup>(d)</sup>  | 2         | 2         | —                                      | —                                      | —                         | —                         |



## Weights

**Table 99. Factory installed options (FIOPS)/accessory net weight (lb)<sup>(a), (b)</sup>**

| Accessories                    | B Cabinet |           | C Cabinet                              |  | C+ Cabinet                |                           |
|--------------------------------|-----------|-----------|--|--|---------------------------|---------------------------|
|                                | T/YSD150F | T/YSH150G | T/YSD180/<br>210/240/300F<br>T/YHD150G | T/YSH180/<br>210/240/300F<br>T/YHH150G | T/YHD180/<br>210/240/300G | T/YHH180/<br>210/240/300G |
| LP Gas Conversion              | 5         | 5         | 5                                      | 5                                      | 5                         | 5                         |
| All Zone Sensors               | 1         | 1         | 1                                      | 1                                      | 1                         | 1                         |
| Electric Heaters               |           |           |  |  |                           |                           |
| 6–23 kW <sup>(e)</sup> (f)     | 28/21     | 28/21     | 28/21 <sup>(g)</sup>                   | 28/21 <sup>(g)</sup>                   | —                         | —                         |
| 27–36 kW <sup>(e)</sup> (f)    | 31/27     | 31/27     | 33/27                                  | 33/27                                  | 33/27                     | 33/27                     |
| 54 kW <sup>(e)</sup> (f)       | 38/32     | 38/32     | 40/32                                  | 40/32                                  | 40/32                     | 40/32                     |
| 72 kW <sup>(e)</sup> (f) (h)   | —         | —         | 43/34                                  | 43/34                                  | 43/34                     | 43/34                     |
| Stainless Steel Heat Exchanger |           |           |  |  |                           |                           |
| 150 MBh                        | 50        | 50        | 50 <sup>(g)</sup>                      | 50 <sup>(g)</sup>                      | —                         | —                         |
| 250 MBh                        | 50        | 50        | 50                                     | 50                                     | 50                        | 50                        |
| 350 MBh                        | 75        | 75        | 75                                     | 75                                     | 75                        | 75                        |
| 400 MBh <sup>(i)</sup>         | —         | —         | 75                                     | 75                                     | 75                        | 75                        |
| Stainless Steel Drain Pan      | 6.6       | 6.6       | 8.1                                    | 8.1                                    | 8.1                       | 8.1                       |
| VFD                            |           |           |  |  |                           |                           |
| 3 & 5 HP <sup>(j)</sup>        | 32        | 34        | 32                                     | 34                                     | 32                        | 34                        |
| 7.5 HP <sup>(h)</sup>          | —         | —         | 63                                     | 65                                     | 63                        | 65                        |

(a) Net weight should be added to unit weight when ordering factory-installed accessories.

(b) Weights for FIOP accessories not listed are < 5 lb.

(c) Downflow only.

(d) Not available on all models (see Fan Performance tables for specific models).

(e) For 600V heaters net weights are same as 480V heaters.

(f) To estimate shipping weight add 5 lb to net weight.

(g) Applicable to T/YH\*150G units only.

(h) Not applicable to T/YH\*150-180G, and T/YS\*180F units.

(i) Applicable to T/Y\*\*240-300\* units only.

(j) Not applicable to T/Y\*\*300\* units.

# Mechanical Specifications

## General

The units shall be dedicated downflow or horizontal airflow. The operating range shall be between 115°F and 0°F in cooling as standard from the factory for all units. Cooling performance shall be rated in accordance with ARI testing procedures. All units shall be factory assembled, internally wired, fully charged with R-410A, and 100 percent run tested to check cooling operation, fan and blower rotation and control sequence, before leaving the factory. Wiring internal to the unit shall be colored and numbered for simplified identification. Units shall be UL listed and labeled, classified in accordance to UL 1995/C 22.2, 236-05 3<sup>rd</sup> Edition.

## Casing

Unit casing shall be constructed of zinc coated, heavy gauge, galvanized steel. Exterior surfaces shall be cleaned, phosphatized, and finished with a weather-resistant baked enamel finish. Unit's surface shall be tested 672 hours in a salt spray test in compliance with ASTM B117. Cabinet construction shall allow for all maintenance on one side of the unit. In order to ensure a water and air tight seal, service panels shall have lifting handles and no more than three screws to remove. All exposed vertical panels and top covers in the indoor air section shall be insulated with a 1/2-inch, 1-pound density foil-faced, fire-resistant, permanent, odorless, glass fiber material. The base of the downflow unit shall be insulated with 1/2-inch, 1-pound density foil-faced, closed-cell material. The downflow unit's base pan shall have no penetrations within the perimeter of the curb other than the raised 11/8-inch high supply/return openings to provide an added water integrity precaution, if the condensate drain backs up. The base of the unit shall have provisions for forklift and crane lifting.

## Compressors

All units shall have direct-drive, hermetic, scroll type compressors with centrifugal type oil pumps. Motor shall be suction gas-cooled and shall have a voltage utilization range of plus or minus 10 percent of nameplate voltage. Internal overloads shall be provided with the scroll compressors. All models shall have crankcase heaters, phase monitors and low and high pressure control as standard. Dual compressors are available on all standard efficiency models and 12.5 to 20 tons high efficiency models and allow for efficient cooling utilizing 3 stages of compressor operation (high efficiency models only). 25 tons high efficiency units have 3 compressors for up to 4 stages of compressor operation.

## Controls

Unit shall be completely factory wired with necessary controls and contactor pressure lugs or terminal block for power wiring. Unit shall provide an external location for mounting a fused disconnect device. ReliaTel controls shall be provided for all 24-volt control functions. The resident control algorithms shall make all heating, cooling, and/or ventilating decisions in response to electronic signals from sensors measuring indoor and outdoor temperatures. The control algorithm maintains accurate temperature control, minimizes drift from set point, and provides better building comfort. A centralized control shall provide anti-short cycle timing and time delay between compressors to provide a higher level of machine protection.

## Crankcase Heaters

These band heaters provide improved compressor reliability by warming the oil to prevent migration during off-cycles or low ambient conditions. These are standard on all Voyager models.

## Defrost Controls

Adaptive demand defrost shall be provided to permit defrost wherever coil icing conditions begin to significantly reduce unit capacity.

## Discharge Line Thermostat

A bi-metal element discharge line thermostat is installed as a standard option on the discharge line of each system. This standard option provides extra protection to the compressors against high

## Mechanical Specifications

---

discharge temperatures in case of loss of charge, extremely high ambient and other conditions which could drive the discharge temperature higher. Discharge line thermostat is wired in series with high pressure control. When the discharge temperature rises above the protection limit, the bi-metal disc in the thermostat switches to the off position, opening the 24 Vac circuit. When the temperature on the discharge line cools down, the bi-metal disc closes the contactor circuit, providing power to the compressor. When the thermostat opens the fourth time, the ReliaTel control must be manually reset to resume operation on that stage.

### Evaporator and Condenser Coils

Microchannel coils will be burst tested by the manufacturer. Internally finned, 5/16" copper tubes mechanically bonded to a configured aluminum plate fin shall be standard for evaporator coils. Microchannel condenser coils shall be standard on all units. Coils shall be leak tested to ensure the pressure integrity. The evaporator coil and condenser coil shall be leak tested to 225 psig and pressure tested to 450 psig. Sloped condensate drain pans are standard.

### Filters

Two inch standard filters shall be factory supplied on all units. Optional MERV 8 or MERV 13 filters with filter removal tool shall be available.

### Gas Heating Section

The heating section shall have a drum and tube heat exchanger design using corrosion resistant steel components. A forced combustion blower shall supply premixed fuel to a single burner ignited by a pilotless hot surface ignition system.

In order to provide reliable operation, a negative pressure gas valve shall be used on standard furnaces and a pressure switch on furnaces with modulating heat that requires blower operation to initiate gas flow. On an initial call for heat, the combustion blower shall purge the heat exchanger 45 seconds before ignition.

After three unsuccessful ignition attempts, the entire heating system shall be locked out until manually reset at the thermostat. Units shall be suitable for use with natural gas or propane (field installed kit) and shall also comply with California requirements for low NO<sub>x</sub> emissions. The 12½–25 tons shall have two stage heating (Gas/Electric only).

### Indoor Fan

Units above shall have belt driven, FC centrifugal fans with adjustable motor sheaves. Units with standard motors shall have an adjustable idler-arm assembly for quick-adjustment of fan belts and motor sheaves. All motors shall be thermally protected. Oversized motors shall be available for high static application. All indoor fan motors meet the U.S. Energy Policy Act of 1992 (EPACT).

### Outdoor Fans

The outdoor fan shall be direct-drive, statically and dynamically balanced, draw-through in the vertical discharge position. The fan motor(s) shall be permanently lubricated and shall have built-in thermal overload protection.

### Phase Monitor

The Phase Monitor is a three-phase line monitor module that protects against phase loss, phase reversal and phase unbalance. It is intended to protect compressors from reverse rotation. It has an operating input voltage range of 190–600 Vac, and LED indicators for ON and FAULT. There are no field adjustments and the module will automatically reset from a fault condition.

### Refrigerant Circuits

Each refrigerant circuit shall have independent fixed orifice or thermostatic expansion devices, service pressure ports, and refrigerant line filter driers factory installed as standard. An area shall be provided for replacement suction line driers. Thermal Expansion Valves (TXVs) shall be standard on all high efficiency units.

**Unit Top**

The top cover shall be one piece, or where seams exist, double hemmed and gasket sealed to prevent water leakage.

**Variable Frequency Drive**

Variable Frequency Drives are factory installed and tested to provide supply fan motor speed modulation, as well as modulating gas heat. VFDs on the supply fan, as compared to inlet guide vanes or discharge dampers, are quieter, more efficient, and are eligible for utility rebates. All VFDs are designed to allow bypass if required. Bypass control will simply provide full nominal airflow in the event of drive failure. Modulating gas heat models with VFD's allow tighter space temperature control with less temperature swing.

**Factory Installed Options****CO<sub>2</sub> Sensor Wiring**

The unit wiring for field installed CO<sub>2</sub> sensors. Factory-installed CO<sub>2</sub> sensor wiring saves time and ensures proper unit connections for the field installed CO<sub>2</sub> sensor kits.

**Complete Coat™ Microchannel Condenser Coil**

The cathodic epoxy type electrodisposition coating is formulated for high edge build to a number of different types of heat exchangers. The coating is selected to provide excellent resistance and durability to corrosive effects of alkalis, acids, alcohols, petroleum, seawater, salty air, and other corrosive environments. This coating shall be available on microchannel condenser coils.

**Condensate Overflow Switch**

This option shall shut the unit down in the event that a clogged condensate drain line prevents proper condensate removal from the unit.

**Fault Detection & Diagnostics (FDD)**

This offering meets the mandatory requirement of Title 24. This option provides detection of the following faults: Air temperature sensor failure/fault, not economizing when it should, economizing when it should not, damper not modulating, and excessive outdoor air. The FDD system shall be certified by the Energy Commission as meeting the requirements.

**High Efficiency Motors**

This option is available with efficiency ratings from 86.5 up to 91.0. It is not available for all models.

**High Short Circuit Current Rating**

Unit shall be provided with electrical subsystem that will withstand fault currents up to 65kA (208/230, 460 VAC) or 25kA (575 VAC) compliant with UL 1995 and NEC 440.4 (B). Each compressor circuit and the indoor fan shall have dedicated overcurrent protection. Three phase motors shall be protected by Class J time delay fuses. Single phase motors shall be protected by Class CC time delay fuses. All transformers shall also be protected with Class CC time delay fuses. Contactors shall be din rail mounted.

**Hinged Access Doors**

Sheet metal hinges are available on the Filter/Evaporator Access Door and the Compressor/Control Access Door. This option is available on all downflow models.

**Horizontal Side Access with Circuit Breaker**

This option is a thermal magnetic, molded case, HACR Circuit Breaker with provisions for through the base electrical connections. The circuit breaker will be installed in a water tight enclosure in the unit with access through a swinging door. Factory wiring will be provided from the switch to the unit high voltage terminal block. The circuit breaker will provide overcurrent protection, be sized per NEC and UL guidelines, and be agency recognized by UL/CSA.

## Mechanical Specifications

---

### Horizontal Side Access with Disconnect Switch

Three-pole, molded case, disconnect switch with provisions for through the base electrical connections are available. The disconnect switch will be installed in the unit in a water tight enclosure with access through a swinging door. Factory wiring will be provided from the switch to the unit high voltage terminal block. The switch will be UL/CSA agency recognized.

**Note:** *The disconnect switch will be sized per NEC and UL guidelines but will not be used in place of unit overcurrent protection.*

### Human Interface

The Human Interface shall have a 5 inch color touchscreen display that conforms to FCC Part 15 Class B with an Ingress Protection Rating of IP24. The display text shall be readable by a person with 20/20 vision at a distance of 3 feet and 60° angle at lighting levels ranging from 100 lux - 25,000 lux. Also, the display shall operate at temperatures of -40° C to 70° C. Firmware and unit configurations shall be able to be restored via a USB storage device.

### Multi-Speed Indoor Fan System

The multiple-speed (two-speed) indoor fan control option shall automatically switch operation of the indoor fan between high speed and low speed, based on the number of compressors operating. The indoor fan shall operate at high speed whenever the gas or electric heater is operating.

### Multiple-Zone VAV Control

Multiple-zone VAV control shall vary the speed of the indoor fan to maintain the duct static pressure at a setpoint. In cooling mode, the compressors shall be cycled (or economizer modulated) to maintain the supply air temperature (SAT) at the desired setpoint. In heating mode, the indoor fan shall operate at maximum speed whenever the heater operating.

### Powered or Unpowered Convenience Outlet

This option is a GFCI, 120V/15amp, 2-plug, convenience outlet, either powered or unpowered. When the convenience outlet is powered, a service receptacle disconnect will be available. The convenience outlet is powered from the line side of the disconnect or circuit breaker, and therefore will not be affected by the position of the disconnect or circuit breaker. This option can only be ordered when the Through the Base Electrical with either the Disconnect Switch, or Circuit Breaker, option is ordered. This option is available on all downflow models (Gas/Electric only).

### Single Zone VAV

SZVAV systems combine Trane application, control and system integration knowledge to exactly match fan speed with cooling and heating loads, regardless of the operating condition.

**Note:** *Zone sensors are required for units configured for Single Zone VAV indoor fan system control in order to enable Single Zone VAV functionality.*

### Stainless Steel Drain Pan

This option provides excellent corrosion and oxidation resistance. Drain pan shall be constructed of 304 stainless steel.

### Stainless Steel Heat Exchanger

Gas heat exchanger shall be of drum and tube design constructed from a minimum 304 Grade stainless steel. The stainless steel heat exchanger shall have a 10-year warranty as standard (Gas/Electric only).

### Supply, Return and Plenum Air Smoke Detector

With this option installed, if smoke is detected, all unit operation will be shut down. Reset will be manual at the unit. Return Air Smoke Detectors require minimum allowable airflow when used with certain models. See the Installation, Operation, and Maintenance (IOM) manual for the models

affected and the minimum allowable airflow required. This option is available on all downflow models. Supply and/or Return Detectors may not be used with the Plenum Smoke Detector.

### **Through the Base Electrical with Circuit Breaker**

This option is a thermal magnetic, molded case, HACR Circuit Breaker with provisions for through the base electrical connections. The circuit breaker will be installed in a water tight enclosure in the unit with access through a swinging door. Factory wiring will be provided from the switch to the unit high voltage terminal block. The circuit breaker will provide overcurrent protection, be sized per NEC and UL guidelines, and be agency recognized by UL/CSA.

### **Through the Base Electrical with Disconnect Switch**

Three-pole, molded case, disconnect switch with provisions for through the base electrical connections are available. The disconnect switch will be installed in the unit in a water tight enclosure with access through a swinging door. Factory wiring will be provided from the switch to the unit high voltage terminal block. The switch will be UL/CSA agency recognized.

**Note:** *The disconnect switch will be sized per NEC and UL guidelines but will not be used in place of unit overcurrent protection.*

### **Through the Base Utilities Access**

An electrical service entrance shall be provided allowing electrical access for both control and main power connections inside the curb and through the base of the unit. Option will allow for field installation of liquid-tight conduit and an external field installed disconnect switch.

### **Two-Inch Pleated Filters**

Two-inch MERV 8 and MERV 13 media filters with filter removal tool shall be available on all models.

### **VAV Operation**

The VFD shall receive a 0-10 Vdc signal from the unit control based upon supply static pressure, and shall cause the drive to accelerate or decelerate as required to maintain the supply static pressure setpoint. When subjected to high ambient return conditions the VFD shall reduce its output frequency to maintain operation.

## **Factory or Field Installed Options**

### **BACnet™ Communications Interface**

This option shall be provided to allow the unit to communicate directly with a generic open protocol BACnet MS/TP Network Building Automation System Controls.

### **Barometric Relief**

Designed to be used on downflow units, barometric relief is an unpowered means of relieving excess building pressure.

### **Clogged Filter/Fan Failure Switch**

A dedicated differential pressure switch is available to achieve active fan failure indication and/or clogged filter indication. These indications will be registered with either a zone sensor with status indication lights or an Integrated Comfort™ System.

### **Differential Pressure Switches**

These options allow for individual fan failure and dirty filter indication. The fan failure switch will disable all unit functions and “flash” the Service LED on the zone sensor. The dirty filter switch will light the Service LED on the zone sensor and will allow continued unit operation.

## Mechanical Specifications

---

### **Discharge Air Temperature Sensing Kit**

This kit provides true discharge air temperature sensing in heating models. This sensor is a status indicator readable through Tracer™ or Tracker™. The kit is functional only with the ReliaTel Options Module.

### **Economizer— Standard, Downflow**

The assembly includes fully modulating 0–100% motor and dampers, barometric relief, minimum position setting, preset linkage, wiring harness with plug, fixed dry bulb and spring return actuator. The barometric relief damper shall be standard with the downflow economizer and shall provide a pressure operated damper that shall be gravity closing and shall prohibit entrance of outside air during the equipment “off” cycle. Solid state enthalpy and differential enthalpy control shall be field-installed.

### **Economizer - Low Leak, Downflow**

This accessory meets low leak requirements for ASHRAE 90.1, IECC, and CA Title 24 standards (3 cfm/ft<sup>2</sup>@1" wg exterior air, 4 cfm/ft<sup>2</sup>@1" wg return air). This option allows 100% outdoor air supply from 0-100% modulating dampers and is standard with barometric relief. It can be paired with powered exhaust for additional building pressure relief. This option can be paired with or without Fault Detection & Diagnostics (FDD) to meet current mandatory CA Title 24 requirements. Available on downflow units only. The economizers come with three control options, dry bulb and reference or comparative enthalpy (optional).

### **Electric Heaters**

Electric heat modules shall be available for installation within the basic unit. Electric heater elements shall be constructed of heavy-duty nickel chromium elements internally delta connected for 240 volt, wye connected for 480 and 600 volt. Staging shall be achieved through ReliaTel. Each heater package shall have automatically reset high limit control operating through heating element contactors. All heaters shall be individually fused from the factory, where required, and shall meet all NEC and CEC requirements when properly installed. Power assemblies shall provide single-point connection. Electric heat modules shall be UL listed or CSA certified. If ordering the Through the Base Electrical option with an Electric Heater, the heater must be factory installed.

### **Indoor Fan Motor Shaft Grounding Ring**

Shaft grounding rings are used on all VFD driven motors to provide a conductive discharge path away from the motor bearings to ground. Bearing Protection Ring shall be maintenance free circumferential ring of conductive micro fibers that discharges voltages to ground.

### **LonTalk® Communications Interface**

The LonTalk communications interface, when installed in a Voyager unit, allows the unit to communicate as a Tracer™ LCI-V device or directly with generic LonTalk Network Building Automation System Controls.

### **Oversized Motors**

Oversized motors shall be available for high static applications.

### **Reference or Comparative Enthalpy**

Reference Enthalpy is used to measure and communicate outdoor humidity. The unit receives and uses this information to provide improved comfort cooling while using the economizer. Comparative Enthalpy measures and communicates humidity for both outdoor and return air conditions, and return air temperature. The unit receives and uses this information to maximize use of economizer cooling, and to provide maximum occupant comfort control. Reference or Comparative Enthalpy option shall be available when a factory or field installed Downflow Economizer is ordered. This option is available on all downflow models.

**Tool-less Hail Guards**

Tool-less, hail protection quality coil guards are available for condenser coil protection.

**Trane Communication Interface**

This factory or field-installed option shall be provided to interface ReliaTel™ controlled units with the Trane Integrated Comfort™ systems.

**Field Installed Options****CO<sub>2</sub> Sensor**

The CO<sub>2</sub> sensor shall have the ability to monitor the concentration (parts per million, ppm) of CO<sub>2</sub> (Carbon Dioxide) in the air. As the CO<sub>2</sub> concentration changes, the outside air damper modulates to meet the current ventilation needs of the zone.

**Note:** *Two field installed kits are offered: CO<sub>2</sub> sensor and wiring or CO<sub>2</sub> sensor only. The CO<sub>2</sub> sensor only kit should be ordered with factory installed CO<sub>2</sub> sensor wiring. Factory installed CO<sub>2</sub> sensor wiring saves set-up time and ensures proper unit connections for the CO<sub>2</sub> sensor.*

**Economizer — Standard, Horizontal**

The horizontal economizer shall contain the same features as the downflow economizer with the exception of barometric relief.

**Economizer - Low Leak, Downflow**

This accessory meets low leak requirements for ASHRAE 90.1, IECC, and CA Title 24 standards (3 cfm/ft<sup>2</sup>@1" wg exterior air, 4 cfm/ft<sup>2</sup>@1" wg return air). This option allows 100% outdoor air supply from 0-100% modulating dampers and is standard with barometric relief. It can be paired with powered exhaust for additional building pressure relief. Available on downflow units only.

**High Static Drive**

The high static drive option shall allow the standard motor on the 12½, 15, 17½, and 20 ton units to operate with improved external static capabilities.

**Humidity Sensor**

Field installed, wall-mounted or duct-mounted humidity sensor is used to control activation of the hot gas reheat dehumidification option. The humidity sensor can be set for humidity levels between 40% and 60% relative humidity by adjusting the ReliaTel Options Module.

**Manual Outside Air Damper**

The rain hood and screen shall provide up to 25% outside air.

**Motorized Outside Air Dampers**

Manually set outdoor air dampers shall provide up to 50% outside air. Once set, outdoor air dampers shall open to set position when indoor fan starts. The damper shall close to the full closed position when indoor fan shuts down.

**Powered Exhaust**

The powered exhaust shall provide exhaust of return air, when using an economizer, to maintain better building pressurization.

**Roof Curb—Downflow**

The roof curb shall be designed to mate with the downflow unit and provide support and a water tight installation when installed properly. The roof curb design shall allow field-fabricated rectangular supply/return ductwork to be connected directly to the curb. Curb shall be shipped knocked down for field assembly and shall include wood nailer strips.



## Mechanical Specifications

---

### Remote Potentiometer

The minimum position setting of the economizer shall be adjusted with this accessory.

### Ventilation Override Accessory

With the Ventilation Override Accessory installed, the unit can be set to transition up to three different pre-programmed sequences for Smoke Purge, Pressurization, and Exhaust. The transition occurs when a binary input on the RTOM is closed (shorted). This would typically be a hard wired relay output from a smoke detector or fire control panel.

### Wireless Zone Sensor

LCD display that provides heat, cool, auto, or off. Includes two temperature setpoints and a lockable setting with °F or °C indicators.

### Zone Sensors

This option shall be provided to interface with ReliaTel and shall be available in either manual, automatic, programmable with night setback, with system malfunction lights or remote sensor options.

**Note:** *Zone sensors are required for units configured for Single Zone VAV indoor fan system control in order to enable Single Zone VAV functionality.*





Trane optimizes the performance of homes and buildings around the world. A business of Ingersoll Rand, the leader in creating and sustaining safe, comfortable and energy efficient environments, Trane offers a broad portfolio of advanced controls and HVAC systems, comprehensive building services, and parts. For more information, visit [www.Trane.com](http://www.Trane.com).

Trane has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.