

PocketPass[™]

Installation Instructions

16-0042-001 Rev A2

Trusted Transportation Solutions

PocketPass is designed for mounting to a vehicle's interior windshield surface using 3M[™] Dual Lock[™] strips. This mounting method provide for easy mounting and removal when portability is needed.

General Installation Information

Metallized Windshields

Some vehicle windshields contain a metallic treatment that could prevent an interior windshield-mounted device from working correctly. If you have a vehicle with a metalized windshield, contact your local customer service center for more information. If your vehicle's metalized windshield has a metal-free zone, it is typically located near the rearview mirror.

Required Supplies

- PocketPass
- Commercial glass cleaner and paper towels


PocketPass Installation and Removal Procedures

Installing the PocketPass with Dual Lock Strips

1. Choose the location for your PocketPass (Figure 1). It should be mounted as close to the bottom center of the windshield as possible; at least 3 inches away from the windshield frame or dashboard, and not behind the windshield wipers.



- 2. Clean and dry the interior windshield surface completely before affixing the Dual Lock strips. The windshield temperature must be at least 68°F (20°C) for optimum bonding.
- 3. Peel the backing off the Dual Lock strips (Figure 2). Leave both sides of the Dual Lock strips pressed together to ensure the strips will align between the tag and windshield. Apply the PocketPass to the windshield using moderate pressure.

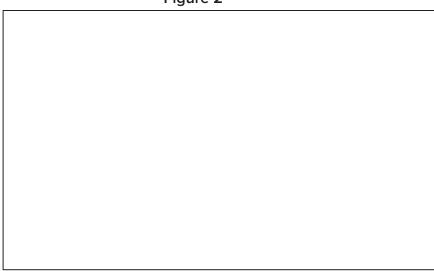



Note: When installing the PocketPass using Dual Lock strips for the first time, leave it in place for at least 24 hours to allow the adhesive to cure.

4. To remove a PocketPass mounted with Dual Lock strips from the windshield, grip the case at the top and bottom sides. Gently lift the PocketPass away from the windshield on one end until the tag is free from the windshield.

User Replaceable Batteries

Two AAA batteries are pre-installed in your PocketPass. TransCore recommends Energizer® Advanced Lithium AAA batteries for use in the PocketPass.

To replace the batteries, remove the tag from the windshield as described in **Step 4 on page 2**.

1. Hold the tag with the LED side facing down. Locate the battery door. Press the indentation located under the arrow and slide the door in the direction of the arrow to open the door.



2. Remove the old batteries and replace them with AAA batteries according to the diagram on the inside of the battery compartment.

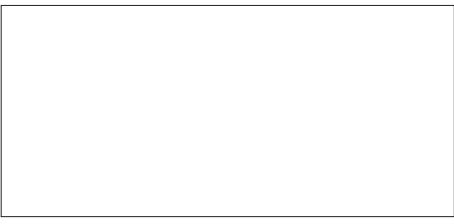


Figure 4 –

- 3. Close the cover and slide it back into place. You should hear a soft snap when the cover is in the correct position.
- 4. You will see a brief audio/visual sequence display as the tag powers up. If there is an ASTM V6 AV code stored, the sequence will take up to 15 minutes to complete.
- 5. Reinstall the tag on the windshield.

NO UNAUTHORIZED MODIFICATIONS STATEMENT

Caution: This equipment may not be modified, altered, or changed in any way without permission from TransCore, LP. Unauthorized modification may void the equipment authorization from the FCC and will void the TransCore warranty.

RADIO FREQUENCY INTERFERENCE STATEMENTS

Note: This device complies with Part 15 of the FCC Rules and the Industry Canada Licence-Exempt RSS Standards. Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of this device.

Note: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur del'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.



For more information:

Sales Support 800.923.4824

Technical Support 505.856.8007

transcore.com



© 2015 TransCore L.P. All rights reserved. TRANSCORE and TRANSSUITE are registered trademarks, and are used under license. All other trademarks listed are the property of their respective owners. Contents subject to change. Printed in the U.S.A.

