



FCC and Industry Canada Certification Test Report
For the
SkyBitz, Inc.

MTXM L-Band Mobile Terminal

FCC ID: SAE-000MTXM

IC ID: 5375A-000MTXM

WLL REPORT# 11125-01 Rev 3

November 11, 2009

Re-issued November 12, 2009

Re-issued November 17, 2009

Re-issued December 3, 2009

Prepared for:

SkyBitz, Inc.

22455 Davis Drive Suite 100

Sterling, Virginia 20164

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879



Testing Certificate 2675.01

FCC and Industry Canada Certification Test Report

For the

SkyBitz, Inc.

MTXM L-Band Mobile Terminal

FCC ID: SAE-000MTXM

IC ID: 5375A-000MTXM

WLL REPORT# 11125-01 Rev 3


November 11, 2009

Re-issued November 12, 2009

Re-issued November 17, 2009

Re-issued December 3, 2009

Prepared by:



John P. Repella
Compliance Engineer

Reviewed by:



Steve Koster
EMC Operations Manager

Abstract

This report has been prepared on behalf of SkyBitz, Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a Satellite Terminal under Part 25 of the FCC Rules and Regulations and under the Regulations and Spectrum Management and Telecommunications Policy RSS-170 of Industry Canada. This Certification Test Report documents the test configuration and test results for a SkyBitz, Inc. MTXM L-Band Mobile Terminal.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by the American Association for Laboratory Accreditation (A2LA) under Certificate 2675.01 as an independent FCC test laboratory.

The SkyBitz, Inc. MTXM L-Band Mobile Terminal complies with the technical requirements under FCC Part 25 and Industry Canada RSS-170.

Revision History	Reason	Date
Rev 0	Initial Release	November 11, 2009
Rev 1	Correct customer address and emissions type	November 12, 2009
Rev 2	RX and TX Frequency Ranges added to the Device Summary Table 1	November 17, 2009
Rev 3	Address ATCB Comments to add Necessary BW and V I of final amp	December 3, 2009

Table of Contents

Abstract.....	ii
1 Introduction.....	1
1.1 Compliance Statement	1
1.2 Test Scope.....	1
1.3 Contract Information.....	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
1.6 Abbreviations.....	2
2 Equipment Under Test.....	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	3
2.3 Testing Algorithm.....	4
2.4 Test Location	5
2.5 Measurements	5
2.6 Measurement Uncertainty.....	5
3 Test Equipment.....	6
4 Test Results.....	7
4.1 RF Power Output (FCC 25.204, RSS-170 Section 6.2).....	7
4.2 Occupied Bandwidth.....	9
4.3 Emission Limitations per FCC Part 25.202(f); RSS-170 Section 6.3 (Emission Masks)	13
4.4 Radiated Spurious Emissions: EIRP Data (FCC §25.202(f) and RSS-170, Annex B3)	20
4.5 Receiver Spurious Emissions, RSS-170 Section 9.0	23
4.6 Spurious Emissions per FCC §25.216	24
4.7 Frequency Stability: (FCC Part §2.1055)	39

List of Tables

Table 1: Device Summary	3
Table 2: Test Equipment List.....	6
Table 3: RF Power Output	8
Table 4: Occupied Bandwidth Results.....	9
Table 5: Table B1 of RSS-170.....	13
Table 6: Radiated Emissions.....	21
Table 7: Frequency Stability Test Data	40

List of Figures

Figure 1: Test Setup Diagram	4
Figure 2: Occupied Bandwidth, Low Channel, TX @ 1626.505MHz	10
Figure 3: Occupied Bandwidth, Mid Channel, TX @ 1643.5MHz	11
Figure 4: Occupied Bandwidth, High Channel, TX @ 1660.495MHz	12
Figure 5: FCC Part 25.202(f) Emissions Mask, Vertical Polarity	15
Figure 6: FCC Part 25.202(f) Emissions Mask, Horizontal Polarity	16
Figure 7: Out-of-Band Emissions to Table B1	17
Figure 8: Spectrum Plot, Low Channel @ +/-250% of BW	18
Figure 9: Spectrum Plot, High Channel @ +/-250% of BW	19
Figure 10: GPS Band Emissions Low Channel, 1559 – 1605MHz Vertical Antenna Polarity	26
Figure 11: GPS Band Emissions Low Channel, 1605 – 1610MHz Vertical Antenna Polarity	27
Figure 12: GPS Band Emissions Low Channel, 1559 – 1605MHz Horizontal Antenna Polarity	28
Figure 13: GPS Band Emissions Low Channel, 1605 – 1610MHz Horizontal Antenna Polarity	29
Figure 14: GPS Band Emissions Middle Channel, 1559 – 1605MHz, Vertical Antenna Polarity	30
Figure 15: GPS Band Emissions Middle Channel, 1605 – 1610MHz, Vertical Antenna Polarity	31
Figure 16: GPS Band Emissions Middle Channel, 1559 – 1605MHz, Horizontal Antenna Polarity	32
Figure 17: GPS Band Emissions Middle Channel, 1605 – 1610MHz, Horizontal Antenna Polarity	33
Figure 18: GPS Band Emission, Carrier Off, Mid Channel, 1559 – 1610MHz	34
Figure 19: GPS Band Emissions High Channel, 1559 – 1605MHz Vertical Antenna Polarity	35
Figure 20: GPS Band Emissions High Channel, 1605 – 1610MHz Vertical Antenna Polarity	36
Figure 21: GPS Band Emissions High Channel, 1559 – 1605MHz Horizontal Antenna Polarity	37
Figure 22: GPS Band Emissions High Channel, 1605 – 1610MHz Horizontal Antenna Polarity	38

1 Introduction

1.1 Compliance Statement

The SkyBitz, Inc. MTXM L-Band Mobile Satellite Terminal complies with the limits for a Mobile Earth Station under FCC Part 25 and Industry Canada RSS-170.

1.2 Test Scope

Tests for radiated and conducted emissions were performed. All measurements were performed according to the 2003 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer:	SkyBitz, Inc. 22455 Davis Drive Suite 100 Sterling, Virginia 20164
Purchase Order Number:	0004510
Quotation Number:	65038

1.4 Test Dates

Testing was performed on the following date(s):	9/13/2009 through 9/25/2009
---	-----------------------------

1.5 Test and Support Personnel

Washington Laboratories, LTD	John P. Repella
Client Representative	Dana Johnson

1.6 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	BandWidth
CE	Conducted Emission
cm	Centimeter
CW	Continuous Wave
dB	Decibel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10⁹ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10³ multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10⁶ multiplier
m	Meter
μ	micro - prefix for 10⁻⁶ multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The SkyBitz, Inc. MTXM L-Band Mobile Terminal transmits and receives messages through the SkyBitz network. Its integrated design includes a software-based radio, antennas, and lithium battery pack in one package.

Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	SkyBitz, Inc.
FCC ID Number	SAE-000MTXM
IC ID Number	5375A-000MTXM
EUT Name:	Mobile Terminal
Model:	MTXM
FCC Rule Parts:	§25
IC Rule Parts	RSS-170 Annex B
Frequency Range:	TX: 1626.5-1660.5MHz RX: 1525-1559MHz & 1575.42MHz 1626.5-1660.5MHz(authorized)
Maximum Output Power:	1.3 watts EIRP
Modulation:	MSK
Necessary Bandwidth	4.248 kHz
Occupied Bandwidth (20dB):	4.3569kHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	Variable- determined by satellite provider
Antenna Type	Integral
Frequency Tolerance:	0.001% (FCC), +/-320 Hz (IC)
Emission Type(s):	G1D
Emissions Designator	4K36G1D
Interface Cables:	RS485 Interface
Power Source & Voltage:	6Vdc from batteries
Final RF Amp Voltage	4.9 VDC
Final RF Amp Current	275 mA

2.2 Test Configuration

The EUT was configured with a support laptop and an RS485 adapter. The laptop used SkyBitz software, SkyPort, to configure the system for continuous transmit. A separate DC power supply was used to provide a constant 6Vdc to the EUT so as not to drain the batteries.

The EUT firmware/software was set up to simulate normal transmission to a satellite

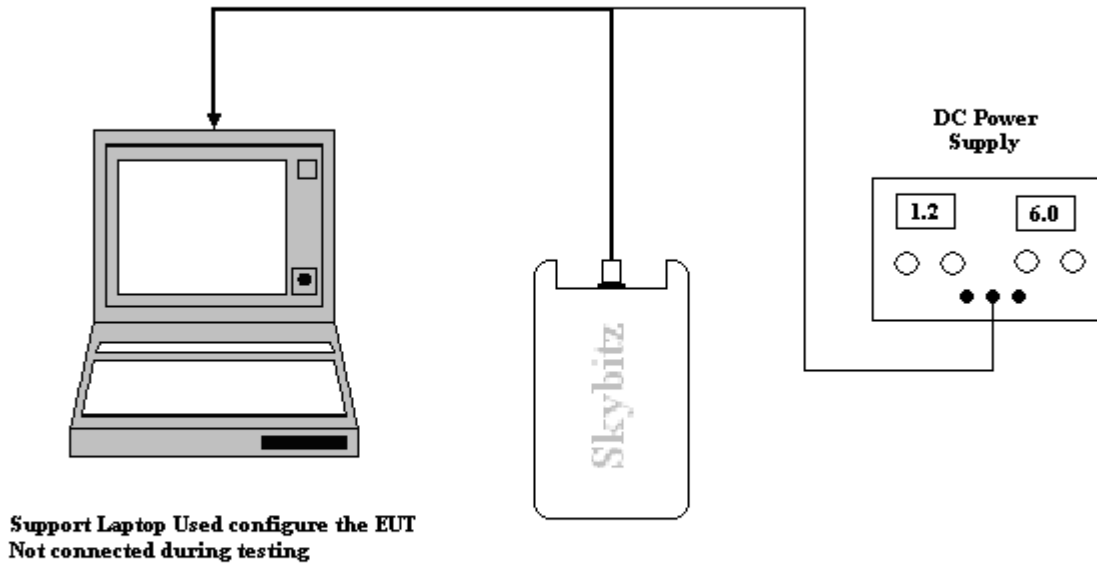


Figure 1: Test Setup Diagram

2.3 Testing Algorithm

The MTXF L-Band Mobile Terminal was configured by SkyBitz software on the support laptop to continually transmit on the following channels:

- ◆ Low channel: 1626.505 MHz –limited testing (Power, Bandwidth and Emission Masks)
- ◆ Center channel: 1643.5 MHz- full testing
- ◆ High channel: 1660.495 MHz- limited testing (Power, Bandwidth and Emission Masks)

Worst case emission levels are provided in the test results data.

2.4 Test Location

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879.

Testing that was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by the American Association for Laboratory Accreditation (A2LA) under Certificate 2675.01 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS170 Issue 1, Rev. 1 Satellite Mobile Earth Stations

47 CFR Part 25

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is ± 2.3 dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

Where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty = $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$ dB.

3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

Table 2: Test Equipment List

Test Name: Radiated Emissions		Test Date: 09/24/2009	
Asset #	Manufacturer/Model	Description	Cal. Due
68	HP, 85650A	Adapter, QP	07/10/2010
72	HP, 8568B	Analyzer, Spectrum	07/10/2010
70	HP, 85685A	Preselector, RF w/opt 8ZE	07/10/2010
382	Sunol, JB1	Antenna, Biconlog	01/27/2010
626	ARA, DRG-118/A	Antenna, Horn	06/03/2011
667	MegaPhase, LLC EM18-SINK5-600	Test cable for OATS testing DC to 18 GHz SMA male	04/23/2010
528	Agilent, E4446A	Analyzer, Spectrum	09/04/2010
66	HP, 8449B	Pre-Amplifier, RF. 1-26.5GHz	07/21/2010
640	MegaPhase, TM40-K1K5-36	1G-40GHz Right angle	09/29/2009
428	EMCO, 3109	Antenna, Bicon	3/6/2010
556	EMCO, 3146A	Antenna, Log Periodic	8/15/2010
1	A.H., Systems, SAS-200/518	Antenna, LP, 1-18GHz	04/29/2010
4	ARA, DRG-118/A	Antenna, DRG, 1-18GHz	02/06/2011
520	Megaphase, LLC TM40-K1K1-36	Cable, Coaxial - 36" Long - 40GHz 2.9mm	09/29/2009
628	Megaphase - F230-S1S1-226	DC- 18GHz SMA 246cm	07/15/2009
629	Megaphase - F230-S1S1-226	DC- 18GHz SMA 246cm	06/11/2010

4 Test Results

4.1 RF Power Output (FCC 25.204, RSS-170 Section 6.2)

FCC 25.204 specifies the limits for Satellite Earth Stations.

In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits:

+40 dBW in any 4 KHz band for $\theta: 0^\circ$

+40+3 θ dBW in any 4 KHz band for $\theta < 0^\circ \leq 05^\circ$

Where, θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

IC RSS-170 Section 6.2 and Annex B specify the following requirements:

The output power shall be measured when the transmitter is operating at the manufacturer's rated power and modulated with signals representative (i.e. typical) of those encountered in a real system operation. This measurement shall be carried out before the other tests.

If the power is in bursts, the power shall be averaged over any 100 millisecond interval, or over the burst interval if the burst is shorter than 100 milliseconds, during which its value is at its maximum.

Record the output power.

4.1.1 Power measurement test procedure – Signal Substitution Method

No direct connection to the antenna is available for making the power measurement as the antenna is integrated with the unit.

To measure the EIRP the EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components of the EUT were measured.

The received level of the detected emission was recorded in the data sheet. The EUT is then replaced with a transmit antenna and signal generator. Output power of the signal generator was increased until the same received level was indicated on the spectrum analyzer for the emission under investigation. Radiated power of the emission was then determined by adding the forward power supplied to the substitution antenna with the gain of the substitution antenna and comparing the result to the limit.

As specified above, the limit is +40 dBW in any 4 kHz band. The analyzer used for testing was limited to a 3 kHz measurement bandwidth. To adjust to the 4 kHz specification a BW correction of +1.25 dB was added to the final reading. The following calculations were used for determining the EIRP level:

$$P_{out} \text{ (dBW)} = SL \text{ (dBm)} + G \text{ (dBi)} + -30\text{(dB)}$$

- Where:
- SL is the substitution level in dBm
 - G is the substitution antenna gain in dBi
 - 30dB is the conversion factor for dBm to dBW

Table 3: RF Power Output

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Height (m)	Spurious Level (dBm)	Sub. Sig. Gen. Level (dBm)	Sub. Power Level (dBm)	Sub. Ant. Factor (dB/m)	Sub. Ant. Gain dBi	EIRP Level dBW/4kHz	Limit (dBW/4kHz)	Margin (dB)
1626.505	V	0.0	1.0	98.0	27.1	25.4	28.8	5.7	2.3	40.0	-37.7
1643.50	V	0.0	1.0	98.6	24.6	23.0	28.9	5.7	-0.1	40.0	-40.1
1660.495	V	0.0	1.0	98.7	21.5	19.6	29.0	5.7	-3.5	40.0	-43.5
1626.505	H	345.0	1.0	96.2	26.2	24.5	28.8	5.7	1.4	40.0	-38.6
1643.500	H	345.0	1.0	96.4	22.6	20.9	28.9	5.7	-2.2	40.0	-42.2
1660.495	H	345.0	1.0	96.9	22.5	20.6	29.0	5.7	-2.5	40.0	-42.5

4.2 Occupied Bandwidth

The occupied bandwidth of the MTXF Mobile Terminal was measured. This measurement was performed by coupling the output of the EUT via an antenna to the input of a spectrum analyzer. The 20dB occupied bandwidth was measured for the Low, High and Middle channels and the test results are listed in the following table. Figure 2 thru Figure 4 show plots of the occupied bandwidth.

Table 4: Occupied Bandwidth Results

Frequency (MHz)	Occupied Bandwidth (kHz)	Standard Reference
Low Channel: 1626.505	4.3182 kHz	RSS-170
Middle Channel: 1643.5	4.2723 kHz	FCC Part 25
High Channel: 1660.5	4.3569 kHz	RSS-170

The necessary BW for a 2-ary MSK (Minimum Shift Keying) signal is calculated as follows:

Number of states = 2

Bit Rate R = 3.6 kbps

Factor K' = 1.18 for a 2-ary MSK signal {NOTE: $K' = (1/\text{Log}_2(\text{number of States}) + 0.18) = (1/(\text{Ln}(2)/\text{Ln}(2) + 0.18) = 1 + 0.18 = 1.18$ } {also note that this is for unfiltered MSK, where any filtering is sufficiently wide that it has no or little effect on the occupied BW}.

Necessary BW $B_n = R \times K'$ for an MSK signal

$B_n = 3.6 \text{ kbps} \times 1.18 = 4.248 \text{ kHz}$

MSK is considered phase modulation (“G”), we utilize a single channel (“1”), and we transmit data (“D”). This is consistent with Part 2.201 Subpart C-Emissions.

Therefore the emission designator based on FCC part 2.202 is something like 4K25G1D. The actual emission designator is based on the -26 dB or 99% occupied BW measurement.

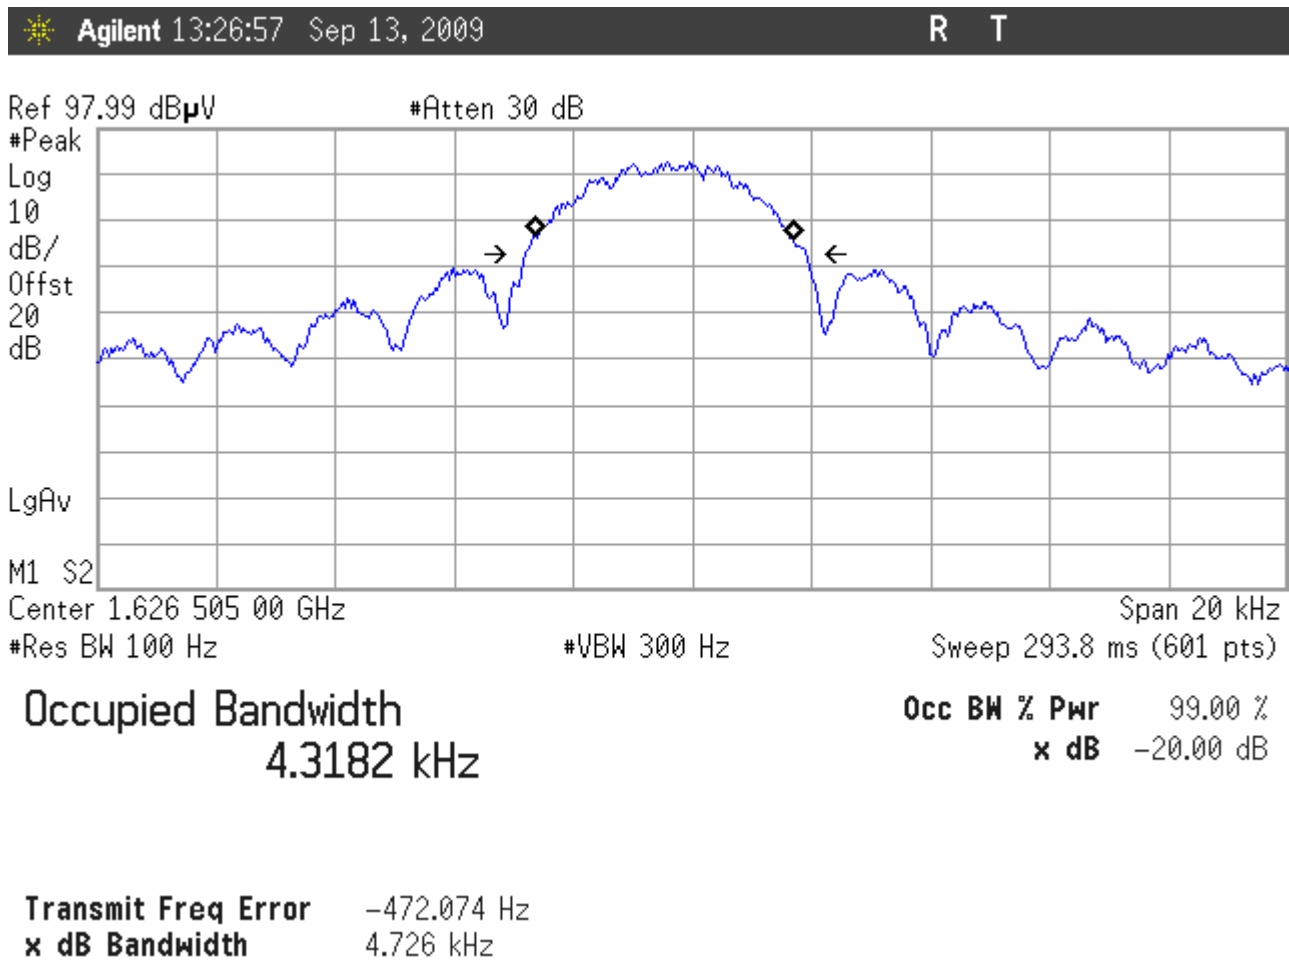


Figure 2: Occupied Bandwidth, Low Channel, TX @ 1626.505MHz


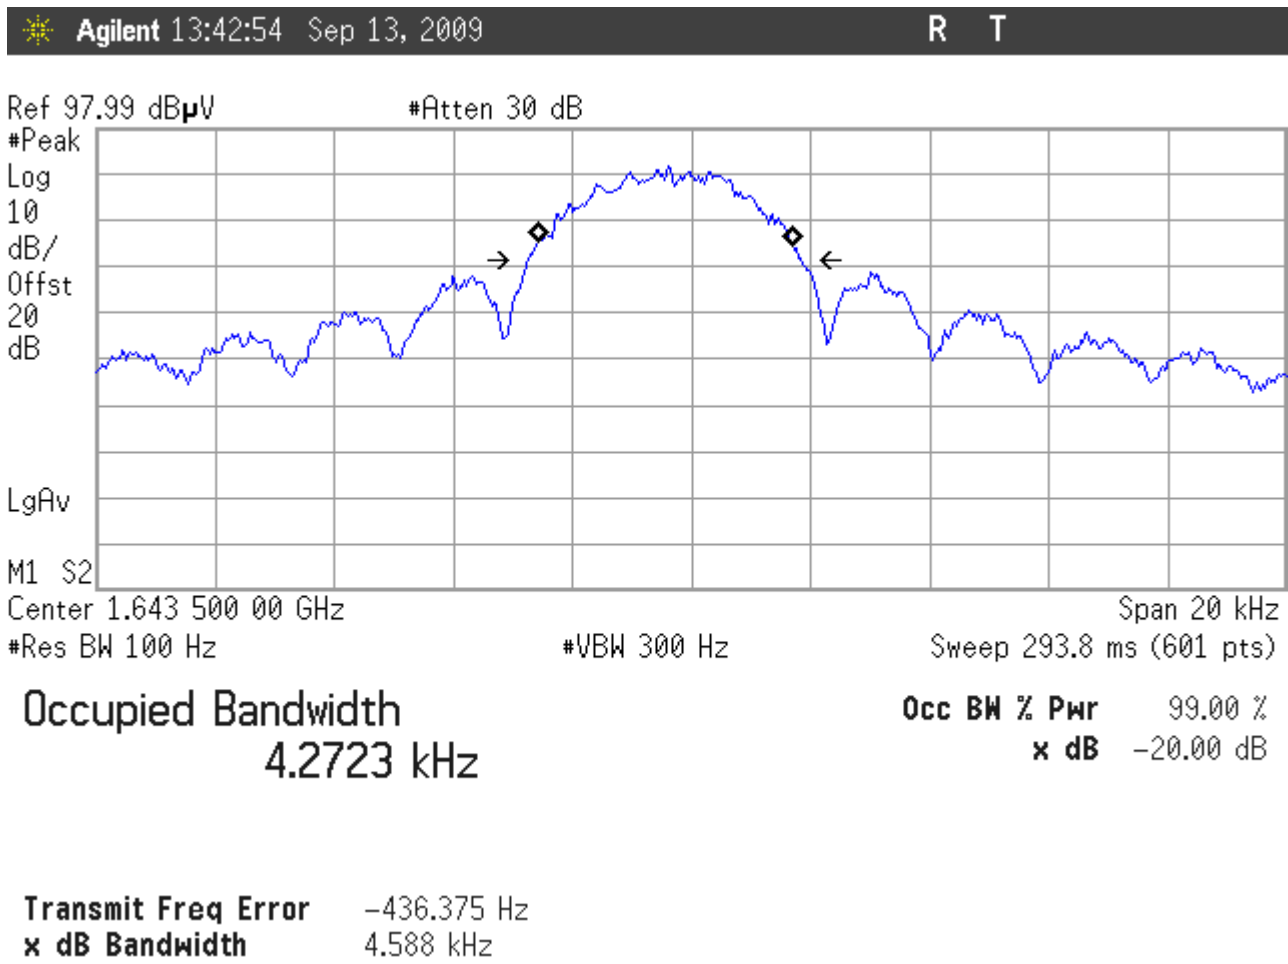


Figure 3: Occupied Bandwidth, Mid Channel, TX @ 1643.5MHz

Agilent 14:04:02 Sep 15, 2009 R T

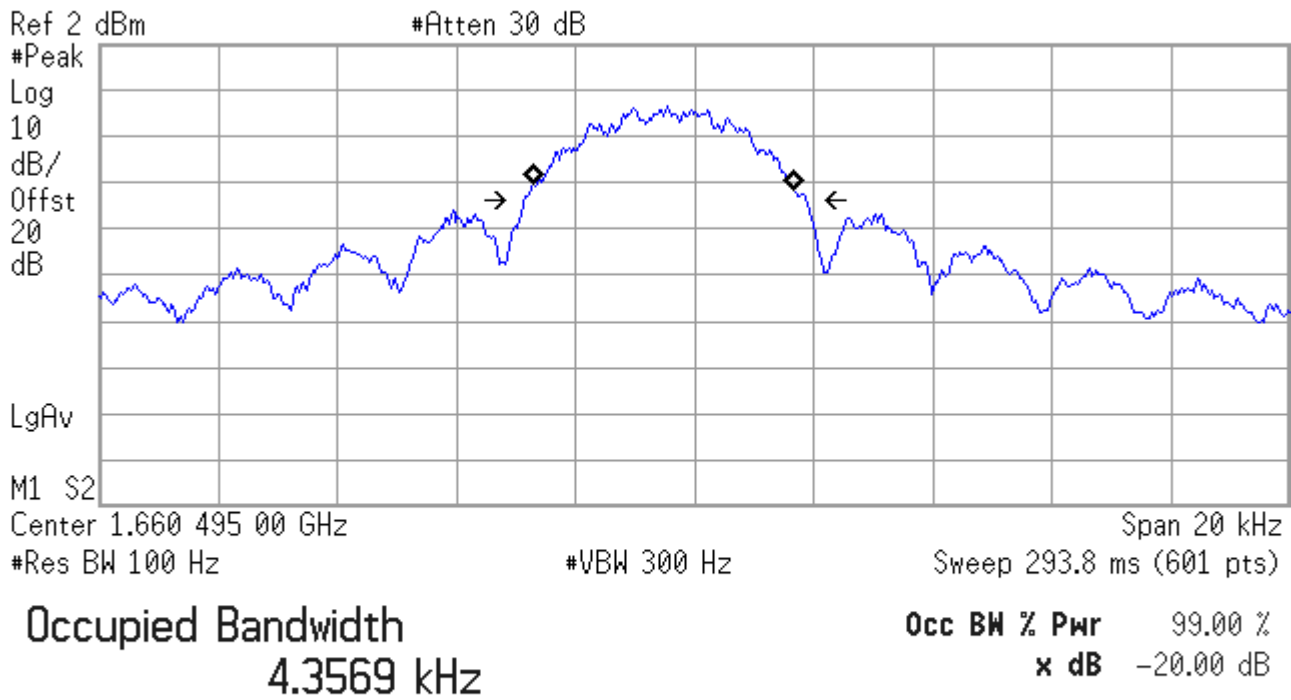

Transmit Freq Error -510.787 Hz
x dB Bandwidth 4.725 kHz

Figure 4: Occupied Bandwidth, High Channel, TX @ 1660.495MHz

4.3 Emission Limitations per FCC Part 25.202(f); RSS-170 Section 6.3 (Emission Masks)

Radiated spurious emissions must comply with the requirements of §25.202 (f) of FCC and Table B1 column (a) of RSS-170. The limits for the spurious emissions for RSS-170 and FCC Part 25 are as follows:

FCC Part 25.202(f):

Radiated spurious emissions must comply with the requirements of §25.202(f). The limits for the spurious emissions are as follows:

The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;
- (2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: 35 dB;
- (3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts.

RSS-170(B2):

The attenuation of the spectrum shall be in accordance with the schedule of column (a), or alternatively of column (b) of Table B1, whichever is less stringent.

Table 5: Table B1 of RSS-170

Frequency Offset Normalized to SR (symbol rate)	(a) Minimum attenuation relative to in-band spectral density, (dB)	(b) Minimum attenuation relative to transmitter output power (dB), in any 4 kHz
+0.75 SR	0	0
+1.40 SR	20	30
+2.80 SR	40	50
+4.00 SR	55 or (37 + 10 Log ₁₀ TP) whichever is less stringent	65 or (47 + 10 Log ₁₀ TP) whichever is less stringent

4.3.1 Test Procedure

For the FCC Part 25 requirements the unit was set to transmit at 1643MHz and the emissions were scanned to +/-250% of the authorized bandwidth and compared to the emission mask specified in FCC Part 25.202(f). The authorized bandwidth used in the calculations for the limit was 7 kHz.

For complying with the RSS-170 emission mask, the unit was first set to transmit at the lowest authorized frequency of 1626.505MHz. The emission mask of Table B1 column "a" was then entered into the spreadsheet based on a baud rate of 3600. Discrete measurements of the channel power in a 4 kHz bandwidth were then measured and plotted against the limit curve. The unit was then set to the highest authorized frequency of 1660.495MHz and the test was repeated.

Spectrum plots of the emissions as measured with a 100Hz RBW were also obtained at the low and high channel settings.

4.3.2 Test Results

The EUT complies with the emissions mask requirements of FCC Part 25.202(f) and RSS-170 Annex B. Figure 5 and Figure 6 contain the plots of the emissions mask for FCC Part 25.202(f). Figure 7, Figure 8 and Figure 9 contain the plots of the emissions mask per RSS-170.

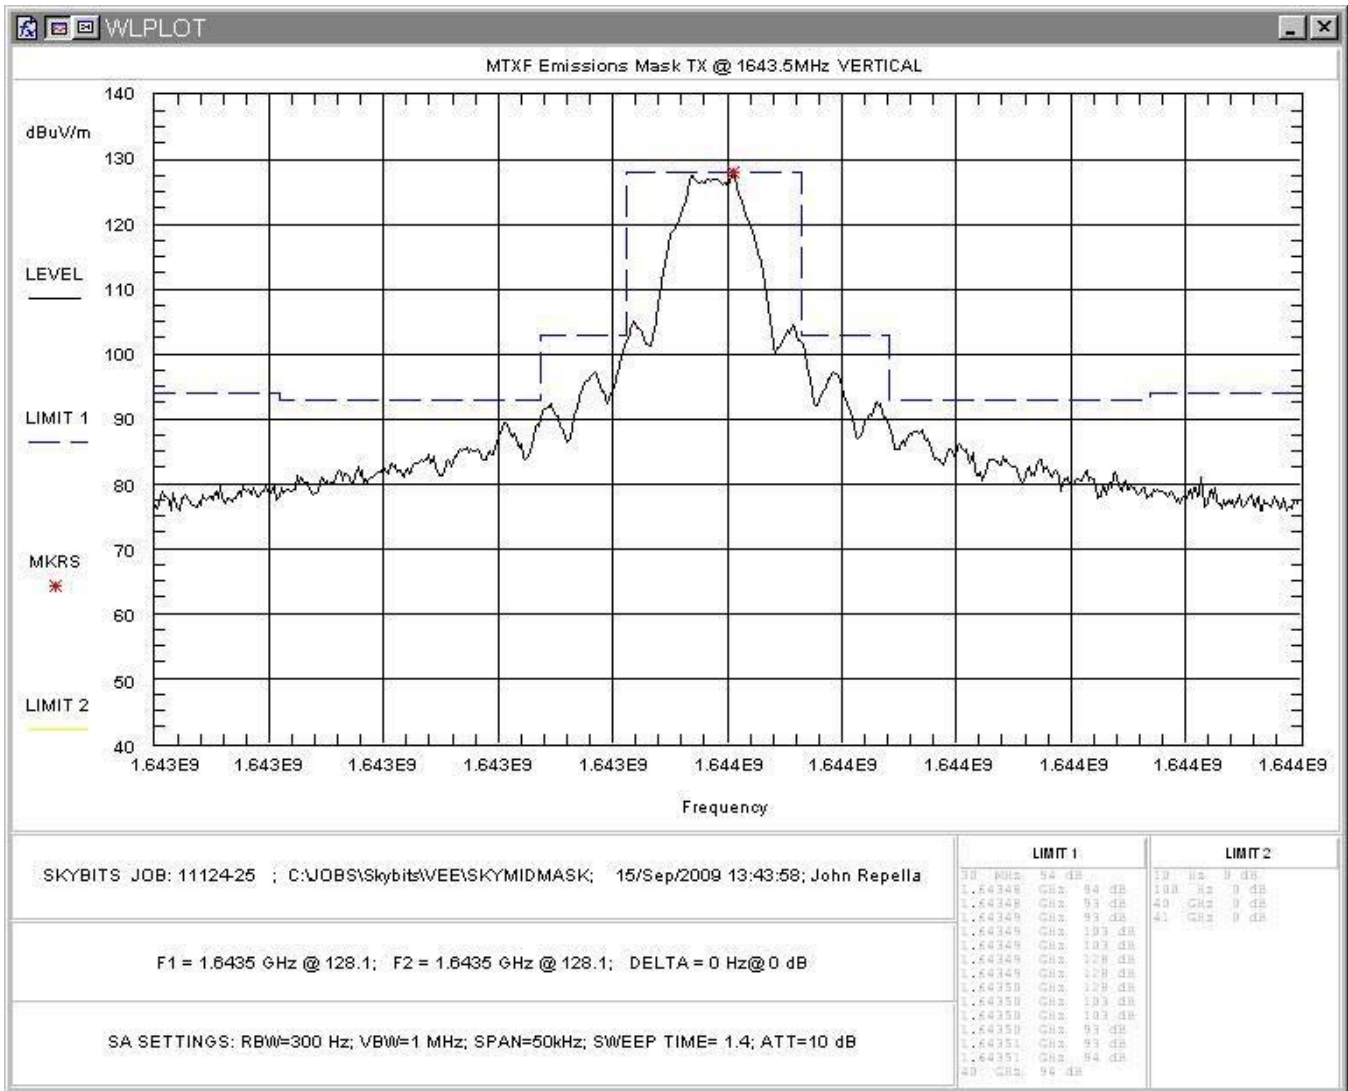


Figure 5: FCC Part 25.202(f) Emissions Mask, Vertical Polarity

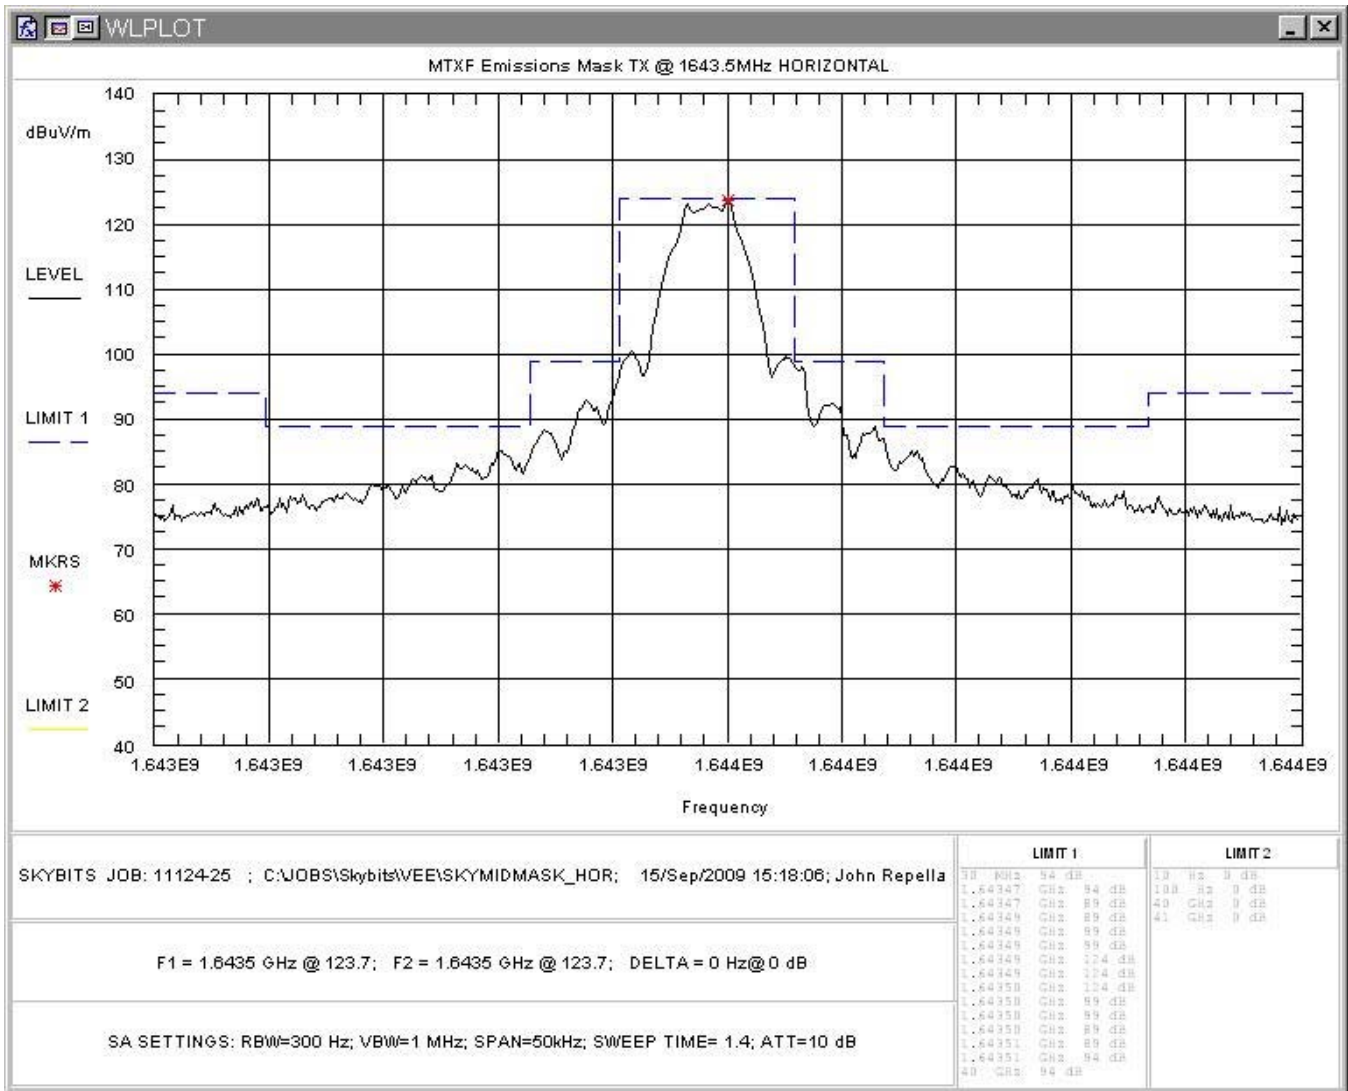


Figure 6: FCC Part 25.202(f) Emissions Mask, Horizontal Polarity

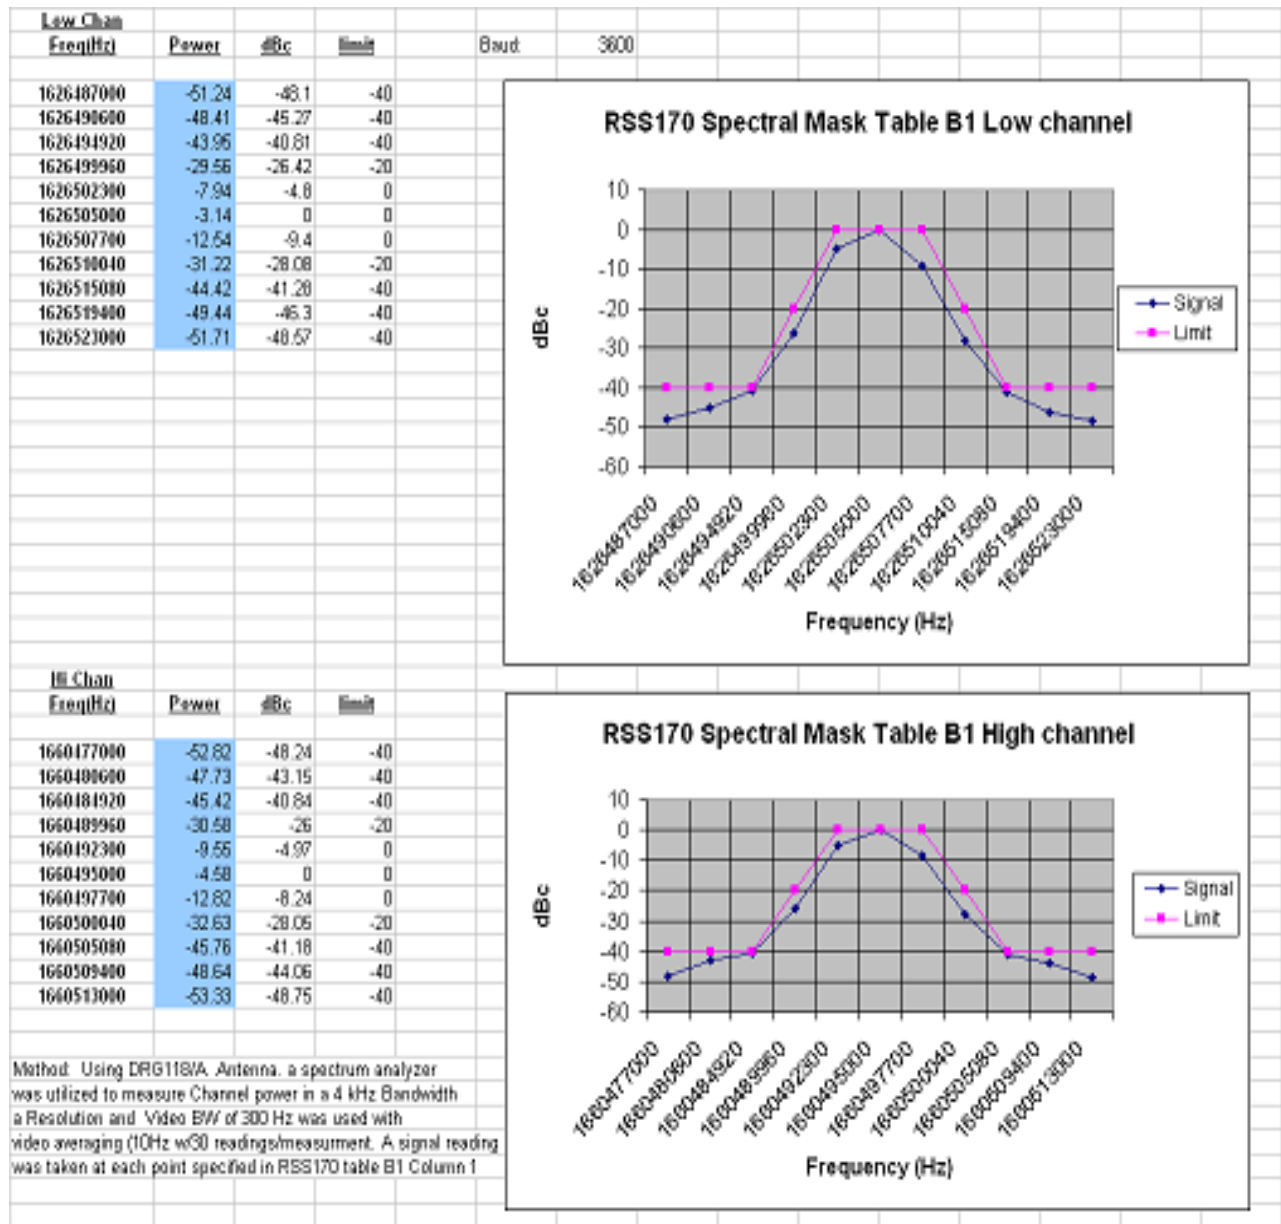


Figure 7: Out-of-Band Emissions to Table B1

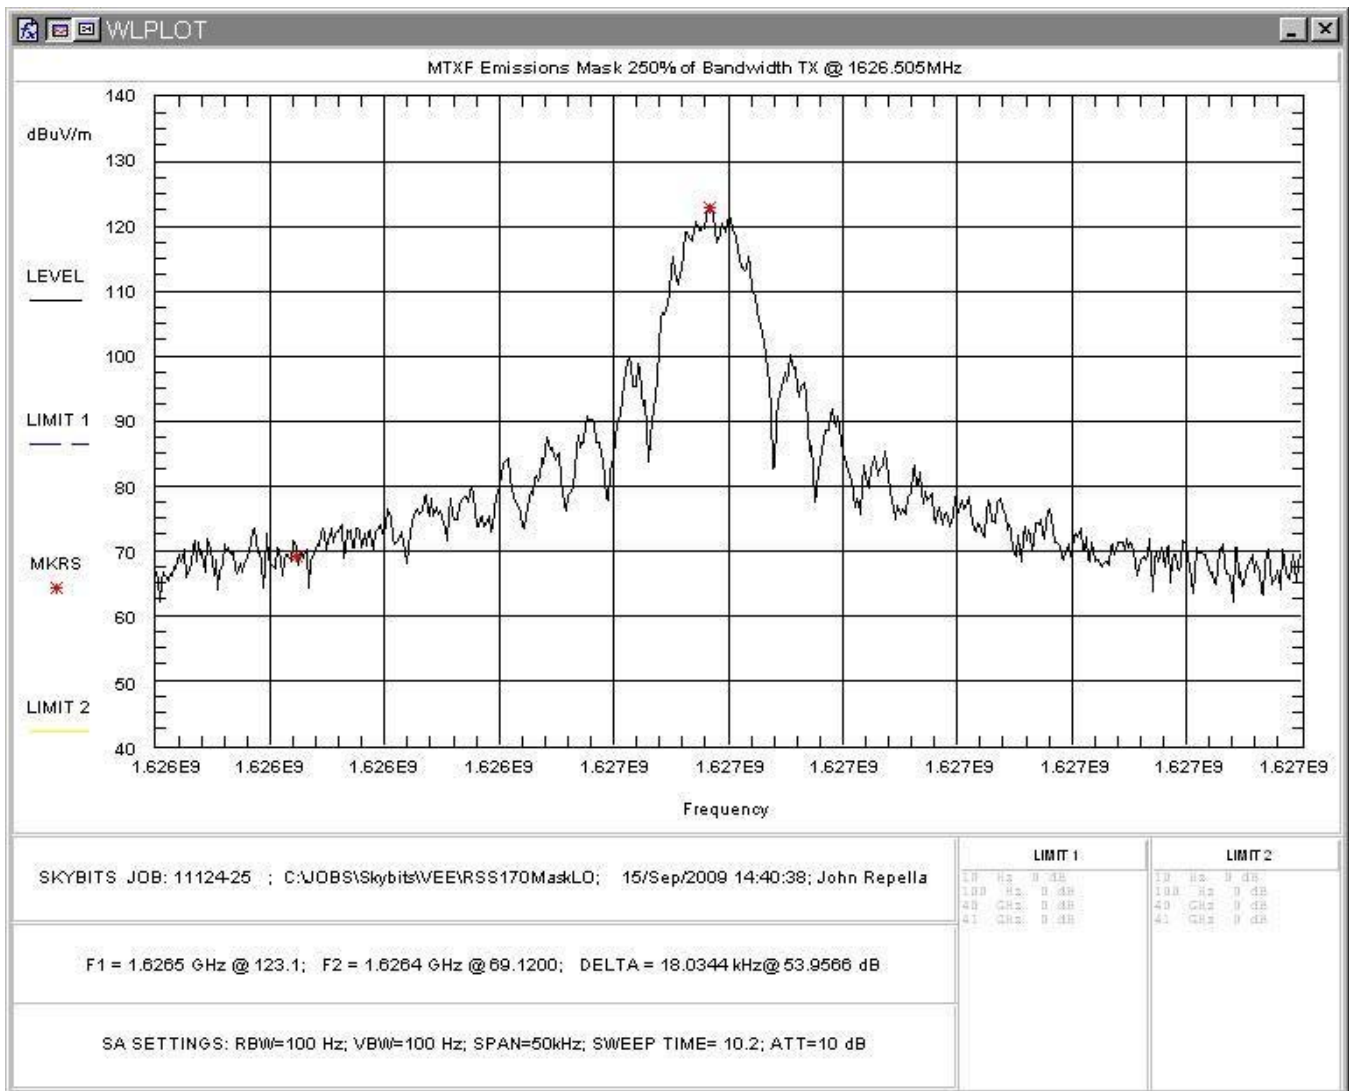


Figure 8: Spectrum Plot, Low Channel @ +/-250% of BW

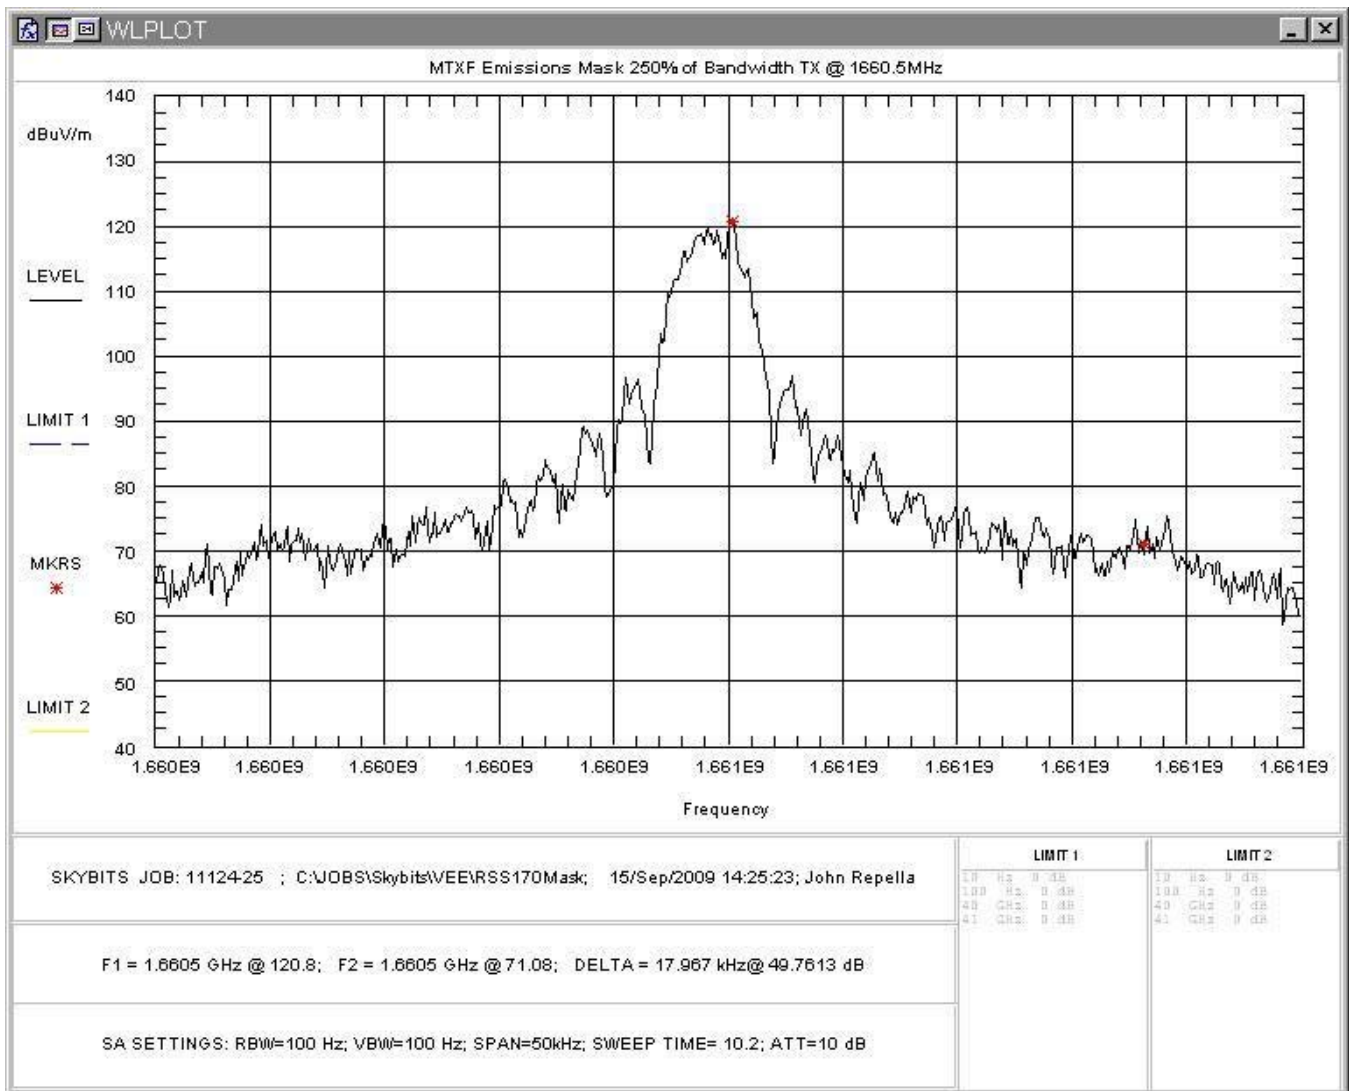


Figure 9: Spectrum Plot, High Channel @ +/-250% of BW

4.4 Radiated Spurious Emissions: EIRP Data (FCC §25.202(f) and RSS-170, Annex B3)

Radiated spurious emissions must comply with the requirements of §25.202 (f) of FCC. The limits for the spurious emissions are as follows:

FCC Part 25.202(f):

Radiated spurious emissions must comply with the requirements of §25.202(f). The limits for the spurious emissions are as follows:

The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;
- (2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: 35 dB;
- (3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts;

Based on the power measured, the limit for emissions removed from the center frequency by more than 250% of the authorized bandwidth will be:

$$\text{Limit (dBm)} = 34(\text{dBm}) - (43 + 10\text{Log}(2.51)) = -13\text{dBm}$$

RSS-170:

Spurious and harmonic emissions, excluding the frequency band of ± 4 SR about the carrier frequency (see Section 4.3) shall be attenuated below the transmitter output power TP in accordance with the following Table from RSS-170 Annex B, when measured with a spectrum analyzer of 4 kHz resolution bandwidth.

Frequency (MHz)	Minimum Attenuation Relative to Tx Power in any 4 kHz
30-1559	83 dB or $(65 + 10 \text{Log}_{10}\text{TP})$ dB whichever is less stringent
above 1559	55 dB or $(37 + 10 \text{Log}_{10}\text{TP})$ dB whichever is less stringent

The limit for RSS-170 is therefore calculated as:

For 30-1559 MHz: $33\text{dBm} - (65 + 10\text{Log}(2W)) = -35\text{dBm}$

Above 1559MHz: $33\text{dBm} - (37 + 10\text{Log}(2W)) = -7\text{dBm}$

This section covers emissions detected at more than 250% removed from the authorized bandwidth.

4.4.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

Where emissions were detected, the EIRP levels were determined using the method of signal substitution. The measurement bandwidth used was set to 3kHz. A 1.3dB correction was added to the spectrum analyzer signal level for referencing to the specification bandwidth of 4kHz. The actual EIRP level was calculated as follows.

$$\text{EIRP (dBm)} = \text{Signal generator substitution level (dBm)} + \text{Antenna Gain (dBi)}$$

4.4.2 Test Results

The frequency range of 30 MHz to 16.5 GHz was measured and the data presented below.

Table 6: Radiated Emissions

Frequency (MHz)	Polarity	Azimuth	Ant. Height (m)	Spurious Level (dBuV)	Sub. Sig. Gen. Level (dBm)	Sub. Power Level (dBm)	Sub. Ant. Factor (dB)	Sub. Ant. Gain (dB)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)
168.77	V	270.0	1.0	10.4	-64.8	-68.2	12.5	2.3	-65.9	-35.0	-30.9
238.317	V	0.0	1.4	4.7	-69.7	-73.0	15.7	2.1	-70.9	-35.0	-35.9
258.45	V	0.0	1.6	7.5	-64.3	-67.5	16.5	2.0	-65.5	-35.0	-30.5
350.34	V	0.0	2.2	3.5	-67.2	-70.6	16.6	4.5	-66.1	-35.0	-31.1
517.24	V	180.0	2.0	3.8	-62.5	-66.3	19.6	4.9	-61.4	-35.0	-26.4
168.77	H	315.0	1.4	8.6	-68.1	-71.4	12.5	2.3	-69.1	-35.0	-34.1
238.325	H	0.0	2.3	4.6	-68.3	-71.5	15.7	2.1	-69.4	-35.0	-34.4
258.45	H	0.0	2.5	4.3	-70.2	-73.4	16.5	2.0	-71.4	-35.0	-36.4
350.36	H	0.0	3.0	5.4	-72.1	-75.6	16.6	4.5	-71.1	-35.0	-36.1
517.24	H	225.0	3.0	3.6	-72.5	-76.3	19.6	4.9	-71.4	-35.0	-36.4

Frequency (MHz)	Polarity	Azimuth	Ant. Height (m)	Spurious Level (dBuV)	Sub. Sig. Gen. Level (dBm)	Sub. Power Level (dBm)	Sub. Ant. Factor (dB)	Sub. Ant. Gain (dB)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)
1357.037	V	0.0	1.0	22.80	-63.30	-64.7	27.1	5.8	-58.9	-13.0	-45.9
1621.522	V	0.0	1.0	48.80	-33.30	-34.9	28.7	5.7	-29.2	-13.0	-16.2
1623.278	V	0.0	1.0	42.70	-39.40	-41.0	28.7	5.7	-35.3	-13.0	-22.3
1627.628	V	0.0	1.0	52.10	-29.60	-31.2	28.8	5.7	-25.5	-13.0	-12.5
1630.469	V	0.0	1.0	58.50	-23.00	-24.6	28.8	5.7	-18.9	-13.0	-5.9
1635.808	V	0.0	1.0	52.30	-30.20	-31.8	28.8	5.7	-26.1	-13.0	-13.1
1641.602	V	0.0	1.0	44.30	-39.80	-41.4	28.8	5.7	-35.7	-13.0	-22.7
1644.405	V	0.0	1.0	45.70	-39.40	-41.0	28.9	5.7	-35.3	-13.0	-22.3
1645.552	V	0.0	1.0	45.70	-38.90	-40.5	28.9	5.7	-34.8	-13.0	-21.8
1647.103	V	0.0	1.0	49.00	-35.70	-37.3	28.9	5.7	-31.6	-13.0	-18.6
1649.414	V	0.0	1.0	44.00	-40.60	-42.2	28.9	5.7	-36.5	-13.0	-23.5
1650.189	V	0.0	1.0	54.00	-30.40	-32.0	28.9	5.7	-26.3	-13.0	-13.3
1655.530	V	0.0	1.0	61.50	-23.50	-25.1	28.9	5.7	-19.4	-13.0	-6.4
1658.371	V	0.0	1.0	56.60	-27.80	-29.4	28.9	5.7	-23.7	-13.0	-10.7
1664.491	V	0.0	1.0	50.90	-33.60	-35.3	29.0	5.7	-29.6	-13.0	-16.6
1928.509	V	0.0	1.0	42.60	-40.60	-42.5	30.5	5.5	-37.0	-13.0	-24.0
1928.951	V	0.0	1.0	43.10	-40.10	-42.0	30.5	5.5	-36.5	-13.0	-23.5
3287.000	V	0.0	1.0	57.90	-20.30	-22.6	35.4	5.2	-17.4	-13.0	-4.4
3857.901	V	0.0	1.0	46.40	-54.30	-56.9	36.1	5.9	-51.0	-13.0	-38.0
4143.853	V	0.0	1.0	35.80	-67.80	-70.5	36.5	6.1	-64.4	-13.0	-51.4
4930.500	V	0.0	1.0	69.30	-32.80	-36.3	36.7	7.4	-28.9	-13.0	-15.9
6072.804	V	0.0	1.0	43.70	-53.30	-57.5	39.5	6.4	-51.1	-13.0	-38.1
6574.000	V	0.0	1.0	62.90	-31.30	-36.5	39.2	7.4	-29.1	-13.0	-16.1
8217.500	V	0.0	1.0	60.50	-31.80	-38.1	43.1	5.5	-32.6	-13.0	-19.6
11504.50	V	0.0	1.0	45.90	-39.30	-47.3	47.6	3.8	-43.5	-13.0	-30.5
1357.037	H	0.0	1.0	28.4	-56.60	-58.0	27.1	5.8	-52.2	-13.0	-39.2
1621.522	H	0.0	1.0	47.7	-34.30	-35.9	28.7	5.7	-30.2	-13.0	-17.2
1623.278	H	0.0	1.0	43.5	-38.00	-39.6	28.7	5.7	-33.9	-13.0	-20.9
1627.628	H	0.0	1.0	52.7	-28.40	-30.0	28.8	5.7	-24.3	-13.0	-11.3
1630.469	H	0.0	1.0	57.7	-23.60	-25.2	28.8	5.7	-19.5	-13.0	-6.5
1635.808	H	0.0	1.0	50	-32.50	-34.1	28.8	5.7	-28.4	-13.0	-15.4
1641.602	H	0.0	1.0	41.3	-42.40	-44.0	28.8	5.7	-38.3	-13.0	-25.3
1644.405	H	0.0	1.0	41.9	-42.10	-43.7	28.9	5.7	-38.0	-13.0	-25.0
1645.552	H	0.0	1.0	40.6	-43.40	-45.0	28.9	5.7	-39.3	-13.0	-26.3
1647.103	H	0.0	1.0	41.3	-42.20	-43.8	28.9	5.7	-38.1	-13.0	-25.1
1649.414	H	0.0	1.0	38.6	-45.90	-47.5	28.9	5.7	-41.8	-13.0	-28.8
1650.189	H	0.0	1.0	46.7	-38.00	-39.6	28.9	5.7	-33.9	-13.0	-20.9
1655.530	H	0.0	1.0	50.4	-34.30	-35.9	28.9	5.7	-30.2	-13.0	-17.2
1658.371	H	0.0	1.0	44.9	-39.70	-41.3	28.9	5.7	-35.6	-13.0	-22.6
1664.491	H	0.0	1.0	38.7	-46.20	-47.9	29.0	5.7	-42.2	-13.0	-29.2
1928.509	H	0.0	1.0	46.8	-36.30	-38.2	30.5	5.5	-32.7	-13.0	-19.7
1928.951	H	0.0	1.0	53.3	-24.00	-25.9	30.5	5.5	-20.4	-13.0	-7.4
3287.000	H	315.0	1.0	52.9	-38.10	-40.4	35.4	5.2	-35.2	-13.0	-22.2
3857.901	H	0.0	1.0	27.3	-73.60	-76.2	36.1	5.9	-70.3	-13.0	-57.3
4143.853	H	0.0	1.0	67.9	-33.60	-36.3	36.5	6.1	-30.2	-13.0	-17.2
4930.500	H	315.0	1.0	42	-56.60	-60.1	36.7	7.4	-52.7	-13.0	-39.7

Frequency (MHz)	Polarity	Azimuth	Ant. Height (m)	Spurious Level (dBuV)	Sub. Sig. Gen. Level (dBm)	Sub. Power Level (dBm)	Sub. Ant. Factor (dB)	Sub. Ant. Gain (dB)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)
6072.804	H	0.0	1.0	67.7	-28.10	-32.3	39.5	6.4	-25.9	-13.0	-12.9
6574.000	H	315.0	1.0	61.3	-30.60	-35.8	39.2	7.4	-28.4	-13.0	-15.4
8217.500	H	315.0	1.0	28.9	-62.10	-68.4	43.1	5.5	-62.9	-13.0	-49.9
11504.50	H	315.0	1.0	39.1	-44.10	-52.1	47.6	3.8	-48.3	-13.0	-35.3
13148.00	H	315.0	1.0	45.3	-27.10	-34.6	48.1	4.5	-30.1	-13.0	-17.1

4.5 Receiver Spurious Emissions, RSS-170 Section 9.0

Spurious emissions related to the receiver were measured in accordance with RSS-170 Section 9.0. Testing was performed at 3m test distance on an OATS. The emission scan was performed from 30MHz up to 5577MHz (3 times the highest LO).

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)
41.06	V	180.00	1.00	7.80	14.3	12.7	100.0	-17.9
48.84	V	180.00	1.00	14.70	9.5	16.2	100.0	-15.8
111.09	V	0.00	1.00	14.30	13.6	24.7	150.0	-15.7
138.74	V	0.00	1.00	3.60	13.8	7.4	150.0	-26.1
228.87	V	0.00	1.00	5.40	12.4	7.8	200.0	-28.2
400.51	V	0.00	1.00	3.00	17.8	11.0	200.0	-25.2
569.24	V	0.00	1.00	6.20	20.3	21.1	200.0	-19.5
773.89	V	0.00	1.00	7.70	22.8	33.7	200.0	-15.5
928.92	V	0.00	1.00	6.00	26.0	39.6	200.0	-14.1
1647.24	V	180.00	1.00	38.20	-8.1	31.9	500.0	-23.9
1859.00	V	0.00	1.00	38.40	-6.5	39.3	500.0	-22.1
5577.00	V	0.00	1.00	32.60	0.6	45.5	500.0	-20.8
41.06	H	0.00	0.00	0.00	14.3	5.2	100.0	-25.7
48.84	H	180.00	3.00	3.80	9.5	4.6	100.0	-26.7
53.31	H	0.00	3.00	4.90	8.1	4.5	100.0	-27.0
111.09	H	0.00	3.00	7.80	13.6	11.7	150.0	-22.2
138.74	H	0.00	3.00	2.20	13.8	6.3	150.0	-27.5
228.87	H	0.00	3.00	5.70	12.4	8.1	200.0	-27.9
569.24	H	0.00	3.50	4.20	20.3	16.7	200.0	-21.5
773.89	H	0.00	3.50	3.90	22.8	21.7	200.0	-19.3
928.92	H	0.00	3.50	3.30	26.0	29.0	200.0	-16.8
1647.24	H	180.00	2.75	37.90	-8.1	30.8	500.0	-24.2
1859.00	H	0.00	3.00	36.80	-6.5	32.7	500.0	-23.7
5577.00	H	0.00	3.00	33.20	0.6	48.7	500.0	-20.2

4.6 Spurious Emissions per FCC §25.216

FCC Part 25 limits the emissions from mobile earth stations for the protection of aeronautical radio navigation-satellite service. The EIRP density of spurious emissions which fall within the frequency range of 1559M to 1610MHz were measured in accordance with §25.216.

In accordance with §25.216(c) the EIRP density of emissions from mobile earth stations operating between 1610MHz and 1660.5MHz shall not exceed -70dBW/MHz, averaged over any 2ms active transmission interval, in the band 1559M – 1605MHz. The EIRP of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW, averaged over any 2ms active transmission interval, in the 1559M – 1605MHz band.

In accordance with §25.216(h) mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies in the 1626.5-1660.5 MHz band shall suppress the power density of emissions in the 1605-1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -46 dBW/MHz at 1610 MHz, averaged over any 2 millisecond active transmission interval. The e.i.r.p of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -56 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

In accordance with §25.216(i) the peak e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after **Federal Register** publication of the rule changes adopted in FCC 03–283 with assigned uplink frequencies between 1 and 3 GHz shall not exceed -80 dBW/MHz in the 1559– 1610 MHz band averaged over any 2 millisecond active transmission interval.

4.6.1 Test Procedure

The output of the EUT was connected to the input of measurement receiver with a RMS detector and the capability of performing the measurements as specified in §25.216 (h). The following was used to calculate the limit and the corrected emissions levels for obtaining the plots shown in Figure 10 through Figure 22.

For emissions from 1559M – 1605MHz:

$$\text{Limit} = -70\text{dBW/MHz} = -40\text{dBm/MHz}$$

For discrete emissions with bandwidths less than 700Hz from 1559M – 1605MHz

$$\text{Limit} = -80\text{dBW} = -50\text{dBm}$$

For emissions from 1605M – 1610MHz:

$$\text{Limit} = -70\text{dBW/MHz} (-40\text{dBm/MHz}) \text{ to } -46\text{dBW/MHz} (-16\text{dBm/MHz})$$

For discrete emissions with bandwidths less than 700Hz from 1605M – 1610MHz

$$\text{Limit} = -80\text{dBW/MHz} (-50\text{dBm/MHz}) \text{ to } -56\text{dBW/MHz} (-26\text{dBm/MHz})$$

For emissions in the Carrier –Off State from 1559M – 1610MHz
Limit = -80dBW/MHz (-50dBm/MHz)

The receiver emissions levels were adjusted for correction factors as follows:

Emission Level = RXL + ATT+CBL+ANT

Where: RXL = Raw received level

ATT = Attenuator = 20dB

CBL=Cable loss=1.0

ANT= Tri-Band Antenna Gain=2.85dBi (5dBiC)

These correction factors were entered into the receiver as an offset so the obtained plots would display corrected data for comparison to the limit.

4.6.2 Test Results

The following plot shows the maximum emissions detected with the band of 1559M – 1610MHz in both a standby and operating mode and vertical and horizontal antenna polarity.

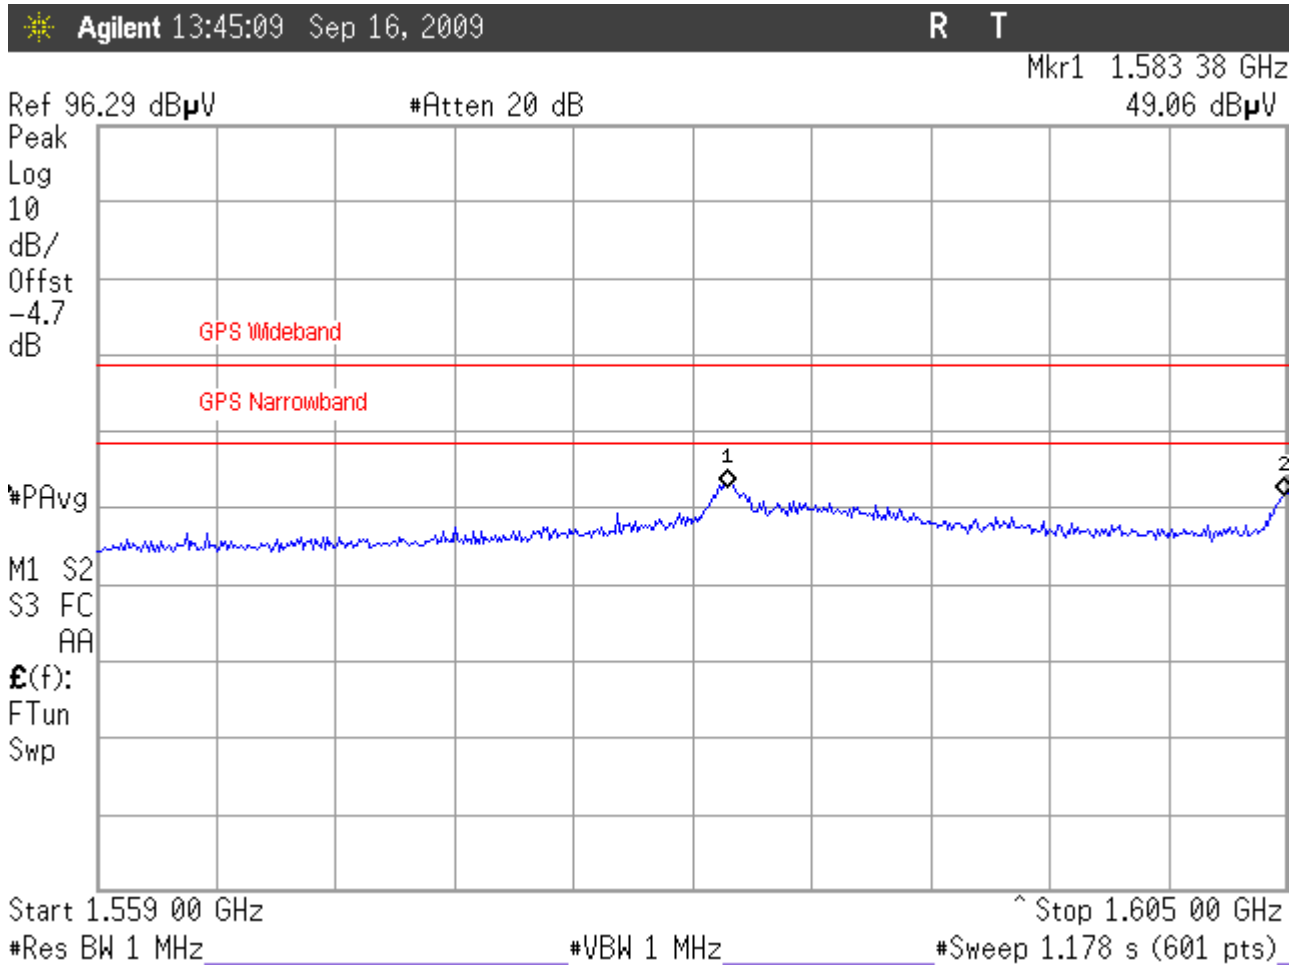


Figure 10: GPS Band Emissions Low Channel, 1559 – 1605MHz Vertical Antenna Polarity

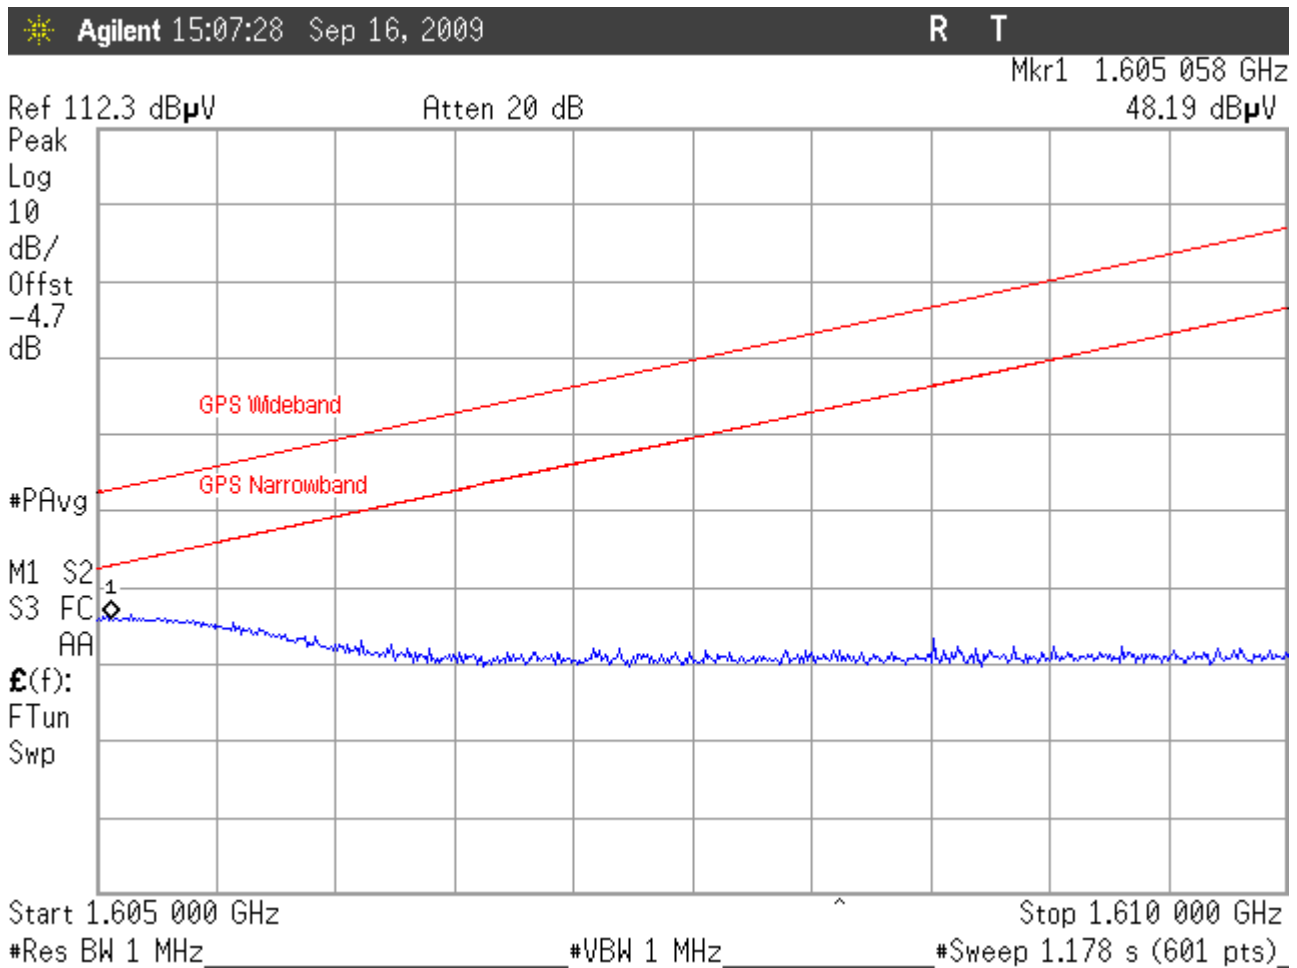


Figure 11: GPS Band Emissions Low Channel, 1605 – 1610MHz Vertical Antenna Polarity

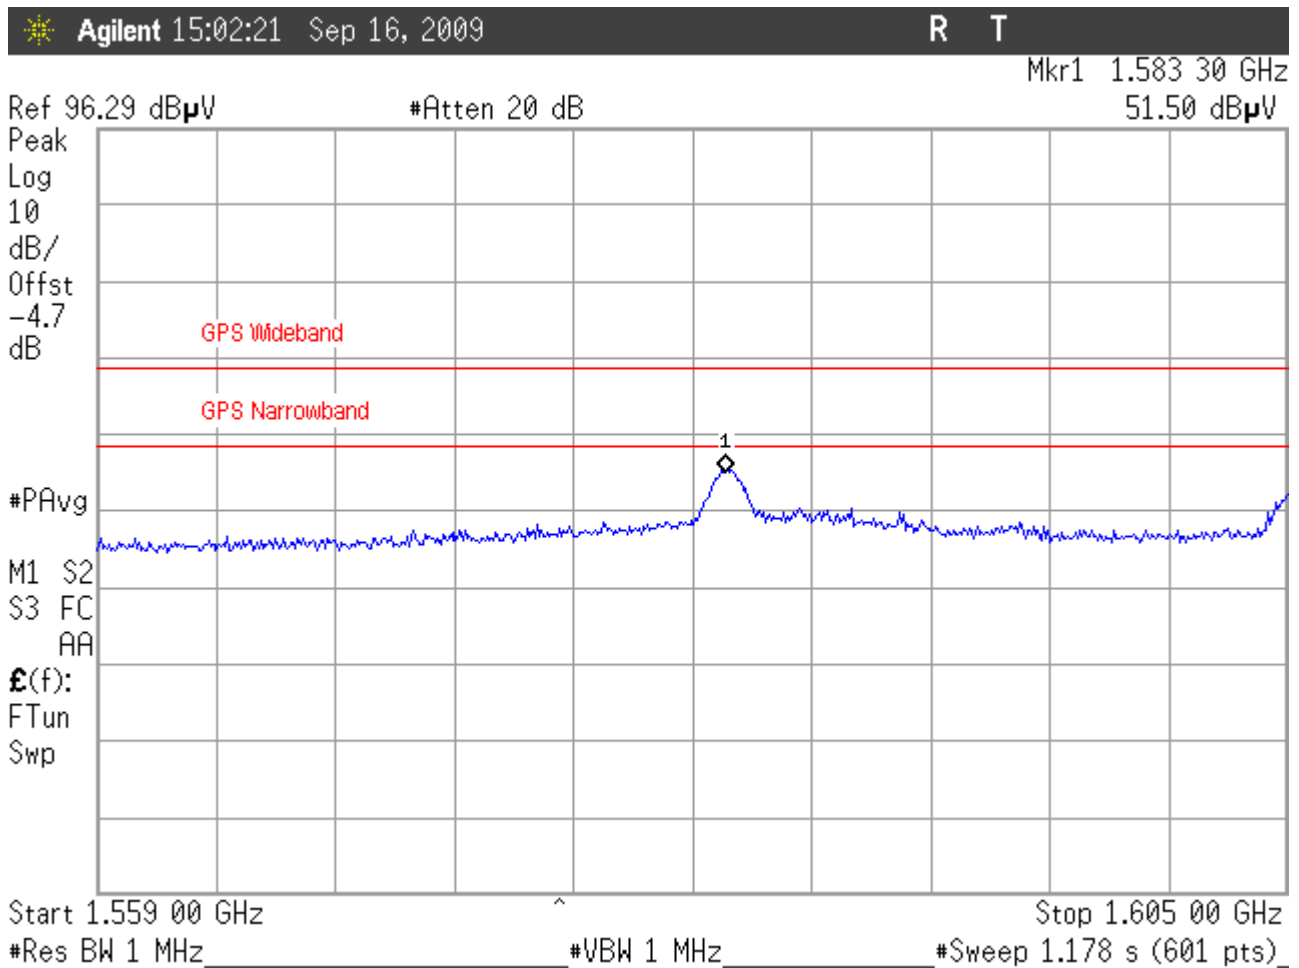


Figure 12: GPS Band Emissions Low Channel, 1559 – 1605MHz Horizontal Antenna Polarity

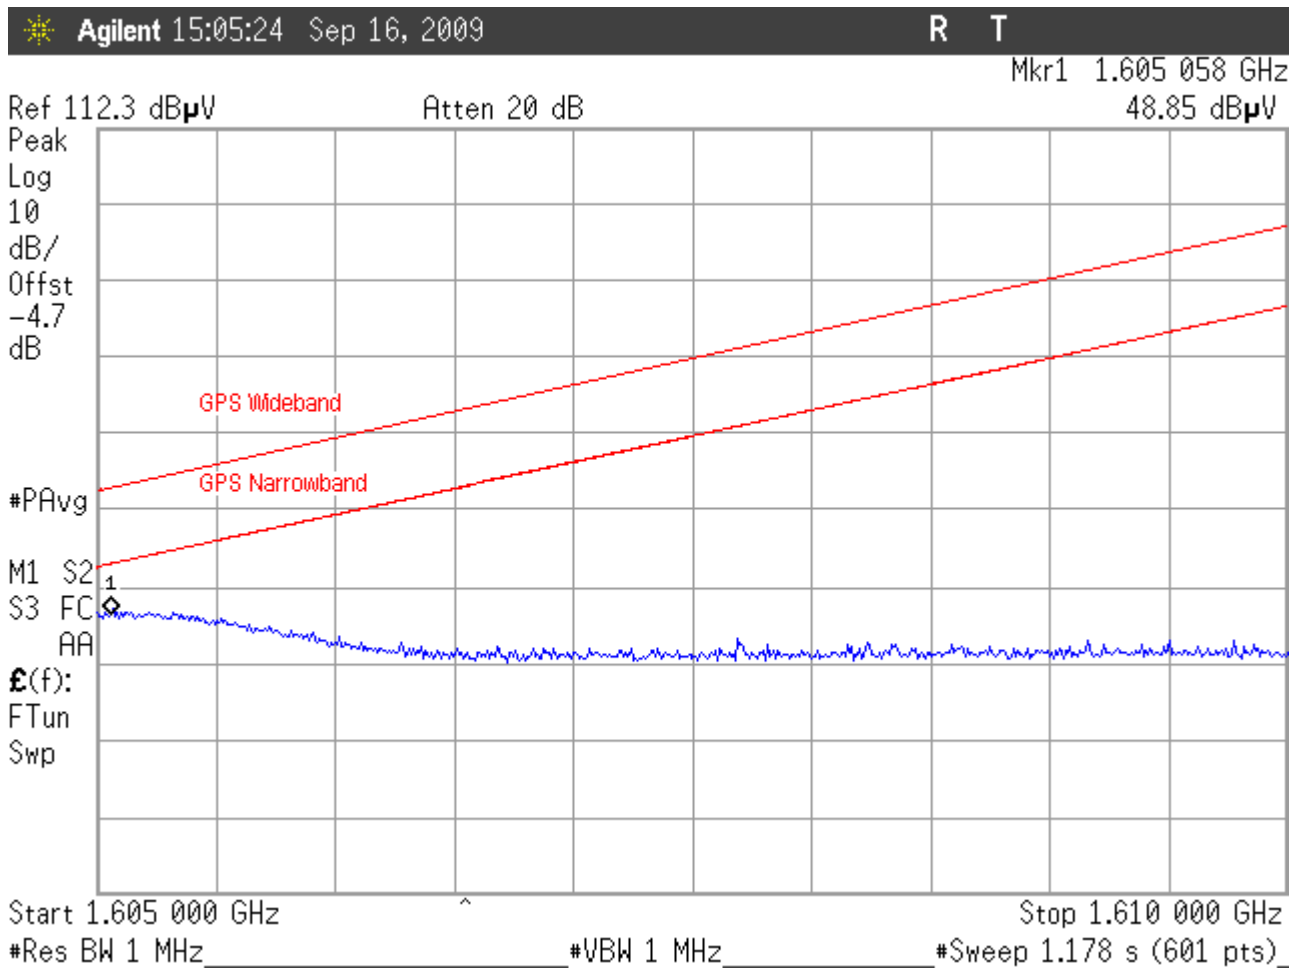


Figure 13: GPS Band Emissions Low Channel, 1605 – 1610MHz Horizontal Antenna Polarity

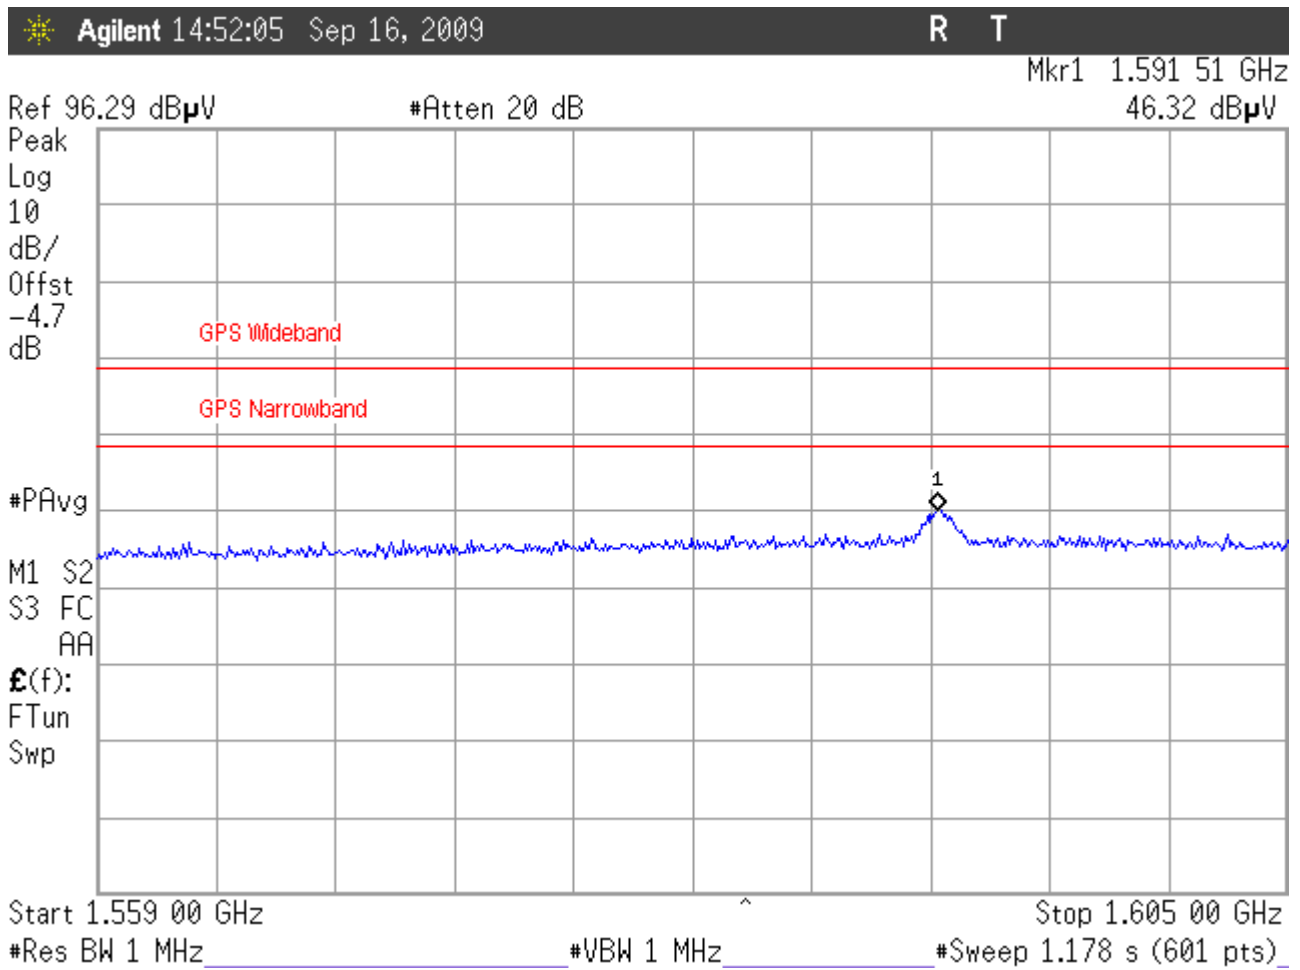


Figure 14: GPS Band Emissions Middle Channel, 1559 – 1605MHz, Vertical Antenna Polarity

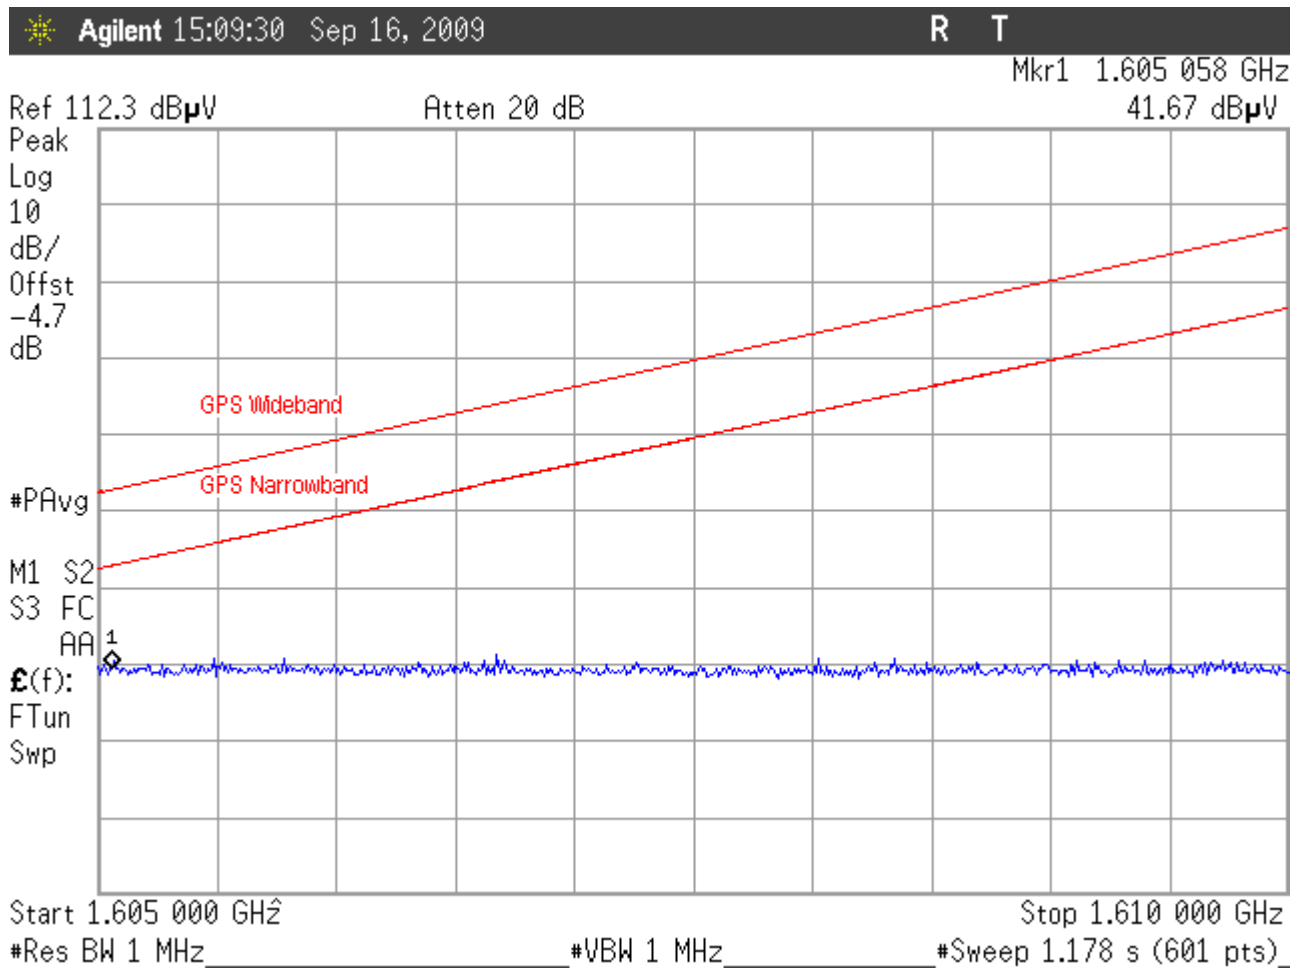


Figure 15: GPS Band Emissions Middle Channel, 1605 – 1610MHz, Vertical Antenna Polarity

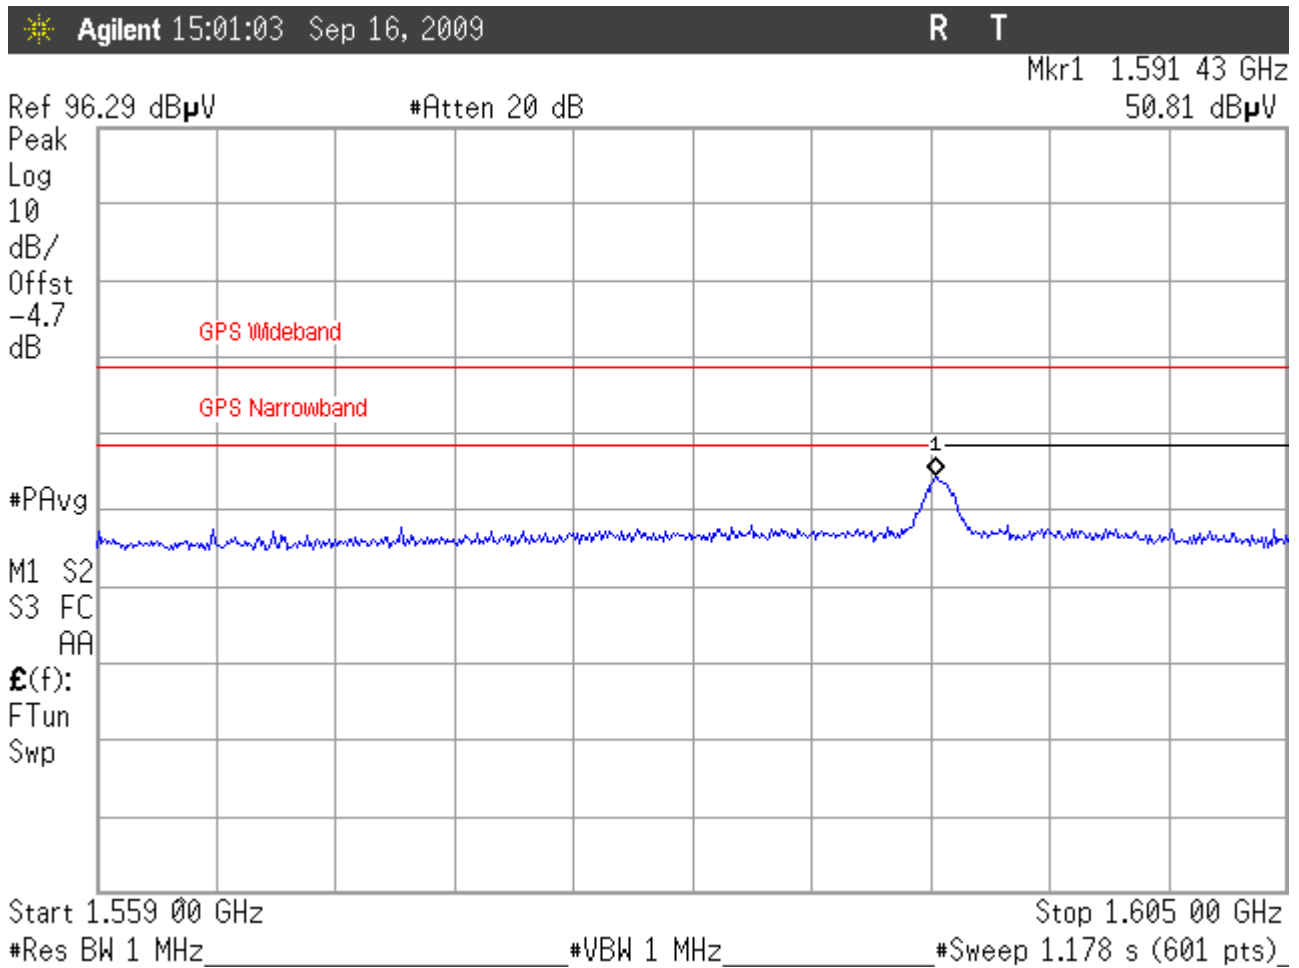


Figure 16: GPS Band Emissions Middle Channel, 1559 – 1605MHz, Horizontal Antenna Polarity

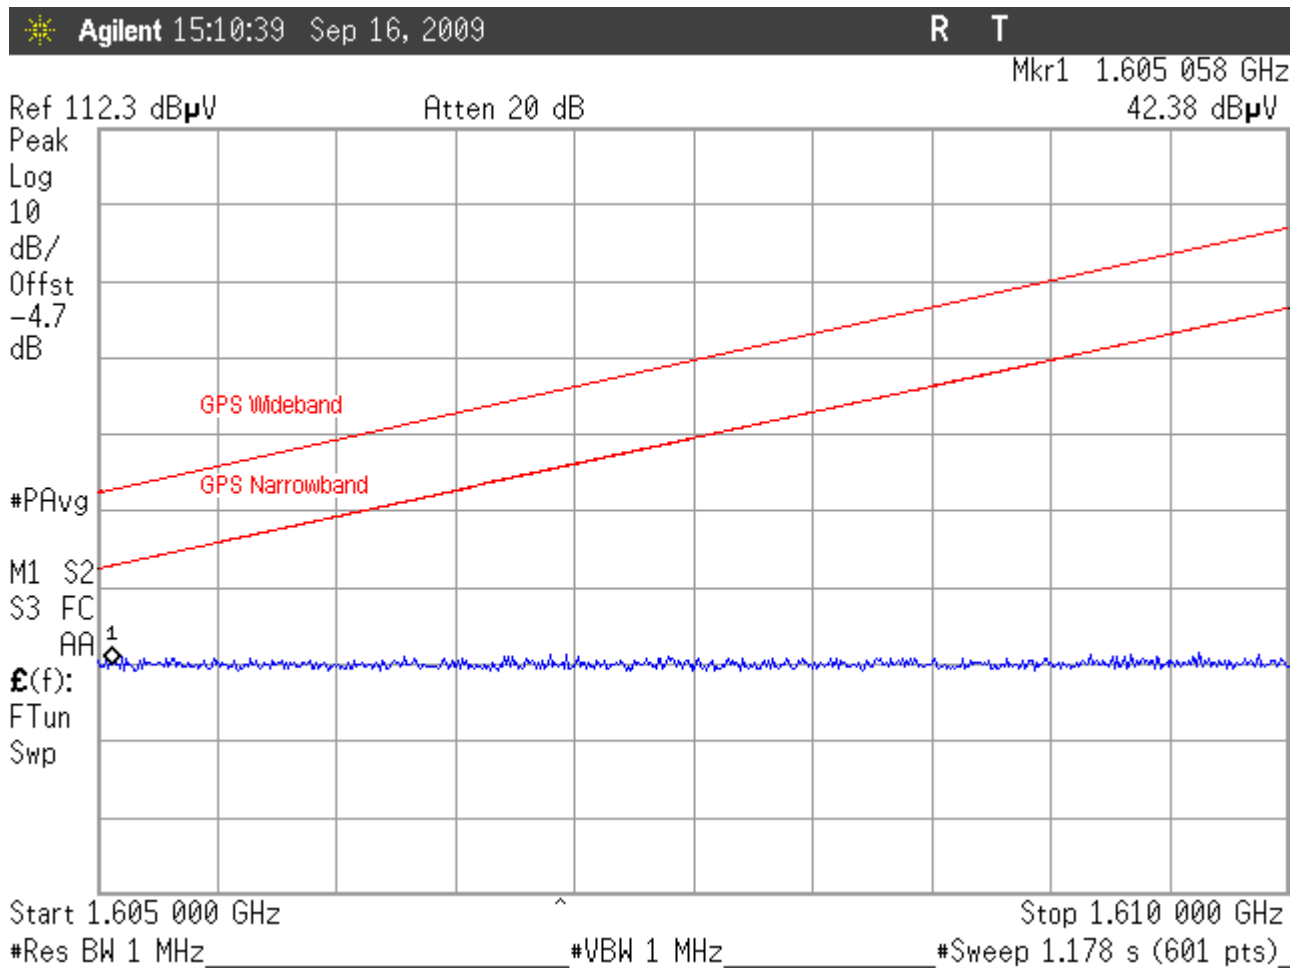


Figure 17: GPS Band Emissions Middle Channel, 1605 – 1610MHz, Horizontal Antenna Polarity

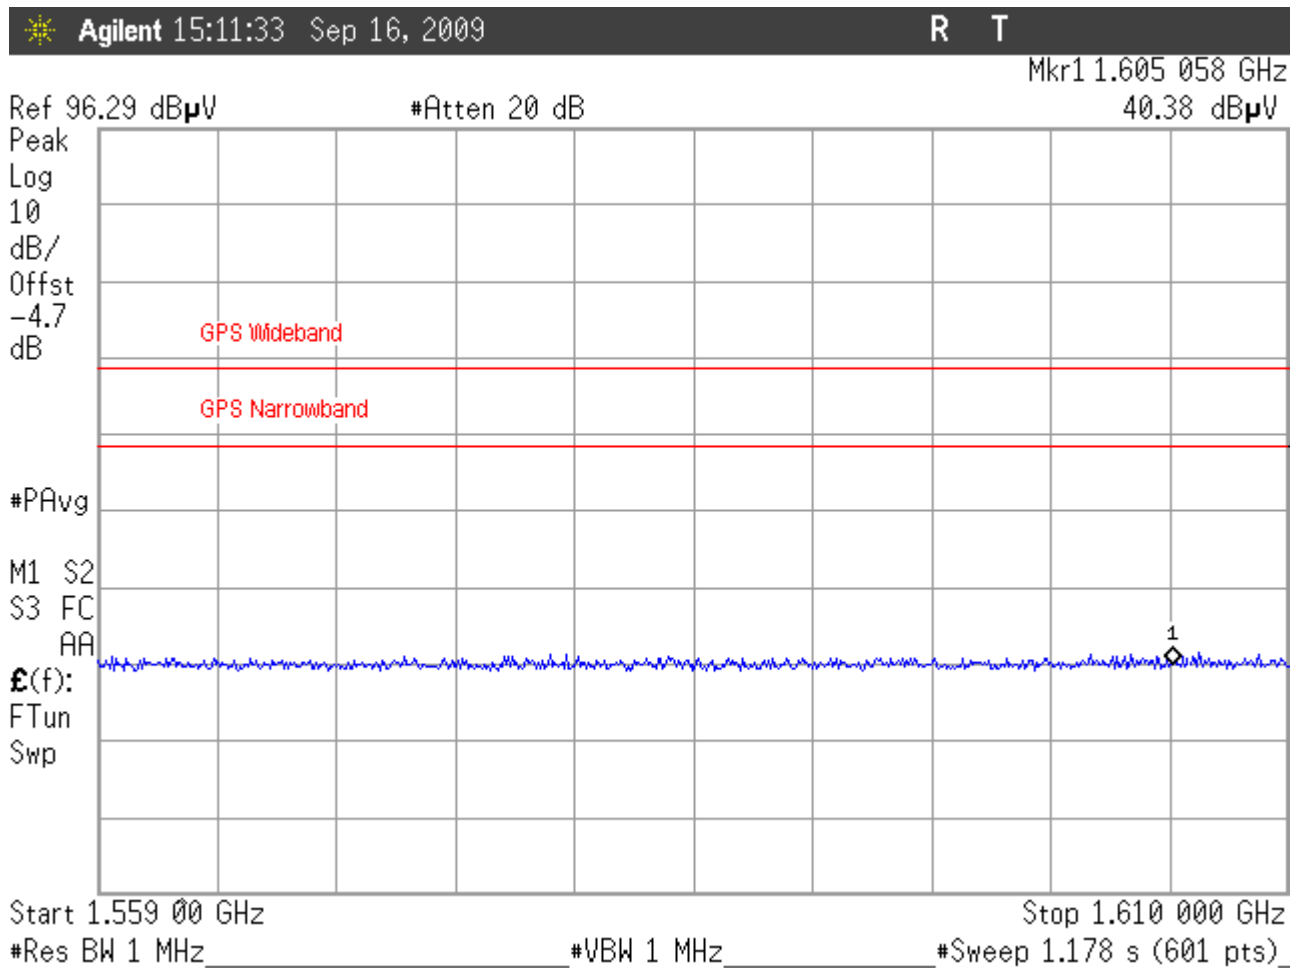


Figure 18: GPS Band Emission, Carrier Off, Mid Channel, 1559 – 1610MHz

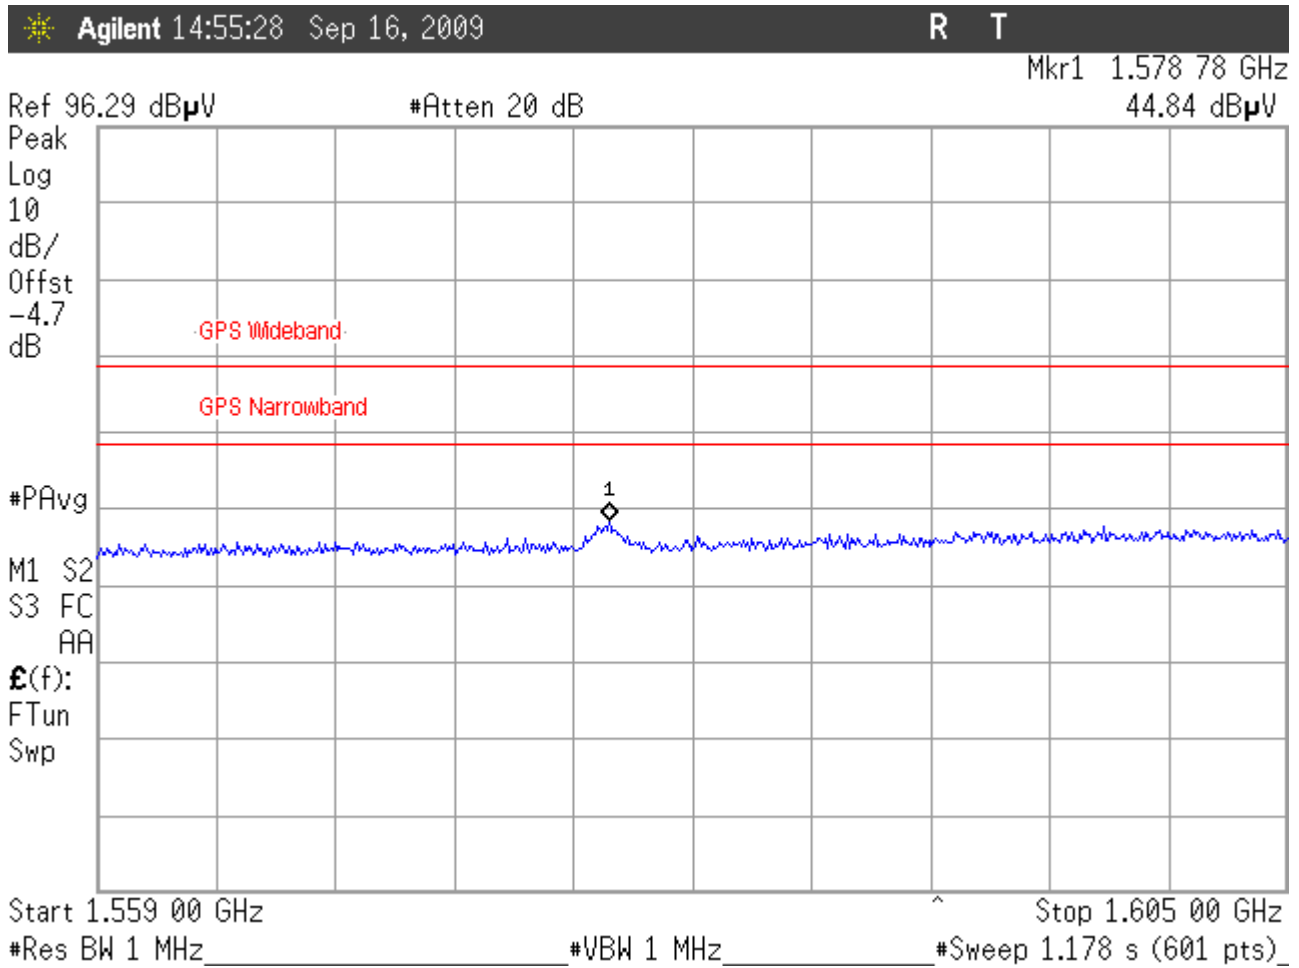


Figure 19: GPS Band Emissions High Channel, 1559 – 1605MHz Vertical Antenna Polarity

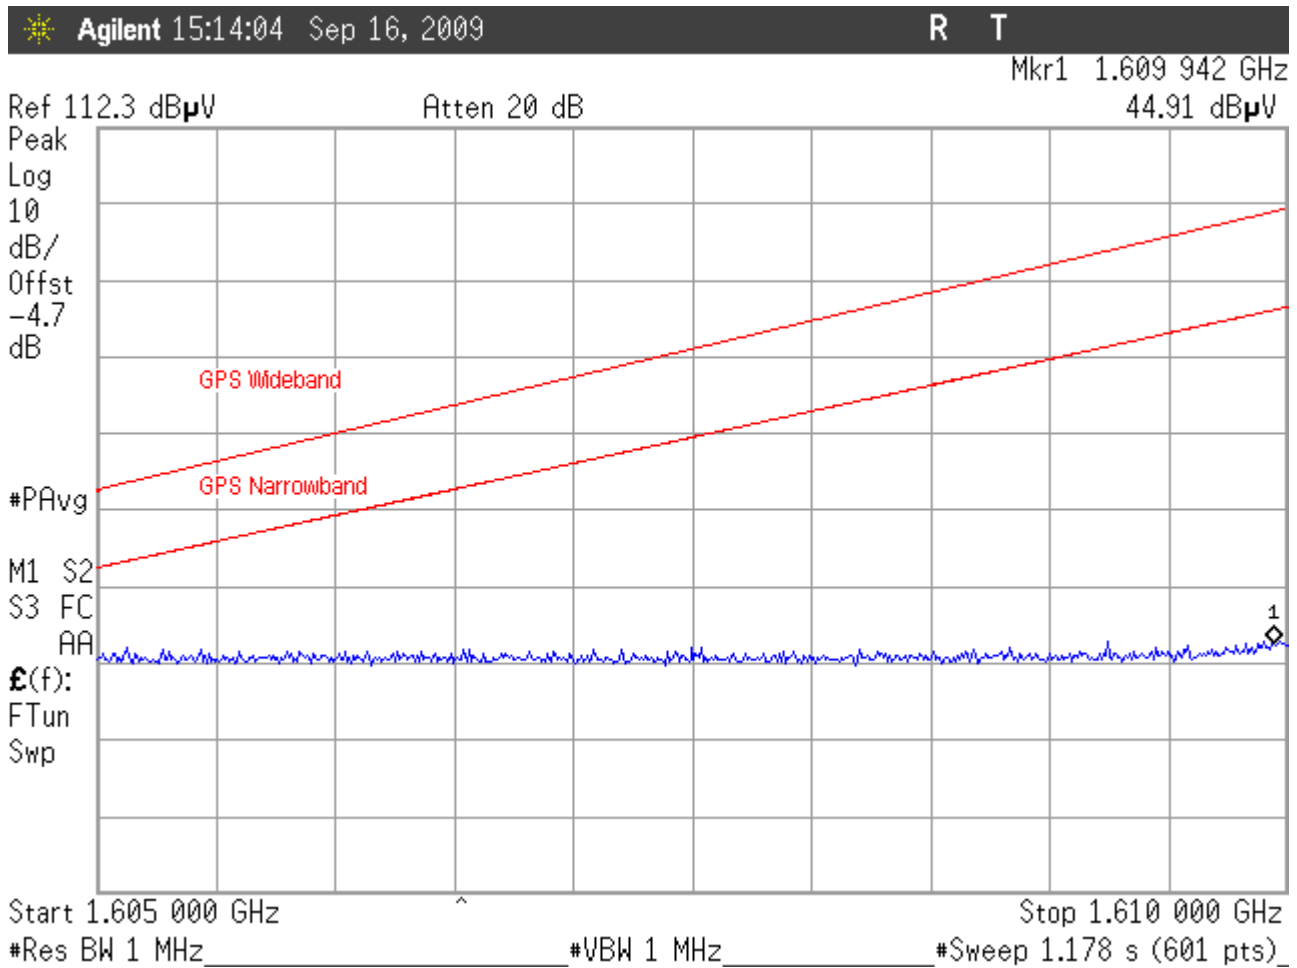


Figure 20: GPS Band Emissions High Channel, 1605 – 1610MHz Vertical Antenna Polarity

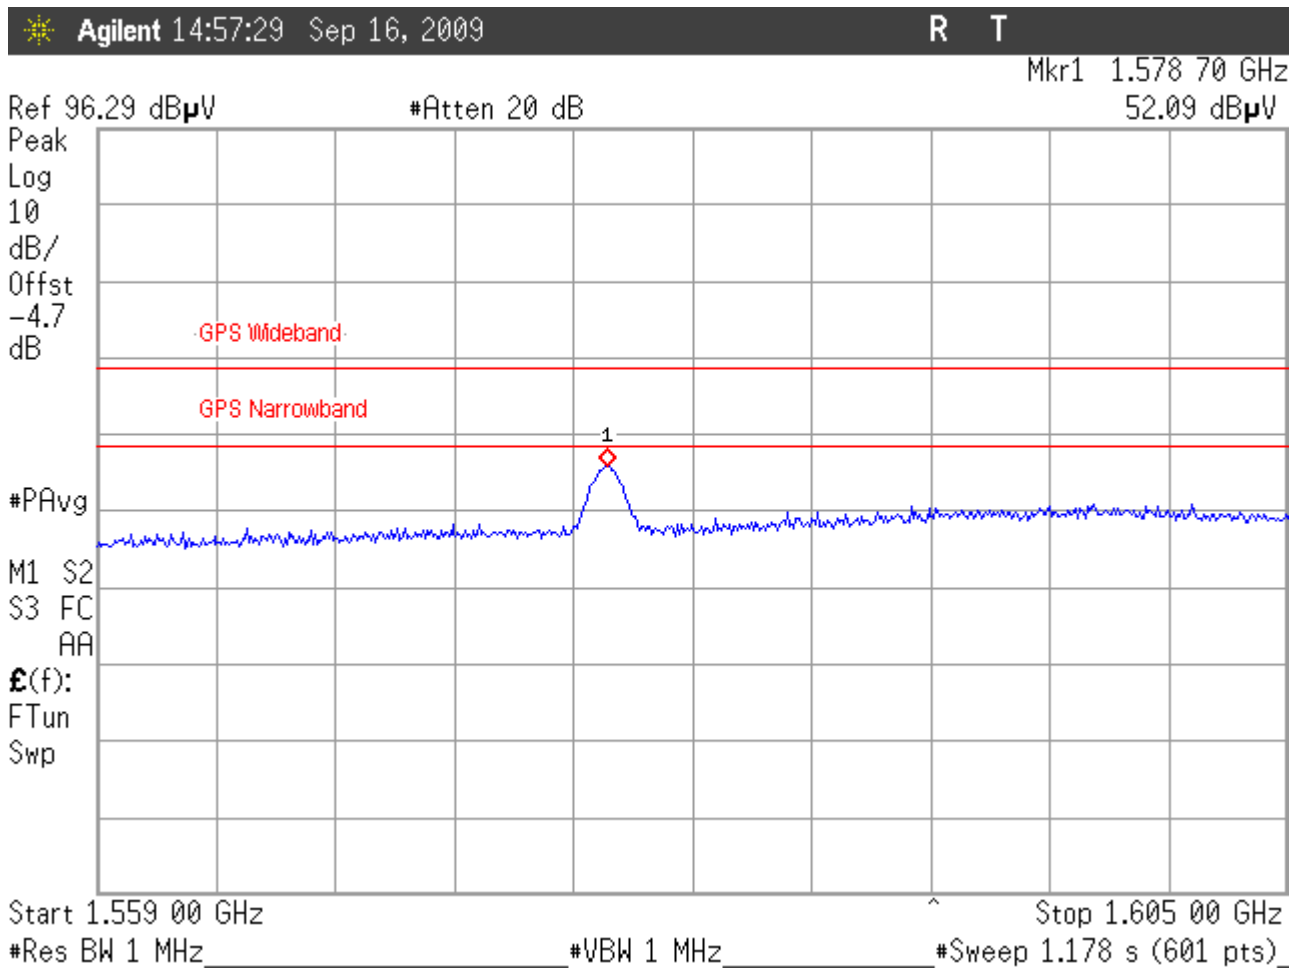


Figure 21: GPS Band Emissions High Channel, 1559 – 1605MHz Horizontal Antenna Polarity

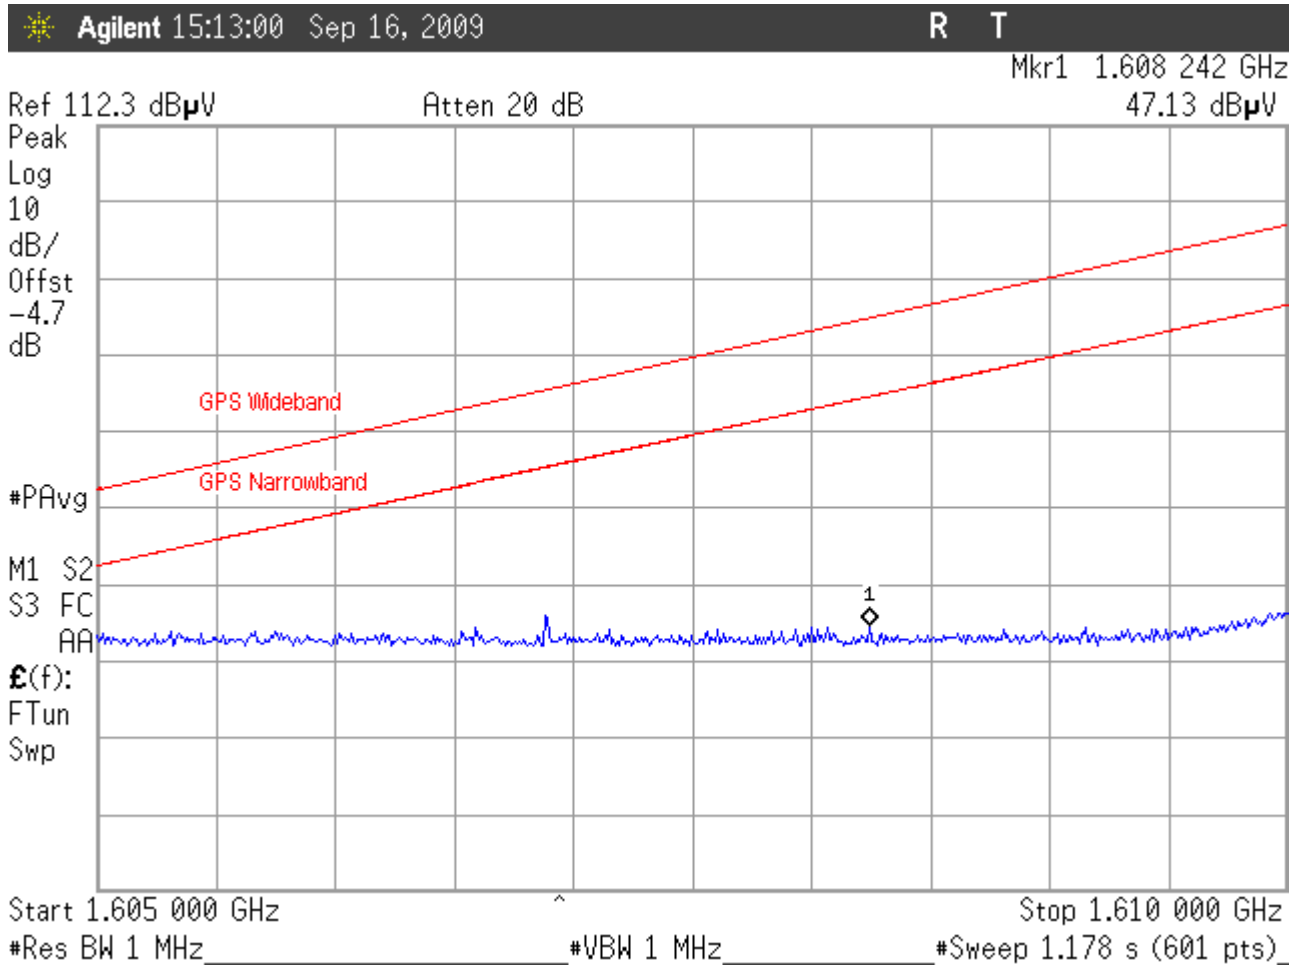


Figure 22: GPS Band Emissions High Channel, 1605 – 1610MHz Horizontal Antenna Polarity

4.7 Frequency Stability: (FCC Part §2.1055)

Frequency as a function of temperature and voltage variation shall be maintained within the FCC-prescribed tolerances. Per §25.202(d) the frequency tolerance shall be maintained within 0.001% of the reference frequency.

4.7.1 Test Procedure

The temperature stability was measured with the unit in an environmental chamber used to vary the temperature of the sample. The sample was held at each temperature step to allow the temperature of the sample to stabilize.

The frequency stability of the transmitter was examined at the voltage extremes and for the temperature range of -30°C to +50°C. The carrier frequency was measured while the EUT was in the temperature chamber. The reference frequency of the EUT was measured at the ambient room temperature with the frequency counter.

The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range.

The RF carrier frequency shall not depart from the reference frequency (reference frequency is the frequency at 20°C and rated supply voltage) in excess of .001%.

The EUT is powered by a 6 VDC voltage supplied via an external DC power supply.

4.7.2 Test Results

The EUT complies with the temperature stability requirements of FCC §25.202 and RSS-170. Test results are given in Table 7.

Table 7: Frequency Stability Test Data

Temperature (Centigrade)	Frequency (MHz)	Difference (Hz)	Deviation (%)	Difference +/- 320Hz RSS-170 Limit
Ambient	1643.499989	0.0	0	
-30	1643.499950	-39.0	0.000002	Pass
-20	1643.4999210	-68.0	0.000004	Pass
-10	1643.4999110	-78.0	0.000005	Pass
0	1643.4999030	-86.0	0.000005	Pass
10	1643.4999070	-82.0	0.000005	Pass
20	1643.4999210	-68.0	0.000004	Pass
30	1643.4998170	-172.0	0.000010	Pass
40	1643.4998870	-102.0	0.000006	Pass
50	1643.4999040	-85.0	0.000005	Pass

Voltage (Volts)	Frequency (MHz)	Difference (Hz)	Deviation (%)	Voltage (Volts)
At rated	1643.499989	0	0.0	6.2
At 85%	1643.4999040	-17.0	0.000001	5.3
At 115%	1643.4999210	104.0	0.000006	7.1

The EUT cuts off below 5.2 VDC.