
## SIZE: 84\*145MM 正面

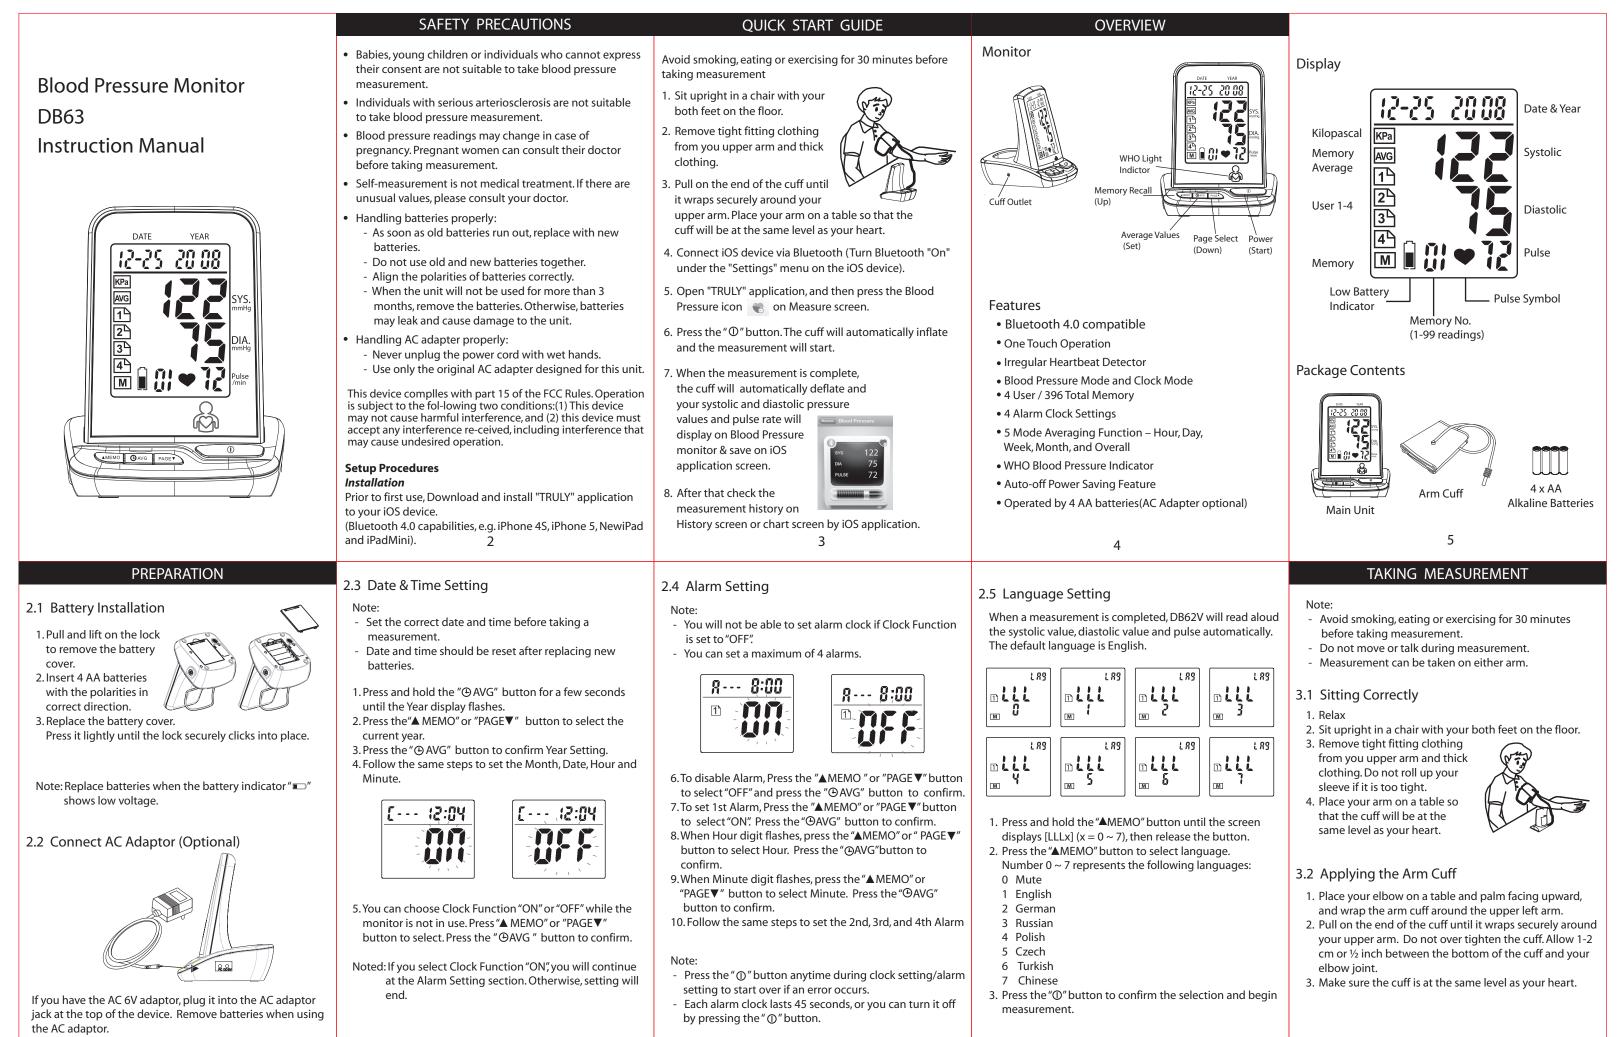

6	7	8	9	10

## SIZE: 84\*145MM 反面

<ul> <li>3.3 User Setting This unit allows a maximum of 4 users to store measurement records in different User Pages. Press "PAGE▼" button to switch between User Page 1, 2, 3 and 4. </li> <li>3.4 Taking Measurement <ol> <li>Press the "①" button. The cuff will automatically inflate and the measurement will start.</li> <li>When the measurement is complete, the cuff will automatically deflate and your systolic and diastolic pressure values and pulse rate will display.</li> <li>Remove the arm cuff and take note of your measurement results.</li> </ol> </li> <li>Note: You can press the "①" button to stop measurement at any time.</li> </ul>	Irregular Heartbeat         This unit has a unique feature that alerts user of irregular heartbeat detection during measurement.         Note: An irregular heartbeat is defined as a heartbeat rhythm that has a variation of more than25% from the average rhythm detected during measurement.         If such irregular rhythm occurs twice or more during the same measurement, the display screen will show the pulse value and "IH" symbol alternately. Example: (90 / IH)         Note: Please consult your doctor if irregular heartbeat cocurs often.	Regular but Above Normal Heartbeat If the monitor detects a pulse rate above 100 beats per minute during measurement, the monitor will display the pulse value and "HI" symbol alternately.Example: (102 / HI)	3.6 WHO Light Indicator This unit features a 6-color LED light indicator to display blood pressure level in accordance with the WHO (World Health Organization) classification. mmHg Grade 3 hypertension(severe) (Red) Grade 2 hypertension(moderate) (Yellow) Grade 1 hypertension(mild) (Purple) High- normal(Green) Normal (Sky Blue) Optimal(Blue) 120 130 140 150 160 170 180 mmHg	<ul> <li>MEMORY FUNCTIONS</li> <li>After measurement, the last set of measured values will be saved automatically after measurement when the unit is turned off by pressing " ① " button or by automatic power off after 3 minutes.</li> <li>4.1 View Past Readings <ol> <li>Press the "▲MEMO" button to enter memory function.</li> <li>If the User Page is not what you want to view, press the "PAGE ▼" button to select.</li> <li>Press the "▲MEMO" button to display the next sets of values. Past readings are displayed from the most recent to the oldest.</li> <li>This can stored up to 99 sets of past readings for each user (4 x 99).</li> </ol> </li> </ul>
S.5 Heartbeat Readings         Besides Systolic and Diastolic values, Pulse will also be displayed after a measurement         Pulse         Pulse	Regular but Below Normal Heartbeat If the monitor detects a pulse rate below 60 beats per minute during measurement, the monitor will display the pulse value and "LO" symbol alternately.Example: (58 / LO) IC-25 2008 IC-25 2008	13	WHO ClassificationColor OptimalBlue NormalSky Blue High-normalSky Blue High-normalGreen Mild hypertensionPurple Moderate hypertensionPurple Moderate hypertensionPurple Moderate hypertensionRedImage: Color Color Image: WHO Light IndicatorExample: If your measurement reading is 122/75, the LED light will display the color in blue.14	<ol> <li>Press the "@AVG" button to enter Average function.</li> <li>If the User Page is not what you want to view, press the "PAGE▼" button to select.</li> <li>Press the "@AVG" button to view different Average Values. 5 different Average Values are available:</li> </ol>
Symbol on Display       Average Values of         1       h       One Hour         1       d       One Day         7       d       One Week         30       d       One Month         ALL       All Readings             ALL All Readings               ALL All Readings           User can delete all the past readings stored in each User Page.           1. Press the "PAGE▼" button to select the User Page you want to delete.           2. Press and hold the "▲MEMO" & "PAGE▼" button simultaneously for 5 seconds. Symbol of "ALL EE" will be displayed and all past readings stored in that User Page will be deleted.	TROUBLESHOOTINGProblemCauseSolutionNo display when you press the Power/StartHave the batteries Replace new batteries.Power/StartAre the battery polarities wrong?Re-align batteries in correct polarities."Err P" displayedFail to inflateCheck if the cuff is properly connected, Replace the air tube if it is broken."Err 1" displayedDeflate too rapidly Meeturn for servicing. "Err 2" displayedDeflate too rapidly Return for servicing. measurement"Err 3" displayedIncorrect resultsMeasure again.Note: If your problem cannot be solved by the above, consult your store of purchase. Do not disassemble the unit.	<ul> <li>STORAGE &amp; MAINTENANCE</li> <li>Keep away the unit from direct sunlight, extreme temperatures, humidity or moisture.</li> <li>Use a dry, soft cloth to clean the unit, or if desired, use a cloth lightly dampened with water.</li> <li>Do not use alcohol, benzene, thinner or other volatile liquids to clean the unit.</li> <li>Do not wash or expose the arm cuff to liquid.</li> <li>Remove batteries from the unit when it will not be used for more than 3 months.</li> </ul>	SPECIFICATIONSModel No.DB63Measurement MethodOscillometricMeasurement RangePressure: 20 – 280 mmHgPulse Rate: 40 – 195 beats/minAccuracyPressure: +/- 3 mmHgPulse Rate: +/- 5%InflationPump drivenPressure DetectionSemi-conductorPower Supply4 x AA batteries or AC/DC adaptorAuto Power Off3 minutes after last operationStorage Environment-20°C to 60°C, 10% to 95% RHOperation Environment10°C to 40°C, 15% to 90% RHExternal Dimensions6.1" (L) x 5.1" (W) x 4.3" (H) or15.5 (L) x 13 (W) x 11 (H) cmNet Weight410g (batteries excluded)Cuff DimensionsFor arm circumference of22-34 cm (Special size to be ordered separately)Package ContentCuff, Instruction Manual, Battery Set, Warranty CardNote: Subject to modification without prior notice.	

16	17	18	19	Rev.0 2013/11/11
----	----	----	----	---------------------

Suite B, 29 Harley Street, LONDON W1G 9QR,

United Kinadom

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct

The interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of FCC Rules.

Operation is subject to the following two conditions:

This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. such modifications could void the user's authority to operate this equipment.