


Wireless 2D Imager Scanner 條碼掃描器

- MS842/MS842P -

Dongle for MS84X wireless scanner

MS84X-2

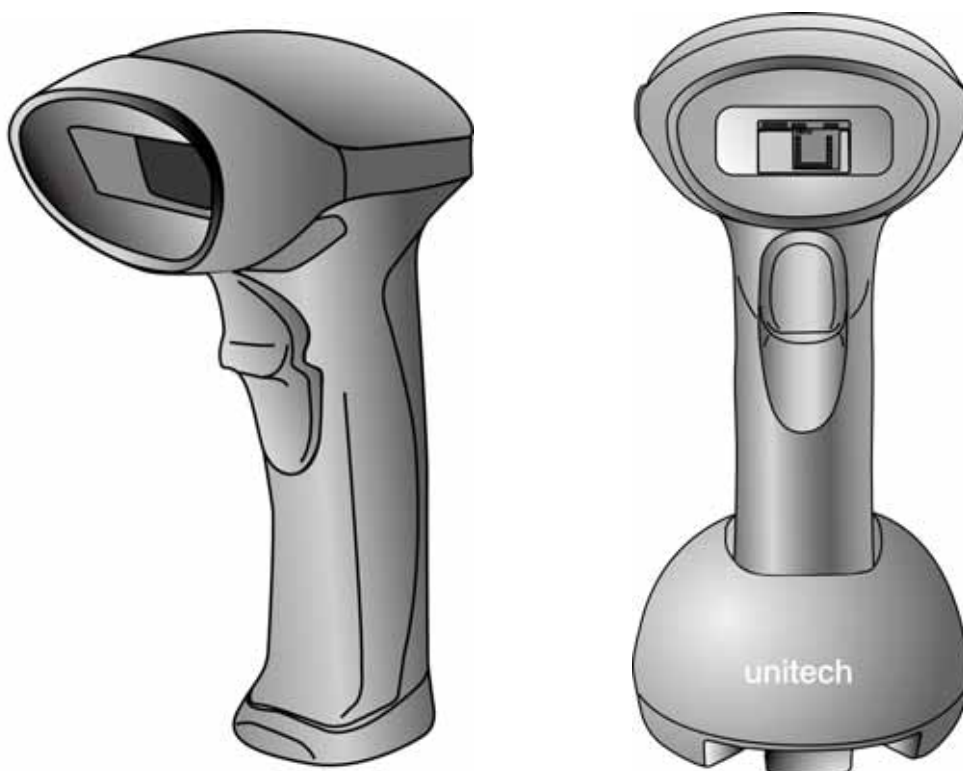

User's Manual

Version 1.4

Preface

About This Manual

This manual explains how to install, operate and maintain the MS842-series 2D scanners.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, such as photocopying, recording, or information storage and retrieval systems, without permission in writing from the manufacturer. The material in this manual is subject to change without notice.

© Copyright 2013 Unitech Electronics Co., Ltd. All rights reserved.

Unitech global website address: <http://www.ute.com>

Regulatory Compliance Statements

FCC Warning Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference with radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
 2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. To maintain compliance with FCC RF exposure requirements, avoid direct contact to the transmitting antenna during transmitting.
 3. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC Label Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure Statement

For body contact during operation, this scanner has been tested and meets FCC RF exposure guidelines when used with an accessory that contains no metal and that positions the handset a minimum of 1.5 cm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Canadian Compliance Statement

This Class B Digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte les exigences du Règlement sur le matériel brouilleur du Canada.

European Conformity Statement

Declaration of Conformity with regards to the R&TTE 1999/5/EC and EMC 89/336/ EEC directives.

RoHS Statement



This device conforms to RoHS (Reduction Of Hazardous Substances) European Union regulations that set maximum concentration limits on hazardous materials used in electrical and electronic equipment.

Taiwan NCC Warning Statement

交通部電信總局低功率電波輻射性電機管理辦法 (930322)

根據交通部低功率管理辦法規定：

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

減少電磁波影響，請妥適使用

Warranty

The following items covered under the Unitech Limited Warranty are free from defects during normal use:

- MS842 series – 2-year limited warranty.

Warranty becomes void if equipment is modified, improperly installed or used, damaged by accident or neglect, or if any parts are improperly installed or replaced by the user.

Use only the adapter supplied. Using the wrong adapter may damage the unit and will void the warranty.

Table of Contents

Preface

About This Manual	i
Regulatory Compliance Statements.....	ii
<i>FCC Warning Statement</i>	<i>ii</i>
<i>FCC Label Statement.....</i>	<i>ii</i>
<i>RF Radiation Exposure Statement.....</i>	<i>ii</i>
<i>Canadian Compliance Statement.....</i>	<i>ii</i>
<i>European Conformity Statement.....</i>	<i>iii</i>
<i>RoHS Statement</i>	<i>iii</i>
<i>Taiwan NCC Warning Statement.....</i>	<i>iii</i>
Warranty	iii

Chapter 1

Introduction	1
Introducing the MS842 Series.....	1
<i>Report Version</i>	<i>1</i>
Package Contents.....	2
USB Interface	4
<i>Connecting a USB Interface (for MS842).....</i>	<i>4</i>
<i>Connecting a USB Interface, Dongle Mode (for MS842P)</i>	<i>5</i>
<i>Connecting a USB Interface, Cradle Mode (for MS842P).....</i>	<i>7</i>
<i>USB Host Parameters.....</i>	<i>8</i>
<i>USB Transmission Speed Parameters.....</i>	<i>9</i>
<i>ASCII Character Set for USB</i>	<i>12</i>
RS-232 Interface.....	20
<i>Connecting an RS232 Interface</i>	<i>20</i>
<i>RS-232 Host Types</i>	<i>21</i>
<i>Baud Rate</i>	<i>22</i>
<i>Parity.....</i>	<i>23</i>
<i>Stop Bit Select.....</i>	<i>23</i>
<i>Data Bits.....</i>	<i>23</i>

<i>Check Receive Errors</i>	24
<i>Hardware Handshaking</i>	24
<i>Software Handshaking</i>	25
<i>Host Serial Response Time-out</i>	27
<i>RTS Line State</i>	27
<i>Beep on <BEL></i>	28
<i>Intercharacter Delay</i>	28
<i>ASCII Character Set for Serial Hosts</i>	29

Chapter 2

Output Data Editing	33
Transmit Code ID Character	33
Prefix/Suffix Values	33
Scan Data Transmission Format	34
FN1 Substitution Values	35

Chapter 3

Barcode Setup Menu	37
User Preferences	37
<i>Set Default Parameter</i>	37
<i>Parameter Scanning</i>	37
<i>Beeper Tone</i>	38
<i>Beeper Volume</i>	38
<i>Suppress Power-up Beeps</i>	38
<i>Beeper Preferences</i>	39
<i>Beeper Duration</i>	39
<i>Trigger Modes</i>	39
<i>Low Power Mode</i>	40
<i>Time Delay to Low Power Mode</i>	40
<i>Video Mode</i>	41
<i>Image File Format Selector</i>	41
<i>Video View Finder</i>	42

Chapter 4

Barcode Symbolologies	43
Introduction	43
Symbol Code Identifiers	44

UPC-A	45
<i>Enable/Disable UPC-A.....</i>	45
<i>Transmit UPC-A Check Digit</i>	45
<i>UPC-A Preamble.....</i>	45
UPC-E	46
<i>Enable/Disable UPC-E.....</i>	46
<i>Transmit UPC-E Check Digit.....</i>	46
<i>UPC-E Preamble.....</i>	46
Code 39.....	47
<i>Enable/Disable Code 39</i>	47
<i>Code 39 Check Digit Verification.....</i>	47
<i>Transmit Code 39 Check Digit.....</i>	47
<i>Code 39 Full ASCII Conversion</i>	48
UPC-E1	48
<i>Enable/Disable UPC-E1</i>	48
<i>Transmit UPC-E1 Check Digit.....</i>	48
<i>UPC-E1 Preamble.....</i>	49
EAN-13/JAN-13.....	49
<i>Enable/Disable EAN-13/JAN-13.....</i>	49
Bookland EAN.....	49
<i>Enable/Disable Bookland EAN.....</i>	49
Bookland ISBN Format.....	50
Decode UPC/EAN/JAN Supplementals	50
EAN-8/JAN-8.....	50
<i>Enable/Disable EAN-8/JAN-8</i>	50
Code 128.....	51
<i>Enable/Disable Code 128</i>	51
GS1-128 (formerly UCC/EAN-128)	51
<i>Enable/Disable GS1-128.....</i>	51
ISBT 128	51
<i>Enable/Disable ISBT 128</i>	51
Convert UPC-E to UPC-A	52
<i>Convert UPC-E to UPC-A (Enable/Disable)</i>	52

Convert UPC-E1 to UPC-A	52
<i>Convert UPC-E1 to UPC-A (Enable/Disable)</i>	<i>52</i>
Convert Code 39 to Code 32	52
<i>Convert Code 39 to Code 32 (Enable/Disable)</i>	<i>52</i>
Convert I 2 of 5 to EAN-13	53
<i>Convert I 2 of 5 to EAN-13 (Enable/Disable)</i>	<i>53</i>
Trioptic Code 39	53
<i>Enable/Disable Trioptic Code 39</i>	<i>53</i>
Discrete 2 of 5	53
<i>Enable/Disable Discrete 2 of 5</i>	<i>53</i>
Interleaved 2 of 5	54
<i>Enable/Disable Interleaved 2 of 5</i>	<i>54</i>
<i>Set Lengths for Interleaved 2 of 5</i>	<i>54</i>
Coabar	55
<i>Enable/Disable Codabar</i>	<i>55</i>
<i>Set Lengths for Codabar</i>	<i>55</i>
MSI	56
<i>Enable/Disable MSI</i>	<i>56</i>
Inverse 1D	57
Postal Code Symbolologies	57
<i>US Postnet</i>	<i>57</i>
<i>UK Postal</i>	<i>57</i>
<i>Japan Postal</i>	<i>57</i>
<i>GS1 (Globe Standard 1) DataBar</i>	<i>58</i>
<i>GS1 DataBar Limited</i>	<i>58</i>
<i>GS1 DataBar Limited Security Level</i>	<i>58</i>
<i>GS1 DataBar Expanded</i>	<i>59</i>
<i>Netherlands KIX Code</i>	<i>59</i>
<i>Australia Post</i>	<i>59</i>
Composite Symbolologies	60
<i>Composite CC-C</i>	<i>60</i>
<i>Composite CC-A/B</i>	<i>60</i>
<i>Composite TLC-39</i>	<i>60</i>

2D Symbolologies.....	60
<i>PDF417.....</i>	<i>60</i>
<i>MicroPDF417</i>	<i>61</i>
<i>Code 128 Emulation.....</i>	<i>61</i>
<i>Data Matrix.....</i>	<i>61</i>
<i>Data Matrix Inverse</i>	<i>61</i>
<i>Decode Mirror Images (Data Matrix Only).....</i>	<i>62</i>
<i>Maxicode.....</i>	<i>62</i>
<i>QR Code</i>	<i>62</i>
<i>QR Inverse</i>	<i>63</i>
<i>MicroQR.....</i>	<i>63</i>
<i>Aztec</i>	<i>63</i>
<i>Aztec Inverse</i>	<i>64</i>
<i>Redundancy Level</i>	<i>64</i>
<i>Security Level.....</i>	<i>65</i>
<i>Intercharacter Gap Size</i>	<i>66</i>
<i>Macro PDF Features.....</i>	<i>66</i>
<i>Macro PDF Transmit / Decode Mode Symbols</i>	<i>67</i>
<i>Transmit Macro PDF Control Header</i>	<i>68</i>
<i>Escape Characters.....</i>	<i>69</i>
<i>Flush Macro Buffer.....</i>	<i>69</i>
<i>Abort Macro PDF Entry</i>	<i>69</i>
Appendix A	
Sample Barcodes	71
2D Barcodes.....	71
<i>Data Matrix.....</i>	<i>71</i>
<i>Maxicode.....</i>	<i>71</i>
<i>QR Code</i>	<i>71</i>
<i>PDF417.....</i>	<i>71</i>
<i>MicroPDF417</i>	<i>71</i>
<i>US Postnet.....</i>	<i>72</i>
<i>UK Postal</i>	<i>72</i>
1D Barcodes.....	72
<i>EAN-13</i>	<i>72</i>

<i>EAN-8</i>	72
<i>UPC-A</i>	72
<i>UPC-E</i>	72
<i>Interleave 2 of 5</i>	72
<i>Code 39</i>	73
<i>Code 128</i>	73
<i>EAN 128</i>	73
<i>Codabar</i>	73
<i>MSI</i>	73
<i>GS1 Limited</i>	73
Appendix B	
Numeric Barcodes	75
Appendix C	
ASCII Character Sets	77
Appendix D	
Worldwide Support	87

Chapter 1

Introduction

Introducing the MS842 Series

Your new scanner has been configured at the factory with default settings.

Since many host systems have unique formats and protocol requirements, Unitech provides a wide range of configurable features that may be selected using this barcode based configuration tool. Once the configuration is completed, the scanner stores the settings in nonvolatile memory (NOVRAM). NOVRAM saves the settings when the power is turned off.

Turn off the computer's power before connecting the scanner, and then power up the computer once the scanner is fully connected.

You can change a parameter value in the way described below:

- ✧ Scan the appropriate barcodes in this guide. These new values replace the standard default values in memory.

NOTE: Most computer monitors allow scanning the barcodes directly on the screen. When scanning from the screen, be sure to set the document magnification to a level where you can see the barcode clearly, and bars and/or spaces are not merging.

Select a host type (see each host chapter for specific host information) after the power-up beep signal activates. This is only necessary upon the first power-up when connected to a new host.

To return all features to default values, scan the [Set Default Parameter](#) barcodes in Chapter 2. Throughout the programming barcode menus, asterisks (*) indicate default values.



Report Version


Scan the barcode below to report the version of software currently installed in the decoder.





Package Contents

Please make sure the following contents are in the MS842 package box. If something is missing or damaged, please contact your Unitech representative.




Scanner-only package (MS842)

			
2D imager scanner	Power adapter (1010-601959G)	USB Cable (1550-900040G)	User's manual CD

Scanner-and-USB dongle package (MS842P)

				
2D imager scanner	Power adapter (1010-900014G)	USB dongle (5500-900008G)	USB cable (60cm) (1550-900058G)	User's manual CD


Scanner-and-Cradle package (MS842P)

		
2D imager scanner	USB dongle (5500-900008G)	Cradle (5000-900008G)
		
Power adapter (1010-900014G)	USB Cable (150cm) (1550-600626G)	User's manual CD

Note:

1. The items included in the package may be different, depending on your order. Save the box and packaging material for future use in case you need to store or ship the scanner.
2. When you receive and unpack the package at first time, if any item above is lost, please contact the dealer you bought from, immediately.

[Scanner Body Aspect for MS842P]

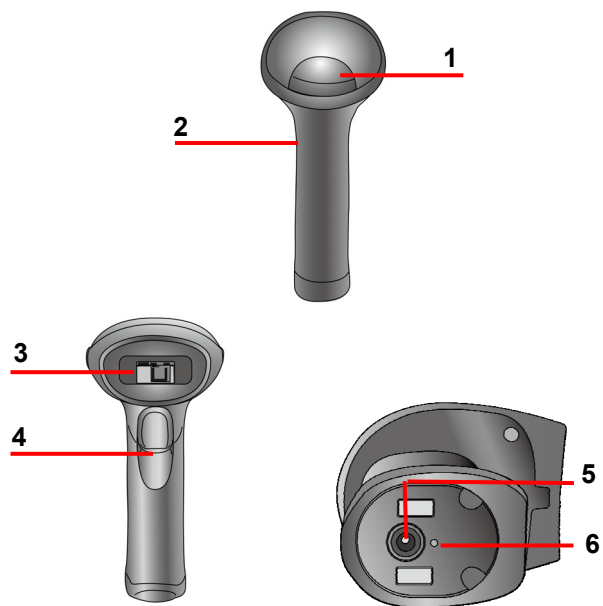


1	LED indicator	2	Scanner Grip
3	Laser Exit Window	4	Trigger
5	Scanner Contact Points for Charge	6	Reset Pinhole

USB Interface

This chapter describes how to set up the digital scanner with a USB host. The digital scanner connects directly to a USB host, or a powered USB hub, which powers it. No additional power supply is required.

Note: Most computer monitors allow scanning the barcodes directly on the screen. When scanning from the screen, be sure to set the document magnification to a level where you can see the barcode clearly, and bars and/or spaces are not merging.

Connecting a USB Interface (for MS842)

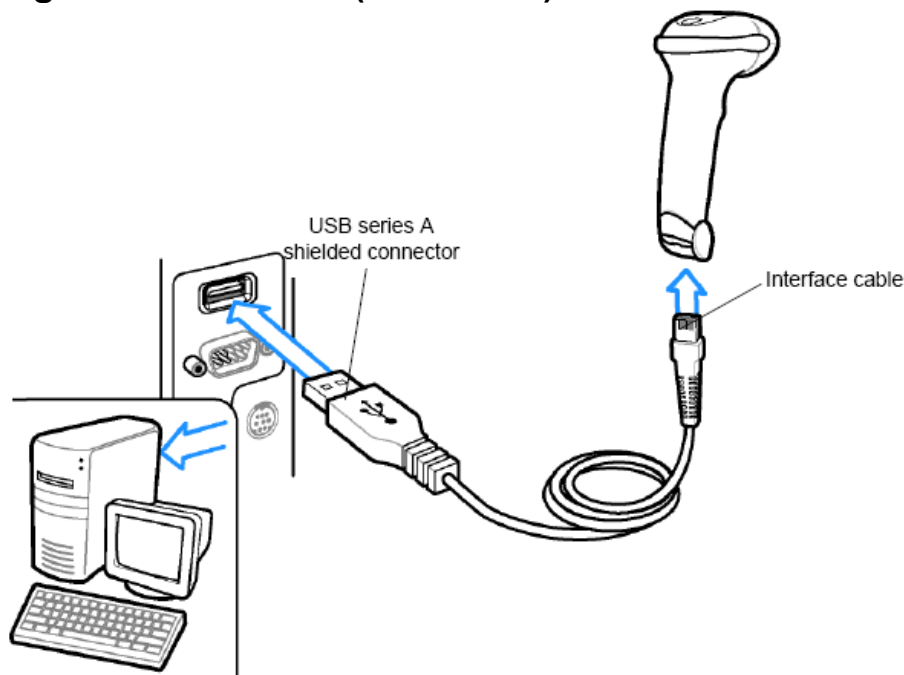

The digital scanner also interfaces with other USB hosts which support USB Human Interface Devices (HID).

Note: Interface cables vary depending on configuration. The connectors illustrated above are examples only. The connectors may be different than those illustrated, but the steps to connect the digital scanner are the same.


1. Connect the modular connector of the USB interface cable to the cable interface port on the digital scanner.
2. Plug the series A connector in the USB host or hub, or plug the Plus Power connector in an available port of the IBM SurePOS terminal.
3. Select the USB device type by scanning the appropriate barcode from USB Device Type.
4. On first installation when using Windows, the software prompts to select or install the Human Interface Device driver. To install this driver, provided by Windows, click Next through all the choices and click Finished on the last choice. The digital scanner powers up during this installation.
5. To modify any other parameter options, scan the appropriate barcodes in this chapter.

Connecting a USB Interface, Dongle Mode (for MS842P)


Dongle Mode (with SCM support)

In order to establish a proper connection between your computer and a scanner through a dongle, we suggest that you follow these step-by-step instructions:


1. Turn on your computer or laptop PC.
2. Insert a dongle into a USB port of the computer or laptop PC.

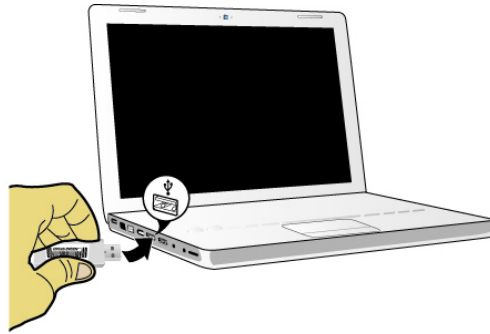

3. Scan the MAC address of the dongle by using the MS842P scanner.

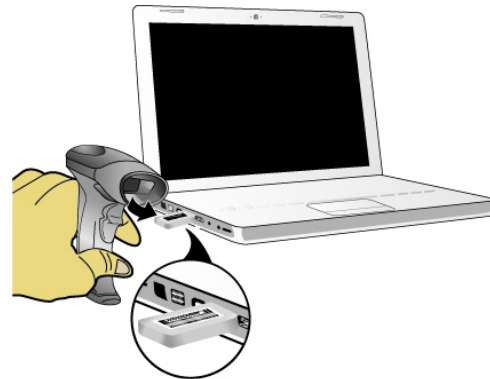

4. When being successfully connected to the dongle, the scanner will beep shortly one time with a high tone.

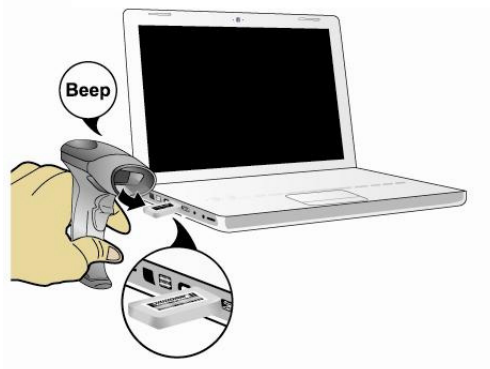


You can also connect the MS842P scanner optionally to another dongle by following the steps made below.


1. Scan the Disconnection barcode.




2. Insert another dongle into a USB port of the computer or laptop PC.

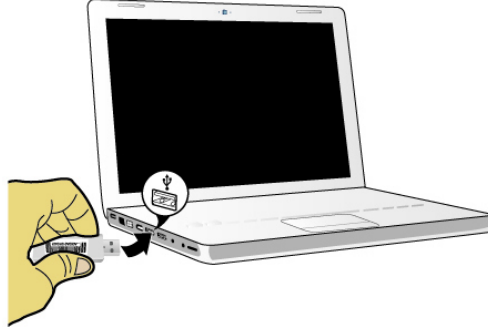

3. Scan the MAC address of the dongle by using the MS842P scanner.

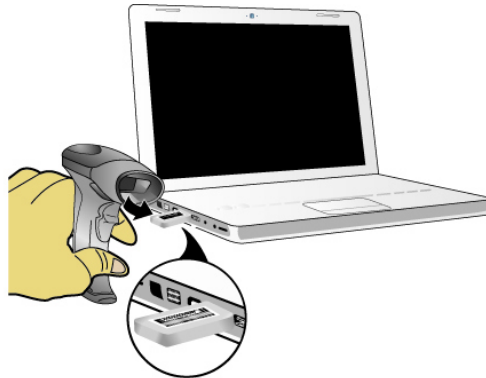

4. When being successfully connected to the dongle, the scanner will beep shortly one time with a high tone.

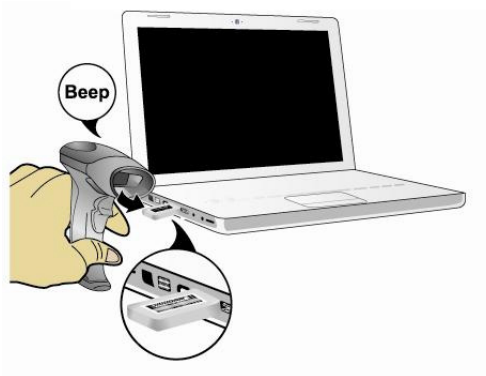


Connecting a USB Interface, Cradle Mode (for MS842P)


Cradle Mode (without SCM support)

In order to establish a proper connection between your computer and a scanner through a cradle into which a dongle is inserted, we suggest that you follow these step-by-step instructions:


1. Turn on your computer or laptop PC.
2. Plug the adapter cable into the power socket on the cradle.

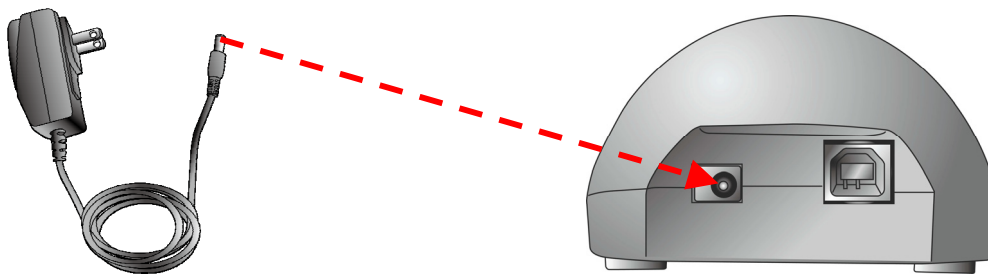


3. Plug the AC adapter cord into an electrical outlet.

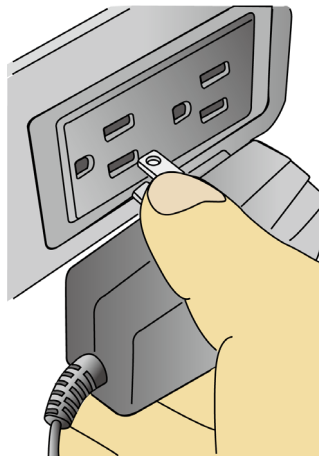


4. Connect the cradle to the USB port of your computer with a USB cable for transferring data to your computer by using the MS842P scanner.

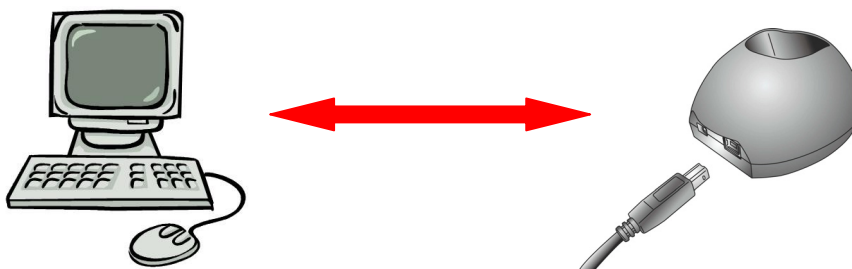

5. Insert a USB dongle into the USB port of the cradle.

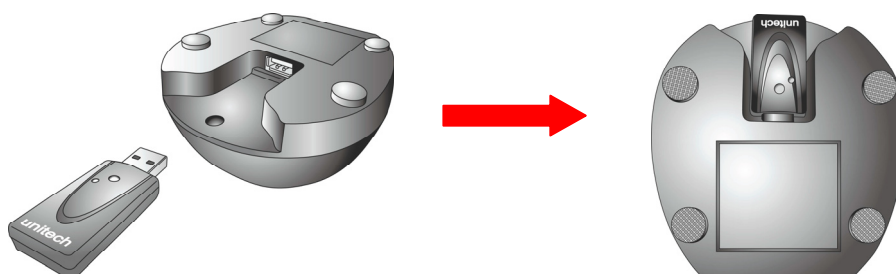


6. Scan the MAC address of the dongle by using the MS842P scanner.

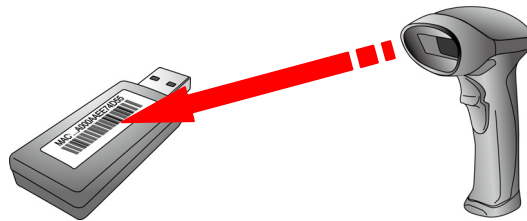

7. When being successfully connected to the dongle, the scanner will beep shortly one time with a high tone.

When being not used, the scanner can be also set on the cradle for battery charging.

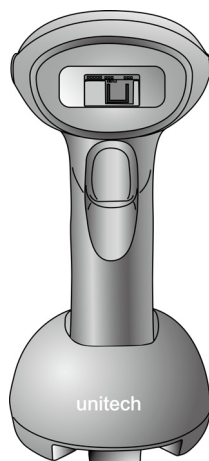

USB Host Parameters

USB Device Type

Select the desired USB device type.



HID Keyboard Emulation



USB Virtual COM

USB Transmission Speed Parameters

Use the following parameters to speed USB data transmission:

- **USB Polling Interval** - When using more current USB systems, use this parameter to set a lower interval in order to increase data transmission speed.
- **Fast HID Keyboard** - When configured as a USB HID keyboard device, use this parameter to increase the data transmission speed of printable (7-bit) ASCII characters.
- **Quick Keypad Emulation** - When configured as a USB HID keyboard device, use this parameter to increase the data transmission speed of a mix of both printable (7-bit) and full (8-bit) ASCII characters.

Note: **Emulate Keypad** and **Quick Emulation** override **Fast HID**.

USB Polling Interval

This option speeds data transmission for all USB devices except CDC. Scan a barcode below to set the polling interval. The polling interval determines the rate at which data can be sent between the scanner and the host computer. A lower number indicates a faster data rate. The default value is 8 msec.

Changing the polling interval re-initializes the scanner.



CAUTION Ensure your host machine can handle the selected data rate. Selecting a data rate that is too fast for the host can result in lost data.



1 msec



2 msec



3msec



4 msec



5 msec



6 msec



7 msec



*8 msec



9 msec

Fast HID Keyboard

This option transmits USB HID keyboard data at a faster rate.

Note: **Quick Emulation** overrides **Fast HID**.



Enable




* Disable

USB Country Keyboard Types - Country Codes

Scan the barcode corresponding to the keyboard type. This setting applies only to the USB HID Keyboard Emulation device.

Note: When changing USB country keyboard types the decoder automatically resets and issues the standard startup beep sequences.



*North American Standard USB Keyboard



German Windows



French Windows




French Canadian Windows 2000/XP



Spanish Windows



Swedish Windows



Japanese Windows (ASCII)



French Canadian Windows 95/98



French Belgian Windows



Italian Windows



UK English Windows



Portuguese-Brazilian Windows

ASCII Character Set for USB

USB Prefix/Suffix Values

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.acter	Keystroke
1000	%U	CTRL 2
1001	\$A	CTRL A
1002	\$B	CTRL B
1003	\$C	CTRL C
1004	\$D	CTRL D
1005	\$E	CTRL E
1006	\$F	CTRL F
1007	\$G	CTRL G
1008	\$H	CTRL H/ BACKSPACE ¹
1009	\$I	CTRL I/ HORIZONTAL TAB ¹
1010	\$J	CTRL J
1011	\$K	CTRL K
1012	\$L	CTRL L
1013	\$M	CTRL M/ ENTER ¹
1014	\$N	CTRL N
1015	\$O	CTRL O
1016	\$P	CTRL P
1017	\$Q	CTRL Q
1018	\$R	CTRL R
1019	\$S	CTRL S
1020	\$T	CTRL T
1021	\$U	CTRL U
1022	\$V	CTRL V
1023	\$W	CTRL W
1024	\$X	CTRL X
1025	\$Y	CTRL Y
1026	\$Z	CTRL Z
1027	%A	CTRL [/ESC ¹
1028	%B	CTRL \
1029	%C	CTRL]
1030	%D	CTRL 6
1031	%E	CTRL -
1032	Space	Space

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.acter	Keystroke
1033	/A	!
1034	/B	“
1035	/C	#
1036	/D	\$
1037	/E	%
1038	/F	&
1039	/G	‘
1040	/H	(
1041	/I	)
1042	/J	*
1043	/K	+
1044	/L	,
1045	-	-
1046	.	.
1047	/O	/
1048	0	0
1049	1	1
1050	2	2
1051	3	3
1052	4	4
1053	5	5
1054	6	6
1055	7	7
1056	8	8
1057	9	9
1058	/Z	:
1059	%F	;
1060	%G	<
1061	%H	=
1062	%I	>
1063	%J	?
1064	%V	@
1065	A	A
1066	B	B
1067	C	C

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.acter	Keystroke
1068	D	D
1069	E	E
1070	F	F
1071	G	G
1072	H	H
1073	I	I
1074	J	J
1075	K	K
1076	L	L
1077	M	M
1078	N	N
1079	O	O
1080	P	P
1081	Q	Q
1082	R	R
1083	S	S
1084	T	T
1085	U	U
1086	V	V
1087	W	W
1088	X	X
1089	Y	Y
1090	Z	Z
1091	%K	[
1092	%L	\
1093	%M	]
1094	%N	^
1095	%O	_
1096	%W	`
1097	+A	a
1098	+B	b
1099	+C	c
1100	+D	d
1101	+E	e
1102	+F	f

Prefix/ Suffix Value	Full ASCII Code 39 Encode Char.acter	Keystroke
1103	+G	g
1104	+H	h
1105	+I	i
1106	+J	j
1107	+K	k
1108	+L	l
1109	+M	m
1110	+N	n
1111	+O	o
1112	+P	p
1113	+Q	q
1114	+R	r
1115	+S	s
1116	+T	t
1117	+U	u
1118	+V	v
1119	+W	w
1120	+X	x
1121	+Y	y
1122	+Z	z
1123	%P	{
1124	%Q	
1125	%R	}
1126	%S	~

¹The keystroke in bold transmits only if you enable *Function Key Mapping*. Otherwise, the unbolded keystroke transmits.

USB ALT Key Character Set

ALT Keys	Keystroke
2064	ALT 2
2065	ALT A
2066	ALT B
2067	ALT C
2068	ALT D
2069	ALT E
2070	ALT F
2071	ALT G
2072	ALT H
2073	ALT I
2074	ALT J
2075	ALT K
2076	ALT L
2077	ALT M
2078	ALT N
2079	ALT O
2080	ALT P
2081	ALT Q
2082	ALT R
2083	ALT S
2084	ALT T
2085	ALT U
2086	ALT V
2087	ALT W
2088	ALT X
2089	ALT Y
2090	ALT Z

USB GUI Key Character Set

GUI Key	Keystroke
3000	Right Control Key
3048	GUI 0
3049	GUI 1
3050	GUI 2
3051	GUI 3
3052	GUI 4
3053	GUI 5
3054	GUI 6
3055	GUI 7
3056	GUI 8
3057	GUI 9
3065	GUI A
3066	GUI B
3067	GUI C
3068	GUI D
3069	GUI E
3070	GUI F
3071	GUI G
3072	GUI H
3073	GUI I
3074	GUI J
3075	GUI K
3076	GUI L
3077	GUI M
3078	GUI N
3079	GUI O
3080	GUI P
3081	GUI Q
3082	GUI R
3083	GUI S
3084	GUI T
3085	GUI U
3086	GUI V
3087	GUI W
3088	GUI X

GUI Key	Keystroke
3089	GUI Y
3090	GUI Z

Note: GUI Shift Keys - The Apple™ iMac keyboard has an apple key on either side of the space bar.
Windows-based systems have a GUI key to the left of the left ALT key, and to the right of the right ALT key.

USB F Key Character Set

F Keys	Keystroke
5001	F1
5002	F2
5003	F3
5004	F4
5005	F5
5006	F6
5007	F7
5008	F8
5009	F9
5010	F10
5011	F11
5012	F12
5013	F13
5014	F14
5015	F15
5016	F16
5017	F17
5018	F18
5019	F19
5020	F20
5021	F21
5022	F22
5023	F23
5024	F24

USB Numeric Keypad Character Set

Numeric Keypad	Keystroke
6042	*
6043	+
6044	undefined
6045	-
6046	.
6047	/
6048	0
6049	1
6050	2
6051	3
6052	4
6053	5
6054	6
6055	7
6056	8
6057	9
6058	Enter
6059	Num Lock

USB Extended Keypad Character Set

Extended Keypad	Keystroke
7001	Break
7002	Delete
7003	PgUp
7004	End
7005	Pg Dn
7006	Pause
7007	Scroll Lock
7008	Backspace
7009	Tab
7010	Print Screen
7011	Insert
7012	Home
7013	Enter
7014	Escape
7015	Up Arrow


Extended Keypad	Keystroke
7016	Down Arrow
7017	Left Arrow
7018	Right Arrow

RS-232 Interface

This chapter describes how to set up the digital scanner with an RS-232 host. Use the RS-232 interface to connect the digital scanner to point-of-sale devices, host computers, or other devices with an available RS-232 port (e.g., com port).

Connecting an RS232 Interface

Connect the digital scanner directly to the host computer.

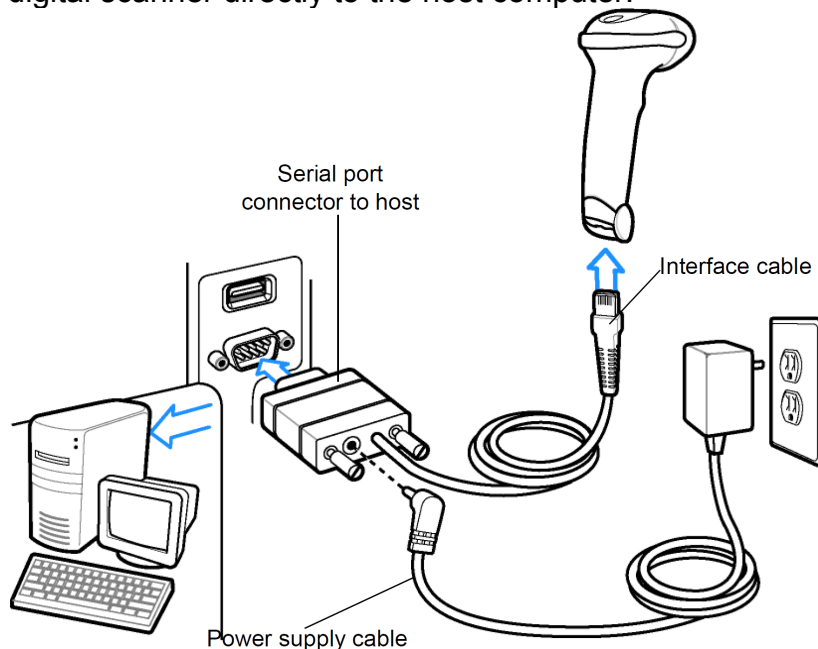

Note: *Interface cables vary depending on configuration. The connectors illustrated in above are examples only. The connectors may be different than those illustrated, but the steps to connect the digital scanner are the same.*

1. Attach the modular connector of the RS-232 interface cable to the cable interface port on the digital scanner.
2. Connect the other end of the RS-232 interface cable to the serial port on the host.
3. Connect the power supply to the serial connector end of the RS-232 interface cable. Plug the power supply into an appropriate outlet.
4. Select the RS-232 host type by scanning the appropriate barcode from *RS-232 Host Types*.
5. To modify any other parameter options, scan the appropriate barcodes in this chapter.

RS-232 Host Types

To select an RS-232 host interface, scan one of the following barcodes.



* Standard RS-232¹



ICL RS-232



Wincor-Nixdorf RS-232 Mode A



Wincor-Nixdorf RS-232 Mode B



Olivetti ORS4500



Omron



OPOS/JPOS



Fujitsu RS-232



CUTE¹

¹Scanning Standard RS-232 activates the RS-232 driver, but does not change port settings (e.g., parity, data bits, handshaking). Selecting another RS-232 host type barcode changes these settings. The CUTE host disables all parameter scanning, including Set Defaults. If you inadvertently select CUTE, scan **Enable Parameter Barcode Scanning*, and then change the host selection.

Baud Rate

Baud rate is the number of bits of data transmitted per second. Set the digital scanner's baud rate to match the baud rate setting of the host device. Otherwise, data may not reach the host device or may reach it in distorted form.

Note: *The digital scanner does not support baud rates below 9600.*



* Baud Rate 9600




Baud Rate 19,200



Baud Rate 230,400



Baud Rate 38,400



Baud Rate 460,800



Baud Rate 57,600



Baud Rate 115,200



Baud Rate 921,600

Parity

A parity check bit is the most significant bit of each ASCII coded character. Select the parity type according to host device requirements.

- Select **Odd** parity to set the parity bit value to 0 or 1, based on data, to ensure that the coded character contains an odd number of 1 bits.
- Select **Even** parity to set the parity bit value is set to 0 or 1, based on data, to ensure that the coded character contains an even number of 1 bits.
- Select **None** when no parity bit is required.



Odd



Even



* None

Stop Bit Select

The stop bit(s) at the end of each transmitted character marks the end of transmission of one character and prepares the receiving device for the next character in the serial data stream. Select the number of stop bits (one or two) based on the number the receiving terminal is programmed to accommodate. Set the number of stop bits to match host device requirements.



* 1 Stop Bit



2 Stop Bits

Data Bits

This parameter allows the digital scanner to interface with devices requiring a 7-bit or 8-bit ASCII protocol.



7-Bit



* 8-Bit

Check Receive Errors

Select whether or not to check the parity, framing, and overrun of received characters. The parity value of received characters is verified against the parity parameter selected above.



* Check For Received Errors



Do Not Check For Received Errors

Hardware Handshaking

The data interface consists of an RS-232 port designed to operate either with or without the hardware handshaking lines, *Request to Send* (RTS), and *Clear to Send* (CTS).

Disable Standard RTS/CTS handshaking to transmit scan data as it becomes available. Select Standard RTS/CTS handshaking to transmit scan data according to the following sequence:

- The digital scanner reads the CTS line for activity. If CTS is asserted, the scanner waits up to Host Serial Response Time-out for the host to de-assert the CTS line. If, after Host Serial Response Time-out (default), the CTS line is still asserted, the scanner sounds a transmit error, and discards any scanned data.
- When the CTS line is de-asserted, the digital scanner asserts the RTS line and waits up to Host Serial Response Time-out for the host to assert CTS. When the host asserts CTS, the scanner transmits data. If, after Host Serial Response Time-out (default), the CTS line is not asserted, the scanner sounds a transmit error, and discards the data.
- When data transmission completes, the digital scanner de-asserts RTS 10 msec after sending the last character.
- The host should respond by negating CTS. The digital scanner checks for a de-asserted CTS upon the next transmission of data.

During the transmission of data, the CTS line should be asserted. If CTS is deasserted for more than 50 ms between characters, the digital scanner aborts transmission, sounds a transmission error, and discards the data.

If this communication sequence fails, the digital scanner issues an error indication. In this case, the data is lost and must be rescanned.

If hardware handshaking and software handshaking are both enabled, hardware handshaking takes precedence.

Note: *The DTR signal is jumpered to the active state.*

- **None:** Scan this barcode to disable hardware handshaking.
- **Standard RTS/CTS:** Scan this barcode to select Standard RTS/CTS Hardware Handshaking.

- **RTS/CTS Option 1:** If you select RTS/CTS Option 1, the digital scanner asserts RTS before transmitting and ignores the state of CTS. The scanner de-asserts RTS when the transmission completes.
- **RTS/CTS Option 2:** If you select Option 2, RTS is always high or low (user-programmed logic level). However, the digital scanner waits for CTS to be asserted before transmitting data. If CTS is not asserted within Host Serial Response Time-out (default), the scanner issues an error indication and discards the data.
- **RTS/CTS Option 3:** If you select Option 3, the digital scanner asserts RTS prior to any data transmission, regardless of the state of CTS. The scanner waits up to Host Serial Response Time-out (default) for CTS to be asserted. If CTS is not asserted during this time, the scanner issues an error indication and discards the data. The digital scanner de-asserts RTS when transmission is complete.



* None



Standard RTS/CTS



RTS/CTS Option 1



RTS/CTS Option 2



RTS/CTS Option 3

Software Handshaking

This parameter offers control of the data transmission process in addition to, or instead of that offered by hardware handshaking. There are five options.

If software handshaking and hardware handshaking are both enabled, hardware handshaking takes precedence.

- **None:** Select this to transmit data immediately. The digital scanner expects no response from the host.
- **ACK/NAK:** If you select this option, after transmitting data, the digital scanner expects either an ACK or NAK response from the host. When it receives a NAK, the scanner transmits the same data again and waits for either an ACK or NAK. After three unsuccessful attempts to send data after receiving NAKs, the digital scanner issues an error indication and discards the data.

The digital scanner waits up to the programmable Host Serial Response Time-out to receive an ACK or NAK. If the scanner does not get a response in this time, it issues an error indication and discards the data. There are no retries

when a time-out occurs.

- **ENQ:** If you select this option, the digital scanner waits for an ENQ character from the host before transmitting data. If it does not receive an ENQ within the Host Serial Response Time-out, the digital scanner issues an error indication and discards the data. The host must transmit an ENQ character at least every Host Serial Response Time-out to prevent transmission errors.
- **ACK/NAK with ENQ:** This combines the two previous options. For re-transmissions of data, due to a NAK from the host, an additional ENQ is not required.
- **XON/XOFF:** An XOFF character turns the digital scanner transmission off until the scanner receives an XON character. There are two situations for XON/XOFF:
 - The digital scanner receives an XOFF before has data to send. When the scanner has data to send, it waits up to Host Serial Response Time-out for an XON character before transmission. If it does not receive the XON within this time, the digital scanner issues an error indication and discards the data.
 - The digital scanner receives an XOFF during a transmission. Data transmission then stops after sending the current byte. When the digital scanner receives an XON character, it sends the rest of the data message. The digital scanner waits indefinitely for the XON.



* None



ACK/NAK



ENQ



ACK/NAK with ENQ



XON/XOFF

Host Serial Response Time-out

This parameter specifies how long the digital scanner waits for an ACK, NAK, or CTS before determining that a transmission error occurred. This only applies when in one of the ACK/NAK software handshaking modes, or RTS/CTS hardware handshaking mode.



* Minimum: 2 Sec



Low: 2.5 Sec



Medium: 5 Sec



High: 7.5 Sec



Maximum: 9.9 Sec

RTS Line State

This parameter sets the idle state of the Serial Host RTS line. Scan a barcode below to select **Low RTS** or **High RTS** line state.



* Host: Low RTS



Host: High RTS

Beep on <BEL>

If you enable this parameter, the digital scanner issues a beep when it detects a <BEL> character on the RS-232 serial line. <BEL> indicates an illegal entry or other important event.



Beep On <BEL> Character
(Enable)



* Do Not Beep On <BEL> Character
(Disable)

Intercharacter Delay

This parameter specifies the intercharacter delay inserted between character transmissions.



* Minimum: 0 msec



Low: 25 msec



Medium: 50 msec



High: 75 msec



Maximum: 99 msec

ASCII Character Set for Serial Hosts

You can assign the values in the table made below as prefixes or suffixes for ASCII character data transmission.

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1000	%U	NUL
1001	\$A	SOH
1002	\$B	STX
1003	\$C	ETX
1004	\$D	EOT
1005	\$E	ENQ
1006	\$F	ACK
1007	\$G	BELL
1008	\$H	BCKSPC
1009	\$I	HORIZ TAB
1010	\$J	LF/NW LN
1011	\$K	VT
1012	\$L	FF
1013	\$M	CR/ENTER
1014	\$N	SO
1015	\$O	SI
1016	\$P	DLE
1017	\$Q	DC1/XON
1018	\$R	DC2
1019	\$S	DC3/XOFF
1020	\$T	DC4
1021	\$U	NAK
1022	\$V	SYN
1023	\$W	ETB
1024	\$X	CAN
1025	\$Y	EM
1026	\$Z	SUB
1027	%A	ESC
1028	%B	FS
1029	%C	GS
1030	%D	RS
1031	%E	US
1032	Space	Space

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1033	/A	!
1034	/B	"
1035	/C	#
1036	/D	\$
1037	/E	%
1038	/F	&
1039	/G	'
1040	/H	(
1041	/I	)
1042	/J	*
1043	/K	+
1044	/L	,
1045	-	-
1046	.	.
1047	/O	/
1048	0	0
1049	1	1
1050	2	2
1051	3	3
1052	4	4
1053	5	5
1054	6	6
1055	7	7
1056	8	8
1057	9	9
1058	/Z	:
1059	%F	;
1060	%G	<
1061	%H	=
1062	%I	>
1063	%J	?
1064	%V	@
1065	A	A
1066	B	B
1067	C	C

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1068	D	D
1069	E	E
1070	F	F
1071	G	G
1072	H	H
1073	I	I
1074	J	J
1075	K	K
1076	L	L
1077	M	M
1078	N	N
1079	O	O
1080	P	P
1081	Q	Q
1082	R	R
1083	S	S
1084	T	T
1085	U	U
1086	V	V
1087	W	W
1088	X	X
1089	Y	Y
1090	Z	Z
1091	%K	[
1092	%L	\
1093	%M	]
1094	%N	^
1095	%O	_
1096	%W	`
1097	+A	a
1098	+B	b
1099	+C	c
1100	+D	d
1101	+E	e
1102	+F	f

Prefix/Suffix Value	Full ASCII Code 39 Encode Character	ASCII Character
1103	+G	g
1104	+H	h
1105	+I	i
1106	+J	j
1107	+K	k
1108	+L	l
1109	+M	m
1110	+N	n
1111	+O	o
1112	+P	p
1113	+Q	q
1114	+R	r
1115	+S	s
1116	+T	t
1117	+U	u
1118	+V	v
1119	+W	w
1120	+X	x
1121	+Y	y
1122	+Z	z
1123	%P	{
1124	%Q	
1125	%R	}
1126	%S	~
1127		Undefined
7013		ENTER

Chapter 2

Output Data Editing

Transmit Code ID Character

A Code ID character identifies the code type of a scanned barcode. This is useful when decoding more than one code type. In addition to any single character prefix already selected, the Code ID character is inserted between the prefix and the decoded symbol.

Select no Code ID character, a Symbol Code ID character, or an AIM Code ID character.

Note: If you enable Symbol Code ID Character or AIM Code ID Character, and enable [Transmit "No Read" Message](#), the digital scanner appends the code ID for Code 39 to the NR message.



Symbol Code ID Character



AIM Code ID Character



* None

Prefix/Suffix Values

You can append a prefix and/or one or two suffixes to scan data for use in data editing. To set a value for a prefix or suffix, scan a four-digit number (i.e., four barcodes) that corresponds to that value.

When using host commands to set the prefix or suffix, set the key category parameter to 1, then set the 3-digit decimal value.

To correct an error or change a selection, scan [Cancel](#).



Cancel

Note: To use Prefix/Suffix values, first set the [Scan Data Transmission Format as shown below](#).



Scan Prefix



Scan Suffix 1



Scan Suffix 2



Data Format Cancel

Scan Data Transmission Format

To change the scan data format, scan one of the following eight barcodes corresponding to the desired format.

Note: If using this parameter, do not use ADF rules to set the prefix/suffix.

To set values for the prefix and/or suffix, see [Prefix/Suffix Values](#).



* Data As Is



<DATA> <SUFFIX 1>



<DATA> <SUFFIX 2>



<DATA> <SUFFIX 1> <SUFFIX 2>



<PREFIX> <DATA>



<PREFIX> <DATA> <SUFFIX 1>



<PREFIX> <DATA> <SUFFIX 2>



<PREFIX> <DATA> <SUFFIX 1> <SUFFIX 2>

FN1 Substitution Values

The wedge and USB HID keyboard hosts support a FN1 Substitution feature. Enabling this substitutes any FN1 character (0x1b) in an EAN128 barcode with a value. This value defaults to 7013 (Enter key).

When using host commands to set the FN1 substitution value, set the key category parameter to 1, and then set the 3-digit keystroke value. See the ASCII character set table for the current host interface for the desired value.

To select a FN1 substitution value via barcode menus:

1. Scan the barcode below.



Set FN1 Substitution Value

2. Locate the keystroke desired for FN1 substitution in the ASCII character set table in the appropriate host interface chapter. Enter the 4-digit ASCII value by scanning each digit.

To correct an error or change the selection, scan *Cancel*.



Cancel

Chapter 3

Barcode Setup Menu

User Preferences

Set Default Parameter

You can reset the digital scanner to two types of defaults: factory defaults or custom defaults. Scan the appropriate barcode below to reset the digital scanner to its default settings and/or set its current settings as custom defaults.

Set Defaults - Scan this barcode to reset all default parameters. If you previously set custom defaults by scanning Write to Custom Defaults, scan Set Defaults to retrieve and restore the digital scanner's custom default settings.

Write to Custom Defaults - Scan this barcode to set the current digital scanner settings as custom defaults.



* Set Defaults



Write to Custom Defaults

Parameter Scanning

To disable decoding of parameter barcodes, scan the Scanning barcode below. Note that the parameter barcode can still be decoded. To enable decoding of parameter barcodes, either scan Enable Parameter Scanning or Set All Defaults.



* Enable Parameter Bar Code Scanning



Disable Parameter Bar Code Scanning

Beeper Tone

To select a decode beep frequency (tone), scan one of the following barcodes.



Off



Low Tone



* Medium Tone



High Tone



Medium to High Tone (2-tone)

Beeper Volume

To select a beeper volume, scan the Low Volume, Medium Volume, or High Volume barcode.



Low Volume



Medium Volume



* High Volume

Suppress Power-up Beeps

Select whether or not to suppress the digital scanner's power-up beeps.



* Do Not Suppress Power-up Beeps



Suppress Power-up Beeps

Beeper Preferences

Scan a barcode below to select whether or not the digital scanner beeps after a good decode. If selecting **Do Not Beep After Good Decode**, the beeper still operates during parameter menu scanning and to indicate error conditions.



* Beep After Good Decode
(Enable)



Do Not Beep After Good Decode
(Disable)

Beeper Duration

To select the duration for the beeper, scan one of the following barcodes.



Short



* Medium



Long

Trigger Modes

Select one of the following trigger modes for the digital scanner:

- **Standard (Level)** - A trigger pull activates decode processing. Decode processing continues until the barcode decodes, you release the trigger, or the Decode Session Timeout occurs.
- **Presentation (Blink)** - The digital scanner activates decode processing when it detects a barcode in its field of view. After a period of non-use, the digital scanner enters a low power mode, in which the LEDs turn off until the digital scanner senses motion.
- **Host** - A host command issues the triggering signal. The decoder interprets an actual trigger pull as a Level triggering option.
- **Auto Aim** - This trigger mode turns on the LED aiming dot when the scanner is lifted. A trigger pull activates decode processing. After 2 seconds of inactivity the aiming pattern shuts off.
- **Auto Aim with Illumination** - This trigger mode turns on the aiming pattern and internal illumination LEDs when the decoder senses motion. A trigger pull activates decode processing. After 2 seconds of inactivity the aiming pattern and internal illumination LEDs automatically shut off.



***Standard (Level)**



Presentation (Blink)



Host



Auto Aim



Auto Aim with Illumination

Low Power Mode

This parameter determines whether or not the digital scanner enters low power mode after a decode attempt. If disabled, power remains on after each decode attempt.



*** Disable Low Power Mode**



Enable Low Power Mode

Time Delay to Low Power Mode

This parameter sets the time the decoder remains active after decoding. After a scan session, the decoder waits this amount of time before entering Low Power Mode.

Note: This parameter only applies when **Power Mode** is set to **Low**.



***1 Second**



5 Seconds



1 Minute



5 Minutes



15 Minutes



1 Hour

Video Mode

In this mode the decoder behaves as a video camera as long as the trigger is active. Upon trigger release, the decoder returns to Decode Mode. Scan the **Video Mode** barcode to temporarily enter Video Capture Mode.



Snapshot Mode



Video Mode

Image File Format Selector

Select an image format appropriate for the system (BMP, TIFF, or JPEG). The decoder stores captured images in the selected format.



BMP File Format



***JPEG File Format**



TIFF File Format

Video View Finder

Select **Enable Video View Finder** to project the video view finder while in Image Mode, or **Disable Video View Finder** to turn the video view finder off.



***Disable Video View Finder**



Enable Video View Finder

Chapter 4

Barcode Symbolologies

Introduction

This section allows you to change settings for each symbology. After selecting a symbology from the scanner settings section, you can change the options for that symbology. To change any attribute's setting, double click it in the settings workspace. Below is a list of supported symbolologies with configurable settings. For in depth options for each symbology, please refer to the help file.

1D Symbolologies

UPC/EAN
Bookland EAN
UCC Coupon Code
ISSN EAN
Code 128
GS1-128
ISBT 128
Code 39
Trioptic Code 39
Code 32
Code 93
Code 11
Interleaved 2 of 5
Discrete 2 of 5
Codabar
MSI
Chinese 2 of 5
Matrix 2 of 5
Korean 3 of 5
Inverse 1D
GS1 DataBar
Composite Codes

2D Symbolologies

PDF417
MicroPDF417
Data Matrix
Data Matrix Inverse
Maxicode
QR Code
MicroQR
QR Inverse
Aztec
Aztec Inverse

Postal Codes

US Postnet
US Planet
UK Postal
Japan Postal
Australian Postal
Netherlands KIX Code
USPS 4CB/One Code/Intelligent Mail
UPU FICS Postal

Symbol Code Identifiers

The Symbol Code Characters are listed below in the table.

Code Character	Code Type
A	UPC-A, UPC-E, UPC-E1, EAN-8, EAN-13
B	Code 39, Code 32
C	Codabar
D	Code 128, ISBT 128, ISBT 128 Concatenated
E	Code 93
F	Interleaved 2 of 5
G	Discrete 2 of 5, or Discrete 2 of 5 IATA
H	Code 11
J	MSI
K	GS1-128
L	Bookland EAN
M	Trioptic Code 39
N	Coupon Code
R	GS1 DataBar Family
S	Matrix 2 of 5
T	UCC Composite, TLC 39
U	Chinese 2 of 5
V	Korean 3 of 5
X	ISSN EAN, PDF417, Macro PDF417, Micro PDF417
z	Aztec, Aztec Rune
P00	Data Matrix
P01	QR Code, MicroQR
P02	Maxicode
P03	US Postnet
P04	US Planet
P05	Japan Postal
P06	UK Postal
P08	Netherlands KIX Code
P09	Australia Post
P0A	USPS 4CB/One Code/Intelligent Mail
P0B	UPU FICS Postal

UPC-A

Enable/Disable UPC-A

To enable or disable UPC-A, scan the appropriate barcode below.



*Enable UPC-A



Disable UPC-A

Transmit UPC-A Check Digit

The check digit is the last character of the symbol used to verify the integrity of the data. Scan the appropriate barcode below to transmit the barcode data with or without the UPC-A check digit. It is always verified to guarantee the integrity of the data.



*Transmit UPC-A Check Digit



Do Not Transmit UPC-A Check Digit

UPC-A Preamble

Preamble characters are part of the UPC symbol, and include Country Code and System Character. There are three options for transmitting a UPC-A preamble to the host device: transmit System Character only, transmit System Character and Country Code ("0" for USA), and transmit no preamble. Select the appropriate option to match the host system.



No Preamble (<DATA>)



*System Character (<SYSTEM CHARACTER> <DATA>)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>)

UPC-E

Enable/Disable UPC-E

To enable or disable UPC-E, scan the appropriate barcode below.



*Enable UPC-E



Disable UPC-E

Transmit UPC-E Check Digit

The check digit is the last character of the symbol used to verify the integrity of the data. Scan the appropriate barcode below to transmit the barcode data with or without the UPC-E check digit. It is always verified to guarantee the integrity of the data.



*Transmit UPC-E Check Digit



Do Not Transmit UPC-E Check Digit

UPC-E Preamble

Preamble characters are part of the UPC symbol, and include Country Code and System Character. There are three options for transmitting a UPC-E preamble to the host device: transmit System Character only, transmit System Character and Country Code ("0" for USA), and transmit no preamble. Select the appropriate option to match the host system.



No Preamble (<DATA>)



*System Character (<SYSTEM CHARACTER> <DATA>)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>)

Code 39

Enable/Disable Code 39

To enable or disable Code 39, scan the appropriate barcode below.



*Enable Code 39



Disable Code 39

Code 39 Check Digit Verification

Enable this feature to check the integrity of all Code 39 symbols to verify that the data complies with specified check digit algorithm. Only Code 39 symbols which include a modulo 43 check digit are decoded. Enable this feature if the Code 39 symbols contain a Modulo 43 check digit.



Enable Code 39 Check Digit



*Disable Code 39 Check Digit

Transmit Code 39 Check Digit

Scan a barcode below to transmit Code 39 data with or without the check digit.



Transmit Code 39 Check Digit (Enable)



*Do Not Transmit Code 39 Check Digit (Disable)

Note: Code 39 Check Digit Verification must be enabled for this parameter to function.

Code 39 Full ASCII Conversion

Code 39 Full ASCII is a variant of Code 39 which pairs characters to encode the full ASCII character set. To enable or disable Code 39 Full ASCII, scan the appropriate barcode below.



Enable Code 39 Full ASCII



*Disable Code 39 Full ASCII

Note: You cannot enable Trioptic Code 39 and Code 39 Full ASCII simultaneously.

Code 39 Full ASCII to Full ASCII Correlation is host-dependent, and is therefore described in the ASCII Character Set Table for the appropriate interface. See the section -- [ASCII Character Set for USB](#) -- or the section -- [ASCII Character Set for Serial Hosts](#).

UPC-E1

Enable/Disable UPC-E1

UPC-E1 is disabled by default.

To enable or disable UPC-E1, scan the appropriate barcode below.



Enable UPC-E1



*Disable UPC-E1

Note: UPC-E1 is not a UCC (Uniform Code Council) approved symbology.

Transmit UPC-E1 Check Digit

The check digit is the last character of the symbol used to verify the integrity of the data. Scan the appropriate barcode below to transmit the barcode data with or without the UPC-E1 check digit. It is always verified to guarantee the integrity of the data.



*Transmit UPC-E1 Check Digit



Do Not Transmit UPC-E1 Check Digit

UPC-E1 Preamble

Preamble characters are part of the UPC symbol, and include Country Code and System Character. There are three options for transmitting a UPC-E1 preamble to the host device: transmit System Character only, transmit System Character and Country Code ("0" for USA), and transmit no preamble. Select the appropriate option to match the host system.



No Preamble (<DATA>)



*System Character (<SYSTEM CHARACTER> <DATA>)



System Character & Country Code
(< COUNTRY CODE> <SYSTEM CHARACTER> <DATA>)

EAN-13/JAN-13

Enable/Disable EAN-13/JAN-13

To enable or disable EAN-13/JAN-13, scan the appropriate barcode below.



*Enable EAN-13/JAN-13



Disable EAN-13/JAN-13

Bookland EAN

Enable/Disable Bookland EAN

To enable or disable Bookland EAN, scan the appropriate barcode below.



*Enable Bookland EAN



Disable Bookland EAN

Note: If Bookland EAN is enabled, select a [Bookland ISBN Format](#). Also select either Decode UPC/EAN Supplementals, Autodiscriminate UPC/EAN Supplementals, or Enable 978/979 Supplemental Mode in [Decode UPC/EAN/JAN Supplementals](#).

Bookland ISBN Format

If Bookland EAN is enabled, select one of the following formats for Bookland data:

- **Bookland ISBN-10** - The decoder reports Bookland data starting with 978 in traditional 10-digit format with the special Bookland check digit for backward-compatibility. Data starting with 979 is not considered Bookland in this mode.
- **Bookland ISBN-13** - The decoder reports Bookland data (starting with either 978 or 979) as EAN-13 in 13-digit format to meet the 2007 ISBN-13 protocol.



*Bookland ISBN-10



Bookland ISBN-13

Decode UPC/EAN/JAN Supplementals



Decode UPC/EAN/JAN Only With Supplementals



*Ignore Supplementals



Autodiscriminate UPC/EAN/JAN Supplementals

EAN-8/JAN-8

Enable/Disable EAN-8/JAN-8

To enable or disable EAN-8/JAN-8, scan the appropriate barcode below.



*Enable EAN-8/JAN-8



Disable EAN-8/JAN-8

Code 128

Enable/Disable Code 128

To enable or disable Code 128, scan the appropriate barcode below.



*Enable Code 128



Disable Code 128

GS1-128 (formerly UCC/EAN-128)

Enable/Disable GS1-128

To enable or disable GS1-128, scan the appropriate barcode below.



*Enable GS1-128



Disable GS1-128

ISBT 128

Enable/Disable ISBT 128

ISBT 128 is a variant of Code 128 used in the blood bank industry. Scan a barcode below to enable or disable ISBT 128. If necessary, the host must perform concatenation of the ISBT data.



*Enable ISBT 128



Disable ISBT 128

Convert UPC-E to UPC-A

Convert UPC-E to UPC-A (Enable/Disable)

Enable this to convert UPC-E (zero suppressed) decoded data to UPC-A format before transmission. After conversion, the data follows UPC-A format and is affected by UPC-A programming selections (e.g., Preamble, Check Digit).
Disable this to transmit UPC-E decoded data as UPC-E data, without conversion.



Convert UPC-E to UPC-A (Enable)



*Do Not Convert UPC-E to UPC-A (Disable)

Convert UPC-E1 to UPC-A

Convert UPC-E1 to UPC-A (Enable/Disable)

Enable this to convert UPC-E1 decoded data to UPC-A format before transmission. After conversion, the data follows UPC-A format and is affected by UPC-A programming selections (e.g., Preamble, Check Digit).
Disable this to transmit UPC-E1 decoded data as UPC-E1 data, without conversion.



Convert UPC-E1 to UPC-A (Enable)



*Do Not Convert UPC-E1 to UPC-A (Disable)

Convert Code 39 to Code 32

Convert Code 39 to Code 32 (Enable/Disable)

Code 32 is a variant of Code 39 used by the Italian pharmaceutical industry. Scan the appropriate barcode below to enable or disable converting Code 39 to Code 32.



Enable Convert Code 39 to Code 32



*Disable Convert Code 39 to Code 32

Note: Code 39 must be enabled for this parameter to function.

Convert I 2 of 5 to EAN-13

Convert I 2 of 5 to EAN-13 (Enable/Disable)

Enable this parameter to convert 14-character I 2 of 5 codes to EAN-13, and transmit to the host as EAN-13. To accomplish this, the I 2 of 5 code must be enabled, and the code must have a leading zero and a valid EAN-13 check digit.



Convert I 2 of 5 to EAN-13 (Enable)



*Do Not Convert I 2 of 5 to EAN-13 (Disable)

Trioptic Code 39

Enable/Disable Trioptic Code 39

Trioptic Code 39 is a variant of Code 39 used in the marking of computer tape cartridges. Trioptic Code 39 symbols always contain six characters. To enable or disable Trioptic Code 39, scan the appropriate barcode below.



Enable Trioptic Code 39



*Disable Trioptic Code 39

Note: You cannot enable Trioptic Code 39 and Code 39 Full ASCII simultaneously.

Discrete 2 of 5

Enable/Disable Discrete 2 of 5

To enable or disable Discrete 2 of 5, scan the appropriate barcode below.



Enable Discrete 2 of 5



*Disable Discrete 2 of 5

Interleaved 2 of 5

Enable/Disable Interleaved 2 of 5

To enable or disable Interleaved 2 of 5, scan the appropriate barcode below, and select an Interleaved 2 of 5 length.



Enable Interleaved 2 of 5



*Disable Interleaved 2 of 5

Set Lengths for Interleaved 2 of 5

The length of a code refers to the number of characters (i.e., human readable characters), including check digit(s) the code contains. Set lengths for I 2 of 5 to any length, one or two discrete lengths, or lengths within a specific range. The range for Interleaved 2 of 5 lengths is 0 - 55.

- **One Discrete Length** - Select this option to decode only I 2 of 5 symbols containing a selected length. Select the length using the numeric bar codes in the Appendix of [Numeric Bar Codes](#). For example, to decode only I 2 of 5 symbols with 14 characters, scan **I 2 of 5 – One Discrete Length**, then scan **1** followed by **4**. To correct an error or to change the selection, scan the [Cancel](#) barcode in Appendix B.
- **Two Discrete Lengths** - Select this option to decode only I 2 of 5 symbols containing either of two selected lengths. Select lengths using the numeric bar codes in the Appendix of [Numeric Bar Codes](#). For example, to decode only I 2 of 5 symbols containing either 2 or 14 characters, select **I 2 of 5 – Two Discrete Lengths**, then scan **0, 2, 1**, and then **4**. To correct an error or to change the selection, scan the [Cancel](#) barcode in Appendix B.
- **Length Within Range** - Select this option to decode an I 2 of 5 symbol with a specific length range. Select lengths using numeric bar codes in the Appendix of [Numeric Bar Codes](#). For example, to decode I 2 of 5 symbols containing between 4 and 12 characters, first scan **I 2 of 5 - Length Within Range**. Then scan **0, 4, 1**, and **2** (enter a leading zero for single digit numbers). To correct an error or change the selection, scan the [Cancel](#) barcode in Appendix B.
- **Any Length** - Scan this option to decode I 2 of 5 symbols containing any number of characters within the decoder's capability.

NOTE Due to the construction of the I 2 of 5 symbology, it is possible for a scan line covering only a portion of the code to transmit as a complete scan, yielding less data than is encoded in the bar code. To prevent this, select specific lengths (I 2 of 5 - One Discrete Length, Two Discrete Lengths) for I 2 of 5 applications.



*I 2 of 5 - One Discrete Length



I 2 of 5 - Two Discrete Lengths



I 2 of 5 - Length Within Range



I 2 of 5 - Any Length


Coabar

Enable/Disable Codabar

To enable or disable Codabar, scan the appropriate barcode below.



Enable Codabar



*Disable Codabar

Set Lengths for Codabar

The length of a code refers to the number of characters (i.e., human readable characters), including check digit(s) the code contains. Set lengths for Codabar to any length, one or two discrete lengths, or lengths within a specific range.

- **One Discrete Length** - Select this option to decode only Codabar symbols containing a selected length. Select the length using the numeric barcodes in the appendix of [Numeric Barcodes](#). For example, to decode only Codabar symbols with 14 characters, scan **Codabar - One Discrete Length**, then scan **1** followed by **4**. To correct an error or to change the selection, scan [Cancel](#).
- **Two Discrete Lengths** - Select this option to decode only Codabar symbols containing either of two selected lengths. Select lengths using the numeric barcodes in the appendix of [Numeric Barcodes](#). For example, to decode only Codabar symbols containing either 2 or 14 characters, select **Codabar - Two Discrete Lengths**, then scan **0, 2, 1**, and then **4**. To correct an error or to change the selection, scan [Cancel](#).

- **Length Within Range** - Select this option to decode a Codabar symbol with a specific length range. Select lengths using numeric barcodes in the appendix of [Numeric Barcodes](#). For example, to decode Codabar symbols containing between 4 and 12 characters, first scan **Codabar - Length Within Range**. Then scan **0, 4, 1, and 2** (enter a leading zero for single digit numbers). To correct an error or change the selection, scan [Cancel](#).
- **Any Length** - Scan this option to decode Codabar symbols containing any number of characters within the decoder's capability.



Codabar - One Discrete Length



Codabar - Two Discrete Lengths



*Codabar - Length Within Range



Codabar - Any Length

MSI

Enable/Disable MSI

To enable or disable MSI, scan the appropriate barcode below.



Enable MSI



*Disable MSI

Inverse 1D

This parameter sets the 1D inverse decoder setting. Options are:

- **Regular Only** - the decoder decodes regular 1D bar codes only.
- **Inverse Only** - the decoder decodes inverse 1D bar codes only.
- **Inverse Autodetect** - the decoder decodes both regular and inverse 1D bar codes.



*Regular



Inverse Only



Inverse Autodetect

Postal Code Symbolologies

US Postnet

To enable or disable US Postnet, scan the appropriate barcode below.



Enable US Postnet



*Disable US Postnet

UK Postal

To enable or disable UK Postal, scan the appropriate barcode below.



Enable UK Postal



*Disable UK Postal

Japan Postal

To enable or disable Japan Postal, scan the appropriate barcode below.



Enable Japan Postal



*Disable Japan Postal

GS1 (Globe Standard 1) DataBar



*Enable GS1 DataBar



Disable GS1 DataBar

GS1 DataBar Limited



Enable GS1 DataBar Limited



*Disable GS1 DataBar Limited

GS1 DataBar Limited Security Level

The decoder offers four levels of decode security for GS1 DataBar Limited barcodes. There is an inverse relationship between security and decoder aggressiveness. Increasing the level of security may result in reduced aggressiveness in scanning, so only choose the level of security necessary.

- Level 1 – No clear margin required. This complies with the original GS1 standard, yet might result in erroneous decoding of the DataBar Limited barcode when scanning some UPC symbols that start with the digits “9” and “7”.
- Level 2 – Automatic risk detection. This level of security may result in erroneous decoding of DataBar Limited barcodes when scanning some UPC symbols. If a misdecode is detected, the decoder operates in Level 3 or Level 1.
- Level 3 – Security level reflects newly proposed GS1 standard that requires a 5X trailing clear margin.
- Level 4 – Security level extends beyond the standard required by GS1. This level of security requires a 5X leading and trailing clear margin.



Security Level 1



*Security Level 3



Security Level 2



Security Level 4

Note: It may result in erroneous decoding due to Databar Limited and UPC symbologies.

GS1 DataBar Expanded



*Enable GS1 DataBar Expanded



Disable GS1 DataBar Expanded

Netherlands KIX Code

To enable or disable Netherlands KIX Code, scan the appropriate barcode below.



Enable Netherlands KIX Code



*Disable Netherlands KIX Code

Australia Post

To enable or disable Australia Post, scan the appropriate barcode below.



Enable Australia Post



*Disable Australia Post

Composite Symbolologies

Composite CC-C

Scan a barcode below to enable or disable Composite barcodes of type CC-C.



Enable CC-C



*Disable CC-C

Composite CC-A/B

Scan a barcode below to enable or disable Composite barcodes of type CC-A/B.



Enable CC-A/B



*Disable CC-A/B

Note: If you enable this code type, also see the section -- [UPC Composite Mode](#).

Composite TLC-39

Scan a barcode below to enable or disable Composite barcodes of type TLC-39.



Enable TLC39



*Disable TLC39

2D Symbolologies

PDF417

To enable or disable PDF417, scan the appropriate barcode below.



*Enable PDF417



Disable PDF417

MicroPDF417

To enable or disable MicroPDF417, scan the appropriate barcode below.



Enable MicroPDF417



*Disable MicroPDF417

Code 128 Emulation

Enable this parameter to transmit data from certain MicroPDF417 symbols as Code 128. [AIM Code ID Character](#) must be enabled for this parameter to work.



AIM Code ID Character

Scan a barcode below to enable or disable Code 128 Emulation.



Enable Code 128 Emulation



*Disable Code 128 Emulation

Data Matrix

To enable or disable Data Matrix, scan the appropriate barcode below.



*Enable Data Matrix



Disable Data Matrix

Data Matrix Inverse

This parameter sets the Data Matrix inverse decoder setting. Options are:

- **Regular Only** - the decoder decodes regular Data Matrix barcodes only.
- **Inverse Only** - the decoder decodes inverse Data Matrix barcodes only.
- **Inverse Autodetect** - the decoder decodes both regular and inverse Data Matrix barcodes.



*Regular



Inverse Only



Inverse Autodetect

Decode Mirror Images (Data Matrix Only)

Select an option for decoding mirror image Data Matrix barcodes:

- Always - decode only Data Matrix barcodes that are mirror images
- Never - do not decode Data Matrix barcodes that are mirror images
- Auto - decode both mirrored and unmirrored Data Matrix barcodes.



Never



Always



* Auto

Maxicode

To enable or disable Maxicode, scan the appropriate barcode below.



Enable Maxicode



*Disable Maxicode

QR Code

To enable or disable QR Code, scan the appropriate barcode below.



*Enable QR Code



Disable QR Code

QR Inverse

This parameter sets the QR inverse decoder setting. Options are:

- **Regular Only** - the decoder decodes regular QR barcodes only.
- **Inverse Only** - the decoder decodes inverse QR barcodes only.
- **Inverse Autodetect** - the decoder decodes both regular and inverse QR barcodes.



*Regular



Inverse Only



Inverse Autodetect

MicroQR

To enable or disable MicroQR, scan the appropriate barcode below.



*Enable MicroQR



Disable MicroQR

Aztec

To enable or disable Aztec, scan the appropriate barcode below.



*Enable Aztec



Disable Aztec

Aztec Inverse

This parameter sets the Aztec inverse decoder setting. Options are:

- **Regular Only** - the decoder decodes regular Aztec barcodes only.
- **Inverse Only** - the decoder decodes inverse Aztec barcodes only.
- **Inverse Autodetect** - the decoder decodes both regular and inverse Aztec barcodes.



Regular



Inverse Only



*Inverse Autodetect

Redundancy Level

The decoder offers four levels of decode redundancy. Select higher redundancy levels for decreasing levels of barcode quality. As redundancy levels increase, the decoder's aggressiveness decreases.

Select the redundancy level appropriate for the barcode quality.

Redundancy Level 1

The following code types must be successfully read twice before being decoded:

Code Type	Code Length
Codabar	8 characters or less
MSI	4 characters or less
D 2 of 5	8 characters or less
I 2 of 5	8 characters or less

Redundancy Level 2

The following code types must be successfully read twice before being decoded:

Code Type	Code Length
All	All

Redundancy Level 3

Code types other than the following must be successfully read twice before being decoded. The following codes must be read three times:

Code Type	Code Length
MSI	4 characters or less
D 2 of 5	8 characters or less
I 2 of 5	8 characters or less
Codabar	8 characters or less

Redundancy Level 4

The following code types must be successfully read three times before being decoded:

Code Type	Code Length
All	All



*Redundancy Level 1



Redundancy Level 2



Redundancy Level 3



Redundancy Level 4

Security Level

The decoder offers four levels of decode security for delta barcodes, which include UPC/EAN and Code 93. Select increasing levels of security for decreasing levels of barcode quality. There is an inverse relationship between security and decoder aggressiveness, so choose only that level of security necessary for any given application.

- **Security Level 0:** This setting allows the decoder to operate in its most aggressive state, while providing sufficient security in decoding most “in-spec” barcodes.
- **Security Level 1:** This default setting eliminates most misdecodes.
- **Security Level 2:** Select this option if Security level 1 fails to eliminate misdecodes.

- **Security Level 3:** If you selected Security Level 2 and misdecodes still occur, select this security level. Be advised, selecting this option is an extreme measure against mis-decoding severely out of spec barcodes. Selecting this level of security significantly impairs the decoding ability of the decoder. If you need this level of security, try to improve the quality of the barcodes.



Security Level 0



*Security Level 1



Security Level 2



Security Level 3

Intercharacter Gap Size

The Code 39 and Codabar symbologies have an intercharacter gap that is typically quite small. Due to various barcode-printing technologies, this gap can grow larger than the maximum size allowed, preventing the decoder from decoding the symbol. If this problem occurs, scan the **Large Intercharacter Gaps** parameter to tolerate these out-of-specification barcodes.



*Normal Intercharacter Gaps



Large Intercharacter Gaps

Macro PDF Features

Macro PDF is a special feature for concatenating multiple PDF symbols into one file. The decoder can decode symbols that are encoded with this feature, and can store more than 64 Kb of decoded data stored in up to 50 MacroPDF symbols.

CAUTION: When printing, keep each Macro PDF sequence separate, as each sequence has unique identifiers. Do not mix barcodes from several Macro PDF sequences, even if they encode the same data. When scanning Macro PDF sequences, scan the entire sequence without interruption. When scanning a mixed sequence, two long low beeps (Low/Low) indicates an inconsistent file ID or inconsistent symbology error.

Macro PDF User Indications

In this mode the decoder provides the following feedback.

User Scans	Passthrough All Symbols		Transmit Any Symbol in Set		Buffer All Symbols	
	Beep	T	Beep	T	Beep	T
Last Macro PDF in set	Decode Beep	Y	Decode Beep	Y	Decode Beep	Y
Any Macro PDF in set except last	Decode Beep	Y	Decode Beep	Y	2 Short Low	N
Macro PDF is not in current Set	Decode Beep	Y	2 Long Low	N	2 Long Low	N
Invalid formatted Macro PDF	Decode Beep	Y	2 Long Low	N	2 Long Low	N
Macro PDF from a set has already been scanned	Decode Beep	Y	4 Long Low	N	4 Long Low	N
Out of Macro PDF memory	N/A		3 Long Low	N	3 Long Low	N
Any non-Macro PDF scanned during a set	N/A	-	4 Long Low	N	4 Long Low	N
Flush Macro PDF	Low High	N	5 Long Low	N	5 Long Low	Y
Abort Macro PDF	High Low High Low	N	High Low High Low	N	High Low High Low	N

Notes:

1. The beep only sounds if the *BEEPER_ON signal is connected.

2. The column marked T indicates whether the symbol is transmitted to the host.

N = No transmission.

Macro PDF Transmit / Decode Mode Symbols

Select one of the options below for handling Macro PDF decoding. In **Buffer All Symbols** the decoder can handle sets of up to 50 maximum-sized Macro PDF symbols. In all other modes there is no limit to the size of the MacroPDF set.

- **Buffer All Symbols / Transmit Macro PDF When Complete:** This transmits all decode data from an entire Macro PDF sequence only when the entire sequence is scanned and decoded. Use the beeper and LED signals provided with the MS842 when using this mode to ensure proper user feedback. If the decode data exceeds the limit of 50 symbols, there is no transmission because the entire sequence was not scanned. Use the parameter *Flush Macro Buffer* to purge the buffer.
- **Transmit Any Symbol in Set / No Particular Order:** This transmits data from each Macro PDF symbol as decoded, regardless of the sequence (although some error handling is performed). When selecting this mode, enable *Transmit Macro PDF Control Header*. Also use the beeper and LED signals provided with the MS842 to ensure proper user feedback.
- **Passthrough All Symbols:** This transmits and decodes all Macro PDF symbols and performs no processing. In this mode the host is responsible for detecting and parsing the Macro PDF sequences.

Use this mode when the decoder's BEEPER_ON signal is not used to drive a beeper. In the other modes, some Macro PDF scanning sequences provide audible feedback only, so if BEEPER_ON is not used, no user feedback is provided. All actions marked **No Transmission** provide no feedback unless the BEEPER_ON signal is used.

By using **Passthrough All Symbols** mode every user decode is transmitted to the host where the host software can provide the appropriate feedback.



Buffer All Symbols / Transmit Macro PDF When Complete



Transmit Any Symbol in Set / No Particular Order



***Passthrough All Symbols**

Transmit Macro PDF Control Header

When enabled, this activates transmission of the control header, which contains the segment index and the file ID, in Macro PDF symbols. For example, the field may be: \92800000\725\120\343. The five digits after the \928 are the segment index (or block index), and \725\120\343 is the file ID.

Enable this when selecting Transmit Any Symbol in Set / No Particular Order for the [Macro PDF Transmit / Decode Mode Symbols](#), and disable this when selecting Buffer All Symbols / Transmit Macro PDF When Complete. This parameter has no effect when Passthrough All Symbols is selected.



Enable Macro PDF Control Header Transmit



***Disable Macro PDF Control Header Transmit**

Escape Characters

This enables the backslash (\) character as an Escape character for systems that can process transmissions containing special data sequences. Scan a barcode below to either format special data according to the GLI (Global Label Identifier) protocol, or to disable this parameter. This parameter only affects the data portion of a Macro PDF symbol transmission; the Macro PDF Control Header (if enabled) is always sent with GLI formatting.



GLI Protocol



***None**

Flush Macro Buffer

This flushes the buffer of all decoded Macro PDF data stored to that point, transmits it to the host device, and aborts from Macro PDF mode.



Flush Macro PDF Buffer

Abort Macro PDF Entry

This clears all currently-stored Macro PDF data in the buffer without transmission and aborts from Macro PDF mode.



Abort Macro PDF Entry

Appendix A


Sample Barcodes

2D Barcodes

Data Matrix



Maxicode



QR Code



PDF417



MicroPDF417



US Postnet



UK Postal



1D Barcodes

EAN-13



EAN-8



UPC-A



UPC-E



Interleave 2 of 5




Code 39




W+ E + D + G + E

Code 128



Unitech 128

EAN 128




(01)054123456789(01)659344

Codabar



A22357000599876B

MSI



1234558

GS1 Limited



7612341562341

Appendix B

Numeric Barcodes

For parameters requiring specific numeric values, scan the appropriately numbered barcode(s).



Cancel

To correct an error or change a selection, scan the barcode below.



Cancel

Appendix C

ASCII Character Sets

ASCII Value Table

ASCII Value	Full ASCII Code 39 Encode Char	Keystroke
1000	%U	CTRL 2
1001	\$A	CTRL A
1002	\$B	CTRL B
1003	\$C	CTRL C
1004	\$D	CTRL D
1005	\$E	CTRL E
1006	\$F	CTRL F
1007	\$G	CTRL G
1008	\$H	CTRL H/ BACKSPACE ¹
1009	\$I	CTRL I/ HORIZONTAL TAB ¹
1010	\$J	CTRL J
1011	\$K	CTRL K
1012	\$L	CTRL L
1013	\$M	CTRL M/ ENTER ¹
1014	\$N	CTRL N
1015	\$O	CTRL O
1016	\$P	CTRL P
1017	\$Q	CTRL Q
1018	\$R	CTRL R
1019	\$S	CTRL S
1020	\$T	CTRL T
1021	\$U	CTRL U
1022	\$V	CTRL V
1023	\$W	CTRL W
1024	\$X	CTRL X
1025	\$Y	CTRL Y
1026	\$Z	CTRL Z
1027	%A	CTRL [
1028	%B	CTRL \

ASCII Value	Full ASCII Code 39 Encode Char	Keystroke
1029	%C	CTRL]
1030	%D	CTRL 6
1031	%E	CTRL -
1032	Space	Space
1033	/A	!
1034	/B	“
1035	/C	#
1036	/D	\$
1037	/E	%
1038	/F	&
1039	/G	‘
1040	/H	(
1041	/I	)
1042	/J	*
1043	/K	+
1044	/L	,
1045	-	-
1046	.	.
1047	/o	/
1048	0	0
1049	1	1
1050	2	2
1051	3	3
1052	4	4
1053	5	5
1054	6	6
1055	7	7
1056	8	8
1057	9	9
1058	/Z	:
1059	%F	;
1060	%G	<
1061	%H	=
1062	%I	>
1063	%J	?
1064	%V	@

ASCII Value	Full ASCII Code 39 Encode Char	Keystroke
1065	A	A
1066	B	B
1067	C	C
1068	D	D
1069	E	E
1070	F	F
1071	G	G
1072	H	H
1073	I	I
1074	J	J
1075	K	K
1076	L	L
1077	M	M
1078	N	N
1079	O	O
1080	P	P
1081	Q	Q
1082	R	R
1083	S	S
1084	T	T
1085	U	U
1086	V	V
1087	W	W
1088	X	X
1089	Y	Y
1090	Z	Z
1091	%K	[
1092	%L	\
1093	%M	]
1094	%N	^
1095	%O	_
1096	%W	'
1097	+A	A
1098	+B	B
1099	+C	C
1100	+D	D

ASCII Value	Full ASCII Code 39 Encode Char	Keystroke
1101	+E	E
1102	+F	F
1103	+G	G
1104	+H	H
1105	+I	I
1106	+J	J
1107	+K	K
1108	+L	L
1109	+M	M
1110	+N	N
1111	+O	O
1112	+P	P
1113	+Q	Q
1114	+R	R
1115	+S	S
1116	+T	T
1117	+U	U
1118	+V	V
1119	+W	W
1120	+X	X
1121	+Y	Y
1122	+Z	Z
1123	%P	{
1124	%Q	
1125	%R	}
1126	%S	~

The keystroke in bold transmits only if you enabled Function Key Mapping. Otherwise, the unbold keystroke transmits.

ALT Key Standard Default Tables

ALT Keys	Keystroke
2064	ALT 2
2065	ALT A
2066	ALT B
2067	ALT C
2068	ALT D
2069	ALT E
2070	ALT F
2071	ALT G
2072	ALT H
2073	ALT I
2074	ALT J
2075	ALT K
2076	ALT L
2077	ALT M
2078	ALT N
2079	ALT O
2080	ALT P
2081	ALT Q
2082	ALT R
2083	ALT S
2084	ALT T
2085	ALT U
2086	ALT V
2087	ALT W
2088	ALT X
2089	ALT Y
2090	ALT Z

USB GUI Key Character Set

GUI Key	Keystroke
3000	Right Control Key
3048	GUI 0
3049	GUI 1
3050	GUI 2
3051	GUI 3
3052	GUI 4
3053	GUI 5
3054	GUI 6
3055	GUI 7
3056	GUI 8
3057	GUI 9
3065	GUI A
3066	GUI B
3067	GUI C
3068	GUI D
3069	GUI E
3070	GUI F
3071	GUI G
3072	GUI H
3073	GUI I
3074	GUI J
3075	GUI K
3076	GUI L
3077	GUI M
3078	GUI N
3079	GUI O
3080	GUI P
3081	GUI Q
3082	GUI R
3083	GUI S
3084	GUI T
3085	GUI U
3086	GUI V
3087	GUI W
3088	GUI X

GUI Key	Keystroke
3089	GUI Y
3090	GUI Z

Note: GUI Shift Keys - The Apple™ iMac keyboard has an apple key on either side of the space bar. Windows-based systems have a GUI key to the left of the left ALT key, and to the right of the right ALT key.

PF Key Standard Default Table

PF Keys	Keystroke
4001	PF 1
4002	PF 2
4003	PF 3
4004	PF 4
4005	PF 5
4006	PF 6
4007	PF 7
4008	PF 8
4009	PF 9
4010	PF 10
4011	PF 11
4012	PF 12
4013	PF 13
4014	PF 14
4015	PF 15
4016	PF 16

F key Standard Default Table

F Keys	Keystroke
5001	F 1
5002	F 2
5003	F 3
5004	F 4
5005	F 5
5006	F 6
5007	F 7
5008	F 8
5009	F 9
5010	F 10
5011	F 11

F Keys	Keystroke
5012	F 12
5013	F 13
5014	F 14
5015	F 15
5016	F 16
5017	F 17
5018	F 18
5019	F 19
5020	F 20
5021	F 21
5022	F 22
5023	F 23
5024	F 24

Numeric Key Standard Default Table

Numeric Keypad	Keystroke
6042	*
6043	+
6044	Undefined
6045	-
6046	.
6047	/
6048	0
6049	1
6050	2
6051	3
6052	4
6053	5
6054	6
6055	7
6056	8
6057	9
6058	Enter
6059	Num Lock

Extended Keypad Standard Default Table

Extended Keypad	Keystroke
7001	Break
7002	Delete
7003	Pg Up
7004	End
7005	Pg Dn
7006	Pause
7007	Scroll Lock
7008	Backspace
7009	Tab
7010	Print Screen
7011	Insert
7012	Home
7013	Enter
7014	Escape
7015	Up Arrow
7016	Dn Arrow
7017	Left Arrow
7018	Right Arrow

Appendix D

Worldwide Support

Unitech's professional support team is available to quickly answer questions or technical-related issues. Should a set of equipment problem occurs, please contact the nearest Unitech regional service representative. For complete contact information please visit the Web sites listed below:

Region	Web Site
Global Operation Center	http://www.ute.com
Unitech Taiwan	http://tw.ute.com
Unitech Asia Pacific & Middle East	http://apac.ute.com ; http://india.ute.com
Greater China Division	http://cn.ute.com
Unitech Japan	http://jp.ute.com
Unitech America	http://us.ute.com ; http://can.ute.com
Unitech Latin America	http://latin.ute.com
Unitech Europe	http://eu.ute.com