


## Operating Instructions

The R2-MiNi has been designed to operate the majority of current TVs, satellite and cable boxes.

R2-MiNi

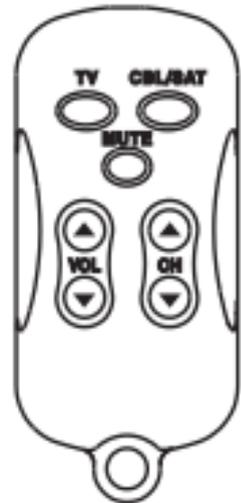

### 1 Programming IR Codes to the R2-MiNi

**STEP 1** Turn on TV or cable/ satellite box.

**STEP 2** Press and hold device button (TV or CBL/SAT) on remote for 3 seconds. (Device LED will stay on.)

**STEP 3** Point the remote towards the device and press CH+ or CH- with single button presses. (The correct IR code is achieved when the device shuts off.)

**STEP 4** Press the corresponding device button again to save the code. (The device LED will blink twice to confirm that the code is saved.)

### 2 Reverting Back to TV or CBL/SAT Channel Control

The channel control will default automatically to the CBL/SAT device when programmed with an IR code.

**STEP 1** Press and hold the CBL/SAT button for 3 seconds. (The CBL/SAT LED will stay on.)

**STEP 2** Press the VOL + button.

**STEP 3** Press the CBL/SAT button for cable /satellite channel control or the TV button for TV channel control. (The device LED will blink twice to confirm the change.)