

Go to www.vtechphones.com to register your product for enhanced warranty support and latest VTech product news.

CS5229-2
CS5229-3
CS5229-4
CS5229-5

DECT 6.0 cordless telephone



vtech®

Quick start guide




Document order number: 96-012950-010-100
All rights reserved. 12/19 CS5229-X, CS5229-2, CS5229-3, CS5229-4, CS5229-5
Specifications are subject to change without notice.
Address: 9020 SW Washington Square Road, Ste. 555 Tigard, OR 97223, United States
Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 261-7377 in Canada
Company: Vtech Communications, Inc.
Through the use of this product, Vtech Communications, Inc. and its suppliers assume no responsibility for any damage or loss resulting from the use of this user's manual. Vtech Communications, Inc. and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this product.

Disclaimer and Limitation of Liability
The ENERGY STAR® label indicating it meets the latest energy efficiency guidelines.
ENERGY STAR® label indicating it meets the latest energy efficiency guidelines.
The ENERGY STAR® program (www.energystar.gov) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR® label.
Interference when used with most T-coil equipped hearing aids and cochlear implants. The TIA-1083 FCC-compliant logo is a trademark of the Telecommunications Industries Association. Used under license.
Telephones identified with this logo have reduced noise and interference when used with most T-coil equipped hearing aids and cochlear implants. The TIA-1083 FCC-compliant logo is a trademark of the Telecommunications Industries Association. Used under license.
Call block: 150 entries
Memory
Directory: 50 memory locations;
Call log: 30 memory locations;
up to 24 digits and 15 characters;
Charger: 6V DC @ 400mA
Power
Handset: 2.4V Ni-MH battery
Telephone base: 6V DC @ 400mA
Nominal
Maximum power allowed by FCC and IC
Actual operating range may vary according to environmental conditions at the time of use.
Channels
DECT channel: 5
Transmit
Handset: 1921.536-1928.448 MHz
Telephone base: 1921.536-1928.448 MHz
Frequency
Crystal controlled PLL synthesizer
control

Technical specifications



What's in the box

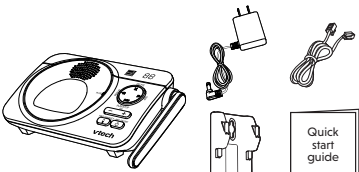

1 set for CS5229
2 sets for CS5229-2
3 sets for CS5229-3
4 sets for CS5229-4
5 sets for CS5229-5




1 set for CS5229-2
2 sets for CS5229-3
3 sets for CS5229-4
4 sets for CS5229-5




Connect and activate

1 Connect the telephone base


If you subscribe to digital subscriber line (DSL) high-speed Internet service through your telephone line, make sure you connect a DSL filter (not included) to the telephone wall jack.




2 Install the battery



3 Connect the charger



4 Charge the battery



Display



	The battery is low and needs charging.
	The battery is charging.
	The battery is fully charged.
	Handset ringer is off.
	New voicemail received from your telephone service provider.
NEW	There are new caller ID log entries.
ANS ON	Answering system is on.
1/13	Number of new/old messages recorded.
ECO	The ECO mode activates automatically to reduce power consumption when the handset is within range of the telephone base.



Setup

After you install your telephone or power returns following a power outage and battery depletion, the handset will prompt you to set the date and time, and to configure the answering system through voice guide.

Date and time

Follow the steps below to set the date and time. For example, if the date is 31 December, 2019, and the time is 10:59 AM:



When the handset prompts you to set the date and time



1 **12/10/YY**



2 **12/31/19**



3 **10:59 AM**



4 **10:59 AM**

Enter the date


Enter the time

Voice guide for answering system

After setting the date and time, the handset will display **Voice guide to...** and **set up Ans sys?** alternatively.

This feature assists you to do the basic setup of the answering system. You can follow the voice guide to record your own announcement, set the number of rings and the message alert tone.

When the handset prompts you to set up the answering system via voice guide



1 **MENU SELECT**



"Hello! This voice guide will assist you with the basic setup of your answering system"

For detailed instructions, read the online user's manual or frequently asked questions at www.vtechphones.com.

Setup your answering system by inputting the designated numbers as instructed in the voice guide.



Basic operation

Make a call

1 **TALK FLASH**

2 **12/10/YY**

- OR -



Enter the phone number

Answer a call

TALK FLASH

- OR -



3 **12/10/YY**

Press any dialing keys to answer

End a call

OFF CANCEL

Speakerphone

Speakerphone

Volume

VOLUME



Directory

Directory

The directory can store up to 50 entries, which are shared by all handsets. Each entry may consist of a telephone number up to 30 digits, and a name up to 15 characters.

Add a directory entry

1 **12/10/YY**

2 **MENU SELECT**

3 **MENU SELECT**

Enter the phone number

4 **12/10/YY**

Enter the name

5 **MENU SELECT**

Review directory entries

1 **VOLUME**

2 **VOLUME**

Browse the entries

Delete a directory entry

When your desired directory entry displays on the handset screen

1 **MUTE DELETE**

2 **MENU SELECT**



Caller ID

Caller ID

If you subscribe to caller ID service, information about each caller appears after the first or second ring.

The caller ID log stores up to 30 entries. Each entry has up to 24 digits for the phone number and 15 characters for the name.

Review caller ID log entries

1 **VOLUME**

2 **VOLUME**

3 **MENU SELECT**

Browse the entries

Dial a caller ID log entry

When your desired caller ID entry displays on the handset screen

1 **TALK FLASH**

2 **Speakerphone**

Save a caller ID log entry to the directory

When your desired caller ID entry displays on the handset screen

1 **MENU SELECT**

2 **MENU SELECT**

3 **12/10/YY**

4 **MENU SELECT**

5 **MENU SELECT**

Delete a caller ID log entry

When your desired caller ID entry displays on the handset screen

1 **MUTE DELETE**

2 **MENU SELECT**

