

Owner Manual (draft)

Model: Transmitter (CD4 IKT)

Model No.: A08TAA, A08TAB


FCC ID: N5F-A08TAA

IC: 3248A-A08TAA

(preliminary draft, some change may appear in the final version)

Remote Keyless Entry

- Top view -

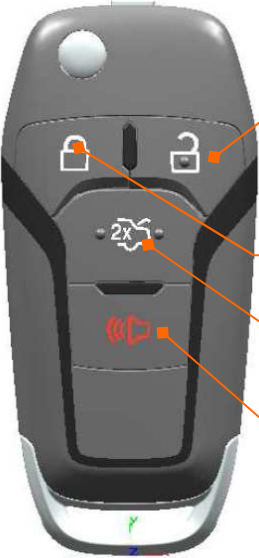

Model A08TAB
(4 buttons)


- UnLock button
- Lock button
- Trunk opening button
- Panic button



Model A08TAA
(3 buttons)

- Botton view -

Car Maker logo (brand)

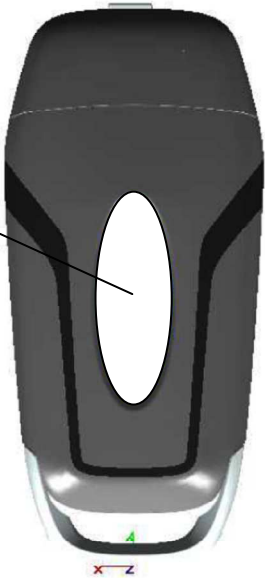

1. OPERATION

LOCK

Press this button once to lock all doors. Some exterior lights will flash *once (to be confirmed)*. Doors can not be locked if any door is not fully closed or the key is in the ignition switch.

UNLOCK

Press this button once to unlock the driver's door. Push it twice to unlock the other doors. Some exterior lights will flash *twice (to be confirmed)* each time you press the button. This button does not work when the key is in the ignition switch.

TRUNK RELEASE (on certain version)

Press this button for about *1 second (to be confirmed)* to release the trunk. Trunk can not be opened if the key is in the ignition switch.

PANIC

Press this button for about *1 second (to be confirmed)* to attract attention; the horn will sound, and the exterior lights will flash for about *30 seconds (to be confirmed)*. To cancel panic mode, press any other button on the remote transmitter, or insert the key.

2. TRANSMITTER CARE

- ◆ Avoid dropping or throwing the transmitter.
- ◆ Protect the transmitter from extreme temperature.
- ◆ Do not immerse the transmitter in any liquid.
- ◆ If you lose a transmitter, the replacement needs to be reprogrammed by your dealer.

3. BATTERY REPLACEMENT

The battery is not rechargeable. To replace the battery:

- ① Push the button on the transmitter to extend the key blade.
- ② Remove the battery cover by prying it with a finger. Note the polarity.
- ③ Remove the battery by pushing on the battery and sliding it toward the key blade.
- ④ Insert the new battery, positive side facing up. Push the battery down until it is held in place.
Replace with a CR2032 or equivalent battery.
- ⑤ Snap the battery cover back on to the transmitter



Avoid touching the new batteries with your fingers.



Do not touch the printed circuit board or the PCB battery holder

REGULATORY INFORMATION

For USA & Canada

FCC ID: N5F-A08TAA
IC: 3248A-A08TAA

English:

This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standards. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTICE:

Changes or modifications made to this equipment not expressly approved by other than an authorized service facility may void the FCC authorization to operate this equipment.

Français:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et*
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*