

Technical Data Manual

Model Nos. and pricing: see Price List



Vitocell-V 100
42 to 79 USG / 160 to 300 ltr



Vitocell-V 100
119 USG / 450 ltr

Product may not be exactly as shown

Vitocell 100-V

CVA Series

Indirect-fired domestic hot water storage tank
steel construction, with Ceraprotect two-coat enamel finish




VITOCELL 100-V

The vertical tank solution for cost-efficient domestic hot water supply. The Vitocell 100-V DHW tank offers storage capacities of up to 119 USG / 450 ltrs.

The benefits at a glance:

- **Corrosion-protected steel tank shell with Ceraprotect two-coat enamel finish.** Magnesium anode provides additional cathodic tank protection.
- **Heat exchanger coil extends to the bottom of the tank,** thereby heating the entire water content.
- **Extremely convenient domestic hot water supply** assured by fast, uniform heating via generously sized heat exchanger surfaces.
- **Certified to CSA Low Lead Content Certification Program;** including **US Safe Drinking Water Act, NSF/ANSI 372** as well as other applicable **US State requirements.**
- **Universally suitable** - for applications requiring larger quantities of hot water, multiple Vitocell 100-V tanks may be connected to a header to form a tank battery.
- **Increased energy savings** thanks to highly effective, foamed-in-place HCFC-free insulation keeping standby losses at a minimum.
- The vitocell-V 100 119 USG / 450 L capacity tank is supplied with removable soft PET insulation for easier handling.

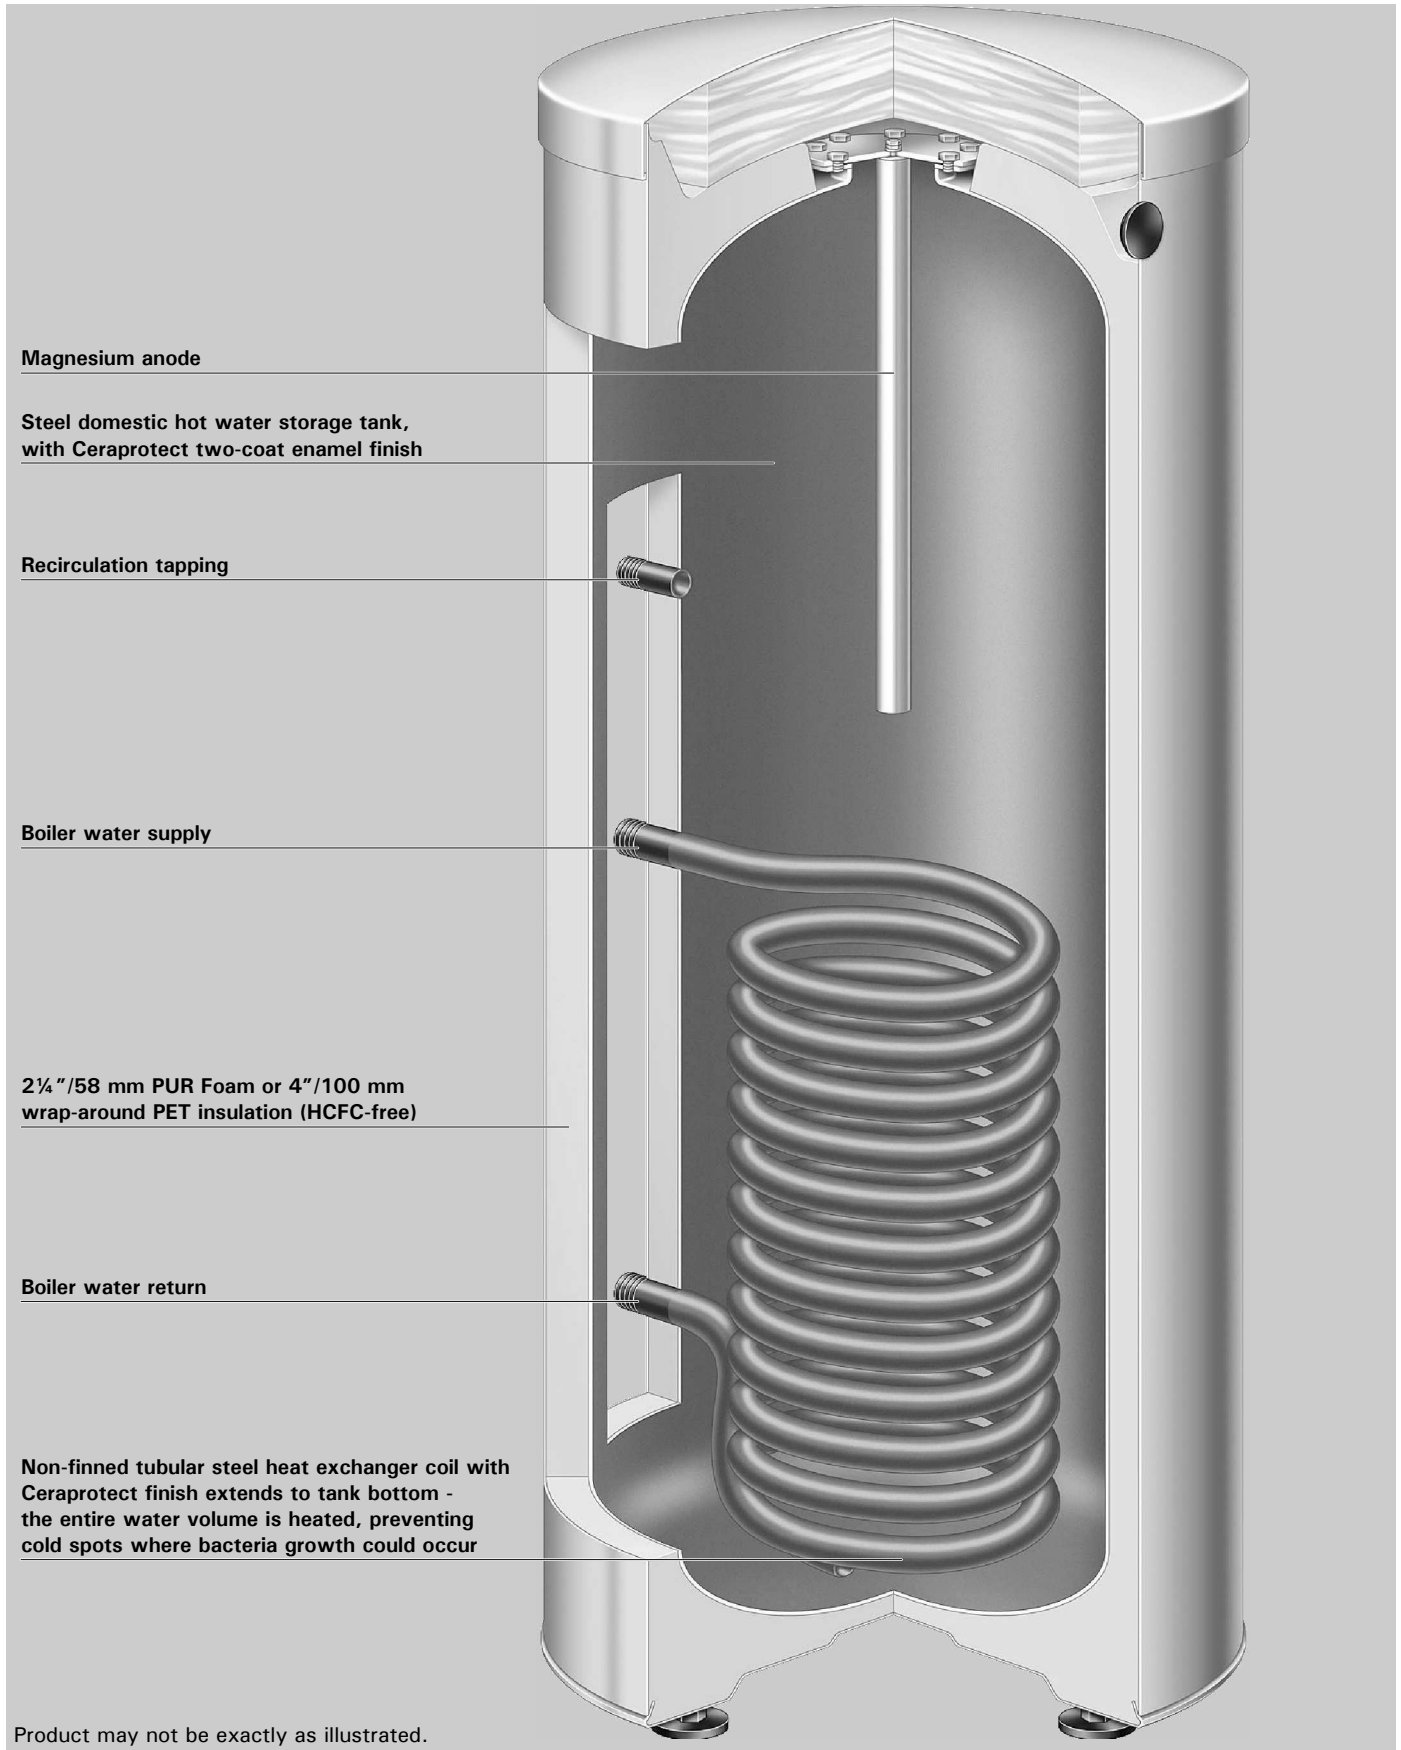

Technical Data

Technical Data

For domestic hot water heating applications in conjunction with hot water heating boilers

Suitable for heating systems with

- max. working pressure on the heat exchanger side of up to 150 psig / 10 bar
- max. working pressure on DHW side of up to 150 psig / 10 bar
- max. supply temperature on the heat exchanger side of up to 230 °F / 110 °C
- max. DHW supply temperature of up to 150 °F / 65.6 °C


Storage Capacity	USG		42	53	79	119
	ltr		160	200	300	450
Recovery rate ^{*1}						
with a temperature rise of the domestic hot water from	194 °F	MBH	136	136	180	238
	90 °C	GPM	4.3	4.3	5.7	7.6
		ltr/h	982	982	1302	1720
50 to 113 °F / 10 to 45 °C	176 °F	MBH	109	109	150	198
	80 °C	GPM	3.5	3.5	4.8	6.3
		ltr/h	786	786	1081	1425
and boiler water supply temperature of.... at the supply flow rate stated below	158 °F	MBH	85	85	113	153
	70 °C	GPM	2.7	2.7	3.6	4.9
		ltr/h	614	614	811	1106
	140 °F	MBH	58	58	78	109
	60 °C	GPM	1.8	1.8	0.3	3.5
		ltr/h	417	417	565	786
	122 °F	MBH	31	31	61	82
	50 °C	GPM	1	1	1.9	2.6
		ltr/h	221	221	442	589
Recovery rate ^{*1}						
with a temperature rise of the domestic hot water from	194 °F	MBH	123	123	153	181
	90 °C	GPM	2.7	2.7	3.4	4
		ltr/h	619	619	774	911
50 to 140 °F / 10 to 60 °C	176 °F	MBH	95	95	116	150
	80 °C	GPM	2	2	2.6	3.3
		ltr/h	482	482	584	756
and boiler water supply temperature of.... at the supply flow rate stated below	158 °F	MBH	65	65	78	113
	70 °C	GPM	1.4	1.4	1.7	2.5
		ltr/h	327	327	395	567
Supply flow rate for the recovery rates stated		GPM	13.2	13.2	13.2	13.2
		m ³ /h	3.0	3.0	3.0	3.0
Standby losses ^{*2}		MBH/24 h	5.1	5.8	7.5	9.6
Overall dimensions with insulation						
Width (∅)	inches		23	23	25	33 ½
	mm		581	581	633	850
Depth	inches		24	24	27 ¾	35 ¼
	mm		608	608	705	898
Height	inches		47	55 ½	68 ¾	77
	mm		1189	1409	1746	1955
Tilt height	inches		50	57 ½	70 ½	73 ¼
	mm		1260	1460	1792	1860
Weight						
Tank with insulation	lbs		190	214	333	399
	kg		86	97	151	181
Heating water content	USG		1.45	1.45	2.6	3.3
	ltr		5.5	5.5	10	12.5
Heat exchanger surface area	ft. ²		10.8	10.8	16.1	20.5
	m ²		1	1	1.5	1.9
Connections						
Heating water supply/return	∅" (male thread)		1	1	1	1
Domestic cold/hot water	∅" (male thread)		¾	¾	1	1 ¼
T&P valve	∅" (female thread)		¾	¾	¾	¾
Recirculation	∅" (male thread)		¾	¾	1	1

^{*1}When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rate".

Please also refer to the corresponding sizing chart at the end of this manual.

^{*2}Measured values are based on a room temp. of 68°F / 20 °C and a domestic hot water temp. of 149°F / 65 °C and can vary by 5%.


Vitocel 100I-V (42 and 53 USG / 160 and 200 ltr)

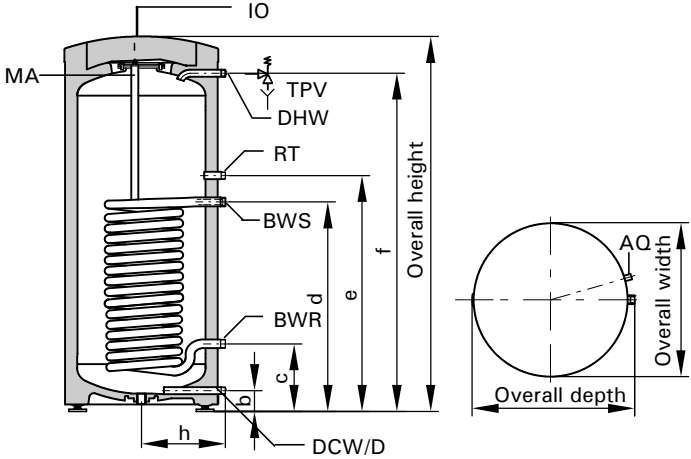

Dimensions

Storage capacity	USG	42	53	79	119
	ltr	160	200	300	450
a	inches	--	--	13	16 1/2
	mm	--	--	336	422
b	inches	2 3/4	2 3/4	3	4
	mm	72	72	76	107
c	inches	9 3/4	9 3/4	10	13 3/4
	mm	249	249	260	349
d	inches	25	25	34 1/2	36 1/4
	mm	634	634	875	924
e	inches	35	35	44	48 1/2
	mm	884	884	1115	1230
f	inches	41	41	63	70 1/4
	mm	1050	1270	1600	1784
g	inches	--	--	26	33
	mm	--	--	660	837
h	inches	12 1/2	12 1/2	13 1/2	18
	mm	317	317	343	455
j Ø	inches	--	--	4 1/2	4 1/2
	mm	--	--	114	114


Vitocell 100-V (79 USG / 300 ltr)

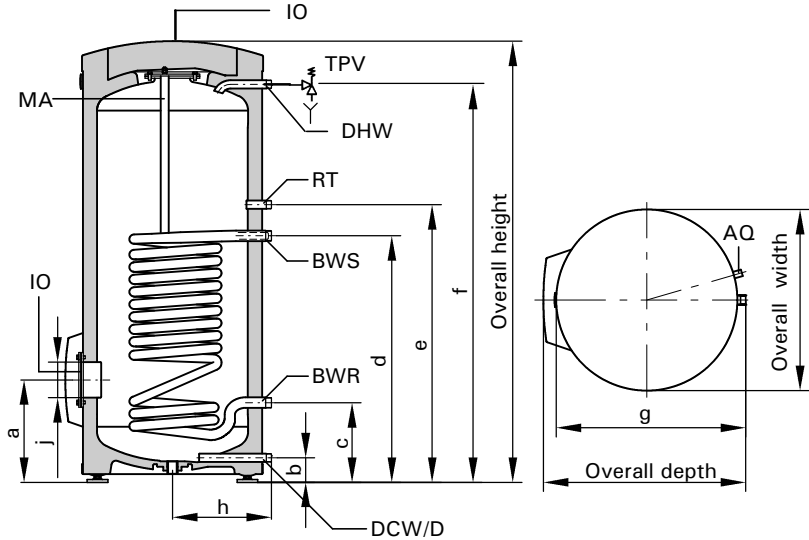

Legend

- IO Inspection and clean-out opening
- D Drain
- BWR Boiler water return
- BWS Boiler water supply
- DCW Domestic cold water
- AQ Aquastat well
(at same height as boiler water supply connection)
- MA Magnesium anode
- DHW Domestic hot water
- RT Recirculation tapping
- TPV Temperature and pressure relief valve

Vitocell 100-V (119 USG / 450 ltr)

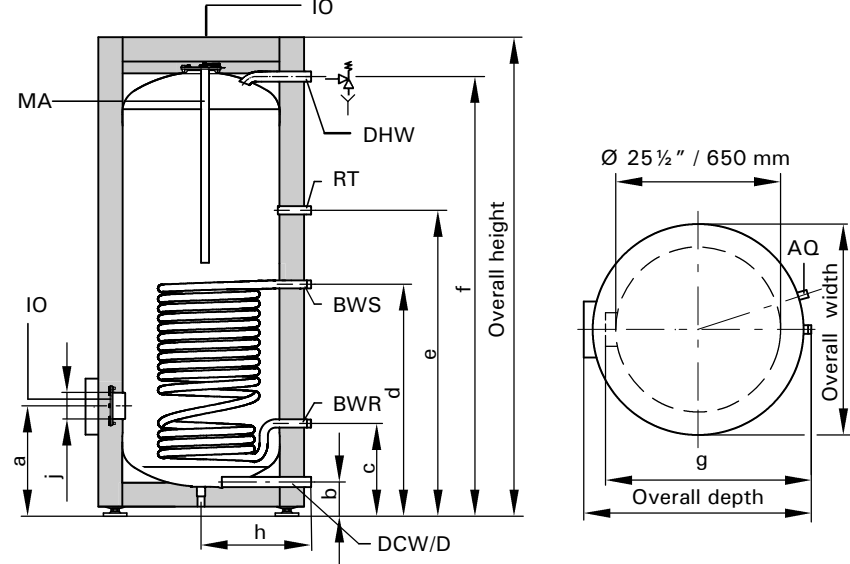

5167 518 - 01

Technical Data

Domestic hot water draw rate

Storage tank contents heated to 140 °F / 60 °C, boiler not reheating


Storage capacity	USG	42	53	79	119
	ltr	160	200	300	450
DHW draw rate	GPM	2.6	2.6	4.0	4.0
	ltr/min	10	10	15	15
Domestic hot water draw	USG	32	38	63	111
	Water with t = 140 °F / 60 °C (constant)	ltr	120	145	240
Percentage tank volume		75%	73%	80%	93%

Heat-up time


The stated heating times are achieved when the maximum recovery rate of the domestic hot water tank is made available at the respective supply temperature and with a domestic hot water rise from 50 to 140 °F / 10 to 60 °C.

Storage capacity	USG	42	53	79	119
	ltr	160	200	300	450
Heating water supply temperature	Heat-up time (minutes)				
	194 °F / 90 °C	19	19	23	28
	176 °F / 80 °C	24	24	31	36
	158 °F / 70 °C	34	37	45	50

Pressure drop on heating water side (primary circuit)

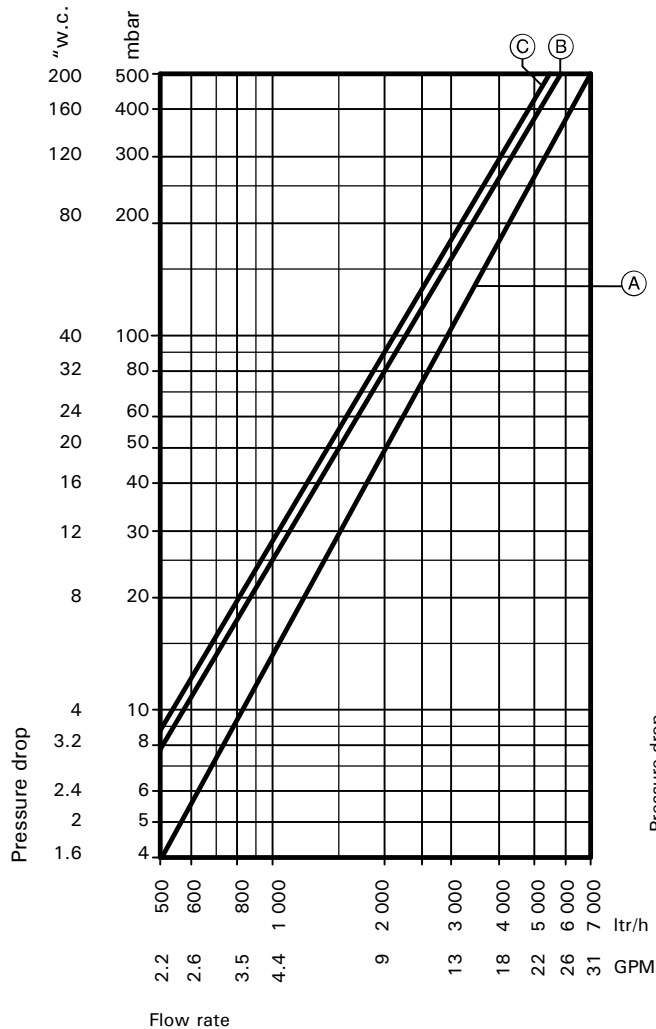

Pressure drop on domestic hot water side (secondary circuit)

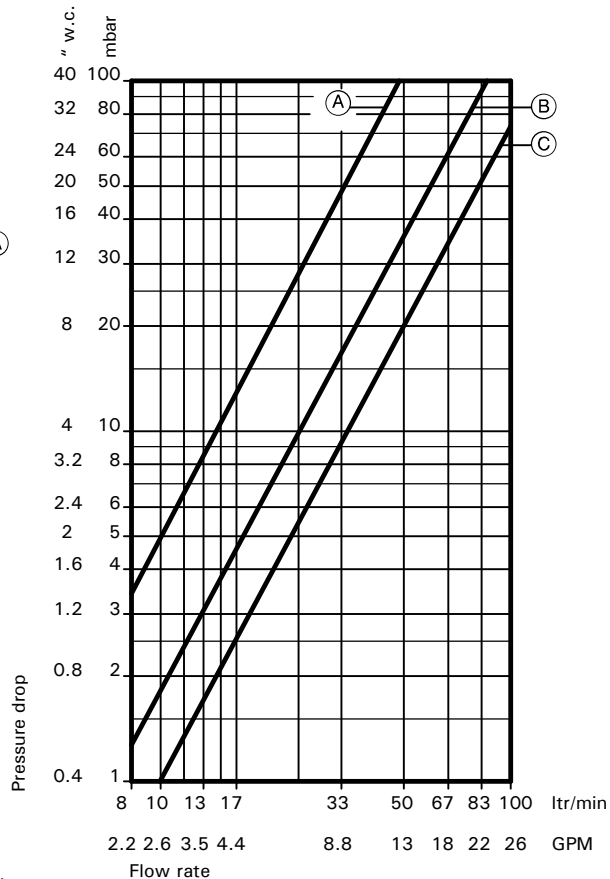

- (A) 42 USG / 160 ltr and 53 USG / 200 ltr storage capacities
- (B) 79 USG / 300 ltr storage capacity
- (C) 119 USG / 450 ltr storage capacity

Multiple Tank Installation (79 and 119 USG / 300 and 450 ltr only)

Technical Data

The 79 and 119 USG / 300 and 450 ltr tank sizes may be combined into a battery consisting of between 2 and 4 tanks.

Tank batteries consisting of more than 4 tanks can be installed by creating up to 4 batteries, each consisting of 4 tanks. The heating contractor is responsible to ensure proper piping on both the primary and secondary circuits.

Tank storage capacity	USG		79		119	
	ltr		300		450	
Total capacity of tank battery	USG		159	238	357	476
	ltr		600	900	1350	1800
Number of storage tanks			2 ●●	2 ●●	3 ●●●	4 ●●●●
Recovery rate ^{*1} with a temperature rise of the domestic hot water from	194 °F 90 °C	MBH GPM ltr/h	361 11.5 2604	477 15.1 3440	716 22.7 5160	955 30.3 6880
50 to 113 °F / 10 to 45 °C and boiler water supply temperature of at the supply flow rate stated below	176 °F 80 °C	MBH GPM ltr/h	300 9.5 2162	396 12.5 2850	593 18.8 4275	791 25.1 5700
	158 °F 70 °C	MBH GPM ltr/h	225 7.1 1622	307 9.7 2212	460 14.6 3318	614 19.5 4424
	140 °F 60 °C	MBH GPM ltr/h	157 5 1130	218 6.9 1572	327 10.4 2358	436 13.8 3144
	122 °F 50 °C	MBH GPM ltr/h	123 3.9 884	164 5.2 1178	246 7.8 1767	327 10.4 2356
Recovery rate ^{*1} with a temperature rise of the domestic hot water from	194 °F 90 °C	MBH GPM ltr/h	307 6.8 1548	361 8.0 1822	542 12.0 2733	723 16.0 3644
50 to 140 °F / 10 to 60 °C and boiler water supply temperature of at the supply flow rate stated below	176 °F 80 °C	MBH GPM ltr/h	232 5.1 1168	300 6.7 1512	450 10.0 2268	600 13.3 3024
	158 °F 70 °C	MBH GPM ltr/h	157 3.5 790	225 5.0 1134	338 7.5 1701	450 10.0 2268
Supply flow rate for the recovery rates stated	GPM m ³ /h		26.4 6	26.4 6	39.6 9	50.8 12
Standby losses ^{*2}	MBH/24 h		15	19.2	28.8	38.4
Overall dimensions with insulation						
Overall width	inches		57 ½	72 ½	111 ¼	150
	mm		1461	1838	2826	3814
Overall depth	inches		43 ½	48	48	48 ¾
	mm		1109	1218	1218	1237
Overall height	inches		69	77	77	77
	mm		1752	1955	1955	1955
Weight	lbs		736 ¼	932	1409	1913
Tank with insulation	kg		334	423	639	868
Heating water content (heat exchanger pipe coil)	USG ltr		6 ½ 25	8 ½ 32	13 ¾ 50	20 ¾ 79
Heat exchanger surface area	ft. ² m ²		32 ¼ 3.0	42 3.9	62 ½ 5.8	84 7.8


^{*1}When planning for the recovery rate as stated or calculated, allow for the corresponding circulation pump. The stated recovery rate is only achieved when the rated output of the boiler is equal to or greater than that stated under "Recovery rate".

Please also refer to the corresponding sizing chart at the end of this manual.

^{*2}Measured values are based on a room temperature of 68°F / 20 °C and a domestic hot water temperature of 149°F / 65 °C and can vary by 5%.

Multiple Tank Installation (79 and 119 USG / 300 and 450 ltr only)

For domestic hot water applications which utilize modulating and low temperature hot water heating boilers or remote heating plants

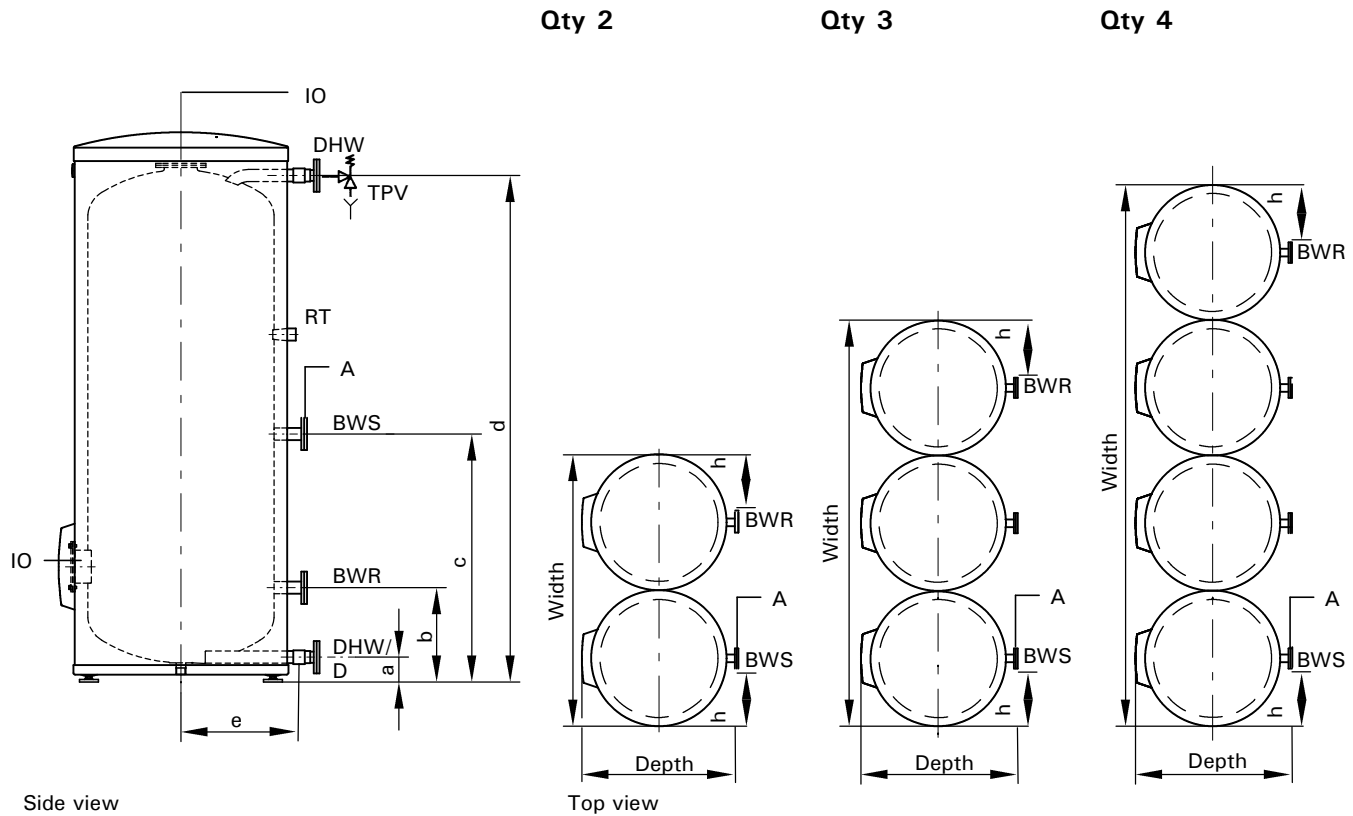

Side view

Top view

Legend

- IO Inspection and clean-out opening
- D Drain
- A Air vent
- BWR Boiler water return
- BWS Boiler water supply
- DCW Domestic cold water
- DHW Domestic hot water
- RT Recirculation tapping
- TPV T&P valve

Dimensions

Storage capacity	USG	79		119	
	ltr	300		450	
Total capacity of battery	USG	159	238	357	476
	ltr	600	900	1350	1800
Number of storage tanks		2	2	3	4
a	inches	3	4 ¼	4 ¼	4 ¼
	mm	76	107	107	107
b	inches	10 ¼	13 ¾	13 ¾	13 ¾
	mm	260	349	349	349
c	inches	34 ½	36 ½	36 ½	36 ½
	mm	875	924	924	924
d	inches	63	70 ¼	70 ¼	70 ¼
	mm	1600	1784	1784	1784
e	inches	16 ½	18	18	18
	mm	343	455	455	455
h	inches	8	12 ½	12 ½	12 ½
	mm	206	315	315	315

5167 518 - 01

Multiple Tank Installation (79 and 119 USG / 300 and 450 ltr only)

Domestic hot water draw rate

Storage tank content heated to 140 °F / 60 °C

Storage capacity	USG	79	119		
	ltr	300	450		
Battery storage capacity	USG	159	238	357	476
	ltr	600	900	1350	1800
Number of tanks		2	2	3	4
DHW draw rate	GPM	7.9	7.9	7.9	11.9
	ltr/min	30	30	30	45
Domestic hot water draw	USG	127	222	333	444
	Water with t = 140 °F / 60 °C (constant) ltr	480	840	1260	1680
Percentage of battery volume		80%	84%	84%	84%

Quick recovery (over 10-minute period)

Domestic hot water rise from 50 to 113 °F / 10 to 45 °C

Storage capacity	USG	79	119		
	ltr	300	450		
Battery storage capacity	USG	159	238	357	476
	ltr	600	900	1350	1800
Number of tanks		2	2	3	4
Heating water supply temperature		Quick DHW recovery (over 10-minute period)			
194 °F / 90 °C	USG/10 min	201	317	441	540
	ltr/10 min	759	1200	1670	2045
176 °F / 80 °C	USG/10 min	197	310	431	502
	ltr/10 min	745	1175	1630	1900
158 °F / 70 °C	USG/10 min	192	284	396	478
	ltr/10 min	728	1075	1498	1810

Max. domestic hot water draw rate (over 10-minute period)

Domestic hot water rise from 50 to 113 °F / 10 to 45 °C

Storage capacity	USG	79	119		
	ltr	300	450		
Battery storage capacity	USG	159	238	357	476
	ltr	600	900	1350	1800
Number of tanks		2	2	3	4
Heating water supply temperature		Max. DHW draw rate (over 10-minute period)			
194 °F / 90 °C	GPM	20.1	32	44.1	54
	ltr/min	76	120	167	204
176 °F / 80 °C	GPM	20	31.3	43.2	50.4
	ltr/min	74	118	163	190
158 °F / 70 °C	GPM	19.3	28.4	40	48
	ltr/min	73	107	150	181

Standard Equipment Product Installation

Standard Equipment

Vitocell 100-V
42 to 79 USG / 160 to 300 ltr capacity

Domestic hot water storage tank of high-grade steel with PUR Foam insulation (HCFC-free) and Ceraprotect two-coat enamel finish with:

- thermometer
- adjustable leveling feet
- built-in aquastat well
- Magnesium anode

The following is packed separately and attached to the crate:

- installation fittings package: with the necessary brass adaptors, other necessary hardware, and hemp
- temperature and pressure relief valve.

Electrostatically powder-coated sheet metal enclosure panel in a Vitosilver finish.

Vitocell 100-V
119 USG / 450 ltr capacity

Domestic hot water storage tank of high-grade steel with wrap-around soft PET insulation (HCFC-free) and Ceraprotect two-coat enamel finish with:


- thermometer
- adjustable leveling feet
- built-in aquastat well
- Magnesium anode

The following is packed separately and attached to the crate:

- installation fittings package: with the necessary brass adaptors, other necessary hardware, and hemp
- temperature and pressure relief valve.

Synthetic wrap-around enclosure panel in a Vitosilver finish.

Domestic hot water connections

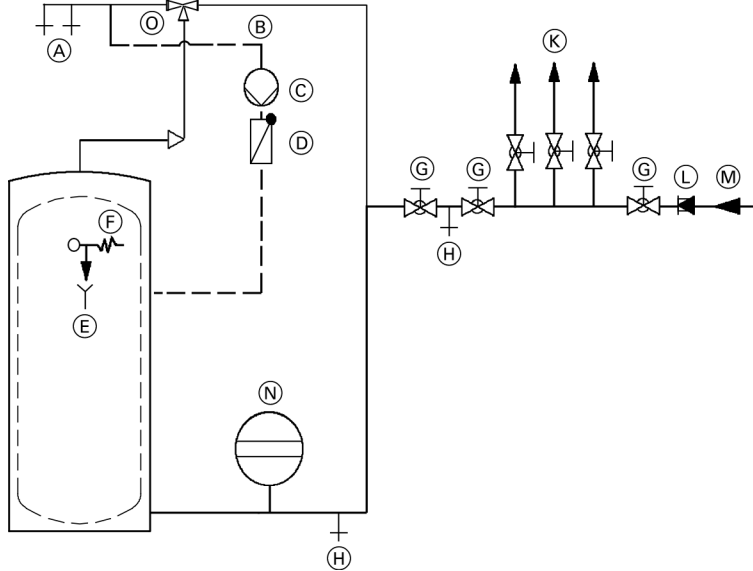

IMPORTANT

This is a simplified conceptual drawing only! Piping and necessary componentry must be field verified. Proper installation and functionality in the field is the responsibility of the heating contractor.

- (A) Domestic hot water supply
- (B) DHW recirculation line
- (C) DHW recirculation pump
- (D) Spring-loaded flow check valve
- (E) Discharge pipe
- (F) Temperature and pressure relief valve (TPV)
- (G) Shut-off valve
- (H) Drain
- (K) Domestic cold water supply lines
- (L) Backflow preventer
- (M) Domestic cold water inlet
- (N) Precharged expansion tank (required where backflow preventer is installed; check local plumbing codes and requirements)
- (O) Thermostatic mixing valve/anti-scald valve for solar applications (field supplied)

Backflow preventers

Where backflow preventers are required, a domestic water expansion tank installation is recommended in the cold water inlet piping before the cold water enters the Vitocell. For the backflow device, observe local plumbing codes and regulations.

Temperature and pressure relief valve

A temperature and pressure relief valve (T&P relief valve) is supplied with the tank. The heating contractor must install the valve on each tank in a method meeting code requirements. If local codes require a different relief valve, substitute the manufacturer's supplied valve. The tank is approved for 150 psig. Maximum operating pressure is 150 psig.

The T&P relief valve supplied with the tank is tested under ANSI Z21.22 Code for Relief Valves and Automatic Gas Shut-off Devices for Hot Water Supply Systems.

IMPORTANT

Since the heat exchanger coil allows for high MBH input (see Vitocell flow charts), confirmation that the appropriate and correct size pressure and temperature relief valve is used and installed, is necessary.

Watts Model 40XL-8	150 psig (US and Canada)
ASME pressure steam rating	1438 MBH
CSA temperature steam rating	205 MBH
Relief temperature	210°F (99°C)
Inlet thread	¾" male
Outlet thread	¾" female

Warranty

Our warranty for domestic hot water tanks states that the water heated must be of drinking (potable) water quality and that any water treatment equipment in use must function correctly.

Viessmann accepts no responsibility for damage howsoever caused and reserves the right to withdraw the product warranty if the product has been improperly installed or misapplied by the installer, contractor or final user. In order to qualify for product warranty, strict adherence to the installation and service manuals must be assured. In the event that Viessmann non-approved components are utilized, Viessmann reserves the right to withdraw all expressed or implied warranties without written notice.


The water to be heated with the Vitocell must be drinking (potable) water quality. If the tank is used to heat other media, the warranty will be null and void. Damage resulting from excessive pressure or temperature is clearly not the responsibility of Viessmann.

The amount of chloride and sulfate acceptable to the tank is limited. In areas where high concentrations of chloride and sulfate are present in drinking water, please consult Viessmann for directions.

Sensor Well

Vitocell 100-V 42 to 119 USG / 160 to 450 ltr capacity

The sensor well is welded into the domestic hot water storage tank.

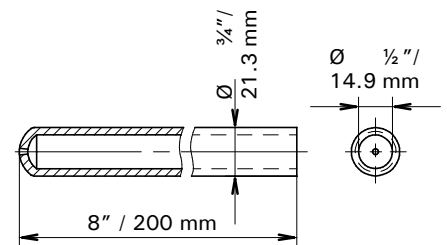


Vitocell 100-V Sizing Continuous Flow Capacity Chart

Vitocell 100-V, 42 and 53 USG / 160 and 200 ltr capacities

Curve **A**
Domestic hot water 40 to 113°F / 4 to 45°C

Curve **B**
Domestic hot water 40 to 140°F / 4 to 60°C

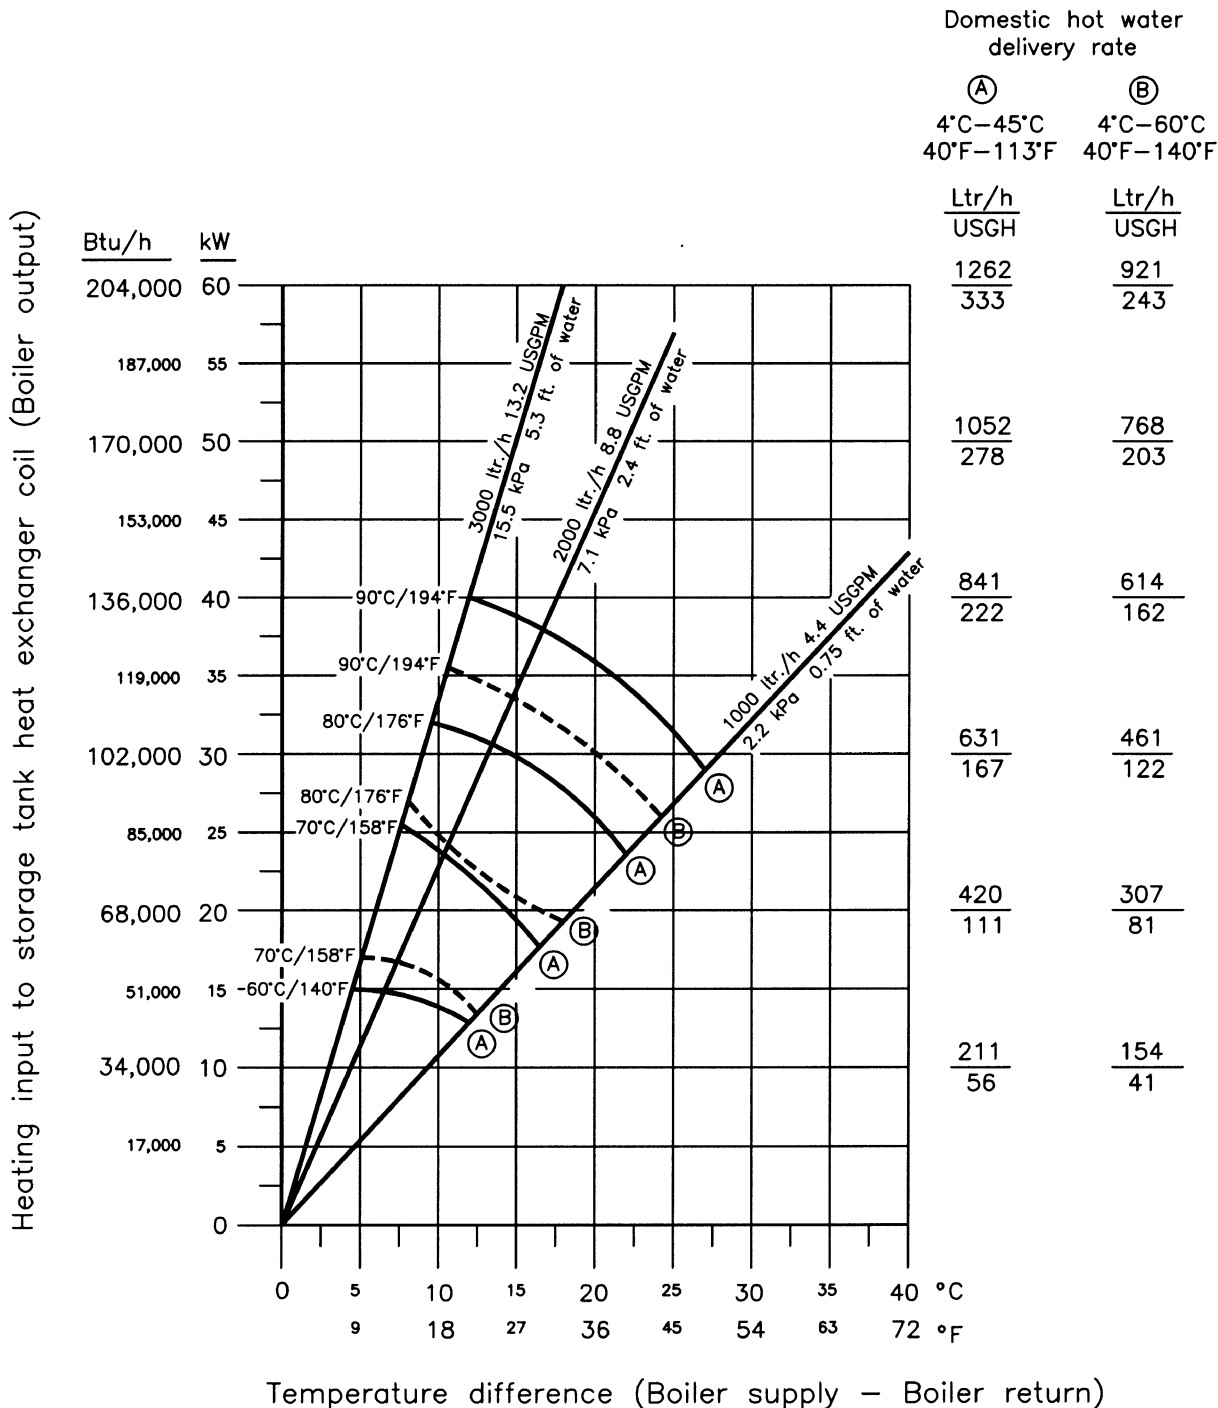

Vitocell 100-V Sizing Continuous Flow Capacity Chart


**Vitocell 100-V,
79 USG / 300 ltr capacity**

Curve **(A)**
Domestic hot water 40 to 113°F / 4 to 45°C

Curve **(B)**
Domestic hot water 40 to 140°F / 4 to 60°C

Domestic hot water
delivery rate

(A)	(B)
4°C–45°C 40°F–113°F	4°C–60°C 40°F–140°F
<u>Ltr/h</u> USGH	<u>Ltr/h</u> USGH

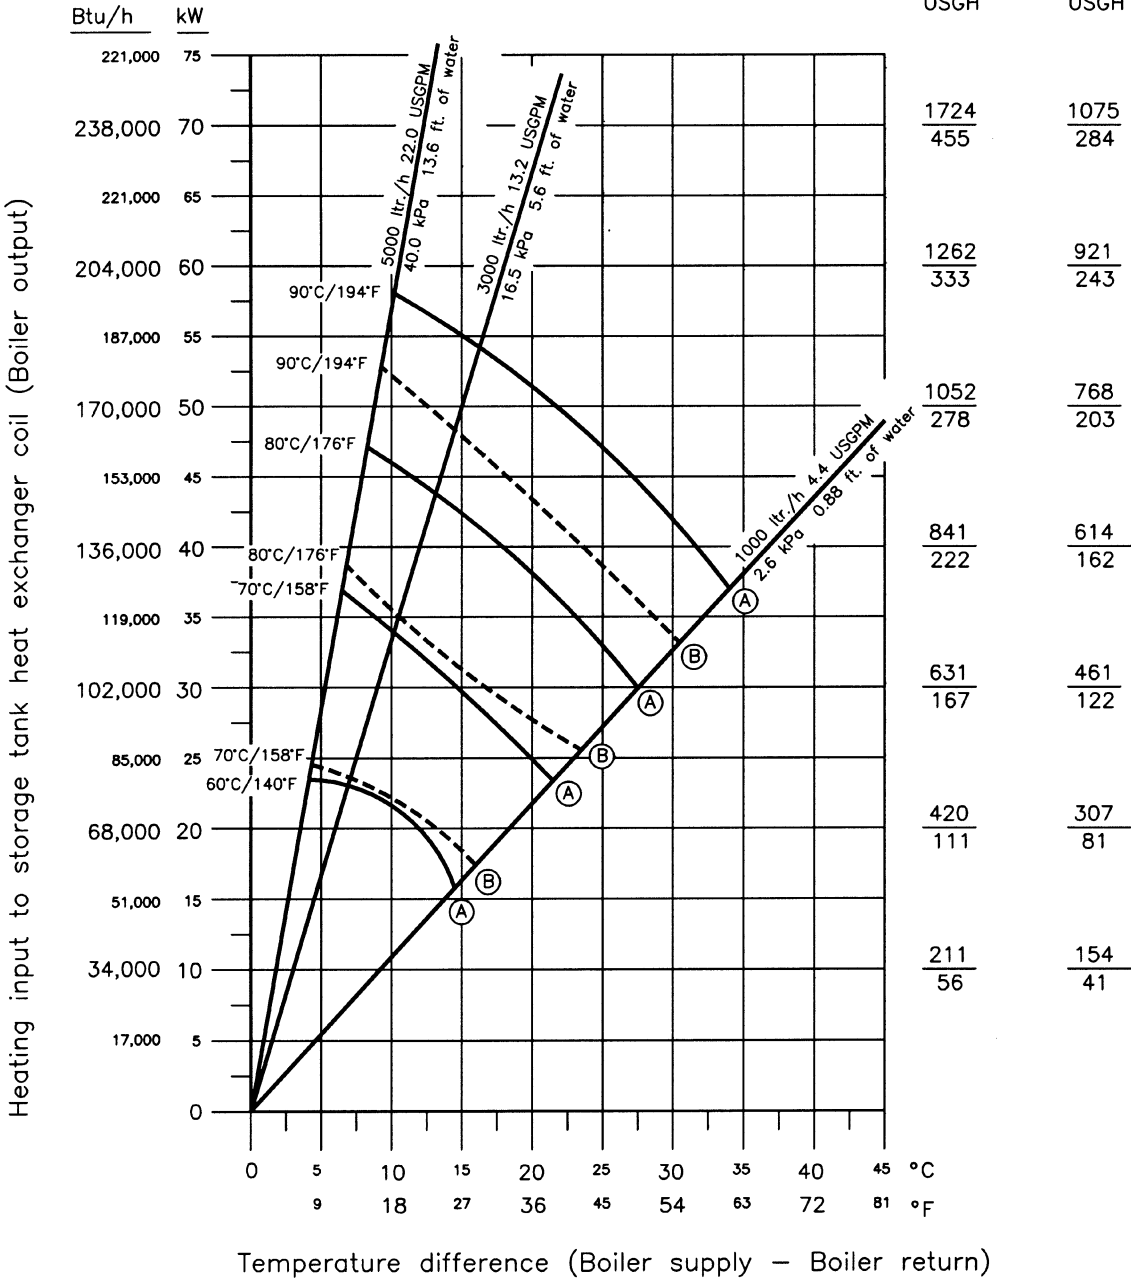


5167 518 - 01

Vitocell 100-V Sizing Continuous Flow Capacity Chart

Vitocell 100-V, 119 USG / 450 ltr capacity

Curve **A**
Domestic hot water 40 to 113°F / 4 to 45°C


Curve **B**
Domestic hot water 40 to 140°F / 4 to 60°C

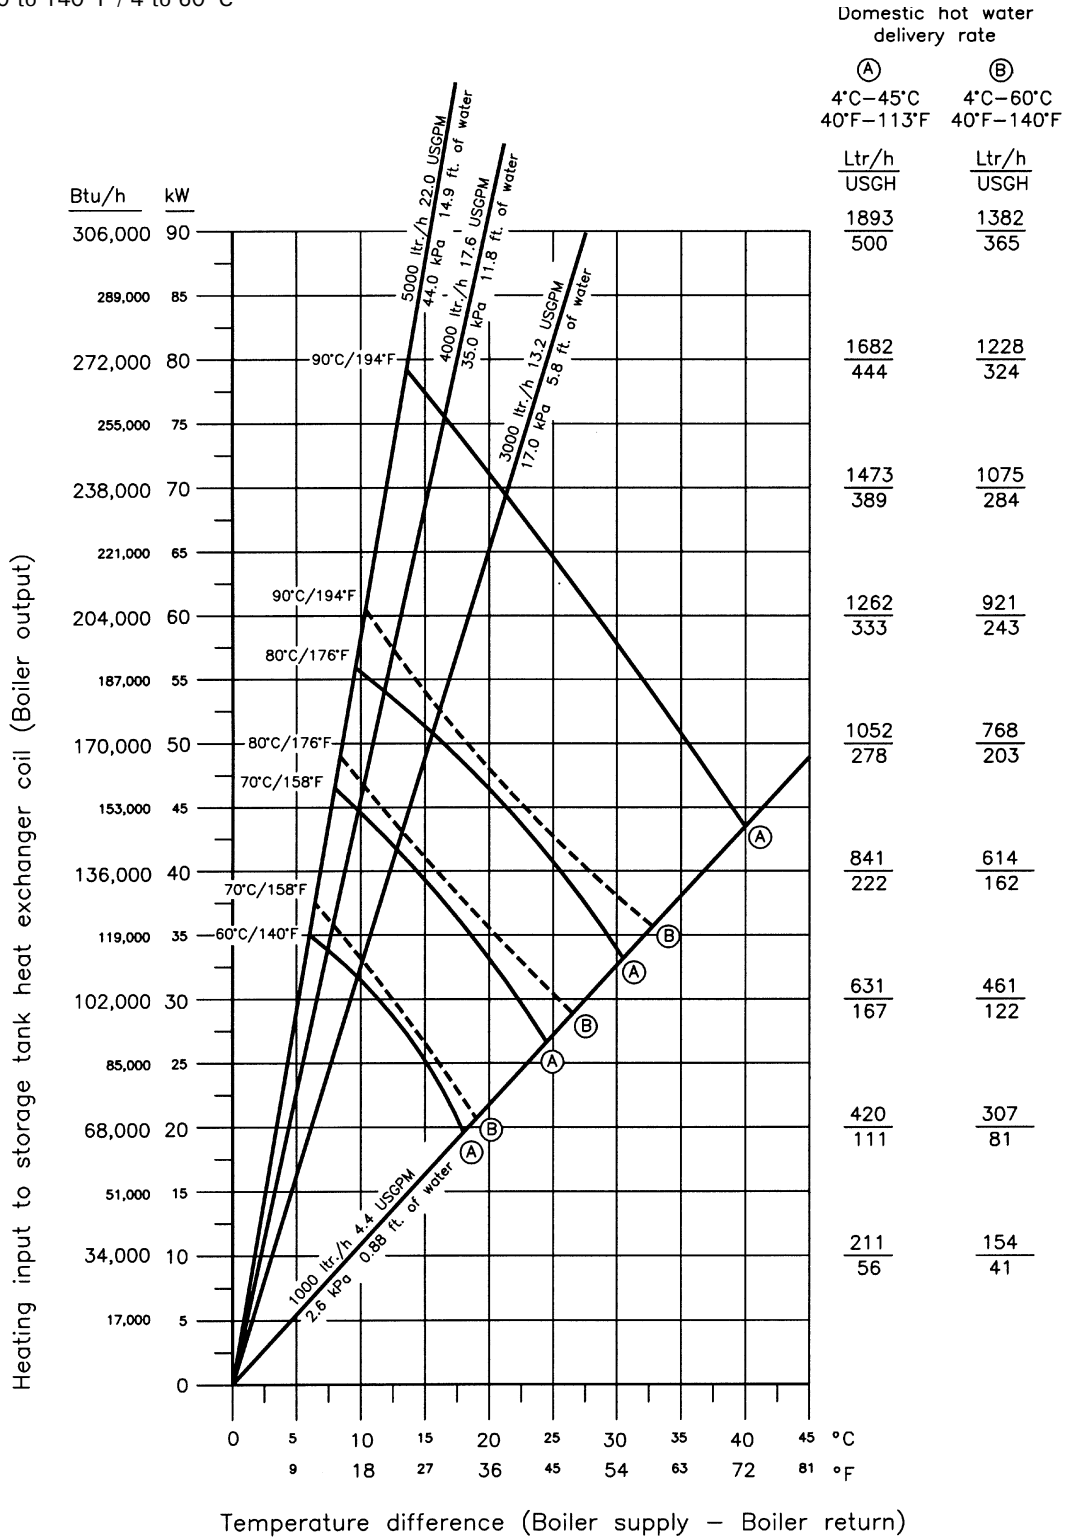

Vitocell 100-V Sizing Continuous Flow Capacity Chart

Example: Vitocell 100-V, 119 USG / 450 ltr capacity

Assume boiler output to tank is 170 MBH. Enter chart at left and draw horizontal line across to recovery rate of 203 GPH / 3.4 GPM for 140°F / 60°C domestic hot water under column B. Where the horizontal line intersects the 194°F / 90°C curve is the point of intersection for the diagonal line used to size the pump. The diagonal line begins at the origin and goes through the point of intersection extending up to the top of the chart. Read between the reference diagonal lines to get a pump specification of 11.9 GPM at 5 ft. To summarize: For a Vitocell-V 100 with 119 USG / 450 ltr capacity and 170 MBH input, the boiler water temperature is 194°F / 90°C, difference between boiler return and supply water temperature is 31°F / 17°C, recovery rate is 3.4 GPM of 140°F / 60°C DHW, and the pump required is 11.9 GPM, 5.0 ft. plus pressure drop in piping and boiler.

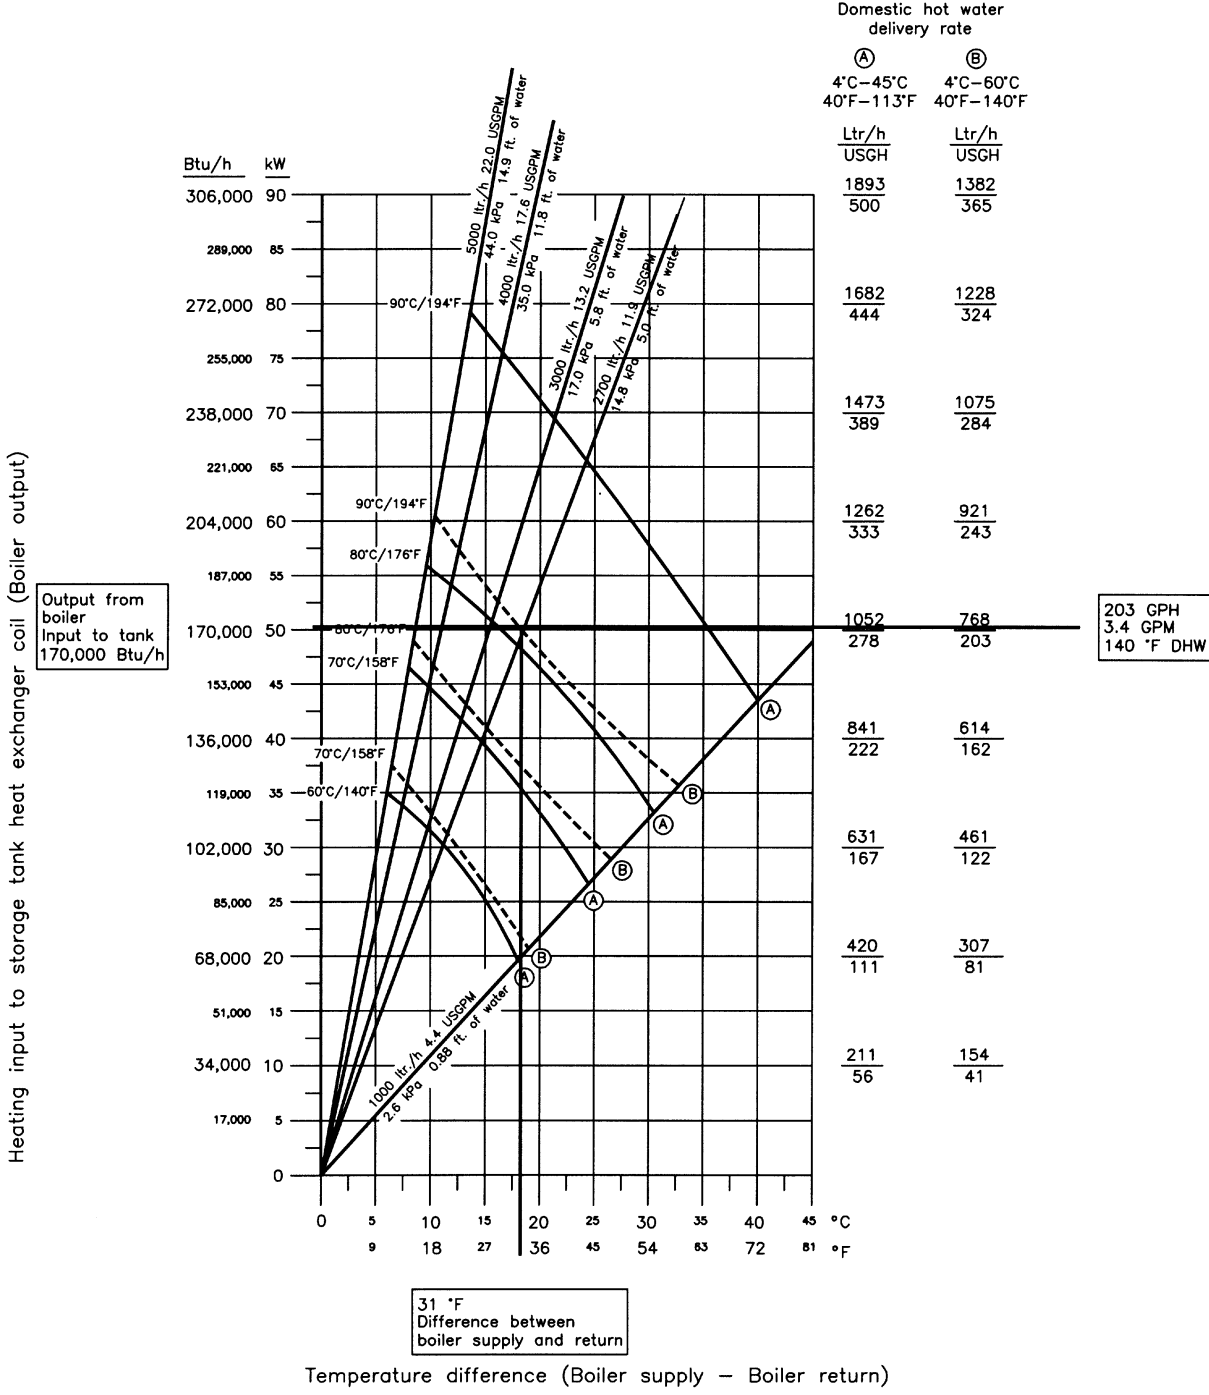

5167 518 - 01

Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, Ontario • N2V 2G5 • Canada
TechInfo Line 1-888-484-8643
1-800-387-7373 • Fax (519) 885-0887
www.viessmann.ca • info@viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, Rhode Island • 02886 • USA
TechInfo Line 1-888-484-8643
1-800-288-0667 • Fax (401) 732-0590
www.viessmann-us.com • info@viessmann-us.com

5167 518 - 01 Technical information subject to change without notice.

Printed on environmentally friendly
(recycled and recyclable) paper.

