



## Model IM15/S Integrated Gas Multi-Function Cooktop

For true wok cooking, the burner of the Wolf multi-function cooktop sculpts the gas flame into a plume, focusing heat in the center of the wok, then dispersing it outward for precisely controlled cooking. The low-profile grate fits nicely with any Wolf gas cooktop and can accommodate your largest stockpot. The powerful burner exceeds 18,000 Btu/hr. Model IM15/S is available in classic stainless steel.



*Model IM15/S shown. Also shown is Model CT15G/S gas cooktop and Model DD30 downdraft ventilation system.*

### Features

- Integrated design allows for installation of multiple cooktops or modules
- Available in natural and LP gas
- Stainless steel top construction with classic stainless steel finish
- High output 18,000 Btu/hr dual-stacked sealed burner
- Automatic electronic reignition system
- Illuminated control panel
- Individual spark ignition system
- Two interchangeable cast iron burner grates with matte porcelain finish—wok grate and low-profile continuous grate
- Deep drawn burner pan

### Model Options

	IM15/S	IM15/S-LP
Stainless Steel Finish	Classic	Classic
Type of Gas	Natural	LP

### Accessories

- Filler strip for installation of multiple cooktops or modules
- Bracket supports for installation of two integrated modules with downdraft (Model DD30 only)
- High altitude conversion kit



*Model IM15/S shown with low-profile grate*

*Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.*



Classic




Control Panel



### Model IM15/S Integrated Gas Multi-Function Cooktop

#### Overall Dimensions

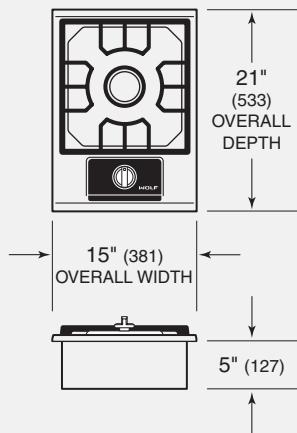


*Shown with wok grate.  
Unit dimensions may vary by  $\pm \frac{1}{8}$ ".*

#### Specifications

Exterior Finish	Classic
Overall Width	15"
Overall Height	5"
Overall Depth	21"
Burner Rating	18,000 Btu/hr
Recommended Cabinet Width	
one module	18"
two modules	33"
Minimum Cabinet Depth	22 <sup>3/4</sup> "
Minimum Height Clearance*	5"
Countertop Cut-Out Width	14"
Countertop Cut-Out Depth	19 <sup>1/4</sup> "
Electrical Requirements	120 V AC, 60 Hz 15 amp circuit
Power Cord	6' cord with grounded plug
Gas Rating	18,000 Btu/hr
Shipping Weight	30 lbs


\*A minimum height clearance of 5 $\frac{1}{2}$ " is required between countertop and any combustible surface directly below the cooktop.

#### Installation Specifications

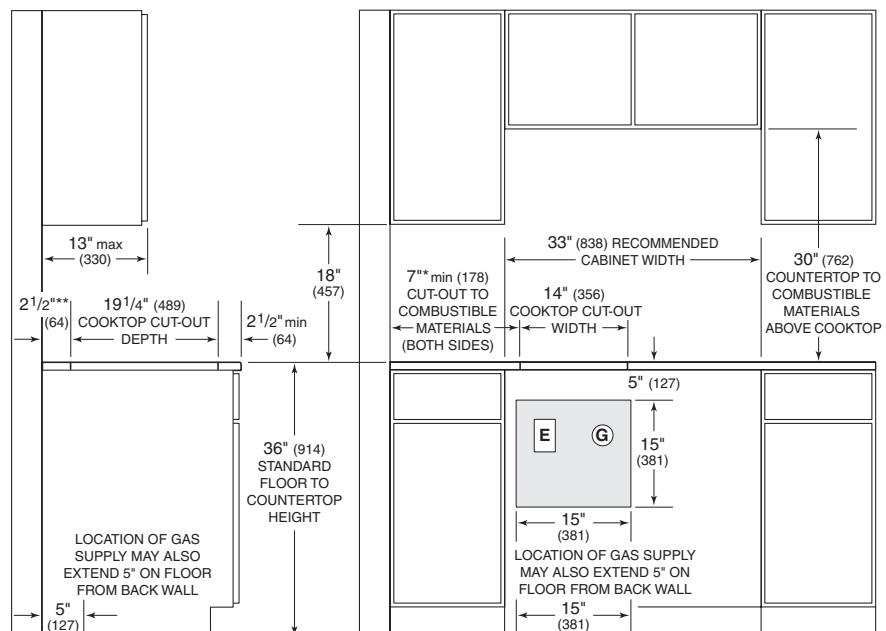

*NOTE: Application shown allows for installation of two 15" (381) modules side-by-side with 33" (838) recommended cabinet width. 18" (457) recommended cabinet width for installation of single 15" (381) cooktop or module. \*Minimum clearance from both side edges of cooktop cut-out to combustible materials up to 18" (457) above countertop. \*\*Minimum clearance from rear edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.*

#### Countertop Cut-Out Dimensions

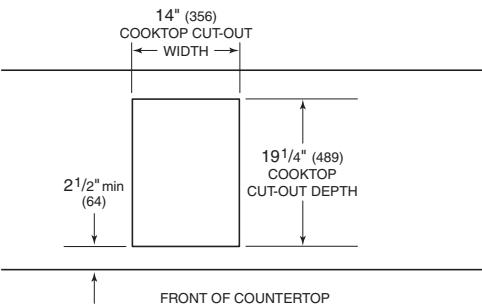

*Dimensions in parentheses are in millimeters unless otherwise specified.*

#### Installation Notes

Complete installation specifications can be found on our website, [wolfappliance.com](http://wolfappliance.com).