



P/N : 97E9500152

HL900S
HL900D
User's Reference

TFT LCD Monitor





Contents

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, with can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- Only shielded interface cable should be used.


Finally, any changes or modifications to the equipment by the user not expressly approved by the grantee or manufacturer could void the users authority to operate such equipment.

- 1. Precautions 2
- 2. Items 4
- 3. Setting up the LCD monitor 5
 - How to connect the power cord and the several cables to the LCD monitor. 5
 - Plug & Play 5
 - Warm-up Time 5
- 4. Adjusting The Monitor 6
 - The Function Control Buttons 6
 - How to use the Function Key. 6
 - Main OSD Menu 6
 - BRIGHTNESS/CONTRAST 7
 - COLOR 7
 - POSITION &CLOCK/PHASE 7
 - OSD FUNCTION ADJUSTMENT 7
 - SETUP MENU 7
- 5. Appendix 8
 - Display Modes 8
 - 15-pin D-Sub Connector 9
 - 24-pin DVI Connector 9
 - DPMS Power Saving Mode 10
- 6. Troubleshooting 11


1

Precautions


Warning : The following information will help you avoid the risk of electric shock, serious injury, and death.




Plug the power cord into a properly grounded outlet. There is the risk of electric shock.




If you hear a noise or smell smoke from the computer or adaptor, unplug the power cord immediately, and call the service center. There is the risk of electric shock or fire.




Do not overload an electrical outlet with too many devices. There is the risk of fire.




Do not unplug from the outlet by pulling the power cord or when your hands are wet. There is the risk of electric shock and fire.




Do not bend the power cord excessively or place heavy objects on it. Keep children and pets away from the power cord as they may damage the power cord. There is the risk of electric shock and fire.




Do not use a damaged power cord or plug. Make sure the plug fits snugly into the outlet. There is the risk of electric shock or fire.



Do not expose the monitor to the direct sun light.




Keep the monitor away from high temperature, humidity, and dust.
■ Operating environment
=0~25degrees Celsius
■ Operating environment
=30~80relative humidity.



Do not block the fan louvers. There is the risk of fire or damage to the monitor.




Do not allow any object or liquid to enter inside the monitor. There is the risk of electric shock, fire, or damage to the monitor.




Do not attempt to disassemble, fix, or modify the monitor. There is the risk of electric shock or fire.

Caution : The following information will help you avoid the risk of minor or moderate injury, or damage to the monitor.



Use a proper voltage/current level indicated



Do not clean the LCD with abrasive chemicals. There is the risk of damage to the LCD.




Do not scratch and damage the LCD with sharp objects.



Keep the monitor away from objects and electrical appliances that may generate electromagnetic fields.




Place the monitor on a flat, stable surface. The monitor may fall and there is the risk of damage or injury



Unplug the power cord when the monitor is not in use for a prolonged period of time.


2 Items

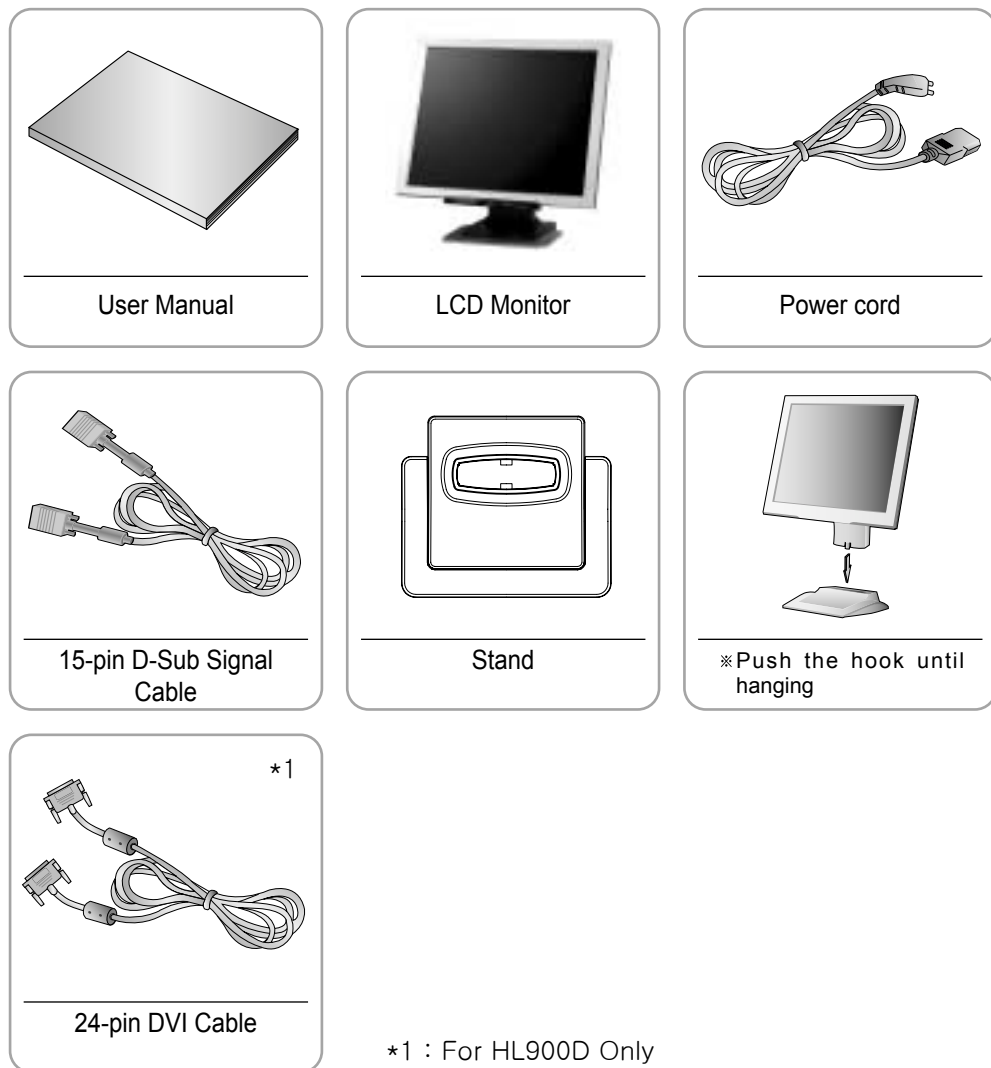

Notice Please make sure the following items are included with your monitor. If any items are missing, contact your dealer.

3 Setting up the LCD monitor

How to connect the power cord and the several cables to the LCD monitor.

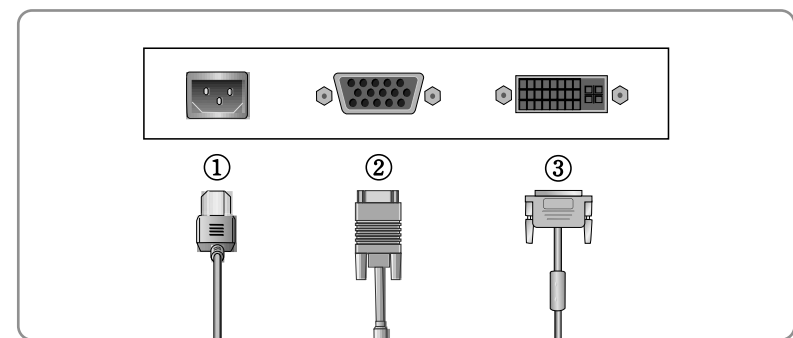

No.	Name	Cable connections
1	Power	Power Cord
2	PC	15-pin D-Sub Signal Cable
3 *1	DVI	24-pin DVI Cable

*1 : For HL900D Only

Plug & Play

The adoption of the new VESA Plug and Play solution eliminates complicated and time consuming setup. It allows you to install your monitor in a Plug and Play compatible system without the usual hassles and confusion. Your PC system can easily identify and configure itself for use with your display. This monitor automatically tells the PC system its Extended Display Identification Data (EDID) using Display Data Channel (DDC) protocols so the PC system can automatically configure itself to use the flat panel display.

Warm-up Time

All LCD monitors need time to become thermally stable whenever you turn on the monitor after letting the monitor be turned off for a couple of hours. Therefore, to achieve more accurate adjustments for parameters, allow the LCD monitor to be warmed up for at least 30 minutes before making any screen adjustments.