eLink Tag Tester - User Guide


Tag Tester Functions

Rear View And Battery Replacement

9V Alkaline The Tag Tester performs the following functions: Battery • Reads the unique ID of a tag, by generating an RF field (Tag In Field – TIF). Replace only with • Tests the Tamper mechanism of a tag (Tag Initiated Communications – TIC). Alkaline Battery • Reads the battery status for the tag (Good or bad only). Battery Cover DATA Tag ID Test Tag Tamper Test Indicator Indicator ттет **Computer Serial** Interface 2 Lines by 12 Characters (Future option) backlit Liquid Crystal Display **Tag Read Range** Scroll Down Scroll Up Button Button Cancel Entry and Accept Entry, Power Power OFF Button ON and Backlight Button 6" 100 Field Pattern XI P Tag is best read about 6" under Tester. Tags may also be placed adjacent to Tester, with Tester laying on flat surface



eLink Tag Tester - User Guide

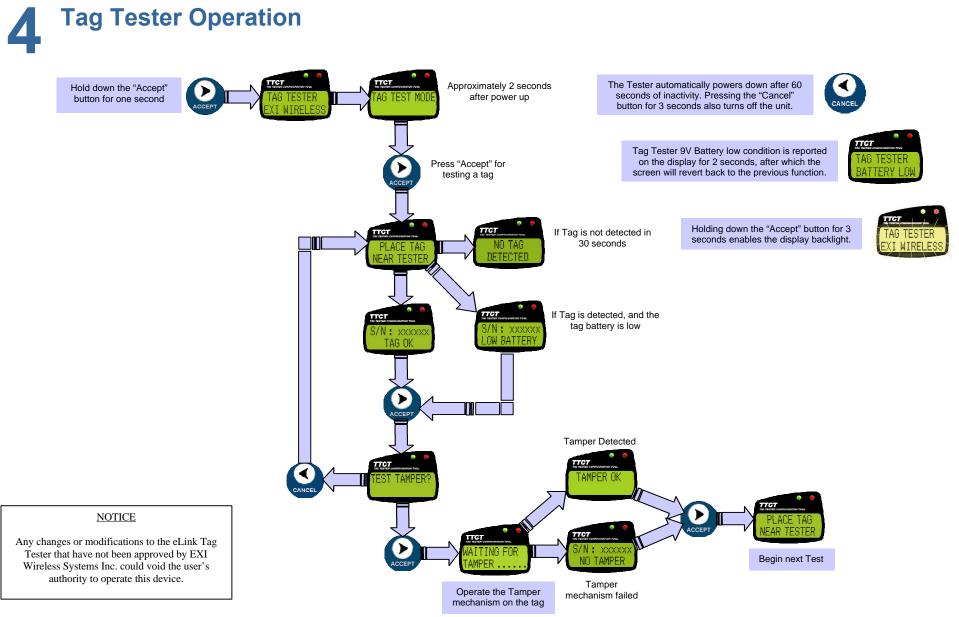



Ó2001 eXI Wireless Systems Inc. All rights reserved. eXI and the eXI logo, RoamAlert, RoamAlert^{Plus} and eLink! are either trademarks or registered trademarks of eXI Wireless Systems inc. Specifications subject to change without notice