


JCHR35W5A8/A9/C4

Remote Controller


User Manual

01 Product Info


a.Front

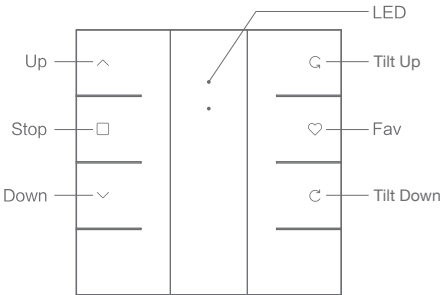

JCHR35W5A8
Single channel remote controller

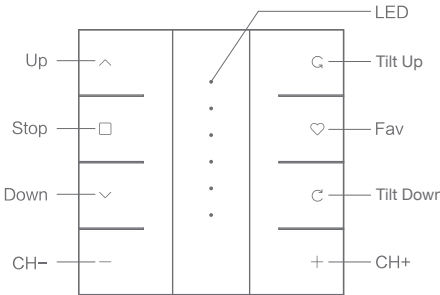


JCHR35W5A9
6-channel remote controller

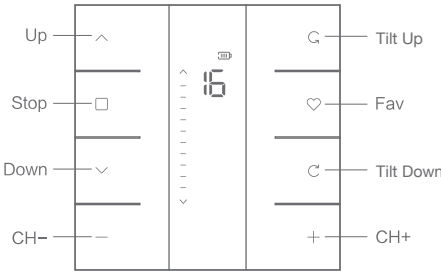

JCHR35W5C4
16-channel remote controller

b.Back

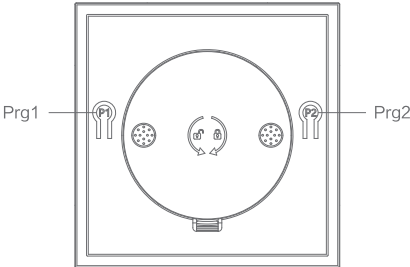

JCHR35W5A8/A9/C4

02 Models & Parameters

(more info please refer to the nameplate)

Electrical Specification	Standard
Battery Type	CR2430*3V*2
Working Temperature	-10℃-50℃
Radio Frequency	433.92M ± 100KHz
Transmit Distance	>=30m indoor


03 Caution!



1. The transmitter should not be exposed to moisture or impact, so as not to affect its life
2. During use, when the remote control distance is significantly shorter or less sensitive, please check whether the battery needs to be replaced.
3. When the battery voltage is too low, JCHR35W5A8, JCHR35W5A9 orange LED flickers when you press button, while JCHR35W5C4 LCD screen will show a low voltage pattern “” indicating to replace battery.
4. Please properly dispose of used batteries according to the local garbage classification and recycling policy.

04 Instructions

a.Channels & Groups Toggling

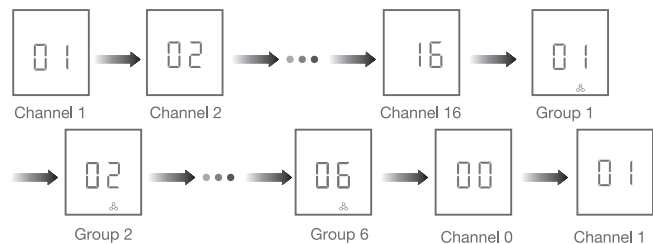

or Short Press → To toggle

Note: Channel 0 is the group control for all the channels.

b.Number of Channels Setting




Note: Max&Min number is 16&1 when it's set under channel 1-16.

c.Number of Groups Setting




Note: Max&Min number is 6&0 when it's set under channel 0.

d.Channel in Group Setting

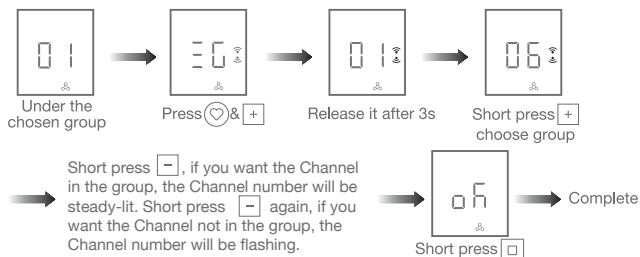

Note: Channel in groups setting is under GROUP 1-6.

e.Check the Channels in Groups

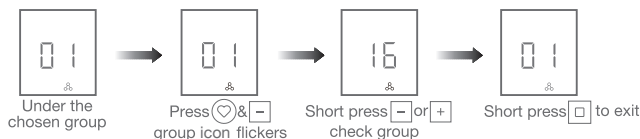

Note: LCD will show "EC" if there is no detailed channel.

f.Prohibit Dual-key Operation




Prgx10s LCD shown a lock icon (for JCHR35W5C4)

JCHR35W5A8,JCHR35W5A9 remote controller LED will flickers, not show a lock pattern.

② Repeat the above, dual-key operation activated

Note: When dual-key operation prohibited, these programming setting functions are not allowed, such as limits setting.

g.Position Percent Setting

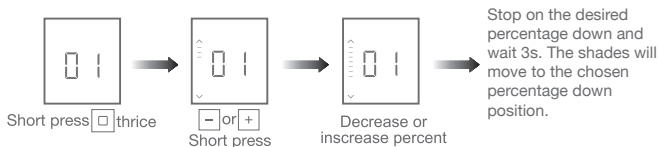

Note: All the shades under same group will run to same position after percent setting.

h.For other operations, please refer to the motor operation instruction

05 FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.