

RANGE COMPOSITION

A range of refrigerators designed to satisfy the food-conservation requirements of professional caterers who want the high performance and reliability of a commercial unit suited for use with trolleys. The range of heated ROLL-IN cabinets consists of 2 models: 1 ROLL-IN with a stainless steel door and 1 ROLL-THROUGH with stainless steel doors on both sides.



732515

ROLL IN - PASS THROUGH heated cabinet

REFRIGERATORS **ZANUSSI**
PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES



- ◆ Internal and external structure in AISI 304 stainless steel
- ◆ Control panel featuring an ON/OFF button, a digital temperature display for viewing and adjusting the internal temperature.
- ◆ High-density expanded polyurethane insulating foam, 75 mm in thickness, guarantees exceptional, long-term insulation and notable energy savings
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain standard dimension trolleys.
- ◆ A reversible self-closing door equipped with an easily replaceable magnetic door seal to guarantee perfect closure. The recessed door handle makes opening the cabinet extremely easy. The door open to a maximum of 180° and remains open at 95°
- ◆ High standards of hygiene and

ease of cleaning are guaranteed by the rounded internal corners of the cabinet.

- ◆ CFC and HCFC free

◆ All models comply with the standards required by the main international approval bodies and are H marked.

CHARACTERISTICS	MODELS	
	RI16H1F 726515	RI16H2FT 726516
Operating temperature - min/max °C		50/75
Operating mode	Ventilated	Ventilated, Ventilated
Type of stainless steel		
external	304 AISI	304 AISI
internal	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	1630	1630, 1610
External dimensions - mm		
width	1021	1021
depth/with open doors	1163, 2112	1238, 3136, 3136
height	2271	2271
Internal dimensions - mm		
width	870	870, 870
depth	1039	1106, 1105
height	1800	1800, 1800
N° and type of door	1	2
Door hinges	Right Side	Right Side
Power - kW		
installed-electric	1.91	1.91
Noise level - dBA	46	
Net weight - kg.	185	200
Power supply - V, phases, Hz	400 V, 3N, 50	400 V, 3N, 50
Maximum trolley size		
width - mm	820	820
depth - mm	1015	1088
height - mm	1790	1790

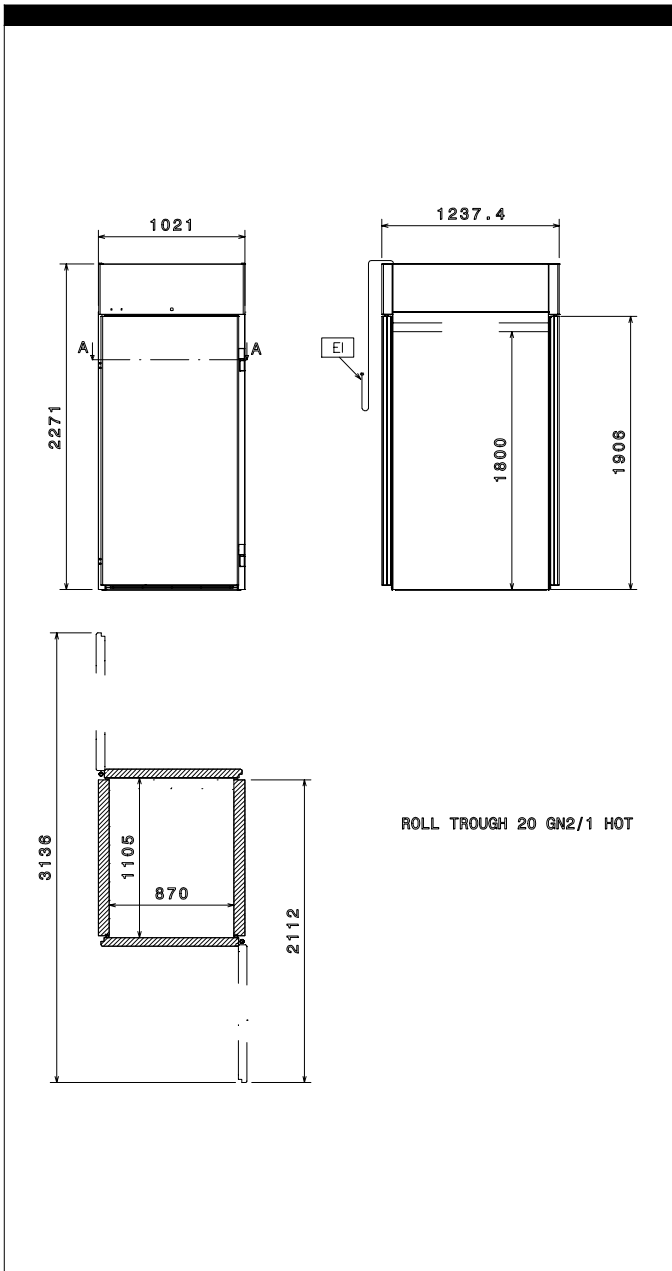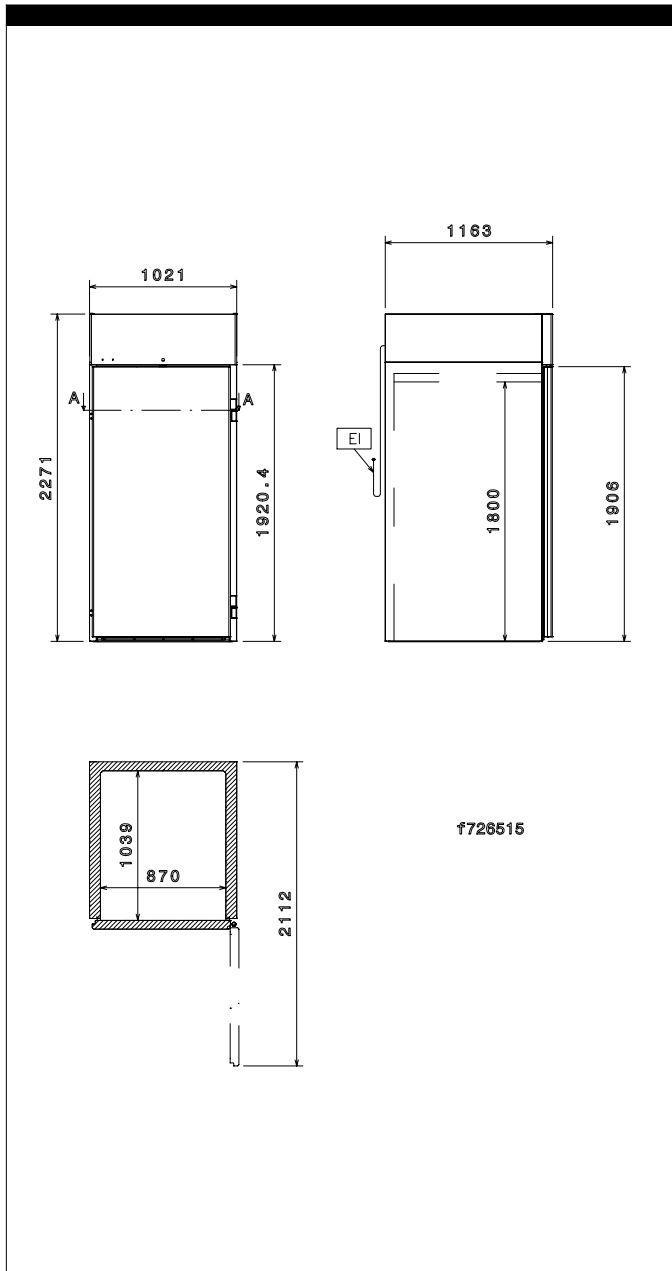

	RI16H1F 726515	RI16H2FT 726516
El - Electrical connection	400 V, 3N, 50	400 V, 3N, 50

ACCESSORIES	MODELS	
	RI16H1F 726515	RI16H2FT 726516
17 GN 2/1 CONTAINER TROLLEY	361258	361258
17 GN 2/1 CONTAINER TROLLEY SPACE SAVING	361260	361260
BANQ.TROLLEY-92PLATES 85MM PITCH-20GN2/1	922055	922055
BASE FOR ROLL-IN-RACK	880018	880018
HUMIDIFIER KIT FOR HOT ROLL-IN CAB.1600L	880188	880188
KIT HACCP EKIS	922166	
KIT WITH 2 HINGES FOR DOOR REVERSIBILITY	881432	881432
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457
ROLL-IN RACK FOR 2/1 GASTRONORM GRIDS	881449	881449
TROLLEY FOR 2/1-GN ROLL-IN RACK	880017	880017



www.zanussiprofessional.com