

# **iBaby Monitor**

**Model: M6/M6T**

# **User Manual**

# Index

1	Introduction.....	3
1.1	The package contents .....	3
1.2	Function and Features .....	3
1.3	Product Specification .....	4
2	Appearance and interface .....	6
2.1	Appearance.....	6
2.2	Interface of the camera.....	7
3	Set-up and Installation .....	8
4	FCC Caution: .....	9

# 1 Introduction

The iBaby monitor works with your iPod touch, iPhone or iPad so you can see and hear your baby anytime, anywhere as long as you are connected to the internet (including Wi-Fi, 3G/4G network, etc.). From your free app, you set motion/sound alerts, zoom in and snap photos so you never miss an important moment.

"This product is meant for providing convenience for baby monitoring. The manufacturer is not responsible for any legal liability caused by negligence. "

## 1.1 The package contents

- ✓ Camera \* 1
- ✓ Power Adapter \* 1
- ✓ Base support \* 1
- ✓ Quick Installation Guide \* 1

## 1.2 Function and Features

- ✓ Support 802.11b/g/n protocol, can build up wireless monitoring.
- ✓ It adopts the TCP/IP network protocols and has inner web server. Users can browse video with a iPod Touch, iPhone and iPad.
- ✓ Infrared LED for night vision covers 16ft area, to realize 24 hours monitoring.
- ✓ With built-in Microphone and speaker, it enables user to monitor the sound on the site, and it supports two-way intercom function.
- ✓ It was equipped with pan/tilt function, horizontally 355°and vertically 100°. Its outlook is smart, easy and convenient to install in many sites.
- ✓ Motion detection, sound detection.
- ✓ Alert record can store up to 100 alerts
- ✓ Photos are stored in the app
- ✓ Supports UPNP,P2P, port forwarding automatically on the router.

### 1.3 Product Specification

Model:M6		
Features	P2P	Support P2P
	WIFI setting	Monitor automatically get the IOS device is currently connected Wi-Fi account and password
	Cloud Storage	Support the pictures stored in the cloud
CPU	OS	Embedded Linux OS
	CPU	32Bit RSIC Embedded Processor
Video	Compression	H.264 baseline
	Frame rate	Max.30fps
	Resolution	HD(1280*720),VGA(640*480),QVGA(320*240)
	Image Rotation	Brightness, contrast, resolution is adjustable, Mirror /Flip
	Lens	f=4.3mm, F=2.0, Fixed Iris
Lighting	Minimum illumination	0 Lux(IR on automatically)
	Lighting	9pcs 12ML Infrared LEDs, 6m distance
Audio	Compression	ADPCM
	Audio In	One way input / Internal Microphone
	Audio Out	One way output / Internal Speaker
Network	Network interface	N/A

	User Access	Support 12 users visiting on the same time
	Protocol	TCP/IP , HTTP , UDP , DHCP , UPNP,NTP,P2P
	IP address	DHCP IP address
WIFI	Protocol	Support 802.11b/g/n
	Encryption	Support WEP/WPA/WPA2 encryption
	Setting	Monitor automatically get the IOS device is currently connected Wi-Fi account and password
	USB interface	Connect with IOS devices
	antenna port	Built-in antenna
PTZ	Motor	Built-in motor control
	Coverage	Horizontal : 355°, Vertical : 100°
Other	Shape material	Plastic
	Work environment	Indoors
	Power	DC5V 2A
	Reset	One
	Product power	Daytime 2.5W, night 3W
	Operating environment	Temperature: 0~40 °C, humidity: 30°C ≤75%
	Storage environment	Temperature: -40°C~55°C, humidity: 40°C ≤ 90%

		Monitor size: 108mm(L)*108mm(W)
	Size	Package size: 173.5mm(L)*173.5mm(W)*175mm(H)
	Weight	Weight : 558g
	Package contents	Power Adapter , Quick start guide & Warranty card , Magnetic base
Software	IOS6.0 or later	App is free to download from App Store
Certification	Certification	FCC CE ROHS

## 2 Appearance and interface

### 2.1 Appearance




Note:

Status Indicator: Green light indicates the device is running while flicking indicates the

device is searching for network. Red indicates the device is on low battery. Orange indicates the device is charging. The default state of status indicator is on. You can turn it off via the iBaby View app on your iPod Touch, iPhone or iPad.

## 2.2 Interface of the camera

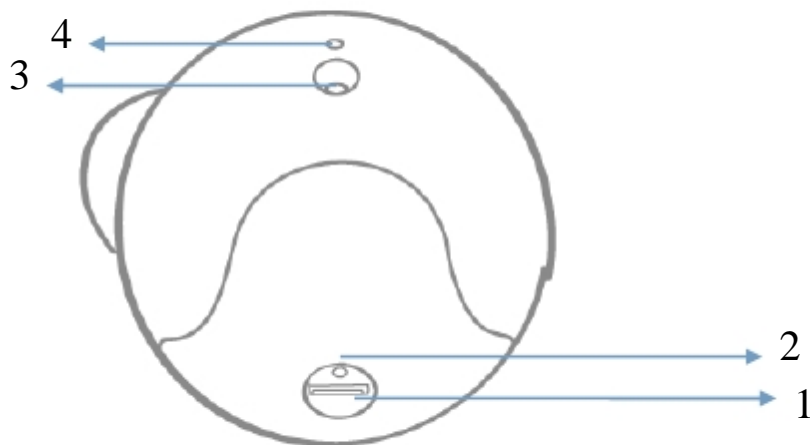


1: USB Port

2: Reset

3: Power Input Socket

4: LED Light

### 3 Set-up and Installation

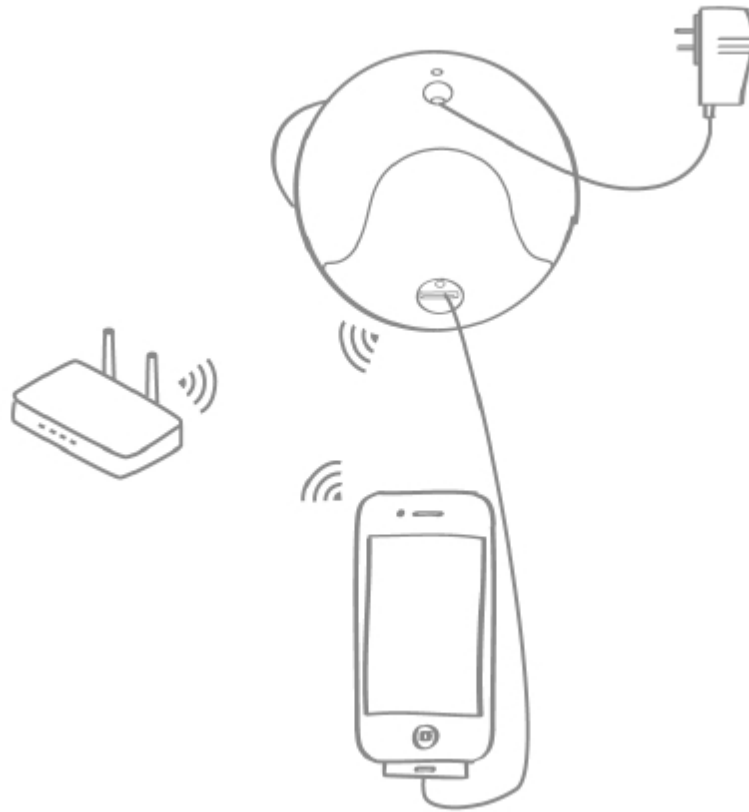

- ✓ Ensure your Apple iOS device is connected to your home Wi-Fi network
- ✓ From the App Store, download “iBaby View M6” on to your supported mobile device
- ✓ Plug the power adapter into the camera and into an electrical outlet
- ✓ The camera will take a minute to power on. Wait for the tone before proceeding
- ✓ Connect the USB cable from your mobile device to the camera
- ✓ The message “Share Wi-Fi Settings” will appear. Please select “Allow”
- ✓ Proceed to follow the simple onscreen instructions to complete the setup
- ✓



## **4 FCC Caution:**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### **FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.