



FALCON USER'S GUIDE

JANUARY 2019

COPYRIGHT

Subject to the existing rights of third parties, Space Exploration Technologies Corp. (SpaceX) is the owner of the copyright in this work, and no portion hereof is to be copied, reproduced, or disseminated without the prior written consent of SpaceX.



TABLE OF CONTENTS

| | | |
|----------|---|-----------|
| 1 | INTRODUCTION | 1 |
| 1.1 | User's Guide Purpose | 1 |
| 1.2 | Company Description..... | 1 |
| 1.3 | Falcon Program Overview..... | 1 |
| 1.4 | Falcon Launch Vehicle Safety | 2 |
| 1.5 | Falcon Reliability | 3 |
| 1.5.1 | Engines | 3 |
| 1.5.2 | Avionics..... | 4 |
| 1.5.3 | Staging Architecture and Design..... | 4 |
| 1.6 | Pricing | 4 |
| 2 | VEHICLES..... | 5 |
| 2.1 | Falcon 9 Vehicle Overview..... | 5 |
| 2.2 | Falcon Heavy Vehicle Overview | 5 |
| 2.3 | Structure and Propulsion..... | 6 |
| 2.4 | Retention, Release and Separation Systems | 8 |
| 2.5 | Avionics, and Guidance, Navigation and Control..... | 8 |
| 2.6 | Coordinate Frame | 8 |
| 3 | PERFORMANCE..... | 10 |
| 3.1 | Available Injection Orbits | 10 |
| 3.2 | Mass-to-Orbit Capability | 10 |
| 3.3 | Mass Properties | 11 |
| 3.4 | Launch Windows..... | 12 |
| 3.5 | Flight Attitude | 12 |
| 3.6 | Separation Attitude and Accuracy..... | 12 |
| 3.7 | Multiple Payloads..... | 13 |
| 3.8 | Secondary Payloads..... | 13 |
| 4 | ENVIRONMENTS..... | 14 |
| 4.1 | Transportation Environments..... | 14 |
| 4.2 | Temperature, Humidity and Cleanliness | 14 |
| 4.3 | Flight Environments | 15 |
| 4.3.1 | Loads..... | 15 |
| 4.3.2 | Sine Vibration..... | 17 |
| 4.3.3 | Acoustic..... | 19 |



| | | |
|----------|--|-----------|
| 4.3.4 | Shock..... | 25 |
| 4.3.5 | Random Vibration..... | 25 |
| 4.3.6 | Electromagnetic..... | 27 |
| 4.3.7 | Fairing Internal Pressure..... | 34 |
| 4.3.8 | Payload Temperature Exposure during Flight..... | 34 |
| 4.3.9 | Free Molecular Heating | 34 |
| 4.4 | Environmental Compatibility Verification..... | 35 |
| 5 | INTERFACES | 36 |
| 5.1 | Mechanical Interfaces..... | 36 |
| 5.1.1 | Payload Adapters and Separation Systems | 36 |
| 5.1.2 | Payload Fairing..... | 36 |
| 5.2 | Electrical Interfaces | 38 |
| 5.2.1 | Connectivity during Payload Processing and on Launch Pad | 38 |
| 5.2.2 | Falcon-to-Payload Command Interface | 40 |
| 5.2.3 | Timing Services..... | 40 |
| 5.3 | Interface Compatibility Verification Requirements | 40 |
| 6 | FACILITIES..... | 41 |
| 6.1 | SpaceX East Coast Launch Facilities..... | 41 |
| 6.1.1 | Cape Canaveral Air Force Station, Florida | 41 |
| 6.1.2 | Kennedy Space Center, Florida | 41 |
| 6.1.3 | CCAFS & KSC Personnel Accommodations..... | 42 |
| 6.2 | Vandenberg Air Force Base, California | 44 |
| 6.2.1 | VAFB Personnel Accommodations | 45 |
| 6.3 | Headquarters—Hawthorne, CA | 47 |
| 6.4 | Rocket Development Facility—McGregor, TX..... | 47 |
| 6.5 | Government Outreach and Legal Affairs—Washington, DC | 47 |
| 7 | MISSION INTEGRATION AND SERVICES | 48 |
| 7.1 | Contracting..... | 48 |
| 7.2 | Mission Management | 48 |
| 7.3 | Standard Services..... | 49 |
| 7.4 | Schedule | 50 |
| 7.5 | Customer Deliverables..... | 50 |
| 8 | OPERATIONS..... | 52 |
| 8.1 | Overview and Schedule..... | 52 |
| 8.2 | Spacecraft Delivery and Transportation..... | 52 |



| | | |
|-----------|---|-----------|
| 8.3 | Spacecraft Processing..... | 53 |
| 8.4 | Joint Operations and Integration..... | 55 |
| 8.5 | Launch Operations..... | 57 |
| 8.5.1 | Organization..... | 57 |
| 8.5.2 | Spacecraft Control Center..... | 57 |
| 8.5.3 | Launch Control | 58 |
| 8.5.4 | Rollout, Erection and Pad Operations | 58 |
| 8.5.5 | Countdown..... | 59 |
| 8.5.6 | Recycle and Scrub..... | 59 |
| 8.6 | Flight Operations..... | 59 |
| 8.6.1 | Liftoff and Ascent | 59 |
| 8.6.2 | Spacecraft Separation | 59 |
| 8.6.3 | Contamination and Collision Avoidance | 59 |
| 8.6.4 | Post Launch Reports..... | 59 |
| 8.6.5 | Disposal | 59 |
| 8.7 | Sample Mission Profile | 60 |
| 9 | SAFETY | 63 |
| 9.1 | Safety Requirements..... | 63 |
| 9.2 | Hazardous Systems and Operations | 63 |
| 9.3 | Waivers..... | 63 |
| 10 | CONTACT INFORMATION | 64 |
| 11 | QUICK REFERENCE..... | 65 |
| 11.1 | List of Figures | 65 |
| 11.2 | List of Tables..... | 66 |
| 11.3 | List of Acronyms | 66 |
| 11.4 | Change Log | 68 |



1 INTRODUCTION

1.1 USER'S GUIDE PURPOSE

The Falcon launch vehicle user's guide is a planning document provided for customers of SpaceX (Space Exploration Technologies Corp.). This document is applicable to the Falcon vehicle configurations with a 5.2 m (17-ft) diameter fairing and the related launch service (Section 2).

This user's guide is intended for pre-contract mission planning and for understanding SpaceX's standard services. The user's guide is not intended for detailed design use. Data for detailed design purposes will be exchanged directly between a SpaceX customer and a SpaceX mission manager.

SpaceX reserves the right to update this user's guide as required. Future revisions are assumed to always be in process as SpaceX gathers additional data and works to improve its launch vehicle design.

1.2 COMPANY DESCRIPTION

SpaceX offers a family of launch vehicles that improves launch reliability and increases access to space. The company was founded on the philosophy that simplicity, reliability and cost effectiveness are closely connected. We approach all elements of launch services with a focus on simplicity to both increase reliability and lower cost. The SpaceX corporate structure is flat and business processes are lean, resulting in fast decision-making and product delivery. SpaceX products are designed to require low-infrastructure facilities with little overhead, while vehicle design teams are co-located with production and quality assurance staff to tighten the critical feedback loop. The result is highly reliable and producible launch vehicles with quality embedded throughout the process.

Established in 2002 by Elon Musk, the founder of Tesla Motors, PayPal and the Zip2 Corporation, SpaceX has developed and flown the Falcon 1 light-lift launch vehicle, the Falcon 9 medium-lift launch vehicle, the Falcon Heavy heavy-lift launch vehicle, the most powerful operational rocket in the world by a factor of two, and Dragon, which is the first commercially produced spacecraft to visit the International Space Station.

SpaceX has built a launch manifest that includes a broad array of commercial, government and international customers. In 2008, NASA selected the SpaceX Falcon 9 launch vehicle and Dragon spacecraft for the International Space Station Cargo Resupply Services contract. NASA has also awarded SpaceX contracts to develop the capability to transport astronauts to space as well as to launch scientific satellites. In addition, SpaceX services the National Security community and is on contract with the Air Force for multiple missions on the Falcon family of launch vehicles.

SpaceX has state-of-the-art production, testing, launch and operations facilities. SpaceX design and manufacturing facilities are conveniently located near the Los Angeles International Airport. This location allows the company to leverage Southern California's rich aerospace talent pool. The company also operates cutting-edge propulsion and structural test facilities in Central Texas, along with launch sites in Florida and California, and the world's first commercial orbital launch site in development in South Texas.

1.3 FALCON PROGRAM OVERVIEW

Drawing on a history of prior launch vehicle and engine programs, SpaceX privately developed the Falcon family of launch vehicles. Component developments include first- and second-stage engines, cryogenic tank structures, avionics, guidance and control software, and ground support equipment.

With the Falcon 9 and Falcon Heavy launch vehicles, SpaceX is able to offer a full spectrum of medium- and heavy-lift launch capabilities to its customers (Figure 1-1). SpaceX operates Falcon launch facilities at Cape Canaveral Air Force Station, Kennedy Space Center, and Vandenberg Air Force Base and can deliver payloads to a wide range of inclinations and altitudes, from low Earth orbit to geosynchronous transfer orbit to escape trajectories for interplanetary missions. Future missions will also be flown from our commercial orbital launch site under development in South Texas.

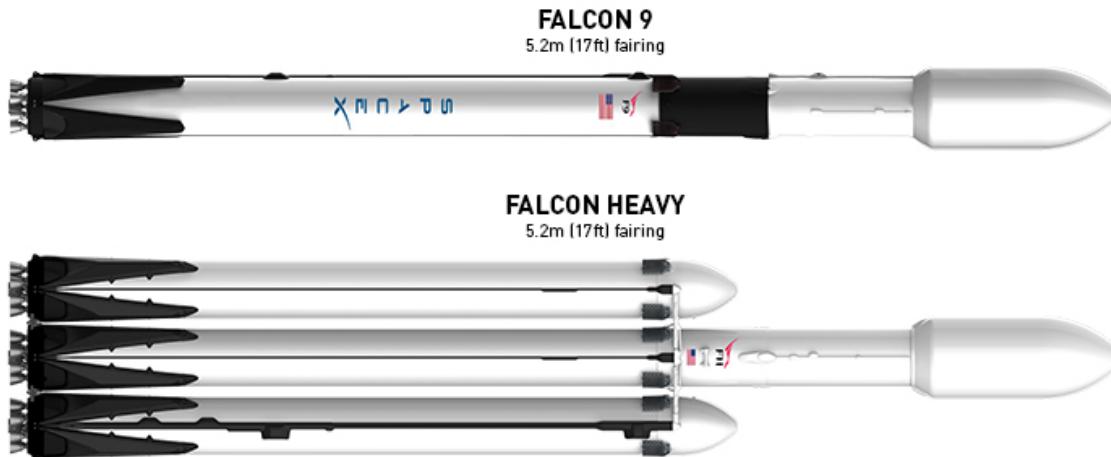


Figure 1-1: SpaceX vehicles are designed for high cross-platform commonality

The Falcon family has conducted successful flights to the International Space Station (ISS), low Earth orbit (LEO), highly elliptical orbit (HEO), geosynchronous transfer orbit (GTO), and Earth-escape trajectories. A partial flight manifest for the Falcon program can be found at www.spacex.com/missions.

Reusability is an integral part of the Falcon program. SpaceX pioneered reusability with the first re-flight of an orbital class rocket in 2017. As of this writing, SpaceX has re-flown rockets more than fifteen times. In 2018, SpaceX had more missions launching with a flight-proven rocket than a first flight rocket. By re-flying boosters, SpaceX increases reliability and improves its designs and procedures by servicing and inspecting hardware as well as incorporating lessons that can only be learned from flight.

1.4 FALCON LAUNCH VEHICLE SAFETY

The Falcon launch vehicles were designed from the beginning to meet NASA human-rated safety margins. We continue to push the limits of rocket technology as we design the safest crew transportation system ever flown while simultaneously advancing toward fully reusable launch vehicles. Our emphasis on safety has led to advancements such as increased structural factors of safety, greater redundancy, and rigorous fault mitigation. Because SpaceX produces one Falcon core vehicle, satellite customers benefit from the high design standards required to safely transport crew. The major safety features are listed in more detail in

Table 1-1.

**Table 1-1: Key safety features of Falcon launch vehicles**

| Design/Operations Feature | Safety Benefit |
|---|--|
| Designed to NASA human-rating margins and safety requirements | Improves reliability for payloads without crew through increased factors of safety, redundancy and fault mitigation |
| Horizontal manufacturing, processing and integration | Reduces work at height during numerous manufacturing, processing and integration procedures, and eliminates many overhead operations |
| All-liquid propulsion architecture; fuel and oxidizer are stored separately on the ground and in the vehicle. Propellant is not loaded into the vehicle until the vehicle is erected for launch | Significantly improves safety by eliminating hazardous ground handling operations required for systems that use solid propellant cores or boosters |
| Rocket-grade kerosene and liquid oxygen as primary propellants | Reduces health hazards to processing, integration, and recovery personnel compared to systems that use high toxicity primary propellants |
| Non-explosive, pneumatic release and separation systems | Zero-debris separation systems significantly reduce orbital debris signature, can be repeatedly tested during the manufacturing process, and eliminate hazardous pyrotechnic devices |
| Regular hardware-in-the-loop (HITL) software testing | Complete verification of entire mission profile prior to flight |

1.5 FALCON RELIABILITY

A study¹ by The Aerospace Corporation found that 91% of known launch vehicle failures in the previous two decades can be attributed to three causes: engine, avionics and stage separation failures. With this in mind, SpaceX incorporated key engine, avionics, and staging reliability features for high reliability at the architectural level of Falcon launch vehicles. Significant contributors to reliability include:

1.5.1 ENGINES

The Merlin engine that powers the Falcon family of launch vehicles is the only new hydrocarbon engine to be successfully developed and flown in the U.S. in the past 40 years. It has the highest thrust-weight ratio of any boost engine ever made. The liquid-propelled Merlin powers the Falcon propulsion system. The engine features a reliable turbopump design with a single shaft for the liquid oxygen pump, the fuel pump, and the turbine. The engine uses a gas generator cycle instead of the more complex staged combustion cycle. The regeneratively cooled nozzle and thrust chamber use a milled copper alloy liner that provides large heat flux margins. A pintle injector provides inherent combustion stability.

Engine failure modes are minimized by eliminating separate subsystems where appropriate. For example, the first-stage thrust vector control system pulls from the high-pressure rocket-grade kerosene system, rather than using a separate hydraulic fluid and pressurization system. Using fuel as the hydraulic fluid eliminates potential failures associated with a separate hydraulic system and with the depletion of hydraulic fluid.

The high-volume engine production required to fly 10 Merlin engines (Falcon 9) or 28 engines (Falcon Heavy) on every launch results in high product quality and repeatability through process control and continuous production. Flying several engines on each mission also quickly builds substantial engineering data and flight heritage.

During Falcon launch operations, the first stage is held on the ground after engine ignition while automated monitors confirm nominal engine operation. An autonomous safe shutdown is performed if any off-nominal condition is detected.

¹ Chang, I-Shih. "Space Launch Vehicle Reliability," *Aerospace Corporation Publication* (2001).



Hold-on-pad operations, enabled by the launch vehicle's all-liquid propulsion architecture and autonomous countdown sequence, significantly reduce risks associated with engine start-up failures and underperformance.

By employing multiple first-stage engines, SpaceX offers the world's first evolved expendable launch vehicle (EELV)-class system with engine-out capability through much of first-stage flight. System-level vehicle management software controls the shutdown of engines in response to off-nominal engine indications. Although the likelihood of catastrophic engine failure is low, and failing engines are designed to be shut down prior to a catastrophic failure, each engine is housed within its own metal bay to isolate it from neighboring engines.

The second-stage Merlin Vacuum engine uses a fixed, non-deploying expansion nozzle, eliminating potential failure modes in nozzle extension.

1.5.2 AVIONICS

Falcon launch vehicle avionics, and guidance, navigation and control systems use a fault-tolerant architecture that provides full vehicle single-fault tolerance and uses modern computing and networking technology to improve performance and reliability. The fault tolerance is achieved either by isolating compartments within avionics boxes or by using triplicated units of specific components. Both the first and second stages host their own multiple redundant lithium-ion batteries to minimize the complexity of the electrical interface.

1.5.3 STAGING ARCHITECTURE AND DESIGN

The two-stage Falcon 9 architecture was selected to minimize the number of stage separation events, eliminating potential failure modes associated with third- and fourth-stage separations, as well as potential engine deployment and ignition failure modes in the third and fourth stages. Falcon Heavy uses the same stage architecture as Falcon 9 with the addition of two separating side cores.

The Falcon second-stage and Falcon Heavy side-boosters restraint, release, and separation systems use pneumatic devices that provide low-shock release and positive force separation over a comparatively long stroke. The pneumatic system allows for acceptance and functional testing of the actual flight hardware, which is not possible with a traditional explosives-based separation system.

For each Falcon launch vehicle, SpaceX performs an exhaustive series of tests from the component to the vehicle system level. The test program includes component-level flight acceptance and workmanship testing, structures load and proof testing, flight system and propulsion subsystem-level testing, full first- and second-stage testing up to full system testing (including first- and second-stage static fire testing), as well as a static fire test on the launch pad. In addition to testing environmental extremes (plus margin), flight critical and workmanship sensitive hardware are tested to account for off-nominal conditions. For example, stage separation tests are performed for off-nominal cases with respect to geometrical misalignment, anomalous timing and sequencing.

The Falcon first stage is designed to survive atmospheric entry and to be recovered, handling both the rigors of the ascent portion of the mission and the loads of the recovery portion. Stage recoverability also provides a unique opportunity to examine recovered hardware and assess design and material selection in order to continually improve Falcon 9 and Falcon Heavy.

1.6 PRICING

The standard price for Falcon 9 and Falcon Heavy launch services can be found at www.spacex.com/about/capabilities. Pricing includes range services, standard payload integration and third-party liability insurance. Please see Section 7.3 for a complete description of standard services. Nonstandard services are also available.



2 VEHICLES

Descriptions and performance information in this user's guide are for the Falcon 9 and Falcon Heavy fairing configuration; please contact SpaceX for information about Dragon launch capabilities. Table 2-1 provides additional details on Falcon 9 and Falcon Heavy dimensions and design characteristics.

2.1 FALCON 9 VEHICLE OVERVIEW

Falcon 9 (Figure 2-1) is a two-stage launch vehicle powered by liquid oxygen (LOX) and rocket-grade kerosene (RP-1). The vehicle is designed, built and operated by SpaceX. Falcon 9 can be flown with a fairing or with a SpaceX Dragon spacecraft. All first- and second-stage vehicle systems are the same in the two configurations; only the payload interface to the second stage changes between the fairing and Dragon configurations.

Falcon 9 was updated in the summer of 2015 to a Full Thrust configuration from its previous v1.1 configuration (flown from 2013 – summer 2015). Falcon 9 underwent further updates and first flew its Full Thrust Block 5 configuration in spring 2018. The Falcon 9 Block 5 architecture focused on improving performance, reliability, and life of the vehicle, as well as ensuring the vehicle's ability to meet critical government crewed and non-crewed missions. Engine performance on both stages was improved, releasing additional thrust capability. Thermal protection shielding was modified to support rapid recovery and refurbishment. Avionics designs, thrust structures, and other components were upgraded for commonality, reliability, and performance.

2.2 FALCON HEAVY VEHICLE OVERVIEW

Falcon Heavy (Figure 2-2) is a two-stage, heavy-lift launch vehicle powered by LOX and RP-1. It can transport more payload mass into LEO or GTO than any other launch vehicle currently in operation.

Falcon Heavy is the most powerful launch vehicle in operation with more than 5.1 million pounds of thrust at liftoff. Falcon Heavy builds on the proven, highly reliable design of Falcon 9. Falcon Heavy's first-stage is comprised of three Falcon 9 first stages with enhancements provided to strengthen the cores. Furthermore, Falcon Heavy utilizes the same second stage and same payload fairing as flown on Falcon 9, fully benefitting from the flight heritage provided by Falcon 9 flights. This commonality has also minimized infrastructure unique to the vehicle. SpaceX first launched the Falcon Heavy vehicle in February of 2018.

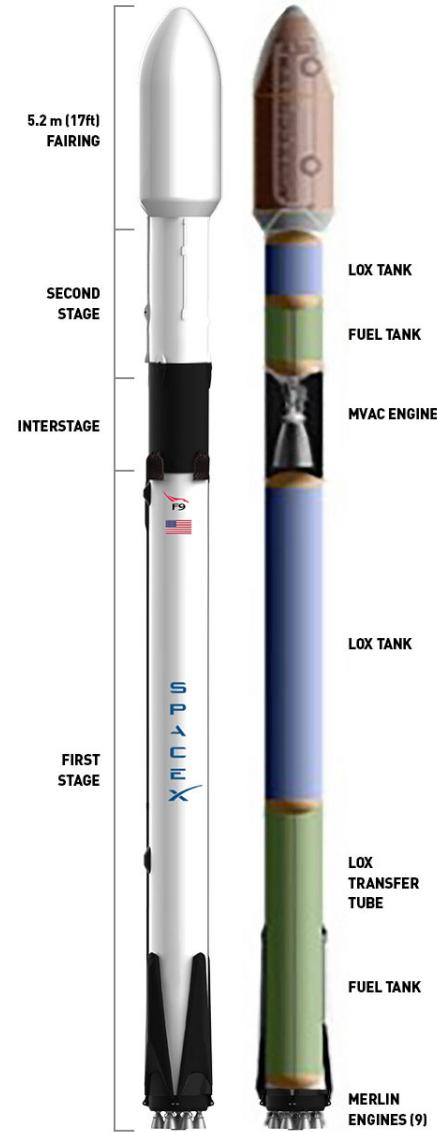


Figure 2-1: Falcon 9 overview



Figure 2-2: The Falcon Heavy demonstration mission launched from KSC on February 6, 2018

The first stage is comprised of three cores: a center core and two side boosters (the first stage of Falcon 9 is used as a side booster); each core has nine Merlin 1D (M1D) engines. Each of the 27 first stage engines produces 190,000 lbf of thrust at sea level, for a total of 5,130,000 lbf of thrust at liftoff. The two side boosters are connected to the center core at the base engine mount and at the forward end of the LOX tank on the center core.

With nine engines in each first-stage core, Falcon Heavy has propulsion redundancy – unlike any other heavy-lift launch system. The launch vehicle monitors each engine individually during ascent and can, if necessary, preemptively command off-nominal engines, provided the minimum injection success criteria are achievable with the remaining engines. This engine-out reliability provides propulsion redundancy throughout first-stage ascent – a feature unique to Falcon launch vehicles.

2.3 STRUCTURE AND PROPULSION

The first-stage propellant tank walls of the Falcon vehicles are made from an aluminum lithium alloy. Tanks are manufactured using friction stir welding—the highest strength and most reliable welding technique available. An insulated common dome separates the LOX and RP-1 tanks, and an insulated transfer tube carries LOX through the center of the RP-1 tank to the engine section. Four grid fins near the top of the first stage along with four deployable legs at the base are nominally flown to support recovery operations.

Nine SpaceX Merlin engines power the Falcon 9 first stage with up to 854 kN (190,000 lbf) thrust per engine at sea level, for a total thrust of 7,686 kN (1.71 million lbf) at liftoff. The first-stage engines are configured in a circular pattern, with eight engines surrounding a center engine.

Twenty-seven SpaceX Merlin engines power the Falcon Heavy first stages for a total thrust of 5,130,000 lbf at liftoff. The figure below shows the nomenclature for the center core and side boosters (center, plus y-axis and minus y-axis.)



Structurally, the plus y-axis and minus y-axis boosters are identical. The center core consists of thicker tank walls and carries the booster separation system. The z axis points to zenith when the vehicle is horizontal.

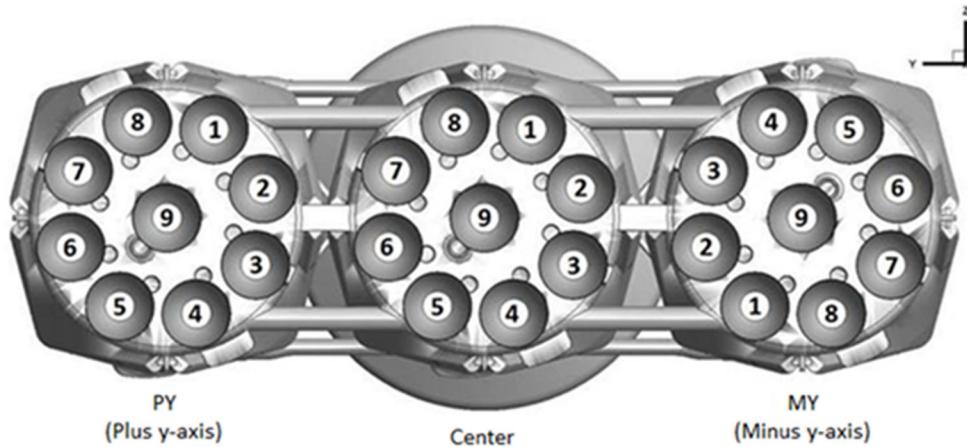


Figure 2-3: Falcon Heavy first-stage engine layout

After engine start, Falcon vehicles are held down until all vehicle systems are verified as functioning normally before release for liftoff.

The Falcon vehicles' interstage, which connects the first and second stages, is a composite structure consisting of an aluminum honeycomb core surrounded by carbon fiber face sheet plies. The interstage is fixed to the forward end of the first-stage tank. The stage separation system is located at the forward end of the interstage and interfaces to the second-stage.

The second-stage tank for Falcon vehicles is a shorter version of the first-stage tank and uses most of the same materials, construction, tooling and manufacturing techniques as the first-stage tanks. A single Merlin Vacuum (MVac) engine powers the second stage, using a fixed 165:1 expansion nozzle. For added reliability of restart, the engine contains dual redundant triethylaluminum-triethylborane (TEA-TEB) pyrophoric igniters. In addition, the second stage contains a cold nitrogen gas (GN_2) attitude control system (ACS) for pointing and roll control. The GN_2 ACS is more reliable and produces less contamination than a propellant-based reaction control system.

Table 2-1: Falcon dimensions and characteristics

| Characteristic | First Stage Core | Second Stage |
|------------------------|---|--|
| Structure | | |
| Height | 70 m (229 ft) (including both stages, interstage and fairing) | |
| Diameter | 3.66 m (12 ft) | 3.66 m (12 ft) |
| Type | LOX tank – monocoque; Fuel tank – skin and stringer | LOX tank – monocoque Fuel tanks – skin and stringer |
| Material | Aluminum lithium skin; aluminum domes | |
| Propulsion | | |
| Engine type | Liquid, gas generator | Liquid, gas generator |
| Engine designation | Merlin 1D (M1D) | MVac |
| Engine designer | SpaceX | SpaceX |
| Engine manufacturer | SpaceX | SpaceX |
| Number of engines | 9 | 1 |
| Propellant | Liquid oxygen/kerosene (RP-1) | Liquid oxygen/kerosene (RP-1) |
| Thrust (stage total) | 7,686 kN (sea level) (1,710,000 lbf) | 981 kN (Vacuum) (220,500 lbf) |
| Propellant feed system | Turbopump | Turbopump |
| Throttle capability | Yes (190,000 lbf to 108,300 lbf sea level) | Yes (220,500 lbf to 140,679 lbf) |



| Characteristic | First Stage Core | Second Stage |
|--------------------------------|---|--|
| Restart capability | Yes | Yes |
| Tank pressurization | Heated helium | Heated helium |
| Ascent attitude control | | |
| Pitch, yaw | Gimbaled engines | Gimbaled engine/nitrogen gas thrusters |
| Roll | Gimbaled engines | Nitrogen gas thrusters |
| Coast attitude control | Nitrogen gas thrusters (recovery only) | Nitrogen gas thrusters |
| Operations | | |
| Shutdown process | Commanded shutdown | Commanded shutdown |
| Stage separation system | Pneumatically actuated separation mechanism | N/A |

2.4 RETENTION, RELEASE AND SEPARATION SYSTEMS

The first and second stages are mated by mechanical latches at three points between the top of the interstage and the base of the second-stage fuel tank. After the first-stage engines shut down, a high-pressure helium circuit is used to release the latches via redundant actuators. The helium system also preloads four pneumatic pushers, which provide a positive-force for stage separation after latch release. This includes a redundant center pusher to further decrease the probability of re-contact between the stages following separation.

The two halves of the fairing are fastened by mechanical latches along the fairing vertical seam. To deploy the fairing, a high-pressure helium circuit releases the latches, and four pneumatic pushers facilitate positive-force deployment of the two halves. The use of all-pneumatic separation systems provides a benign shock environment, allows acceptance and preflight testing of the actual separation system hardware, and minimizes debris created during separation.

For Falcon Heavy, the fundamental purpose of the side cores is to apply axial force to the center core during ascent and increase the impulse delivered to second stage before stage separation. The timing of the shutdown for the Falcon Heavy side cores can be tailored for each mission to ensure that the proper impulse is delivered. Each side core is structurally connected to the center core at forward and aft locations. Two pusher separation mechanisms (lengthened versions of the stage separation mechanisms) connect the forward ends of each side core to the center core, fastening the top of the LOX tank in the center core to the side cores. They maintain the connection during ascent and then actively jettison the side cores following side core shutdown. Two more pusher separation mechanisms connect the aft ends of each side core to the center core and are used to laterally force the base of the side cores from the center core following the side core shut down.

2.5 AVIONICS, AND GUIDANCE, NAVIGATION AND CONTROL

Falcon avionics feature a flight-proven, three-string, fault-tolerant architecture that has been designed to human-rating requirements. Avionics include flight computers, Global Positioning System (GPS) receivers, inertial measurement units, SpaceX-designed and manufactured controllers for vehicle control (propulsion, valve, pressurization, separation and payload interfaces), a network backbone, S-band transmitters and a C-band transponder for range safety tracking. The S-band transmitters are used to transmit telemetry and video to the ground, from both the first and second stages, even after stage separation.

Our launch vehicles are equipped with an autonomous flight termination system to limit the potential damage caused by a launch vehicle malfunction. The system terminates the flight of the vehicle automatically if mission rules are violated.

2.6 COORDINATE FRAME

Falcon vehicles use a right-hand X-Y-Z coordinate frame centered 440.69 cm (173.5 in.) aft of the first-stage radial engine gimbal, with +X aligned with the vehicle long axis and +Z opposite the transporter-erector strongback (Figure 2-4). X is



the roll axis, Y is the pitch axis, and Z is the yaw axis. Additional coordinate frames may be defined with reference to the payload interface (Section 5.1.1) for specific missions.



Figure 2-4: Falcon vehicle coordinate frame



3 PERFORMANCE

3.1 AVAILABLE INJECTION ORBITS

SpaceX launch services are offered at its Cape Canaveral Air Force Station, Kennedy Space Center, and Vandenberg Air Force Base launch sites. Together, Cape Canaveral Air Force Station and Kennedy Space Center are referred to herein as the Eastern Range. Additional launch facilities are currently under development in South Texas (Section 6).

Table 3-1 describes the typical injection orbits available from our operational launch sites. (As other launch sites are activated, this User's Guide will be updated.)

Table 3-1: Falcon 9 and Falcon Heavy launch services

| Insertion Orbit | Inclination Range | Vehicle | Launch Site(s) | Mass Capability |
|-------------------|-------------------|--------------------------|-----------------------------|--|
| LEO | 28.5 – 51.6 deg | Falcon 9 or Falcon Heavy | Eastern Range | Contact SpaceX for performance details |
| LEO polar/ SSO | 66 – 145 deg | Falcon 9 | Vandenberg | |
| GTO | Up to 28.5 deg | Falcon 9 or Falcon Heavy | Eastern Range | |
| GSO | Up to 28.5 deg | Falcon Heavy | Eastern Range | |
| Earth escape | N/A | Falcon 9 or Falcon Heavy | Vandenberg or Eastern Range | |

Launch services to a range of low Earth orbits are available, including services to low-inclination orbits through high-inclination and sun-synchronous orbits (SSO). Falcon vehicles can provide either two-burn or direct-inject launch services: two-burn mission profiles optimize vehicle performance, while direct-inject mission profiles offer reduced mission duration and require only a single start of the second-stage engine. LEO missions to a 51.6 deg inclination or lower are flown from the Eastern Range; LEO missions to higher inclinations are flown from Vandenberg Air Force Base. Launch services to inclinations lower than 28.5 deg are available from the Eastern Range, but they incur a performance penalty.

Launch services to a range of geosynchronous transfer orbits and other high-altitude orbits are available, including standard GTO, sub-GTO for heavy payloads, and supersynchronous injection. A perigee altitude of 185 km (100 nmi) is baselined for GTO; higher perigee values may be provided with a performance penalty. Currently, all GTO missions are flown from the Eastern Range.

Launch services directly into geosynchronous orbit (GSO) are available from Kennedy Space Center via Falcon Heavy. The satellite is placed into a circular orbit directly above or below GSO to allow it to phase into its correct orbital position.

Launch services to a range of Earth escape orbits are available. Customers may also utilize a customer-supplied kick-stage to achieve higher escape energy (C3) performance, based on mission requirements. Earth escape missions are typically flown from the Eastern Range.

3.2 MASS-TO-ORBIT CAPABILITY

Mass-to-orbit capabilities for the Falcon 9 and Falcon Heavy fairing configuration are available upon request.



3.3 MASS PROPERTIES



Figure 3-1: SpaceX payload attach fitting

The payload attach fitting (PAF) converts the diameter of the launch vehicle to a (typical) standard 1575-mm (62.01 in.) bolted interface (Figure 3-1). Payloads should comply with the mass properties limitations given in Figure 3-2. Payloads in excess of the figure can be accommodated as a mission unique service. Payload mass properties should be assessed for all items forward of the payload attach fitting 1575-mm (62.01 in.) bolted interface (Section 5.1.1), including any mission-unique payload adapters and separation systems. Mass property capabilities may be further constrained by mission-unique payload adapters, dispensers or separation systems.

SpaceX can also provide a payload attach fitting with a wider interface. Please contact SpaceX for more details.

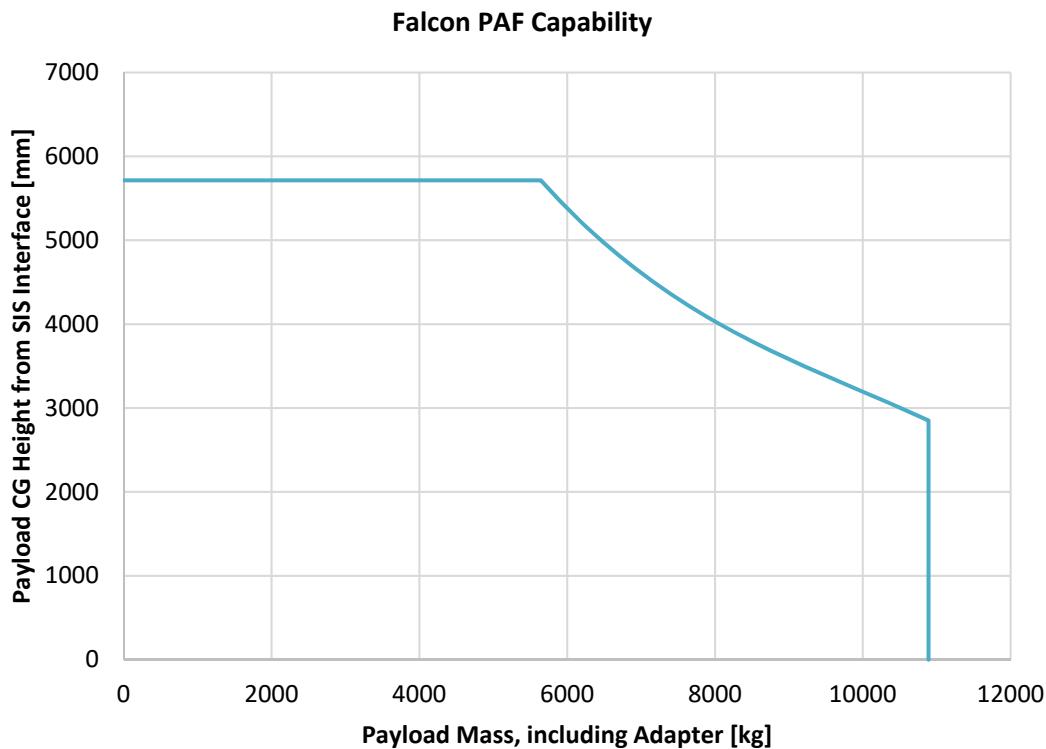


Figure 3-2: Allowable center-of-gravity height above the 1575-mm plane

SpaceX requires that customers verify the mass properties of their system through measurement before shipping it to the launch site. The company may request insight into relevant analyses and testing performed for satellite qualification, acceptance and interface verification. Falcon vehicles may be able to accommodate payloads with characteristics outside the limitations indicated in this section. Please contact SpaceX with your mission-unique requirements.

3.4 LAUNCH WINDOWS

Falcon launch vehicles can launch any day of the year, at any time of day, subject to environmental limitations and constraints as well as range availability and readiness. Launch window times and durations are developed specifically for each mission. Customers benefit from recycle operations, maximizing launch opportunities within the launch window (Section 8.5.6).

3.5 FLIGHT ATTITUDE

Falcon 9 and Falcon Heavy can provide payload pointing and roll control during long-duration coast phases for sun avoidance and thermal control. If requested, the Falcon second stage will point the X-axis of the launch vehicle to a customer-specified attitude and perform a passive thermal control roll of up to ± 1.5 deg/sec around the launch vehicle X-axis, held to a local vertical/local horizontal (LVLH) roll attitude accuracy of ± 5 deg.

3.6 SEPARATION ATTITUDE AND ACCURACY

Falcon launch vehicles offer 3-axis attitude control or spin-stabilized separation as a standard service. For inertial separation, the vehicle will point the second stage and payload to the desired LVLH attitude and minimize attitude rates. For spin-stabilized separation, the Falcon launch vehicle will point the second stage and payload to the desired LVLH attitude and initiate a spin about the launch vehicle X-axis at a customer-specified rate dependent upon payload mass properties. Standard pre-separation attitude and rate accuracies are developed as a mission-specific standard service. More information about separation attitude and rate accuracy is available from SpaceX upon request.



3.7 MULTIPLE PAYLOADS

Falcon 9 and Falcon Heavy can launch multiple satellites on a single mission, with the customer responsible for the integration of the multiple payloads. As a liquid-propellant launch vehicle with restart capability, Falcon launch vehicles also provide the flexibility to deploy each satellite into a different orbit, performance allowing.

Falcon launch vehicles can accommodate a broad range of dispenser systems including multi-payload systems, dual-payload attach fittings and mission-unique adapters. SpaceX can develop and provide such adapters and dispensers if desired, as a nonstandard service, or can integrate third-party systems. Please contact SpaceX with your mission-unique requirements.

3.8 SECONDARY PAYLOADS

SpaceX typically reserves the right to manifest secondary payloads aboard Falcon missions on a non-interference basis. Secondary payloads may be manifested on a variety of secondary payload adapters including an Evolved Expendable Launch Vehicle (EELV) Secondary Payload Adapter (ESPA) ring, a SpaceX-developed Surfboard, or other mission-unique secondary deployment structures.

Please contact SpaceX or a secondary payload broker for information regarding flight opportunities, interface requirements and pricing for secondary payloads.



4 ENVIRONMENTS

Falcon 9 and Falcon Heavy have been designed to provide as benign a payload environment as possible, via the use of all-liquid propulsion, a single staging event, deeply throttleable engines and pneumatic separation systems. The environments presented below reflect typical mission levels for Falcon 9 and Falcon Heavy; mission-specific analyses will be performed and documented in an interface control document for each contracted mission.

4.1 TRANSPORTATION ENVIRONMENTS

SpaceX recommends using the quasi-static limit load factors provided by NASA-HDBK-7005 (Table 4-1). SpaceX has quantified the maximum predicted environments experienced by the payload during transportation. Transportation will be accomplished by two wheeled vehicles: a payload transporter from the payload processing facility to the hangar, and the launch vehicle transporter-erector from the hangar to the launch pad. It is expected that transportation environments will be enveloped by the flight environments in Section 4.3.

Table 4-1: Recommended quasi-static load factors for transportation

| Transportation Method | Longitudinal Load (g) | Lateral Load (g) | Vertical Load (g) |
|---|-----------------------|------------------|-------------------|
| Slow-moving dolly (expected ground transport loads) | ± 1.0 | ± 0.75 | ± 2.0 |

4.2 TEMPERATURE, HUMIDITY AND CLEANLINESS

The standard service temperature, humidity and cleanliness environments during various processing phases are provided in Table 4-2. SpaceX can accommodate environments outside the standard service, e.g. ISO Class 7 (Class 10,000) cleanroom cleanliness. Please contact SpaceX for details.

Conditioned air will be disconnected for a short duration during rollout to the pad. Spacecraft environmental temperatures will be maintained above the dew point of the supply air at all times. A nitrogen purge is available as a nonstandard service. The payload attach fitting (PAF) and fairing surface are cleaned to Visibly Clean-Highly Sensitive, achieving a residue level between A/5 and A/2 and particulate between 300-500 micron, per IEST-STD-CC1246D.

Table 4-2: Temperature and cleanliness environments

| Phase | Control System | Approx. Duration | Temp. °C (°F) | Humidity | Cleanliness (class) | Flow Rate (cfm) |
|--------------------------------------|--|------------------|-----------------|--------------------------------------|---|-----------------|
| Spacecraft processing | Payload processing facility heating, ventilation and air conditioning (HVAC) | 3 weeks | 21 ± 3 (70 ± 5) | CCAFS/KSC: 45% ± 15% VAFB: 50% ± 15% | 100,000 | N/A |
| Propellant conditioning | Facility heating, ventilation and air conditioning (HVAC) | 3 days | 21 ± 3 (70 ± 5) | CCAFS/KSC: 45% ± 15% VAFB: 50% ± 15% | 100,000 (Class 8) | N/A |
| Spacecraft propellant loading | Facility heating, ventilation and air conditioning (HVAC) | Mission-Unique | 21 ± 3 (70 ± 5) | CCAFS/KSC: 45% ± 15% VAFB: 50% ± 15% | 100,000 (Class 8) | N/A |
| Transport to hangar (CCAFS/KSC only) | Transport trailer unit | <6 hrs | 21 ± 3 (70 ± 5) | 0%-60% | 10,000 (Class 7) (supply air cleanliness) | 1,000 |



| Phase | Control System | Approx. Duration | Temp. °C (°F) | Humidity | Cleanliness (class) | Flow Rate (cfm) |
|--|---|------------------|--|---|--|-----------------|
| Encapsulated in hangar | Ducted supply from hangar facility HVAC | 1 week | 21 ± 3 (70 ± 5) | CCAFS/KSC: 45% ± 15% VAFB: 50% ± 15% | 10,000 (Class 7) (supply air cleanliness) | 1,000 |
| Encapsulated roll-out to pad | None | 30-60 min | N/A | N/A | 10,000 (Class 7) | N/A |
| Encapsulated on pad (vertical or horizontal) | Pad air conditioning | <1 day | VAFB: Selectable 15 to 35 (59 to 95) CCAFS: Selectable 16 to 30 (61 to 86) | 0% to 65% | 10,000 (Class 7) (supply air cleanliness) | 1,500 |

4.3 FLIGHT ENVIRONMENTS

The maximum predicted environments the payload will experience from liftoff through separation are described in the sections below. Falcon vehicles may be able to accommodate payloads with characteristics outside the limitations indicated in these sections and may also be able to provide environments lower than those indicated in these sections. Please contact SpaceX with your mission-unique requirements.

4.3.1 LOADS

During flight, the payload will experience a range of axial and lateral accelerations. Axial acceleration is driven by vehicle thrust and drag profiles; lateral acceleration is primarily driven by wind gusts, engine gimbal maneuvers, first-stage engine shutdown and other short-duration events. Both the first- and second-stage engines may be throttled to help maintain launch vehicle and payload steady state acceleration limits.

For "standard" payloads with mass of more than 4,000 lb (1,810 kg), Falcon 9 and Falcon Heavy payload design load factors are shown using the envelope in Figure 4-1. For "light" payloads with mass of less than 4,000 lb (1,810 kg), Falcon 9 load factor is provided in Figure 4-2. For Falcon Heavy "light" payloads, please contact SpaceX for more details.

The load factors provided below are intended for a single payload mission; multi-payload missions should coordinate directly with SpaceX. A positive axial value indicates a compressive net-center-of-gravity acceleration, while a negative value indicates tension. Actual payload loads, accelerations and deflections are a function of both the launch vehicle and payload structural dynamic properties and can be accurately determined via a coupled loads analysis.

Secondary structure designs should consider maintaining a minimum resonant frequency above 35Hz to avoid interaction with launch vehicle dynamics.

4.3.1.1 FALCON 9 AND FALCON HEAVY LOADS – STANDARD PAYLOAD MASS

The Falcon 9 and Falcon Heavy design load factors provided below are for typical spacecraft above 4,000 lb. Please consult with SpaceX for applicability based on spacecraft modal frequencies and CG height.

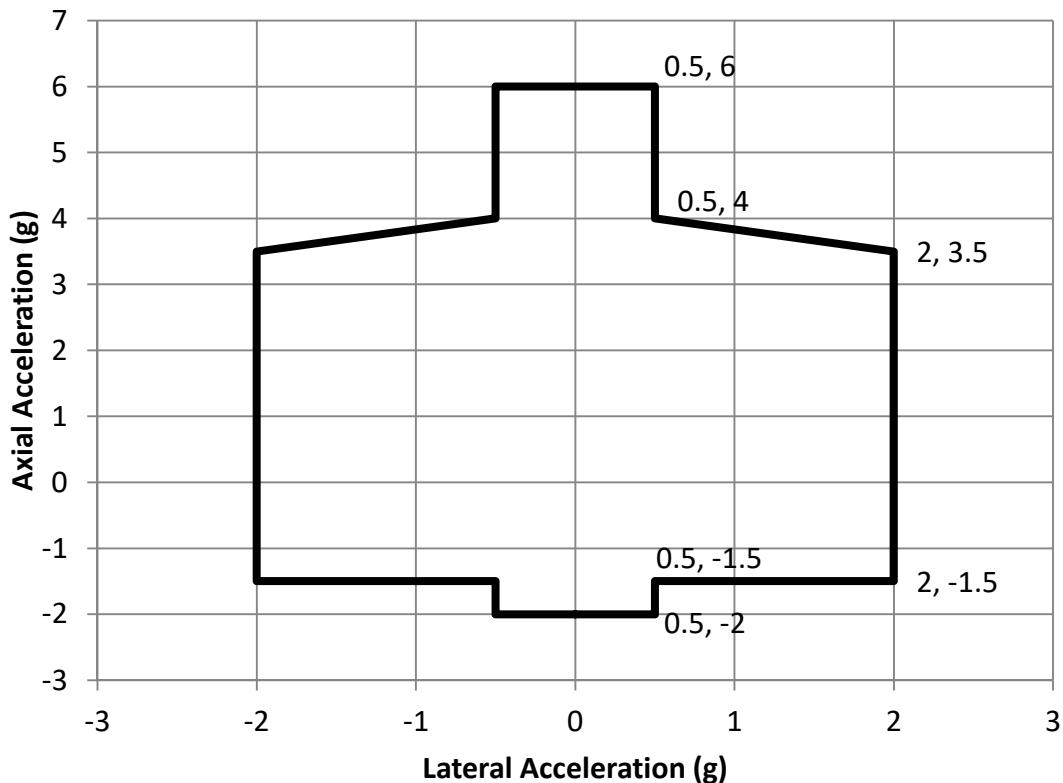


Figure 4-1: Falcon 9 and Falcon Heavy payload design load factors for "standard" mass (over 4,000 lb)

4.3.1.2 FALCON 9 LOADS – LIGHT PAYLOAD MASS

Figure 4-2 shows the Falcon 9 design load factors for lighter payloads (less than 4,000 lb). However, for ultra-light payloads (~2,000 lb or less), coordination with SpaceX mission management is required, since these load factors may not be adequate to design the payload. Actual spacecraft loads, accelerations and deflections are a function of both the launch vehicle and payload structural dynamic properties and can only be accurately determined via a coupled loads analysis.

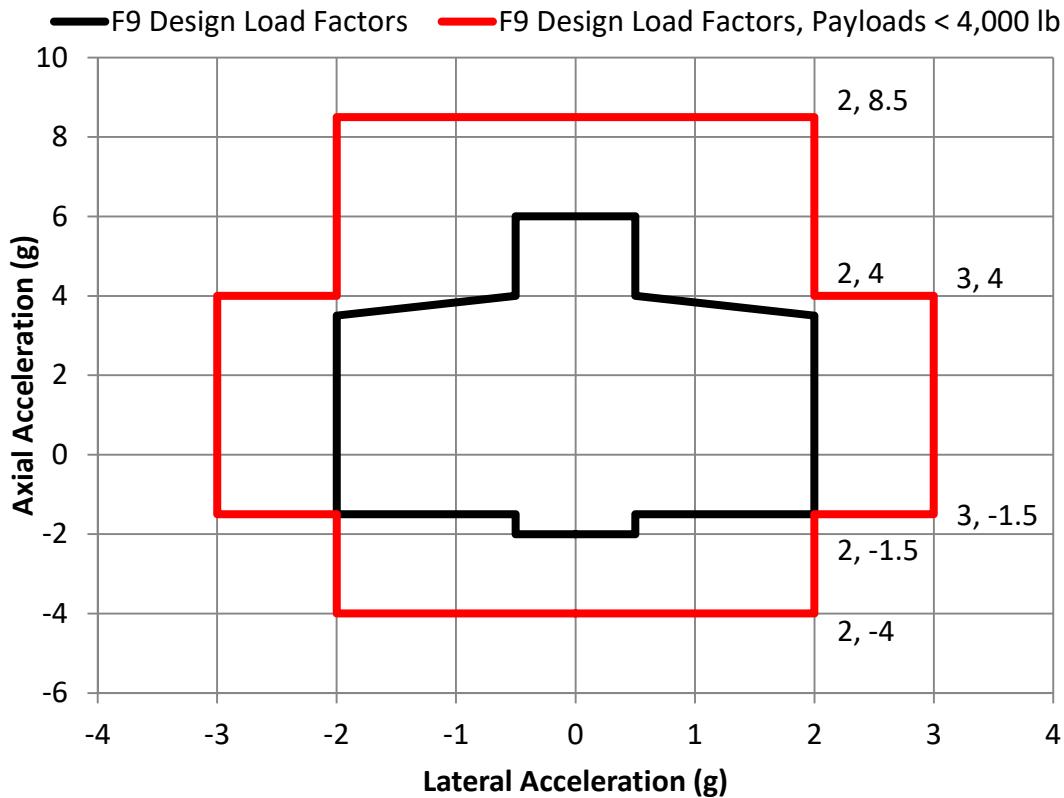


Figure 4-2: Falcon 9 payload design load factors, light mass (under 4,000 lb)

4.3.1.3 FALCON HEAVY LOADS – LIGHT PAYLOAD MASS

Please contact SpaceX for more information.

4.3.2 SINE VIBRATION

Maximum predicted sinusoidal vibration environments represent the levels at the top of the payload attach fitting for Q=20 through Q=50, and envelope all stages of flight. Maximum predicted sinusoidal vibration environments for Falcon 9 and Falcon Heavy are shown in Figure 4-3 and Figure 4-4. These environments represent the vibration levels at the top of the payload attach fitting for Q=20 through Q=50, and envelope all stages of flight. Since SpaceX accommodates a variety of payloads, results of coupled loads analysis will be used to modify these levels, if necessary, to reflect the levels at the payload interface.

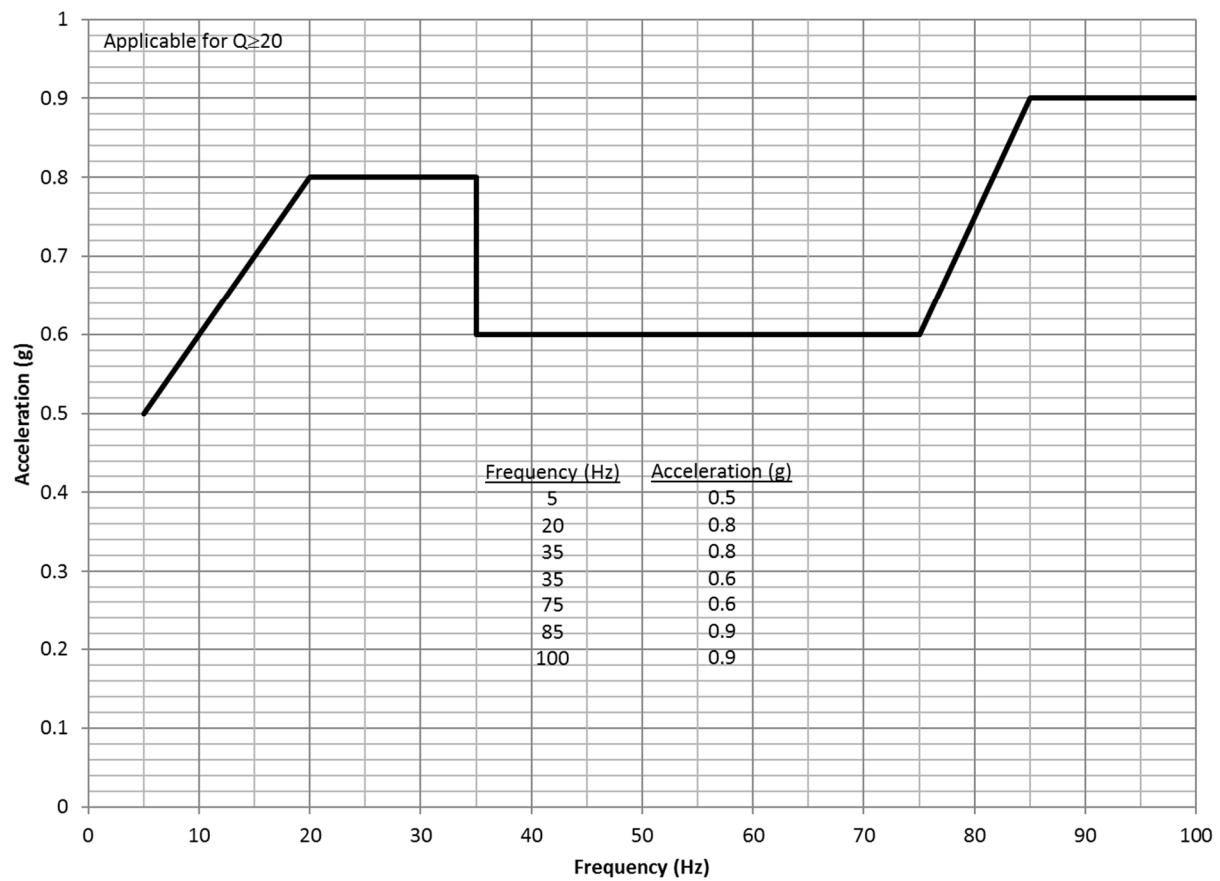


Figure 4-3: Maximum axial equivalent sine environment for Falcon 9 and Falcon Heavy

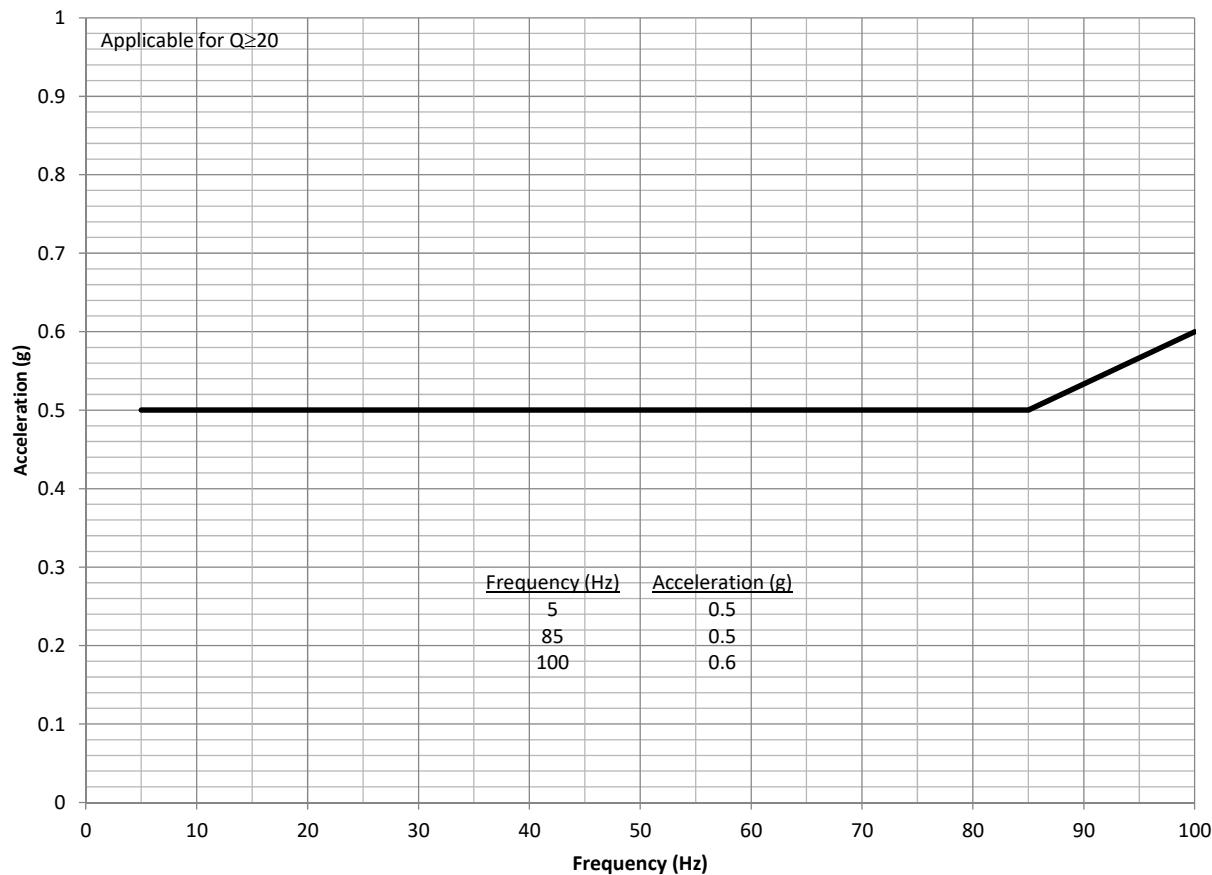


Figure 4-4: Maximum lateral equivalent sine environment for Falcon 9 and Falcon Heavy

4.3.3 ACOUSTIC

During flight, the payload will be subjected to a varying acoustic environment. Levels are highest near liftoff and during transonic flight, due to aerodynamic excitation. The acoustic environment, defined as the spatial average and derived at a P95/50 level, is shown by both full and third-octave curves.

4.3.3.1 FALCON 9 ACOUSTICS

Figure 4-5 and Table 4-3 provide the Falcon 9 third-octave maximum predicted acoustic environment for typical payloads, while Figure 4-6 and Table 4-4 provide the full-octave maximum predicted acoustic environment. Levels are shown for both Cape Canaveral (SLC-40 and LC-39A) and Vandenberg (SLC-4E) launch sites respectively. Predicted acoustic levels for a specific mission will depend on the payload's size and volume with smaller payloads generally having lower acoustic levels. Margin for qualification testing or for payloads larger than 60% volume fill is not included in the curves below.

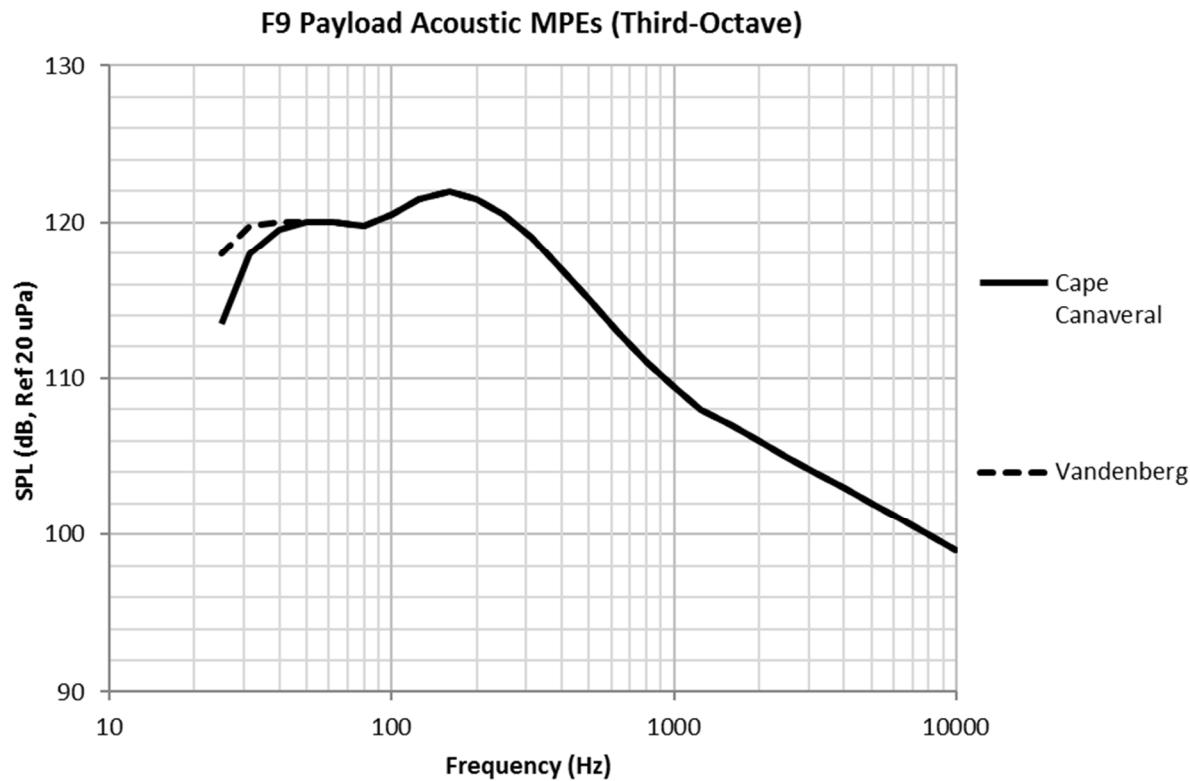


Figure 4-5: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor, 131.4 dB OASPL (Cape Canaveral) and 131.6 dB OASPL (Vandenberg) in third octave

Table 4-3: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor

| Frequency (Hz) | Cape Canaveral Acoustic Limit Levels (P95/50), 60% Fill-Factor (Third-Octave) | Vandenberg Acoustic Limit Levels (P95/50), 60% Fill-Factor (Third-Octave) |
|----------------|---|---|
| 25 | 113.5 | 118 |
| 31.5 | 118 | 119.75 |
| 40 | 119.5 | 120 |
| 50 | 120 | 120 |
| 63 | 120 | 120 |
| 80 | 119.8 | 119.8 |
| 100 | 120.5 | 120.5 |
| 125 | 121.5 | 121.5 |
| 160 | 122 | 122 |
| 200 | 121.5 | 121.5 |
| 250 | 120.5 | 120.5 |
| 315 | 119 | 119 |
| 400 | 117 | 117 |
| 500 | 115 | 115 |
| 630 | 113 | 113 |
| 800 | 111 | 111 |



| Frequency (Hz) | Cape Canaveral Acoustic Limit Levels (P95/50), 60% Fill- Factor (Third-Octave) | Vandenberg Acoustic Limit Levels (P95/50), 60% Fill- Factor (Third-Octave) |
|----------------|--|--|
| 1000 | 109.5 | 109.5 |
| 1250 | 108 | 108 |
| 1600 | 107 | 107 |
| 2000 | 106 | 106 |
| 2500 | 105 | 105 |
| 3150 | 104 | 104 |
| 4000 | 103 | 103 |
| 5000 | 102 | 102 |
| 6300 | 101 | 101 |
| 8000 | 100 | 100 |
| 10000 | 99 | 99 |
| OASPL (dB) | 131.4 | 131.6 |

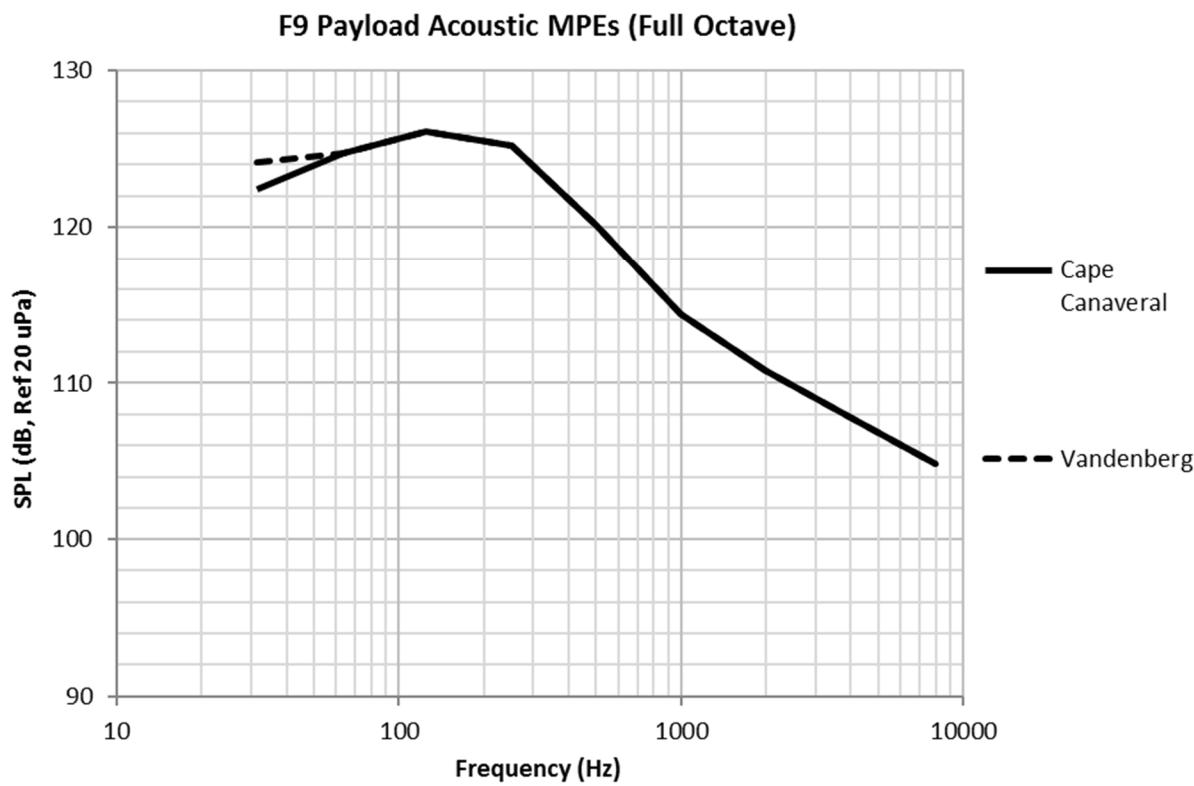


Figure 4-6: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor, 131.4 dB OASPL (Cape Canaveral) and 131.6 OASPL (Vandenberg) in full octave

**Table 4-4: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor**

| Frequency (Hz) | Cape Canaveral Acoustic Limit Levels (P95/50), 60% Fill-Factor, (Full Octave) | Vandenberg Acoustic Limit Levels (P95/50), 60% Fill-Factor, (Full Octave) |
|----------------|---|---|
| 31.5 | 122.4 | 124.1 |
| 63 | 124.7 | 124.7 |
| 125 | 126.1 | 126.1 |
| 250 | 125.2 | 125.2 |
| 500 | 120.1 | 120.1 |
| 1000 | 114.4 | 114.4 |
| 2000 | 110.8 | 110.8 |
| 4000 | 107.8 | 107.8 |
| 8000 | 104.8 | 104.8 |
| OASPL (dB) | 131.4 | 131.6 |

4.3.3.2 FALCON HEAVY ACOUSTICS

Figure 4-7 and Table 4-5 provide the Falcon Heavy third-octave maximum predicted acoustic environment for typical payloads, while Figure 4-8 and Table 4-6 provide the full-octave maximum predicted acoustic environment. These levels are applicable to future contracts from Cape Canaveral (LC-39A). Predicted acoustic levels for a specific mission will depend on the payload's size and volume with smaller payloads generally having lower acoustic levels. Margin for qualification testing or for payloads larger than 60% volume fill is not included in the curves below.



Falcon Heavy Payload Acoustic MPE (Third-Octave)

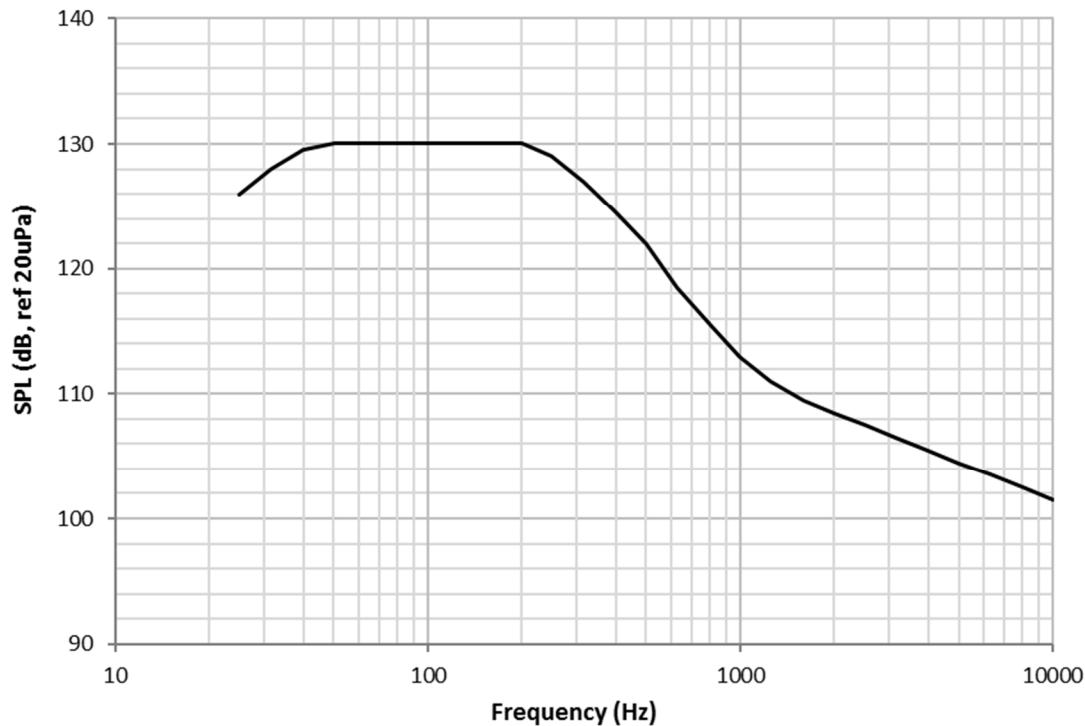


Figure 4-7: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (third octave)

Table 4-5: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (third octave)

| Frequency (Hz) | Acoustic Limit Levels (P95/50), 60% Fill-Factor (Third-Octave) |
|----------------|---|
| 25 | 126 |
| 31.5 | 128 |
| 40 | 129.5 |
| 50 | 130 |
| 63 | 130 |
| 80 | 130 |
| 100 | 130 |
| 125 | 130 |
| 160 | 130 |
| 200 | 130 |
| 250 | 129 |
| 315 | 127 |
| 400 | 124.5 |
| 500 | 122 |
| 630 | 118.5 |
| 800 | 115.5 |
| 1000 | 113 |
| 1250 | 111 |



| Frequency (Hz) | Acoustic Limit Levels (P95/50), 60% Fill-Factor (Third-Octave) |
|----------------|---|
| 1600 | 109.5 |
| 2000 | 108.5 |
| 2500 | 107.5 |
| 3150 | 106.5 |
| 4000 | 105.5 |
| 5000 | 104.5 |
| 6300 | 103.5 |
| 8000 | 102.5 |
| 10000 | 101.5 |
| OASPL (dB) | 140.3 |

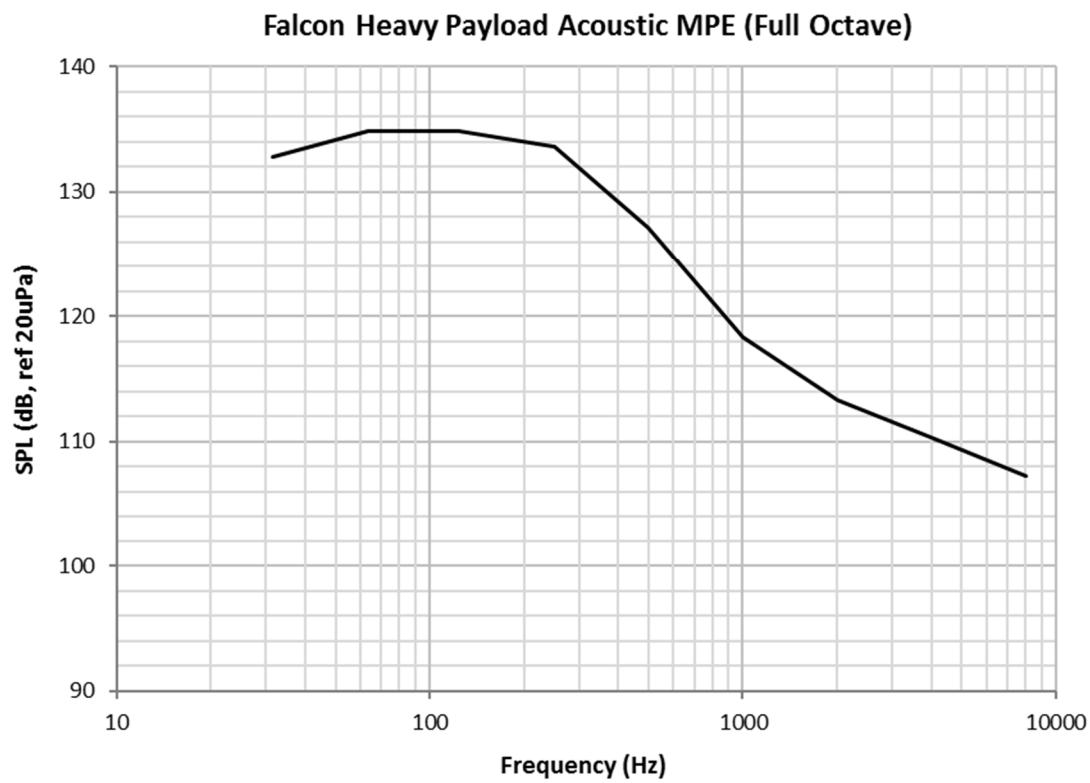


Figure 4-8: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (full octave)

**Table 4-6: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (full octave)**

| Frequency | Acoustic Limit Levels (P95/50), 60% Fill-Factor (Full Octave) |
|------------|--|
| 31.5 | 132.8 |
| 63 | 134.8 |
| 125 | 134.8 |
| 250 | 133.6 |
| 500 | 127.1 |
| 1000 | 118.3 |
| 2000 | 113.3 |
| 4000 | 110.3 |
| 8000 | 107.3 |
| OASPL (dB) | 140.3 |

4.3.4 SHOCK

Four events during flight result in loads that are characterized as shock loads:

1. Release of the launch vehicle hold-down at liftoff.
2. Booster separation (Falcon Heavy only).
3. Stage separation.
4. Fairing deployment.
5. Spacecraft separation.

Of these events, the first three are negligible for the payload relative to fairing deployment and spacecraft separation because of the large distance and number of joints over which the shocks will travel and dissipate. The maximum shock environment predicted at the 1575-mm interface for fairing deployment is enveloped by the shock environment from typical spacecraft separation. Consequently, the shock environment is typically a function of the spacecraft adapter and separation system selected for the mission. Actual shock environments experienced by the payload at the top of the mission-unique payload adapter will be determined following selection of a specific payload adapter and separation system. Table 4-7 shows typical payload adapter-induced shock at the spacecraft separation plane for 937-mm or 1194-mm (36.89 in. or 47.01 in.) clampband separation systems, derived at a P95/50 statistical level. Please note the actual flight shock levels produced by the payload adapter will be mission-unique.

Table 4-7: Payload adapter-induced shock at the spacecraft separation plane (P95/50)

| Frequency (Hz) | SRS (g) |
|----------------|---------|
| 100 | 30 |
| 1000 | 1,000 |
| 10000 | 1,000 |

4.3.5 RANDOM VIBRATION

The maximum predicted random vibration environment at the top of the Payload Attach Fitting (PAF) can be seen in Figure 4-9 and Table 4-8 for Falcon 9 and Figure 4-10 and Table 4-9 for Falcon Heavy. This environment is derived from ground testing and flight data measured at the top of the PAF and does not account for any additional attenuation as the vibration traverses the mission specific payload adapter or spacecraft interface. The smoothline is an envelope of all flight events (liftoff, Stage 1 ascent, and S2 burns) and is derived at a P95/50 statistical level. Note that these levels may not envelope low frequency (<50 Hz) payload responses; these specific responses will be addressed in the coupled loads analysis.



Spacecraft complying with standard component level qualification practices such as GEVs or SMC-S-016 are generally well covered for this environment, but spacecraft specific evaluations should be performed to ensure compatibility with this environment. Please reach out to SpaceX for more information on this environment and how to evaluate spacecraft hardware. Additional solutions to analyze or mitigate the high frequency environment may be provided upon request.

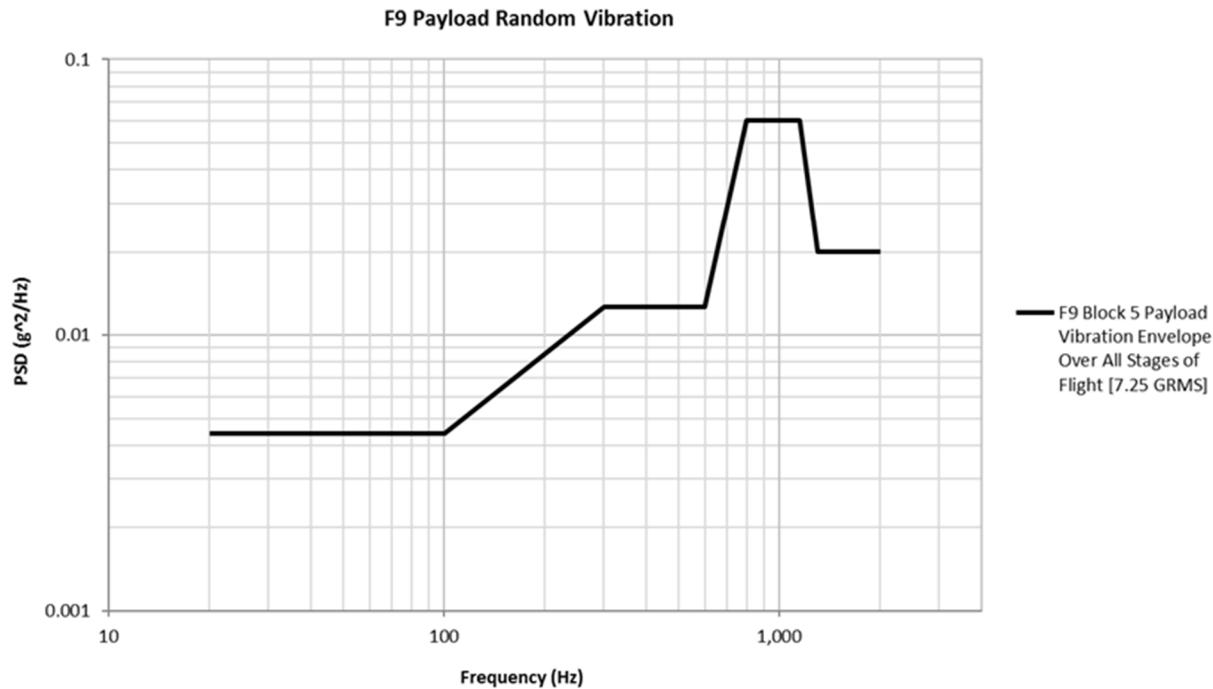


Figure 4-9: Falcon 9 random vibration maximum predicted environment (P95/50) at top of PAF [7.25 GRMS]

Table 4-8: Falcon 9 random vibration maximum predicted environment (P95/50) at top of PAF [7.25 GRMS]

| Frequency | Falcon 9 Payload Vibration MPE, (P95/50), 7.25 GRMS |
|-----------|---|
| 20 | 0.0044 |
| 100 | 0.0044 |
| 300 | 0.0126 |
| 600 | 0.0126 |
| 800 | 0.06 |
| 1150 | 0.06 |
| 1300 | 0.02 |
| 2000 | 0.02 |
| GRMS | 7.25 |

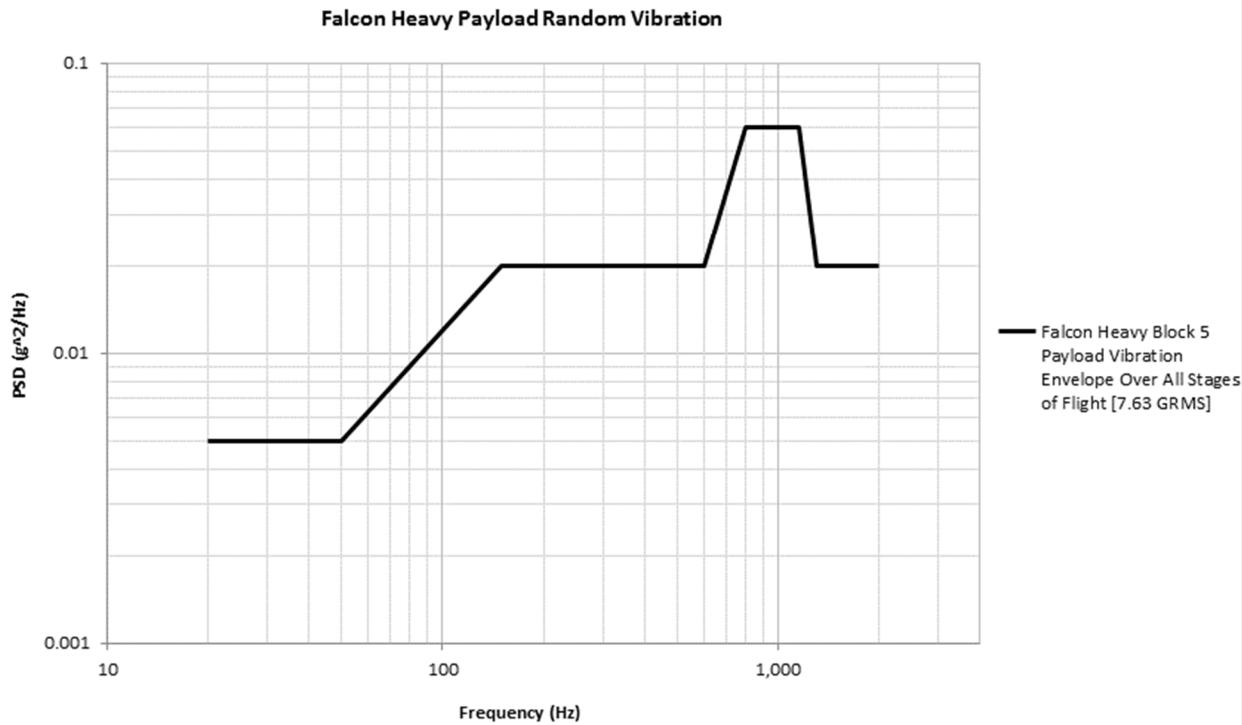


Figure 4-10: Falcon Heavy random vibration maximum predicted environment (P95/50) at top of PAF [7.63 GRMS]

Table 4-9: Falcon Heavy random vibration maximum predicted environment (P95/50) at top of PAF [7.63 GRMS]

| Frequency | Falcon Heavy Payload Vibration MPE, (P95/50) 7.63 GRMS |
|-----------|--|
| 20 | 0.005 |
| 100 | 0.005 |
| 300 | 0.02 |
| 600 | 0.02 |
| 800 | 0.06 |
| 1150 | 0.06 |
| 1300 | 0.02 |
| 2000 | 0.02 |
| GRMS | 7.63 |

4.3.6 ELECTROMAGNETIC

4.3.6.1 RF SYSTEM CHARACTERISTICS

Falcon launch vehicles include several radio frequency (RF) systems, which are summarized in Table 4-10 for Falcon 9 and Table 4-11 for Falcon Heavy.

**Table 4-10: Falcon 9 RF systems characteristics**

| Part Description | TX/RX(transmitter/receiver) | Frequency (MHz) | 99% Bandwidth (MHz) | Modulation | |
|-----------------------------|-----------------------------|-----------------|---------------------|------------|--|
| S1TX1 Telemetry Transmitter | TX | 2209.0 | 4.84 | PCM/FM | |
| S1TX2 Telemetry Transmitter | | 2255.5 | | | |
| S2TX1 Telemetry Transmitter | | 2232.5 | 4.14 | | |
| S2TX2 Telemetry Transmitter | | 2272.5 | | | |
| GPS Receiver | RX | 1575.42 | 20 | BPSK DSSS | |
| Iridium/GPS Tracker | TX | 1610 - 1626.5 | 0.042 | BPSK/QPSK | |
| Iridium/GPS Tracker | RX | 1610 - 1626.5 | 0.042 | QPSK | |
| Iridium/GPS Tracker | RX | 1575.42 | 20 | BPSK DSSS | |
| S-Band BPSK Receiver | RX | 2090 - 2093 | 1 | BPSK | |
| Radar Altimeter | TX | 4235-4275 | 40 | FMCW | |
| Radar Altimeter | TX | 4325-4365 | 40 | FMCW | |
| Radar Altimeter | TX | 4250-4350 | 100 | FMCW | |
| Radar Altimeter | RX | 4235-4275 | 40 | FMCW | |
| Radar Altimeter | RX | 4325-4365 | 40 | FMCW | |
| Radar Altimeter | RX | 4250-4350 | 40 | FMCW | |

Table 4-11: Falcon Heavy RF systems characteristics

| Part Description | TX/RX(transmitter/receiver) | Frequency (MHz) | 99% Bandwidth (MHz) | Modulation | |
|-----------------------------|-----------------------------|-----------------|---------------------|------------|--|
| S1TX1 Telemetry Transmitter | TX | 2209.0 | 4.84 | PCM/FM | |
| S1TX2 Telemetry Transmitter | | 2255.5 | | | |
| S2TX1 Telemetry Transmitter | | 2232.5 | 4.14 | | |
| S2TX2 Telemetry Transmitter | | 2272.5 | | | |
| SB1TX Telemetry Transmitter | | 2370.5 | 4.88 | SOQPSK | |
| SB2TX Telemetry Transmitter | | 2382.5 | | | |
| GPS Receiver | RX | 1575.42 | 20 | BPSK DSSS | |
| Iridium/GPS Tracker | TX | 1610 - 1626.5 | 0.042 | BPSK/QPSK | |
| Iridium/GPS Tracker | RX | 1610 - 1626.5 | 0.042 | QPSK | |
| Iridium/GPS Tracker | RX | 1575.42 | 20 | BPSK DSSS | |
| S-Band BPSK Receiver | RX | 2090 - 2093 | 1 | BPSK | |
| Radar Altimeter | TX | 4235-4275 | 40 | FMCW | |
| Radar Altimeter | TX | 4325-4365 | 40 | FMCW | |
| Radar Altimeter | TX | 4212.5-4252.5 | 40 | FMCW | |
| Radar Altimeter | TX | 4302.5-4342.5 | 40 | FMCW | |
| Radar Altimeter | TX | 4257.5-4297.5 | 40 | FMCW | |
| Radar Altimeter | TX | 4347.5-4387.5 | 40 | FMCW | |
| Radar Altimeter | RX | 4235-4275 | 40 | FMCW | |
| Radar Altimeter | RX | 4325-4365 | 40 | FMCW | |
| Radar Altimeter | RX | 4212.5-4252.5 | 40 | FMCW | |
| Radar Altimeter | RX | 4302.5-4342.5 | 40 | FMCW | |
| Radar Altimeter | RX | 4257.5-4297.5 | 40 | FMCW | |
| Radar Altimeter | RX | 4347.5-4387.5 | 40 | FMCW | |

4.3.6.2 FALCON EMISSIONS

Payload customers must ensure that payload materials or components sensitive to RF environments are compatible with the worst-case Falcon 9 (Figure 4-11 and Table 4-12) and Falcon Heavy (Figure 4-12 and Table 4-13) launch vehicle radiated environment. These limits envelope expected emissions as calculated at the plane between the payload attach



fitting (PAF) and mission specific payload adapter and do not include EMI safety margin or emissions from Avionics inside the fairing. Emissions from Avionics located inside the fairing volume are provided in Section 4.3.6.4. Notch requests will be assessed for compatibility on a mission-specific basis; notches for spacecraft receivers can typically be accommodated to the fairing avionics emissions envelope (80 dB_uV/m) or lower depending on clearances to the payload dynamic envelope in Figure 5-1.

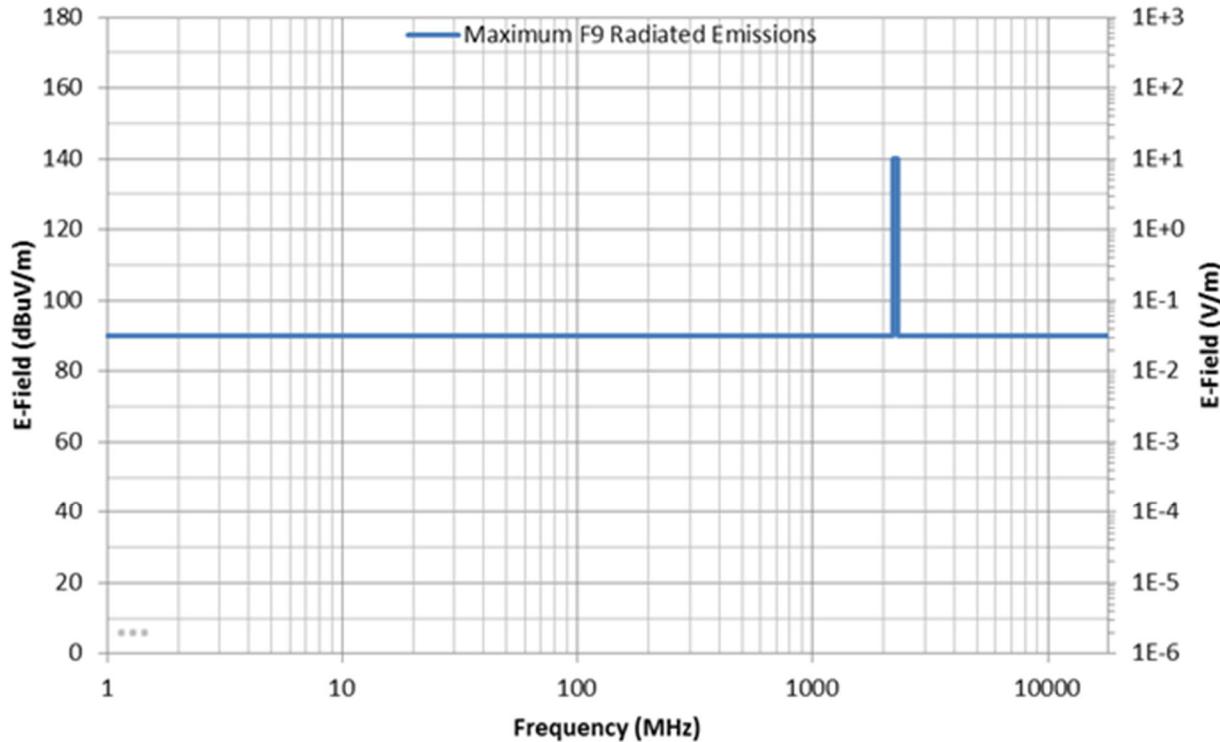


Figure 4-11: Falcon 9 worst-case radiated environment

Table 4-12: Falcon 9 worst-case radiated environment

| Frequency Range (MHz) | E Field Limit (dB _u V/m) | Launch Vehicle Transmit System |
|-----------------------|-------------------------------------|-----------------------------------|
| 1.00 – 2200.0 | 90 | |
| 2200.0 – 2300.0 | 140 | S-band telemetry and video |
| 2300.0 – 18000.0 | 90 | |

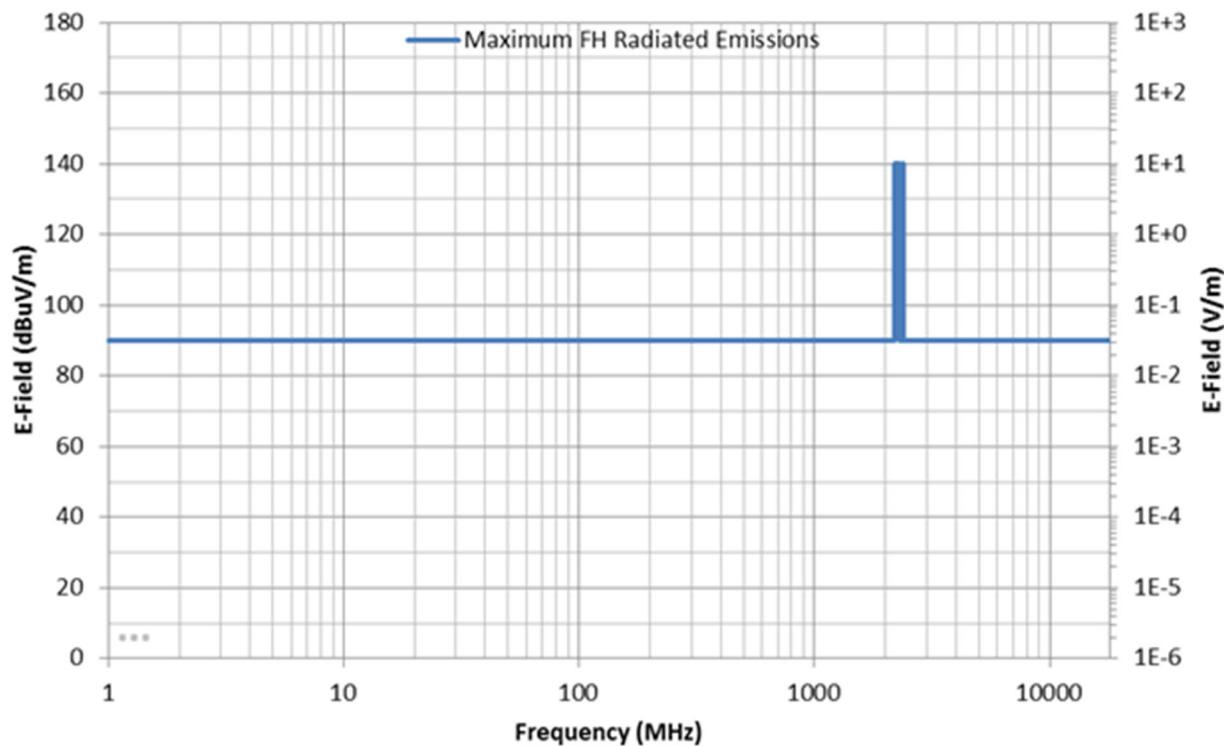


Figure 4-12: Falcon Heavy worst-case radiated environment

Table 4-13: Falcon Heavy worst-case radiated environment

| Frequency Range (MHz) | E Field Limit (dB μ V/m) | Launch Vehicle Transmit System |
|-----------------------|------------------------------|--------------------------------|
| 1.00 – 2200.0 | 90 | |
| 2200.0 – 2300.0 | 140 | S-band telemetry and video |
| 2300.0 – 2360.0 | 90 | |
| 2360.0 – 2395.0 | 140 | S-band telemetry and video |
| 2395.0 – 18000.0 | 90 | |

4.3.6.3 MAXIMUM SPACECRAFT EMISSIONS

Maximum spacecraft emissions for Falcon 9 and Falcon Heavy are shown in Figure 4-13 and Table 4-14. Payloads should not emit radiation in excess of the maximum allowable spacecraft emissions at any time during processing, integration or flight, as measured at the top of the payload attach fitting. Standard Falcon services do not permit active payload radiation during the countdown or flight prior to separation from the second stage. This limit envelopes expected emissions as calculated at the plane between the payload attach fitting (PAF) and mission-specific payload adapter and includes EMI safety margin. Notch requests will be assessed for compatibility on a mission-specific basis; notches for spacecraft transmitters can typically be accommodated to a level that is 6dB lower than SpaceX Avionics qualification limits. Please consult with SpaceX for your mission needs.

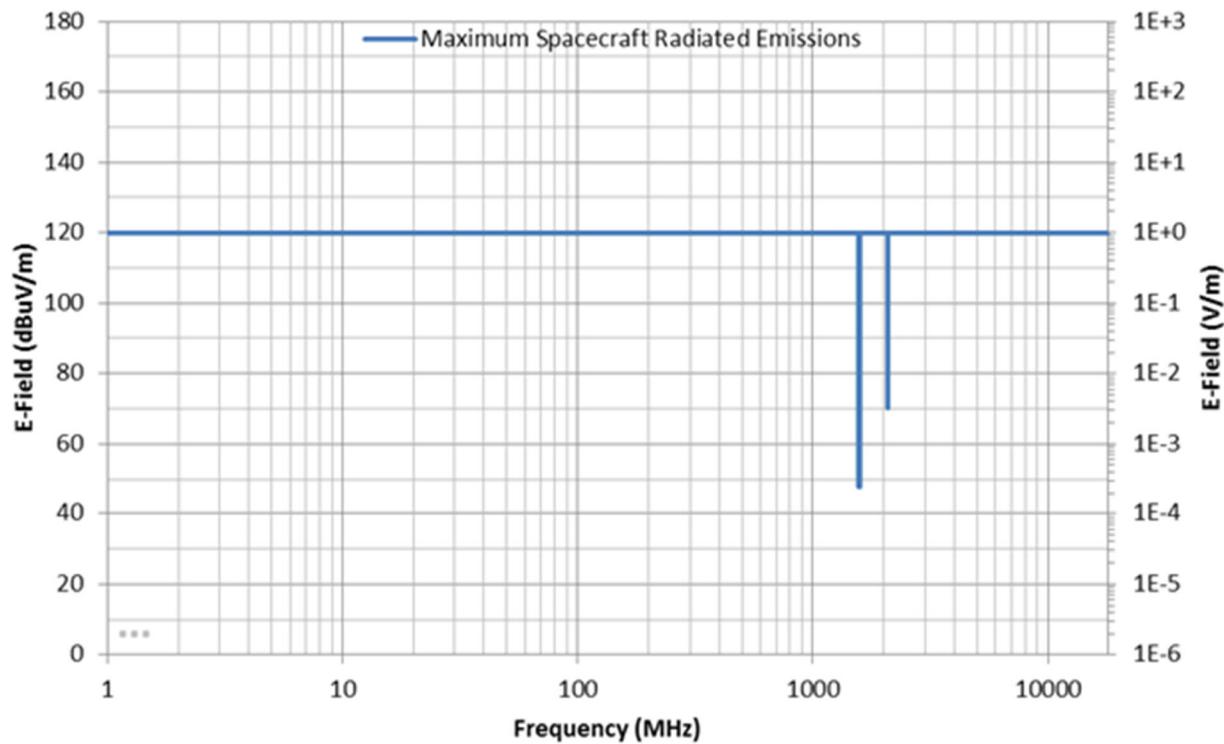


Figure 4-13: Maximum spacecraft emissions

Table 4-14: Maximum spacecraft emissions

| Frequency Range (MHz) | E Field Limit (dB μ V/m) | Launch Vehicle Receive System |
|-----------------------|------------------------------|-------------------------------|
| 1.0 – 1565.42 | 120.0 | |
| 1565.42 – 1585.42 | 48.0 | GPS L1 |
| 1585.42 – 2090.0 | 120.0 | |
| 2090.0 – 2093.0 | 70.0 | Stage 1 Telecommand |
| 2093.0 – 18000.0 | 120.0 | |

4.3.6.4 FAIRING EMISSIONS ENVELOPE

Falcon launch vehicles have avionics inside the fairing. The fairing emission level is shown in Figure 4-14 and Table 4-15. This limit envelopes the maximum expected combined emissions from these avionics, as calculated at the surface of the payload volume in Figure 5-1. EMI safety margin is not included.

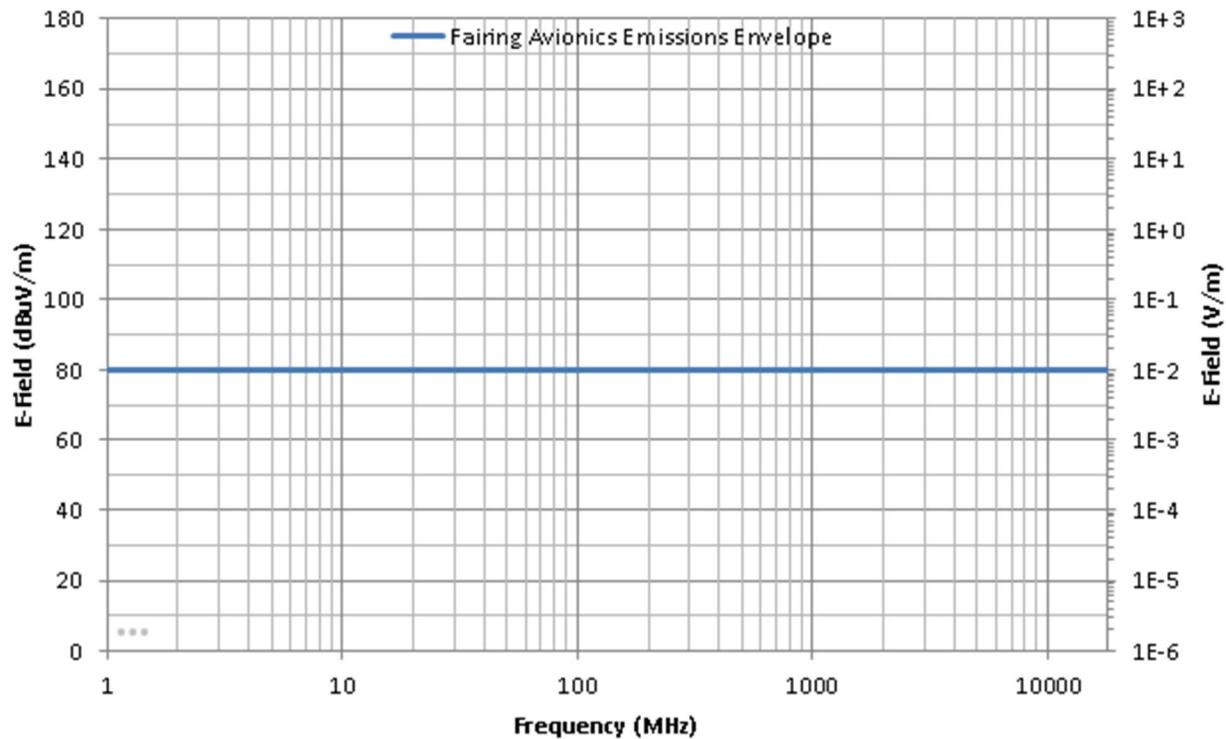


Figure 4-14: Fairing avionics emissions envelope

Table 4-15: Fairing avionics emissions envelope

| Frequency Range (MHz) | E Field Limit (dB μ V/m) |
|-----------------------|------------------------------|
| 1.0 – 18000.0 | 80 |

4.3.6.5 LAUNCH SITE EMISSIONS ENVELOPE

SpaceX has launch facilities on the East coast (SLC-40 and LC-39A) and on the West coast (SLC-4E). This limit envelopes the expected emissions at all SpaceX integration and launch facilities, including Range sources, local radar systems, and communications systems in use at SpaceX facilities (WiFi, mobile phones, two-way radios, etc). Spacecraft designed and tested to this limit (plus appropriate safety margin) can expect to be compatible with all known launch site emissions between spacecraft arrival and delivery to orbit. The envelope is calculated at the surface of the spacecraft and EMI safety margin is not included.

Site-specific (not enveloped) analysis will be performed on a mission-specific basis as needed to meet customer requirements. Notches for spacecraft receivers typically do not overlap with launch site emissions frequencies and can typically be accommodated.

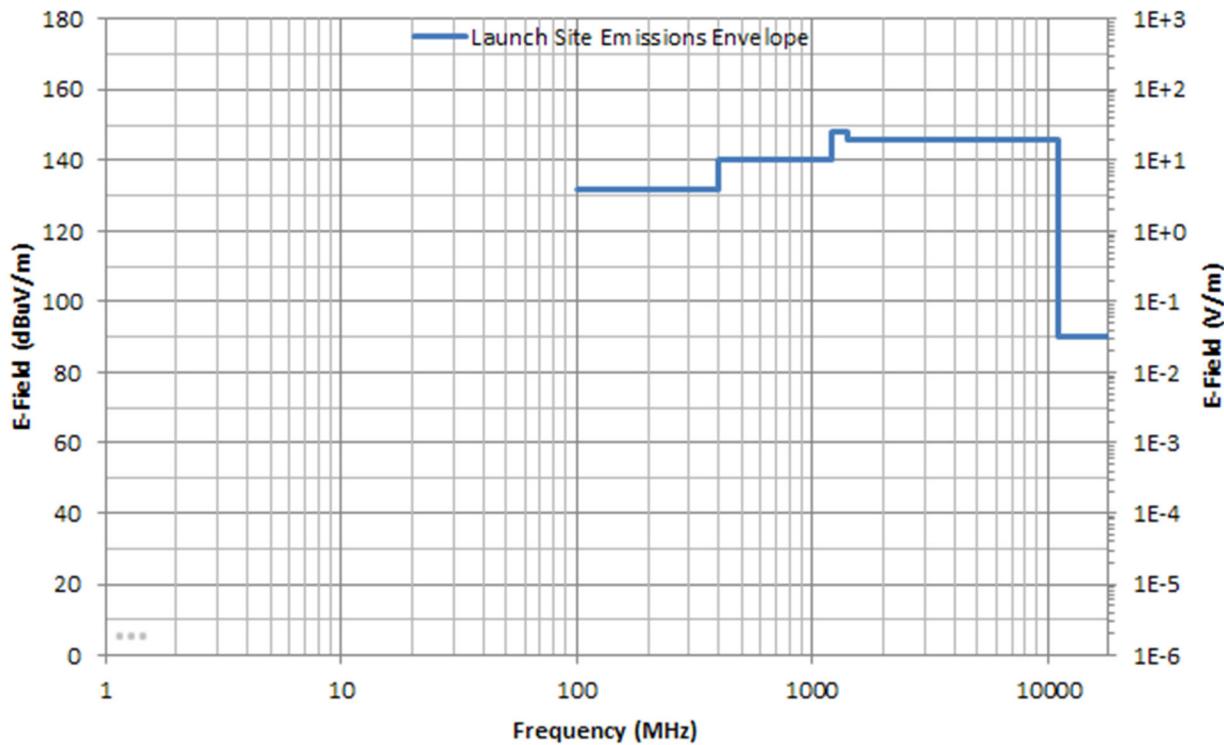


Figure 4-15: Launch site emissions

Table 4-16: Launch site emissions

| Frequency Range (MHz) | E Field Limit (dB μ V/m) |
|-----------------------|------------------------------|
| 100 – 400 | 132 |
| 400 – 1200 | 140 |
| 1200 – 1400 | 148 |
| 1000 – 11000 | 146 |
| 11000 – 18000 | 90 |

4.3.6.6 EMI SAFETY MARGIN

To account for unexpected variation in hardware and environments, 6dB of EMI safety margin is required. EMI safety margin is typically expected to be included on the "victim" side of the source-victim analysis. Each emissions section in this guide specifies whether safety margin has been included in the envelope provided. When safety margin has not been included, it is expected that the relevant spacecraft susceptibility limit will include 6dB of EMI safety margin.

4.3.6.7 LIGHTNING PROTECTION

SpaceX launch pads at CCAFS/KSC contain full lightning protection systems. The integration facilities and hangars are equipped with lightning grounding systems to protect personnel and hardware from lightning. The SLC-40 and LC-39A launch pads are equipped with overhead wire lightning protection systems. These systems are designed to:

1. Be a preferential path for lightning in order to prevent direct attachments to personnel and hardware in the protection zone.
2. Avoid side flash between the overhead wires and flight hardware and ground systems.
3. Minimize electromagnetic coupling to flight hardware and ground systems in order to protect sensitive electronics.



4.3.6.8 LIGHTNING RETEST

Well-defined lightning retest criteria are important to minimize both the risk of damage and the risk of missed launch opportunities for spacecraft and launch vehicles. As such, Falcon launch vehicles have well-defined lightning retest criteria that are based on the lightning distance and amplitude data measured using Range-provided lightning monitoring systems. SpaceX requires spacecraft to provide lightning retest criteria based on lightning strike distance and amplitude.

4.3.7 FAIRING INTERNAL PRESSURE

Inside the Falcon launch vehicle, the payload fairing internal pressure will decay at a rate no larger than 0.40 psi/sec (2.8 kPa/sec) from liftoff through immediately prior to fairing separation, except for brief periods during flight, where the payload fairing internal pressure will decay at a rate no larger than 0.65 psi/sec (4.5 kPa/sec), for no more than 5 seconds.

4.3.8 PAYLOAD TEMPERATURE EXPOSURE DURING FLIGHT

The SpaceX payload fairing is a composite structure consisting of a 2.5 cm (1 in.) thick aluminum honeycomb core surrounded by carbon fiber face sheet plies. The emissivity of the payload fairing is approximately 0.9. The fairing thermal insulation, which is attached to the outside of the fairing composite, is sized such that the composite never exceeds the 'Bounding Fairing Composite Temperature' profile shown in Figure 4-16. The curve is truncated at 240 seconds, although the approximate time of payload fairing jettison for a geosynchronous transfer orbit mission from Cape Canaveral is typically earlier, at around 210 seconds into flight. Payload fairing jettison timing is determined by customer requirements and physical limitations of the system.

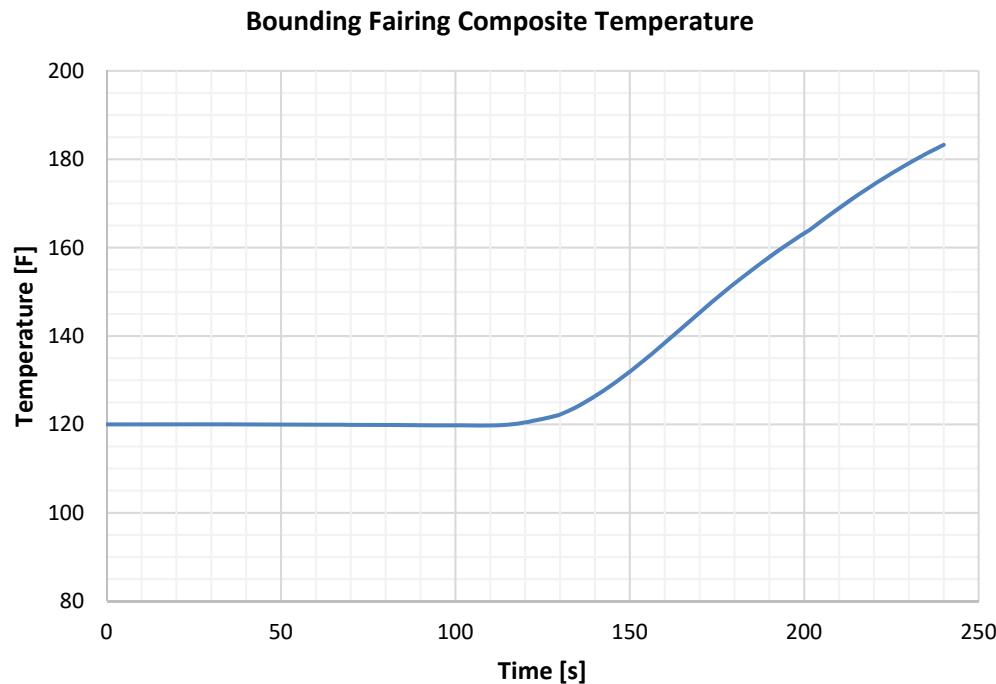


Figure 4-16: Maximum payload fairing spot temperature seen by payload

4.3.9 FREE MOLECULAR HEATING

The payload fairing will nominally be deployed when free molecular aero-thermal heating is less than 1,135 W/m². Other fairing deployment constraints can be accommodated as a standard service, although they may modestly reduce vehicle performance. Please contact SpaceX regarding mission-unique fairing deployment requirements.



4.4 ENVIRONMENTAL COMPATIBILITY VERIFICATION

Prior to launch, SpaceX requires that customers verify the compatibility of their systems with the Falcon vehicles' maximum expected flight environments. SpaceX initiates this process by providing the applicable environments. The customer then summarizes its approach to environmental compatibility verification, and the process concludes with the customer providing test data to SpaceX, if necessary (Table 7-2).

Table 4-17 summarizes the typical verification activities performed by the customer and provides test levels based largely on Section 4.3 of this guide. Mission-unique limit levels and coupled loads analysis levels will be developed during the mission integration process and will serve as the basis for the verification activities. Alternate verification approaches may be acceptable, but coordination with SpaceX is required.

Table 4-17: Spacecraft environmental compatibility verification example

| Environment | Verification Activities and Test Levels |
|--|---|
| Quasi-Static Loads (Section 4.3.1) | Qualification: Limit levels x 1.25 Protoqualification: Limit levels x 1.25 Acceptance: Limit levels x 1.0 |
| Sine Vibration (Section 4.3.2) | Qualification: Limit levels x 1.25, two octave/minute sweep rate Protoqualification: Limit levels x 1.25, two octave/minute sweep rate Acceptance: Limit levels x 1.0, four octave/minute sweep rate |
| Acoustic, Shock, and Random Vibration (Section 4.3.3 – 4.3.5) | Customers shall provide details and justification showing compatibility of spacecraft hardware to acoustic, shock, and random vibration environments presented herein. SpaceX does not have specific requirements on spacecraft test margins; however, SpaceX generally recommends the following standards as references when developing spacecraft/component test campaigns: GEVS (GSFC-STD-7000), SMC-S-016, or NASA-STD-7001A. Test campaigns that do not align with methodologies presented in the above standards should have sufficient accompanying justification. SpaceX can aid in evaluation of these environments if requested |
| Electromagnetic (Section 4.3.6) | SpaceX standard service includes an electromagnetic compatibility assessment. SpaceX recommends electromagnetic interference/compatibility testing be conducted for RF-sensitive payloads and may request insight into relevant testing performed |
| Pressure (Section 4.3.7) | SpaceX recommends venting analyses be conducted and may request insight into relevant analyses performed |
| Thermal (Section 4.3.8) | SpaceX recommends thermal cycle and thermal vacuum testing be conducted and may request insight into relevant testing performed |



5 INTERFACES

5.1 MECHANICAL INTERFACES

5.1.1 PAYLOAD ADAPTERS AND SEPARATION SYSTEMS

The standard mechanical interface between SpaceX-provided Falcon launch vehicle hardware and customer-provided hardware is a 1575-mm (62.01 in.) diameter bolted interface, at the forward end of the launch vehicle payload attach fitting. This interface is designed to conform to the EELV 1575-mm (62.01 in.) diameter medium payload class mechanical interface defined in the EELV Standard Interface Specification Rev. C June 2017.

For customers with 937-mm or 1194-mm (36.89 in. or 47.01 in.) clampband interface requirements, SpaceX will either provide and integrate a payload adapter and clampband separation system or will integrate an adapter and separation system chosen and provided by the customer, as a standard service. For customers with alternative interface requirements, SpaceX can procure almost any industry-standard adapter system as a nonstandard service. SpaceX has experience integrating numerous commercially available and internally developed adapters and separation systems. Falcon 9 and Falcon Heavy are compatible with adapter and separation system products offered by RUAG, CASA, Planetary Systems Corporation and other industry-leading providers.

5.1.2 PAYLOAD FAIRING

The SpaceX fairing is 5.2 m (17.2 ft) in outer diameter and 13.2 m (43.5 ft) high overall. Fairing structures and dynamics result in a payload dynamic envelope with a maximum diameter of 4.6 m (15.1 ft) and a maximum height of 11 m (36.1 ft). The base of the payload dynamic envelope is defined by the standard 1575-mm interface plane at the forward end of the standard payload attach fitting (Section 5.1.1); any payload adapters required (e.g., to achieve a 937-mm or 1194-mm (36.89 in. or 47.01 in.) interface) will utilize a portion of the payload dynamic envelope. The bolded dimensions in Figure 5-1 denote the standard payload dynamic interface. The non-bolded dimensions denote potential additional volume as a nonstandard service.

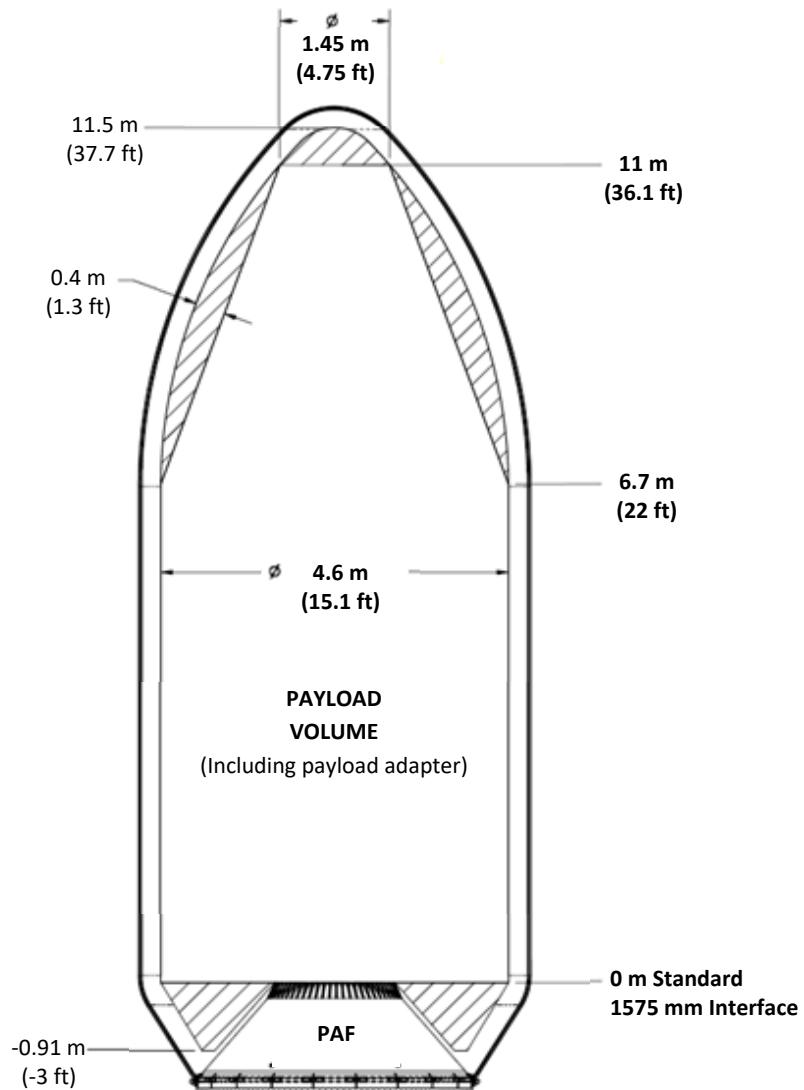


Figure 5-1: Falcon fairing and payload dynamic envelope², meters (feet)

The fairing can accommodate one access door in the cylindrical portion as a standard service and eight access doors as a non-standard service. The standard payload fairing door is circular, with a 24 in x 24 in size.

A single through-fairing RF antenna (re-radiation) system is available as a standard service for use during payload antenna testing while on the launch pad. The service is provided for common command and telemetry frequencies. Contact SpaceX for further information on multiple re-radiation systems or non-standard frequencies. Through-fairing RF antenna (re-radiation) systems are not available for using during flight. SpaceX utilizes standard RF antennae locations on the SpaceX fairing and will work to clock the payload accordingly.

Other than remove/install-before-flight items, all processing requiring access to the payload must be completed prior to fairing installation. In the event of a payload anomaly requiring customer access to the payload, the standard concept

² Payload dynamic envelope (shown as "payload volume") indicates the volume that the spacecraft is allowed to move within, without intrusion by the fairing due to its dynamic motions.



of operations for Falcon vehicles is to return the launch vehicle to the hangar and remove the fairing. Access doors are not designed for emergency access into the payload fairing once the launch vehicle is on the pad.

Combinations of acoustic surfaces are used inside the payload fairing to help achieve the acoustic environments specified in Section 4.3.3.

5.2 ELECTRICAL INTERFACES

Falcon vehicles provide electrical connectivity between the payload and customer-provided electrical ground support equipment (EGSE) prior to launch, as well as in-flight separation device commanding and separation monitoring. Falcon launch vehicles do not provide either payload command or interleaved telemetry access during flight as a standard service.

As a standard service, Falcon launch vehicles provide two in-flight disconnect electrical interface points located at the payload separation plane. Connector locations and pin designation will be determined during the mission integration process. SpaceX will supply 37- or 61-pin electrical connectors and will provide the payload-side connector halves to the customer. Alternatively, the customer can supply mission-unique electrical connectors and provide the launch vehicle-side connector halves to SpaceX.

5.2.1 CONNECTIVITY DURING PAYLOAD PROCESSING AND ON LAUNCH PAD

The Falcon 9 and Falcon Heavy systems accommodate electrical connectivity between customer EGSE and the payload during most processing and integration activities. Table 5-1 summarizes the availability of interfaces during standard processing and integration activities. Customers may connect directly between their EGSE and their payload during payload processing operations. Electrical interfaces will not be available during SpaceX adapter mate, encapsulation, launch vehicle integration and rollout operations. However, between these steps the customer will be able to interface with its payload. Customers may supply separate EGSE for payload processing facility (PPF) and pad operations or may relocate EGSE from the PPF to the pad.

Table 5-1: Payload electrical interface connectivity

| Phase | Interface Connection |
|---|---|
| In PPF (payload processing) | Customer cables directly to payload |
| In PPF (adapter mate and encapsulation) | None – SpaceX is connecting the payload to the flight adapter harness, SpaceX will provide payload to PAF connection cables |
| In PPF (encapsulated) | Customer cables to PPF junction box or equivalent interface |
| Transport to hangar | None – mobile |
| In hangar (pre-integration) | Customer cables to hangar junction box |
| In hangar (launch vehicle integration) | None – SpaceX is connecting the flight adapter harness to the second stage flight harness |
| In hangar (on transporter-erector) | Customer cables to hangar junction box |
| Rollout | None – mobile |
| On pad (horizontal and vertical) | 6.1-m (20-ft) customer cables (provided by customer) to pad junction box |
| Flight | None – separation indication only |

Pad EGSE provided by the customer will be housed in an instrument bay beneath the launch pad deck (Section 6.1). Payload EGSE is connected to a SpaceX-provided junction box. The payload customer typically provides 6.1-m (20-ft) cables to connect the payload EGSE to the junction box.

The junction box is connected to the launch vehicle transporter-erector via a ground harness. A harness then runs along the length of the transporter-erector and connects to the second-stage T+0 quick-disconnect. The flight side of the second-stage quick-disconnect mates to up to four dedicated payload electrical harnesses that are provided by SpaceX



as part of the second stage. The payload harnesses are routed along the exterior of the second-stage propellant tanks, underneath raceway covers that provide protection during ground and flight operations. At the top of the second-stage the harnesses are routed through the payload attach fitting (Section 5.1.1) and to the spacecraft separation plane.

The total cable lengths between the payload racks/EGSE and the spacecraft separation plane are listed in Table 5-2 and shown in Figure 5-2.

Table 5-2: Maximum expected cable lengths between payload racks/EGSE and the separation plane

| Launch Site | PPF | Hangar | Launch Pad |
|----------------|-----------------|------------------|------------------|
| VAFB (SLC-4) | 30.5 m (100 ft) | 208.5 m (684 ft) | 171.9 m (564 ft) |
| CCAFS (SLC-40) | 18.3 m (60 ft) | 197.8 m (649 ft) | 171.9 m (564 ft) |
| KSC (LC-39A) | 18.3 m (60 ft) | 181.1 m (594 ft) | 196.3 m (644 ft) |

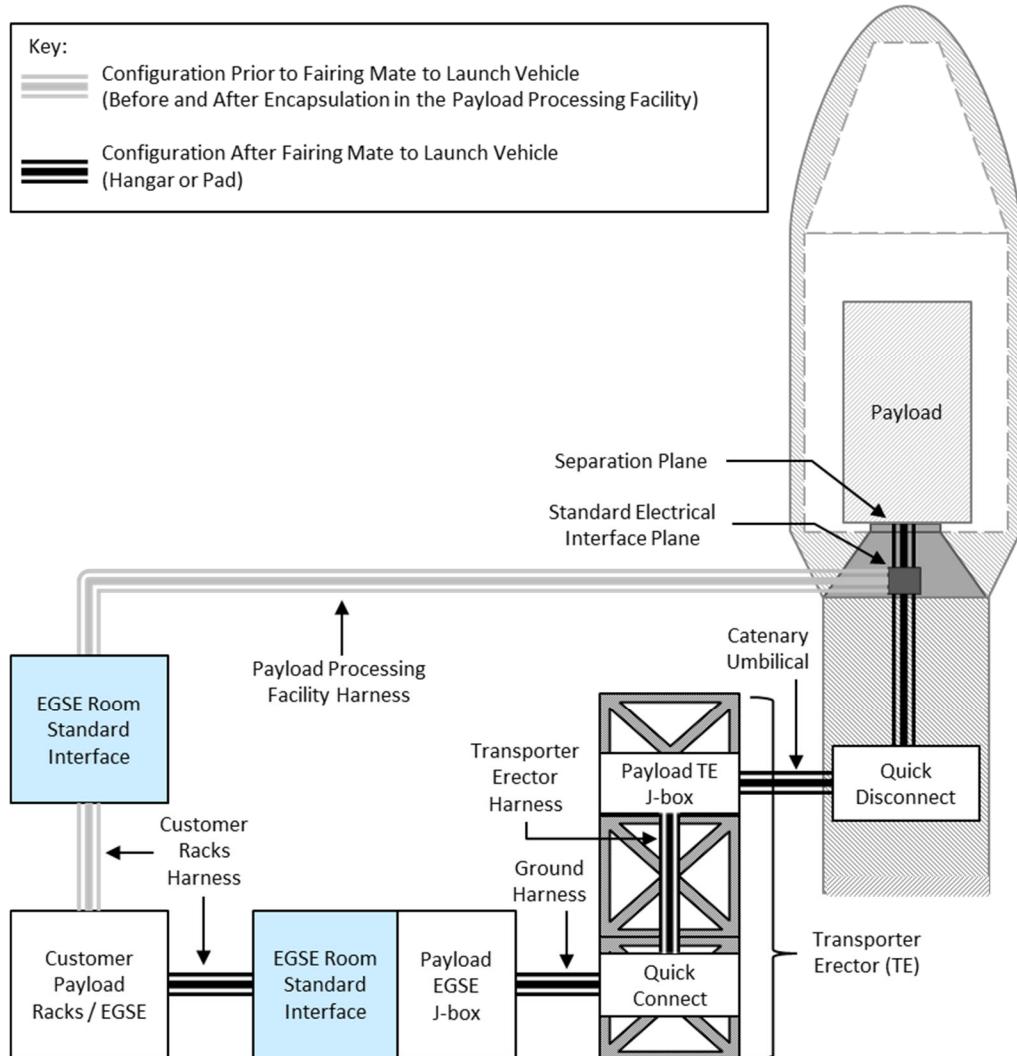


Figure 5-2: On-pad electrical interfaces



5.2.2 FALCON-TO-PAYOUT COMMAND INTERFACE

Separation device commands are used to initiate spacecraft separation from the second stage. Falcon launch vehicles can provide up to 36 separation device commands, typically implemented as up to 18 redundant commands. Up to 96 additional (48 redundant) commands can be accommodated as a nonstandard service; please contact SpaceX for details.

Falcon vehicles are capable of detecting 6 separation events through breakwire pairs, and a separation indication signal for each will be included in launch vehicle telemetry. Additional breakwire sensing may be available, contact SpaceX for more information. SpaceX requires that at least one circuit on each spacecraft electrical connector be looped back on the spacecraft side for breakwire indication of spacecraft separation within launch vehicle telemetry. Customers may request that any number of circuits on the spacecraft electrical connectors be looped back on the launch vehicle side for breakwire indication of spacecraft separation within spacecraft telemetry.

5.2.3 TIMING SERVICES

SpaceX can supply inter-range instrumentation group IRIG-B000 or IRIG-B120 time from its GPS clocks to customer EGSE at the payload processing facility and/or the launch pad. A launch countdown clock can also be supplied in the IRIG CS-5246 format. These timing services are provided as a standard service; other options are available as nonstandard services.

5.3 INTERFACE COMPATIBILITY VERIFICATION REQUIREMENTS

SpaceX requires that customers verify the compatibility of their systems with the Falcon mechanical and electrical interfaces before shipment to the launch site. As a standard service, SpaceX will support a payload adapter mechanical fit check, including electrical connector location compatibility, at a facility of the customer's choosing. This interface compatibility verification does not include a shock test. Second-unit and later flights of similar systems may be subject to reduced pre-ship verification requirements. Nonstandard verification approaches can be developed on a mission-unique basis.



6 FACILITIES

6.1 SPACEX EAST COAST LAUNCH FACILITIES

6.1.1 CAPE CANAVERAL AIR FORCE STATION, FLORIDA

SpaceX operates a Falcon launch site at Space Launch Complex 40 (SLC-40) at Cape Canaveral Air Force Station (CCAFS), Florida. SLC-40 was previously used by the US Air Force for Titan III and Titan IV launches, and it has been extensively modified by SpaceX to accommodate the Falcon family of launch vehicles.

The SLC-40 launch pad is [located](#) at $28^{\circ} 33.72'$ (28.5620°) N latitude, $80^{\circ} 34.630'$ (80.5772°) W longitude. Launch azimuths from SLC-40 support low- to mid-inclination LEO, GTO and Earth escape orbits (Section 3.1).

SpaceX facilities at SLC-40 (Figure 6-1) include a launch vehicle integration hangar, propellant and pressurant storage and supply areas, a launch pad, and lightning towers. A SpaceX administrative facility is located adjacent to the launch complex.

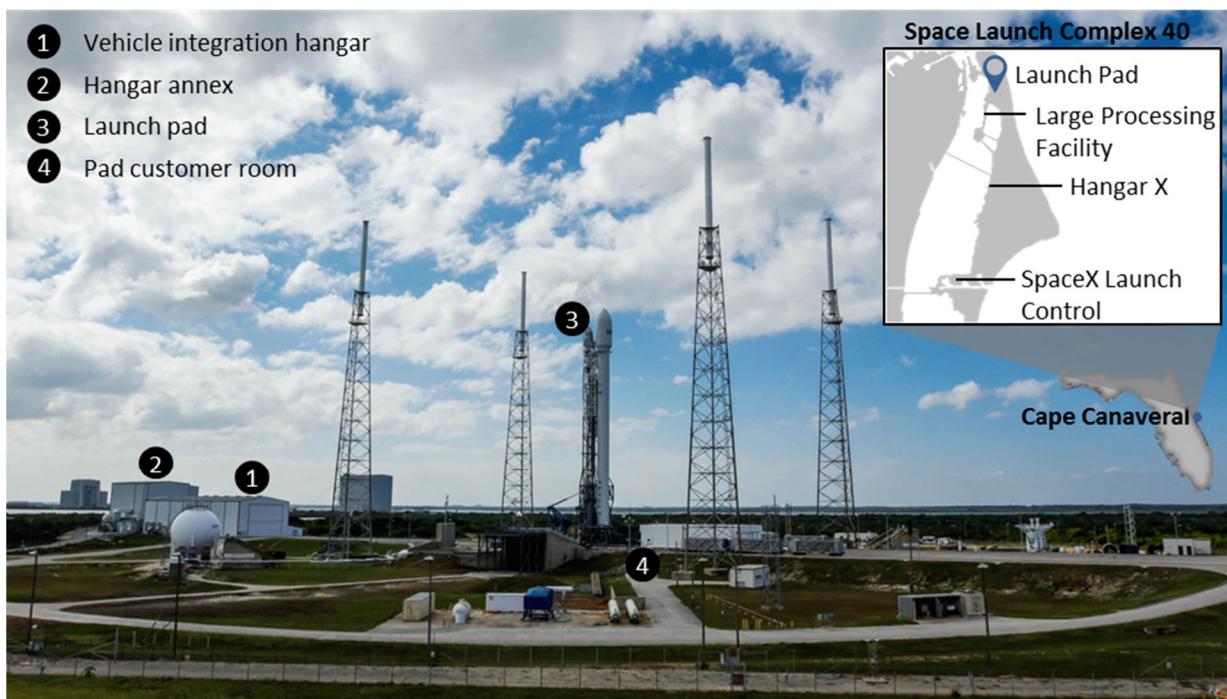


Figure 6-1: Space Launch Complex 40 at Cape Canaveral Air Force Station, Florida

SpaceX provides the use of an off-pad PPF as a standard service for CCAFS launch operations. CCAFS processing and launch operations, including PPF services, are described in Section 8.

6.1.2 KENNEDY SPACE CENTER, FLORIDA

In April 2014, SpaceX signed a 20-year lease with NASA for use of historic Launch Complex 39A (LC-39A) at John F. Kennedy Space Center (KSC), located on Merritt Island off the central Florida coast. NASA constructed LC-39A (Figure 6-2) in the early 1960s to conduct missions under the legendary Apollo program and, later, with the space shuttle. After facility upgrades in 2016, SpaceX completed its first LC-39A launch on February 19, 2017, with the Falcon 9 transport of CRS-10, as part of an ISS commercial resupply mission. SpaceX has continued the pad's legacy, launching Falcon 9 from LC-39A twelve times in 2017 alone and Falcon Heavy in February 2018 for its demonstration mission.

The LC-39A launch pad is located at 28.6082° N latitude, 80.6041° W longitude. Launch azimuths from LC-39A support low- to mid-inclination LEO, GTO and Earth escape orbits (Section 3.1).



Figure 6-2: LC-39A at Kennedy Space Center, Florida

LC-39A includes an existing launch pad. The site's design mirrors the facilities and operations at SpaceX's other launch pads and leverages lessons learned. Located 8 miles from the main KSC gate, the launch complex at LC-39A (Figure 6-2) is the largest location that SpaceX has activated for launch operations since the company's inception in 2002.

The LC-39A hangar has been designed to receive, integrate and roll out Falcon 9 and Falcon Heavy launch vehicles (Figure 6-2). With 55,000 sq ft of floor space and 34,000 sq ft of high bay, the hangar contains 90-ton, 50-ton and 30-ton bridge cranes as well as integration rails, electrical support equipment and GN2, GHe and other supplies for performing launch vehicle processing and integration with the encapsulated payload.

Based on a survey of the route, the maximum incline that the integrated launch vehicle experiences during transportation is 2.9 degrees and occurs as it is moved up to the pad.

6.1.3 CCAFS & KSC PERSONNEL ACCOMMODATIONS

6.1.3.1 ACCESS AND BADGES

CCAFS is a US Air Force Range with controlled access. SpaceX will facilitate pre-approval, badging and access for customer personnel requiring access to CCAFS. Once badged, customer personnel will have access to the appropriate areas of the launch base. Non-US persons are subject to additional pre-approval and escort requirements, which will be facilitated by SpaceX.

6.1.3.2 TRANSPORTATION, LODGING AND SERVICES

Customers typically fly commercial transport to Orlando International Airport, rent cars at the airport, and find lodging between Titusville and Cocoa Beach for the duration of their stay in Florida. Customer personnel who are US persons may use their own rental cars for on-base transportation. The area offers a full range of services; your mission manager can provide you with additional detailed recommendations. SpaceX does not provide transportation or lodging for customer personnel during CCAFS launch campaigns.



6.1.3.3 AVAILABLE FACILITIES FOR CUSTOMERS

As a standard service, SpaceX provides desk and office space for customer personnel at CCAFS in Hangar AO (Figure 6-3).



Figure 6-3: Hangar AO

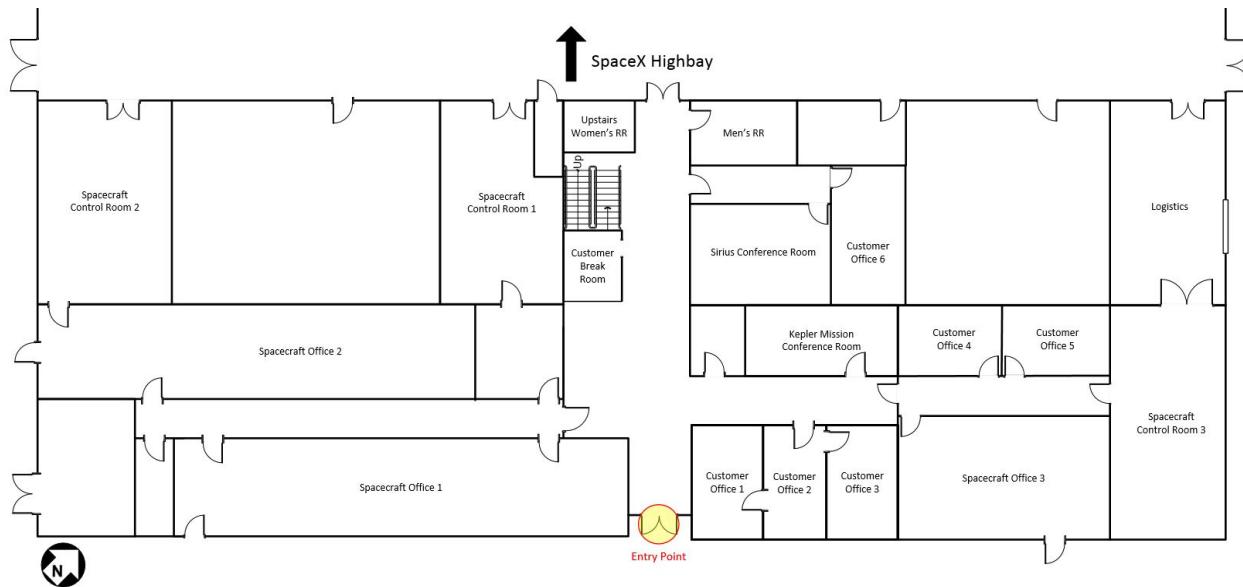


Figure 6-4: Layout of customer office space in Hangar AO

These facilities are available from customer arrival through launch + 3 days. Offices are provided with US-standard power (120V, 60 Hz), high-speed Internet service and standard office equipment. The pad customer room is located in a bunker below the launch pad and is used during pad operations.

The SpaceX Launch Control for SpaceX flights is located just outside the south entrance to CCAFS, providing easy access to all customers. These facilities are equipped with fiber-optic connections to the launch site and a connection



into the launch site's main data system, allowing easy data transfers between the control facility, the pad and the range, along with required external users and agencies. A customer room that can accommodate eight people is provided within the facility for customer technical management personnel.

6.2 VANDENBERG AIR FORCE BASE, CALIFORNIA

SpaceX operates a Falcon launch site at Space Launch Complex 4 East (SLC-4E) at Vandenberg Air Force Base (VAFB), California (Figure 6-5). SLC-4E was also previously used by the US Air Force for Titan III and Titan IV launches, and it has been extensively modified by SpaceX to accommodate Falcon launch vehicles. The facilities include the PPF, vehicle integration hangar, customer office area, pad customer room, launch pad, and launch and landing control. The PPF is attached to the north side of the vehicle integration hangar as shown in [Error! Reference source not found.](#). The two facilities share a common door through which an encapsulated payload will pass for integration to the launch vehicle. The customer office area is within walking distance of the PPF and is available to support customer administrative needs. There are multiple offices and conference rooms available in the building and sections of the building can be closed off as necessary to separate working areas between organizations. The pad customer room is located next to the launch pad and equipped to support customer EGSE racks and work stations during payload processing at the pad. The Launch and Landing Control (Bldg 8505) is located on the North Base and is equipped to support customer electrical ground support equipment racks and workstations for day of launch activities.

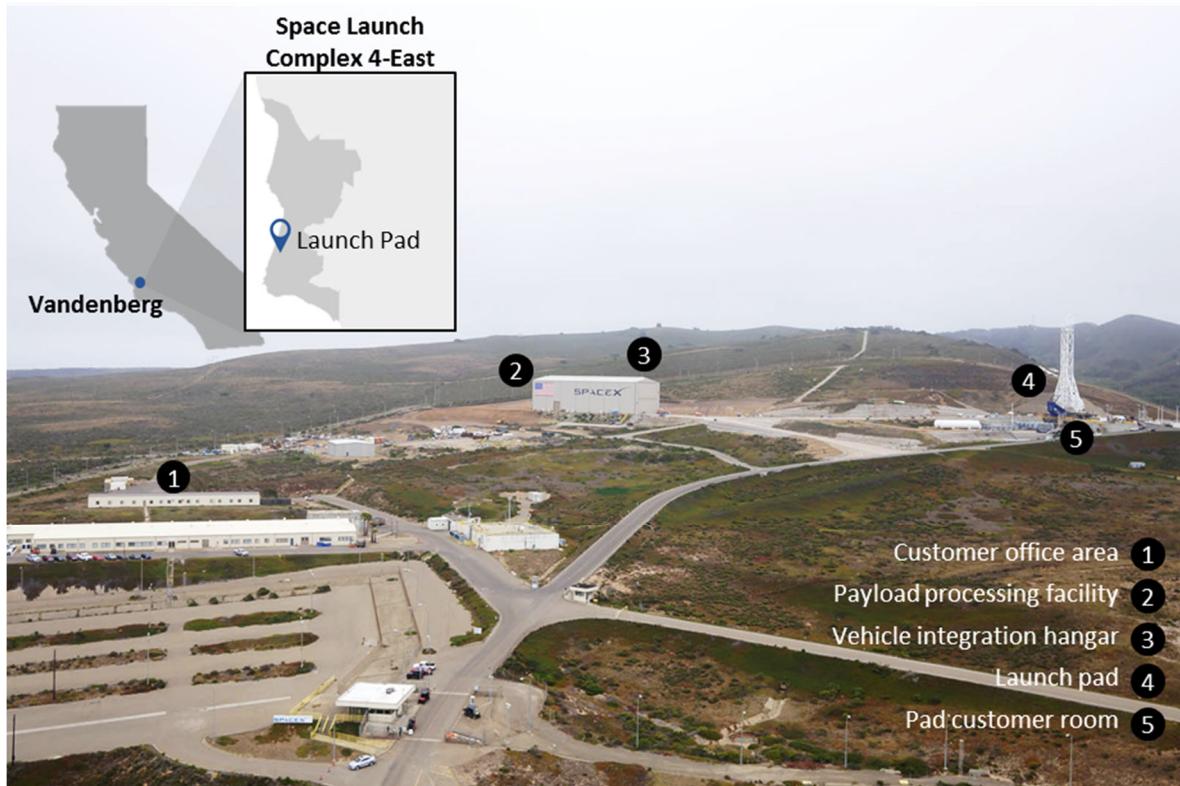


Figure 6-5: Space Launch Complex 4 East at Vandenberg Air Force Base, California

The SLC-4E launch pad is [located](#) at 34° 37.92' (34.6320°) N latitude, 120° 36.64' (120.6107°) W longitude. Launch azimuths from SLC-4E support high-inclination LEO orbits, including polar orbits and SSO (Section 3.1). SLC-4E processing and launch operations are described in Section 8.



6.2.1 VAFB PERSONNEL ACCOMMODATIONS

6.2.1.1 ACCESS AND BADGES

VAFB is a US Air Force base with controlled access. SpaceX will facilitate pre-approval, badging and access for customer personnel requiring access to VAFB. Once badged, customer personnel will have access to the appropriate areas of the launch base. Non-US persons are subject to additional pre-approval and escort requirements, which will be facilitated by SpaceX.

6.2.1.2 TRANSPORTATION, LODGING AND SERVICES

Customers typically fly commercial transport to Los Angeles International Airport (LAX), rent cars at the airport, and find lodging between Lompoc and Santa Maria for the duration of their stay in California. The drive between LAX and VAFB takes approximately 3 hours. Customers occasionally fly into Santa Barbara Airport (SBA) as well; the drive from SBA to VAFB takes about an hour. Customer personnel who are US persons may use their own rental cars for on-base transportation. SpaceX does not provide transportation or lodging for customer personnel during VAFB launch campaigns. The area offers a full range of services; your mission manager can provide you with additional detailed recommendations.

6.2.1.3 AVAILABLE FACILITIES FOR CUSTOMERS

As a standard service, SpaceX provides desk and office space (Figure 6-6) for customer personnel. These facilities are available from customer arrival through launch + 3 days. Offices are provided with US-standard power (120 V, 60 Hz), high-speed Internet service and standard office equipment.

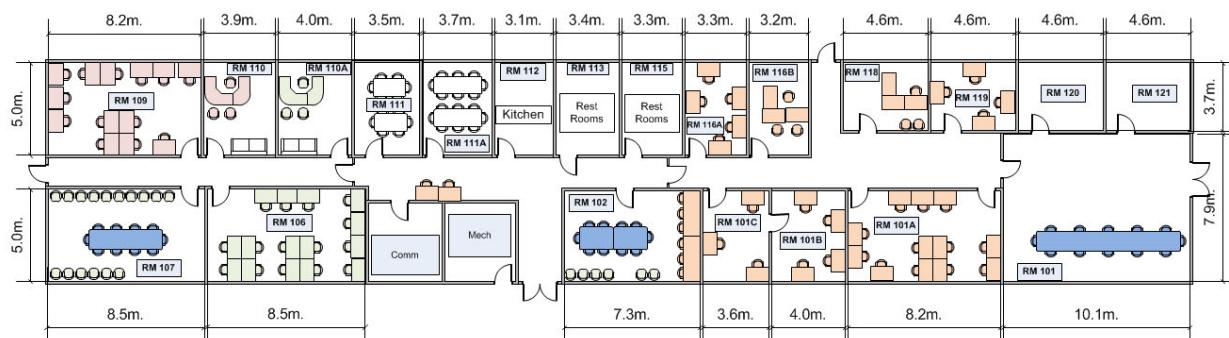


Figure 6-6: Vandenberg customer office space layout

The pad customer room is located in a bunker below the launch pad and is used during pad operations. Figure 6-7 below shows the size and layout of this facility.

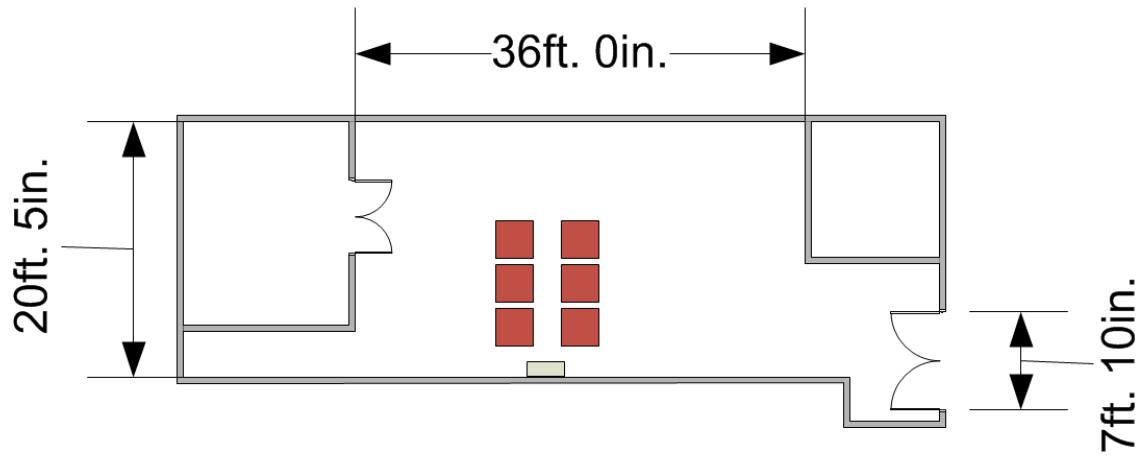


Figure 6-7: Pad customer room

The SpaceX Launch Control is located approximately 11 miles north of the pad. These facilities are equipped with fiber-optic connections to the launch site and a connection into the launch site's main data system, allowing easy data transfers between the control facility, the pad and the range, along with required external users and agencies. A customer room is provided within the facility and can accommodate up to 12 customer technical personnel.

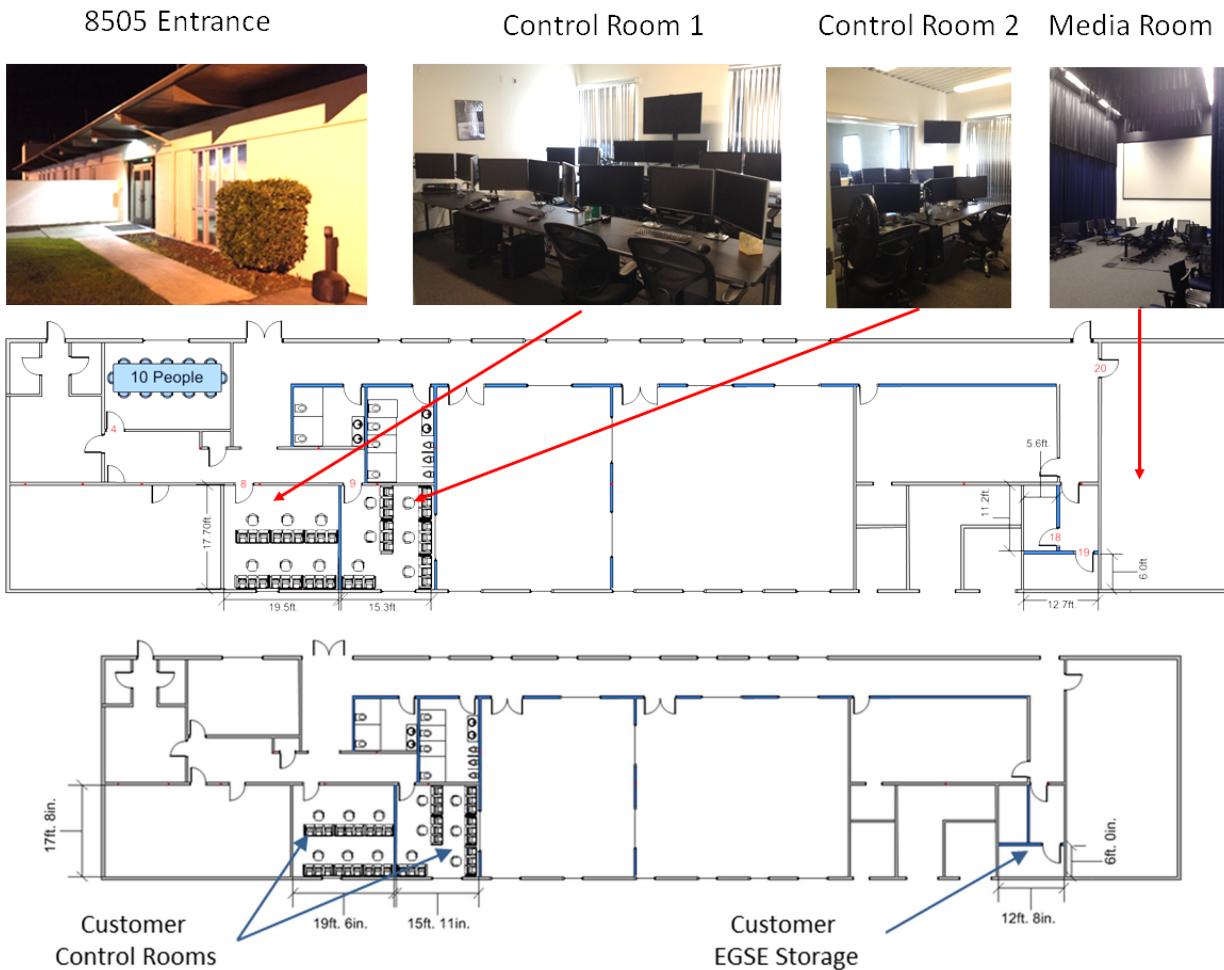


Figure 6-8: Customer control rooms at SpaceX Launch Control



6.3 HEADQUARTERS—HAWTHORNE, CA

SpaceX headquarters (Figure 6-9) are conveniently located in [Hawthorne, CA](#), a few miles inland from Los Angeles International Airport. The design and manufacturing facility spans more than 1.5 million square feet and ranks among the largest manufacturing facilities in California; two complete Falcon 9s can fit end-to-end along the short length of the building. Facilities include multiple Falcon 9 and Falcon Heavy manufacturing stations, fairing production and integration stations, nine stations for final assembly of the Merlin engine, and Dragon spacecraft production areas.

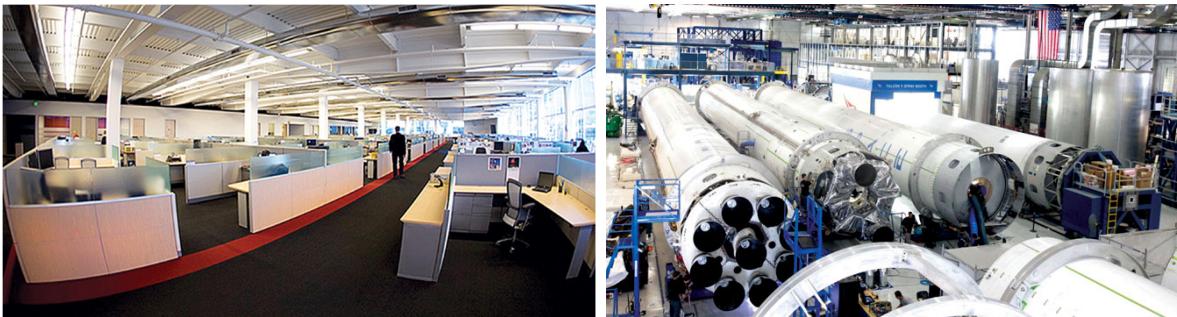


Figure 6-9: SpaceX's headquarters in Hawthorne, California

6.4 ROCKET DEVELOPMENT FACILITY—MCGREGOR, TX

Structural and propulsion testing are performed at the SpaceX Rocket Development Facility in McGregor, Texas (Figure 6-10). Conveniently located two hours from both Austin and Dallas, the site is staffed with test engineers, technicians and management personnel.

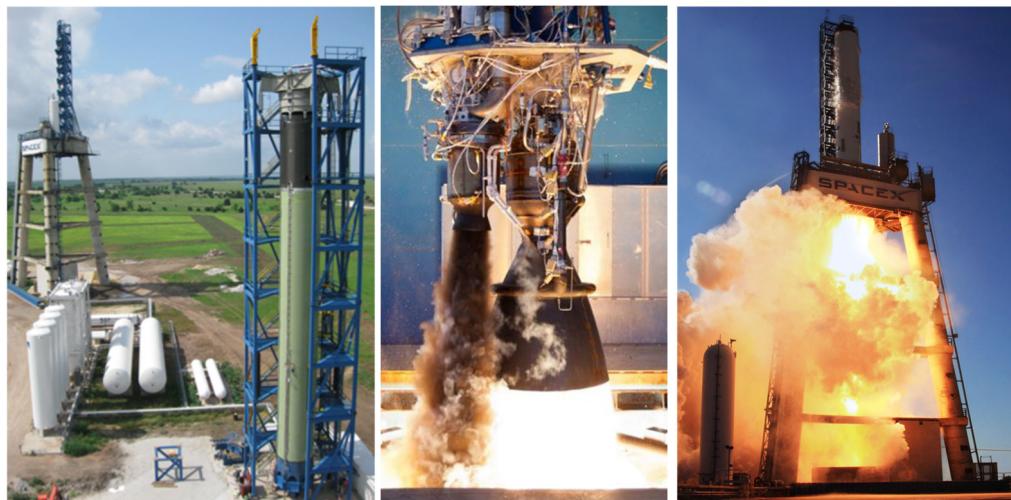


Figure 6-10: SpaceX Texas test facility and test operations

6.5 GOVERNMENT OUTREACH AND LEGAL AFFAIRS—WASHINGTON, DC

SpaceX's government outreach and licensing team is located in Washington, DC.



7 MISSION INTEGRATION AND SERVICES

7.1 CONTRACTING

Falcon launch services are available via direct contract with SpaceX and through certain managed procurement services. To begin your direct contract relationship with SpaceX, please [contact](#) the SpaceX Sales department. The Sales department will work with you to develop a launch services contract.

7.2 MISSION MANAGEMENT

To streamline communication and ensure customer satisfaction, SpaceX provides each Falcon launch services customer with a single technical point of contact from contract award through launch (Figure 7-1). Your mission manager will be responsible for coordinating mission integration analysis and documentation deliverables, planning integration meetings and reports, conducting mission-unique design reviews (as required) and coordinating all integration and test activities associated with the mission. The mission manager also coordinates all aspects of launch vehicle production, range and range safety integration, and all mission-required licensing leading up to the launch campaign. The mission manager works closely with the customer, SpaceX technical execution staff and all associated licensing agencies in order to achieve a successful mission.

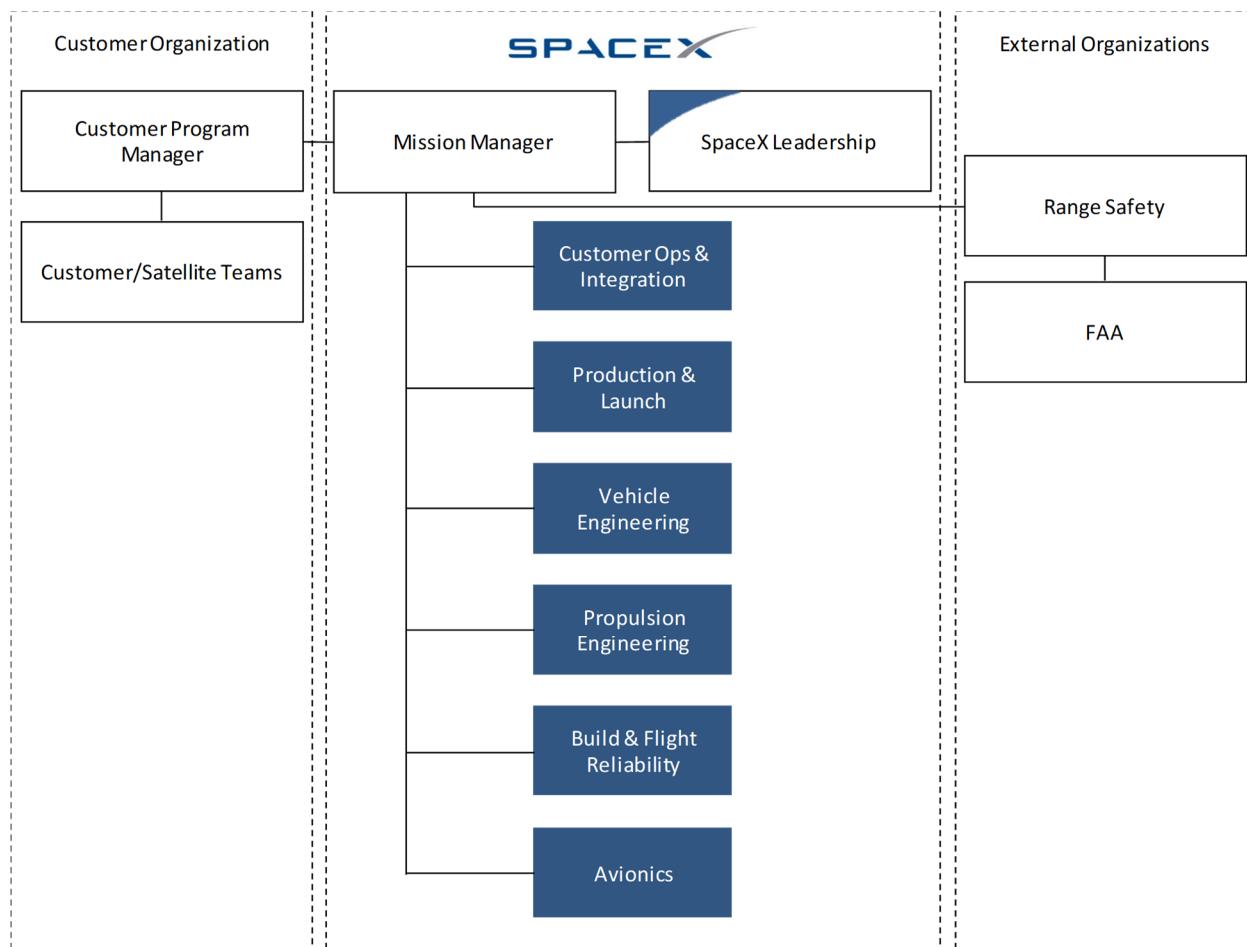


Figure 7-1: Mission management organization

The mission manager will work with the customer to create a spacecraft-to-launch vehicle interface control document (ICD)—the master document for a Falcon launch vehicle mission. Following signature approval of the ICD, SpaceX maintains configuration control of the document.



Once the payload arrives at the launch site, physical accommodation of customer hardware and associated ground support equipment is managed by the payload integration manager—part of the launch operations team. However, the mission manager continues to be the customer's primary SpaceX point of contact at the launch site and coordinates all launch site activities to ensure customer satisfaction during this critical phase.

7.3 STANDARD SERVICES

As part of any Falcon launch service, SpaceX will:

- Provide personnel, services, hardware, equipment, documentation, analyses and facilities to support mission planning, launch vehicle production and acceptance, payload integration, and launch.
- Secure required launch licensing, including Federal Aviation Administration (FAA) and State Department licenses, with input from the payload customer. (Note: Customers are responsible for any launch licenses specific to payload operation).
- Secure third-party liability insurance for the launch (Note: Customer retains responsibility for satellite insurance at all times).
- Provide all range and safety documents for the payload provider to complete (per AFSPCMAN 91-710 and 14 CFR Part 400).
- Facilitate the range and range safety integration process.
- Provide up to three sets of 37- or 61-pin satellite-to-launch vehicle in-flight disconnect electrical connectors, or integrate customer-provided mission-unique connectors.
- Provide a 1575-mm bolted interface compatible with the 62.01-in. diameter Medium Payload Class mechanical interface defined in the EELV Standard Interface Specification.
- Provide one 937-mm or 1194-mm (36.89-in. or 47.01-in.) adapter and low-shock clampband separation system, or integrate a customer-provided mission-unique separation system.
- Provide an adapter and technical support for a mechanical interface compatibility verification test at a facility of the customer's choosing.
- Provide transportation for the customer's spacecraft container and all ground support equipment (GSE) from the launch site landing location to the spacecraft processing location, if necessary.
- Provide ISO Class 8 (Class 100,000 cleanroom) integration space for the payload and GSE prior to the scheduled launch date, including facilities and support to customer's hazardous operations.
- Provide certified mechanical GSE to support physical mating of the payload to the payload adapter, perform fairing encapsulation, and integrate the encapsulated system with the launch vehicle.
- Process the launch vehicle, integrate and encapsulate the payload within the fairing, and test electrical interfaces with the payload.
- Provide conditioned air into the fairing during encapsulated ground processing.
- Provide one payload access door in the fairing at pre-designed locations.
- Produce a customer logo and install it on the launch vehicle.
- Conduct a countdown dress rehearsal for customer launch team members supported by SpaceX Mission Management.
- Launch the payload into the specified orbit within the specified environmental constraints.



- Perform 3-axis attitude control or spin-stabilized spacecraft separation.
- Perform a collision avoidance maneuver (as required).
- Verify spacecraft separation from the launch vehicle and provide an orbit injection report.
- Deliver a final post-flight report, which will include payload separation confirmation, ephemeris, payload environment, significant events and any mission-impacting anomalies.

A detailed statement of work and deliverables list, including these standard services, will be developed during contract negotiation.

7.4 SCHEDULE

Table 7-1 provides a standard launch integration schedule, starting at contract signature and proceeding through the post-flight summary. A detailed schedule, including required customer deliverables, is developed during contract negotiation.

Table 7-1: Standard launch integration schedule

| Estimated Schedule | Title | Purpose |
|--------------------------|--|--|
| L-24 months | Contract signature | Provides authority to proceed with work |
| L-22 months | Mission integration kickoff | Presents the project schedule, a summary of mission requirements and proposed preliminary design solutions for any mission-unique requirements |
| L-12 months | Completion of mission-unique design and analyses | All mission-unique design and analysis results are delivered to the Customer and the ICD is prepared for signature in advance of this milestone |
| L-3 months | Launch campaign kickoff | Verifies that all people, parts and paper are ready for the shipment of the payload to the launch site and are ready to begin launch site activities |
| L-2 days | Launch readiness review | Conducted two days prior to launch to verify readiness to proceed with the countdown and launch, including launch range and FAA concurrence |
| Separation + TBD minutes | Orbit injection report | Deliver best-estimate state vector, attitude, and attitude rate based on initial data |
| Launch + 8 weeks | Flight report | Report of the flight, environments, separation state, and a description of all mission-impacting anomalies and progress on their resolution |

7.5 CUSTOMER DELIVERABLES

Table 7-2 and Table 7-3 provide an overview of standard documentation and information required from the customer. Note: these lists are not all-inclusive but, rather, represent minimum requirements. Depending on the specific payload, additional customer requirements may apply.

**Table 7-2: Required documents and data for all payloads**

| Customer Deliverables | Description |
|---|---|
| Payload safety data | Provides detailed payload information to support SpaceX generation of range safety submittals, requirements tailoring and launch operations planning. Includes hazard analyses and reports, vehicle break-up models and detailed design/test information |
| Finite-element and CAD models | Used in coupled loads analyses and compatibility assessments. Specific format and other requirements are supplied during the mission integration process |
| Environment analysis inputs | Payload inputs for SpaceX environment analyses. Includes payload thermal model and others, as required |
| Inputs to ICD | The ICD describes all mission-specific requirements. SpaceX generates and controls the ICD, but input is required from the customer. ICD compliance information is required prior to launch |
| Environmental test statement and data | Defines the payload provider's approach to qualification and acceptance testing, including general test philosophy, testing to be performed, objectives, test configuration, methods and schedule. Actual test procedures are not required. Specific qualification and acceptance test data may be required prior to launch to demonstrate compatibility with the SpaceX launch service |
| Customer logo for launch vehicle (optional) | Proposed design should be submitted no later than five months before launch for review and approval. Following approval, SpaceX will have the logo prepared and placed on the launch vehicle |
| Launch site operations plans and procedures | Describes all aspects of mission activities to be performed at the launch site. Operating procedures must be submitted for all operations that are accomplished at the launch site. Hazardous procedures must be approved by Range Safety |
| Mission data | Information in support of reviews is required throughout the mission integration process |

Table 7-3: Additional required documents and data for non-US persons and non-US government payloads

| Customer Deliverables | Description |
|---------------------------------------|---|
| FAA payload determination information | Non-US government payloads must be reviewed by the Federal Aviation Administration to determine whether their launch would jeopardize public safety and other US interests (Title 14 CFR part 415 subpart D). Payload providers may need to provide additional information to enable SpaceX to submit an application for review |
| Launch site visitor information | To obtain the appropriate permissions, SpaceX requires information for non-US customer personnel prior to visiting the launch site |
| Launch site GSE details | Details on ground support equipment (GSE) that a non-US customer plans to bring to the launch site are required for import/export compliance |



8 OPERATIONS

Falcon launch vehicle operations are described in this section for launches from CCAFS and KSC (Section 6.1) and VAFB (Section 6.1.2). SpaceX launch operations are designed for rapid response (targeting less than one hour from vehicle rollout from the hangar to launch). Customers are strongly encouraged to develop launch readiness capabilities and timelines consistent with a rapid prelaunch concept of operations.

8.1 OVERVIEW AND SCHEDULE

The Falcon launch vehicle system and associated operations have been designed for minimal complexity and minimal time at the pad (Figure 8-1). Customer payload processing is performed in a payload processing facility (PPF). After completion of standalone spacecraft operations (typically over a 20-day period) by L-10 days, SpaceX performs the adapter mate and fairing encapsulation at the PPF. The spacecraft is then transported to the integration hangar. The launch vehicle is processed in the integration hangar at the launch complex and then loaded on the transporter-erector. The encapsulated assembly is mated to the launch vehicle at approximately L-5 days, followed by end-to-end system checkouts. Falcon 9 and Falcon Heavy systems are designed for rollout and launch on the same day, but SpaceX can perform an earlier rollout and conduct a longer countdown if required.

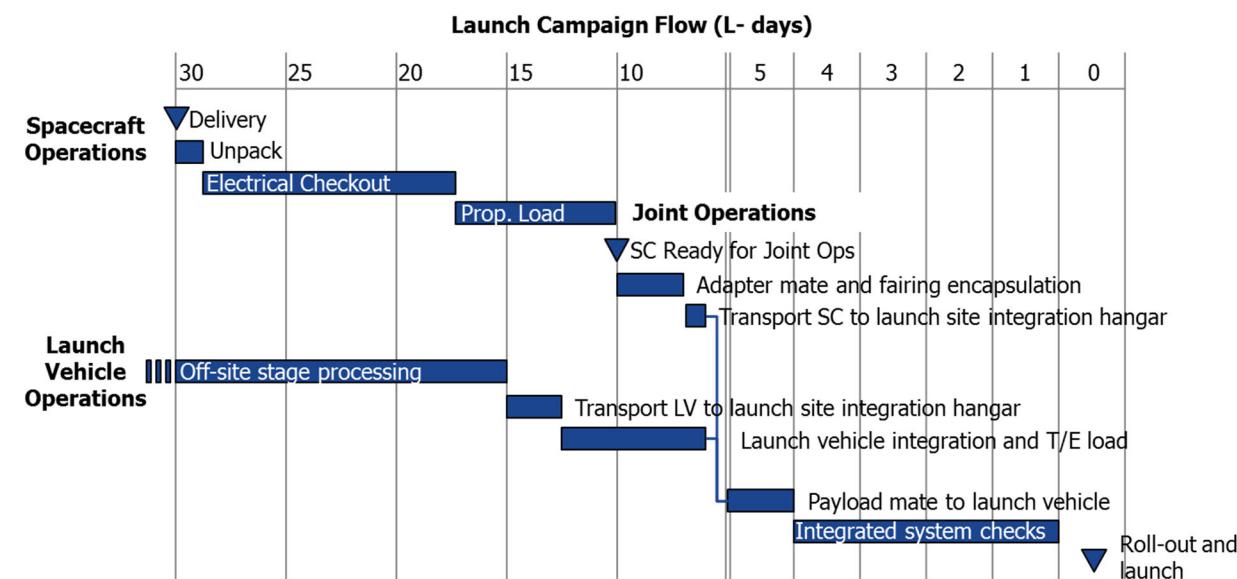


Figure 8-1: Illustrative Falcon launch vehicle processing, integration and launch operations schedule

8.2 SPACECRAFT DELIVERY AND TRANSPORTATION

For standard service processing and integration, payloads should be delivered to the launch site four weeks prior to launch. Alternative delivery schedules can be arranged as a nonstandard service.

Customers typically deliver their payloads via air or ground transport. Cape Canaveral offers two convenient landing locations for customers delivering their payloads and associated equipment via air transport: the Shuttle Landing Facility and the CCAFS Skid Strip. Vandenberg provides one landing location at the VAFB airfield, approximately 14 miles north of the launch complex. Non-US payloads coming to VAFB via the airfield must clear customs at LAX or another port of entry prior to arrival at VAFB.

As a standard service, SpaceX will arrange for the customer's spacecraft container and all associated test and support equipment to be offloaded from the plane and transported to the payload processing facility. Ground transport services can also be provided by AstroTech Space Operations or Spaceport Systems International; SpaceX can facilitate these as a nonstandard service.



8.3 SPACECRAFT PROCESSING

SpaceX provides an ISO Class 8 (Class 100,000) PPF for processing customer spacecraft, including equipment unloading, unpacking/packing, final assembly, nonhazardous flight preparations, and payload checkout. The payload processing facility is available to customers from four weeks prior to launch, with 16 hours per day standard availability and access during that period. Additional time in the payload processing facility may be available as a nonstandard service. The PPF layouts for VAFB and CCAFS are shown in Figure 8-2Error! Reference source not found., Figure 8-3, and Figure 8-4 respectively.

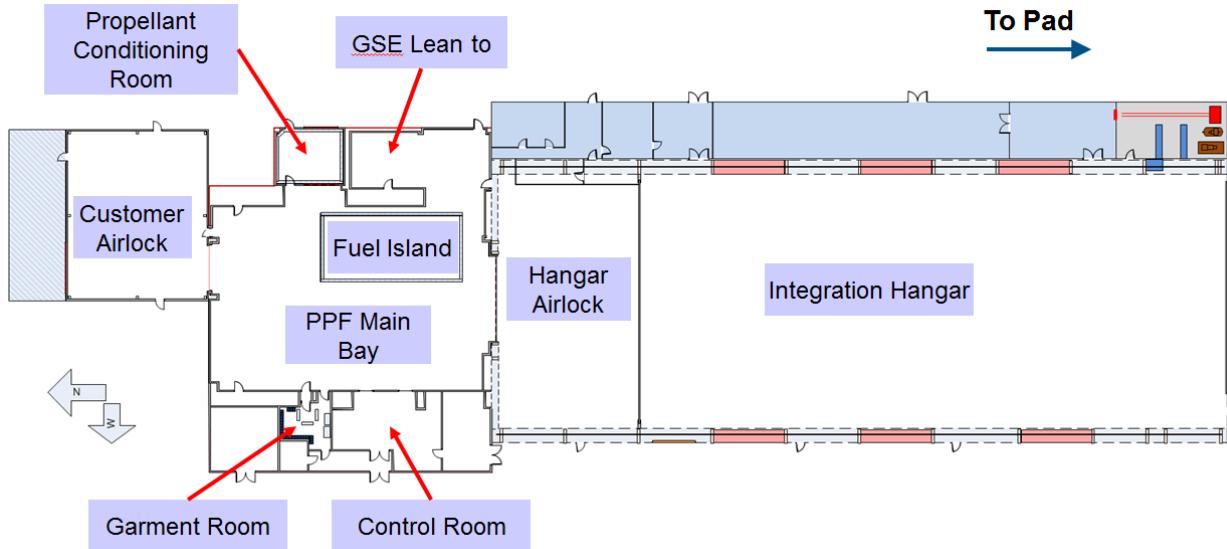
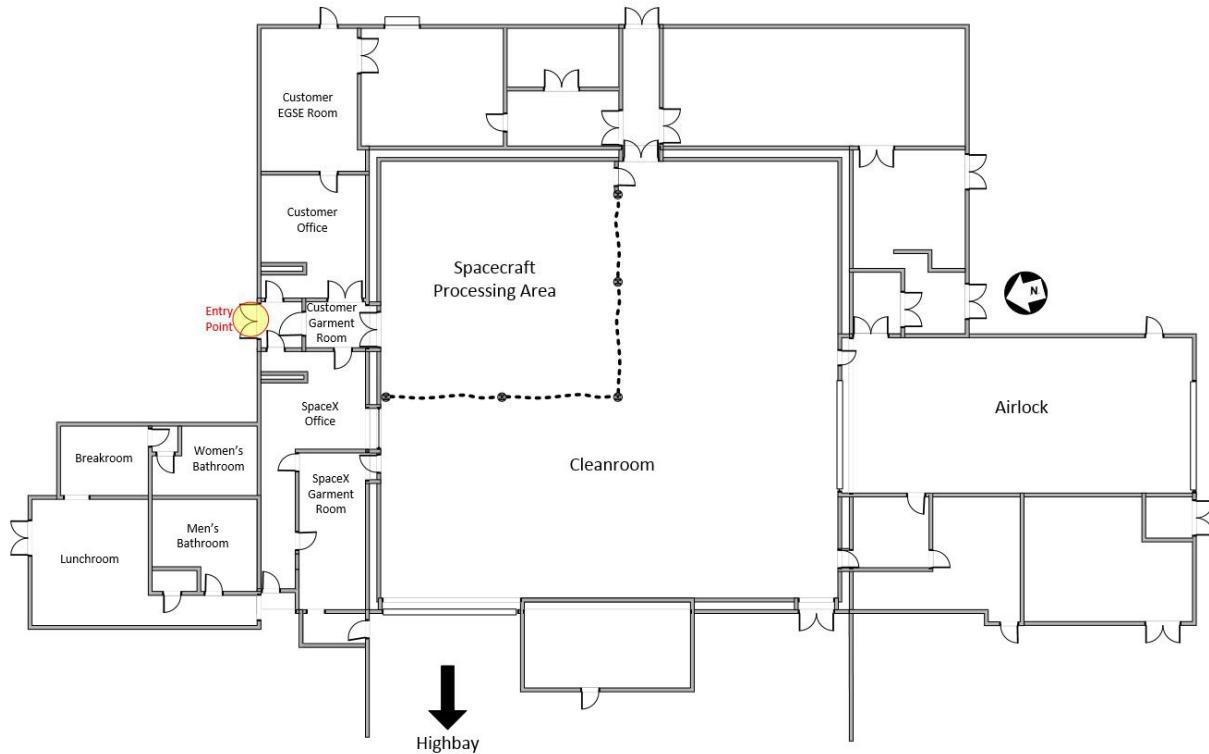
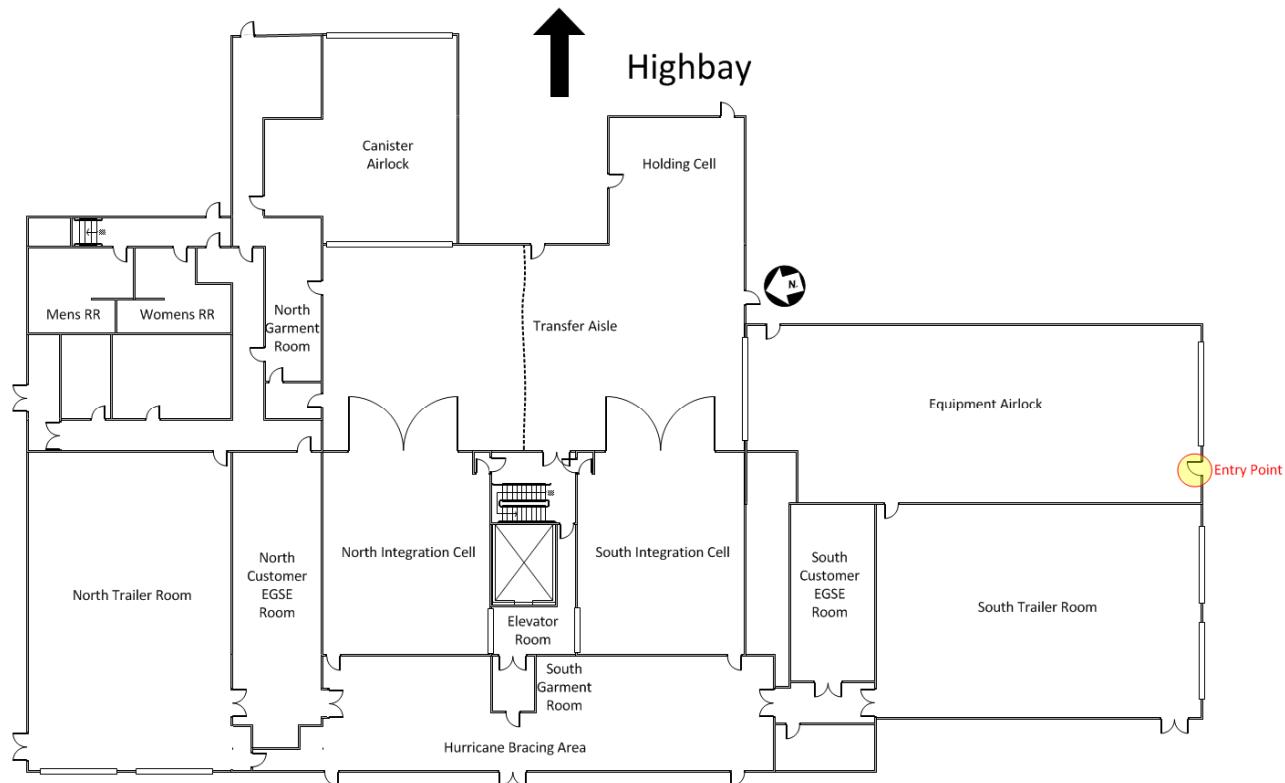


Figure 8-2: VAFB payload processing facility and integration hangar layout



**Figure 8-3: CCAFS PPF East Bay floor plan****Figure 8-4: CCAFS PPF West Bay floor plan**

Services and equipment provided for satellite processing within the PPF are outlined in Table 8-1. Additional space is provided for customer ground support equipment and operations personnel. A facility HVAC system maintains payload processing facility environments. SpaceX will continuously monitor relative humidity, temperature and cleanliness in the payload processing facility using particle counters. Cleanliness monitoring using witness plates is available as a nonstandard service. After encapsulation and prior to launch vehicle mate, SpaceX will verify purge media source and ducting cleanliness. The customer must supply any necessary cables and converters for its ground support equipment to interface with payload processing facility power. SpaceX can supply alternative power sources as a nonstandard service.

The PPF is also designed to accommodate hazardous operations such as hypergolic propellant loading and ordnance installation. Any required fueling operations will be performed by customer personnel with assistance from SpaceX personnel. All personnel must use certified SCAPE suits, pass a physical and attend SCAPE training classes.

All spacecraft processing operations within the PPF must be completed by L-10 days to allow for mating to the payload adapter, fairing encapsulation and transportation to the launch vehicle integration hangar in preparation for launch.

Table 8-1: Services and equipment for payload processing

| | CCAFS | VAFB |
|-------------------|---|---|
| Clean room | | |
| Dimensions | No less than 29 m x 16.5 m floor size (95 ft x 54 ft) | No less than 29.2 m x 20.7 m floor size (95.8 ft x 67.9 ft) |
| Exterior door | No less than 7.62 m high x 15.24 m wide (25 ft x 50 ft) | No less than 6.01 m high x 6.01 m wide (20 ft x 20 ft) |



| | | CCAFS | VAFB |
|------------------------------|---|--|------|
| Temp/Clean | See Table 4-2 (PPF facility HVAC) | See Table 4-2 (PPF facility HVAC) | |
| Overhead crane | | | |
| Quantity | 2 | 2 | |
| Hook height | 18 m (59 ft) | 18.3 m (60 ft) | |
| Capacity | Crane 1: 27,215 kg (30 ton) Crane 2: 13,607 kg (15 ton) both certified for hypergolic lifting | North Crane: 27,215 kg (30 T) South Crane: 18,143 kg (20 T) | |
| Hoist Speed (min/max) | 6.1 cm/609 min (0.2 ft /20 min), per crane | 6.1 cm/609 min (0.2 ft/20 min), per crane | |
| Operation modes | Independent | Independent or synchronized | |
| Access equipment | | | |
| | 45-ft boom lifts, pallet jack, lifting hardware, ladders, movable platforms | Pallet jack, lifting hardware, ladders, movable platforms | |
| Electrical | | | |
| 60 Hz AC | 120 V 1-phase, 120/208 V 3-phase, and 480 V 3-phase service | 120 V 1-phase and 120/208 V 3-phase service | |
| 50 Hz AC | 220/380V – WYE, 3-Phase, 5-Wire with UPS back up | 220/380V- WYE, 3-Phase, 4-Wire with UPS backup | |
| Grounding | Per MIL-STD-1542 | Per MIL-STD-1542 | |
| GN₂ supply | | | |
| Quality | MIL-PRF-27401, Grade B | MIL-PRF-27401, Grade B | |
| Pressure | 34,473 kPa (5,000 psi) | 34,473 kPa (5,000 psi) | |
| Flow rate | 1699.2 Nm ³ /hr (1,000 scfm) | 1699.2 Nm ³ /hr (1,000 scfm) | |
| Helium supply | | | |
| Quality | MIL-PRF-27407, Grade A | MIL-PRF-27407B, Type 1, Grade B | |
| Pressure | 39,300 kPa (5,700 psi) | 41,368 kPa (6,000 psi) | |
| Flow rate | 1699.2 Nm ³ /hr (1,000 scfm) | 1699.2 Nm ³ /hr(1,000 scfm) | |
| Compressed air supply | | | |
| Pressure | 758 kPa (110 psi) | 862 kPa (125 psi) | |
| Communications | | | |
| Administrative phone | VOIP phones | VOIP phones | |
| Paging system | Yes | Yes | |
| Area warning system | Yes | Yes | |
| Security | | | |
| Locking facility | Yes | Yes | |
| Launch site badges | Yes | Yes | |
| Video monitoring | Yes | Yes | |

As an alternative nonstandard service, SpaceX can arrange the use of commercial processing facilities near CCAFS or VAFB for payload processing. If a payload is processed at a facility other than the SpaceX-provided payload processing facility, SpaceX can provide environmentally controlled transportation from that facility to the launch vehicle integration hangar.

8.4 JOINT OPERATIONS AND INTEGRATION

Joint operations begin ten days before launch. Payload attachment to the payload attach fitting and fairing encapsulation are performed by SpaceX within the payload processing facility (Figure 8-5). Fairing encapsulation is



performed in the vertical orientation. Transportation is performed in the vertical orientation, and environmental control is provided throughout the transportation activity. Once at the launch vehicle integration hangar, the encapsulated assembly is rotated to horizontal and mated with the launch vehicle already positioned on its transporter-erector.

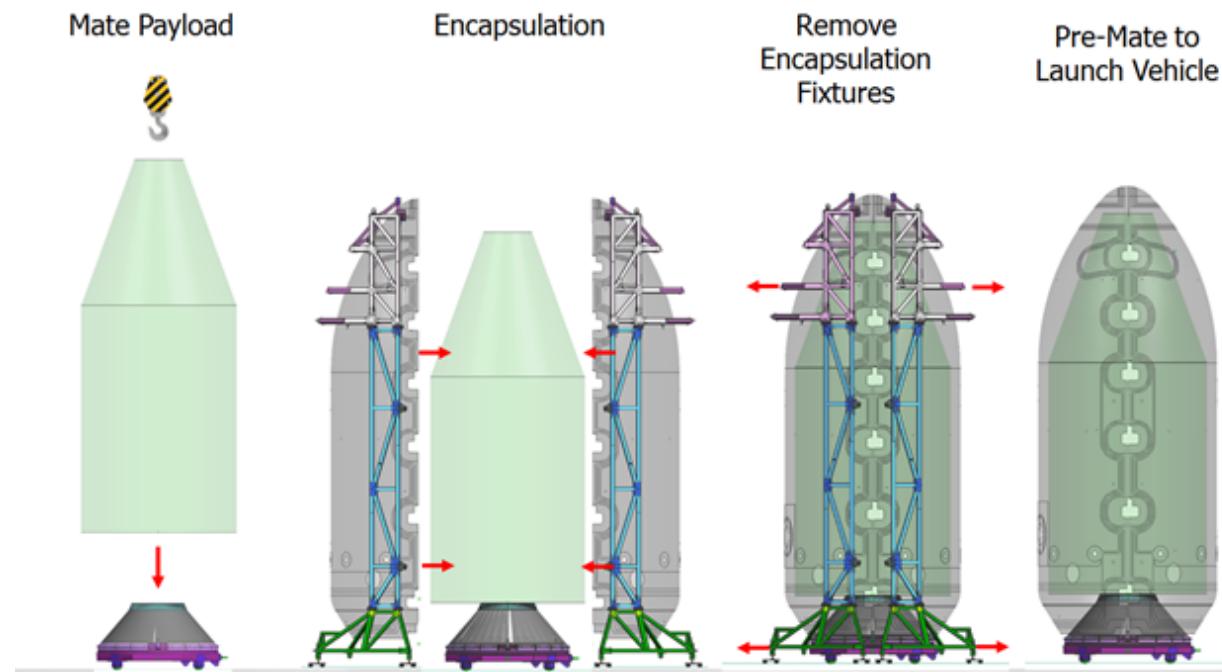


Figure 8-5: Payload encapsulation and integration sequence

Once the encapsulated assembly is mated to the launch vehicle, the hangar facility HVAC system is connected via a fairing air conditioning duct to maintain environmental control inside the fairing. The payload is then reconnected to electrical ground support equipment (if required) and electrical interfaces are verified. At this point, the integrated launch vehicle is ready for rollout and launch (Figure 8-6).



Figure 8-6: Integrated Falcon 9 on the transporter-erector within the integration hangar and rolling out



8.5 LAUNCH OPERATIONS

8.5.1 ORGANIZATION

The main decision-making roles and responsibilities for launch operations are shown in Table 8-2. Note that this list is not inclusive of all stations participating in the launch, but, rather, is limited to those that have direct input in the decision-making process.

Table 8-2: Launch control organization

| Position | Abbrev. | Organization |
|--|--------------|--------------|
| Chief Engineer | CE | SpaceX |
| Mission manager | MM | SpaceX |
| Launch director | LD | SpaceX |
| Missile flight control officer, or flight safety officer | MFCO, or FSO | Launch Range |
| Operations safety manager, or ground safety officer | OSM, or GSO | Launch Range |

The launch control organization and its lines of decision-making are shown in Figure 8-7. The details of the launch control organization are somewhat dependent on the mission and customer. The payload manager, or a payload manager representative, will sit at the payload station in the SpaceX launch control center alongside the SpaceX mission manager.

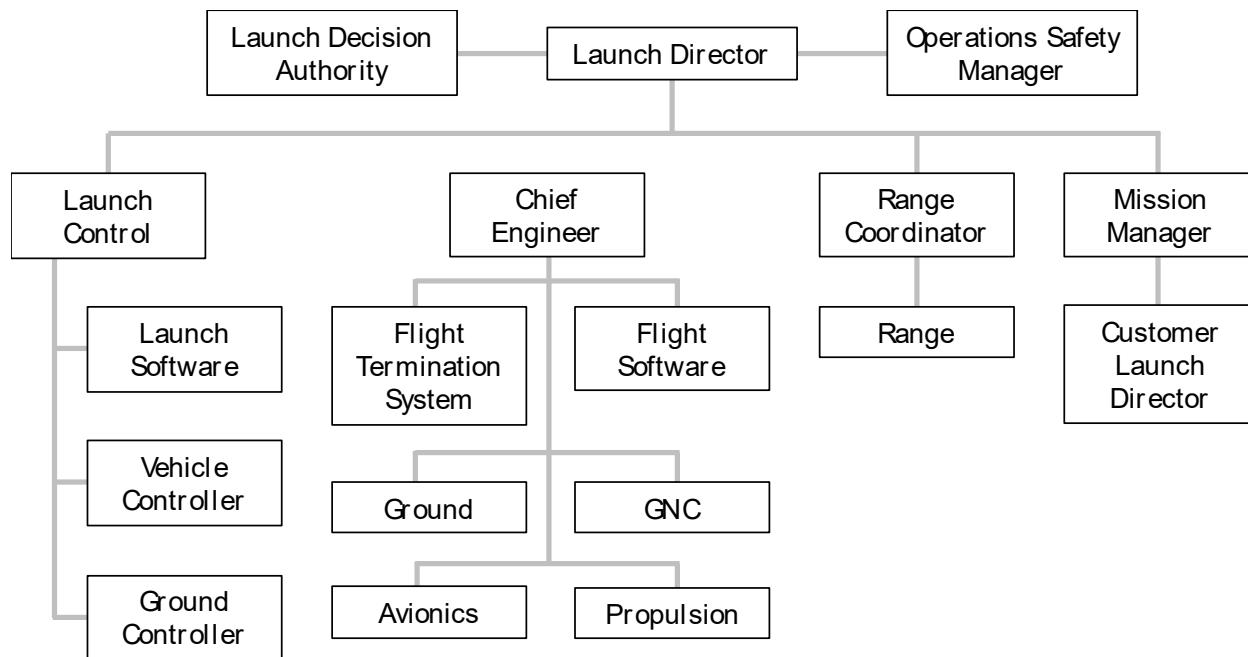


Figure 8-7: Launch control organization

8.5.2 SPACECRAFT CONTROL CENTER

SpaceX provides a spacecraft control center for remote payload command and control operations during the launch countdown. Customer EGSE and spacecraft personnel will be located within the spacecraft control center during launch. The spacecraft control center includes full fiber-optic voice, video and Internet connectivity to the launch site, SpaceX Launch Control (Section 8.5.3), and other range facilities.



8.5.3 LAUNCH CONTROL

The SpaceX console design is modular, expandable and completely modern (Figure 8-8). SpaceX uses standard computer and display systems with software designed for industrial system control. Consoles also include voice communications capabilities, including voice nets, voice-over Internet protocol (IP) integration with remote sites, and IP phones. Video viewing and control are provided using the video-over-IP systems.



Figure 8-8: SpaceX launch control at CCAFS (left) and VAFB (right)

8.5.4 ROLLOUT, ERECTION AND PAD OPERATIONS

After readiness is verified, the integrated Falcon vehicle may be rolled out from the hangar to the pad on its transporter-erector (Figure 8-9). Once the vehicle is at the pad, the payload air conditioning system is reconnected, which helps maintain environmental control through liftoff. Electrical connectivity is provided via ground cables (Section 5.2.1). The vehicle will typically be erected only once, although the capability exists to easily return it to a horizontal orientation if necessary.



Figure 8-9: Launch vehicle rollout and erection

Customer access to the payload while the vehicle is outside of the hangar requires special accommodations and is a nonstandard service. Payload access is not available while the launch vehicle is vertical.



8.5.5 COUNTDOWN

Falcon launch vehicles are designed to support a countdown duration as short as one hour. Early in the countdown, the vehicle performs LOX, RP-1 and pressurant loading, and it executes a series of vehicle and range checkouts. The transporter-erector strongback is retracted just prior to launch. Automated software sequencers control all critical Falcon vehicle functions during terminal countdown. Final launch activities include verifying flight termination system status, transferring to internal power, and activating the transmitters. Engine ignition occurs shortly before liftoff, while the vehicle is held down at the base via hydraulic clamps. The flight computer evaluates engine ignition and full-power performance during the prelaunch hold-down, and if nominal criteria are satisfied, the hydraulic release system is activated at T-0. A safe shutdown is executed should any off-nominal condition be detected.

8.5.6 RECYCLE AND SCRUB

Falcon launch vehicle systems and operations have been designed to enable recycle operations when appropriate. Although every recycle event and launch window requirement is unique, Falcon vehicles offer the general capability to perform multiple recycles within a given launch window, eliminating unnecessary launch delays.

In the event of a launch scrub, the transporter-erector and launch vehicle will stay vertical. Remaining on the pad provides uninterrupted payload-to-EGSE connectivity through the T-0 umbilical, eliminating the need to relocate EGSE from the instrumentation bay to the hangar after a scrub. However, for any long-duration launch postponements, SpaceX will return the vehicle on the transporter-erector to the hangar.

8.6 FLIGHT OPERATIONS

8.6.1 LIFTOFF AND ASCENT

First-stage powered flight lasts approximately three minutes, with commanded shutdown of the nine first-stage engines based on remaining propellant levels. The second stage burns an additional five to six minutes to reach initial orbit, with deployment of the fairing typically taking place early in second-stage powered flight. Subsequent operations are unique to each mission but may include multiple coast-and-restart phases as well as multiple spacecraft separation events.

8.6.2 SPACECRAFT SEPARATION

After reaching the spacecraft injection orbit and attitude, the Falcon vehicle issues a spacecraft separation command, providing the electrical impulses necessary to initiate spacecraft separation. Indication of separation is available in second-stage telemetry.

8.6.3 CONTAMINATION AND COLLISION AVOIDANCE

If a contamination and collision avoidance maneuver is necessary, the second stage performs the maneuver shortly after separation. A contamination and collision avoidance maneuver is provided as a standard service for individual primary payloads. For multi-manifested and secondary payloads, please contact SpaceX regarding collision avoidance requirements.

8.6.4 POST LAUNCH REPORTS

SpaceX will provide a quick-look orbit injection report to the customer shortly after spacecraft separation, including a best-estimate spacecraft separation state vector. A final, detailed post-flight report is provided within eight weeks of launch.

8.6.5 DISPOSAL

SpaceX makes every effort to mitigate space debris by responsibly passivating and disposing of hardware on orbit. Customer-specific requirements on disposal may impose modest reductions to the performance specifications indicated in Section 3.2.



8.7 SAMPLE MISSION PROFILE

Sample mission profiles for Falcon 9 and Falcon Heavy are shown in Figure 8-10 and Figure 8-11, and sample Falcon 9 timelines for a GTO mission and LEO mission are shown in Table 8-3 and Table 8-4. Note: each flight profile is unique and will differ from these examples.

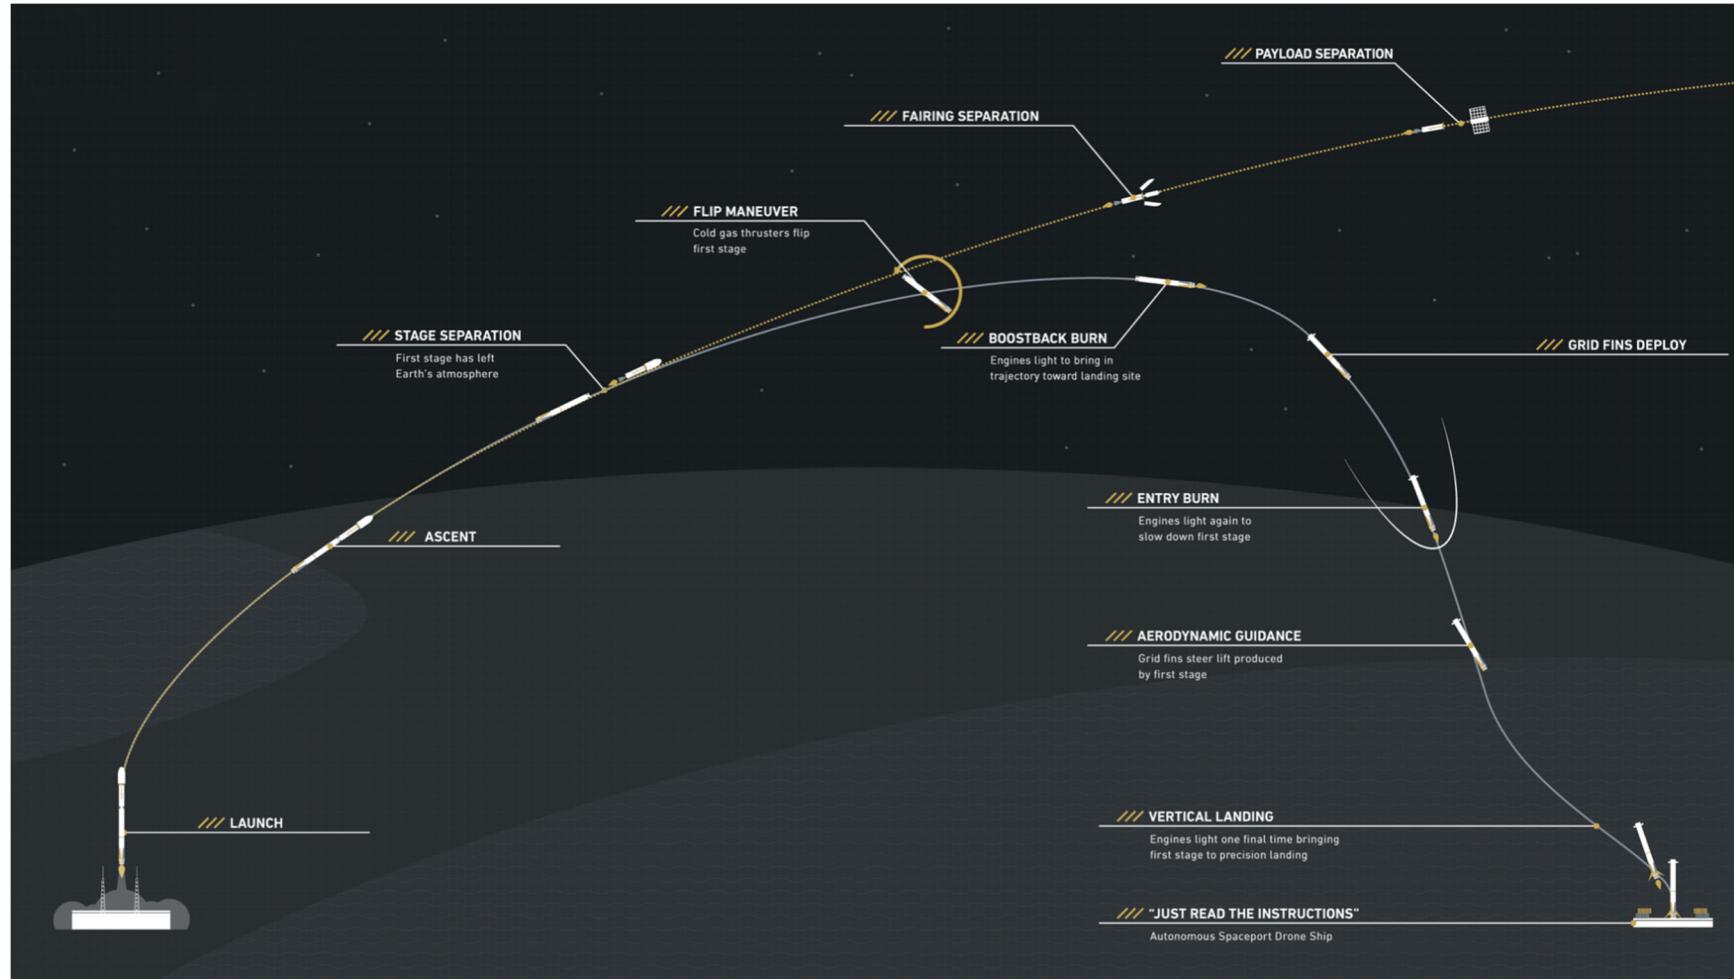


Figure 8-10: Falcon 9 sample mission profile

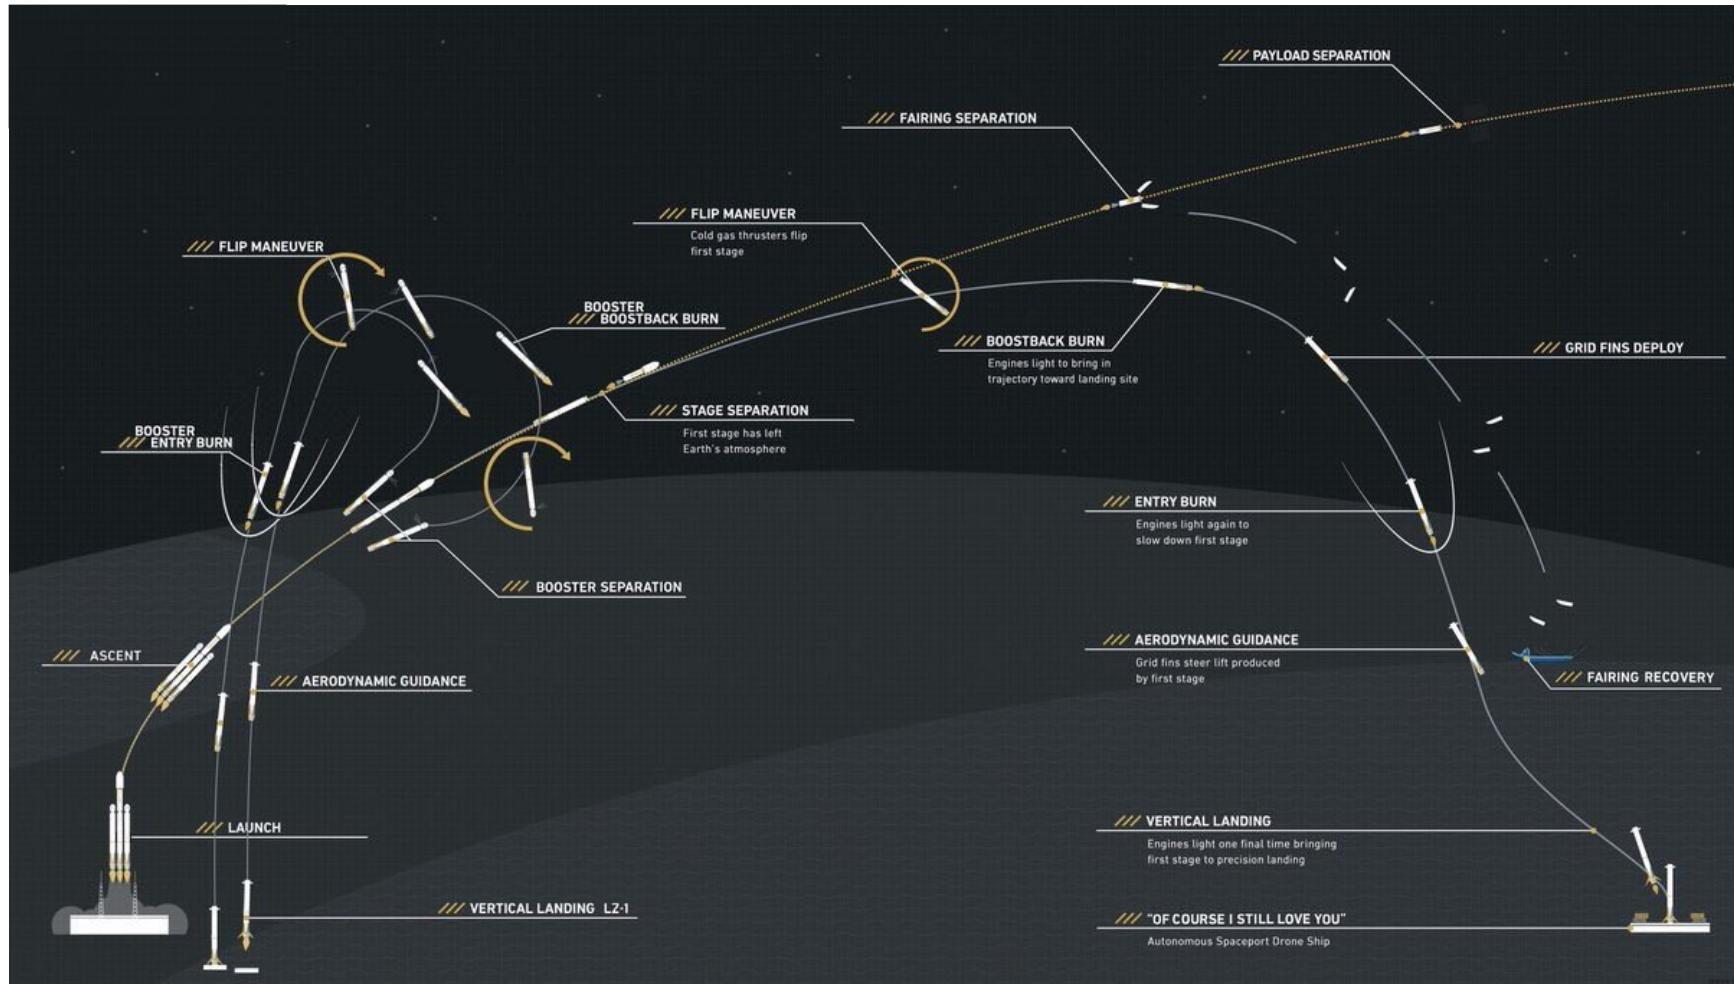


Figure 8-11: Falcon Heavy sample mission profile

**Table 8-3: Falcon 9 sample flight timeline—GTO mission**

| Mission Elapsed Time | Event |
|----------------------|----------------------------------|
| T - 3 s | Engine start sequence |
| T + 0 | Liftoff |
| T + 74 s | Maximum dynamic pressure (max Q) |
| T + 147 s | Main engine cutoff (MECO) |
| T + 151 s | Stage separation |
| T + 158 s | Second engine start-1 (SES-1) |
| T + 222 s | Fairing deploy |
| T + 484 s | Second engine cutoff 1 (SECO-1) |
| T + 1636 s | Second engine start-2 (SES-2) |
| T + 1696 s | Second engine cutoff-2 (SECO-2) |
| T + 1996 s | Spacecraft separation |

Table 8-4: Falcon 9 sample flight timeline—LEO mission

| Mission Elapsed Time | Event |
|----------------------|----------------------------------|
| T - 3 s | Engine start sequence |
| T + 0 | Liftoff |
| T + 67 s | Maximum dynamic pressure (max Q) |
| T + 145 s | Main engine cutoff (MECO) |
| T + 148 s | Stage separation |
| T + 156 s | Second-engine start-1 (SES-1) |
| T + 195 s | Fairing deploy |
| T + 514 s | Second-engine cutoff-1 (SECO-1) |
| T + 3086 s | Second engine start-2 (SES-2) |
| T + 3090 s | Second engine cutoff-2 (SECO-2) |
| T + 3390 s | Spacecraft separation |



9 SAFETY

9.1 SAFETY REQUIREMENTS

Falcon customers are required to meet AFSPCMAN 91-710 Range User's Manual and FAA 14 CFR Part 400 requirements in the design and operation of their flight and ground systems. These requirements encompass mechanical design, electrical design, fluid and pressurant systems, lifting and handling systems, ordnance and RF systems, ground support equipment, and other design and operational features. SpaceX will serve as the safety liaison between the customer and the range.

9.2 HAZARDOUS SYSTEMS AND OPERATIONS

Most ranges consider hazardous systems and operations to include ordnance operations, pressurized systems that operate below a 4-to-1 safety factor, lifting operations, operations or systems that include toxic or hazardous materials, high-power RF systems and laser systems, and a variety of other systems and operations. The details of the system design and its operation will determine whether the system or related operations are considered hazardous. Typically, additional precautions are required for operating systems that are considered hazardous, such as redundant valving between pressurant and propellant. Additional precautions will be determined during the safety approval process with SpaceX and the launch range. All hazardous operations require procedures that are approved by both SpaceX and the launch range prior to execution. Ordnance operations, in particular, require coordination to provide reduced RF environments, cleared areas, safety support and other requirements.

9.3 WAIVERS

For systems or operations that do not meet safety requirements but are believed to be acceptable for ground operations and launch, a waiver is typically produced for approval by the launch range safety authority. Waivers require considerable coordination and are considered a last resort; they should not be considered a standard practice.



10 CONTACT INFORMATION

If you are considering SpaceX launch services, please contact the SpaceX Sales department:

SpaceX
Attention: Sales
Rocket Rd.
Hawthorne, CA 90250
sales@spacex.com



11 QUICK REFERENCE

11.1 LIST OF FIGURES

| | |
|--|----|
| Figure 1-1: SpaceX vehicles are designed for high cross-platform commonality..... | 2 |
| Figure 2-1: Falcon 9 overview | 5 |
| Figure 2-2: The Falcon Heavy demonstration mission launched from KSC on February 6, 2018..... | 6 |
| Figure 2-3: Falcon Heavy first-stage engine layout | 7 |
| Figure 2-4: Falcon vehicle coordinate frame | 9 |
| Figure 3-1: SpaceX payload attach fitting | 11 |
| Figure 3-2: Allowable center-of-gravity height above the 1575-mm plane | 12 |
| Figure 4-1: Falcon 9 and Falcon Heavy payload design load factors for "standard" mass (over 4,000 lb)..... | 16 |
| Figure 4-2: Falcon 9 payload design load factors, light mass (under 4,000 lb)..... | 17 |
| Figure 4-3: Maximum axial equivalent sine environment for Falcon 9 and Falcon Heavy | 18 |
| Figure 4-4: Maximum lateral equivalent sine environment for Falcon 9 and Falcon Heavy | 19 |
| Figure 4-5: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor, 131.4 dB OASPL (Cape Canaveral) and 131.6 dB OASPL (Vandenberg) in third octave | 20 |
| Figure 4-6: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor, 131.4 dB OASPL (Cape Canaveral) and 131.6 OASPL (Vandenberg) in full octave | 21 |
| Figure 4-7: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (third octave)..... | 23 |
| Figure 4-8: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (full octave)..... | 24 |
| Figure 4-9: Falcon 9 random vibration maximum predicted environment (P95/50) at top of PAF [7.25 GRMS] | 26 |
| Figure 4-10: Falcon Heavy random vibration maximum predicted environment (P95/50) at top of PAF [7.63 GRMS] | 27 |
| Figure 4-11: Falcon 9 worst-case radiated environment..... | 29 |
| Figure 4-12: Falcon Heavy worst-case radiated environment | 30 |
| Figure 4-13: Maximum spacecraft emissions..... | 31 |
| Figure 4-14: Fairing avionics emissions envelope..... | 32 |
| Figure 4-15: Launch site emissions..... | 33 |
| Figure 4-16: Maximum payload fairing spot temperature seen by payload..... | 34 |
| Figure 5-1: Falcon fairing and payload dynamic envelope, meters (feet) | 37 |
| Figure 5-2: On-pad electrical interfaces | 39 |
| Figure 6-1: Space Launch Complex 40 at Cape Canaveral Air Force Station, Florida..... | 41 |
| Figure 6-2: LC-39A at Kennedy Space Center, Florida | 42 |
| Figure 6-3: Hangar AO | 43 |
| Figure 6-4: Layout of customer office space in Hangar AO..... | 43 |
| Figure 6-5: Space Launch Complex 4 East at Vandenberg Air Force Base, California..... | 44 |
| Figure 6-6: Vandenberg customer office space layout..... | 45 |
| Figure 6-7: Pad customer room | 46 |
| Figure 6-8: Customer control rooms at SpaceX Launch Control..... | 46 |
| Figure 6-9: SpaceX's headquarters in Hawthorne, California..... | 47 |
| Figure 6-10: SpaceX Texas test facility and test operations | 47 |
| Figure 7-1: Mission management organization | 48 |
| Figure 8-1: Illustrative Falcon launch vehicle processing, integration and launch operations schedule | 52 |
| Figure 8-2: VAFB payload processing facility and integration hangar layout | 53 |
| Figure 8-3: CCAFS PPF East Bay floor plan | 54 |
| Figure 8-4: CCAFS PPF West Bay floor plan | 54 |



| | |
|--|----|
| Figure 8-5: Payload encapsulation and integration sequence | 56 |
| Figure 8-6: Integrated Falcon 9 on the transporter-erector within the integration hangar and rolling out | 56 |
| Figure 8-7: Launch control organization..... | 57 |
| Figure 8-8: SpaceX launch control at CCAFS (left) and VAFB (right)..... | 58 |
| Figure 8-9: Launch vehicle rollout and erection | 58 |
| Figure 8-10: Falcon 9 sample mission profile | 60 |
| Figure 8-11: Falcon Heavy sample mission profile | 61 |

11.2 LIST OF TABLES

| | |
|--|----|
| Table 1-1: Key safety features of Falcon launch vehicles..... | 3 |
| Table 2-1: Falcon dimensions and characteristics..... | 7 |
| Table 3-1: Falcon 9 and Falcon Heavy launch services | 10 |
| Table 4-1: Recommended quasi-static load factors for transportation..... | 14 |
| Table 4-2: Temperature and cleanliness environments | 14 |
| Table 4-3: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor | 20 |
| Table 4-4: Falcon 9 maximum predicted acoustic environment (P95/50), 60% fill-factor | 22 |
| Table 4-5: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (third octave)..... | 23 |
| Table 4-6: Falcon Heavy maximum predicted acoustic environment (P95/50), 60% fill-factor, 140.3 dB OASPL (full octave)..... | 25 |
| Table 4-7: Payload adapter-induced shock at the spacecraft separation plane (P95/50) | 25 |
| Table 4-8: Falcon 9 random vibration maximum predicted environment (P95/50) at top of PAF [7.25 GRMS]..... | 26 |
| Table 4-9: Falcon Heavy random vibration maximum predicted environment (P95/50) at top of PAF [7.63 GRMS]..... | 27 |
| Table 4-10: Falcon 9 RF systems characteristics | 28 |
| Table 4-11: Falcon Heavy RF systems characteristics | 28 |
| Table 4-12: Falcon 9 worst-case radiated environment..... | 29 |
| Table 4-13: Falcon Heavy worst-case radiated environment..... | 30 |
| Table 4-14: Maximum spacecraft emissions | 31 |
| Table 4-15: Fairing avionics emissions envelope | 32 |
| Table 4-16: Launch site emissions | 33 |
| Table 4-17: Spacecraft environmental compatibility verification example | 35 |
| Table 5-1: Payload electrical interface connectivity | 38 |
| Table 5-2: Maximum expected cable lengths between payload racks/EGSE and the separation plane..... | 39 |
| Table 7-1: Standard launch integration schedule | 50 |
| Table 7-2: Required documents and data for all payloads | 51 |
| Table 7-3: Additional required documents and data for non-US persons and non-US government payloads..... | 51 |
| Table 8-1: Services and equipment for payload processing..... | 54 |
| Table 8-2: Launch control organization | 57 |
| Table 8-3: Falcon 9 sample flight timeline—GTO mission | 62 |
| Table 8-4: Falcon 9 sample flight timeline—LEO mission | 62 |

11.3 LIST OF ACRONYMS

| | |
|----------------|--------------------------------|
| ACS | attitude control system |
| AFSPCMAN | Air Force Space Command Manual |
| AWG | American wire gauge |
| BPSK | binary phase shift keying |



| | |
|-----------------|---|
| C3 | characteristic energy (escape energy) |
| CAD | computer-aided design |
| CCAFS | Cape Canaveral Air Force Station |
| CRS | Commercial Resupply Services |
| DSSS | direct-sequence spread spectrum |
| EELV | evolved expendable launch vehicle |
| EGSE | electrical ground support equipment |
| ESPA | EELV secondary payload adapter |
| FAA | Federal Aviation Administration |
| FM | frequency modulation |
| GN ₂ | gaseous nitrogen |
| GPS | Global Positioning System |
| GSE | ground support equipment |
| GSO | geosynchronous orbit |
| GTO | geosynchronous transfer orbit |
| HEO | highly elliptical orbit |
| HITL | Hardware-in-the-loop |
| HVAC | heating, ventilation and air conditioning |
| ICD | interface control document |
| IP | Internet protocol |
| IRIG | inter-range instrumentation group |
| ISS | International Space Station |
| LAX | Los Angeles International Airport |
| LEO | low Earth orbit |
| LOX | liquid oxygen |
| LV | launch vehicle |
| LVLH | local vertical/local horizontal |
| M1D | Merlin 1D engine |
| Max Q | maximum dynamic pressure |
| MECO | main engine cut-off |
| MPE | maximum predicted environment |
| MVac | Merlin Vacuum |
| NASA | National Aeronautics and Space Administration |



| | |
|---------|--|
| OASPL | overall sound pressure level |
| PAF | payload attach fitting |
| PCM | pulse code modulation |
| PDR | preliminary design review |
| PPF | payload processing facility |
| PSK | phase shift keying |
| Q | dynamic pressure |
| RF | radio frequency |
| RP-1 | rocket propellant-1 (rocket-grade kerosene) |
| SBA | Santa Barbara Airport |
| SC | spacecraft |
| SCAPE | self-contained atmospheric protective ensemble |
| SECO | second-engine cut-off |
| SES | second-engine start |
| SLC | space launch complex |
| SpaceX | Space Exploration Technologies Corp. |
| SPL | sound pressure level |
| SRS | shock response spectrum |
| SSO | sun-synchronous orbit |
| TE | transporter-erector |
| TEA-TEB | triethylaluminum-triethylborane |
| US | United States |
| VAFB | Vandenberg Air Force Base |

11.4 CHANGE LOG

| Date | Update |
|------------|---|
| 10/21/2015 | Original Release |
| 5/31/2016 | Minor updates and clarifications |
| 1/14/2019 | Falcon 9 Block 5 and Falcon Heavy updates |