
## D21m HD Mic/Line Input card

## STUDER Introduces New MIC Preamp Card For HD Audio

Studer has introduced a new version of the mic input card for the D21m I/O system, which can be used on any Studer Vista or OnAir console or Router product.

Noise and bandwidth are just as important for HD audio as they are for HD video, and the new card is designed to be a perfect partner for HD Audio broadcast.

The card features four transformer balanced mic inputs and A/D converters as well as integral split outputs that allow the card to feed a second console or recorder at analogue line levels, meaning a single stagebox can directly feed a second device in addition to the digital console.

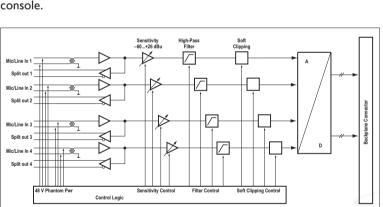

The HD Mic Input card has been designed with only with the highest specifications as a target. It provides an ultra-wide bandwidth and very low noise floor, with all the classic Studer sound that you would expect from such a device.



input scrisitivity	00 to · 20 dba
	(for 0 dBFS)
Input impedance	2.2 kΩ
	0 dB
	100 Ω
	124 dBu
1	(Ri 200 Ω, max. gain)
Crosstalk (1 kHz)	< – I I 0 dB
	30 Hz20 kHz)–0.2 dB
	< –97 dBFS
	(IkHz, -I dBFS, min. gain)
THD&N	< -III dBFS
(30 H	z20 kHz, -30 dBFS, min. gain)
THD&N	< -107 dBFS
	(input level 6 dBu, min. gain)
CMRR	> 60 dB
(3	0 Hz20 kHz, all gain settings)
Low-cut filter	75 Hz / 12 dB/oct
Input delay38 sa	mples (0.79 ms @ 48 kHz)
	(local)
Input delay45 sa	mples (0.94 ms @ 48 kHz)
	(remote)
	,



BD10.266050

STUDER.

by HARMAN

Studer Professional Audio GmbH, Riedthofstrasse 214, CH-8105 Regensdorf-Zurich Switzerland Phone +41 44 870 75 11, Fax +41 44 870 71 34 www.studer.ch

Studer USA, 8500 Balboa Boulevard, Northridge, CA 91329, USA

Phone +I-818-920-3212, Fax +I-818-920-3208

Studer reserves the right to improve or otherwise alter any information supplied in this document or any other documentation supplied hereafter. E&OE 05/