




KONICA MINOLTA

bizhub c368/C308/C258

Spec Sheet

System

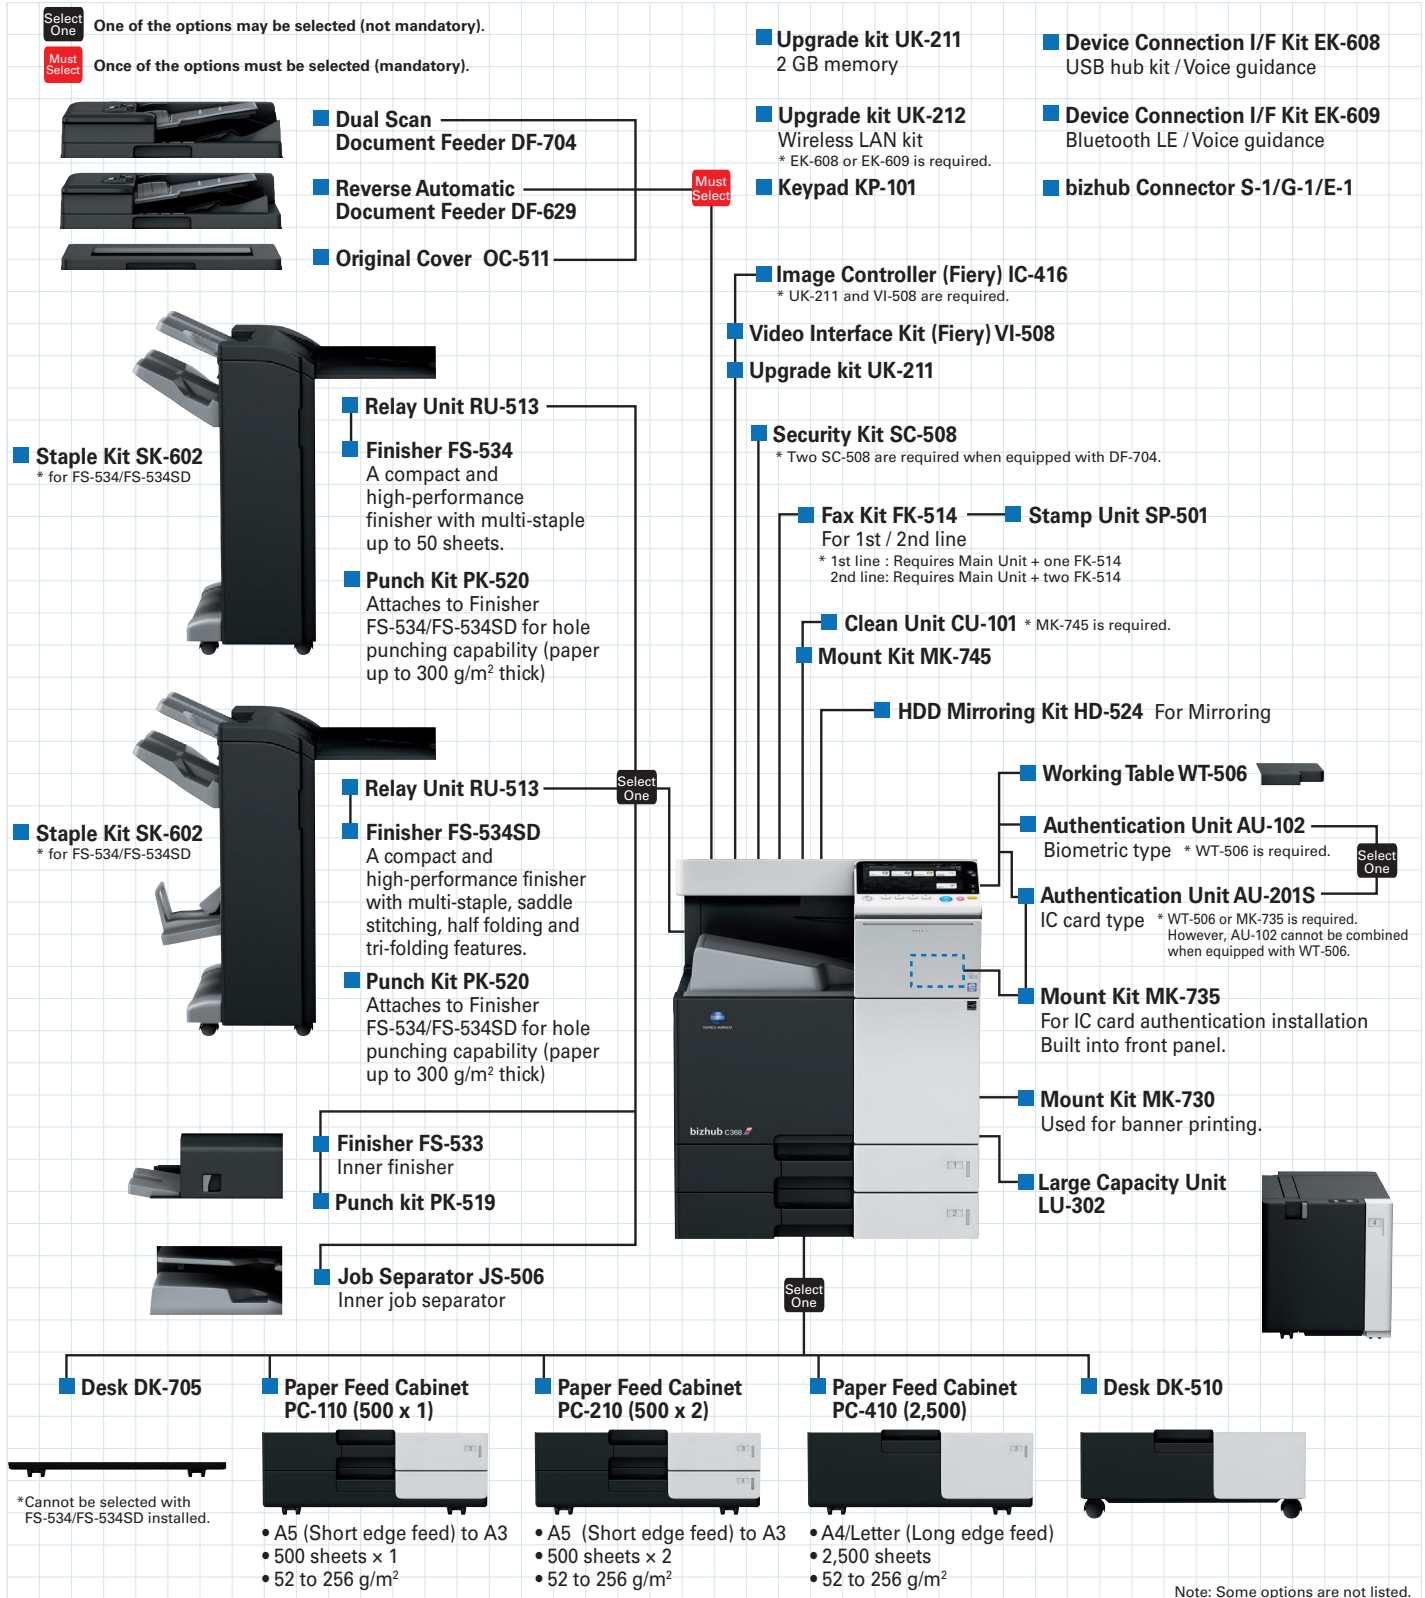

Giving Shape to Ideas

Specfications

bizhub C368/C308/C258 General Specifications

		bizhub C368	bizhub C308	bizhub C258
Type		Desktop Full Colour Printer / Copier / Scanner		
Colour Support		Full colour		
Copy Resolution	Scan	Main: 600 dpi × Sub: 600 dpi		
	Print	1,800 dpi (equivalent) × 600 dpi		
Gradation		256		
Memory Capacity (Std./Max.)		2 GB/4 GB		
HDD		250 GB		
Original Type		Sheets, Books, Objects		
Max. Original Size		A3 (11" × 17")		
Output Size		Main unit: SRA3 ^{*1} , A3 to A5, 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 8-1/2" × 11", 5-1/2" × 8-1/2", 8" × 13" ^{*,} 16K, 8K Bypass Tray: SRA3, A3 to A5, B6 ^{*,} A6 ^{*,} 12" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 5-1/2" × 8-1/2", 8" × 13" ^{*,} 16K, 8K, Postcard (A6 (4" × 6" Card)), Envelope ^{*,} Label sheet, Tab paper, Banner paper (Width: 210 mm to 297 mm (8-1/4" to 11-11/16"), Length: 457 mm to 1,200 mm (18" to 47-1/4")) ^{*,}		
Image Loss		Max. 4.2mm or less for top edge (5 mm for thin paper), Max. 3.0mm or less for bottom edge, Max. 3.0mm or less for right/left edges ^{*,} A loss of 4.2 mm each during printing.		
Warm-Up Time ^{*,} (23°C, std. voltage)		Colour/B&W: 20 sec. or less		
[*] The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.				
[*] The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.				
First Copy Out Time ^{*,}	Colour	6.9 sec. or less	7.3 sec. or less	7.5 sec. or less
	B/W	5.3 sec. or less	5.6 sec. or less	6.1 sec. or less
Copy Speed (Colour/B&W, A4)		36 ppm	30 ppm	25 ppm
Copy Magnification	Fixed Same Magnification	1: 1±0.5% or less		
	Scaling Up	1: 1.154/1.224/1.414/2.000		
	Scaling Down	1: 0.866/0.816/0.707/0.500		
	Preset	3 types		
	Zoom	25 to 400% (in 0.1% increments)		
	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)		
Paper Capacity (80 g/m ²)	Tray 1	500 sheets (up to A3)		
	Tray 2	500 sheets (up to SRA3)		
	Multiple Bypass Tray	150 sheets (up to SRA3)		
Max. Paper Capacity (80 g/m ²) ^{*,}		6,650 sheets		
Paper Weight	Tray 1 / 2	52 to 256 g/m ²		
	Multiple Bypass Tray	60 to 300 g/m ²		
Multiple Copy		1 to 9,999 sheets		
Auto Duplex	Paper Size	SRA3, A3 to A5, B6 ^{*,} A6 ^{*,} 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" ^{*,} to 5-1/2" × 8-1/2" ^{*,} 7-1/4" × 10-1/2", 8" × 13", 16K, 8K, Postcard (A6 (4" × 6" Card))		
	Paper Weight	52 to 256 g/m ²		
Power Requirements		AC220 to 240 V 8.0 A (50/60 Hz)		
Max. Power Consumption		1.5 kW or less		
Dimensions [W] × [D] × [H]		615 × 685 × 779 mm (24-3/16" × 27-15/16" × 30-11/16")		
Weight		Approx. 85 kg (187-3/8 lb)		
Space Requirements [W] × [D] ^{*,10}		937 × 1,214 mm (36-7/8" × 47-13/16")		

^{*1} SRA3 paper can be used in Tray2.

^{*2} There are four types of foolscap: 8-1/2" × 13-1/2"^{*,} 8-1/2" × 13"^{*,} 8-1/4" × 13"^{*,} and 8" × 13"^{*,}. Any one of these sizes is selectable. For details, contact your service representative.

^{*3} Short edge feed 

^{*4} There are six types of foolscap: 8-1/2" × 13-1/2"^{*,} 220 mm × 330 mm^{*,} 8-1/2" × 13"^{*,} 8-1/4" × 13"^{*,} 8-1/8" × 13-1/4"^{*,} and 8" × 13"^{*,}. Any one of these sizes is selectable. For details, contact your service representative.

^{*5} Wrinkles or printing errors may occur due to the type, storage or environment that exists when envelope printing is carried out.

^{*6} Printing on banner paper can only be performed from a PC.

^{*7} May vary depending on the operating environment and usage.

^{*8} A4 long edge feed full size/using the first tray/scanning from the original glass surface.

^{*9} With options installed.

^{*10} Without options, with paper trays pulled out, and multiple bypass tray, auxiliary tray and ADF opened.

Printer Specifications

Type	Embedded
CPU	ARM Cortex-A7 Dual-core 1.2GHz
Memory	Shared with the copier
Print Speed	Same as Copy Speed (when using the same original)
HDD	250 GB (Shared with the copier)
Print Resolution	1,800 dpi (equivalent) × 600 dpi (at smoothing) or 1,200 dpi × 1,200 dpi (in 1,200 dpi mode)
PDL	PCL 6, PostScript 3 Emulation, XPS
Protocol	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), LPD, IPP1.1, SNMP, AppleTalk
Support OS	Windows Vista ^{*1} / 7 ^{*1} / 8 ^{*1} / 8.1 ^{*1} / 10 ^{*1}
	Windows Server 2008 ^{*1} / 2008 R2 / 2012 / 2012 R2 Mac OS X (10.6 / 10.7 / 10.8 / 10.9 / 10.10 / 10.11) Linux
Fonts	PCL
	PS
Interface	80 Roman fonts
	137 Roman Type1 fonts
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, IEEE 802.11 b/g/n ^{*,2}

^{*1} Supports the 32-bit (x86) or 64-bit (x64) environment.

^{*2} Optional

Scanning Specifications

Type	Full-Colour Scanner
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), IEEE 802.11 b/g/n ^{*1}
Driver	TWAIN Driver, HDD TWAIN Driver
Protocol	TCP/IP (FTP, SMB, SMTP, WebDAV) (IPv4/IPv6)
Scanning Speed (Colour/B&W) (300 dpi, A4, Simplex)	80 opm ^{*,2}
Scanning Size	Max. A3 (11" × 17")
Output Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, OOXML (pptx, xlsx ^{*,} , docx ^{*,}), Searchable PDF ^{*,1} , PDF/A ^{*,1} , Linearised PDF ^{*,1}
Scanning Resolution	Push
	Pull
Main Functions	200 dpi / 300 dpi / 400 dpi / 600 dpi
	100 dpi / 200 dpi / 300 dpi / 400 dpi / 600 dpi
Other Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)
	Multi-Method Send, Authentication at the time of E-Mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation

^{*1} Optional

^{*2} When using the Automatic Document Feeder.

Internet Fax

Protocol	TX: SMTP, RX: POP3, TCP/IP Simple mode
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	B/W: 200 × 100 dpi, 200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi Colour: 200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour, Internet Fax
Format	B/W: TIFF-F Colour: TIFF (Conforms to RFC3949 Profile-C)

Fax Kit FK-514 (Optional)

Communication	Super G3
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line
Line Density	Ultra Fine: 600 dpi, 600 dpi
	Super Fine: 16 dot/mm, 15.4 line/mm, 400 dpi, 400 dpi
	Fine: 8 dot/mm, 7.7 line/mm, 200 dpi, 200 dpi Normal: 8 dot/mm, 3.85 line/mm
Modem Speed	2.4 to 33.6 kbps
Compression	MH/MR/MMR/JBIG
Sending Paper Size	Max. A3 (Long Length Support: Max.1,000 mm)
Recording Paper Size	Max. A3 (Long Length Max. 1,000 mm — following the page division —)
Transmission Speed	Less than 2 sec. (A4, V.34, 33.6 kbps, JBIG)
Memory	Shared with the copier
Number of Abbr. Dials	2,000
Number of Program Dials	400
Number of Group Dials	100
Sequential Multiple Station Transmission	Max. 600

IP Address Fax ^{*}Optional Fax Kit FK-514 is required.

Protocol/Transmission	TCP/IP, SMTP
Sending Paper Size	A3, B4, A4
Resolution	200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
Format	B/W: TIFF-F, TIFF-S Colour: TIFF, PDF

Fiery Image Controller IC-416 (Optional)

^{*} Optional Upgrade Kit UK-211 and Video Interface Kit VI-508 is required.

Type	Embedded
CPU	Intel Pentium G850 2.9GHz
Memory	2 GB
HDD	500 GB
Print Speed	Same as Copy Speed (when using the same original)
Print Resolution	1,800 dpi (equivalent) × 600 dpi (at smoothing) or 1,200 dpi × 1,200 dpi (in 1,200 dpi mode)
PDL	Adobe PostScript 3
Protocol	Ethernet (Apple Talk, TCP/IP), HTTP/HTTPS, SSL/TLS for HTTPS, SNMP v3, SMB, Port9100 (Bi-Directional), IPP, LDAP, IPV6
Support OS	Windows Vista ^{*1} / 7 ^{*1} / 8 ^{*1} / 8.1 ^{*1} / 10 ^{*1}
	Windows Server 2008 ^{*1} / 2008 R2 / 2012 Mac OS X (10.6 / 10.7 / 10.8 / 10.9 / 10.10 / 10.11)
Fonts	Adobe PS 138 Roman fonts, Agfa PCL 80 Roman fonts and 1 bitmap font, Additional PCL 35 fonts, Euro Currency Resident Font
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)

^{*1} Supports the 32-bit (x86) or 64-bit (x64) environment.

Reverse Automatic Document Feeder DF-629 (Optional)

Type	Circulatory duplex system
Support Paper Size	Max. A3 (Fax mode: Max. 1,000 mm)
Mixed Size	Support
Original Set	Centre guide
Support Paper Weight	Thin paper: 35 to 49 g/m ² (Simplex) Plain paper: 50 to 128 g/m ² (Duplex/Mixed Original)
Paper Capacity	Max. 100 sheets (80 g/m ²)
Productivity (A4)	Simplex
	Duplex
Power Requirements	Colour/B&W: 80 opm (300 dpi), 55 opm (600 dpi)
	Colour/B&W: 37 opm (300 dpi), 26 opm (600 dpi)
Supplied from the MFP main body	
Dimensions [W] × [D] × [H]	611 × 504 × 127 mm (24-1/16" × 19-13/16" × 5")
Weight	Approx. 9 kg (19-13/16 lb)



Dual Scan Document Feeder DF-704 (Optional)

Type	Single pass simultaneous duplex system
Support Paper Size	Max. A3 (Fax mode: Max. 1,000 mm)
Mixed Size	Support
Original Set	Centre guide
Support Paper Weight	Thin paper: 35 to 49 g/m ² (Simplex) Plain paper: 50 to 163 g/m ² (Simplex/Duplex), 50 to 128 g/m ² (Mixed Original)
Paper Capacity	Max. 100 sheets (80 g/m ²)
Productivity (A4)	Simplex
	Duplex
Power Requirements	Colour/B&W: 80 opm (300 dpi), 55 opm (600 dpi)
	Colour/B&W: 160 opm (300 dpi), 110 opm (600 dpi)
Supplied from the MFP main body	
Dimensions [W] × [D] × [H]	611 × 504 × 142 mm (24-1/16" × 19-13/16" × 5-9/16")
Weight	Approx. 12 kg (26-7/16 lb)



Specifcations



Finisher FS-533 (Optional)

Type	Finisher
Support Paper Type	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Banner paper, Tab paper
Support Paper Size	SRA3, A3 to A5, B6 ¹¹ , A6 ¹¹ , 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 5-1/2" × 8-1/2", 16K, 8K, Postcard (A6 (4" × 6" Card)), Banner paper
Mode	Sort, Group, Offset Sort, Offset Group, Staple
Stacking Capacity	500 sheets (52 to 90 g/m ² , A4* ¹ or smaller) 250 sheets (52 to 90 g/m ² , B4 or larger) 10 sheets (91 to 300 g/m ² , special paper)
Staple Capacity	50 sheets (52 to 90 g/m ² , A4* ¹ or smaller) 30 sheets (52 to 90 g/m ² , B4 or larger) 2 sheets (91 to 209 g/m ² , as cover pages)
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	40 W or less
Dimensions [W] × [D] × [H]	472.5 × 583.5 × 194.7 mm (18-1/2" × 23" × 7-3/4")
Weight	Approx. 12 kg (26-1/2 lb)

*1 Short edge feed



Punch Kit PK-519 (Optional)

Applicable	Finisher FS-533
Number of holes	2 holes or 4 holes
Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 157 g/m ²)
Support Paper Size	A3 to B5, 11" × 17" to 7-1/4" × 10-1/2"
Power Requirements	Supplied from Finisher FS-533
Dimensions [W] × [D] × [H]	110.2 × 483.5 × 203.2 mm (4-1/2" × 19" × 8")
Weight	Approx. 3.2 kg (7 lb)



Job Separator JS-506 (Optional)

Support Paper Type (Weight)	Tray 1	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300 g/m ²), Transparency, Envelope, Label sheet
	Tray 2	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300 g/m ²), Transparency, Envelope, Label sheet, Banner paper
Support Paper Size	SRA3, A3 to A5, B6 ¹¹ , A6 ¹¹ , 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 5-1/2" × 8-1/2", 16K, 8K, Postcard (A6 (4" × 6" Card)), Banner paper	
Stacking Capacity	Tray 1	100 sheets (52 to 90 g/m ²)
	Tray 2	150 sheets (52 to 90 g/m ²)
Power Requirements	Supplied from MFP main body	
Max. Power Consumption	24 W or less	
Dimensions [W] × [D] × [H]	451 × 469 × 227 mm (17-3/4" × 18-1/2" × 9")	
Weight	Approx. 1.5 kg (3-1/4 lb)	

*1 Short edge feed



Paper Feed Cabinet PC-110 (Optional)

Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²) Thick paper (91 to 256 g/m ²)
Support Paper Size	A3 to A5 ¹¹ , 11" × 17" to 5-1/2" × 8-1/2", 8" × 13", 16K, 8K
Paper Capacity	Plain paper: 500 sheets, Thick paper: 150 sheets
Power Requirements	Supplied from the MFP main body
Dimensions [W] × [D] × [H]	615 × 652 × 246 mm (24-1/4" × 25-3/4" × 9-3/4")
Unit Configuration	Paper tray, 1 level
Weight	Approx. 22 kg (48-1/2 lb)

*1 Short edge feed



Paper Feed Cabinet PC-210 (Optional)

Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²) Thick paper (91 to 256 g/m ²)
Support Paper Size	A3 to A5 ¹¹ , 11" × 17" to 5-1/2" × 8-1/2", 8" × 13", 16K, 8K
Paper Capacity	Top tray (Tray 3) Bottom tray (Tray 4)
Power Requirements	Supplied from the MFP main body
Dimensions [W] × [D] × [H]	615 × 652 × 246 mm (24-1/4" × 25-3/4" × 9-3/4")
Unit Configuration	Paper tray, 2 levels
Weight	Approx. 24 kg (53 lb)

*1 Short edge feed



Paper Feed Cabinet PC-410 (Optional)

Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²) Thick paper (91 to 256 g/m ²)
Support Paper Size	A4* ¹ , 8-1/2" × 11** ¹
Paper Capacity	Thin paper, Plain paper: 2,500 sheets, Thick paper: 1,000 sheets
Power Requirements	Supplied from the MFP main body
Dimensions [W] × [D] × [H]	615 × 652 × 246 mm (24-1/4" × 25-3/4" × 9-3/4")
Unit Configuration	Paper tray, 2 levels
Weight	Approx. 23 kg (50-3/4 lb)

*1 Long edge feed



Large Capacity Unit LU-302 (Optional)

Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²) Thick paper (91 to 256 g/m ²)
Support Paper Size	A4* ¹ , 8-1/2" × 11** ¹
Paper Capacity	Thin paper, Plain paper: 3,000 sheets, Thick paper: 1,300 sheets
Power Requirements	Supplied from the MFP main body
Dimensions [W] × [D] × [H]	367 × 528 × 405 mm (14-1/2" × 20-3/4" × 16")
Weight	Approx. 18 kg (39-3/4 lb)

*1 Long edge feed



Finisher FS-534 (Optional)

Type	Finisher	
Support Paper Type	Thin paper/Plain paper (52 to 90 g/m ²) , Thick paper (91 to 300 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Banner paper, Tab paper	
Support Paper Size	SRA3, A3 to A5, B6 ¹ , A6 ¹ , 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 5-1/2" × 8-1/2", 16K, 8K, Postcard (A6 (4" × 6" Card)), Banner paper	
Mode	Sort, Group, Offset Sort, Offset Group, Staple	
Stacking Capacity	Output tray 1 (Sub tray)	200 sheets (52 to 90 g/m ²) 20 sheets (91 to 300 g/m ² , special paper)
	Output tray 2 (Main tray)	3,000 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger) 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 300 g/m ² , special paper)
	Output tray 3 (Relay Unit top surface)	100 sheets (52 to 90 g/m ²) 20 sheets (91 to 300 g/m ² , special paper)
Staple Capacity	50 sheets (Plain Paper 52 to 90 g/m ²)	
	48 sheets (Plain paper 52 to 90 g/m ²) + 2 sheets (Thick paper 91 to 209 g/m ²)	
	30 sheets (Thick paper 91 to 120 g/m ²)	
	15 sheets (Thick paper 121 to 209 g/m ²)	
Power Requirements	Supplied from the MFP main body	
Max. Power Consumption	56 W or less	
Dimensions [W] × [D] × [H]	528 × 641 × 1,023 mm (20-3/4" × 25-1/4" × 40-1/4")	
Weight	Approx. 40 kg (88-1/4 lb)	

*1 Short edge feed



Finisher FS-534SD (Optional)

Type	Finisher
Support Paper Type	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Banner paper, Tab paper Centre Staple: 52 to 90 g/m ² , Half-Fold: 52 to 209 g/m ² (more than 91 g/m ²) Thick paper can be used only as a cover page, Tri-Fold: 52 to 90 g/m ²
Support Paper Size	SRA3, A3 to A5, B6 ¹¹ , A6 ¹¹ , 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 11" × 17" to 5-1/2" × 8-1/2", 16K, 8K, Postcard (A6 (4" × 6" Card)), Banner paper Centre Staple, Half-Fold: A3, B4, A4 ¹ , 12-1/4" × 18" (A3 wide (311.1 mm × 457.2 mm)), 12" × 18", 11" × 17", 8-1/2" × 14", 8-1/2" × 11", 8K Tri-Fold: A4 ¹ , 8-1/2" × 11", 16K ¹
Mode	Sort, Group, Offset Sort, Offset Group, Staple
Staple Capacity	50 sheets (Plain Paper 52 to 90 g/m ²) 48 sheets (Plain paper 52 to 90 g/m ²) + 2 sheets (Thick paper 91 to 209 g/m ²) 30 sheets (Thick paper 91 to 120 g/m ²) 15 sheets (Thick paper 121 to 209 g/m ²)
Maximum Number of Sheets that can be Centrestapled	20 (52 to 90 g/m ²) sheets, or 19 (90 g/m ²) sheets + Thick (209 g/m ²) 1 sheet
Maximum Number of Folded Sheets	Half-Fold: 5 sheets or Thick (91 to 209 g/m ²) 1 sheet, Tri-Fold: 3 sheets
Stacking Capacity	Output tray 1 (Sub tray) 200 sheets (52 to 90 g/m ²), 20 sheets (91 to 300 g/m ² , special paper)
	Output tray 2 (Main tray) 3,000 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger), 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 300 g/m ² , special paper)
	Output tray 3 (Relay Unit top surface) 100 sheets (52 to 90 g/m ²) 20 sheets (91 to 300 g/m ² , special paper)
	Folding output tray 1 to 3 sheets: 20 sets 4 to 10 sheets: 10 sets 11 to 20 sheets: 5 sets Tri-Fold (1 sheet): 30 sets Tri-Fold (2-3 sheets): 10 sets
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	56 W or less
Dimensions [W] × [D] × [H]	528 × 641 × 1,023 mm (20-3/4" × 25-1/4" × 40-1/4")
Weight	Approx. 64 kg (141 lb)

*1 Short edge feed



Punch Kit PK-520 (Optional)

Applicable	Finisher FS-534/FS-534SD
Number of holes	2 holes or 4 holes
Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300 g/m ²)
Support Paper Size	A3 to B5, 11" × 17" to 7-1/4" × 10-1/2", 16K, 8K
Power Requirements	Supplied from Finisher FS-534/FS-534SD
Dimensions [W] × [D] × [H]	61 × 492 × 142 mm (2-1/2" × 19-1/2" × 5-1/2")
Weight	Approx. 1.8 kg (4 lb)

Authentication Unit (IC Card type) AU-201S (Optional)

Applicable Card	FeliCa (IDm), SSFC, FCF, FCF (campus), FeliCa Private, TypeA MiFARE (UID), NFC (Host Card Emulation)
Interface	USB 2.0
Power Supply	Power received from USB port
Dimensions [W] × [D] × [H]	98 × 64 × 13 mm (3-7/8" × 2-1/2" × 1/2") (not including projections)
Weight	Approx. 100 g (1/4 lb)

Authentication Unit (Biometric type) AU-102 (Optional)

Biometric Sensor System	Transmission-type optical system
Interface	USB 2.0
Verification Time	Approx. 1 sec. or less
Max. Power Consumption	DC 5 V 500 mA
Dimensions [W] × [D] × [H]	59 × 82 × 74 mm (2-1/4" × 3-1/4" × 3")
Weight	Approx. 96 g (1/4 lb) (excluding USB cable)

