

SUPERSEDES: March 8, 2016

EFFECTIVE: January 5, 2017

JOB _____ ENGINEER _____ CONTRACTOR _____ REP. _____

ITEM NO.	LOCATION	MODEL NO.	QUANTITY	GPM
----------	----------	-----------	----------	-----

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII Div. 1
- Registered with the National Board of Pressure Vessel Manufacturers
- Standard Design Pressure and Temperature: 125 psi @ 240°F
- Construction: Carbon Steel with exterior red oxide primer finish
- 304 Stainless Steel Coalescence Pall Rings
- Taco 4900 units are designed to be self-supporting in the piping system. Factory review is necessary should any piping loads be present.


CAUTION: LIFTING LUGS FOR RIGGING AND LIFTING USE ONLY, NOT FOR ANCHORING OR HANGING.

FACTORY INSTALLED

- Air Vent is suitable for water, max. 50% glycol
- Flush Valve

OPTIONS

- Higher Design Pressures and Temperatures
 - 150 psi @ 240°F, Available
- Optional System Connection Sizes available
- Optional Connection Types
 - 'G' Grooved Pipe Connections up to 16"
- Optional Base Ring
 - Add Suffix 'R' (4905 thru 4916) Exp. 4912AD-125R

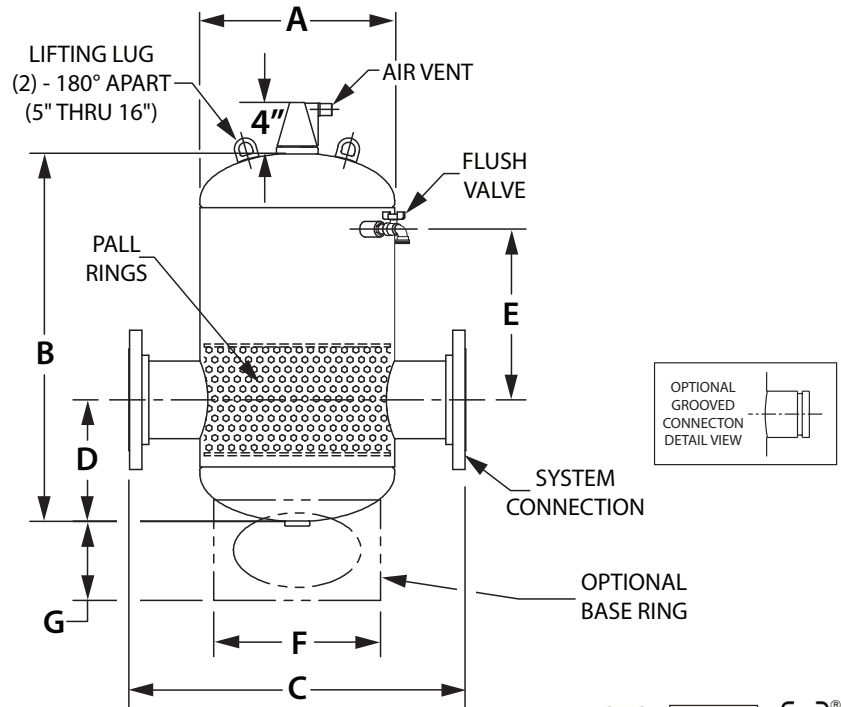

SIZES & DIMENSIONS

All dimensions shown are subject to change and should not be used for prepping. Contact your local Taco representative should certified dimensional drawings be required.



PIPE SIZE	MODEL NUMBER (1)	A DIA. (INCH)	B MAX. (INCH)	C (INCH)	D (INCH)	E (INCH)	F DIA. (INCH)	G (INCH)	GPM @ 4.9 ft. /sec	APPROX. DRY WGT. (LBS)
2	4902AT-125	10	16½	* 12	7½	3⅞	-	-	51	30
2	4902A-125	10	16½	20	7½	3⅞	-	-	51	45
2½	49025AT-125	10	16½	* 12	7½	3⅞	-	-	73	40
2½	49025A-125	10	16½	20	7½	3⅞	-	-	73	50
3	4903AT-125	12	22⅛	* 14½	8½	7½	-	-	113	65
3	4903A-125	12	22⅛	22	8½	7½	-	-	113	75
4	4904A-125	12	22⅛	22	8½	7½	-	-	204	80
5	4905A-125	14	28⅜	24	10½	12	12	6¾	306	200
6	4906A-125	14	28⅜	24	10½	12	12	6¾	469	215
8	4908A-125	18	36⅝	28	13¼	16	14	7	816	290
10	4910A-125	24	47¾	36	16⅞	22	20	6¾	1291	565
12	4912A-125	24	54¾	36	17⅞	28	20	6¾	1837	645
14	4914A-125	30	62	42	22	29½	24	8	2106	910
16	4916A-125	30	67¾	42	22	35¼	24	8	2790	965

(1) For 150 psi models, replace - 125 with -150.

* Dimension for 'T' option only.

Comments: _____

