



2720 Tobey Drive, Indianapolis, IN 46219
Tel 1-877-671-7011 ■ Fax 800-851-0000
Zero.Customer.Support@allegion.com
www.zerointernational.com

Part No:

568

Part description:

Rabbeted threshold

Notes:


Provided by:

Customer name:

Job no:

Date:

Image may not be shown to scale

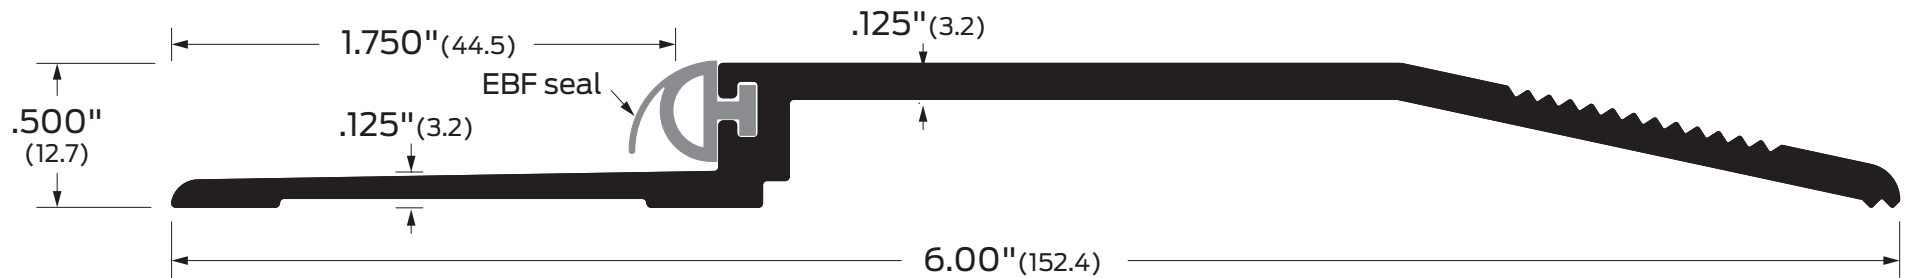

Notes:

Neoprene extruded bulb/finger for double-sealing protection.

Certifications:

 Fire rated-UL10c

ANSI/BHMA:

568A, 568D, 568G, 568BK

J36100

568A-E, 568D-E, 568G-E, 568BK-E

J36200



Finishes:

A Aluminum mill finish
BK Aluminum black anodized
D Aluminum dark bronze anodized
G Aluminum gold anodized

Options:

E Epoxy abrasive tread
EL Photoluminescent and abrasive epoxy tread
V3 Full body strength fill
EV3 Epoxy and full body strength fill
ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill