ANALOG DATA MANUAL 1981

signetics

a subsidiary of U.S. Philips Corporation

WYLE DISTRIBUTION GROUP

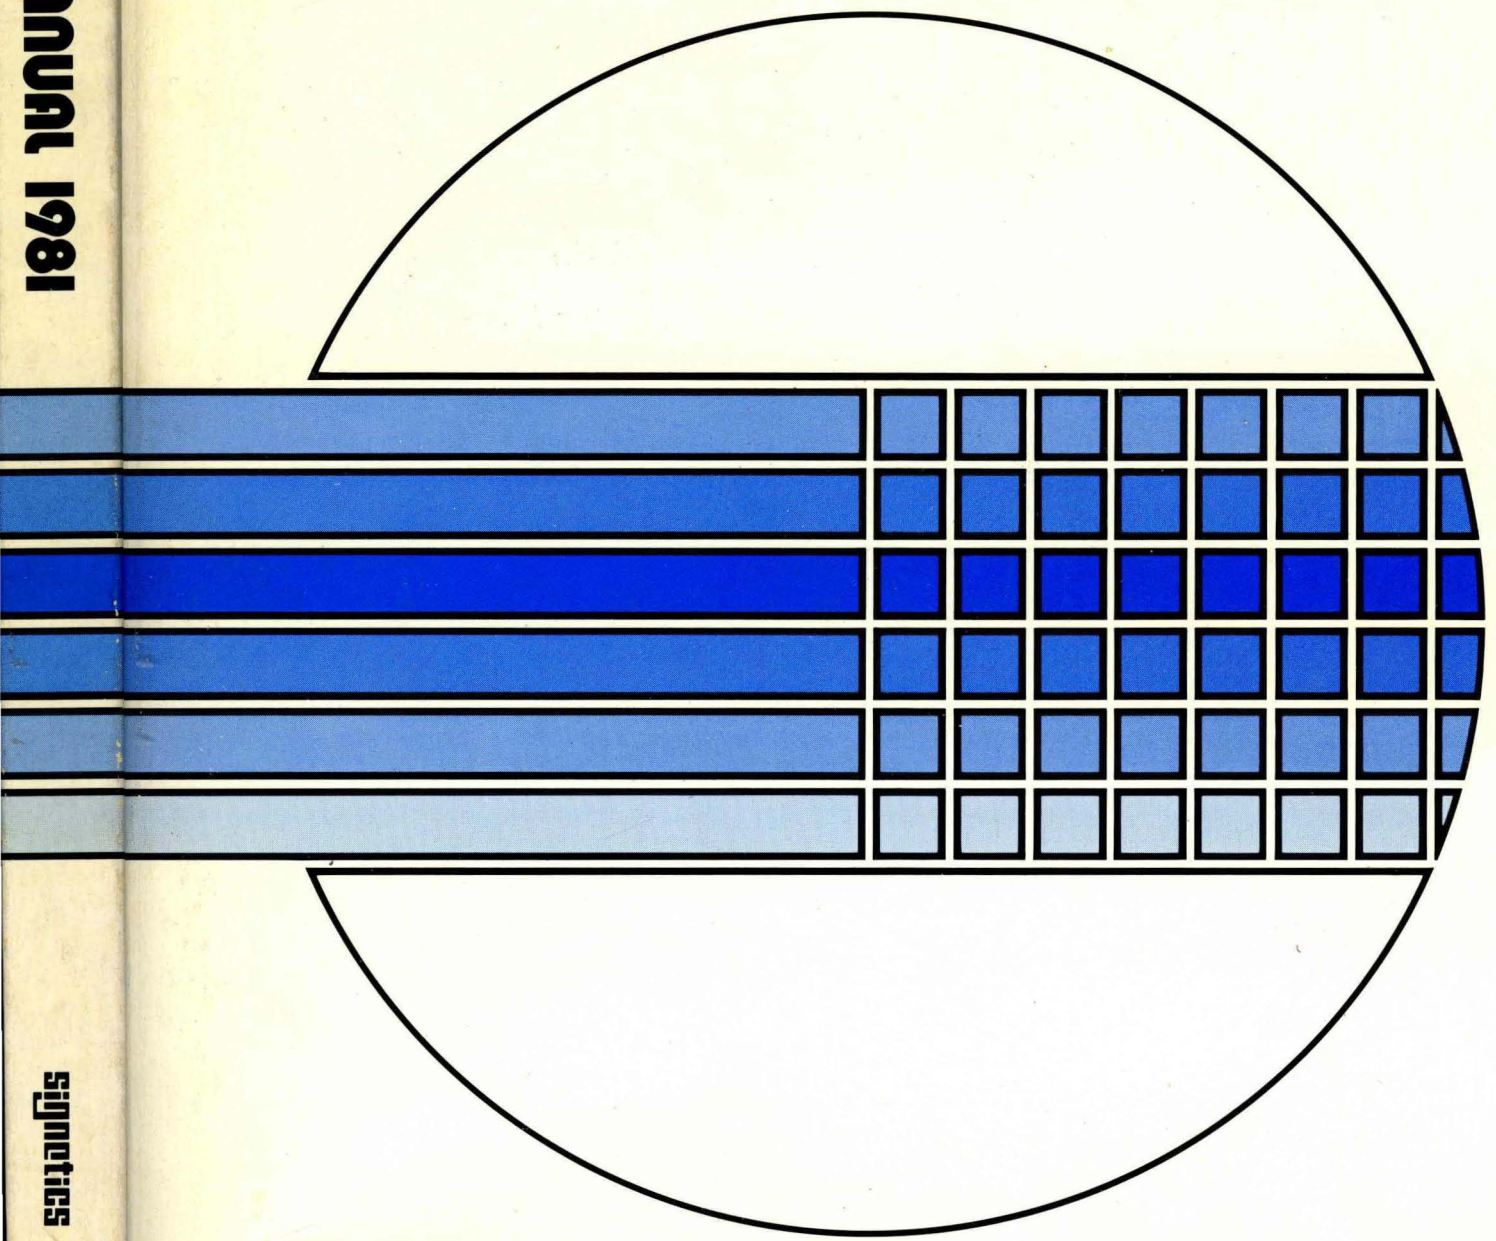

ANALOG DATA MANUAL 1981

signetics

ANALOG DATA MANUAL 1981

signetics

a subsidiary of U.S. Philips Corporation

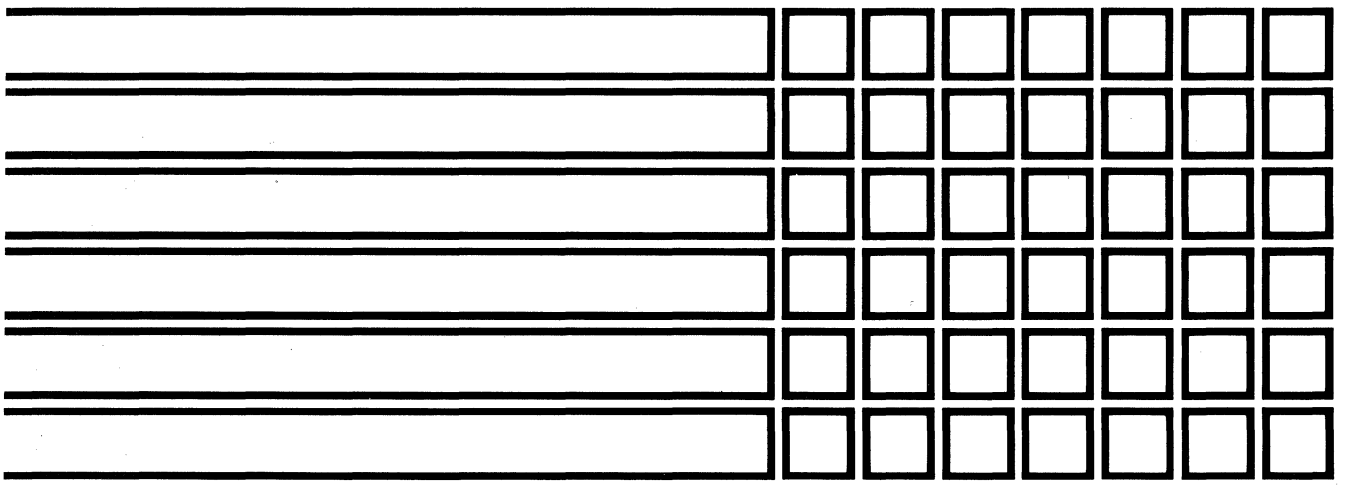

Signetics reserves the right to make changes in the products contained in this book in order to improve design or performance and to supply the best possible products. Signetics also assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representations that the circuits are free from patent infringement. Applications for any integrated circuits contained in this publication are for illustration purposes only and signetics makes no representation or warranty that such applications will be suitable for the use specified without further testing or modification. Reproduction of any portion hereof without the prior written consent of Signetics is prohibited.

©Copyright 1980 Signetics Corporation

signetics

TABLE OF CONTENTS

INTRODUCTION

Ordering Information 11
Quality Reliability and Assurance 12

Section 1—OPERATIONAL AMPLIFIERS

LF355/356	High Performance JFET Input Operational Amplifiers	28
LM124/224/324	General Purpose Single Supply Operational Amplifier	37
LM158/258/358	Dual Operational Amplifier Single or Dual Power Supply Operation	67
LM301A	High Performance Amplifier	41
LM13600/13600A	Dual Operational Transconductance Amplifier	45
MC1456/1556	High Performance Operational Amplifier	48
MC1458/1558	General Purpose Operational Amplifier	51
NE/SE530/5530	High Slew Rate Operational Amplifier	56
NE/SE531	High Slew Rate Operational Amplifier	61
NE/SE/SA532	Dual Operational Amplifier Single or Dual Power Supply Operation	67
NE/SE535/5535	Single or Dual High Slew Rate Operational Amplifier	71
NE/SE538/5538	Dual High Slew Rate Operational Amplifier	76
NE/SE5512	Dual High Performance Operational Amplifier	81
NE/SE5514	Quad High Performance Operational Amplifier	87
NE5517/5517A	Dual Operational Transconductance Amplifier	92
NE/SE5532/5532A	Internally Compensated Dual Low Noise Operational Amplifier	98
NE/SE5533/5533A	Dual Low Noise Operational Amplifier	104
NE/SE5534/5534A	Single Low Noise Operational Amplifier	104
NE/SE5539	Ultra High Frequency Operational Amplifier	109
SA534	General Purpose Single Supply Operational Amplifier	37
μA741/741C/SA741C	General Purpose Operational Amplifier	119
μA747/747C/SA747C	Dual Operational Amplifier	124
μA748/748C	General Purpose Operational Amplifier	130

Section 2—VIDEO AMPLIFIERS

NE/SE592	Video Amplifier	137
μA733/733C	Differential Video Amplifier	143

Section 3—POWER CONTROLLERS

NE/SE5553/5554	Dual Polarity Regulator	153
NE/SE5560	Switched-Mode Power Supply Control Circuit	157
SG1524/2524/3524	Regulating Pulse Width Modulator	161
μA723/723C/SA723C	Precision Voltage Regulator	169

Section 4—TIMERS

NE/SE555/SE555C	Timer	177
NE/SA/SE556	Dual Timer	180
NE/SA/SE556-1/SE556-1C	Dual Timer	183
NE/SA/SE558	Quad Timer	186

Section 5—COMPARATORS

LM111/211/311	Voltage Comparator	191
LM119/219/319	Dual Voltage Comparator	194
LM139/239/339	Quad Voltage Comparator	199
LM193/A/293/A/393/A	Low Power Dual Voltage Comparator	204

LM2901	Quad Voltage Comparator	199
LM2903	Low Power Dual Voltage Comparator	204
MC3302	Quad Voltage Comparator	199
NE/SE521	High Speed Dual Differential Comparator/Sense Amp	207
NE/SE522	High Speed Dual Differential Comparator/Sense Amp	211
NE/SE527	Voltage Comparator	215
NE/SE529	Voltage Comparator	219

Section 6—MICROPROCESSOR INTERFACE

NE590/591	Addressable Peripheral Drivers	225

Section 7—TRANSISTOR ARRAYS

CA3081/3082	Seven Transistor Array	233
ULN2001/2003/2004	High Voltage/High Current Darlington Transistor Arrays	236

Section 8—INTERFACE

DS7820/8820	Dual Line Receiver	243
DS7820A/8820A	Dual Line Receiver	245
DS7830/8830	Dual Differential Line Driver	249
MC1488	Quad Line Driver	251
MC1489/1489A	Quad Line Receivers	254
75S107	High Speed Dual Line Receiver	256
75S108	High Speed Dual Line Receiver	259
75S207	High Speed Dual Sense Amplifier for MOS Memories	263
75S208	High Speed Dual Sense Amplifier for MOS Memories	266

Section 9—DISPLAY DRIVERS

NE582	Hex Universal Driver	273
NE587	LED Decoder/Driver	275
NE589	LED Decoder/Driver	284
NE/SA594	Vacuum Flourescent Display Driver	293

Section 10—DATA ACQUISITION

DAC-08 Series	8-Bit High Speed Multiplying D/A Converter	313
LF398	Monolithic Sample and Hold Circuits	303
MC1508-8/1408-8/1408-7	8-Bit Multiplying D/A Converter	307
NE5007/5008/SE5008	8-Bit High Speed Multiplying D/A Converter	313
NE/SE5009	8-Bit High Speed Multiplying D/A Converter	318
NE/SE5018	8-Bit Microprocessor-Compatible D/A Converter	325
NE/SE5019	8-Bit Microprocessor-Compatible D/A Converter	330
NE/SE5118	8-Bit Microprocessor-Compatible D/A Converter-Current Output	335
NE/SE5119	8-Bit Microprocessor-Compatible D/A Converter-Current Output	339
NE5020	10-Bit Microprocessor-Compatible D/A Converter	343
NE/SE5537	Sample and Hold Amplifier	351

Section 11—RADIO CIRCUITS

CA3089	FM-IF System	359
MC1496/1596	Balanced Modulator-Demodulator	364
NE544/644	Servo Amplifier	367
NE5044	Programmable Seven Channel RC Encoder	373
NE5045	Seven Channel RC Decoder	376
NE5046	2-Channel RC Decoder	379
TCA440	AM Receiver Circuit	381
μA758	FM Stereo Multiplex Decoder, Phase Locked Loop	388

Section 12—TV CIRCUITS

LM1880	Vertical/Horizontal Processor	395
TBA120S	8-Stage Amplifier with Balanced Demodulator	398

TBA1440G/1441G TV Video Amplifier with Demodulator 401
ULN2211 2-Watt TV/FM Sound Channel 405

Section 13—AUDIO CIRCUITS

LM387 Dual Low-Noise Preamp 411
NE/SE540 Power Driver 415
NE542 Dual Low Noise Preamp 420
NE545* Dolby Noise Reduction Processor
NE570/571/SA571 Compandor 423
NE572 Programmable Analog Compandor 425
NE645B/646B-N Dolby Noise Reduction Processor 427

Section 14—PHASE LOCKED LOOPS

NE/SE564 Phase Locked Loop 436
NE/SE565 Phase Locked Loop 443
NE/SE566 Function Generator 448
NE/SE567 Tone Decoder/Phase Locked Loop 451

Section 15—D-MOS

SD210/211/212/213/214/215 D-MOS FET Switch N-Channel Enhancement 463
SD300/303/304 D-MOS FET Dual Gate N-Channel Enhancement 468
SD305/306 D-MOS FET Dual Gate N-Channel Enhancement 475
SD5000/5001/5002 D-MOS FET Quad Analog Switch Arrays and Multiplexers 484

Section 16—INDUSTRIAL CONTROLLERS

NE5522 Universal Analog Controller 493

Section 17—INDUSTRIAL CONTROLLERS

Military 505
Packages 513
Alphanumeric Index 535
Sales Offices 539

NOTE
*This data sheet may be obtained by writing Publication Services at Signetics, 811 E. Arques, M/S 027, Sunnyvale, California 94086, or by calling (408) 746-2111.

INTRODUCTION

As one of the world's largest manufacturers of integrated circuits, Signetics designs, develops, manufactures, and sells over 1600 different types of integrated circuits. Signetics produces integrated circuits utilizing both bipolar and metal-oxide semiconductor (MOS) manufacturing processes for Memory, Microprocessor, Digital, and Analog applications.

The Analog division, one of eight divisions, is a major broad line supplier of Analog circuits consisting of Signetics' original designs, industry standard devices, and custom circuits for EDP, Automotive, Military, Communications, Industrial, and Consumer markets. The family of 555 Timers, the NE5534 High Performance Operational Amplifier, the NE5018 and NE5020 microprocessor compatible DAC's and the NE5560 Switched Mode Power Supply Regulator are a few examples of Signetics' original products. The breadth of the Analog product line offers the designer, the component engineer, and the purchasing agent a broad Analog circuit product line backed by Signetics' industry image as a quality manufacturer to whom the servicing of the customers' needs is paramount.

The 1981 Analog Data Manual is intended to serve as a single reference for Analog circuits by presenting information necessary to select Signetics' Analog products properly. The data manual is updated and rewritten to reflect data on new products issued in the past 2 years, as well as new package configurations such as the new microminiature packages which have recently been released for volume production. Designated the SO package (SO = Small Outline), this new package offers advantages to the hybrid as well as the P.C. board assembler in the purchasing of fully DC- and AC-tested circuits for substrate assembly. Complete details on this new package are available in the Packaging section at the end of this manual.

Additions and errata will be generated at periodic intervals as appropriate.

Your inputs to improve this or any of our publications would be greatly appreciated.

Lou Johnson
Marketing Manager, Analog Division

ORDERING INFORMATION

Signetics' Analog integrated circuit products may be ordered by contacting either the local Signetics sales office, Signetics representatives and/or Signetics authorized distributors. A complete listing is located in the back of this manual.

Minimum Factory Order:

Commercial Product:
$1000 per order
$50 per line item per order

Military Product:
$250 per line item per order

Table 1 provides part number information concerning for both Signetics originated products and industry standard products.

Table 2 is a cross reference of both the old and new package suffixes for all presently existing types, while Table 3 and 4 provide appropriate explanations on the various prefixes employed in the part number descriptions.

As noted in Table 3, Signetics defines device operating temperature range by the appropriate prefix. It should be noted however, that devices with a SE prefix (-55°C to +125°C) indicates only its operating temperature range and *not* its military qualification status. The military qualification status of any analog product can be determined by either looking in the Military Section in this manual and/or contacting your local sales office.

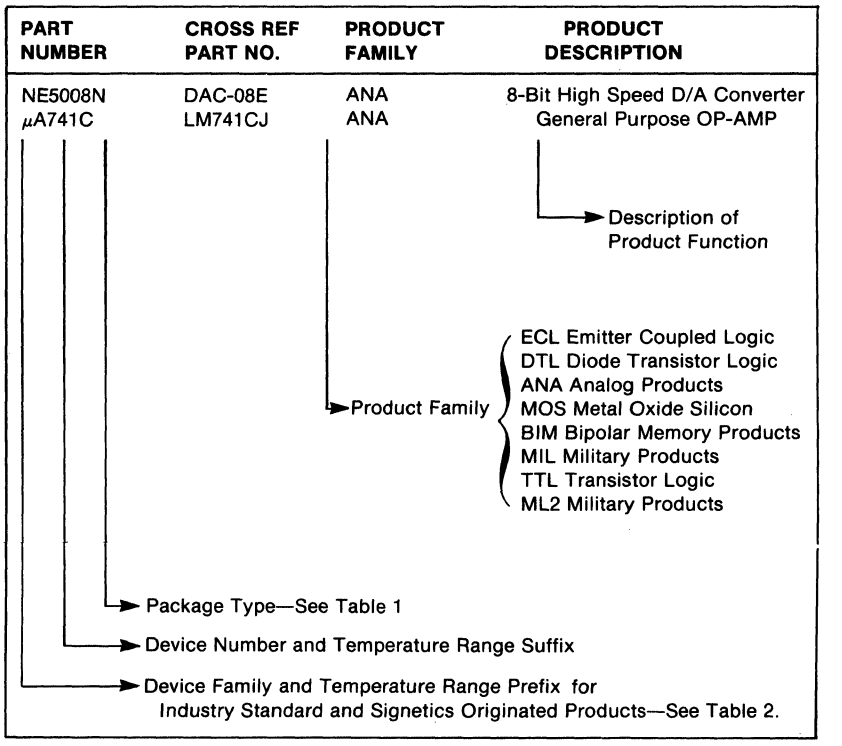

Table 1 PART NUMBER DESCRIPTION

SUFFIX		PACKAGE DESCRIPTION[2]
Old	New	
A,AA	N	14-lead plastic DIL
A	N-14	14-lead plastic DIL (Selected Analog products only)
B,BA	N	16-lead plastic DIL
-	D	Microminiature package
DB	HB	3-lead TO-39
DC	EC	4-lead TO-46
DE	EE	4-lead TO-72
F	F	14, 16, 18, 22 and 24-lead ceramic (Cerdip) DIL
I,IK	I	14, 16, 18, 22, 28 and 4-lead ceramic DIL
K	H	10-lead TO-100
L	H	10-lead high-profile TO-100 can
NA,NX	N	24-lead plastic DIL
Q,R	Q	10, 14, 16 and 24-lead ceramic flat
SK	SK	Microprocessor kit
T,TA	H	8-lead TO-99
U	U	SIL Plastic power
V	N	8-lead plastic DIL
W,WJ	W	10, 14, 16 and 24-lead ceramic (Cerpac) flat
XA	N	18-lead plastic DIL
XC	N	20-lead plastic DIL
XC	N	22-lead plastic DIL
XL,XF	N	28-lead plastic DIL

Table 2 PACKAGE DESCRIPTIONS

PREFIX	DEVICE TEMPERATURE RANGE
N-	0° to +70°C
S-	-55° to +125°C
NE-	0° to +70°C
SE-	-55° to +125°C
SA	-40° to +85°C
SU	-25° to +85°C

Table 3 DEVICE TEMPERATURE

PREFIX	DEVICE FAMILY
CA	Linear Industry Standard
DS	Linear Industry Standard
JB	Mil Rel—Jan Qualified—Old Designator
JM	Mil Rel—Jan Qualified—New Designator
LH	Linear Industry Standard
LM	Linear Industry Standard
M	Mil Rel—Jan Processed
MC	Linear Industry Standard
SD	Linear DMOS
μA	Linear Industry Standard
ULN	Linear Industry Standard

Table 4 FAMILY PREFIX

QUALITY AND RELIABILITY

Quality and reliability are two important measures of a product's merit. Quality is a measure of an integrated circuit's conformance to agreed-upon criteria at a given time, while Reliability is a measure of the circuit's ability to continue to conform over a period of time. The Signetics SUPR II Program has been designed to upgrade the basic product quality through the use of more rigorous screening criteria at the critical process steps. These additional screens constitute the Level A portion of the Program. A burn-in option is available for those users requiring enhanced reliability performance, and this option is designated as Level B.

Quality

The quality of an integrated circuit is appraised by the user based on the ability of the circuit to meet the specified electrical criteria and external visual appearance. The SUPR II Program focuses on supplying to the user a product that has a high probability of meeting the user's needs through the sampling plans defined in MIL-STD-105D and the quality levels (AQL's) stated in Table II. Many of the inspection methods at critical process steps are now based on MIL-STD-883 criteria in order to build, rather than test, quality into the product.

Reliability

System performance over a period of time is the user's measure of an integrated circuit's reliability. The SUPR II Program improves system reliability by building quality into the product via additional manufacturing inspections and the offering of a burn-in screen. In addition to the SUPR II Program, Signetics performs periodic reliability testing via the SURE II/883A Program to assure continuing uniformity and long-term reliability of all product lines. This data base is available upon request as is the ten-year reliability summary, Signetics Product Reliability Report, R-363.

How Do Integrated Circuit Failures Occur?

Results from the Signetics Failure Analysis Lab over a three-year period on product returned from board checkout, system checkout, field usage and accelerated life testing are graphically presented in Figure 1. Under typical system operating conditions, random manufacturing defects, as outlined in Table 1, are the primary cause of true device failure. Also shown in Table 1 are the process controls that have been added via the SUPR II Program to minimize these defects prior to shipment to the customer. The device failure models are categorized as:

Half of the devices analyzed were found to be electrically good. They are attributed to being "false pulls" that occur during normal troubleshooting at the board and system levels.

Devices damaged by electrical over-stress account for 25% of the failures. Typical causes for electrical over-stress are incorrect board insertion, board shorts between device pins, power supply transients, and poor handling techniques.

The remaining 25% were verified to be true failures which occurred as a result of an in-process manufacturing defect or test escape.

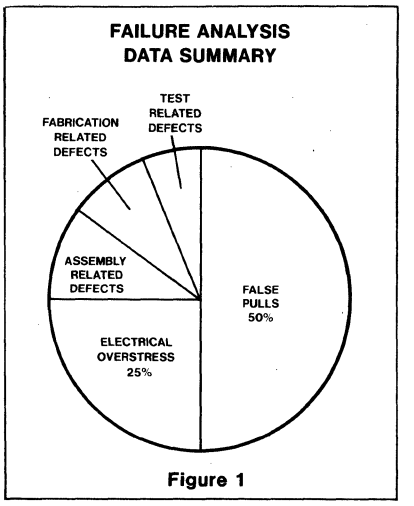

Figure 1

SIGNETICS SUPR II LEVEL A

Improved Quality Benefits

From the user's point of view, improved integrated circuit quality from the supplier means a lower cost of ownership. This cost saving can be effected through the reduction or elimination of involved incoming inspection testing, reduced PC board rework, simplified system checkout, reduced in-line inventories, and less complicated part tracking by Purchasing Management.

The SUPR II Program is Corporate in scope and covers Logic (Standard TTL, Schottky TTL, Low Power Schottky TTL, ECL, 8T Interface), Analog (Industrial, Consumer, Interface), Bipolar Memories (RAM's, ROM's, PROM's), and MOS Memories (RAM's, ROM's, Shift Registers), All package options are also available.

The SUPR II flow is detailed in Figure 5, including the test methods and Quality acceptance levels (Table 2 provides the electrical/mechanical finished product AQL's). Highlights of the flow are visual inspections, thermal shock preconditioning, hermeticity, and burn-in, all based on MIL-STD-883 criteria.

A good example of the savings which can be achieved by purchasing tighter inspection levels is given in Figure 2. Here we are comparing the various levels of inspection (AQL's) available for device functionality and its impact on the number of PC boards which must be reworked during system manufacturing. Using the standard commercial AQL in functionality of 1.0%, at 120 integrated circuit packages per board, typically more than 90% of boards will require rework. At 0.15% AQL, rework is reduced to 25%, and at 0.1%, typically only 12% rework is required.

SIGNETICS SUPR II LEVEL B

Infant Mortality Failures

Failure rates are most severe during the first few months of operating life. This is known as the "infant mortality" phase. A system

FAILURE MECHANISMS	CAUSES	SUPR II CONTROL
Die Fabrication Related	Metalization Oxide Defects Mechanical Scratches Contamination	SEM Monitor Visual Stabilization Bake Burn-In
Assembly Related	Bonding, Wire, Package and Seal Defects	Preseal Visual Thermal Shock Stabilization Bake Hermeticity Hot-Rail Testing
Test Related	Test Escapes	Tightened AQL Guarantees High Temperature Testing

Table 1

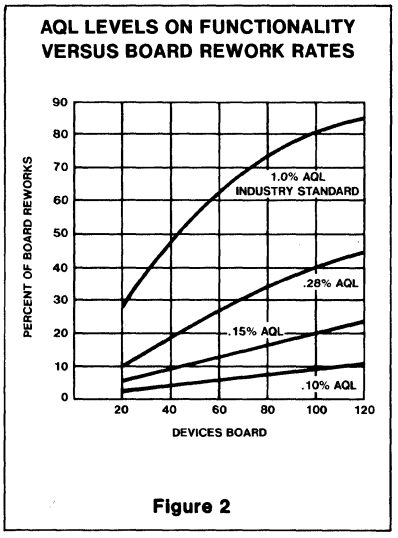

Figure 2

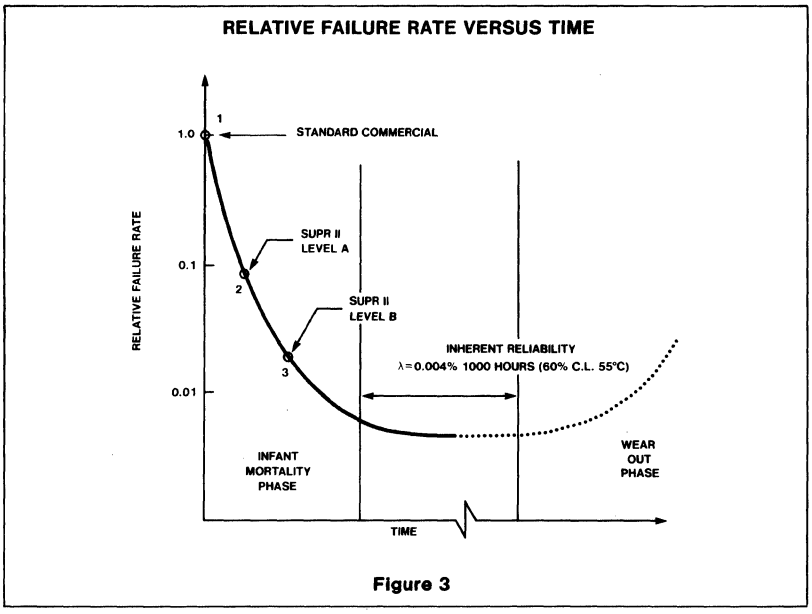

Figure 3

manufacturer has various options to solve problems arising from infant failures. He can ship his system to the end customer and repair field failures as they occur. He can operate the system in-house for this period and repair failures. Or he can purchase devices which have already been preconditioned to eliminate the early failures. Each customer must choose the most cost-effective method for his particular business. A considerable number of the reliabilty defects which cause early failures are eliminated by the manufacturing control and preconditioning steps of SUPR II Level A processing. More persistent defects can be removed by the use of "burn-in" techniques. The "burn-in" processing of SUPR II Level B effectively allows the system manufacturer to ship his equipment at Point 3 on the failure rate curve in Figure 3.

		ANALOG	
		Plastic	Ceramic Metal Can
HOT OPENS	100°C	.015%	-
FUNCTIONALITY (NOTE 1)	25°C	0.10	0.10
	HIGH	0.15	0.15
D.C. PARAMETRIC	25°C	0.15	0.15
TEMPERATURE	OVER	0.40	0.40
A.C. PARAMETRIC	25°C	0.65	0.65
MECHANICAL	MAJOR	0.25	0.25
	MINOR	1.0	1.0
SEAL TEST (CERAMIC METAL CAN ONLY)	FINE LEAK 1×10^{-7}cc/s	N/A	1.0
	GROSS LEAK 1×10^{-5}cc/s	N/A	0.65

NOTE

1. To insure AQL levels tighter than 0.65% on D.C. parameters usually requires continual correlation of test equipment between customer and vendor to avoid test interpretation problems. If the objective is to reduce system rework costs, functional operation of a device (does it switch or toggle in the system) is often more critical than the absolute value of a parameter. For this reason SUPR II focuses attention on tightened AQL's on functionality.
   For analog devices, D.C. parameters, such as input current and offset voltages, tend to be more critical to system operation than for logic devices. A 0.25% AQL is therefore offered on analog D.C. parameters, with the realization that careful attention must be paid to establishing correlation at the customer's incoming inspection.

Table 2 SUPRA II AQL GUARANTEE

Burn-In Conditions

MIL-STD-883A, Method 1015 describes a number of different conditions for integrated circuit burn-in. For SUPR II Level B, Signetics has selected Condition F. This is the accelerated burn-in method derived from MIL-STD-883A, utilizing a high temperature reversed bias condition. This bias scheme is preferred for infant mortality screening, while operating conditions are generally utilized for internal reliability programs oriented toward generating MTBF data for the system designer.

Integrated Burn-In Flow

Signetics SUPR II Level B burn-in is performed to provide reliability assurance equivalent to a 168-hour/125°C screen. This process has been integrated into the standard manufacturing flow to provide the customer with the most cost effective screen and significantly reduced delivery times.

BURN-IN FLOW

ASSEMBLY

The flow from SEM control through package seal is common to Levels A and B.

⇩

TEST

The pre-burn-in electrical screen is designed to remove assembly rejects and increase equipment efficiency.

⇩

BURN-IN

The 24-hour/155°C accelerated burn-in is well controlled to provide maximum screening effectiveness without damaging good devices.

⇩

TEST

The post-burn-in electrical is a 100% production DC/function electrical test.

Figure 4

Marking Format

Product processed to the SUPR II manufacturing flow can be identified by an SA for Level A, and an SB for the Level B burn-in option.

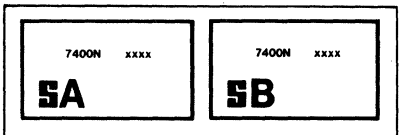

SUPR II LEVEL A — SUPR II LEVEL B

NOTE
Marking for Level A in process of being implemented.

Figure 5 shows the generalized process flow for all Signetics integrated circuits purchased to the SUPR II program. Each product group (Analog, Bipolar Memory, Logic, and MOS) may follow slightly different procedures dictated by the specific device characteristics.

SUPR II PROCESS FLOW

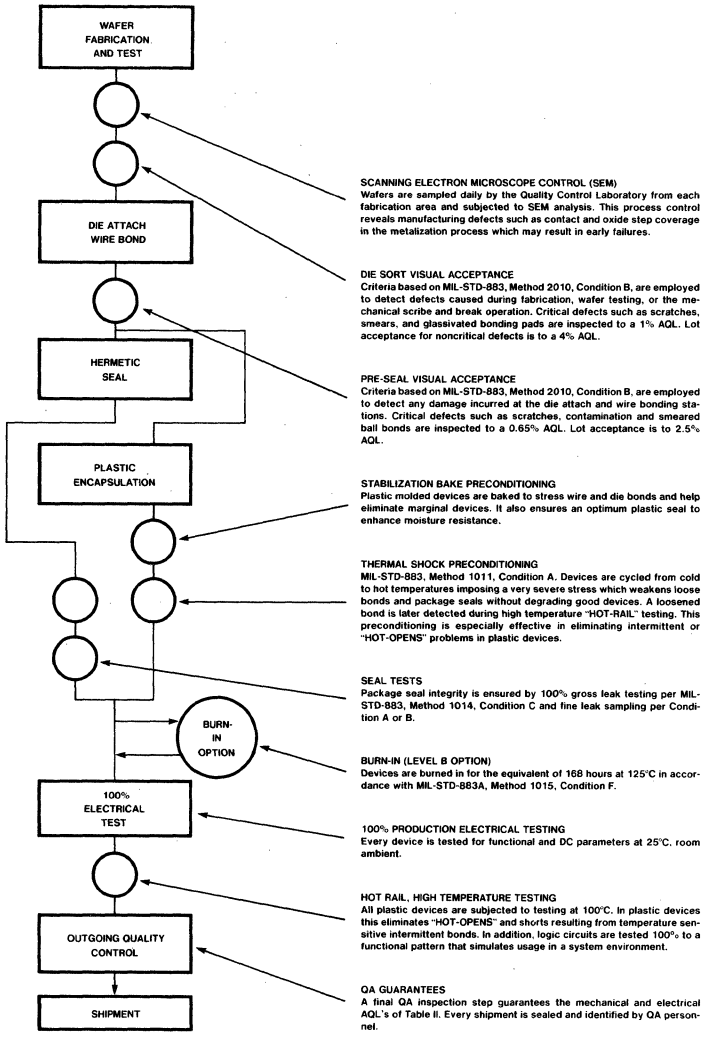

Figure 5

SURE II/883B RELIABILITY PROGRAM

Definition

Signetics is recognized as a manufacturer of reliable integrated circuts. Signetics realized long ago the need for a comprehensive reliability program to provide timely data representative of the entire Signetics product line. Thus the establishment of a Systematic and Uniform Reliability Evaluation program, known as SURE, which provides this data in a manner unique to the industry. Furthermore, this program is provided at no cost to customers.

The SURE Program is a Signetics in-house Qualification Test Program which has been in existence since 1963. The SURE Program is designed to monitor the continuing uniformity of all Signetics products and to demonstrate via periodic qualifications that Signetics products meet or exceed the stringent long-term reliability requirements of their intended applications.

The SURE Program is reviewed and modified annually to incorporate appropriate changes in military microelectronic test programs, products and demonstrated product capabilities, and market requirements. The 1978 SURE II/883B Reliability Program contains minor changes to the 1975 SURE II/883A Program, most significant of which is the inclusion of recent changes in military microelectronic test programs (i.e., inclusion of MIL-SD-883B, Method 5005.4 and MIL-M-38510D). The SURE II/883B Program continues to incorporate additional environmental tests to fulfill the need for special reliability assurance of plastic products.

For more detailed information regarding the SURE II program, refer to Section 11 of the 1979 Signetics Analog Applications Manual.

ANALOG CROSS REFERENCE

Manufacturer	SIGNETICS	AMD	FAIRCHILD	INTEL	MOTOROLA	NATIONAL	T.I.

TEMPERATURE RANGE CROSS REFERENCE

Commercial	NE	C	C	—	14, 34, 86	3, 86, 88	72, 74, 75
Military	SE	M	M	M	15, 35, 96	1, 96, 78	52, 54, 55

PACKAGE CROSS REFERENCE

Hermetic DIP	F-FE	D	D	C, D	L	D	J
Molded DIP	N	P	P	P	P_2	N	N
Mini-molded DIP	N	T	T	—	P_1	N	P
Metal can	H	H	H	—	G, R	H	L

PART NUMBER CROSS REFERENCES

TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT
AD741CN	μA741CN	CA555F	SE555F	DS8880J	DS8880F
AD559JD	MC1408-8F	CA555T	SE555H	DS8880N	DS8880N
AD559K	MC1408-8F	CA723CE	μA723CN	LM111D	LM111F
AD559KD	MC1408-8F	CA723CT	μA723CH	LM111H	LM111H
AD559S	MC1508-8F	CA723E	μA723N	LM111J	LM111F
AD559SD	MC1508-8F	CA723T	μA723H	LM111L	LM111H
AM555DC	NE555F	CA741CE	μA741CN	LM119D	LM119F
AM555DM	SE555F	CA741CF	μA741CFE	LM119H	LM119H
AM555HC	NE555H	CA741F	μA741FE	LM119J	LM119F
AM555HM	SE555H	CA747CF	μA747CF	LM124D	LM124F
AM555TC	NE555N	CA747CT	μA747CH	LM124J	LM124F
AM723DC	μA723CF	CA747F	μA747F	LM139D	LM139F
AM723DM	μA723F	CA747T	μA747H	LM139J	LM139F
AM723HC	μA723CH	CA748CE	μA748CN	LM158H	LM158H
AM723HM	μA723H	CA748CF	μA748CF	LM158JG	LM158FE
AM741DC	μA741CFE	CA748F	μA748F	LM158L	LM158H
AM741DM	μA741FE	CA1458E	MC1458N	LM161D	SE529F
AM747DC	μA747CF	CA1458F	MC1458FE	LM161H	SE529H
AM747DM	μA747F	CA1458T	MC1458H	LM161J	SE529F
AM747HC	μA747CH	CA1558T	MC1558H	LM193L	LM193H
AM747HM	μA747H	CA3081E	CA3081N	1LM211D	LM211F
AM748DC	μA748CF	CA3082E	CA3082N	LM211H	LM211H
AM748DM	μA748F	CA3183E	CA3183N	LM211J	LM211F
AMLM111H	LM111H	DM7820AJ	DS7820AF	LM219D	LM219F
AMLM211D	LM211F	DM7820J	DS7820F	LM219H	LM219H
AMLM211H	LM211H	DM7830J	DS7830F	LM219J	LM219F
AMLM311D	LM311F	DM7880J	DS7880F	LM224D	LM224F
AMLM311H	LM311H	DM8820AJ	DS8820AF	LM224J	LM224F
CA111F	LM111F	DM8820AN	DS8820AN	LM224N	LM224N
CA111T	LM111H	DM8820J	DS8820F	LM239D	LM239F
CA124F	LM124F	DM8820N	DS8820N	LM239J	LM239F
CA139AF	LM139AF	DM8830J	DS8830F	LM239N	LM239N
CA139F	LM139F	DM8830N	DS8830N	LM258H	LM238H
CA211F	LM211F	DM8880J	DS8880F	LM258JG	LM258FE
CA211T	LM211H	DM8880N	DS8880N	LM258L	LM258H
CA224F	LM224F	DS1488J	MC1488F	LM258P	LM258N
CA239AF	LM239F	DS1489AJ	MC1489AF	LM293L	LM293H
CA239F	LM239F	DS1489J	MC1489F	LM293P	LM293N
CA301AF	LM301AFE	DS7820AJ	DS7820AF	LM301AJG	LM301AFE
CA311F	LM311F	DS7820J	DS7820F	LM311D	LM311F
CA311T	LM311H	DS7830J	DS7830F	LM311H	LM311H
CA324E	LM324N	DS7880J	DS7880F	LM311J	LM311F
CA324F	LM324F	DS8820J	DS8820F	LM311J-14	LM311F
CA339E	LM339N	DS8820AJ	DS8820AF	LM311JG	LM311FE
CA339F	LM339F	DS8820AN	DS8820AN	LM311L	LM311H
CA555CE	NE555N	DS8820N	DS8820N	LM311N	LM311N
CA555CF	NE555F	DS8830J	DS8830F	LM311P	LM311N
CA555CT	NE555H	DS8830N	DS8830N	LM319D	LM319F

PART NUMBER CROSS REFERENCES (Cont'd)

TYPE TO BE REPLACED	SIGNETICS REPLACEMENT
LM319H	LM319H
LM319J	LM319F
LM319N	LM319N
LM324J	LM324F
LM324N	LM324N
LM339J	LM339F
LM339N	LM339N
LM358H	LM358H
LM358JG	LM358FE
LM358L	LM358H
LM358N	LM358N
LM358P	LM358N
LM361D	NE529F
LM361H	NE529H
LM361J	NE529F
LM361N	NE529N
LM381N	LM381N
LM382N	LM382N
LM387N	LM387N
LM393H	LM393H
LM393L	LM393H
LM393N	LM393N
LM393P	LM393N
LM555CH	NE555H
LM555CN	NE555N
LM555H	SE555H
LM556CD	NE556F
LM556CJ	NE556F
LM556CN	NE556N
LM556D	SE556F
LM556J	SE556F
LM565CH	NE565H
LM565CN	NE565N
LM565H	SE565H
LM566CH	NE566H
LM566CN	NE566N
LM566H	SE566H
LM567H	SE567H
LM567CN	NE567N
LM567H	SE567H
LM723CD	μA723CF
LM723CH	μA723CH
LM723CJ	μA723CF
LM723CN	μA723CN
LM723D	μA723F
LM723H	μA723H
LM723J	μA723F
LM723N	μA723N
LM733CD	μA733CF
LM733CH	μA733CH
LM733CJ	μA733CF
LM733CN	μA733CN
LM733D	μA733F
LM733H	μA733H
LM733T	μA733F
LM741CJ	μA741CFE
LM741CN	μA741CN
LM747CD	μA747CF
LM747CH	μA747CH
LM747CJ	μA747CF
LM747D	μA747F
LM747H	μA747H
LM747J	μA747F
LM748CJ	μA748CF
LM748CN	μA748CN
LM748J	μA748F
LM1458H	MC1458H
LM1458J	MC1458FE
LM1458N	MC1458N
LM1496H	MC1496H
LM1496J	MC1496F
LM1496N	MC1496N
LM1558H	MC1558H
LM1558J	MC1558FE
LM1596H	MC1596H
LM1596J	MC1596F
LM2901J	LM2901F
LM2901N	LM2901N
LM2902J	LM2902F
LM2902N	LM2902N
LM2903L	LM2903H
LM2903N	LM2903N
LM2903P	LM2903N
MC1408L6	MC1408-6F
MC1408L7	MC1408-7F
MC1408L8	MC1408-8F
MC1408P6	MC1408-6N
MC1408P7	MC1408-7N
MC1408P8	MC1408-8N
MC1411P	ULN2001N
MC1416P	ULN2004N
MC1455G	NE555H
MC1455P1	NE555N
MC1455U	NE555FE
MC1456CP1	MC1456N
MC1456CU	MC1456FE
MC1456P1	MC1456N
MC1456U	MC1456FE
MC1458CG	MC1458H
MC1458CL	MC1458F
MC1458CP1	MC1458N
MC1458CU	MC1458FE
MC1458G	MC1458H
MC1458JG	MC1458FE
MC1458P	MC1458N
MC1458P1	MC1458N
MC1458SG	NE5535H
MC1458SL	NE5535F
MC1458SP1	NE5535N
MC1458U	MC1458FE
MC1488L	MC1488F
MC1489AL	MC1489AF
MC1489L	MC1489F
MC1496G	MC1496H
MC1496L	MC1496F
MC1496P	MC1496N
MC1508L8	MC1508-8F
MC1555G	SE555H
MC1555U	SE555FE
MC1556U	MC1556FE
MC1558G	MC1558H
MC1558JG	MC1558FE
MC1558SG	SE5535H
MC1558SL	SE5535F
MC1558U	MC1558FE
MC1596G	MC1596H
MC1596L	MC1596F
MC1723CF	μA723CH
MC1723CL	μA723CF
MC1723CP	μA723CN
MC1723G	μA723H
MC1723L	μA723F
MC1733CG	μA733CH
MC1733CL	μA733CF
MC1733CP	μA733CN
MC1733G	μA733H
MC1733L	μA733F
MC1741CP1	μA741CN
MC1741CU	μA741CFE
MC1741SCG	NE535H
MC1741SCP1	NE535N
MC1741SCU	NE535FE
MC1741SG	SE535H
MC1741SU	SE535FE
MC1741U	SE535FE
MC1747CG	μA747CH
MC1747CL	μA747CF
MC1747CP2	μA747CN
MC1747G	μA747H
MC1747L	μA747F
MC1748CP1	μA748CN
MC1748G	μA748H
MC3302L	MC3302F
MC3302P	MC3302N
MC3456L	NE556F
MC3456P	NE556N
MC3556L	SE556F
MC75107L	75S107F
MC75107P	75S107N
MC75108L	75S108F
MC75108P	75S108N
MLM111G	LM111H
MLM111L	LM111F
MLM111U	LM111FE
MLM124L	LM124F
MLM139AL	LM139AF
MLM139L	LM139F
MLM158G	LM158H
MLM158U	LM158FE
MLM211G	LM211H
MLM211L	LM211F
MLM211U	LM211FE
MLM224L	LM224F
MLM224P	LM224N
MLM239AL	LM239AF
MLM239AP	LM239AN
MLM239L	LM239F
MLM239P	LM239N
MLM258G	LM258H
MLM258P1	LM258N
MLM258U	LM258FE
MLM301AP1	LM301AN
MLM301AU	LM301AFE
MLM311G	LM311H
MLM311L	LM311F
MLM311P1	LM311N
MLM311U	LM311FE
MLM324L	LM324F
MLM324P	LM324N
MLM339AL	LM339AF
MLM339AP	LM339AN
MLM339L	LM339F
MLM339P	LM339N
MLM358G	LM358H
MLM358P1	LM358N

PART NUMBER CROSS REFERENCES (Cont'd)

TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT
MLM358U	LM358FE	μA0802DM-1	MC1508-8F	SN72747J	μA747CF
MLM565CP	NE565N	μA0802PC-1	MC1408-8N	SN72747L	μA747CH
MLM2901P	LM2901N	μA0802PC-2	MC1408-7N	SN72747N	μA747CN
MLM2902P	LM2902N	μA0802PC-3	MC1408-6N	SN72748J	μA748CF
μA111HM	LM111H	μA1458HC	MC1458H	SN72748P	μA748CN
μA124DM	LM124F	μA1458TC	MC1458N	SN72771N	MC1456N
μA224DM	LM224F	μA1558HM	MC1558H	SN75107AT	75S107F
μA301ANC	LM301AN	μA2901PC	LM2901N	SN75107AN	75S107N
μA311HC	LM311H	μA2902PC	LM2902N	SN75108AT	75S108F
μA311TC	LM311N	NE555JG	NE555FE	SN75108AN	75S108N
μA324DC	LM324F	NE555L	NE555H	SN75182J	DS8820F
μA324PC	LM324N	NE555P	NE555N	SN75182N	DS8820N
μA339ADC	LM339AF	NE592G	NE592H	SN75183J	DS8830F
μA339DC	LM339F	NE592L	NE592F	SN75183N	DS8830N
μA339PC	LM339N	RC723D	μA723CF	SN75188J	MC1488F
μA555HC	NE555H	RC723T	μA723CH	SN75188N	MC1488N
μA555HM	SE555H	RC733D	μA733CF	SN75189AT	MC1489AF
μA555TC	NE555N	RC733T	μA733CH	SN75189AN	MC1489AN
μA556DC	NE556F	RC741DN	μA741CN	SN75189J	MC1489F
μA556DM	SE556F	RC747D	μA747CF	SN75189N	MC1489N
μA556PC	NE556N	RC747T	μA747CH	SN75207J	75S207F
μA723CJ	μA723CF	RC1458DN	MC1458N	SN75207N	75S207N
μA723CL	μA723CH	RC1458T	MC1458H	SN75208J	75S208F
μA723CN	μA723CN	RC1488DC	MC1488F	SN75208N	75S208N
μA723DC	μA723CF	RC1489ADC	MC1489AF	TBB0747	μA747CH
μA723DM	μA723F	RC1489DC	MC1489F	TBB0748B	μA748CN
μA723HC	μA723CH	SE555JG	SE555FE	TBB1458	MC1458H
μA723HM	μA723H	SE555L	SE555H	TBB1458B	MC1458N
μA723MJ	μA723F	SE592G	SE592H	TBC0747	μA747H
μA723ML	μA723H	SE592L	SE592F	TBC1458	MC1558H
μA723PC	μA723CN	SFC2111M	LM111H	TDB0555	NE555H
μA733CJ	μA733CF	SFC2211	LM211H	TDB0555B	NE555N
μA733CL	μA733CH	SFC2301ADC	LM301AN	TDB0556A	NE556N
μA733CN	μA733CN	SFC2311	LM311H	TDB0723	μA723CH
μA733DC	μA733CF	SFC2741DC	μA741CN	TDB0723A	μA723CN
μA733DM	μA733F	SFC2741EC	μA741CN	TDC0555	SE555H
μA733HC	μA733CH	SFC2741EM	μA741N	TDC0723	μA723H
μA733HM	μA733H	SFC2748DC	μA748CN	ULN2001A	ULN2001N
μA733MJ	μA733F	SN52555L	SE555H	ULN2003A	ULN2003N
μA733ML	μA733H	SN52558L	MC1558H	ULN2004A	ULN2004N
μA740HC	μA740CH	SN52723J	μA723F	556CJ	NE556CN
μA741CJG	μA741CFE	SN52723L	μA723H	723BE	μA723H
μA741CP	μA741CN	SN52733J	μA733F	723CE	μA723CH
μA741MJG	μA741FE	SN52733L	μA733H	723CT	μA723CN
μA741TC	μA741CN	SN52747J	μA747F	723CL	μA723CF
μA747CJ	μA747CF	SN52747L	μA747H	733BE	μA733H
μA747CL	μA747CH	SN52748J	μA748F	733CE	μA733CH
μA747CN	μA747CN	SN55182J	DS7820F	733CJ	μA733CN
μA747DC	μA747CF	SN55182N	DS7820N	747BE	μA747H
μA747DM	μA747F	SN55183J	DS7830F	747BL	μA747F
μA747HC	μA747CH	SN55183N	DS7830N	747CE	μA747CH
μA747HM	μA747H	SN72301AP	LM301AN	747CJ	μA747CN
μA747MJ	μA747F	SN72311J	LM311F	747CL	μA747CF
μA747ML	μA747H	SN72311L	LM311H	748BL	μA748F
μA747PC	μA747CN	SN72311P	LM311N	748CL	μA748CF
μA748CJ	μA748CF	SN72555L	NE555H	1458CE	MC1458H
μA748CP	μA748CN	SN72555P	NE555N	1458CP	MC1458N
μA748DC	μA748CF	SN72558L	MC1458H	1458E	MC1458H
μA748DM	μA748F	SN72558P	MC1458N	1458P	MC1458N
μA748MJ	μA748F	SN72723L	μA723CH	1558E	MC1558H
μA748TC	μA748CN	SN72723N	μA723CN	2740CE	μA740CH
μA796HC	MC1496H	SN72733J	μA733CF	9665DC	ULN2001F
μA0802DC-1	MC1408-8F	SN72733L	μA733CH	0665PC	ULN2001N
μA0802DC-2	MC1408-7F	SN72733N	μA733CN	UA3089N	CA3089N
μA0802DC-3	MC1408-6F	SN72741P	μA741CN	UA3089	CA3089N

PART NUMBER CROSS REFERENCES (Cont'd)

TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT	TYPE TO BE REPLACED	SIGNETICS REPLACEMENT
UA760HM	NE527H	UA758PC	UA758N	SN7512N	NA733N
UA760DC	NE527N	UA798HM	LM158H	SN76689N	CA3089N
UA798TC	NE532N	UA739PC	LM387N	ULN2210A	UA758N
UA740HM	NE536N	UA739PC	LM382N	ULN2244	μA758N
UA556PC	NE556N	UA796PC	MC1496N	UA740HC	μA740CH
UA0801	DAC-08N	UA760HC	NE529N		
UA0801A	DAC-08AN	SN7512L	NA733CH		

SECTION I
OPERATIONAL AMPLIFIERS

Section 1—OPERATIONAL AMPLIFIERS

LF355/356	High Performance JFET Input Operational Amplifiers	28
LM124/224/324	General Purpose Single Supply Operational Amplifier	37
LM158/258/358	Dual Operational Amplifier Single or Dual Power Supply Operation	67
LM301A	High Performance Amplifier	41
LM13600/13600A	Dual Operational Transconductance Amplifier	45
MC1456/1556	High Performance Operational Amplifier	48
MC1458/1558	General Purpose Operational Amplifier	51
NE/SE530/5530	High Slew Rate Operational Amplifier	56
NE/SE531	High Slew Rate Operational Amplifier	61
NE/SE/SA532	Dual Operational Amplifier Single or Dual Power Supply Operation	67
NE/SE535/5535	Single or Dual High Slew Rate Operational Amplifier	71
NE/SE538/5538	Single or Dual High Slew Rate Operational Amplifier	76
NE/SE5512	Dual High Performance Operational Amplifier	81
NE/SE5514	Quad High Performance Operational Amplifier	87
NE5517/5517A	Dual Operational Transconductance Amplifier	92
NE/SE5532/5532A	Internally Compensated Dual Low Noise Operational Amplifier	98
NE/SE5533/5533A	Single and Dual Low Noise Operational Amplifier	104
NE/SE5534/5534A	Single and Dual Low Noise Operational Amplifier	104
NE/SE5539	Ultra High Frequency Operational Amplifier	109
SA534	General Purpose Single Supply Operational Amplifier	37
μA741/741C/SA741C	General Purpose Operational Amplifier	119
μA747/747C/SA747C	Dual Operational Amplifier	124
μA748/748C	General Purpose Operational Amplifier	130

OPERATIONAL AMPLIFIERS DEFINITIONS

T_A
Ambient temperature range. Range of the surrounding environment of the operating device.

T_J
Junction Temperature. The maximum temperature of the device. 150°C is standard for silicon devices.

T_{STG}
Storage temperature range. Temperature range that the device can be stored in a non-operating condition.

T_{SOLD}
Soldering Temperature. The temperature which can be applied to the lead frame of the device for short periods of time (normally specified for a duration of 10 sec).

Absolute Maximum Rating
Operating safe zones exceeding these limits could cause permanent damage to the device and are not meant to imply that devices can operate at these limits.

Power Dissipation
The power that the device can safely handle at 25°C. The dissipation must be derated as indicated for the individual package type.

Package Type Designation
See full package designations in Appendix.

V_{CC} ($-V_{CC}$)
Supply Voltage. The range of power supply voltage over which the device will operate safely.

Acquisition Time
The time required to acquire a new analog input voltage with an output step of 10V. Note that acquisition time is not just the time required for the output to settle, but also includes the time required for all internal nodes to settle so that the output assumes the proper value when switched to the hold mode.

Aperture Delay Time
The time elapsed from the hold command to the opening of the switch.

Aperture Jitter
Also called "aperture uncertainty time", it's the time variation or uncertainty with which the switch opens, or the time variation in aperature delay.

Aperture Time
The delay required between "hold" command and an input analog transition, so that the transition does not affect the hold output.

Bandwidth
The frequency at which the gain is down 3dB from its dc value. It's measured in sample (track) mode with a small-signal sine wave that doesn't exceed the slew rate limit.

Effective Aperture Delay
The time difference between the hold command and the time at which the input signal is at the held voltage.

Figure Of Merit
The ratio of the available charging current during sample mode to the leakage current during hold mode.

Hold-Mode Droop
The output voltage change per unit of time while in hold. Commonly specified in V/s, μV/μs or other convenient units.

Hold-Mode Feed Through
The percentage of an input sinusoidal signal that is measured at the output of a sample-hold when it's in hold mode.

Hold Settling Time
The time required for the output to settle within 1mV of final value after the "hold" logic command.

Sample-To-Hold Offset Error
The difference in output voltage between the time the switch starts to open, and the time when the output has settled completely. It is caused by charge being transferred to the hold capacitor switch as it opens.

Slew Rate
The fastest rate at which the sample & hold output can change (specified in V/μs).

Hold Step
The voltage step at the output of the sample and hold when switching from sample mode to hold mode with a steady (dc) analog input voltage. Logic swing is 5V.

Dynamic Sampling Error
The error introduced into the held output due to a changing analog input at the time the hold command is given. Error is expressed in mV with a given hold capacitor value and input slew rate. Note that this error term occurs even for long sample times.

Gain Error
The ratio of output voltage swing to input voltage swing in the sample mode expressed as a percent difference.

Threshold
Level shall be defined as that level which causes the switch control to change state.

Average Input Offset Current T^O coeff.
The change in input offset current divided by the change to ambient temperature producing it.

Average Input Offset Voltage T^O coeff.
The change in input offset voltage divided by the change in ambient temperature producing it.

Common Mode Input Resistance
The resistance looking into both inputs, with inputs tied together.

Common Mode Rejection Ratio (CMRR)
The ratio of the change of input offset voltage to the input common mode voltage change producing it.

Full Power Bandwidth
The maximum frequency at which the full sinewave output might be obtained.

Input Bias Current
The average of the two input currents at zero output voltage. In some cases, the input current is measured for either input independently.

OPERATIONAL AMPLIFIERS DEFINITIONS (Cont'd)

Input Capacitance

The capacitance looking into either input terminal with the other grounded.

Input Current

The current into an input terminal.

Input Noise Voltage

The square root of the mean square narrow-band noise voltage referred to the input.

Input Offset Current

The difference in the currents into the two input terminals with the output at zero volts.

Input Offset Voltage

That voltage which must be applied between the input terminals to obtain zero output voltage. The input offset voltage may also be defined for the case where two equal resistances are inserted in series with the input leads.

Input Resistance

The resistance looking into either input terminal with the other grounded.

Input Voltage Range

The range of voltages on the input terminals for which the amplifier operates within specifications. In some cases, the input offset specifications apply over the input voltage range.

Large-Signal Voltage Gain

The ratio of the maximum output voltage swing to the change in input voltage required to drive the output to this voltage.

Output Resistance

The resistance seen looking into the output terminal with the output at null. This parameter is defined only under small signal conditions at frequencies above a few hundred cycles to eliminate the influence of drift and thermal feedback.

Output Short-Circuit Current

The maximum output current available from the amplifier with the output shorted to ground or to either supply.

Output Voltage Swing

The peak output swing, referred to zero, that can be obtained.

Power Consumption

The dc power required to operate the amplifier with the output at zero and with the output at zero and with no load current.

Power Supply Rejection Ratio

The ratio of the change in input offset voltage to the change in supply voltages producing it.

Rise Time

The time required for an output voltage step to change from 10% to 90% of its final value.

Slew Rate

The maximum rate of change of output voltage under large signal condition.

Supply Current

The current required from the power supply to operate the amplifier with no load and the output at zero.

Temperature Stability of Voltage Gain

The maximum variation of the voltage gain over the specified temperature range.

NOTE

Refer to Section 3 of the 1979 Analog Applications Manual for an in depth explanation of Operational Amplifiers and their applications

Device #	Com-plexity	Temp. Range	Max. Input Voltage		Max. Input Current		Min. A VOL V/mV	Typ. BW A_V=1 MHz	Typ. Slew Rate V/μs	Diff. Inp. Volt. V	Typical Common Mode Rej. Volt		Typ. PSRR dB	Supply Volt. Typ.		Outp. Curr. mA	Max Supply Curr. mA	Min. Outp. Volt. Swing V	Int. Com-pensa-tion	Input Noise Volt. N√Hz	Packages
			Offset mV	Drift μV/°C	Offset nA	Bias nA					Ratio dB	Range V		Min. V	Max. V						
NE536	Sing.	Ind.	30●	30●	5pA■	0.1▲	25	1.0	6.0	±30	80	±11	80	±6	±20	5.0	8.0▲	±12	yes		H
SU536	Sing.	Ext.	30	20●	5pA■	3.0	50	1.0	6.0	±30	80	±11	86	±6	±18	5.0	5.5▲	±12	yes		H
NE530	Sing.	Ind.	6.0	6●	80	200	25	3.0	35	±30	90	±13	70	±15	±18	25▲	3.0	±12	yes		H,N,FE
SE530	Sing.	Ind.	3.0	15	20	100	25	3.0	35	±30	90	±13	70	±15	±18	25▲	3.0	±12	yes		H,N,FE
SE538	Sing.	Mil.	3.0	15	20	100	25	6.0	60	±30	90	±13	70	±15	±22	25▲	3.6	±12	yes		H,N,FE
NE538	Sing.	Ind.	6.0	6●	80	200	25	6.0	60	±30	90	±13	70	±15	±18	25▲	2.2●	±12	yes		H,N,FE
NE5534/A	Sing.	Ext.	4.0▲		300▲	1500▲	30▲	10.0	13	±5	100	±13	100	±3	±22	38■	6.5▲	±12	yes	4.5	H,N,FE
SE5534/A	Sing.	Mil.	3.0		500	1500	25	10.0	13	±5	100	±13	100	±3	±22	38■	9.0	±12	yes	4.5	H,N,FE
μA740C	Sing.	Ind.	30●		0.06●	10.0	500●	1.0	6.0	±30	80	±12	80	±5	±22	5.0	8.0▲	±12	yes		H
μA741	Sing.	Mil.	6.0		500	1500	25	1.0	0.5	±30	90	±13	100	±3	±22	5.0	2.5	±12	yes		N,FE
μA741C	Sing.	Ind.	7.5		300	800	15	1.0	0.5	±30	90	±13	100	±3	±18	5.0	2.8▲	±12	yes		N,FE
μA748	Sing.	Mil.	6.0		500	1500	25	1.0	0.5	±30	90	±13	90	±3	±22	5.0	2.8	±12	no		N,F
μA748C	Sing.	Ind.	7.5		300	800	25	1.0	0.5	±30	90	±13	90	±3	±18	5.0	2.8	±12	no		N,F
LM158	Dual	Mil.	7.0	7●	100	300	25	1.0		32	70	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		H
LM258	Dual	Ext.	9.0	7●	150	500	15	1.0		32	65	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		H,N,FE
LM358	Dual	Ind.	9.0	7●	150	500	15	1.0		32	65	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		H,N,FE
MC1458	Dual	Ind.	7.5		300	800	15	1.0	0.8	±30	90	±13	90	±3	±18	5.0	5.6▲	±12	yes		H,N,FE
MC1558	Dual	Mil.	6.0		500	1500	25	1.0	0.5	±30	90	±13	90	±3	±22	5.0	5.0▲	±12	yes		H,N,FE
SA1458	Dual	Ext.	7.5		500	1500	15	1.0	0.8	±30	90	±13	90	±3	±18	5.0	5.0▲	±12	yes		N
NE532	Dual	Ind.	7.5	7●	150	500	15	1.0		32	70	$V_S-1.5$	100	3	30	40	1.2	V_S-2	yes		H,N,FE
SA532	Dual	Ext.	7.5	7.5●	150	500	15	1.0		32	70	$V_S-1.5$	100	3	30	40	1.2	V_S-2	yes		N
SE532	Dual	Mil.	7.0	7●	100	300	25	1.0		32	70	$V_S-1.5$	100	3	30	40	1.2	V_S-2	yes		H,FE
μA747	Dual	Mil.	6.0		500	1500	25	1.0	.05	±30	90	±13	90	±3	±22	5.0	3.3	±12	yes		F,H,N
μA747C	Dual	Ind.	7.5		300	800	15	1.0	0.5	±30	90	±13	90	±3	±18	5.0	3.3	±12	yes		F,H,N
SE5535	Dual	Mil.	3.0	15	20	100	25	1.0	15	±30	90	±13	70	±3	±22	5.0	3.3	±12	yes		H,N
NE5535	Dual	Ind.	6.0	6●	80	200	25	1.0	15	±30	90	±13	70	±3	±18	5.0	2.0●	±12	yes		H,N
LM124	Quad	Mil.	7.0	7●	100	300	25	1.0		32	85	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		F
LM224	Quad	Ext.	9.0	7●	150	500	15	1.0		32	85	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		F,N
LM324	Quad	Ind.	9.0	7●	150	500	15	1.0		32	85	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		F,N
SA534	Quad	Ext.	9.0	7●	150	500	15	1.0		32	85	$V_S-1.5$	100	3	30	40	2.0	V_S-2	yes		N,F
LM2902	Quad	Ext.	15.0	7●	200	1000	15	1.0		26	85	$V_S-1.5$	100	3	26	40	2.0	V_S-2	yes		N
SE5538	Dual	Mil.	3.0	15	20	100	25	6.0	60	±30	90	±13	70	±15	±22	25▲	3.6	±12	yes		H,N
NE5538	Dual	Ind.	6.0	6●	80	200	25	6.0	60	±30	90	±13	70	±15	±18	25▲	2.2●	±12	yes		H,N
SE5530	Dual	Mil.	3.0	15	20	100	25	3.0	35	±30	90■		70	±3	±22		3.6	±13	yes		H,N
NE5530	Dual	Ind.	6.0	6●	80	200	25	3.0	35	±30	90■		70	±3	±18		2.2	±13	yes		H,N
NE5532/A	Dual	Ind.	5.0		200	1000	10	10	9	±5	100		80	±5	±22		16	±15	yes	6	H,FE,N
NE5533/A	Dual	Ind.	5.0		400	2000	15	10	13	±5	100		80	±5	±22		8	±15	yes	4.5	N,F

NOTES
1. Military −55°C-+125°C
   Extended −25°C-+85°C
   Industrial 0°C-+70°C
2. Specifications guaranteed over full temperature range unless otherwise indicated by following marks:
● Typical over full temperature range ▲ Guaranteed at 25°C ■ Typical at 25°C

MC1458 DUAL OPERATIONAL AMPLIFIER

COMPETITION	INDUSTRY VALUE	KEY PARAMETER	SIGNETICS AVAILABLE VALUE	SIGNETICS ORIGINATED DEVICES		QR&A		COMMENTS
						SURE II	SUPR II	
MOTOROLA FAIRCHILD RAYTHEON N.S.C. T.I.	.8	Slew Rate	10 to 60 V/μ sec	NE/SE	5530 5538	Yes Yes		
				NE	5532 5532A 5533 5533A	Yes Yes Yes Yes		
	14	Full power out	30 to 300 kHz	NE/SE	5530 5538	Yes Yes		
				NE	5532 5532A 5533 5533A	Yes Yes		
	45	Noise	4, 5 nv/$\sqrt{Hz}$	NE	5532 5532A 5533 5533A	 Yes Yes		
	6	Offset voltage	4 mv	NE	5532 5532A 5533 5533A	 Yes Yes		
	500	Bias current	60 to 150 na	NE/SE	5530 5538	Yes Yes		
	1	Gain bandwidth	1.5 ↓ 15 MHz	NE/SE	5530 5538	Yes Yes		
				NE	5533 5533A 5532 5532A	Yes Yes		
	2,000	Maximum loading	600 OHM	NE	5533 5533A 5532 5532A	Yes Yes		

SIGNETICS REPLACEMENT STANDARDS

μa741 SINGLE OPERATIONAL AMPLIFIER

COMPETITION	INDUSTRY VALUE	KEY PARAMETER	SIGNETICS AVAILABLE VALUE	SIGNETICS ORIGINATED DEVICES	QR&A SURE II	QR&A SUPR II	COMMENTS
MOTOROLA FAIRCHILD RAYTHEON N.S.C. T.I.	0.5	Slew rate	10 to 600 V/μ sec	NE/SE 530 NE/SE 538 NE/SE 5534 NE/SE 5534A NE 5539*	Yes Yes Yes Yes	 Yes Yes	*Not pin for pin replacement.
	10	Full power out	300 to 350,000 kHz	NE/SE 530 NE/SE 538 NE/SE 5534 NE/SE 5534A NE 5539*	Yes Yes Yes Yes	 Yes Yes	*Not pin for pin replacement.
	45	Noise	4, 5 nv/√Hz	NE/SE 5534 NE/SE 5534A	Yes Yes	Yes Yes	
	5	Offset voltage	4 mv	NE/SE 5534 NE/SE 5534A	Yes Yes	Yes Yes	
	500	Bias current	60 to 150 na	NE/SE 530 NE/SE 538	Yes Yes		
	1	Gain bandwidth	1.5 ↓ 1200 MHz	NE/SE 530 NE/SE 538 NE/SE 5534 NE/SE 5534A NE 5539*	Yes Yes Yes Yes	 Yes Yes	*Not pin for pin replacement.
	2,000	Maximum loading	600 OHM	NE/SE 5534 NE/SE 5534A	Yes Yes	Yes Yes	

LF355/356-H,N

DESCRIPTION

The LF355 and LF356 operational amplifiers employ well matched, high voltage JFET input structures on the same monolithic chip as bipolar devices. These amplifiers feature low input bias and offset currents, low offset voltage and offset voltage drift, coupled with offset adjust which does not degrade drift or common mode rejection. The devices are also designed for high slew rate, wide bandwidth, extremely fast settling time and low noise.

COMMON FEATURES

(TYPICAL)

- **Low input bias current 50pA**
- **Low input offset current 10pA**
- **High input impedance $10^{12}\Omega$**
- **Low input offset voltage 3mV**
- **Low V_{OS} temperature drift $5\mu V/°C$**
- **Low input noise current $0.01pA/\sqrt{Hz}$**

APPLICATIONS

- **Precision high speed integrators**
- **Fast A/D, D/A converters**
- **High impedance buffers**
- **Wideband, low noise, low drift amplifier**

PIN CONFIGURATION

H PACKAGE*

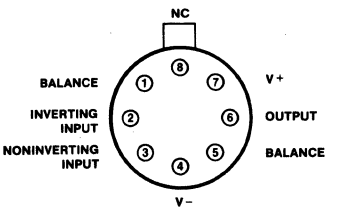

ORDER PART NO.

LF355H LF356H

*Metal cans (H) not recommended for new designs

N PACKAGE

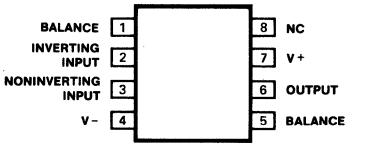

ORDER PART NO.

LF355N LF356N

EQUIVALENT SCHEMATIC

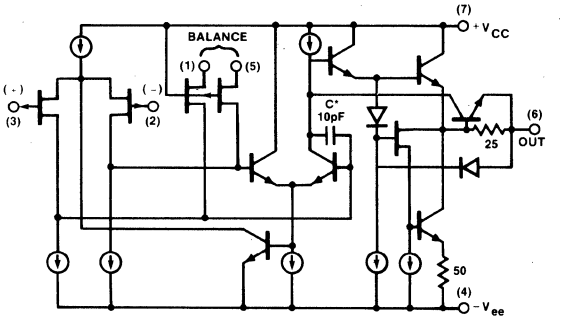

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	±18	V
Power dissipation	500	mW
Operating temperature range	0 to +70	°C
T_j (Max)	100	°C
Input voltage range[1]	±20	V
Output short circuit duration	Continuous	
Storage temperature range	−65 to +150	°C
Lead temperature (soldering 10 sec.)	300	°C

NOTE

1. Unless otherwise specified, the absolute maximum negative input voltage is equal to the negative power supply voltage.

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.[1]

PARAMETER	TEST CONDITIONS	LF355			LF356			UNIT
		Min	Typ	Max	Min	Typ	Max	
SR Slew rate	$A_V = 1$		5			12		V/μs
GBW Gain bandwidth product			2.5			5		MHz
t_s Settling time[1] to 0.01%			4			1.5		μs
e_n Equiv. input noise volt.	$R_S = 100\Omega$							
	f = 100Hz		25			15		$nV/\sqrt{Hz}$
	f = 1000Hz		20			12		$nV/\sqrt{Hz}$
i_n Equiv. input noise current	f = 100Hz		0.01			0.01		$pA/\sqrt{Hz}$
	f = 1000Hz		0.01			0.01		$pA/\sqrt{Hz}$
C_{IN} Input capacitance			3			3		pF

NOTE

1. Settling time is defined here, for a unity gain inverter connection using 2kΩ resistors for the LF355/6. It is the time required for the error voltage (the voltage at the inverting input pin on the amplifier) to settle to within 0.01% of its final value from the time a 10V step input is applied to the inverter.

TYPICAL DC PERFORMANCE CHARACTERISTICS

INPUT BIAS CURRENT

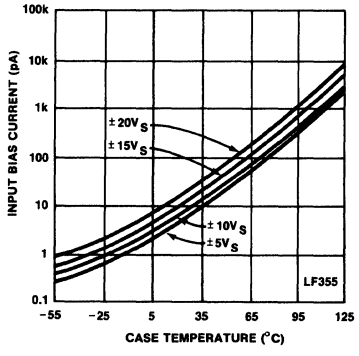

INPUT BIAS CURRENT

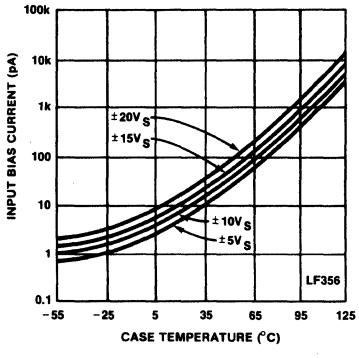

INPUT BIAS CURRENT

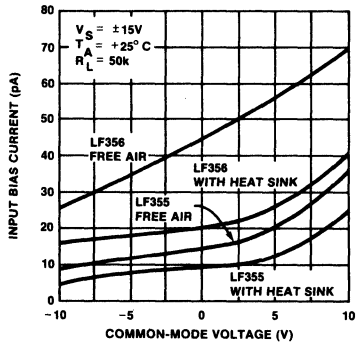

VOLTAGE SWING

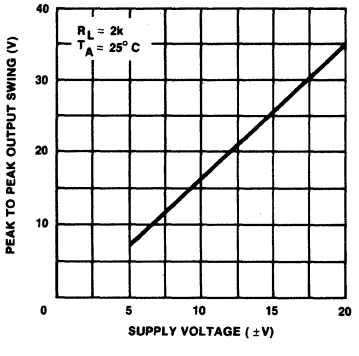

SUPPLY CURRENT

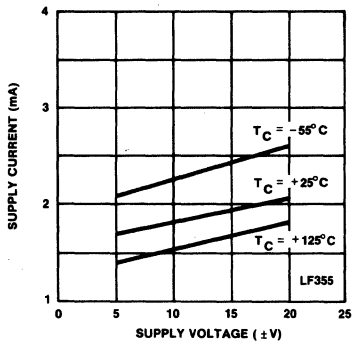

SUPPLY CURRENT

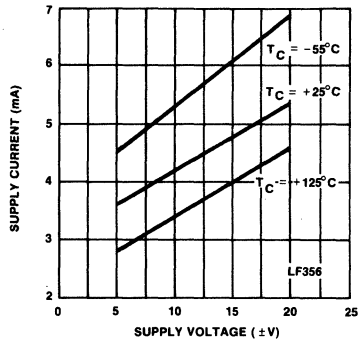

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	LF355/356			UNIT
			Min	Typ	Max	
V_{OS}	Input offset voltage	$R_S = 50\Omega$		3	10 13	mV mV
$\Delta V_{OS}/\Delta T$	Avg. TC of input offset voltage	$R_S = 50\Omega$		5		$\mu V/°C$
$\Delta TC/\Delta V_{OS}$	Change in average TC[2] with V_{OS} adjust	$R_S = 50\Omega$		0.5		$\mu V/°C$ per mV
I_{OS}	Input offset current[1,3]	$T_J = 25°C$ $T_J \leq T_{high}$		3	50 2	pA nA
I_B	Input bias current[1,3]	$T_J = 25°C$ $T_J \leq T_{high}$		30	200 8	pA nA
R_{IN}	Input resistance	$T_J = 25°C$				Ω
A_{VOL}	Large signal voltage gain	$V_S = \pm 15V$ $V_O = \pm 10V$, $R_L = 2k\Omega$ Over temp.	25 15	10^{12} 200		V/mV V/mV
V_O	Output voltage swing	$V_S = \pm 15V$, $R_L = 10k\Omega$ $V_S = \pm 15V$, $R_L = 2k\Omega$	±12 ±10	±13 ±12		V V
V_{CM}	Input common mode Voltage range	$V_S = \pm 15V$	±10	+15.1 -12		V V V
CMRR	Common-mode rejection ratio		80	100		dB
PSRR	Supply volt. rej. ratio[4]		80	100		dB

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER	LF355			LF356			UNIT
	Min	Typ	Max	Min	Typ	Max	
Supply current		2	4		5	10	mA

NOTES

1. These specifications apply for $V_S = \pm 15V$ and $0° C \leq T_A \leq +70°C$. V_{OS}, I_B and I_{OS} are measured at $V_{CM} = 0$.
2. The Temperature Coefficient of the adjusted input offset voltage changes only a small amount ($0.5\mu V/°C$ typically) for each mV of adjustment from its original unadjusted value. Common mode rejection and open loop voltage gain are also unaffected by offset adjustment.
3. The input bias currents are junction leakage currents which approximately double for every 10°C increase in the junction temperature, T_J. Due to limited production test time, the input bias currents measured are correlated to junction temperature. In normal operation the junction temperature rises above the ambient temperature as a result of internal power dissipation, Pd. $T_j = T_A + \theta_{jA}$ Pd where θ_{jA} is the thermal resistance from junction to ambient. Use of a heat sink is recommended if input bias current is to be kept to a minimum.
4. Supply Voltage Rejection is measured for both supply magnitudes increasing or decreasing simultaneously, in accordance with common practice.

TYPICAL DC PERFORMANCE CHARACTERISTICS (Cont'd)

NEGATIVE CURRENT LIMIT

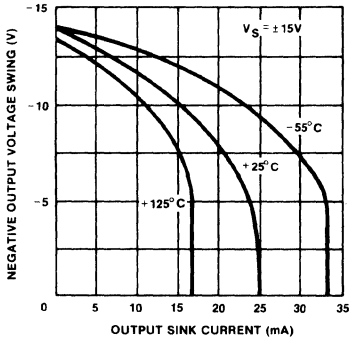

POSITIVE CURRENT LIMIT

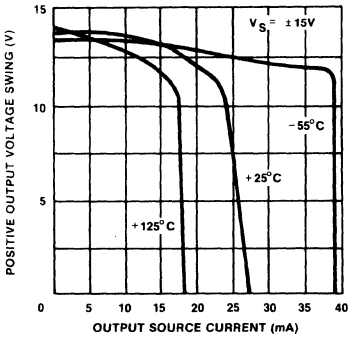

POSITIVE COMMON-MODE INPUT VOLTAGE LIMIT

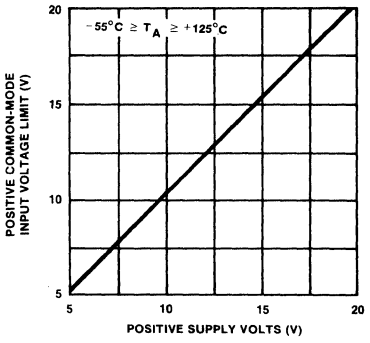

NEGATIVE COMMON-MODE INPUT VOLTAGE LIMIT

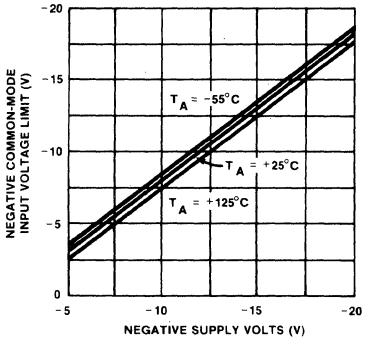

OPEN LOOP VOLTAGE GAIN

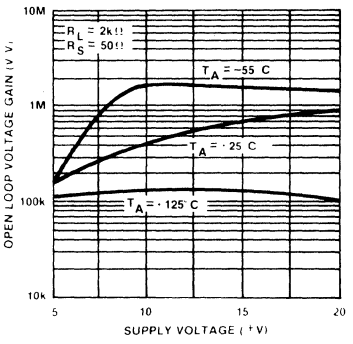

OUTPUT VOLTAGE SWING

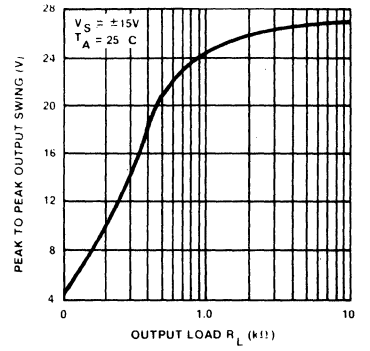

TYPICAL AC PERFORMANCE CHARACTERISTICS

GAIN BANDWIDTH

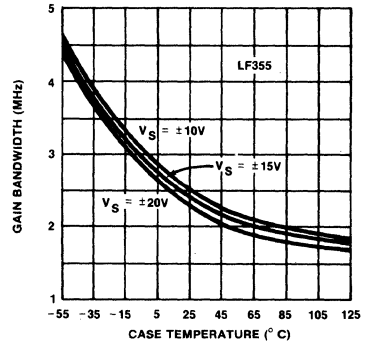

UNITY GAIN BANDWIDTH

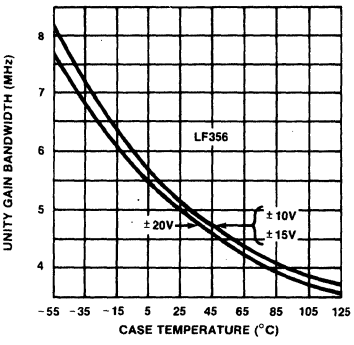

NORMALIZED SLEW RATE

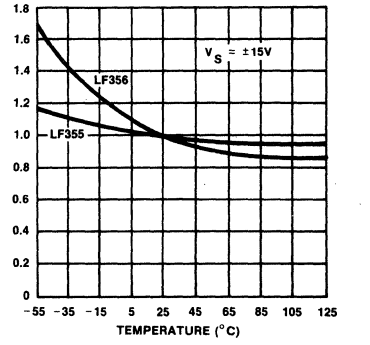

TYPICAL AC PERFORMANCE CHARACTERISTICS (Cont'd)

LF355 SMALL SIGNAL PULSE RESPONSE, $A_V = +1$



LF356 SMALL SIGNAL PULSE RESPONSE, $A_V = +1$



LF355 LARGE SIGNAL PULSE RESPONSE, $A_V = +1$



LF356 LARGE SIGNAL PULSE RESPONSE, $A_V = +1$



INVERTER SETTLING TIME

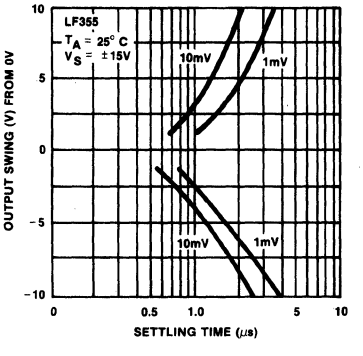

INVERTER SETTLING TIME

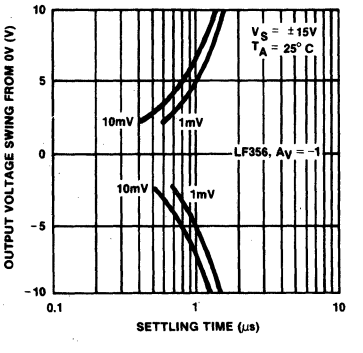

OPEN LOOP FREQUENCY RESPONSE

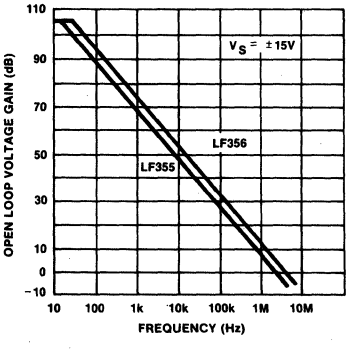

BODE PLOT

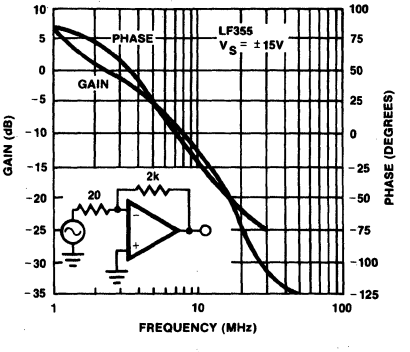

BODE PLOT

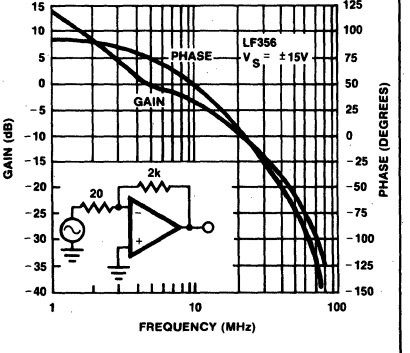

TYPICAL AC PERFORMANCE CHARACTERISTICS (Cont'd)

COMMON-MODE REJECTION RATIO

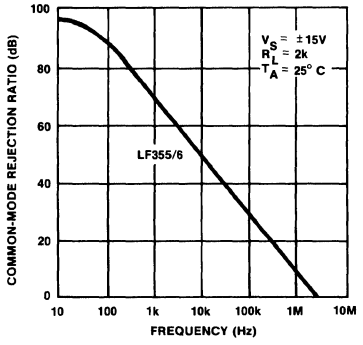

POWER SUPPLY REJECTION RATIO

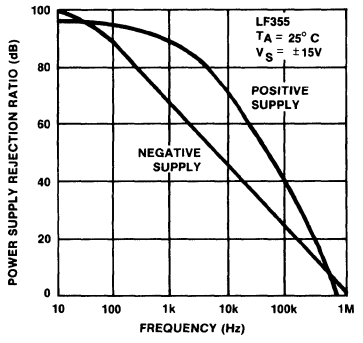

POWER SUPPLY REJECTION RATIO

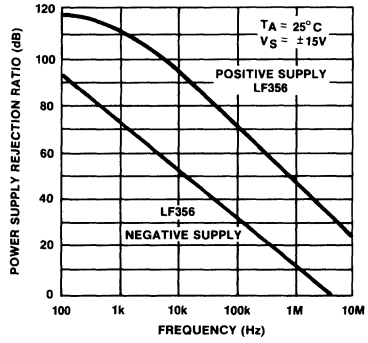

UNDISTORTED OUTPUT VOLTAGE SWING

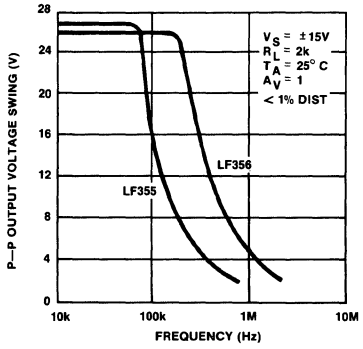

EQUIVALENT INPUT NOISE VOLTAGE

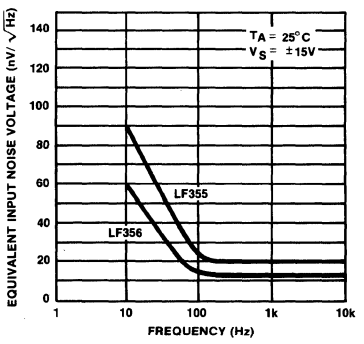

EQUIVALENT INPUT NOISE VOLTAGE (EXPANDED SCALE)

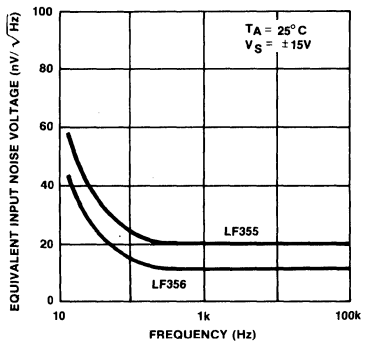

OUTPUT IMPEDANCE

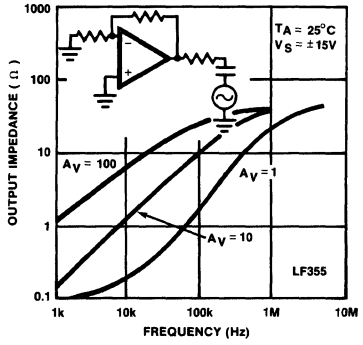

OUTPUT IMPEDANCE

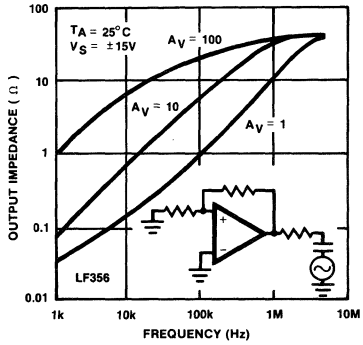

TYPICAL AC PERFORMANCE CHARACTERISTICS (Cont'd)

SETTLING TIME TEST CIRCUIT

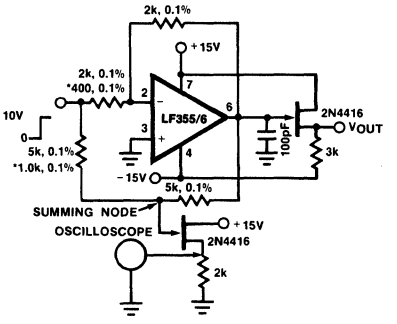

- Settling time is tested with the LF355/6 connected as unity gain inverter,
- FET used to isolate the probe capacitance
- Output = 10V step

LARGE SIGNAL INVERTER OUTPUT, V_{OUT} (FROM SETTLING TIME CIRCUIT)

LF355

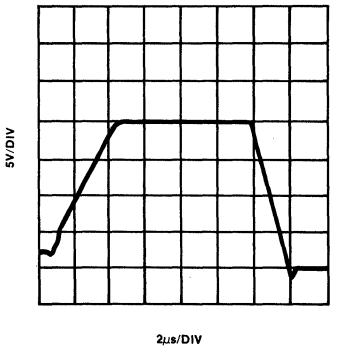

LF356



APPLICATIONS

The LF355 and LF356 are op amps with JFET input devices. These JFETs have large reverse breakdown voltages from gate to source and drain eliminating the need for clamps across the inputs. Therefore large differential input voltages can easily be accommodated without a large increase in input current. The maximum differential input voltage is independent of the supply voltages. However, neither of the input voltages should be allowed to exceed the negative supply as this will cause large currents to flow which can result in a destroyed unit.

Exceeding the negative common-mode limit on either input will cause a reversal of the phase to the output and force the amplifier output to the corresponding high or low state. Exceeding the negative common-mode limit on both inputs will force the amplifier output to a high state. In neither case does a latch occur since raising the input back within the common-mode range again puts the input stage and thus the amplifier in a normal operating mode.

Exceeding the positive common-mode limit on a single input will not change the phase of the output; however, if both inputs exceed the limit, the output of the amplifier will be forced to a high state.

These amplifiers will operate with the common-mode input voltage equal to the positive supply. In fact, the common-mode voltage can exceed the positive supply by approximately 100mV independent of supply voltage and over the full operating temperature range. The positive supply can therefore be used as a reference on an input as, for example, in a supply current monitor and/or limiter.

Precautions should be taken to ensure that the power supply for the integrated circuit never becomes reversed in polarity or that the unit is not inadvertently installed backwards in a socket as an unlimited current surge through the resulting forward diode within the IC could cause fusing of the internal conductors and result in a destroyed unit.

Because these amplifiers are JFET rather than MOSFET input op amps they do not require special handling.

All of the bias currents in these amplifiers are set by FET current sources. The drain currents for the amplifiers are therefore essentially independent of supply voltage.

As with most amplifiers, care should be taken with lead dress, component placement and supply decoupling in order to ensure stability. For example, resistors from the output to an input should be placed with the body close to the input to minimize "pickup" and maximize the frequency of the feedback pole by minimizing the capacitance from the input to ground.

A feedback pole is created when the feedback around any amplifier is resistive. The parallel resistance and capacitance from the input of the device (usually the inverting input) to ac ground set the frequency of the pole. In many instances the frequency of this pole is much greater than the expected 3dB frequency of the closed loop gain and consequently there is negligible effect on stability margin. However, if the feedback pole is less than approximately six times the expected 3dB frequency a lead capacitor should be placed from the output to the input of the op amp. The value of the added capacitor should be such that the RC time constant of this capacitor and the resistance it parallels is greater than or equal to the original feedback pole time constant.

TYPICAL CIRCUIT CONNECTIONS

V_{OS} ADJUSTMENT



- V_{OS} is adjusted with a 25k potentiometer
- The potentiometer wiper is connected to V+
- For potentiometers with temperature coefficient of 100ppm/°C or less the additional drift with adjust is ≈ 0.5μV/°C/mV of adjustment
- Typical overall drift: 5μV/°C ± (0.5μV/°C/mV of adj.)

DRIVING CAPACITIVE LOADS

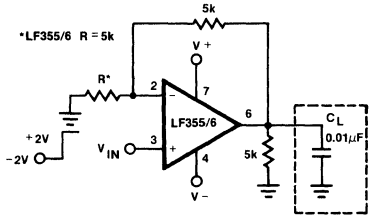

Due to a unique output stage design these amplifiers have the ability to drive large capacitive loads and still maintain stability. C_L max ≤ 0.01μF.
Overshoot ≤ 20%
Setting time (t_S) ≥ 5μs

TYPICAL APPLICATIONS

WIDE BW LOW NOISE, LOW DRIFT AMPLIFIER

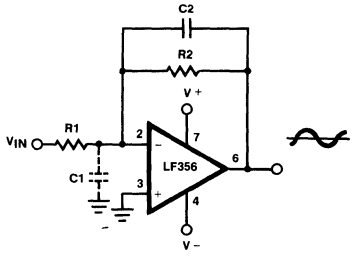

- Power BW: $f_{MAX} = \frac{S_r}{2\pi/p} \approx 240kHz$
- Parasitic input capacitance C1 ≅ (3pF for LF355 and LF356, plus any additional layout capacitance) interacts with feedback elements and creates undesirable high frequency pole. To compensate add C2 such that: R2C2 ≅ R1C1.

TYPICAL APPLICATIONS (Cont'd)

HIGH IMPEDANCE, LOW DRIFT INSTRUMENTATION AMPLIFIER

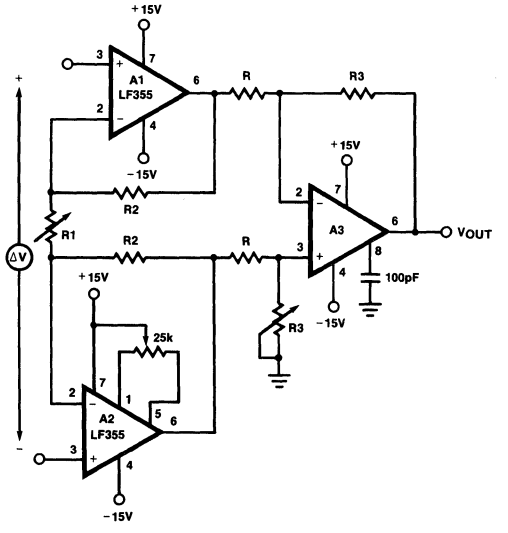

- $V_{OUT} = \frac{R3}{R}\left[\frac{2R2}{R1} + 1\right]\Delta V$, V- +2V ≤ V_{IN} Common-Mode ≤ V+
- System V_{OS} adjusted via A2 V_{OS} adjust
- Trim R3 to boost up CMRR to 120dB.

HIGH Q NOTCH FILTER

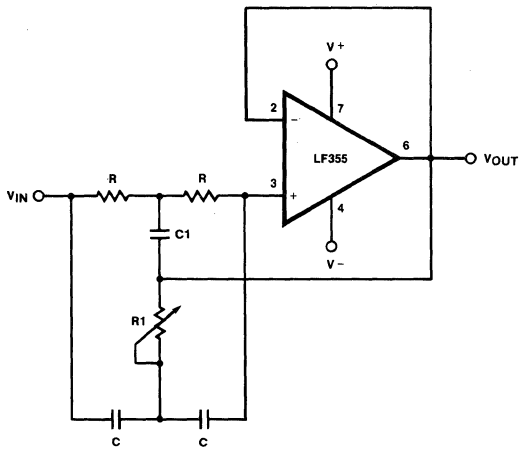

- 2R1 = R = 10MΩ
  2C = C1 = 300pF
- Capacitors should be matched to obtain high Q
- f_{NOTCH} = 120Hz, notch = 55dB, Q > 180
- Use LF355 for
  Δ Low I_B
  Δ Low supply current

HIGH ACCURACY SAMPLE AND HOLD

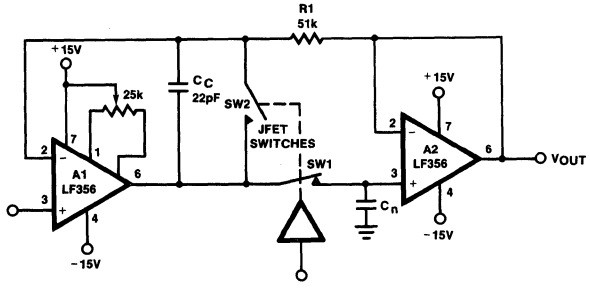

- By closing the loop through A2 the V_{OUT} accuracy will be determined uniquely by A1. No V_{OS} adjust required for A2.
- T_A can be estimated by same considerations as previously but, because of the added on propagation delay in the feedback loop (A2) the overshoot is not negligible.
- Overall system slower than fast sample and hold.
- R1, C_C: additional compensation
- Use LF356 for
  Δ Fast settling time
  Δ Low V_{OS}

FAST LOGARITHMIC CONVERTER

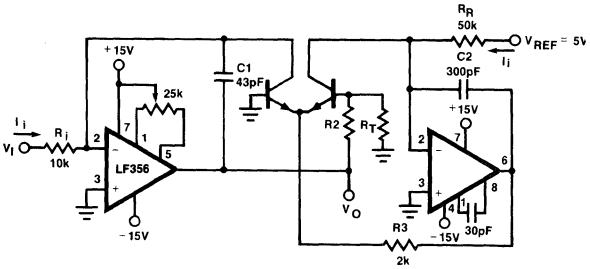

$$|V_{OUT}| = \left[1 + \frac{R2}{R}\right]\frac{kT}{q}\ln V_I\left[\frac{R_r}{V_{REF}\,R_i}\right] = \log V_I\frac{1}{R_i\,I_R}$$

R2 = 15.71, R_1 = 1k, 0.3%°C (for temperature compensation)

- Dynamic range: 100μA ≤ I_i ≤ 1mA (5 decades, |V_O| = 1V/decades)
- Transient response: 3μs for Δ, = decades
- C1, C2, R2, R3: added dynamic compensation
- V_{OS} adjust the LF356 to minimize quiescent error
- R_T: Tel Labs type Q81 + 0.3%/°C.

GENERAL PURPOSE SINGLE SUPPLY OPERATIONAL AMPLIFIER

LM124/224/324/SA534-F,N
LM324-D

DESCRIPTION

The LM124/SA534 series consists of four independent, high gain, internally frequency compensated operational amplifiers designed specifically to operate from a single power supply over a wide range of voltages.

UNIQUE FEATURES

In the linear mode the input common-mode voltage range includes ground and the output voltage can also swing to ground, even though operated from only a single power supply voltage.

The unity gain cross frequency is temperature compensated.

The input bias current is also temperature compensated.

FEATURES

- **Internally frequency compensated for unity gain**
- **Large dc voltage gain—(100dB)**
- **Wide bandwidth (unity gain)—1MHz (temperature compensated)**
- **Wide power supply range**
  Single supply—(3Vdc to 30Vdc) or dual supplies—(±1.5Vdc to ±15Vdc)
- **Very low supply current drain—essentially independent of supply voltage (1mW/op amp at +5Vdc)**
- **Low input biasing current—(45nAdc temperature compensated)**
- **Low input offset voltage—(2mVdc) and offset current—(5nAdc)**
- **Differential input voltage range equal to the power supply voltage**
- **Large output voltage—(0Vdc to V+—1.5Vdc swing)**
- **LM124 Mil std 883A,B,C available**

PIN CONFIGURATION

D,F,N PACKAGE



ORDER PART NO.

LM124N	LM224N	LM324N
LM124F	LM224F	LM324F
SA534N	SA534F	LM324D

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
V+	Supply voltage	32 or ±16	Vdc
	Differential input voltage	32	Vdc
	Input voltage	-0.3 to +32	Vdc
	Power dissipation[1]		
	N package	570	mW
	F package	900	mW
	Output short-circuit to GND		
	1 amplifier[2]	Continuous	
	V+ < 15Vdc and T_A = 25°C		
	Input current (V_{IN} < -0.3V)[3]	50	mA
	Operating temperature range		
	LM324	0 to +70	°C
	LM224	-25 to +85	°C
	SA534	-40 to +85	°C
	LM124	-55 to +125	°C
	Storage temperature range	-65 to +150	°C
	Lead temperature (soldering, 10sec)	300	°C

NOTES

1. For operating at high temperatures, all devices must be derated based on a +125°C maximum junction temperature and a thermal resistance of 175°C/W which applies for the device soldered in a printed circuit board, operating in a still air ambient. LM 124/224 can be derated based on a +150°C maximum junction temperature.
2. Short circuits from the output to V+ can cause excessive heating and eventual destruction. The maximum output current is approximately 40mA independent of the magnitude of V+. At values of supply voltage in excess of +15Vdc continuous short-circuits can exceed the power dissipation ratings and cause eventual destruction.
3. The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output, so no loading change exists on the input lines.

LM124/224/324/SA534-F,N
LM324-D

DC ELECTRICAL CHARACTERISTICS

$V+ = 5V$, $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	LM124/LM224			LM324/SA534			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage[1]	$R_S = 0\Omega$ $R_S = 0\Omega$, over temp.		±2	±5 ±7		±2	±7 ±9	mV mV
V_{OS}	Drift	$R_S = 0\Omega$		7			7		µV/°C
I_{BIAS}	Input current[2]	$I_{IN}(+)$ or $I_{IN}(-)$ $I_{IN}(+)$ or $I_{IN}(-)$, over temp.		45 40	150 300		45 40	250 500	nA nA
I_{OS}	Offset current	$I_{IN}(+) - I_{IN}(-)$ $I_{IN}(+) - I_{IN}(-)$, over temp.		±3	±30 ±100		±5	±50 ±150	nA nA
I_{OS}	Drift			10			10		pA/°C
V_{CM}	Common mode voltage range[3]	V+ = 30V V+ = 30V, over temp.	0 0		V+−1.5 V+−2	0 0		V+−1.5 V+−2	V V
C_{MRR}	Common mode rejection ratio		70	85		65	70		dB
V_{OUT}	Output voltage swing	$R_L = 2k\Omega$, V+ = +30V, over temp.	26			26			V
V_{OH}		$R_L \leq 10k\Omega$, over temp.	27	28		27	28		V
V_{OL}		$R_L \leq 10k\Omega$, V+ = 5V, over temp.		5	20		5	20	mV
I_{CC}	Supply current	$R_L = \infty$, V_{CC} = 30V, over temp. $R_L = \infty$, on all op amps, over temp.		1.5 0.7	3 1.2		1.5 0.7	3 1.2	mA
A_{VOL}	Large signal voltage gain	V+ = +15V (for large V_O swing), $R_L \geq 2k\Omega$ V+ = +15V (for large V_O swing), $R_L \geq 2k\Omega$, over temp.	50 25	100		25 15	100		V/mV V/mV
	Amplifier-to-amplifier coupling[5]	f = 1kHz to 20kHz, input referred		−120			−120		dB
P_{SRR}		$R_S \leq 0\Omega$	65	100		65	100		dB
	Output current Source	$V_{IN}+ = +1Vdc$, $V_{IN}- = 0Vdc$, V+ = 15Vdc $V_{IN}+ = +1Vdc$, $V_{IN}+ = 0Vdc$, V+ = 15Vdc, over temp.	20 10	40 20		20 10	40 20		mA mA
	Sink	$V_{IN}- = +1Vdc$, $V_{IN}+ = 0Vdc$, V+ = 15Vdc $V_{IN}- = +1Vdc$, $V_{IN}+ = 0Vdc$, V+ = 15Vdc, over temp. $V_{IN}+ = 0Vdc$, $V_{IN}- = +1Vdc$, V_O = 200mV	10 5 12	20 8 50		10 5 12	20 8 50		mA mA µA
I_{SC}	Short circuit current[4]			40	60		40	60	mA
	Differential input voltage[6]				V+			V+	V

NOTES

1. $V_O \cong 1.4Vdc$, $R_S = 0\Omega$ with V+ from 5V to 30V and over full input common mode range (0Vdc+ to V+ −1.5V).
2. The direction of the input current is out of the IC due to the pnp input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.
3. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ −1.5, but either or both inputs can go to +32V without damage.
4. Short circuits from the output to V+ can cause excessive heating and eventual destruction. The maximum output current is approximately 40mA independent of the magnitude of V+. At values of supply voltage in excess of +15Vdc continous short-circuits can exceed the power dissipation ratings and cause eventual destruction. Destructive dissipation can result from simultaneous shorts on all amplifiers.
5. Due to proximity of external components, insure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitive increases at higher frequencies.
6. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ −1.5V, but either or both inputs can go to +32Vdc without damage.

GENERAL PURPOSE SINGLE SUPPLY OPERATIONAL AMPLIFIER

LM124/224/324/SA534-F,N
LM324-D

EQUIVALENT SCHEMATIC

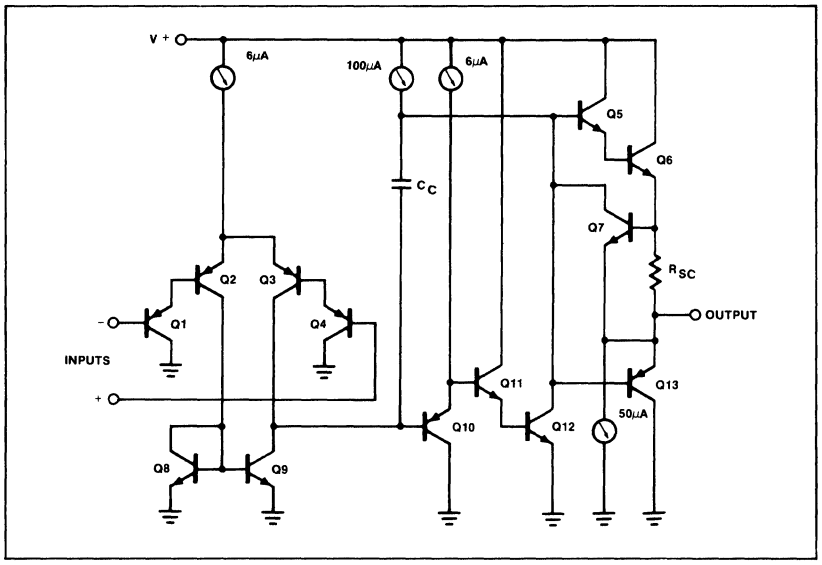

TYPICAL PERFORMANCE CHARACTERISTICS

SUPPLY CURRENT



OUTPUT CHARACTERISTICS CURRENT SOURCING

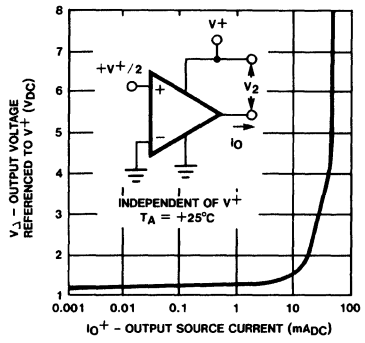

CURRENT LIMITING



VOLTAGE GAIN

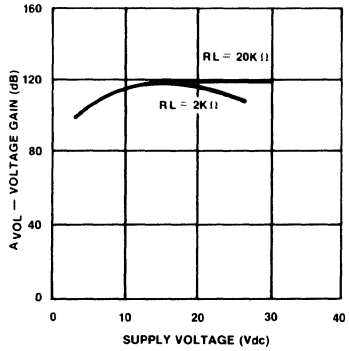

OUTPUT CHARACTERISTICS CURRENT SINKING

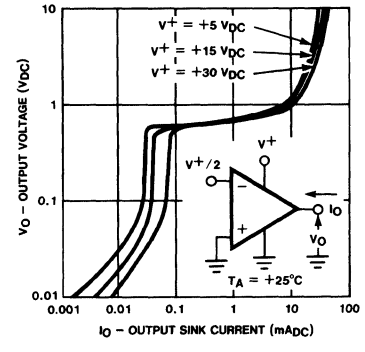

OPEN LOOP FREQUENCY RESPONSE

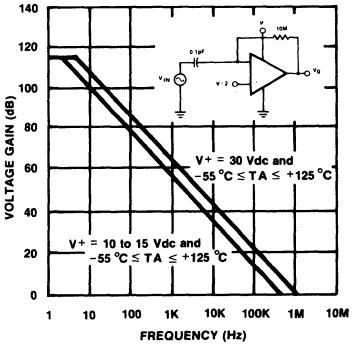

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

LARGE SIGNAL FREQUENCY RESPONSE

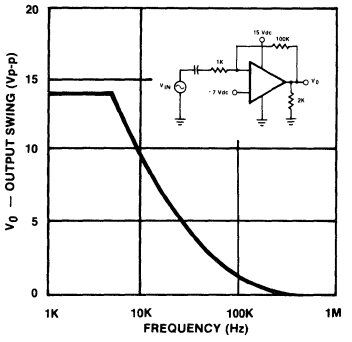

VOLTAGE FOLLOWER PULSE RESPONSE

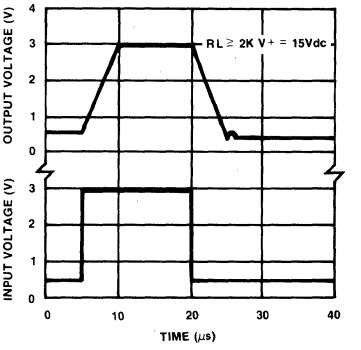

INPUT VOLTAGE RANGE

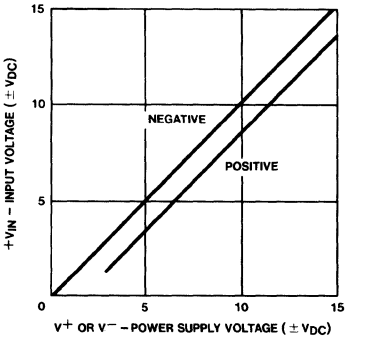

INPUT CURRENT

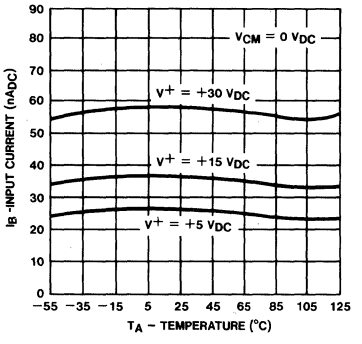

COMMON MODE REJECTION RATIO

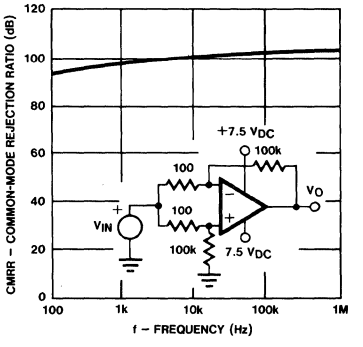

VOLTAGE FOLLOWER PULSE RESPONSE (SMALL SIGNAL)

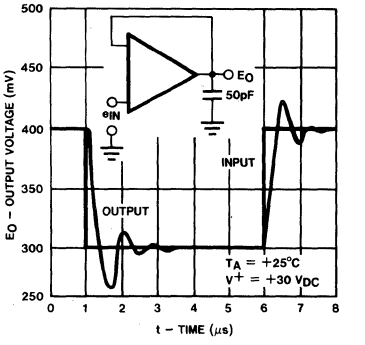

HIGH PERFORMANCE AMPLIFIER — LM301A

LM301A-N,FE,D

DESCRIPTION

The LM301A is a high performance operational amplifier featuring high gain, short circuit protection, simplified compensation and excellent temperature stability.

FEATURES

- **Short circuit protection**
- **Offset voltage null capability**
- **Large common-mode and differential voltage ranges**
- **Low power consumption**
- **No latch up**
- **LM101, LM101A, LH2101, LH2101A Mil std 883A,B,C available**
- **LM101A, LH2101A Mil std 38510 (JAN) available**

PIN CONFIGURATIONS

D,N,FE PACKAGE

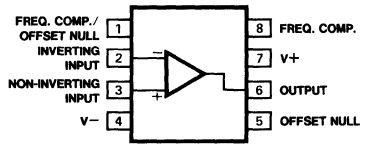

ORDER PART NO.
LM301AN
LM301AFE
LM301AD

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply Voltage		
LM301A	±18	V
Power dissipation	500	mW
Differential input voltage	±30	V
Input voltage[1]	±15	V
Output short circuit duration	Indefinite	
Operating temperature range		
LM301A	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	300	°C

NOTES

1. For supply voltages less then ±15V, the absolute maximum input voltage is equal to the supply voltage.

EQUIVALENT SCHEMATIC

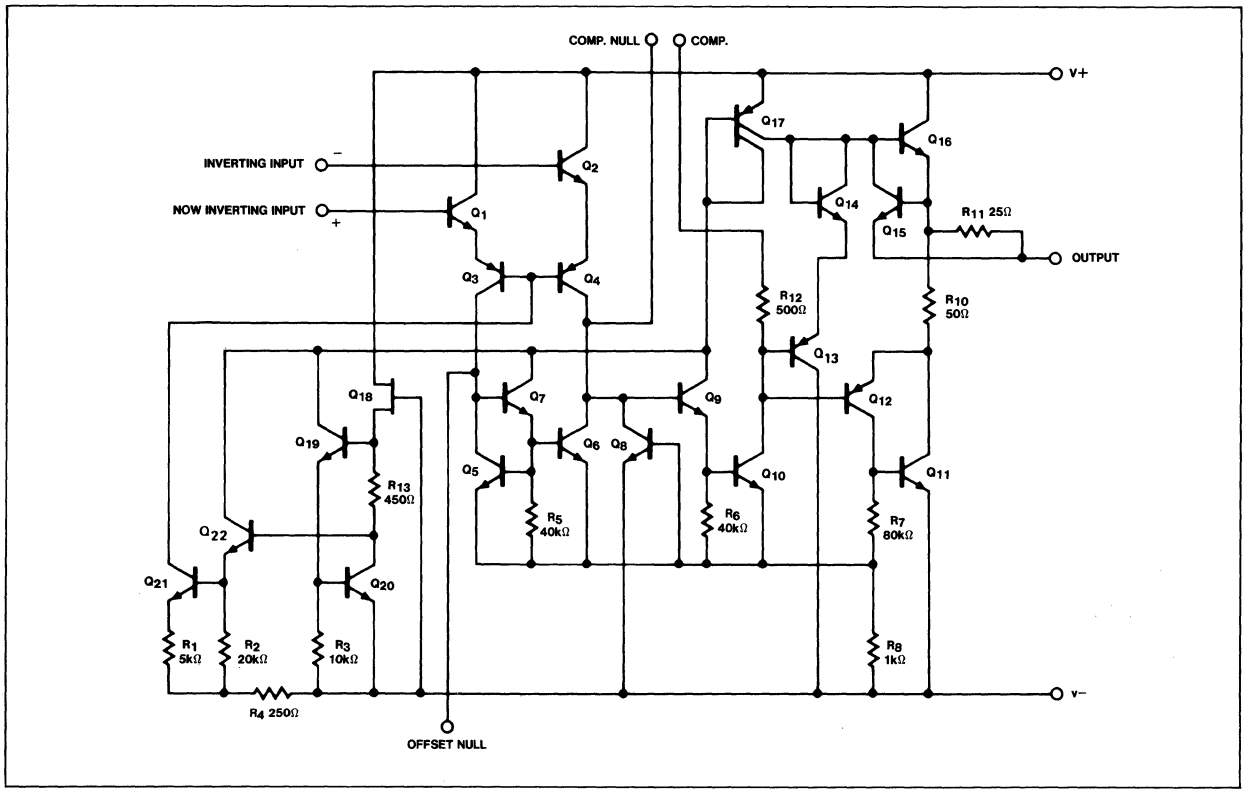

DC ELECTRICAL CHARACTERISTICS $0°C \leq T_A < 70°C$, $\pm5V, \leq V_S \leq \pm15V$ and $C_1 = 30pF$

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
V_{OS}	Input Offset Voltage	$T_A = 25°C$, $R_S < 50K\Omega$		2.0	7.5	mV
I_{OS}	Input Offset Current	$T_A = 25°C$		3	50	nA
I_{BIAS}	Input Bias Current	$T_A = 25°C$		70	250	nA
I_{OS}	Input Resistance	$T_A = 25°C$	0.5	2		MΩ
I_{CC}	Supply Current	$T_A = 25°C$, $V_S = \pm15V$		1.8	3.0	mA
A_{VOL}	Large Signal Voltage Gain	$T_A = 25°C$, $V_S = \pm15V$ $V_{OUT} = \pm10V$; $R_L > 2k\Omega$	25	160		V/mV
V_{OS}	Input Offset Voltage	$R_S < 50k\Omega$			10	mV
V_{OS}	Average Temperature Coefficient of Input Drift Offset Voltage			6.0	30	μV/°C
I_{OS}	Input Offset Current				70	nA
I_{OS}	Average Temperature Coefficient of Input Offset Current	$25°C < T_A < 70°C$ $0°C < T_A < 25°C$		0.01 0.02	0.3 0.6	nA/°C nA/°C
I_{BIAS}	Input Bias Current				300	nA
A_{VOL}	Large Signal Voltage Gain	$V_S = \pm15V$, $V_{OUT} = \pm10V$ $R_L > 2k\Omega$	15			V/mV
V_{OUT}	Output Voltage Swing	$V_S = \pm15V$, $R_L = 10k\Omega$ $R_L = 2k\Omega$	±12 ±10	±14 ±13		V V
V_{IN}	Input Voltage Range	$V_S = \pm15V$	±12			V
C_{MRR}	Common Mode Rejection Ratio	$R_S < 50k\Omega$	70	90		dB
P_{SRR}	Supply Voltage Rejection Ratio	$R_S < 50k\Omega$	70	96		dB

*NOTE

Unless otherwise specified, all specifications for LM301A are $\pm5V \leq V_S \leq \pm15V$.

TYPICAL PERFORMANCE CHARACTERISTICS

OPEN LOOP FREQUENCY RESPONSE

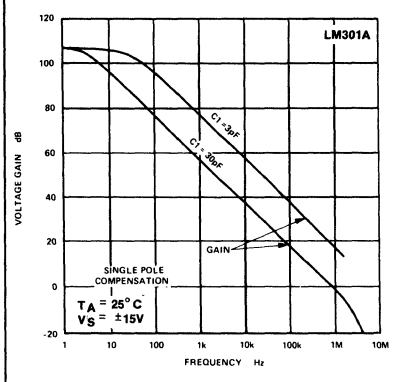

LARGE SIGNAL FREQUENCY RESPONSE

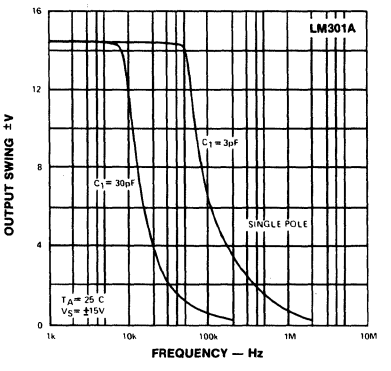

VOLTAGE FOLLOWER PULSE RESPONSE

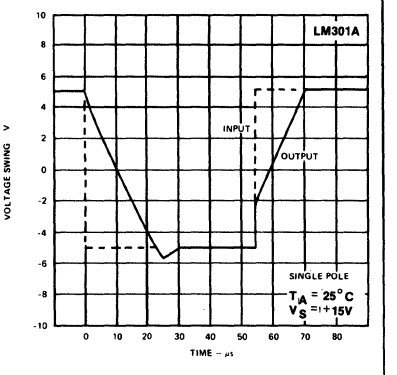

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

VOLTAGE GAIN

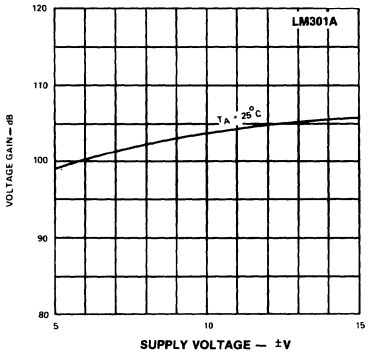

SUPPLY CURRENT

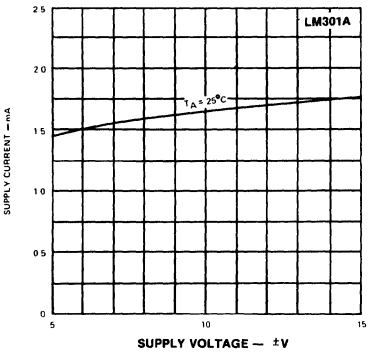

INPUT CURRENT

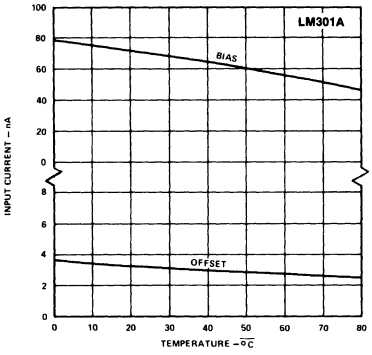

CURRENT LIMITING

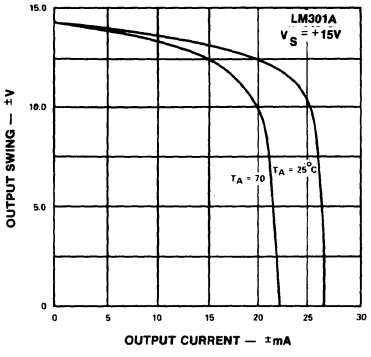

INPUT NOISE VOLTAGE

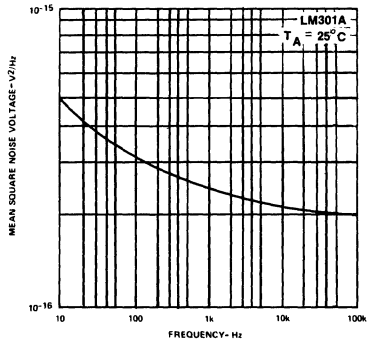

INPUT NOISE CURRENT

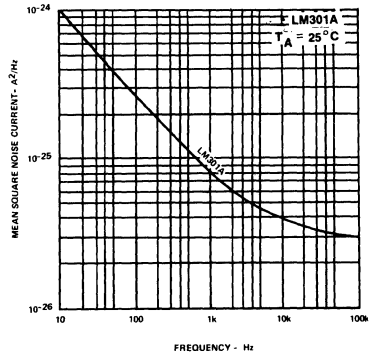

OUTPUT SWING

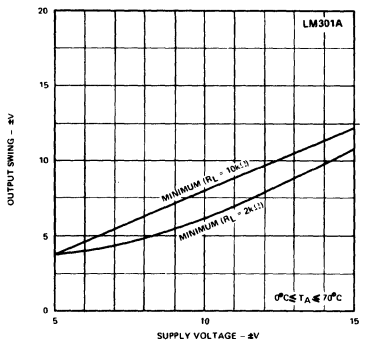

INPUT VOLTAGE RANGE

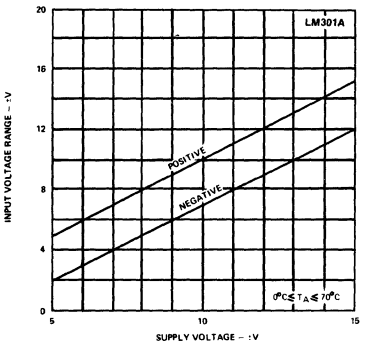

VOLTAGE GAIN

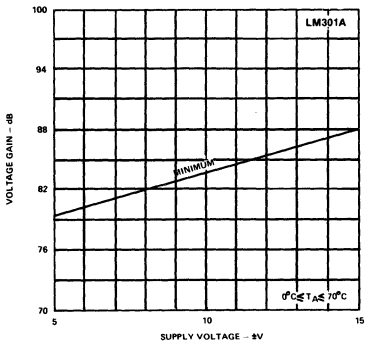

COMPENSATION CIRCUITS

SINGLE POLE COMPENSATION



$C1 \geq \frac{R1\,C_S}{R1 + R2}$

$C_S = 30pF$

TWO POLE COMPENSATION

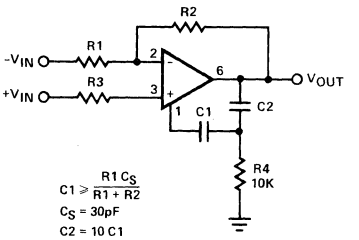

$C1 \geq \frac{R1\,C_S}{R1 + R2}$

$C_S = 30pF$

$C2 = 10\,C1$

FEED FORWARD COMPENSATION



$C2 = \frac{1}{2\pi f_o R2}$

$f_o = 3\,MHz$

TYPICAL APPLICATIONS

INVERTING AMPLIFIER WITH BALANCING CIRCUIT



†May be zero or equal to parallel combination of R_1 and R_2 for minimum offset.

LOW DRIFT SAMPLE AND HOLD

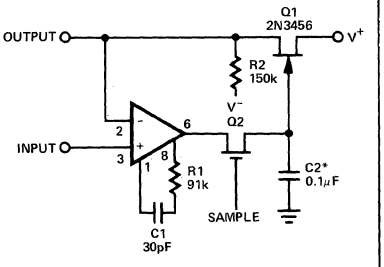

*Polycarbonate Dielectric Capacitor

DUAL OPERATIONAL TRANSCONDUCTANCE AMPLIFIERS — LM13600/13600A

LM13600/13600A-D,N

DESCRIPTION

The LM13600 series consists of two current controlled transconductance amplifiers each with differential inputs and a push pull output. The two amplifiers share common supplies but otherwise operate independently. Linearizing diodes are provided at the inputs to reduce distortion and allow higher input levels. The result is a 10 dB signal-to-noise improvement referenced to 0.5 percent THD. Controlled impedance buffers are provided which are specifically designed to complement the dynamic range of the amplifiers.

FEATURES

- **gm adjustable over 6 decades**
- **Excellent gm linearity**
- **Excellent matching between amplifiers**
- **Linearizing diodes**
- **Controlled impedance buffers**
- **High output signal to noise ratio**
- **Wide supply range ±2V to ±22V.**
- **See Signetics NE5517 for typical circuit applications information**

APPLICATIONS

- **Current controlled amplifiers**
- **Current controlled impedances**
- **Current controlled filters**
- **Current controlled oscillators**
- **Multiplexers**
- **Timers**
- **Sample and hold circuits**

PIN DESCRIPTION

D,N PACKAGE



ORDER PART NO.

LM13600N LM13600D
LM13600AN LM13600AD

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage[1]		
LM13600	36 V_{DC} or ±18	V
LM13600A	44 V_{DC} or ±22	V
Power dissipation[2] T_A = 25°C		
LM13600N, LM13600AN	570	mW
Differential input voltage	±5	V
Diode bias current (I_D)	2	mA
Amplifier bias current (I_{ABC})	2	mA
Output short circuit duration	Indefinite	
Buffer output current[3]	20	mA
Operating temperature range		
LM13600N, LM13600AN	0°C to +70	°C
DC input voltage	$+V_S$ to $-V_S$	
Storage temperature range	−65°C to +150	°C
Lead temperature (Soldering, 10 Seconds)	300	°C

BLOCK DIAGRAM

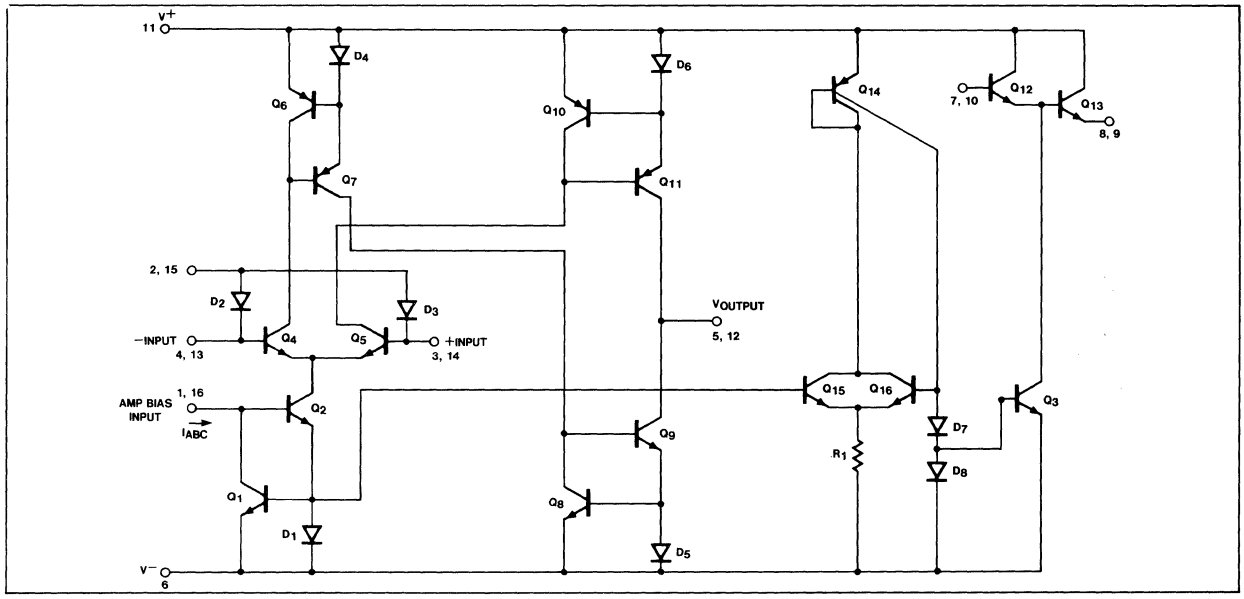

ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	LM13600			LM13600A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input offset voltage (V_{OS})			0.4	5		0.4	2	mV
	Over specified temperature range						5	mV
	I_{ABC} 5μA		0.3	5		0.3	2	mV
V_{OS} including diodes	Diode Bias Current (I_D) = 500 μA		0.5	5		0.5	2	mV
Input offset change	5 μA ≤ I_{ABC} ≤ 500 μA		0.1			0.1	3	mV
Input offset current			0.1	0.6		0.1	0.6	μA
Input bias current			0.4	5		0.4	5	μA
	Over specified temperature range		1	8		1	7	μA
Forward Transconductance (gm)		6700	9600	13000	7700	9600	12000	μmho
	Over specified temperature range	5400			4000			μmho
gm tracking			0.3			0.3		dB
Peak output current	RL = 0, I_{ABC} = 5μA		5		3	5	7	μA
	RL = 0, I_{ABC} = 500 μA	350	500	650	350	500	650	μA
	RL = 0, Over specified temp range	300			300			μA
Peak output voltage								
positive	RL = ∞, 5 μA ≤ I_{ABC} ≤ 500 μA	+12	+14.2		+12	+14.2		V
negative	RL = ∞, 5 μA ≤ I_{ABC} ≤ 500 μA	−12	−14.4		−12	−14.4		V
Supply current	I_{ABC} = 500 μA, Both channels		2.6			2.6		mA
V_{OS} sensitivity								
positive	$\Delta V_{OS}/\Delta V+$		20	150		20	150	μV/V
negative	$\Delta V_{OS}/\Delta V-$		20	150		20	150	μV/V
CMRR		80	110		80	110		dB
Common mode range		±12	±13.5		±12	±13.5		V
Crosstalk	Referred to input[5]							
	20 Hz < f < 20 KHz		100			100		dB
Diff. input current	I_{ABC} = 0, Input = ±4V		0.02	100		0.02	10	nA
Leakage current	I_{ABC} = 0 (Refer to test circuit)		0.2	100		0.2	5	nA
Input resistance		10	26		10	26		KΩ
Open loop bandwith			2			2		MHz
Slew rate	Unity gain compensated		50			50		V/μSec
Buff. input current	5		0.4	5		0.4	5	μA
Peak buffer output voltage	5	10			10			V

NOTES

1. For selections to a supply voltage above ±22V, contact factory.
2. For operating at high temperatures, the device must be derated based on a 150°C maximum junction temperature and a thermal resistance of 175° C/W which applies for the device soldered in a printed circuit board, operating in still air.
3. Buffer output current should be limited so as to not exceed package dissipation.
4. These specifications apply for V_S = ±15V, T_A = 25°C, amplifier bias current (I_{ABC}) = 500μA, pins 2 and 15 open unless otherwise specified. The inputs to the buffers are grounded and outputs are open.
5. These specifications apply for V_S = ±15V, I_{ABC} = 500 μA, R_{OUT} = 5Ω connected from the buffer output to $-V_S$ and the input of the buffer is connected to the transconductance amplifier output.

CONNECTION DIAGRAM

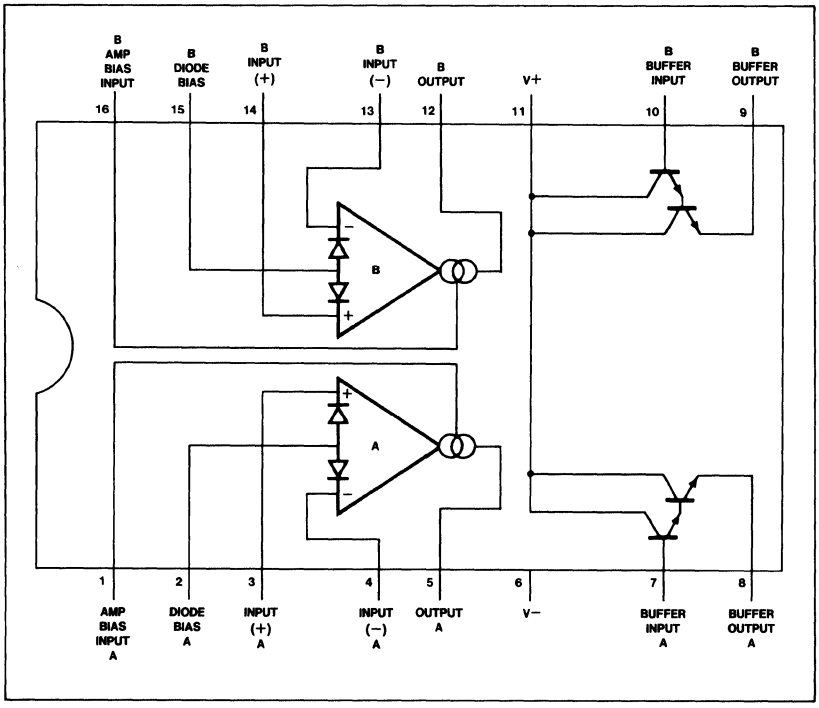

MC1456/1556-N

DESCRIPTION

The MC1456/1556 is an internally compensated precision monolithic operational amplifier featuring extremely low offset and bias currents and offset null capability. The MC1456/1556 is short circuit protected and its high common mode and differential input voltage range provides exceptional performance when used as an integrator, summing amplifier, and voltage follower.

FEATURES

- **Low input bias current—15nA maximum**
- **Low input offset current—2.0nA maximum**
- **Low input offset voltage—4.0mV maximum**
- **High slew rate—2.5V/μs typical**
- **Large power bandwidth—40kHz typical**
- **Low power consumption—45mW maximum**
- **Offset voltage null capability**
- **Output short circuit protection**
- **Input over-voltage protection**
- **Mil std 883A,B,C, available**

OFFSET ADJUST CIRCUIT



PIN CONFIGURATION

N PACKAGE

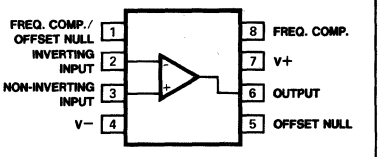

ORDER PART NO.
MC1456N
MC1556N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Power supply voltage MC1556	±22	V
MC1456	±18	V
Differential input voltage	± V_{CC}	V
Common mode input voltage	± V_{CC}	V
Load current	20	mA
Output short circuit duration	Continuous	
Power dissipation	680	mW
Derate above T_A = 25°C	4.6	mW/°C
Operating temperature range		
MC1556	-55 to +125	°C
MC1456	0 to +70	°C
Storage temperature range	-65 to +150	°C

EQUIVALENT SCHEMATIC

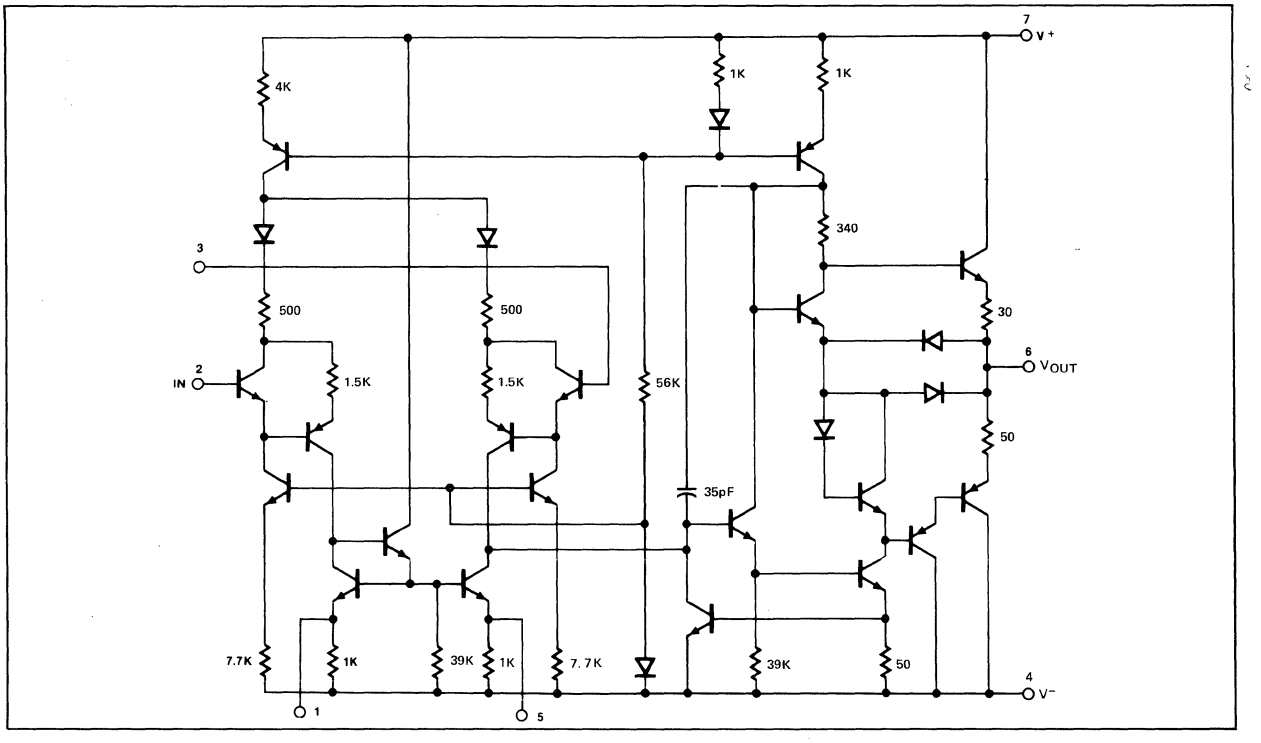

MC1456/1556-N

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified

PARAMETER		TEST CONDITIONS	MC1556			MC1456			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage			2.0	4.0		5.0	10.0	mVdc
		Over temperature			6.0			14.0	mVdc
I_{OS}	Offset current			1.0	2.0		5.0	10.0	nA
		$0°C \le T_A \le 70°C$						14	nA
		$25°C \le T_A \le 125°C$			3.0				nA
		$-55°C \le T_A \le 25°C$			5.0				nA
I_{BIAS}	Input current			8.0	15		15.0	30.0	nA
		Over temperature			30			40	nA
V_{CM}	Common mode voltage range		±12	±13		±11	±12		V
CMRR	Common mode rejection ratio	$R_S \le 10k\Omega$, $T_A = 25°C$, f = 100Hz	80	110		70	110		dB
Z_{IN}	Common mode input impedance	f = 20Hz		250			250		MΩ
V_{OUT}	Output voltage swing	$R_L = 2k\Omega$	±12	±13		±11	±12		V
I_{CC}	Supply current			1.0	1.5		1.3	3.0	mA
P_D	DC quiescent power dissipation ($V_O = 0$)			30	45		40	90	mW
P_{SRR}	Supply voltage rejection ratio	$R_S \le 10k\Omega$		50	100		75	200	μV/V
	Large signal voltage gain	$R_L \le 2k\Omega$, $V_{OUT} = \pm 10V$, $T_A = 25°C$	100	200		70	100		V/mV
		Over temperature	40			40			V/mV

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	MC1556			MC1456			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Differential input impedance								
c_p	Parallel input capacitance	Open loop f = 20Hz		6.0			6.0		pF
r_p	Parallel input resistance			5			3		MΩ
e_n	Equivalent input noise voltage	$A_V = 100$, $R_S = 10k\Omega$, f = 1.0kHz, BW = 1.0kHz		45			45		$nV/\sqrt{Hz}$
BW_p	Power bandwidth	$A_V = 1$, $R_L = 2k\Omega$, THD ≤ 5%							
		$V_{OUT} = \pm 10V$		40			40		kHz
	Phase margin (open loop, unity gain)			70			70		degrees
	Gain margin			18			18		dB
S_R	Slew rate (unity gain)			2.5			2.5		V/μsec
Z_{OUT}	Output impedance	f = 20Hz		1.0	2.0		1.0	2.5	kΩ
BW	Unity gain crossover frequency (open loop)			1.0			1.0		MHz

TYPICAL PERFORMANCE CHARACTERISTICS

POWER DISSIPATION vs POWER SUPPLY VOLTAGE

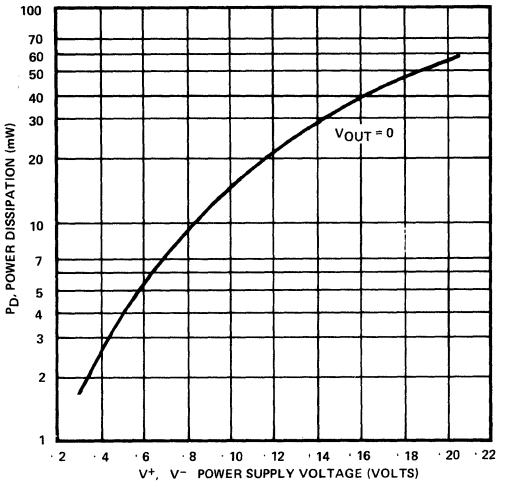

POWER BANDWIDTH

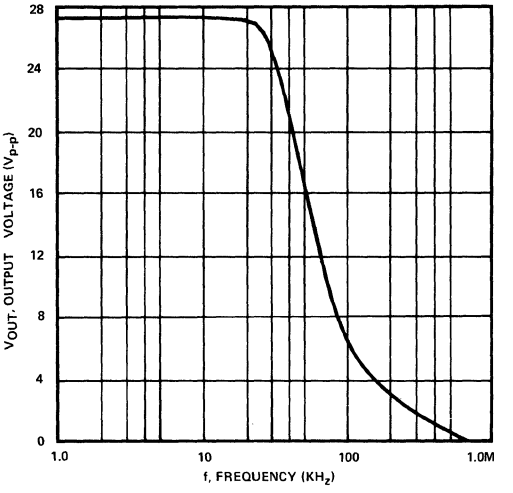

TYPICAL INPUT BIAS CURRENT AND INPUT OFFSET CURRENT vs TEMPERATURE FOR MC1556

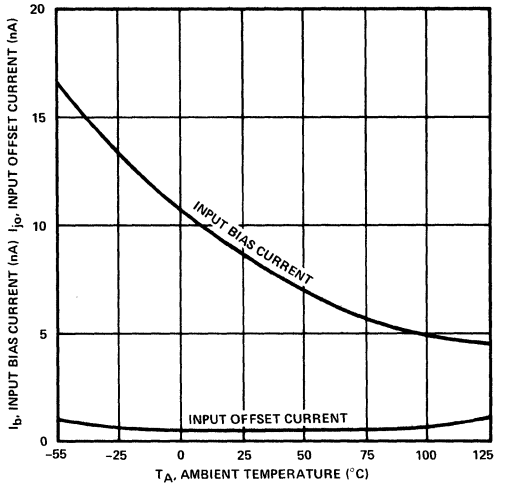

VOLTAGE FOLLOWER PULSE RESPONSE

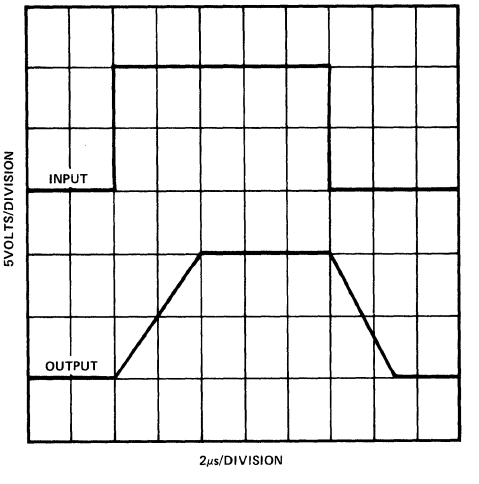

GENERAL PURPOSE OPERATIONAL AMPLIFIER — MC/SA1458/MC1558

MC1458/1558-N,H,FE,F
SA1458-N
MC1458-D

DESCRIPTION

The MC1458 is a high performance operational amplifier with high open loop gain, internal compensation, high common mode range and exceptional temperature stability. The MC1458 is short-circuit protected and allows for nulling of offset voltage.

The MC1458/SA1458/MC1558 consists of a pair of 741 operational amplifiers on a single chip.

FEATURES

- **Internal frequency compensation**
- **Short circuit protection**
- **Excellent temperature stability**
- **High input voltage range**
- **No latch-up**
- **1558/1458 are 2 "op amps" in space of one 741 package**
- **MC1558 Mil std 883A,B,C available**

EQUIVALENT SCHEMATIC

ONE AMPLIFIER OF MC1458, SA1458, MC1558

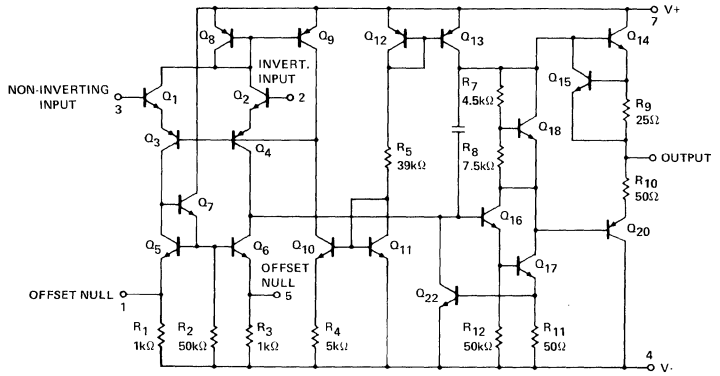

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
MC1458	±18	V
SA1458	±18	V
MC1558	±22	V
Internal power dissipation		
N package	500	mW
H package[1]	800	mW
F,FE package	1000	mW
Differential input voltage	±30	V
Input voltage[2]	±15	V
Output short-circuit duration	Continuous	
Operating temperature range		
MC1458	0 to +70	°C
SA1458	-40 to +85	°C
MC1558	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	300	°C

NOTES

1. Ratings based on thermal resistances, junction to ambient, of 240°C/W, 150°C/W, 110°C/W for N, H, F and FE packages respectively, and a maximum junction temperature of 150°C.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

PIN CONFIGURATIONS

F PACKAGE



ORDER PART NO.

MC1458F
MC1558F

H PACKAGE*



ORDER PART NO.

MC1458H
MC1558H

*Metal cans (H) not recommended for new designs

D,N,FE PACKAGE

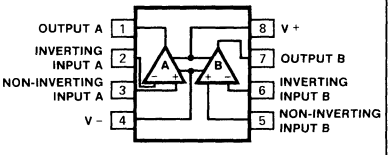

ORDER PART NO.

MC1458N	MC1458FE
MC1558N	MC1558FE
SA1458N	MC1458D

MC1458/1558-N,H,FE,F
SA1458-N
MC1458-D

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER		TEST CONDITIONS	MC1558			UNIT
			Min	Typ	Max	
V_{OS}	Offset voltage	$R_S = 10k\Omega$ $R_S = 10k\Omega$, over temp.		1.0	5.0 6.0	mV mV
I_{OS}	Offset current	Over temp.		20	200 500	nA nA
I_{BIAS}	Input bias current	Over temp.		80	500 1500	nA nA
V_{OUT}	Output voltage swing	$R_L = 10k\Omega$, over temp. $R_L = 2k\Omega$, over temp.	±12 ±10	±14 ±13		V V
A_{VOL}	Large signal voltage gain	$R_L = 2k\Omega$, $V_O = \pm 10V$ $R_L = 2k\Omega$, $V_O = \pm 10V$, over temp.	50 25	100		V/mV V/mV
	Offset voltage adjustment range			±30		mV
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$		30	150	μV/V
CMRR	Common mode rejection ratio		70	90		dB
I_{CC}	Supply current			2.3	5.0	mA
V_{IN}	Input voltage range		±12	±13		V
P_d	Power consumption			70	150	mW
	Channel separation			120		dB
R_{OUT}	Output resistance			75		Ω
I_{SC}	Output short-circuit current			25		mA

DC ELECTRICAL CHARACTERISTICS (Cont'd) $T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER		TEST CONDITIONS	MC1458			SA1458			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S = 10k\Omega$ $R_S = 10k\Omega$, over temp.		2.0	6.0 7.5		2.0	6.0 7.5	mV mV
I_{OS}	Offset current	Over temp.		20	200 300		20	200 500	nA nA
I_{BIAS}	Input bias current	Over temp.		80	500 800		80	500 1500	nA nA
V_{OUT}	Output voltage swing	$R_L = 10k\Omega$ $R_L = 2k\Omega$, over temp.	±12 ±10	±14 ±13		±12 ±10	±14 ±13		V V
A_{VOL}	Large signal voltage gain	$R_L = 2k\Omega$, $V_O = \pm 10V$ $R_L = 2k\Omega$, $V_O = \pm 10V$, over temp.	25 15	200		20 15	200		V/mV V/mV
	Offset voltage adjustment range			±30			±30		mV
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$		30	150		30	150	μV/V
CMRR	Common mode rejection ratio		70	90		70	90		dB
I_{CC}	Supply current			2.3	5.6		2.3	5.6	mA
V_{IN}	Input voltage range		±12	±13		±12	±13		V
R_{IN}	Input resistance								MΩ
P_d	Power consumption			70	170		70	170	mW
	Channel separation			120			120		dB
I_{SC}	Output short-circuit current			25			25		mA

MC1458/1558-N,H,FE,F
SA1458-N
MC1458-D

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER	TEST CONDITIONS	MC1458 SA1458, MC1558			UNIT
		Min	Typ	Max	
Parallel input resistance	Open loop, f = 20Hz	0.3			MΩ
Common mode input impedance	f = 20Hz		200		MΩ
Equivalent input noise voltage	A_V = 100, R_S = 10kΩ, B_W = 1.0kHz f = 1.0kHz		45		$nV/\sqrt{Hz}$
Power bandwidth	A_V = 1, R_L = 2.0kΩ, THD ≤ 5% V_{OUT} = 20Vp-p		14		kHz
Phase margin			65		degrees
Gain margin			11		dB
Unity gain crossover frequency	Open loop		1.0		MHz
Transient response unity gain Rise time Overshoot Slew rate	V_{IN} = 20mV, R_L = 2kΩ, C_L ≤ 100pf C ≤ 100pf, R_L ≥ 2k, V_{IN} = ±10V		 0.3 5.0 0.8		 μs % V/μs

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE



POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE



INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT RESISTANCE AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT OFFSET CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



MC1458/1558-N,H,FE,F
SA1458-N
MC1458-D

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE



OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE



OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY



INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY



BROADBAND NOISE FOR VARIOUS BANDWIDTHS



OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY



OPEN LOOP PHASE RESPONSE AS A FUNCTION OF FREQUENCY



MC1458/1558-N,H,FE,F
SA1458-N
MC1458-D

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY



COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY



TRANSIENT RESPONSE



POWER BANDWIDTH (Large Signal Swing vs Frequency)

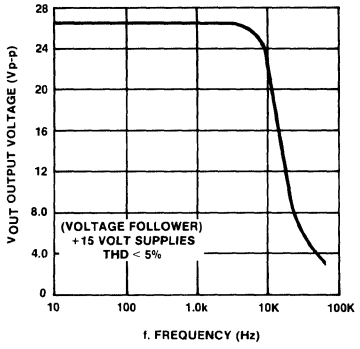

NE/SE530-FE,N,H • NE/SE5530-H,N

DESCRIPTION

The 530/5530 are new generation operational amplifiers featuring high slew rates combined with improved input characteristics. Internally compensated, the SE530/5530 guarantee slew rates of 25V/μs with 2mV maximum offset voltage. Industry standard pinout and internal compensation allow the user to upgrade system performance by directly replacing general purpose amplifiers such as the 741, 747, 1458, 4558 and LF356 types.

FEATURES

- **Gain bandwidth product—3MHz**
- **35V/μs slew rate (Gain = -1)**
- **Internal frequency compensation**
- **Low input offset voltage 2mV max**
- **Low input bias current-60nA max**
- **Short circuit protection**
- **Offset null capability**
- **Large common mode and differential voltage ranges**

PIN CONFIGURATIONS

FE,N PACKAGE

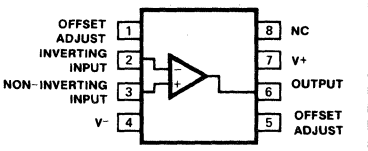

ORDER PART NO.
NE530FE, NE530N
SE530FE, SE530N

H PACKAGE*



ORDER PART NO.
NE530H SE530H

*Metal cans (H) not recommended for new designs.

N PACKAGE

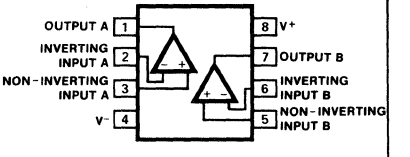

ORDER PART NO.
NE5530N
SE5530N

H PACKAGE*

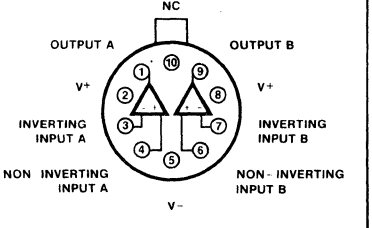

ORDER PART NO.
NE5530H
SE5530H

*Metal cans (H) not recommended for new designs.

EQUIVALENT SCHEMATIC EACH AMPLIFIER

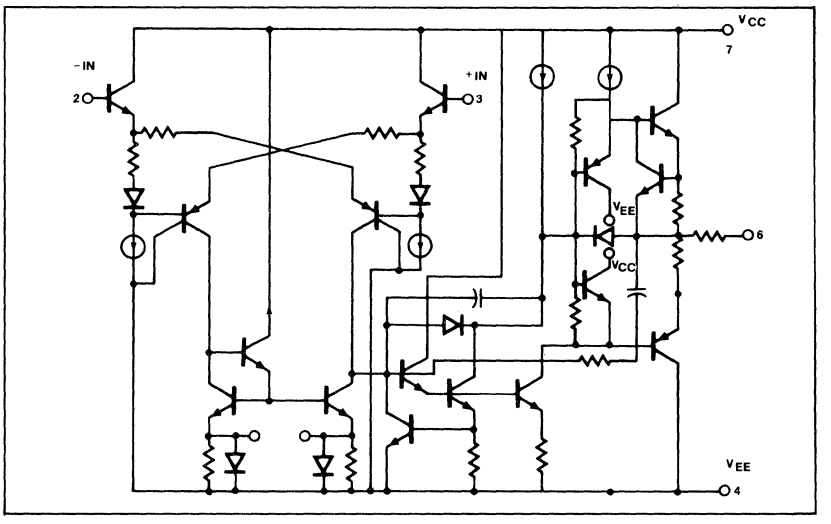

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
SE530/5530	±22	V
NE530/5530	±18	V
Internal power dissipation		
N Package	500	mW
H Package	800	mW
FE Package	1000	mW
Differential input voltage	±30	V
Input voltage	±15	V
Operating temperature range		
SE530/5530	-55 to +125	°C
NE530/5530	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature range (Solder, 60sec)	300	°C
Output short circuit	Indefinite	

DC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = \pm 15V$ unless otherwise specified.[1]

PARAMETER	TEST CONDITIONS	SE530/5530			NE530/5530			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input offset voltage	$R_S \leq 10k\Omega$ Over temperature		0.7	4.0 5.0		2.0	6.0 7.0	mV mV
Temperature coefficient of input offset voltage			3	15		6		$\mu V/°C$
Input offset current	 Over temperature		5	20 40		15	40 80	nA nA
Input bias current	 Over temperature		45	80 200		65	150 200	nA nA
Input resistance		3	10		1	6		MΩ
Input voltage range		±12	±13		±12	±13		V
Large signal voltage gain	$R_L \geq 2k\Omega$, $V_O = \pm 10V$ Over temperature	50 25	200		50 25	200		V/mV V/mV
Output voltage swing	$R_L \geq 10k\Omega$ $R_L \geq 2k\Omega$	±12 ±10	±14 ±13		±12 ±10	±14 ±13		V V V
Output short circuit current			25			25		mA
Output resistance			100			100		Ω
Supply current	Each amplifier Over temperature		2.0 2.2	3.0 3.6		2.0 2.2	3.0	mA mA
Common mode rejection ratio	$R_S \leq 10k\Omega$ Over temperature	70	90		70	90		dB
Power supply rejection ratio	$R_S \leq 10k\Omega$ Over temperature		30	150		30	150	$\mu V/V$

AC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = \pm 15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE530/5530			NE530/5530			UNIT
		Min	Typ	Max	Min	Typ	Max	
Transient response								
Small signal rise time			.06			.06		μs
Small signal overshoot			13			13		%
Settling time	TO 0.1% (10V step)		0.9			0.9		μs
Slew rate	±15V supply, $V_O = \pm 10V$, $R_L \geq 2k\Omega$							
Unity gain inverting		25	35		20	35		V/μs
Unity gain non-inverting		18	25		12	25		V/μs
Power bandwidth	5% THD, $V_O = \pm 10V$, $R_L \geq 2k\Omega$	360	500		280	500		kHz
Small signal bandwidth	Open loop		3			3		MHz
Channel separation			120			120		dB

NOTE

1. Operating temperature range for the SE530/5530 is -55°C to +125°C.
   Operating temperature range for the NE530/5530 is 0°C to +70°C.

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE

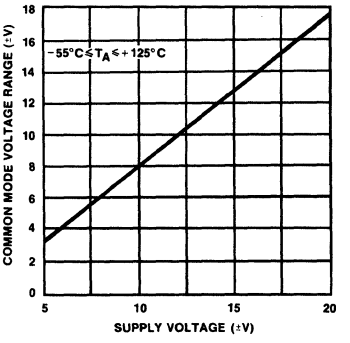

OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

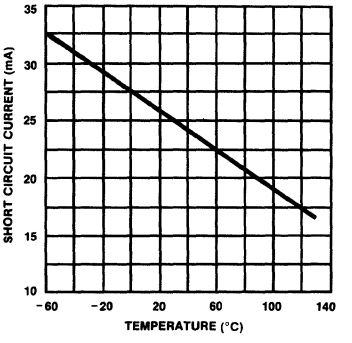

INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY



INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY

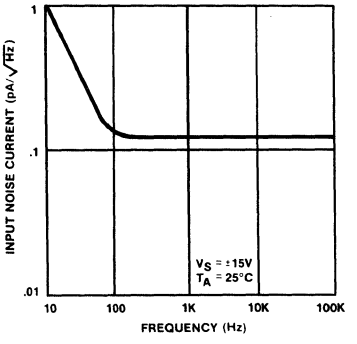

POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE (EACH AMPLIFIER)

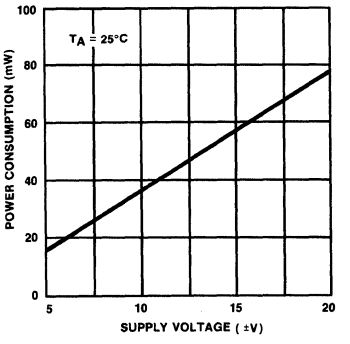

INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE (EACH AMPLIFIER)

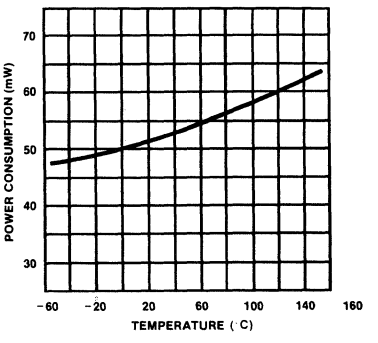

OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE

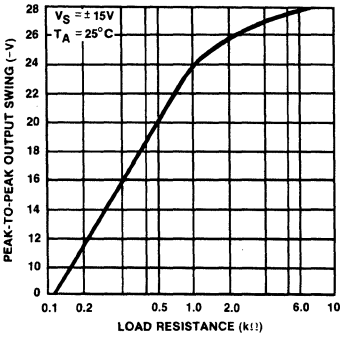

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

NE530 OPEN-LOOP GAIN AND PHASE vs FREQUENCY

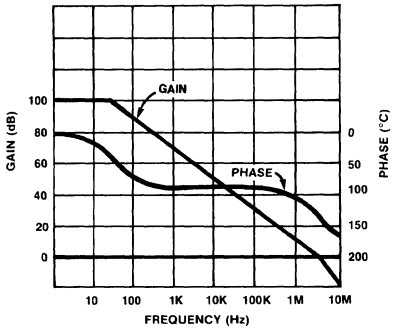

GAIN-BANDWIDTH PRODUCT AND PHASE MARGIN vs LOAD CAPACITANCE

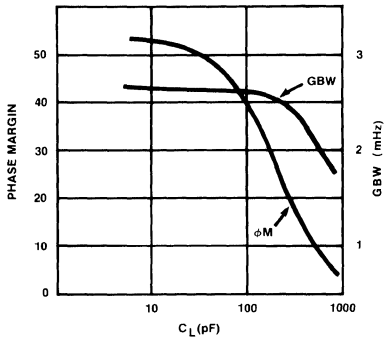

POWER BANDWIDTH

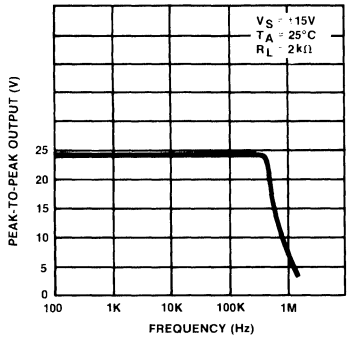

INPUT VOLTAGE STEP vs SETTLING TIME TO 10mV

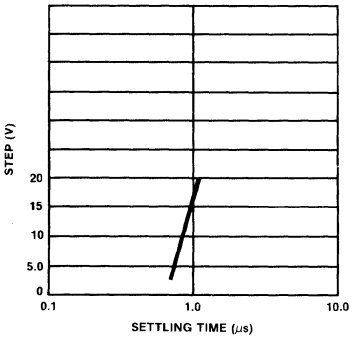

SLEW RATE—VOLTAGE FOLLOWER

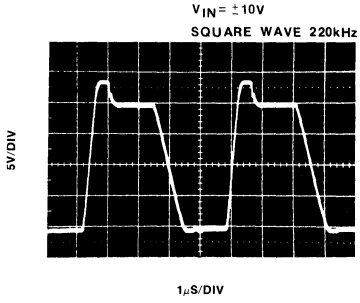

SLEW RATE (−1 AMPLIFIER)

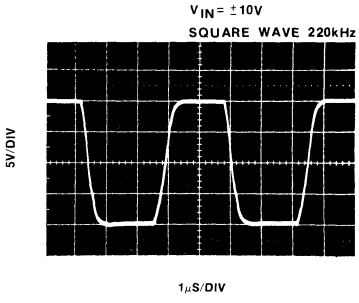

TYPICAL CIRCUIT CONNECTION

OFFSET ADJUST CIRCUIT



TEST LOAD CIRCUITS

SMALL SIGNAL TRANSIENT RESPONSE

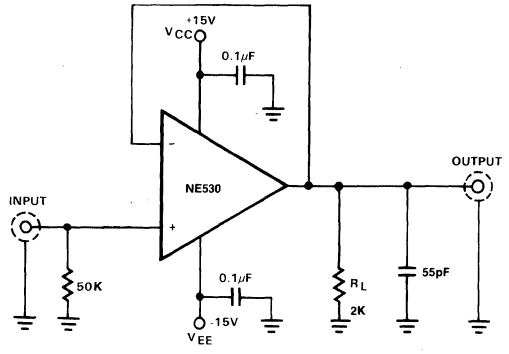

Pins not shown are not connected.
All resistor values are typical and in ohms.

SLEW RATE—VOLTAGE FOLLOWER

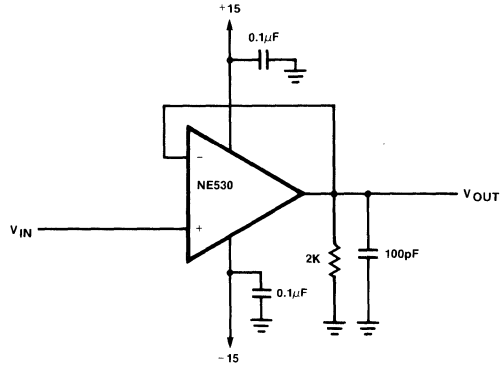

SLEW RATE—INVERTING AMPLIFIER

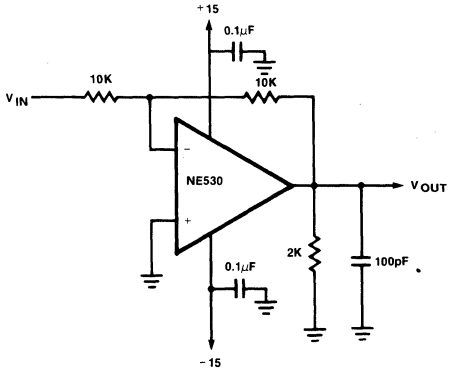

SLEW RATE AND SETTLING TIME

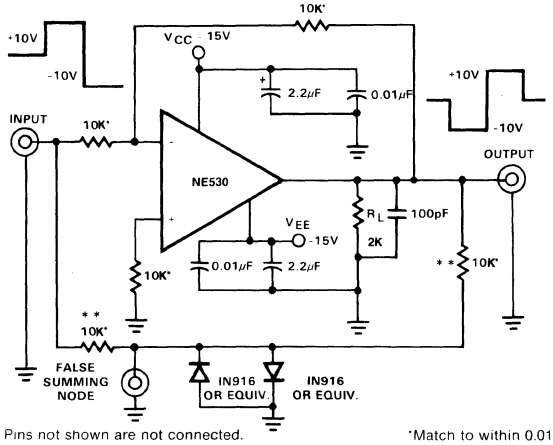

Pins not shown are not connected.
All resistor values are typical and in ohms.

*Match to within 0.01%.
**Open for slew rate.

VOLTAGE WAVEFORMS

SMALL SIGNAL TRANSIENT RESPONSE DEFINITIONS

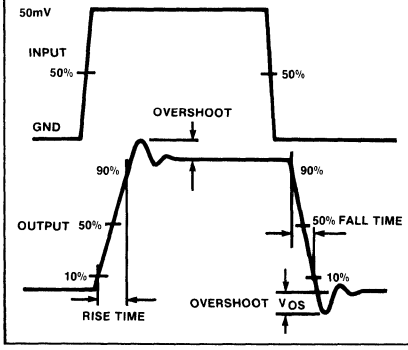

SLEW RATE—VOLTAGE FOLLOWER

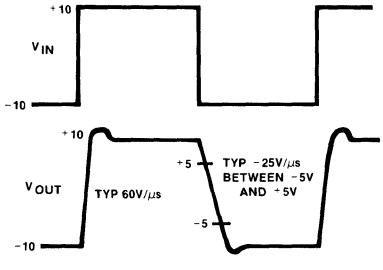

SLEW RATE—INVERTING AMPLIFIER

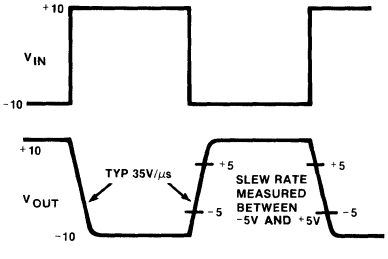

HIGH SLEW RATE OPERATIONAL AMPLIFIER — NE/SE531

NE/SE531-N,H,FE

DESCRIPTION

The 531 is a fast slewing high performance operational amplifier which retains dc performance equal to the best general purpose types while providing far superior large signal ac performance. A unique input stage design allows the amplifier to have a large signal response nearly identical to its small signal response. The amplifier is compensated for truly negligible overshoot with a single capacitor. In applications where fast settling and superior large signal bandwidths are required, the amplifier out performs conventional designs which have much better small signal response. Also, because the small signal response is not extended, no special precautions need be taken with circuit board layout to achieve stability. The high gain, simple compensation and excellent stability of this amplifier allow its use in a wide variety of instrumentation applications.

FEATURES

- **35V/μsec slew rate at unity gain**
- **Pin for pin replacement for μA709, μA748 or LM101**
- **Compensated with a single capacitor**
- **Same low drift offset null circuitry as μA741**
- **Small signal bandwidth 1MHz**
- **Large signal bandwidth 500KHz**
- **True op amp dc characteristics make the 531 the ideal answer to all slew rate limited operational amplifier applications.**

PIN CONFIGURATIONS

H PACKAGE*



ORDER PART NO.
NE531H/SE531H

*Metal cans (H) not recommended for new designs

N,FE PACKAGE



ORDER PART NO.

NE531N	SE531N
NE531FE	SE531FE

EQUIVALENT SCHEMATIC

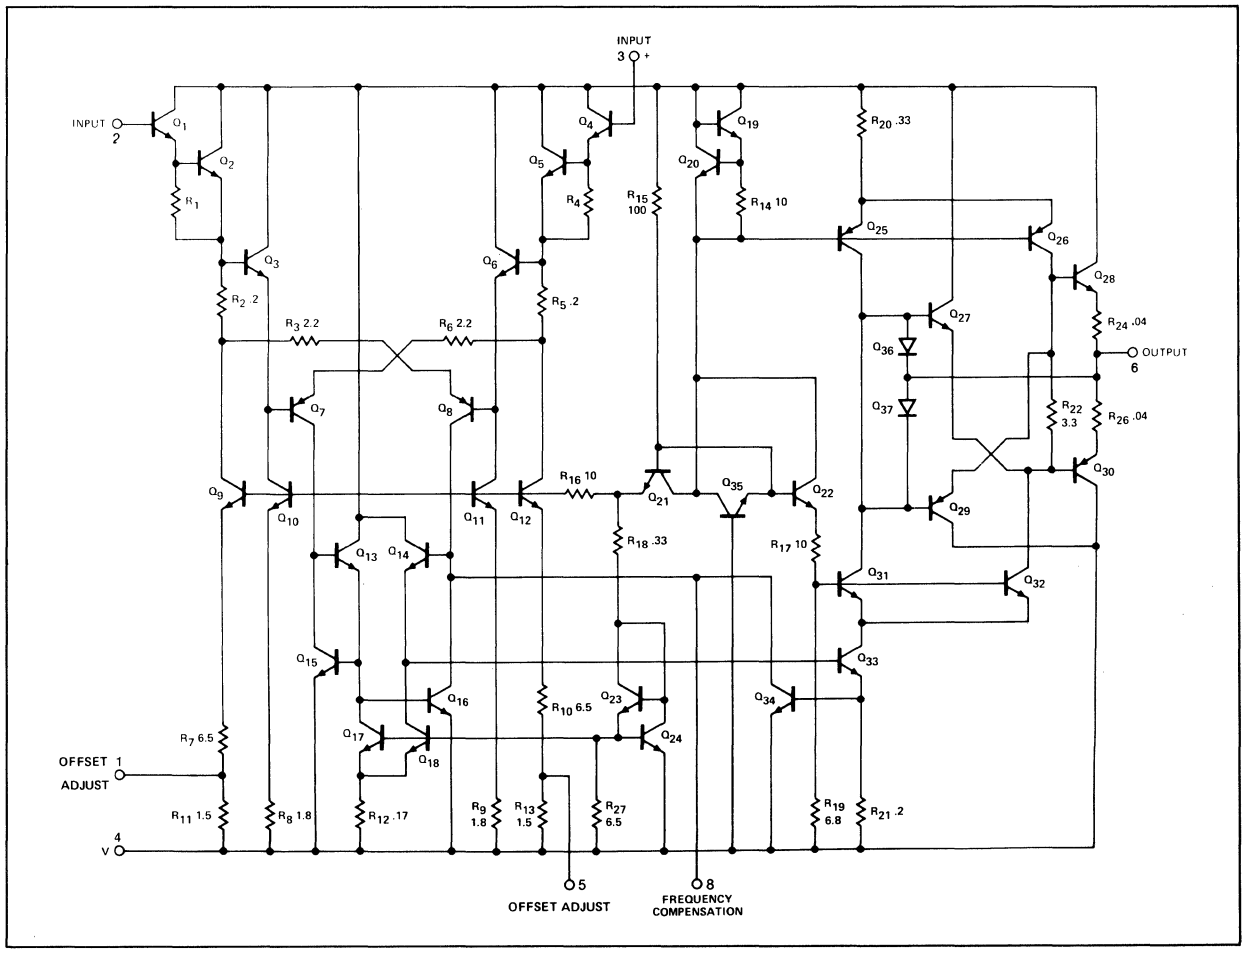

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	±22	V
Internal power dissipation[1]	300	mW
Differential input voltage	±15	V
Common mode input voltage[2]	±15	V
Voltage between offset null and V-	±0.5	V
Operating temperature range		
NE531	0 to +70	°C
SE531	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60 sec)	300	°C
Output short circuit duration[3]	indefinite	

NOTES

1. Rating applies for case temperature to 125°C, derate linearly at 6.5mW/°C for ambient temperatures above +75°C.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply. Rating applies to +125°C case temperature or to +75°C ambient temperature.

DC ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$ unless otherwise specified.

	PARAMETER	TEST CONDITIONS	SE531[1]			NE531			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S \leq 10k\Omega$, $T_A = 25°C$		2.0	5.0		2.0	6.0	mV
		$R_S \leq 10k\Omega$, over temp			6.0			7.5	mV
I_{OS}	Offset current	$T_A = 25°C$		30	200		50	200	nA
		T_A = HIGH			200			200	nA
		T_A = LOW			500			300	nA
I_{BIAS}	Input current	$T_A = 25°C$		300	500		400	1500	nA
		T_A = HIGH			500			1500	nA
		T_A = LOW			1500			2000	nA
V_{CM}	Common mode voltage range	$T_A = 25°C$	±10			±10			V
CMRR	Common mode rejection ratio	$T_A = 25°C$, $R_S \leq 10k\Omega$				70	100		dB
		Over temp $R_S \leq 10k\Omega$	70	90					dB
R_{IN}	Input resistance	$T_A = 25°C$		20			20		MΩ
V_{OUT}	Output voltage swing	$R_L \geq 10k\Omega$, over temp	±10	±13		±10	±13		V
I_{CC}	Supply current	$T_A = 25°C$			7.0			10	mA
		T_{MAX}			7.0			10	mA
P_D	Power consumption	$T_A = 25°C$			210			300	mW
P_{SRR}	Power supply rejection ratio	$R_S \leq 10k\Omega$, $T_A = 25°C$					10	150	μV/V
		$R_S \leq 10k\Omega$, over temp		10	150				μV/V
R_{OUT}	Output resistance	$T_A = 25°C$		75			75		Ω
A_{VOL}	Large signal voltage gain	$T_A = 25°C$, $R_L \geq 10k\Omega$, $V_{OUT} = \pm 10V$	50	100		20	60		V/mV
		$R_L \geq 10k\Omega$, $V_{OUT} = \pm 10V$, over temp	25			15			V/mV

NOTE

1. Temperature range:
   SE531 $-55°C \leq T_A \leq 125°C$
   NE531 $0°C \leq T_A \leq 70°C$

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	NE531			SE531			UNIT
		Min	Typ	Max	Min	Typ	Max	
Full power bandwidth			500			500		kHz
Settling time (1%) (.01%)	Av = +1, $V_{IN} = \pm 10V$		1.5 2.5			1.5 2.5		μs μs
Large signal overshoot Small signal overshoot	Av = +1, $V_{IN} = \pm 10V$ Av = +1, V_{IN} = 400mV		2 5			2 5		% %
Small signal risetime	Av = +1, V_{IN} = 400mV		300			300		ns
Slew rate	A_V = 100 A_V = 10 Av = 1 (noninverting) Av = 1 (inverting)		35 35 30 35		 20 25	35 35 30 35		V/μs V/μs V/μs V/μs

NOTE

1. All AC testing is performed in the transient response test circuit.

TEST LOAD CIRCUITS

OFFSET NULL CIRCUIT



TRANSIENT RESPONSE CIRCUIT

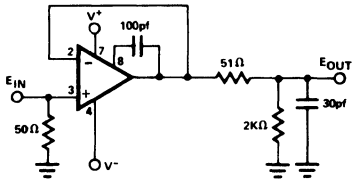

TYPICAL PERFORMANCE CHARACTERISTICS ($V_S = \pm 15V$, $T_A = +25°C$, unless otherwise specified.)

INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

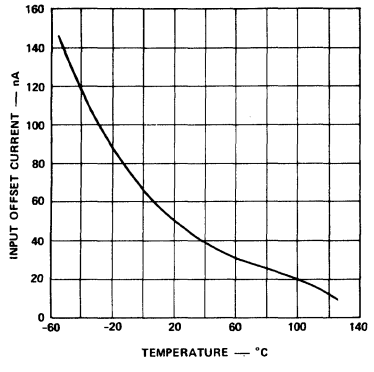

INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

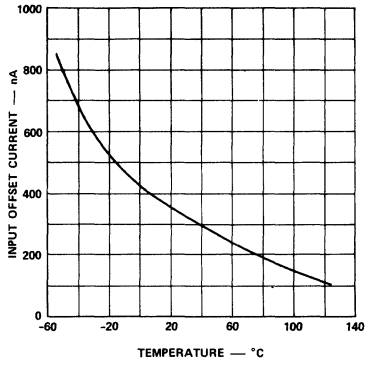

INPUT BIAS CURRENT AS A FUNCTION OF SUPPLY VOLTAGE

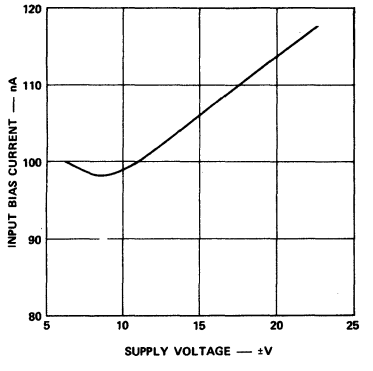

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

CLOSED LOOP NON-INVERTING VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

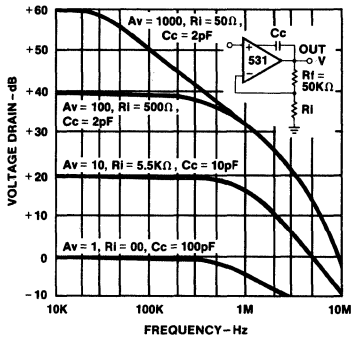

OPEN LOOP PHASE RESPONSE AND VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

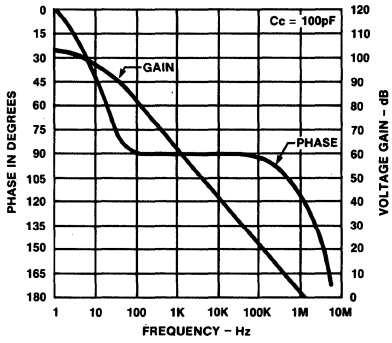

POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE

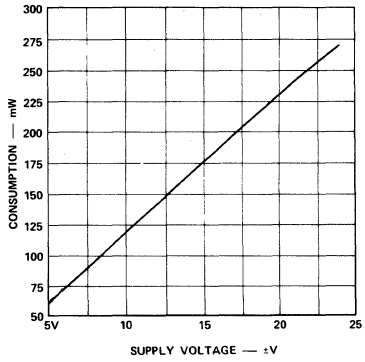

POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE

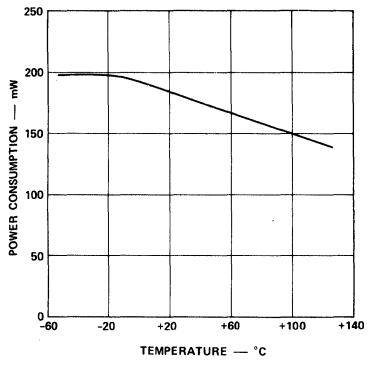

OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE

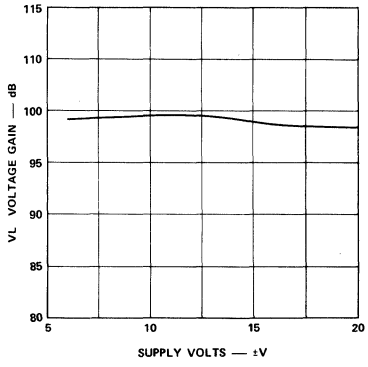

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE

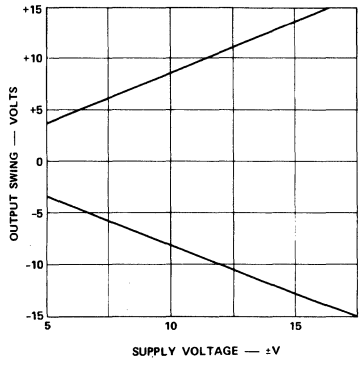

INPUT VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE

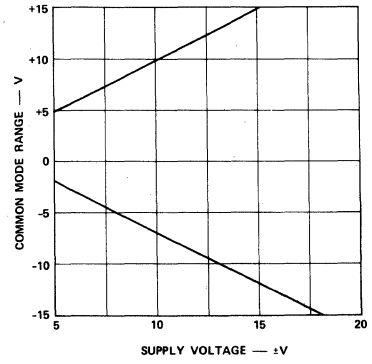

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY

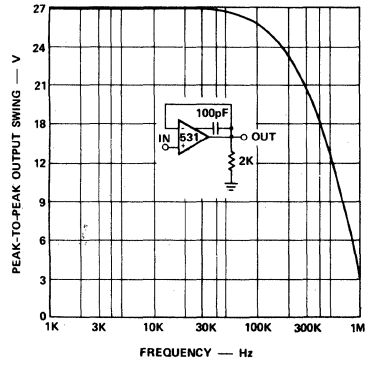

VOLTAGE FOLLOWER LARGE SIGNAL RESPONSE

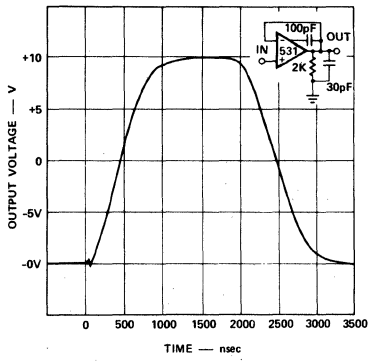

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

VOLTAGE FOLLOWER TRANSIENT RESPONSE

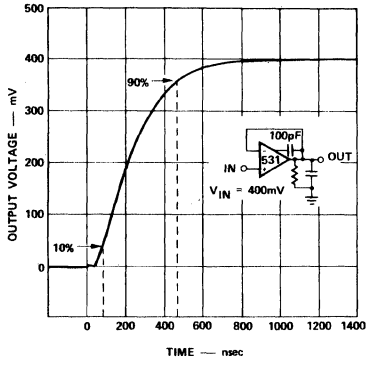

UNITY GAIN INVERTING AMPLIFIER LARGE SIGNAL RESPONSE

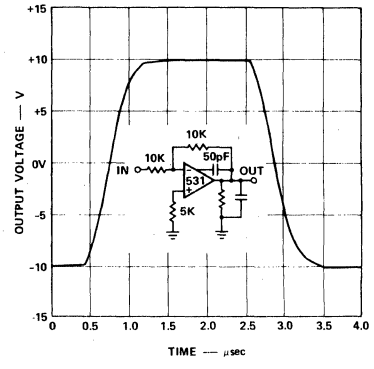

TYPICAL APPLICATIONS

HIGH SPEED INVERTER (10MHz BANDWIDTH)

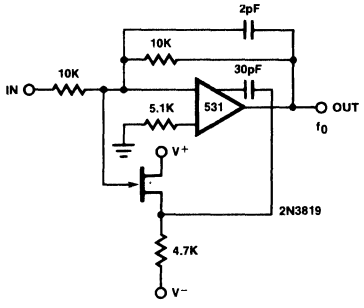

PULSE RESPONSE HIGH SPEED INVERTER



FAST SETTLING VOLTAGE FOLLOWER



LARGE SIGNAL RESPONSE VOLTAGE FOLLOWER



TYPICAL APPLICATIONS (Cont'd)

POLE ACTIVE LOW PASS FILTER BUTTERWORTH MAXIMALLY FLAT RESPONSE*

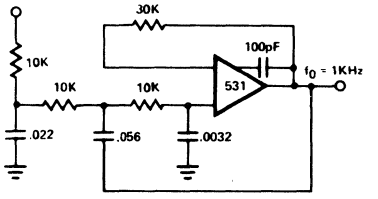

RESPONSE OF 3-POLE ACTIVE BUTTERWORTH MAXIMALLY FLAT FILTER

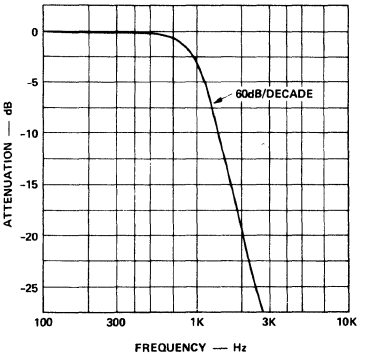

*Reference—EDN Dec. 15, 1970
Simplify 3-Pole Active Filter Design
A. Paul Brokow

PRECISION RECTIFIERS

(a) HALF WAVE

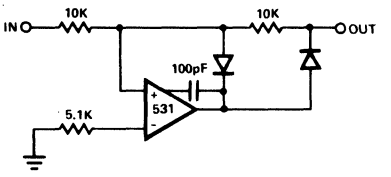

(b) FULL WAVE

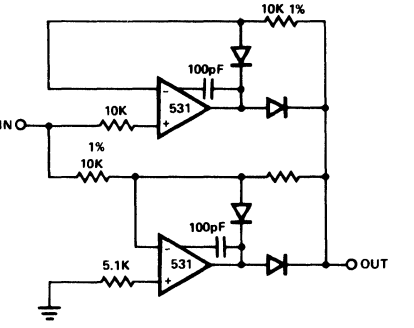

AC MILLIVOLTMETER

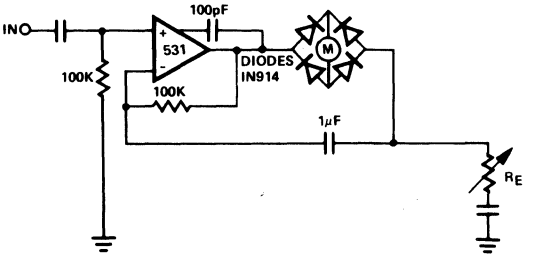

SAMPLE AND HOLD

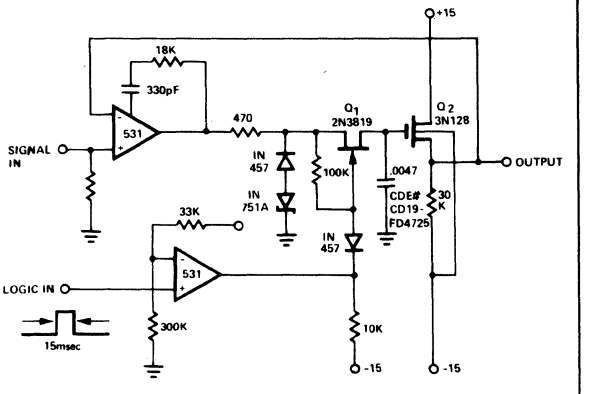

DUAL OPERATIONAL AMPLIFIER SINGLE OR DUAL POWER SUPPLY OPERATION

NE/SE/SA532 LM158/258/358

NE/SE532-N,H,FE/SA532-N
LM158/258/358-N,H,FE

DESCRIPTION

The 532/358 consists of two independent, high gain, internally frequency compensated operational amplifiers designed specifically to operate from a single power supply over a wide range of voltages. Operation from dual power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

FEATURES

- **Internally frequency compensated for unity gain**
- **Large dc voltage gain—(100dB)**
- **Wide bandwidth (unity gain)—1MHz (temperature compensated)**
- **Wide power supply range**
  single supply—(3Vdc to 30Vdc)
  or dual supplies—(±1.5Vdc to ±15Vdc)
- **Very low supply current drain (400μA)—essentially independent of supply voltage (1mW/op amp at +5Vdc)**
- **Low input biasing current—(45nA dc temperature compensated)**
- **Low input offset voltage—(2mVdc) and offset current—(5nA dc)**
- **Differential input voltage range equal to the power supply voltage**
- **Large output voltage—(0Vdc to V+—-1.5Vdc swing)**
- **SE532 Mil std 883A,B,C available**

UNIQUE FEATURES

In the linear mode the input common-mode voltage range includes ground and the output voltage can also swing to ground, even though operated from only a single power supply voltage. The unity gain cross frequency is temperature compensated. The input bias current is also temperature compensated.

PIN CONFIGURATIONS

H PACKAGE*

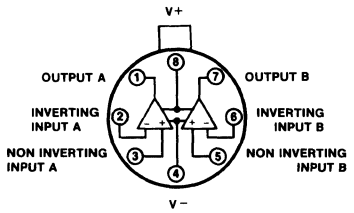

ORDER PART NO.
LM158/258/358H
NE/SE532H
*Metal cans (H) not recommended for new designs

N,FE PACKAGE

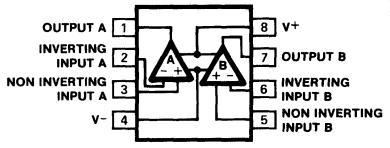

ORDER PART NO.
LM158/258/358N,FE
SA532N
NE/SE532N,FE

EQUIVALENT CIRCUIT

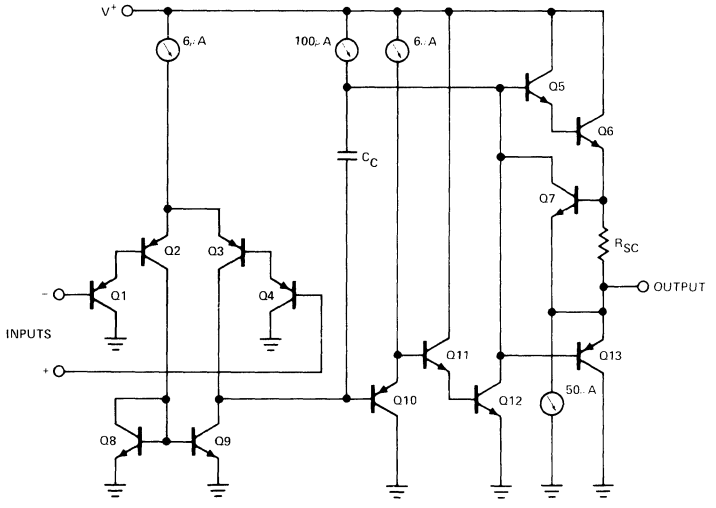

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage, V+	32 or ±16	Vdc
Differential input voltage	32	Vdc
Input voltage	-0.3 to +32	Vdc
Power dissipation[1]		
FE package	900	mW
H package	680	mW
N package	500	mW
Output short-circuit to GND[5]		
V+ < 15 Vdc and T_A = 25°C	Continuous	
Operating temperature range		
NE532/LM358	0 to +70	°C
LM258	-25 to +85	°C
SA532N	-40 to +85	°C
SE532/LM158	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 10sec)	300	°C

NE/SE532-N,H,FE/SA532-N
LM158/258/358-N,H,FE

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V+ = +5V unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE532, LM158/258			NE/SA532/LM358			UNIT
		Min	Typ	Max	Min	Typ	Max	
V_{OS} Offset voltage[1]	$R_S \leq 0\Omega$		±2	±5		±2	±7	mV
	$R_S \leq 0\Omega$, over temp.			±7			±9	mV
V_{OS} Drift	$R_S = 0\Omega$, over temp.		7			7		μV/°C
I_{OS} Offset current	$I_{IN}(+) - I_{IN}(-)$		±3	±30		±5	±50	nA
	Over temp.			±100			±150	nA
I_{OS} Drift			10			10		pA/°C
I_{BIAS} Input current[2]	$I_{IN}(+)$ or $I_{IN}(-)$		45	150		45	250	nA
	Over temp., $I_{IN}(+)$ or $I_{IN}(-)$		40	300		40	500	nA
V_{CM} Common mode voltage range[3]	V+ = 30V	0		V+–1.5	0		V+–1.5	V
	Over temp., V+ = 30V	0		V+–2.0	0		V+–2.0	V
C_{MRR} Common mode rejection ratio		70	85		65	70		dB
V_{OUT} Output voltage swing (V_{OH})	$R_L \geq 2k\Omega$, V+ = 30V, over temp	26			26			V
	$R_L \geq 10k\Omega$, V+ = 30V, over temp	27	28		27	28		V
V_{OUT} Output voltage swing (V_{OL})	$R_L \leq 10k\Omega$, over temp.		5	20		5	20	mV
I_{CC} Supply current	$R_L = \infty$, V+ = 30V		1.0	2.0		1.0	2.0	mA
	$R_L = \infty$ on all amplifiers, over temp		0.5	1.2		0.5	1.2	mA
A_{VOL} Large signal voltage Gain	$R_L \geq 2k\Omega$, $V_{OUT} \pm 10V$, V+ = 15V	50	100		25	100		V/mV
	(for large V_O swing) Over temp.	25			15			V/mV
P_{SRR} Supply voltage rejection ratio	$R_S \leq 0\Omega$	65	100		65	100		dB
Amplifier-to-amplifier coupling[4]	f = 1kHz to 20kHz (input referred)		–120			–120		dB
Output current Source	$V_{IN}+ = +1Vdc$, $V_{IN}- = 0Vdc$, V+ = 15Vdc	20	40		20	40		mA
	$V_{IN}+ = +1Vdc$, $V_{IN}- = 0Vdc$, V+ = 15Vdc, over temp.	10	20		10	20		mA
Sink	$V_{IN}- = +1Vdc$, $V_{IN}+ = 0Vdc$, V+ = 15Vdc	10	20		10	20		mA
	$V_{IN}- = +1Vdc$, $V_{IN}+ = 0Vdc$, V+ = 15Vdc, over temp.	5	8		5	8		mA
	$V_{IN}+ = 0V$, $V_{IN}- = +1Vdc$, $V_O = 200mV$	12	50		12	50		μA
I_{SC} Short circuit current[5]			40	60		40	60	mA
Differential input voltage[6]				V+			V+	V

NOTES

1. $V_O \cong 1.4V$, $R_S = 0\Omega$ with V+ from 5V to 30V; and over the full input common-mode range (0V to V+ –1.5V).
2. The direction of the input current is out of the IC due to the pnp input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.
3. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ –1.5V, but either or both inputs can go to +32V without damage.
4. Due to proximity of external components, insure that coupling is not originating via stray capacitance between these external parts. This typically can be detected as this type of capacitance coupling increases at higher frequencies.
5. Short circuits from the output to V+ can cause excessive heating and eventual destruction. The maximum output current is approximately 40mA independent of the magnitude of V+. At values of supply voltage in excess of +15Vdc, continuous short-circuits can exceed the power dissipation ratings and case eventual destruction.
6. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ –1.5V, but either or both inputs can go to +32Vdc without damage.
7. For operating at high temperatures, all devices must be derated based on a +125°C maximum junction temperature and a thermal resistance of 175°C/W which applies for the device soldered in a printed circuit board, operating in a still air ambient.

TYPICAL PERFORMANCE CHARACTERISTICS

SUPPLY CURRENT

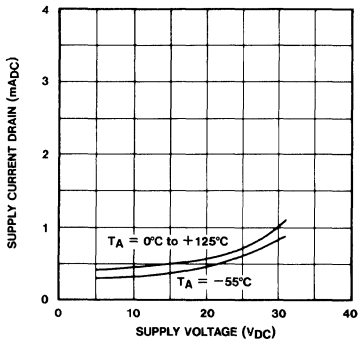

CURRENT LIMITING

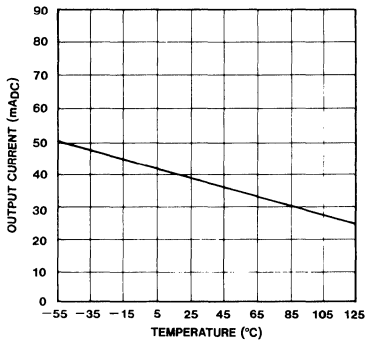

VOLTAGE GAIN

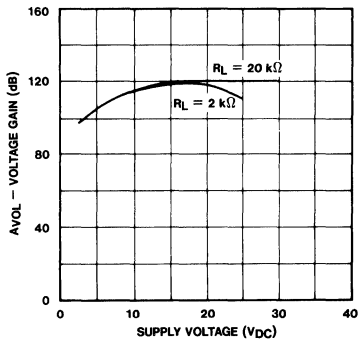

OPEN LOOP FREQUENCY RESPONSE

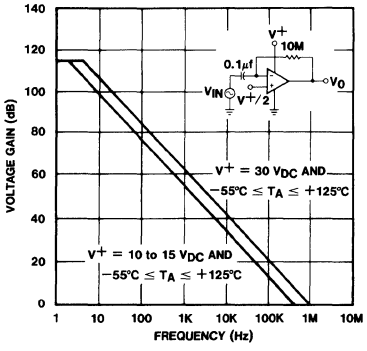

LARGE SIGNAL FREQUENCY RESPONSE

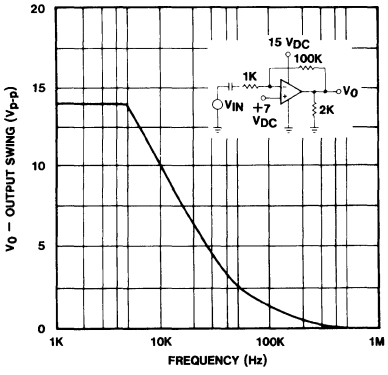

VOLTAGE FOLLOWER PULSE RESPONSE

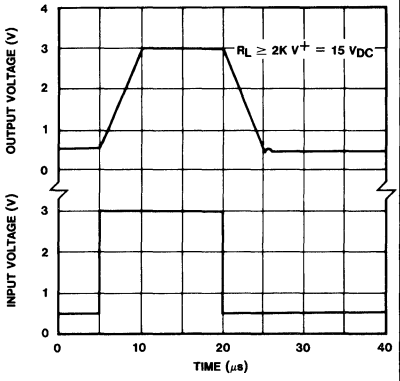

VOLTAGE FOLLOWER PULSE RESPONSE (SMALL SIGNAL)



OUTPUT CHARACTERISTICS CURRENT SOURCING

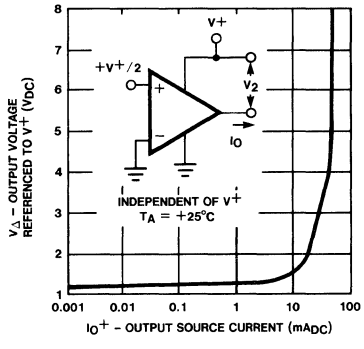

OUTPUT CHARACTERISTICS CURRENT SINKING

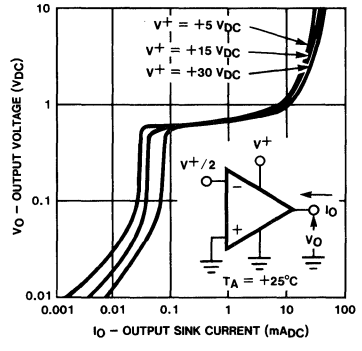

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT VOLTAGE RANGE

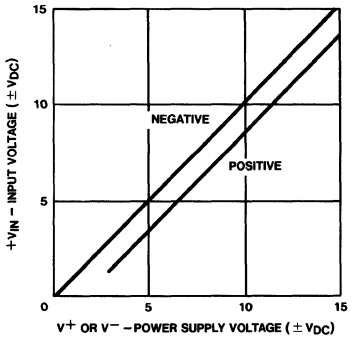

INPUT CURRENT

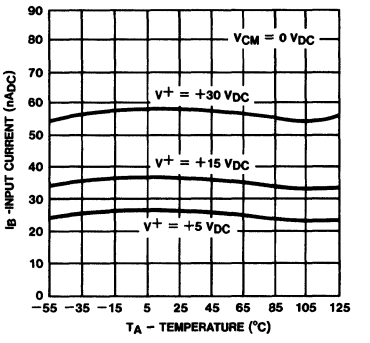

COMMON MODE REJECTION RATIO

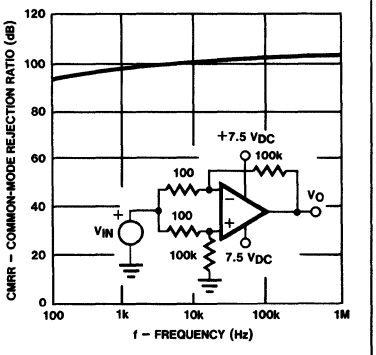

SINGLE OR DUAL HIGH SLEW RATE OP AMP — NE/SE535/5535

NE/SE535N,H,FE • NE/SE5535-H,N

DESCRIPTION

The 535 and 5535 are new generation operational amplifiers featuring high slew rates combined with improved input characteristics. The 535 is a single device while the 5535 is a dual configuration. Internally compensated for unity gain, the SE535 and SE5535 feature a guaranteed unity gain slew rate of 10V/μs with 2mV maximum offset voltage. Industry standard pin out and internal compensation allow the user to upgrade system performance by directly replacing general purpose amplifiers, such as 741, 747 and 1558.

FEATURES

- **15V/μs unity gain slew rate**
- **Internal frequency compensation**
- **Low input offset voltage—2mV**
- **Low input bias current 80nA max**
- **Short circuit protected**
- **Offset null capability**
- **Large common mode and differential voltage ranges**

	535	5535
• **Pin out**	741	747,1558
• **Configuration**	Single	Dual

PIN CONFIGURATIONS

H PACKAGE*



ORDER PART NO.
SE5535H NE5535H

N PACKAGE

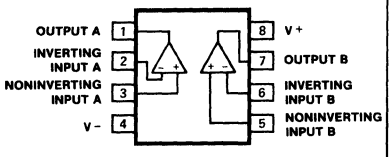

ORDER PART NO.
SE5535N NE5535N

FE, N PACKAGE



ORDER PART NO.
SE535N, FE NE535N, FE

H PACKAGE*



ORDER PART NO.
SE535H NE535H

*Metal cans (H) not recommended for new designs

EQUIVALENT SCHEMATIC (One Amplifier)

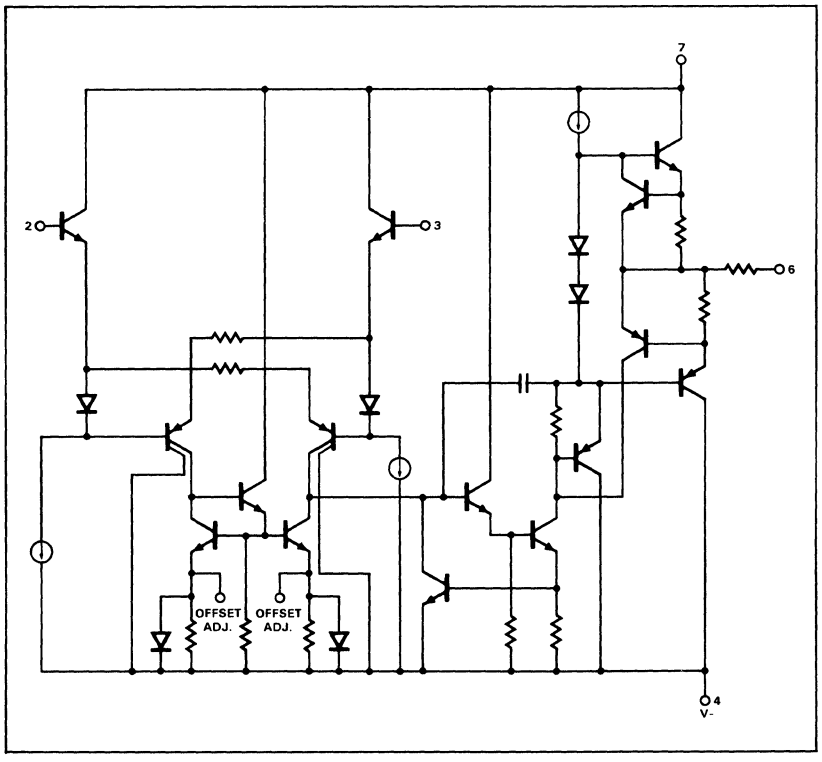

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SE535/ SE5535	NE535/ NE5535	UNIT
Supply voltage	±22	±18	V
Internal power dissipation[1]			
N Package	500	500	mW
H Package	800	800	mW
F Package	1000	1000	mW
Differential input voltage	±30	±30	V
Input voltage[2]	±15	±15	V
Operating temperature range	-55 to +125	0 to +70	°C
Storage temperature range	-65 to +150	-65 to +150	°C
Lead temperature (solder, 60sec)	300	300	°C
Output short circuit[3]	Indefinite	Indefinite	

NOTES

1. Rating applies for thermal resistances junction to ambient of 240°C/W and 150°C/W for N and H packages, respectively. Maximum chip temperature is 150°C.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply. Rating applies to 125°C case temperature or 75°C ambient temperature.

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_S = ±15V unless otherwise specified.*

PARAMETER		TEST CONDITIONS	SE535/SE5535			NE535/NE5535			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage	$R_S \leq 10k\Omega$ $R_S \leq 10k\Omega$, over temp.		0.7	4.0 5.0		2.0	6.0 7.0	mV mV
ΔV_{OS}	Input offset voltage drift	$R_S = 0\Omega$, over temp.		4.0			6.0		µV/°C
I_{OS}	Input offset current	 Over temp.		5	20 40		15	40 80	nA VnA
I_B	Input current	 Over temp.		45	80 200		65	150 200	nA nA
V_{CM} CMRR	Common mode voltage range Common mode rejection ratio	 $R_S \leq 10k\Omega$, over temp.	±12 70	±13 90		±12 70	±13 90		V dB
P_{SRR}	Power supply rejection	$R_S \leq 10k\Omega$, over temp.		30	150		30	150	µV/V
R_{IN}	Input resistance		3	10		1	6		MΩ
A_{VOL}	Large signal voltage gain	$R_L \geq 2k\Omega$, V_{OUT} = ±10V $R_L \geq 2k\Omega$, V_{OUT} = ±10V, over temp.	50 25	500		50 25	500		V/mV V/mV
V_{OUT}	Output voltage	$R_L \geq 2k\Omega$, over temp. $R_L \geq 10k\Omega$, over temp.	±10 ±12	±13 ±14		±10 ±12	±13 ±14		V V
I_{CC}	Supply current	Per amplifier Per amplifier, over temp.		1.8 2	2.8 3.3		1.8 2	2.8	mA mA
P_D	Power dissipation	Per amplifier Per amplifier, over temp.		54 60	84 99		54 60	84	mW mW
I_{SC}	Output short circuit current			25			25		mA
R_{OUT}	Output resistance			100			100		Ω

*NOTE

Temperature range
SE types -55°C ≤ T_A ≤ 125°C
NE types 0°C ≤ T_A ≤ 70°C

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE535/SE5535			NE535/NE5535			UNIT
		Min	Typ	Max	Min	Typ	Max	
Gain/bandwidth product			1			1		MHz
Transient response								
Small signal rise time			0.25			0.25		μs
Small signal overshoot			6			6		%
Settling time	To 0.1%		3			3		μs
Slew rate	$T_A = 25C$, $R_L \geq 10k\Omega$, unity gain, non-inverting	10	15		10	15		V/μs

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY

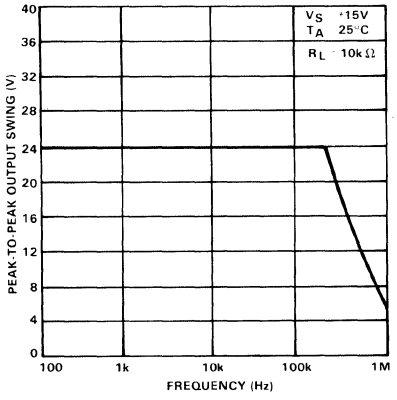

OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

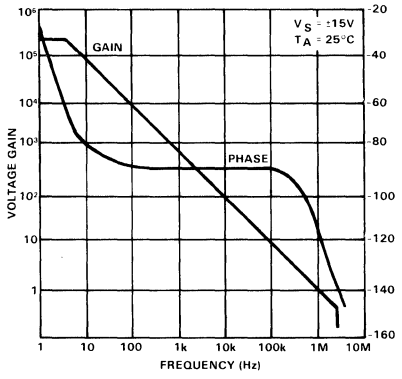

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE

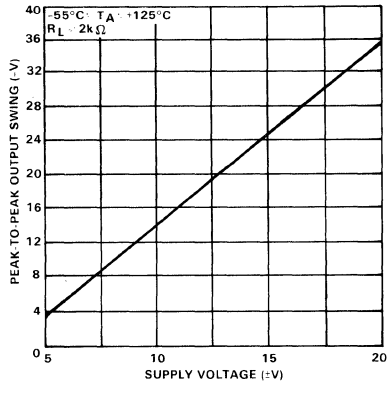

OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE

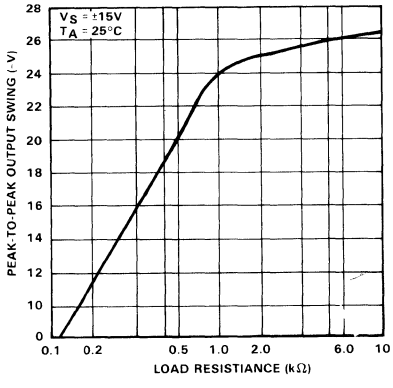

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

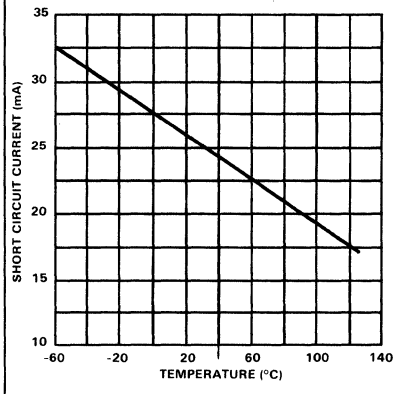

INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY

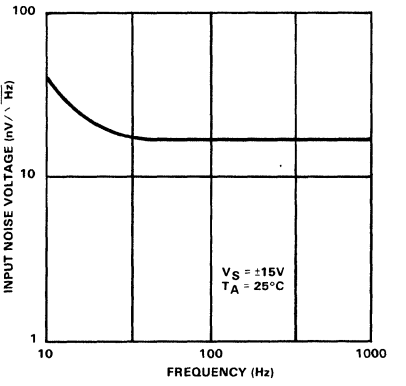

INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY

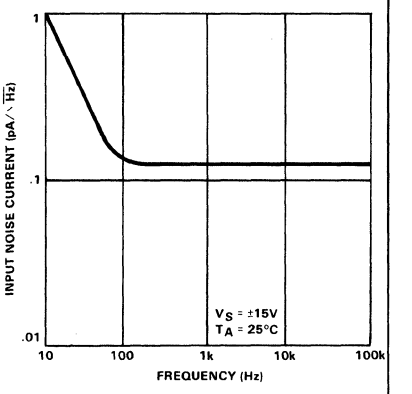

BROADBAND NOISE FOR VARIOUS BANDWIDTHS

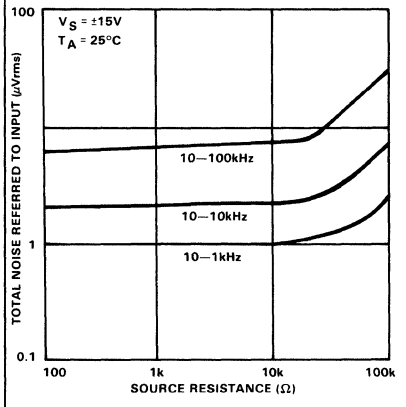

INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE

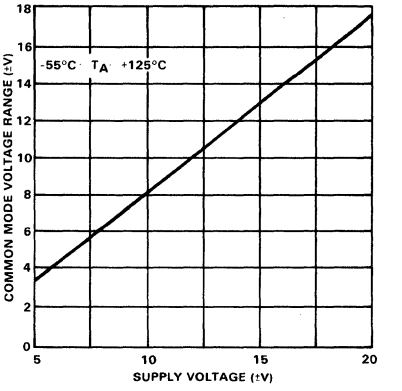

POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE

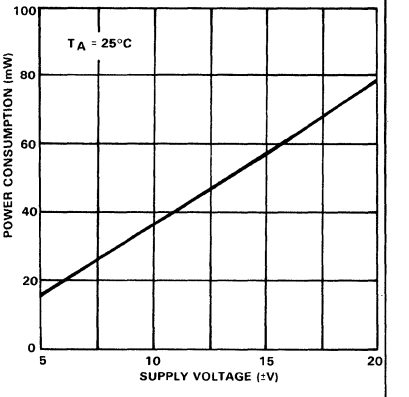

POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE

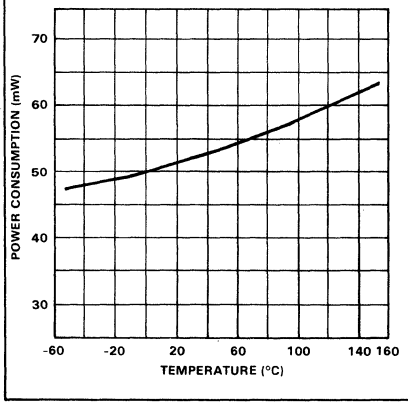

INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

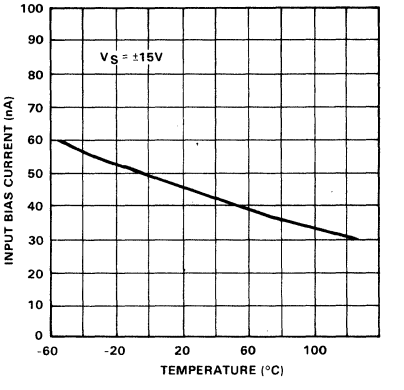

COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY

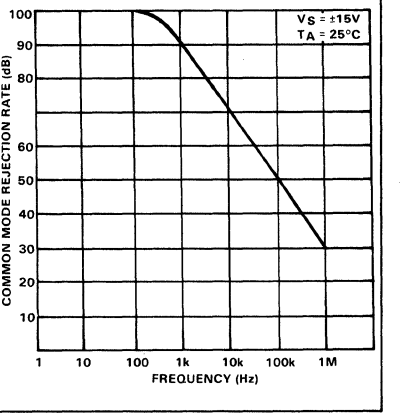

VOLTAGE WAVEFORMS

SETTLING TIME MEASUREMENT

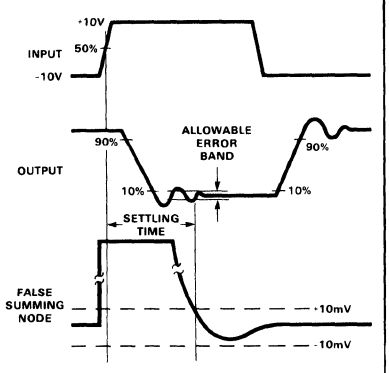

SLEW RATE MEASUREMENT

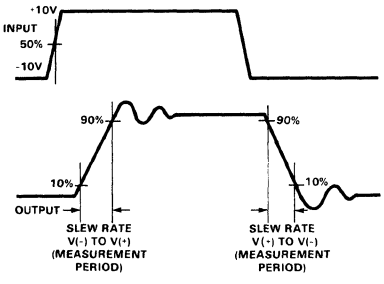

SMALL-SIGNAL TRANSIENT RESPONSE DEFINITIONS

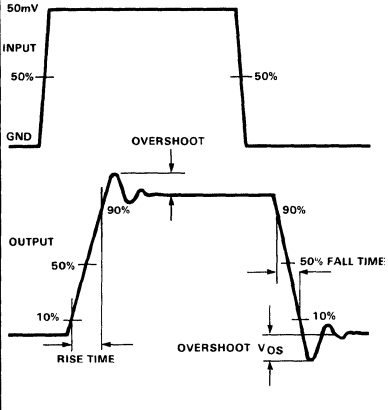

TEST CIRCUITS

SLEW RATE AND SMALL SIGNAL TRANSIENT RESPONSE

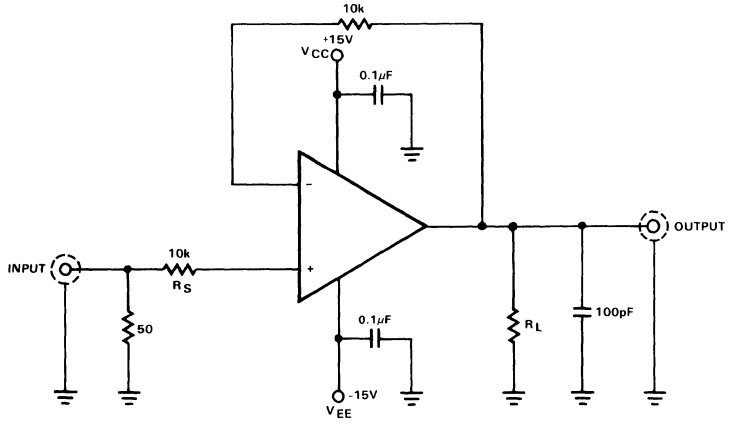

NOTE
Pins not shown are not connected.
All resistors values are typical and in ohms.

SETTLING TIME

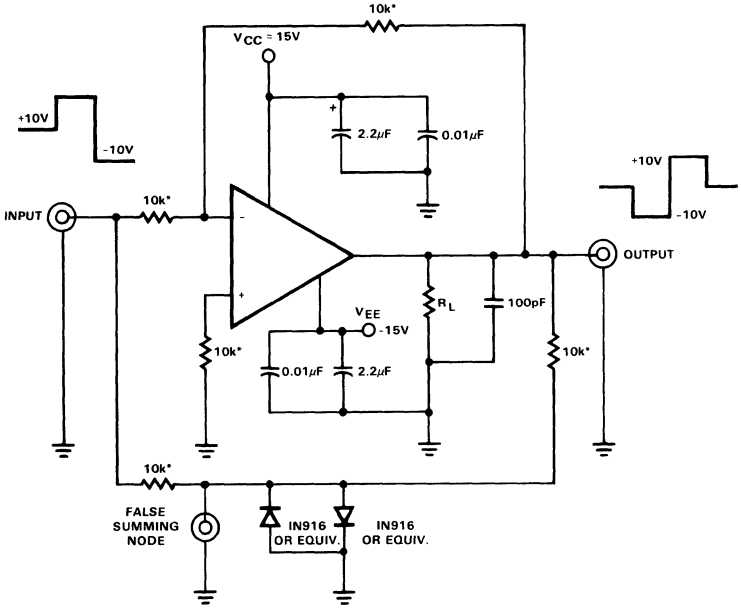

*Match to within 0.01%.

NOTE
Pins not shown are not connected.
All resistors values are typical and in ohms.

DESCRIPTION

The NE/SE538/5538 are new generation operational amplifiers featuring high slew rates combined with improved input characteristics. Internally compensated for gains of 5 or larger, the SE538/5538 offers guaranteed minimum slew rates of 40V/μs or larger. Featuring 2mV max input offset voltage, the 538 is a single amplifier while the 5538 is a dual amplifier. Industry standard pin out and internal compensation allow the user to upgrade system performance by directly replacing general purpose amplifiers, such as 748, 101A, 741, 747 and 1458.

FEATURES

- **2mV input offset voltage**
- **80nA max input offset current**
- **Short circuit protected**
- **Offset null capability**
- **Large common mode and differential voltage ranges**
- **60V/μs slew rate (gain of +5, −4 min)**
- **6MHz gain bandwidth product (gain +5, −4 minimum)**
- **Internal frequency compensation (gain of +5, −4 minimum)**
- **Pin out: 538 same as 741 (single)**
  5538 same as 747, 1458 (dual)

PIN CONFIGURATIONS

N PACKAGE

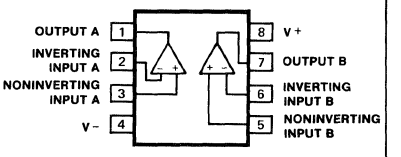

ORDER PART NO.

SE5538N, NE5538N

FE, N PACKAGE

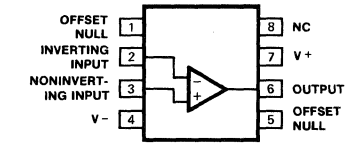

ORDER PART NO.

SE538N, FE NE538N, FE

H PACKAGE*

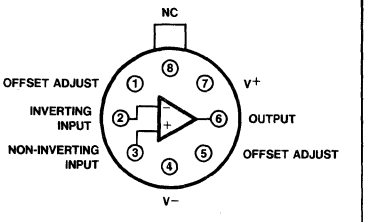

ORDER PART NO.

SE538H NE538H

H PACKAGE*



ORDER PART NO.

SE5538H NE5538H

*Metal cans (H) not recommended for new designs

ABSOLUTE MAXIMUM RATINGS[1,2,3]

	PARAMETER	RATING	UNIT
V_{CC}	Supply voltage		
	SE military grade	±22	V
	NE commercial grade	±18	V
P_D	Internal power dissipation FE package	1000	mW
P_D	Internal power dissipation[1] N package	500	mW
P_D	Internal power dissipation[1] H package	800	mW
	Differential input voltage	±30	V
	Input voltage[2]	±15	V
	Operating temperature range		
	SE military grade	-55 to +125	°C
	NE commercial grade	0 to 70	°C
	Output short circuit[3]	indefinite	
	Storage temperature range	-65 to +150	°C
	Lead temperature (solder, 60sec.)	300	°C

NOTES

1. Rating applies for thermal resistances of 240°C/W and 150°C/W junction to ambient for N and H packages. Maximum chip temperature is 150°C.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply. Rating applies to 125°C case temperature or 75°C ambient temperature.

NE/SE538-N,H,FE • NE/SE5538-H,N

EQUIVALENT SCHEMATIC (EACH AMPLIFIER)

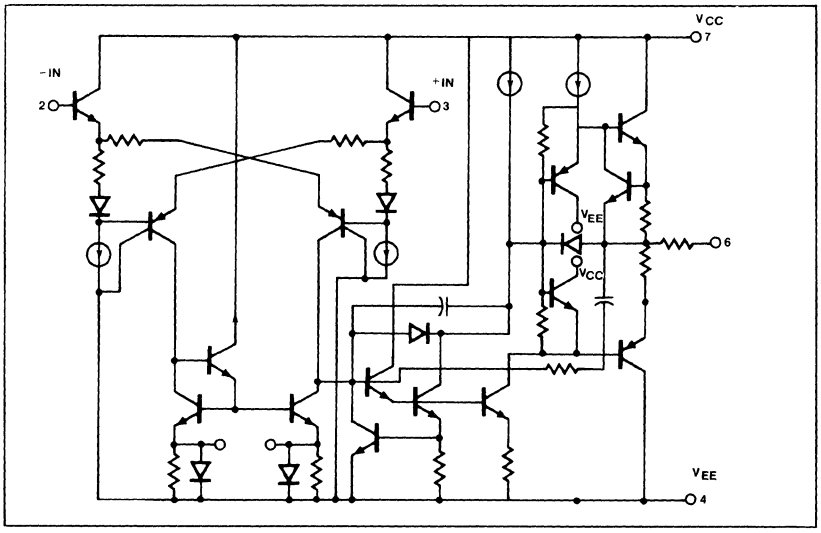

DC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SE538/SE5538			NE538/NE5538			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage	$R_S \leq 10k\Omega$ $R_S \leq 10k\Omega$, over temp.		0.7	4.0 5.0		2.0	6.0 7.0	mV mV
ΔV_{OS}	Input offset voltage drift	$R_S = 0\Omega$, over temp.		4.0			6.0		$\mu V/°C$
I_{OS}	Input offset current	 Over temp.		5	20 40		15	40 80	nA nA
I_B	Input current	 Over temp.		45	80 200		65	150 200	nA nA
V_{CM}	Input common mode voltage range		±12	±13		±12	±13		V
C_{MRR}	Common mode rejection ratio	$R_S \leq 10k\Omega$, over temp.	70	90		70	90		dB
P_{SRR}	Power supply rejection	$R_S \leq 10k\Omega$, over temp.		30	150		30	150	$\mu V/V$
R_{IN}	Input resistance		3	10		1	6		MΩ
A_{VOL}	Large signal voltage gain	$R_L \geq 2k\Omega$, $V_{OUT} = \pm 10V$ Over temp., $R_L \geq 2k\Omega$, $V_{OUT} = \pm 10V$	50 25	200		50 25	200		V/mV V/mV
V_{OUT}	Output voltage	Over temp., $R_L \geq 2k\Omega$ Over temp., $R_L \geq 10k\Omega$	±10 ±12	±13 ±14		±10 ±12	±13 ±14		V V
I_{CC}	Supply current	Per amplifier Over temp., per amplifier		2 2.2	3 3.6		2 2.2	3	mA mA
P_D	Power dissipation	Per amplifier Over temp., per amplifier		60 66	90 108		60 66	90	mW mW
I_{SC}	Output short circuit current			25			25		mA
R_{OUT}	Output resistance			100			100		Ω

NOTE

Temperature Range
SE Types $-55°C \leq T_A \leq 125°C$
NE Types $0°C \leq T_A \leq 70°C$

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE538/SE5538			SE538/NE5538			UNIT
		Min	Typ	Max	Min	Typ	Max	
Gain bandwidth product (Gain +5, -4 minimum)			6			6		MHz
Transient response Small signal rise time Small signal overshoot			0.25 6			0.25 6		μs %
Settling time	To 0.1%		1.2			1.2		μs
Slew rate	Minimum gain = 5 Noninverting $R_L \geq 2k\Omega$	40	60			60		V/μs

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY



OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

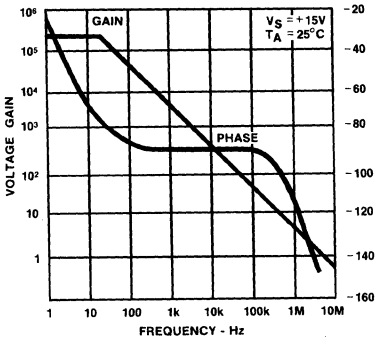

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE

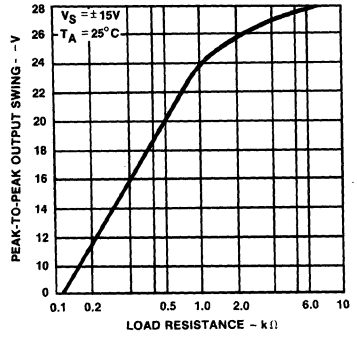

OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

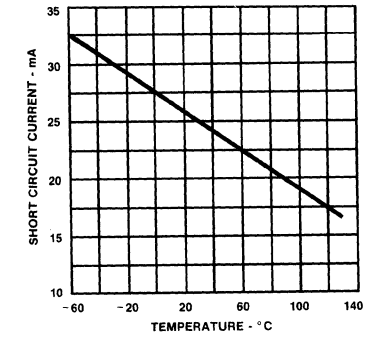

INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY



TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY



BROADBAND NOISE FOR VARIOUS BANDWIDTHS



INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE



POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE

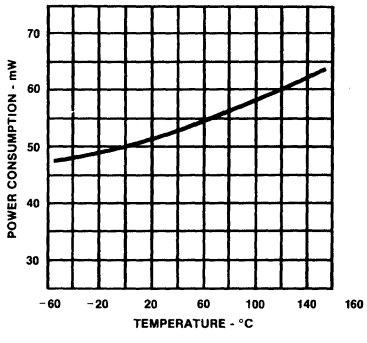

INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY



SETTLING TIME MEASUREMENT WAVEFORMS

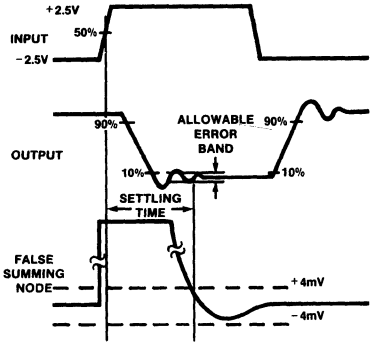

SLEW RATE MEASUREMENT VCC = ±20V

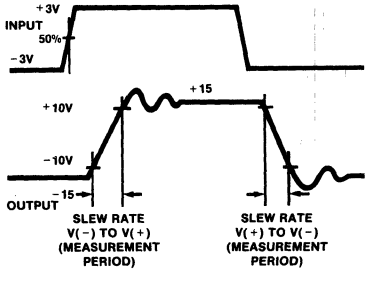

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

SMALL-SIGNAL TRANSIENT RESPONSE DEFINITIONS

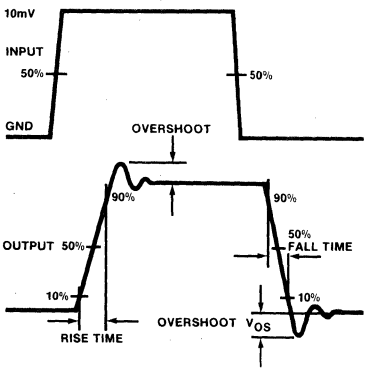

TEST LOAD CIRCUITS

SLEW RATE AND SMALL SIGNAL TRANSIENT RESPONSE TEST CIRCUIT

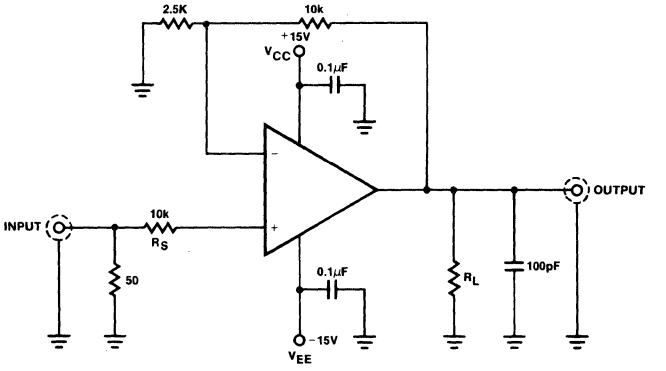

NOTE
Pins not shown are not connected.
All resistors values are typical and in ohms.

TEST LOAD CIRCUITS (Cont'd)

SETTLING TIME TEST CIRCUIT

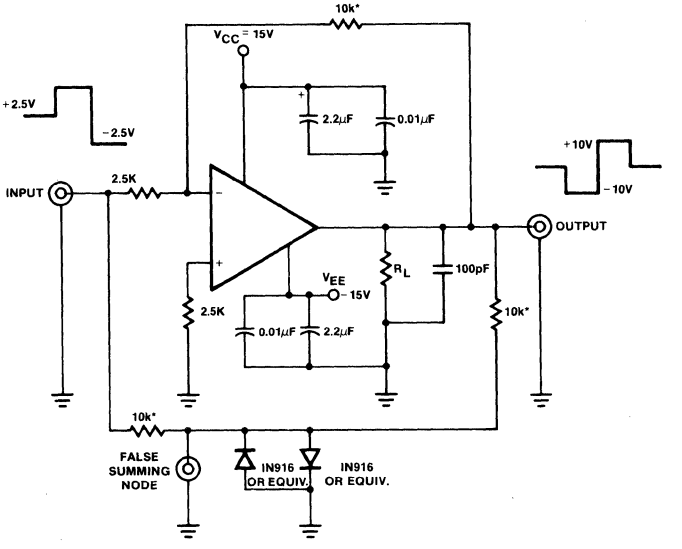

*Match to within 0.01%.
NOTE
Pins not shown are not connected.
All resistors values are typical and in ohms.

DUAL HIGH PERFORMANCE OPERATIONAL AMPLIFIER — NE/SE5512

NE/SE5512-D,N,FE

DESCRIPTION

The 5512 series of high performance operational amplifier provides very good input characteristics. These amplifiers feature low input bias and voltage characteristics such as a 108 op amp with improved CMRR and a high differential input voltage limit achieved through the use of a bias cancellation and PNP input circuits with collector to emitter clamping. The output characteristics are like those of a 741 op amp with improved slew rate and drive capability yet have low supply quiescent current.

APPLICATIONS

- AC amplifiers
- RC active filters
- Transducer amplifiers
- DC gain block
- Battery operation
- Instrumentation applications

FEATURES

- Low input bias $< \pm 3$nA
- Low input offset current $< \pm 3$nA
- Low input offset voltage < 1mV
- Low V_{OS} temperature drift 4μV/°C
- Low input bias temperature drift 30pA/°C
- Low input voltage noise 25nV/$\sqrt{Hz}$
- Low supply current 1.5mA/amp
- High slew rate 1.0V/μs
- High CMRR 100dB
- High input impedance 100MΩ
- High PSRR 110dB
- High differential input voltage limit
- No cross-over distortion
- Indefinite output short circuit protection
- Internally compensated for unity gain

PIN CONFIGURATIONS

D,N,FE PACKAGE



ORDER PART NO.
NE/SE5512N
NE/SE5512FE
NE5512D

ABSOLUTE MAXIMUM RATINGS

Parameter		Rating	Unit
V_{CC}	Supply Voltage	±16	V
V_D	Power dissipation	500	mW
T_A	Operating temperature range		
	NE5512	0 to 70	°C
	SE5512	−55 to +125	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead temperature soldering	300	°C

EQUIVALENT SCHEMATIC

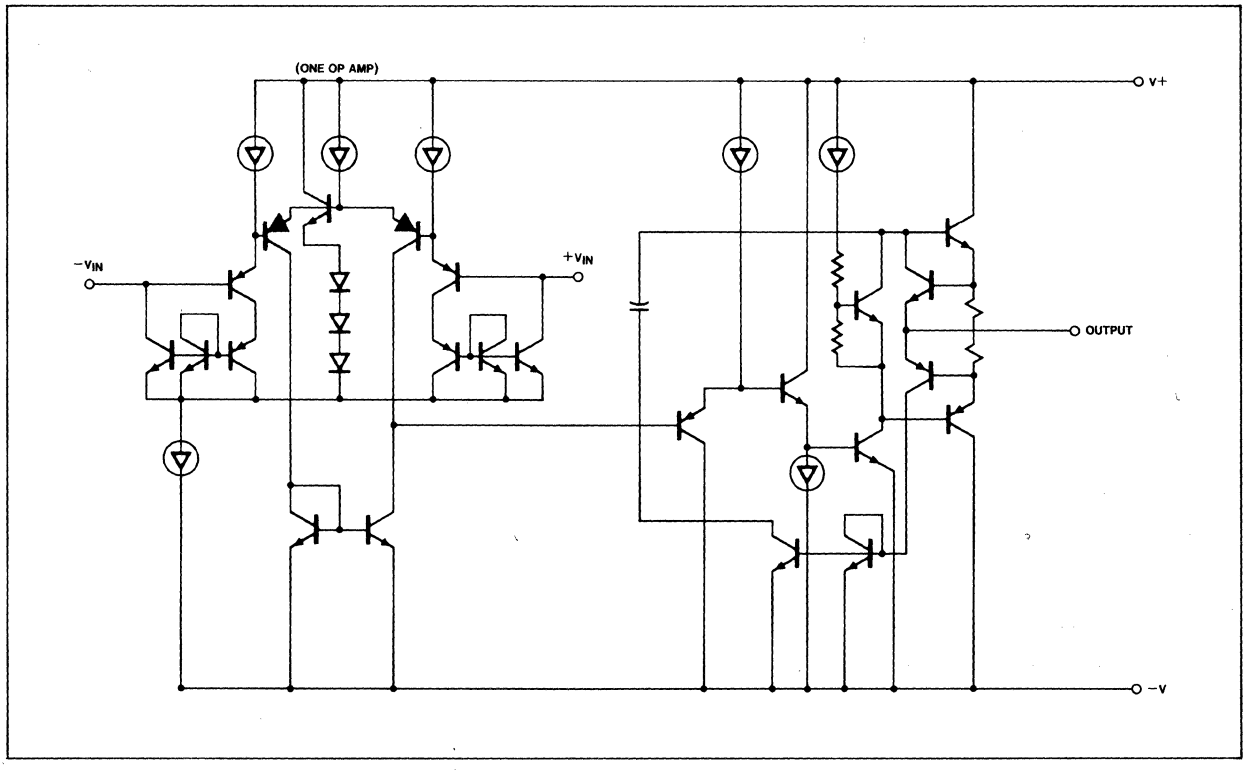

ELECTRICAL PERFORMANCE CHARACTERISTICS $V_{CC} = \pm 15V$, F.R. = −55°C to +125°C (SE), 0°C to +70°C (NE)

PARAMETER		TEST CONDITIONS	SE5512			NE5512			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage	$R_S = 100\Omega$ $T_A = +25°C$ T_A = F.R.		0.7 1	1.5 2.5		1 1.5	3 4	mV
I_{OS}	Input offset current	$R_S = 100k\Omega$ $T_A = +25°C$ T_A = F.R.		3 4	10 20		6 8	20 30	nA
I_B	Input bias current	$R_S = 100k\Omega$ $T_A = +25°C$ T_A = F.R.		3 4	10 20		6 8	20 30	nA
R_{IN}	Input resistance Differential	$T_A = 25°C$		100			100		MΩ
V_{CM}	Input common mode range	$T_A = 25°C$ T_A = F.R.	±13.5 ±13	±13.7 ±13.2		±13.5 ±13	±13.7 ±13.2		V
CMRR	Input common-mode rejection ratio	$V_{CC} = \pm 15V$ $V_{IN} = \pm 13.5V$ (RM) $T_A = 25°C$ $V_{IN} = \pm 13V$ (F.R.) T_A = F.R.	70	100		70	100		dB
A_{VOL} GAIN	Large-signal voltage gain	$R_L = 2k\Omega$ $T_A = 25°C$ $V_O = \pm 10V$ T_A = F.R.	50 25	200		50 25	200		V/mV
S.R.	Slew rate	$T_A = 25°C$	0.6	1			1		V/μs
GBW	Small-signal unity gain bandwidth	$T_A = 25°C$		1			1		MHz
θ_M	Phase margin	$T_A = 25°C$		45			45		Degree
V_{OUT}	Output voltage swing	$R_L = 2k\Omega$ $T_A = 25°C$ T_A = F.R.	±13 ±12.5	±13.5 ±13		±13 ±12.5	±13.5 ±13		V
V_{OUT}	Output voltage swing	$R_L = 600\Omega$* $T_A = 25°C$ T_A = F.R.	±10 ±8	±11.5 ±9		±10 ±8	±11.5 ±9		V
I_{CC}	Power supply current	R_L = Open $T_A = 25°C$ T_A = F.R.		3.4 3.6	5 5.5		3.4 3.6	5 5.5	mA
P_{SRR}	Power supply rejection ratio	$T_A = 25°C$ T_A = F.R.	80 80	110 100		80 80	110 100		dB
AA	Amplifier to amplifier coupling	f = 1kHz to 20kHz $T_A = 25°C$		−120			−120		dB
HD	Total harmonic distortion	f = 10kHz $T_A = 25°C$ $V_O = 7V_{RMS}$		0.01			0.01		%
V_{IN_N}	Input noise voltage	f = 1kHz $T_A = 25°C$		30			30		nV/√Hz
I_{IN_N}	Input noise current	f = 1kHz $T_A = 25°C$		.2			.2		pA/√Hz

NOTE

* For operation at elevated temperature, N package must be derated based on a thermal resistance of 120°/W junction to ambient. Thermal resistance of the FE package is 125°/W.

BRIDGE TRANSDUCER AMPLIFIER

In applications involving strain gauges, accelerometers and thermal sensors a bridge transducer is often used. Frequently the sensor elements are high resistance units requiring equally high bridge resistance for good sensitivity. This type of circuit then demands an amplifier with high input impedance, low bias current and low drift. The circuit shown represents a possible solution to these general requirements (Figure 1).

For V_S = 10 volts, the common mode voltage is approximately +5 volts, well within the common mode limits of the NE5512.

The sensitivity of the input stage is approximately

$$\frac{RF \cdot V_S}{2R}$$

to a change in transducer resistance ΔR. This gives a gain factor of ≃50 for V_S = 10V and R = 25kΩ. The second stage gain is ×100 giving a total gain of ≃5000.

Noise is minimized by shielding the transducer leads and taking special care to determine a good signal ground. Common mode noise rejection is particularly important making matched differential impedance critical. The NE5512 typically provides 100dB of common mode rejection and will considerably reduce this undesirable effect.

The following are sensitivity figures for the transducer circuits.

	ΔR	ΔE_{out}
leg 1	10Ω	−2.6V
	5Ω	−1.3V
leg 2	10Ω	+2.4
	5Ω	+1.2

Temperature compensation of the bridge element is accomplished by using low drift metal film resistors and also by providing a complimentary non-active sensor element to thermally track the offset in the active element.

High frequency roll-off provides attenuation of unwanted noise above the pass band of the transducer. The shunt capacitors across both stage feedback resistors are for this purpose.

NE/SE5512 BRIDGE TRANSDUCER AMPLIFIER

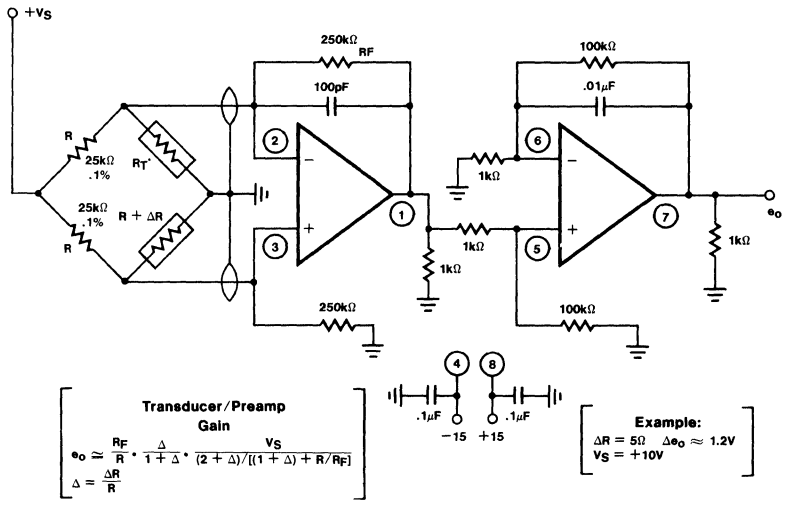

*NOTE
Thermal compensation transducer (non-active)

Figure 1

NE/SE5512 CURRENT TO VOLTAGE CONVERTER WITH 1% ACCURACY [SENSITIVITY: 1 VOLT PER MICROAMP]

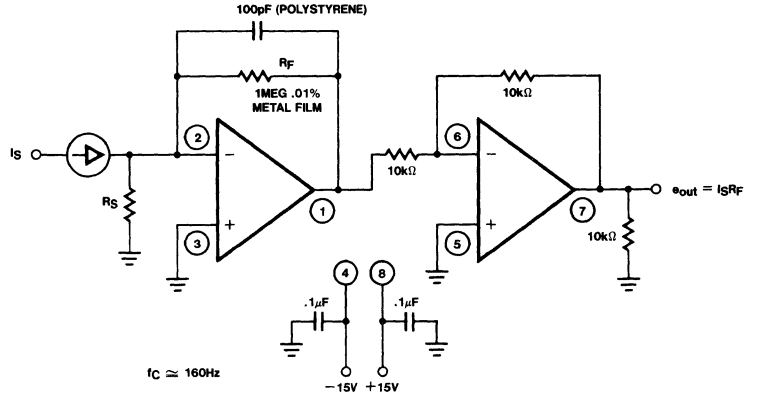

Figure 2

CURRENT TO VOLTAGE CONVERTER

Taking advantage of the very low bias current and offset of the NE5512 is demonstrated in its adaptation to a current to voltage converter as shown below (Figure 2).

The lower limit of measuring accuracy is determined by I_B (inverting) which is typically 6nA. In order to attain a measurement accuracy of 1% the following inequality must hold,

$$I_B \leq (.01)\, I_{Smin}$$

Where I_B = input bias current, I_{Smin} = minimum measured current. For I_B = 6nA and I_{Smin} = 1μA,

$$6nA \leq (.01)\ 1\mu A = 10nA$$

and the inequality hold.

DC offset and current noise gain is determined by

$$\frac{R_F + R_S}{R_S}$$

which ≃ 1 for $R_S \gg R_F$.

The measured results for this circuit appear below (V_{CC} = ± 15 volts).

INPUT CURRENT	OUTPUT VOLTAGE
1μA	1.008 Volts
5μA	5.00 Volts
10.00μA	10.00 Volts

NE5512 OPERATIONAL DIFFERENTIATOR

By utilizing the very high input impedance characteristic of the NE5512, an excellent active differentiator can be realized. Using the circuit shown (Figure 3), good results were obtained as shown by the wave forms in figures 4, 5 and 6. One of the primary problems with such circuits is the tendency toward instability and distortion either due to loading caused by input bias currents or amplifier non-linearity. In addition, gain increases with frequency requiring low input noise in the amplifier.

The relative stability is shown by the output signal wave forms mentioned above. Adding R_1 provides added compensation in the form of a zero near the amplifier unity gain frequency. Frequency range is 100Hz to 10kHz.

In order to obtain good differentiation, the network time constant, RC, must be small relative to the period of the highest frequency present at the input. Since the differentiator will attenuate the signal by a factor of ωRC which may be 100:1 in the operating region, the second amplifier stage is used to compensate for this loss. Various circuits are easily interfaced with the differentiator block due to the inherently low output impedance of the NE5512.

NE/SE5512 ACTIVE DIFFERENTIATOR WITH INVERTING ×10 BUFFER

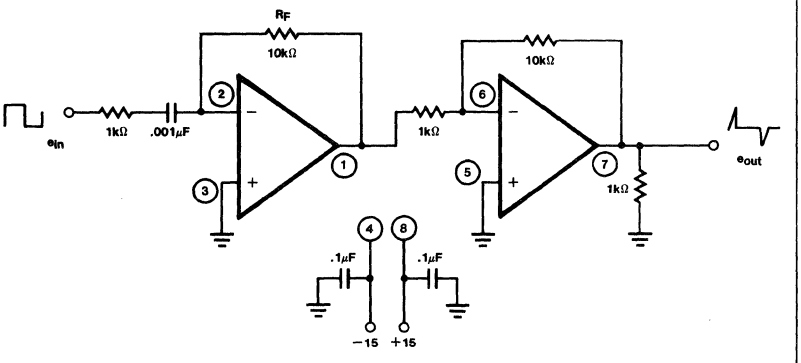

Figure 3

DIFFERENTIATOR WAVEFORMS

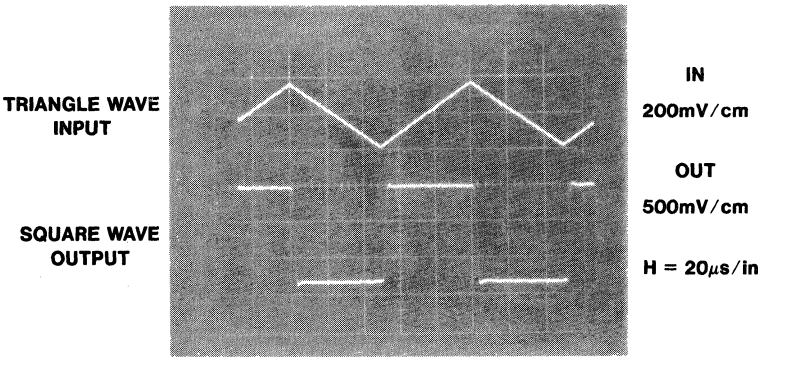

Figure 4

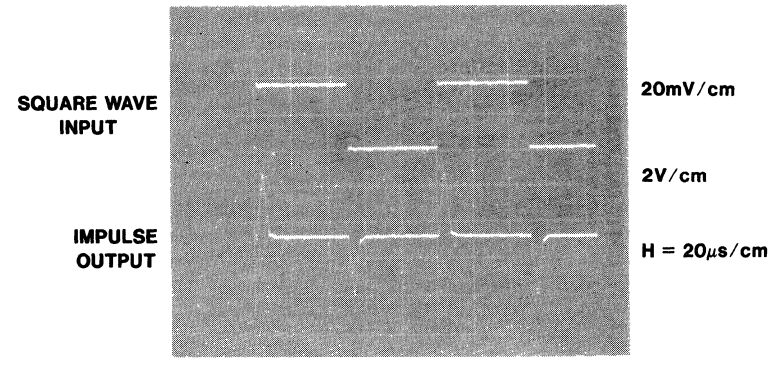

Figure 5

THE OPERATIONAL INTEGRATOR

The operational compliment of the active differentiator is the active integrator. The NE5512 is easily adapted to this function as shown in the circuit below (Figure 7). To obtain satisfactory integration the time constant must fulfill the following requirement:

$RC \geq 15T$

Where T is the period of the input wave form. For the ideal integrator

$$e_{out} = \frac{1}{RC} \int e_{in}\, dt$$

The factor 1/RC represents an attenuation of the input signal. The low signal level is increased by using the second half of the NE5512 as a gain stage following the operational integration. The wave forms in Figures 8 and 9 show the input-output relationship for both a sine wave and a square wave function. A good integrator must exhibit a phase shift of $\geq 89°$ for sine wave input over the active frequency range. For a square wave the resultant output must be a linear ramp. The circuit shown fulfills this requirement (see Figure 7). No external compensation is required since the amplifier is unity gain stable.

DIFFERENTIATOR WAVEFORMS

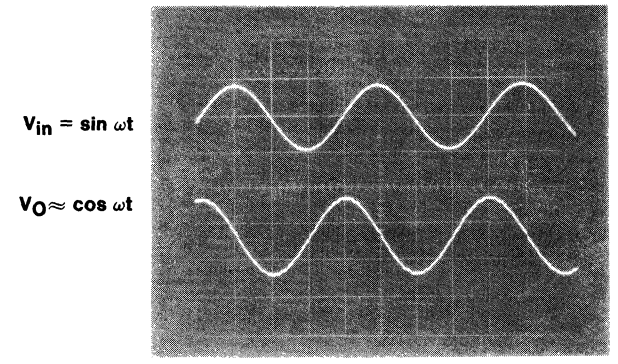

Figure 6

NE/SE5512 ACTIVE INTEGRATOR WITH INVERTING BUFFER

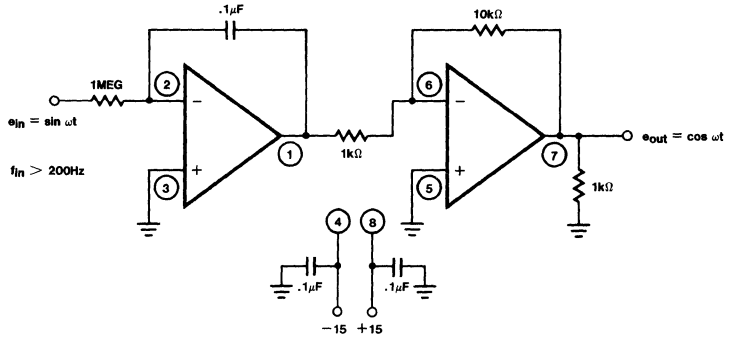

Figure 7

INTEGRATOR WAVEFORMS

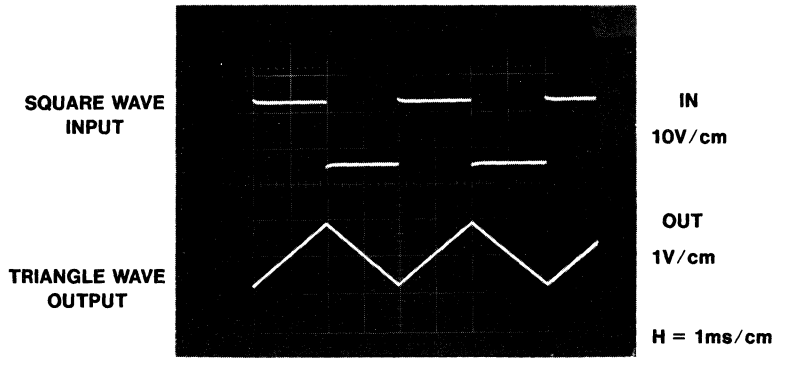

Figure 8

INTEGRATOR WAVEFORMS

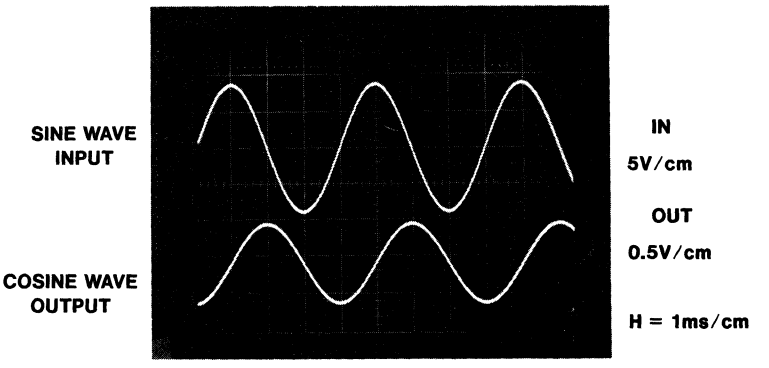

Figure 9

QUAD HIGH PERFORMANCE OP AMP — NE/SE5514

NE/SE5514-F,N

DESCRIPTION

The NE/SE5514 family of Quad Operational Amplifiers sets new standards in Bipolar Quad Amplifier Performance. The amplifiers feature low input bias current and low offset voltages. Pin-out is identical to LM324/LM348 which facilitates direct product substitution for improved system performance. Output characteristics are similar to a μA741 with improved slew and drive capability.

FEATURES

- **Low input bias current: $<\pm 3$nA**
- **Low input offset current: $<\pm 3$nA**
- **Low input offset voltage: <1mV**
- **Low supply current: 1.5mA/Amp**
- **1 V/μsec slew rate**
- **High input impedance: 100MΩ**
- **High common mode impedance: 10GΩ**
- **Internal compensation for unity gain**

APPLICATIONS

- **AC amplifiers**
- **RC active filters**
- **Transducer amplifiers**
- **DC gain block**
- **Instrumentation amplifier**

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.
NE5514F,N
SE5514F,N

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_{CC}	Supply voltage	±16	V
V_{DIFF}	Differential input voltage	32	V
V_{IN}	Input voltage	0 to 32	V
	Output short to ground	Continuous	
TS	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature	300	°C
T_A	Operating temperature range		
	NE5514	0 to 70	°C
	SE5514	−55 to +125	°C

EQUIVALENT SCHEMATIC

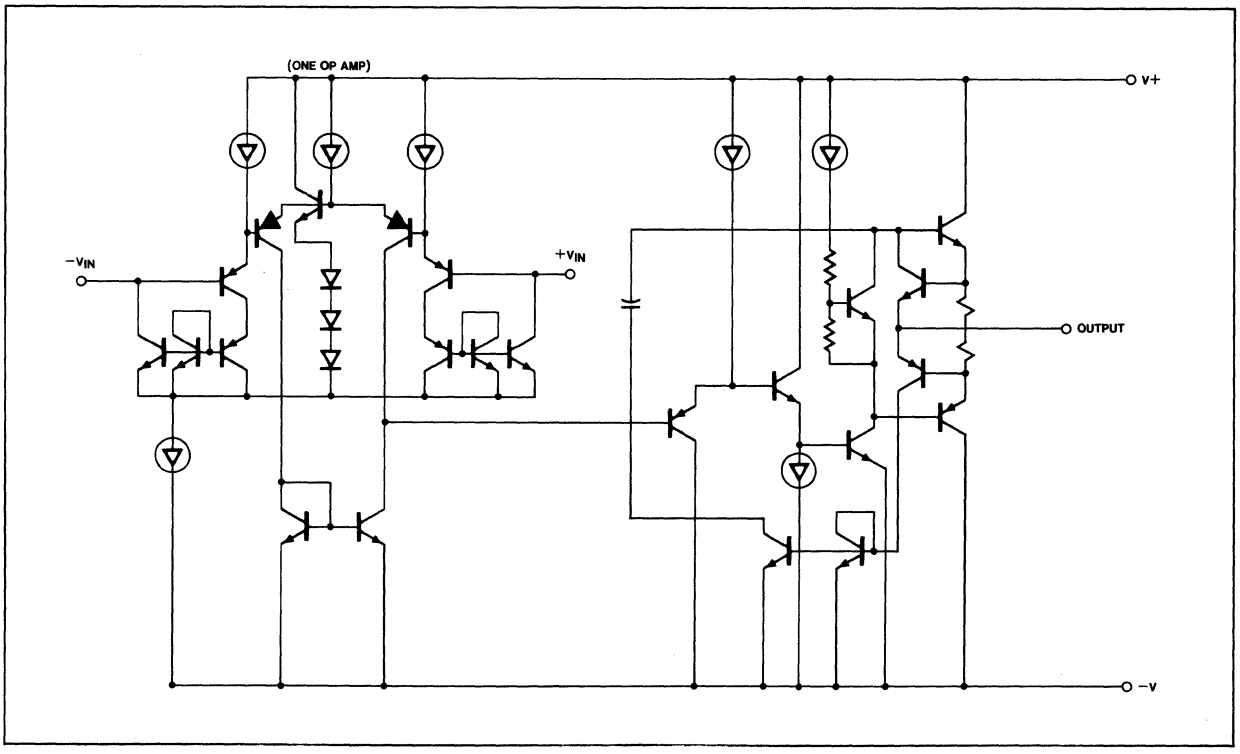

ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 15V$, F.R. = −55°C to +125°C (SE) 0°C to 70°C (NE)

PARAMETER		TEST CONDITIONS	SE5514			NE5514			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage	$R_S = 100\Omega$, $T_A = +25°C$, T_A = F.R.		0.7 1	2 3		1 1.5	5 6	mV
I_{OS}	Input offset current	$R_S = 100k\Omega$, $T_A = +25°C$, T_A = F.R.		3 4	10 20		6 8	20 30	nA
I_B	Input bias current	$R_S = 100k\Omega$, $T_A = +25°C$, T_A = F.R.		3 4	10 20		6 8	20 30	nA
R_{IN}	Input resistance differential	$T_A = 25°C$		100			100		MΩ
V_{CM}	Input common mode range	$T_A = 25°C$, T_A = F.R.	±13.5 ±13.5	±13.7 ±13.2		±13.5 ±13	±13.7 ±13.2		V
CMRR	Input common-mode rejection ratio	$V_{CC} = \pm 15V$, $V_{IN} = \pm 13.5V$ (RM), $T_A = 25°C$, $V_{IN} = \pm 13V$ (F.R.), T_A = F.R.	70	100		70	100		dB
AVOL GAIN	Large-signal voltage gain	$R_L = 2k\Omega$, $T_A = 25°C$ $V_C = \pm 10V$, T_A = F.R.	50 25	200		50 25			V/mV
S.R.	Slew rate	$T_A = 25°C$	0.6	1		0.6	1		V/μs
GBW	Small-signal unity gain bandwidth	$T_A = 25°C$		1			1		MHz
θ_M	Phase margin	$T_A = 25°C$		45			45		Degr
V_{OUT}	Output voltage swing	$R_L = 2k\Omega$, $T_A = 25°C$ T_A = F.R.	±13 ±12.5	±13.5 ±13		±13 ±12.5	±13.5 ±13		V
V_{OUT}	Output voltage swing	$R_L = 600\Omega$*, $T_A = 25°C$ T_A = F.R.	±10 ±8	±11.5 ±9		±10 ±8	±11.5 ±9		V
I_{CC}	Power supply current	R_L = Open, $T_A = 25°C$ T_A = F.R.		6 7	10 12		6 7	10 12	mA
PSRR	Power supply rejection ratio	$T_A = 25°C$, T_A = F.R.	80 80	110 100		80 80	110 100		dB
AA	Amplifier to amplifier coupling	f = 1kHz to 20kHz, $T_A = 25°C$		−120			−120		dB
HD	Total harmonic distortion	f = 10kHz, $T_A = 25°C$ V_O = 7VRMS		0.01			0.01		%
V_{INN}	Input-noise voltage	f = 1kHz, $T_A = 25°C$		30			30		$nV/\sqrt{Hz}$

NOTE

*For operation at elevated temperature, N package must be derated based on a thermal resistance of 95°C/W junction to ambient.

FOUR QUADRANT PHOTO-CONDUCTIVE DETECTOR AMPLIFIER

When operating a photo diode in the photo-conductive mode (reverse biased) very small currents in the micro ampere range must be sensed in the photo active operating region. Dark currents in the nano amperes are common. Generally, for this reason, J-FET input preamps are used to prevent interaction and accuracy degradation due to input bias currents.

The 5514 has sufficiently low input bias current (6na) to allow its use under these circuit constraints as shown in a possible design used to sense four quadrant motion of a light source. By proper summing of the signals from the X and Y axes, four quadrant output may be fed to an X-Y plotter, oscilloscope or computer for simulation. (See figure 1).

The wide input common mode voltage range of the device allows a +10 volt supply to be used to drive the signal bridge giving high sensitivity and improved signal to noise. Obviously, input balancing is critical to achieving common mode signal rejection in addition to adequate shielding of the sensor leads. The sensor head itself must be shielded and the shield grounded to signal common to avoid unwanted noise pick up from power line and other local noise sources. Amplifier response may be shaped to aid in noise reduction by more complex filter configurations. If possible the 5514 should be located in close proximity to the sensor head.

System balance may be done under dark field conditions if adequate photo detector tracking results. However, for high accuracy systems a bipolar balance adjust added to the non-inverting output stage is more desirable. With this latter method the signal bridge is balanced for a null output under uniform light field conditions using the bridge balance pot as shown. D.C. offset is then adjusted using the balance pot on the output amplifier under dark field conditions.

FOUR QUADRANT PHOTO DETECTOR

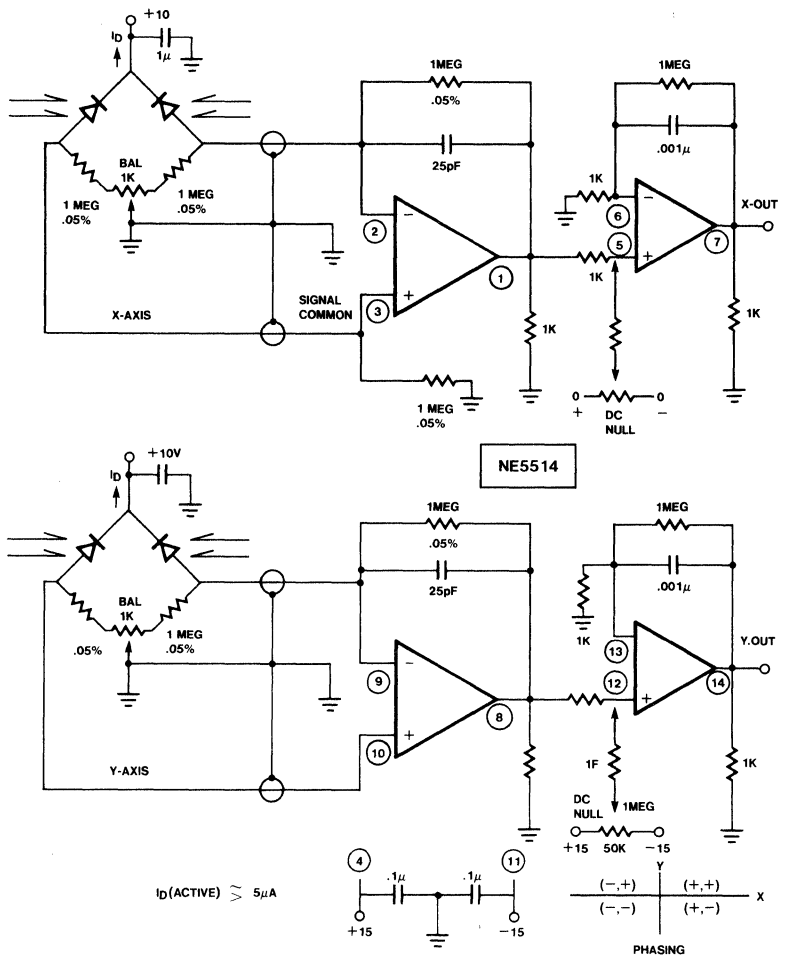

Figure 1

MULTI-TONE BANDPASS FILTER FOR PLL TONE DECODER

In the design of a multiple tone signaling system, particularly where signals are transmitted over long lines, noise and adjacent channel interference may be a significant barrier to reliable communications.

By the use of narrow band active pre-filters to attain selectivity and gain, the effective signal to noise ratio is greatly improved. The NE/SE5514 is easily adapted to such filter configurations due to its inherent stability. In addition its very high input impedance drastically reduces loading on the passive networks and allows for increased "Q" and large value resistors.

The circuit in Figure 2 demonstrates multiple feedback filters operating at four of the standard signaling frequencies. More channels may be added to increase the capacity of the system.

Test results obtained from this filter configuration were as follows:

Wide band signal to noise	63dB
Gain (Mid band)	30dB
Q (effective)	≈ 30
Output	OdBM ($.775v_{rms}$)

Note that the amplifiers are operated from a single +12 volt supply and are biased to half V_{CC} by a simple resistive divider at point B which connects to all non-inverting inputs.

4-STATION 0–50° TEMPERATURE SENSOR

By using an NPN transistor as a temperature sensing element, the NE5514 forms the basis for a multi-station temperature sensor as shown in Figure 3. The principle used is fundamental to the current-voltage relationship of a forward biased junction. The current flow across the base-emitter junction is determined by absolute temperature in the following way:

$$I_E = -(I_C + I_B)$$

$$\text{and} \quad I_E \propto I_S \exp(V_{BE}/V_T);\ V_T = \frac{kt}{q}$$

$$\text{therefore,} \quad V_{BE} \propto V_T \ln I_E/I_S$$

Where I_E is the forward current and I_S is the saturation current inherent in the junction, I_E must be high enough such that the I_S variation with temperature is small relative to I_E ($I_E >> I_S$). I_S is typically .05 pA, therefore, setting I_E to 1 or 2 μA gives the desired condition.

Diode D_1 serves to substantially reduce error due to power supply variation by giving a fixed voltage reference. To calibrate the sensor adjust R_4 for "O" volts output from the NE5514 at 0°C. Adjust R_6 tracking resistor for a scale factor of 100 millivolts per °C output.

Only the transistor need be placed in the temperature controlled environment. Figure 4 shows the addition of an A/D converter and display to give a digital thermometer.

NE/SE5514
MFB BANDPASS FILTER
FOR
MULTI-CHANNEL TONE DECODER

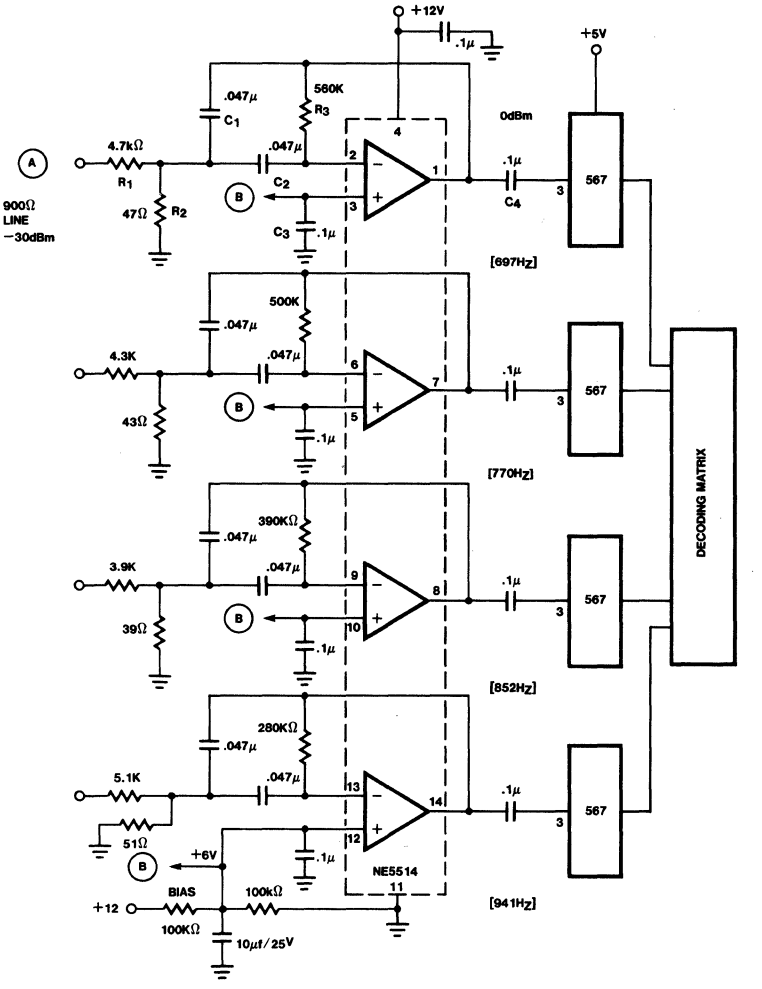

Figure 2

4-CHANNEL TEMPERATURE SENSOR (0–50°C)

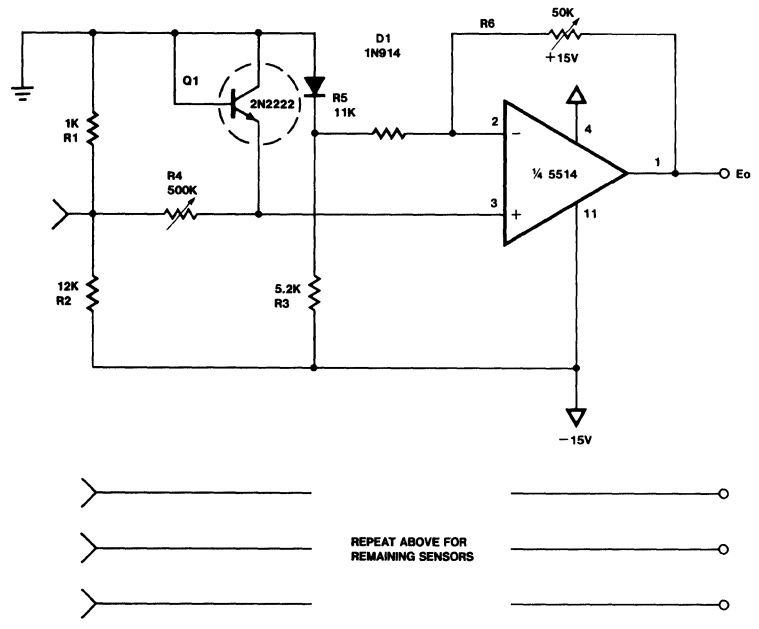

Figure 3

μP-CONTROLLED DIGITAL THERMOMETER

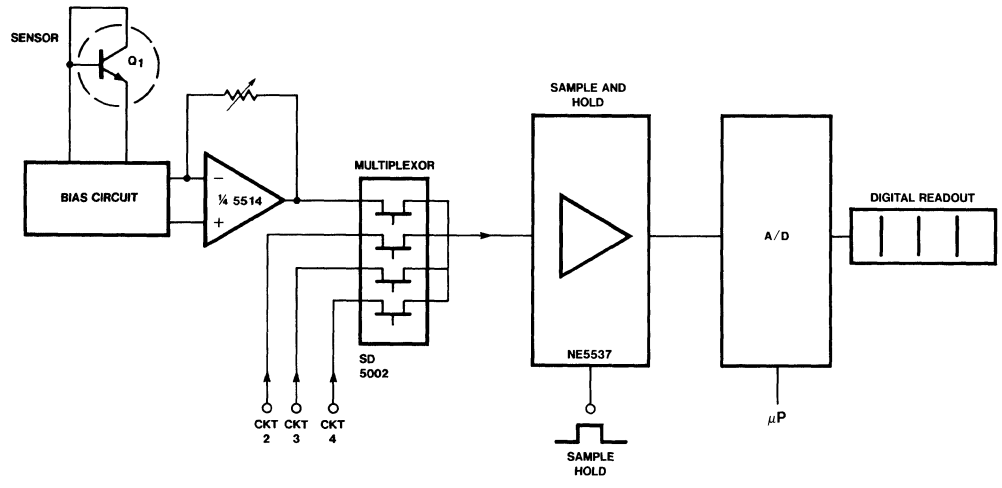

Figure 4

NE5517/5517A-D,N

DESCRIPTION

The NE5517 contains two current controlled transconductance amplifiers, each with a differential input and push-pull output. The NE5517 offers significant design and performance advantages over similar devices for all types of programmable gain applications. Constant impedance buffers are provided which effectively eliminate changes in output offset voltage as the amplifier bias current is varied. Circuit performance is enhanced through the use of linearizing diodes at the inputs which enable a 10 dB signal to noise improvement referenced to .5 percent THD. The NE5517 is suited for a wide variety of industrial and consumer applications and is recommended as the preferred circuit in the Dolby* HX (Headroom Extension) system.

FEATURES

- **Constant impedance buffers**
- **ΔV_{BE} of buffer is constant with amplifier I_{BIAS} change**
- **Pin compatible with LM13600**
- **Excellent matching between amplifiers**
- **Linearizing diodes**
- **High output signal-to-noise ratio**

APPLICATIONS

- **Multiplexers**
- **Timers**
- **Electronic music synthesizers**
- **Dolby* HX Systems**
- **Current-controlled amplifiers, filters**
- **Current-controlled oscillators, impedances**

NOTE

*Dolby is a registered trademark of Dolby Laboratories Inc., San Francisco, Calif.

PIN CONFIGURATION

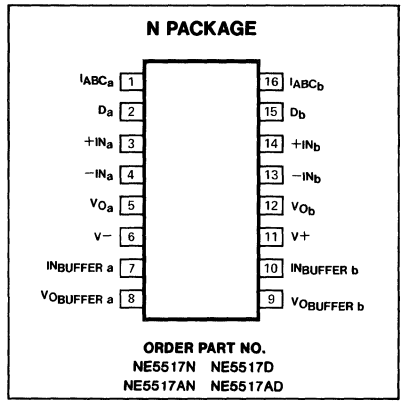

ORDER PART NO.
NE5517N NE5517D
NE5517AN NE5517AD

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply Voltage[1]		
NE5517	36 V_{DC} or ±18	V
NE5517A	44 V_{DC} or ±22	V
Power Dissipation[2] T_A = 25°C		
NE5517N, NE5517AN	570	mW
Differential Input Voltage	±5	V
Diode Bias Current (I_D)	2	mA
Amplifier Bias Current (I_{ABC})	2	mA
Output Short Circuit Duration	Indefinite	
Buffer Output Current[3]	20	mA
Operating Temperature Range		
NE5517N, NE5517AN	0°C to +70	°C
DC Input Voltage	$+V_S$ to $-V_S$	
Storage Temperature Range	−65°C to +150	°C
Lead Temperature (Soldering, 10 Seconds)	300	°C

CIRCUIT SCHEMATIC

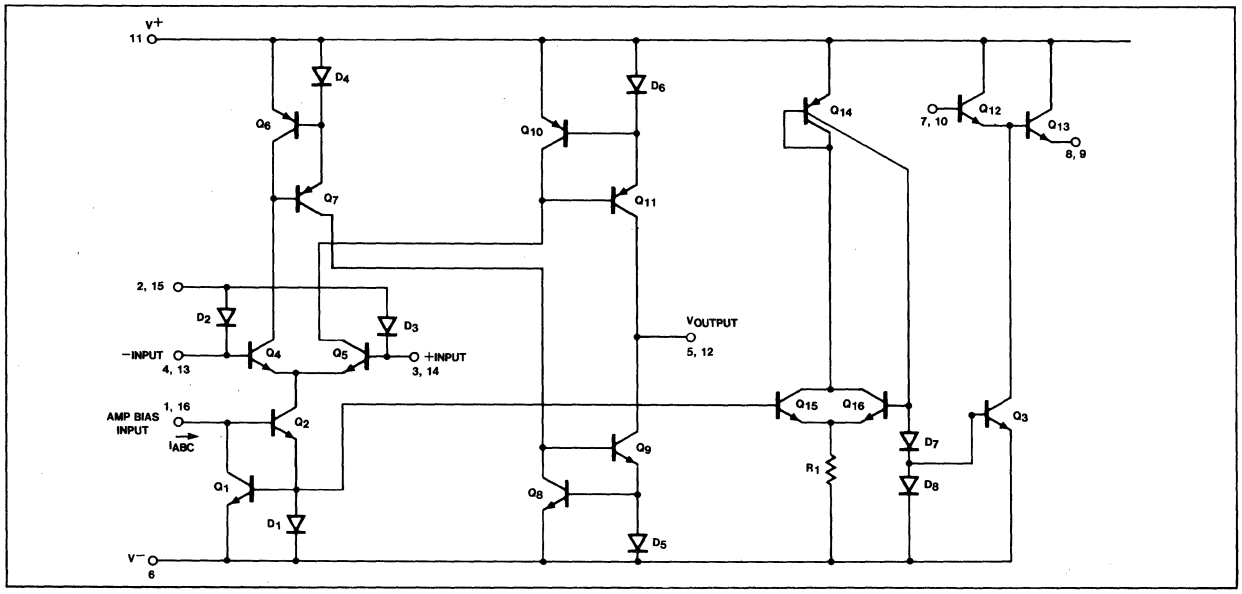

PIN DESIGNATION

PIN NO.	SYMBOL	NAME AND FUNCTION
1	I_{ABCa}	Amplifier bias input A
2	D_a	Diode bias A
3	$+IN_a$	Non-inverting input A
4	$-IN_a$	Inverting input A
5	V_{oa}	Output A
6	V−	negative supply
7	$IN_{Buffer\ (a)}$	Buffer input A
8	$Vo_{Buffer\ (a)}$	Buffer output A
9	$Vo_{Buffer\ (b)}$	Buffer output B
10	$IN_{Buffer\ (b)}$	Buffer input B
11	V+	Positive supply
12	V_{ob}	Output B
13	$-IN_b$	Inverting input B
14	$+IN_b$	Non-inverting input B
15	D_b	Diode bias B
16	I_{ABCb}	Amplifier bias input B

CONNECTION DIAGRAM

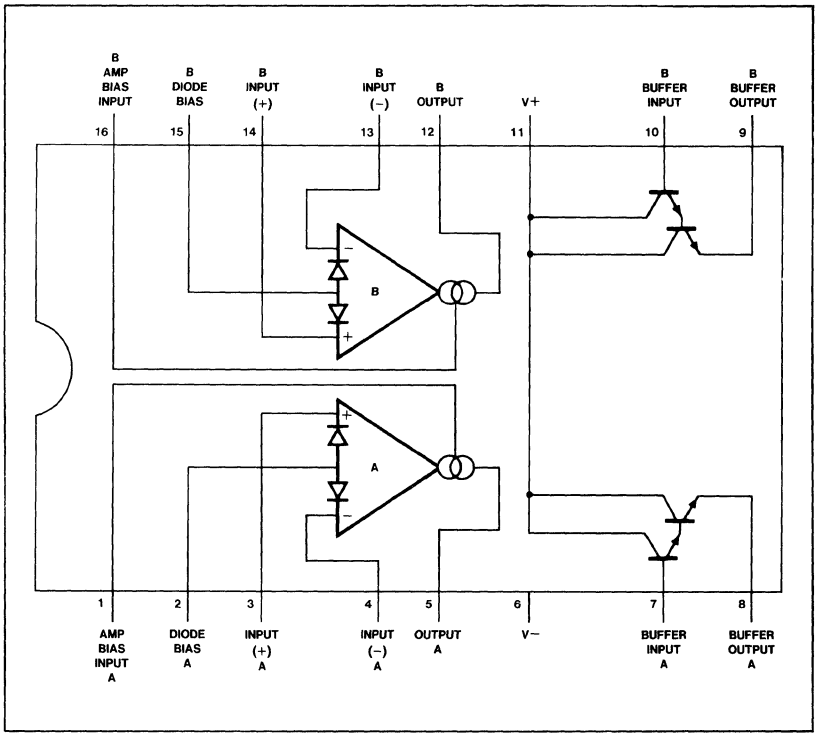

ELECTRICAL CHARACTERISTICS[4]

PARAMETER	TEST CONDITIONS	NE5517			NE5517A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input offset voltage (V_{OS})			0.4	5		0.4	2	mV
	Over temperature range						5	mV
	I_{ABC} 5μA		0.3	5		0.3	2	mV
V_{OS} including diodes	Diode bias current (I_D) = 500μA		0.5	5		0.5	2	mV
Input offset change	5μA ≤ I_{ABC} ≤ 500μA		0.1			0.1	3	mV
Input offset current			0.1	0.6		0.1	0.6	μA
Input bias current			0.4	5		0.4	5	μA
	Over temperature range		1	8		1	7	μA
Forward Transconductance (gm)		6700	9600	13000	7700	9600	12000	μmho
	Over temperature range	5400			4000			μmho
gm tracking			0.3			0.3		dB
Peak output current	RL = 0, I_{ABC} = 5μA		5		3	5	7	μA
	RL = 0, I_{ABC} = 500μA	350	500	650	350	500	650	μA
	RL = 0,	300			300			μA
Peak output voltage								
Positive	RL = ∞, 5μA ≤ I_{ABC} ≤ 500μA	+12	+14.2		+12	+14.2		V
Negative	RL = ∞, 5μA ≤ I_{ABC} ≤ 500μA	−12	−14.4		−12	−14.4		V
Supply current	I_{ABC} = 500μA, both channels		2.6			2.6		mA
V_{OS} sensitivity								
Positive	Δ V_{OS}/Δ V+		20	150		20	150	μV/V
Negative	Δ V_{OS}/Δ V−		20	150		20	150	μV/V
CMRR		80	110		80	110		dB
Common mode range		±12	±13.5		±12	±13.5		V
Crosstalk	Referred to input[5]							
	20Hz < f < 20kHz		100			100		dB
Diff. input current	I_{ABC} = 0, input = ±4V		0.02	100		0.02	10	nA
Leakage current	I_{ABC} = 0 (Refer to test circuit)		0.2	100		0.2	5	nA
Input resistance		10	26		10	26		KΩ
Open loop bandwidth			2			2		MHz
Slew rate	Unity gain compensated		50			50		V/μSec
Buff. input current	5		0.4	5		0.4	5	μA
Peak buffer output voltage	5	10			10			V
Δ V_{BE} of buffer	6 Refer to Buffer V_{BE} test circuit		0.5	5		0.5	5	mV

NOTES

1. For selections to a supply voltage above ±22V, contact factory.
2. For operating at high temperatures, the device must be derated based on a 150°C maximum junction temperature and a thermal resistance of 175° C/W which applies for the device soldered in a printed circuit board, operating in still air.
3. Buffer output current should be limited so as to not exceed package dissipation.
4. These specifications apply for V_S = ±15V, T_A = 25°C, amplifier bias current (I_{ABC}) = 500μA, pins 2 and 15 open unless otherwise specified. The inputs to the buffers are grounded and outputs are open.
5. These specifications apply for V_S = ±15V, I_{ABC} = 500μA, R_{OUT} = 5kΩ connected from the buffer output to $-V_S$ and the input of the buffer is connected to the transconductance amplifier output.
6. V_S = ±15, R_{OUT} = 5Ω connected from Buffer output to $-V_S$ and 5μA ≤ I_{ABC} ≤ 500μA.

TYPICAL PERFORMANCE CHARACTERISTICS

INPUT OFFSET VOLTAGE

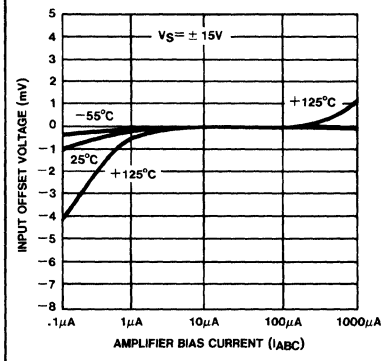

INPUT OFFSET CURRENT

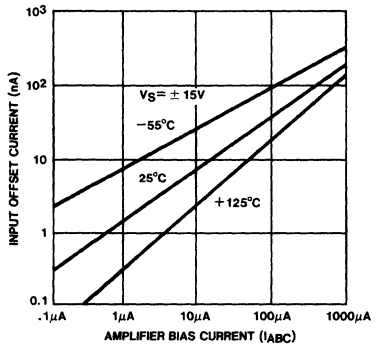

INPUT BIAS CURRENT

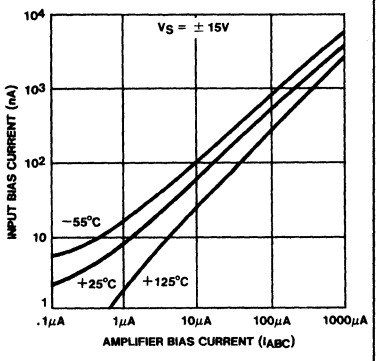

PEAK OUTPUT CURRENT

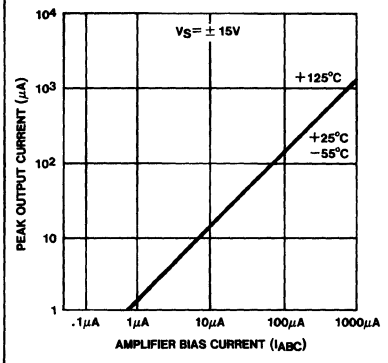

PEAK OUTPUT VOLTAGE AND COMMON MODE RANGE

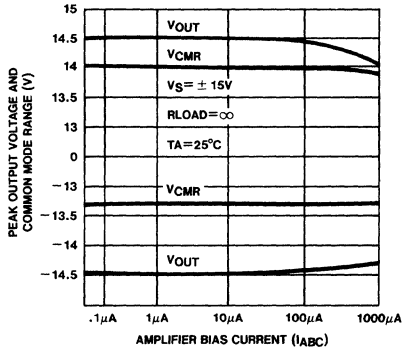

LEAKAGE CURRENT

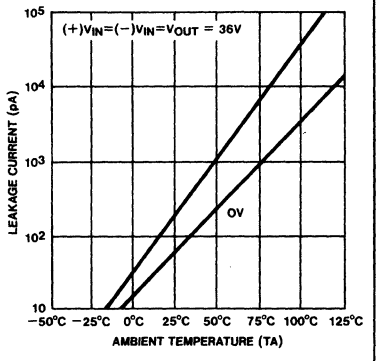

INPUT LEAKAGE

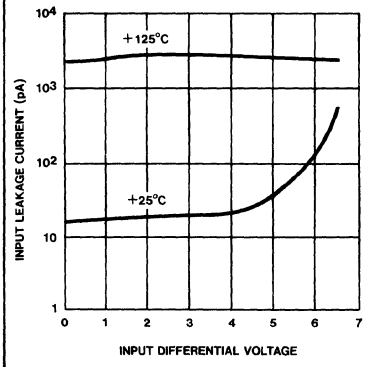

TRANSCONDUCTANCE

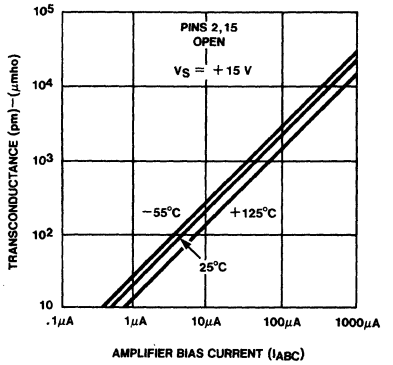

INPUT RESISTANCE

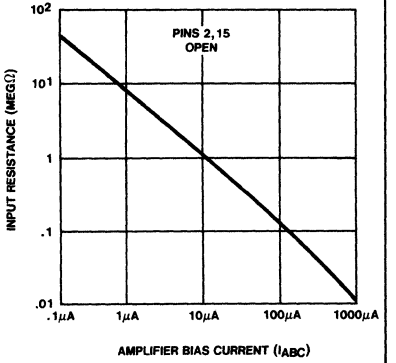

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

AMPLIFIER BIAS VOLTAGE vs AMPLIFIER BIAS CURRENT

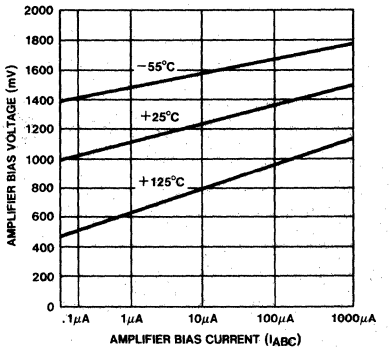

INPUT AND OUTPUT CAPACITANCE

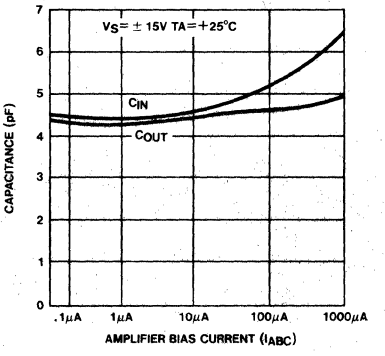

DISTORTION vs DIFFERENTIAL INPUT VOLTAGE

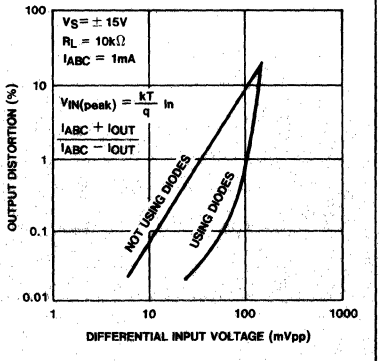

VOLTAGE vs AMPLIFIER BIAS CURRENT

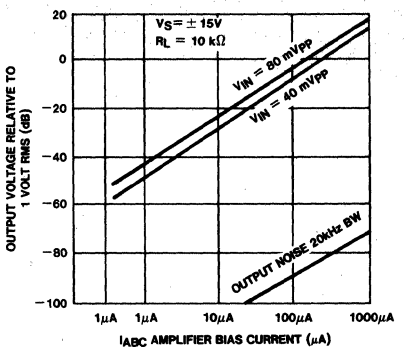

OUTPUT NOISE vs FREQUENCY

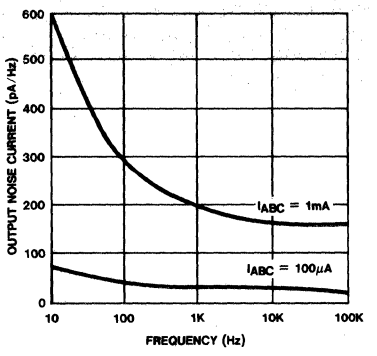

UNITY GAIN FOLLOWER

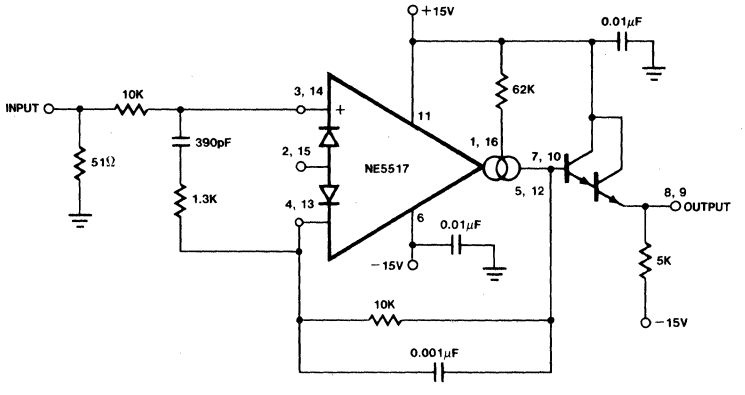

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

LEAKAGE CURRENT TEST CIRCUIT

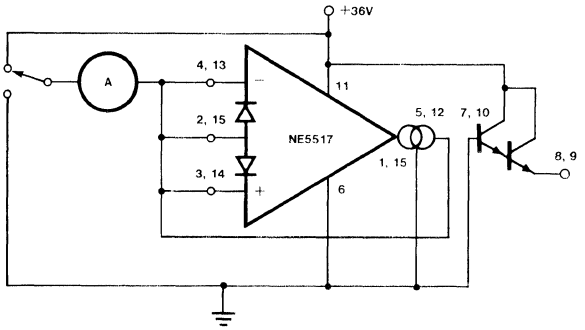

DIFFERENTIAL INPUT CURRENT TEST CIRCUIT

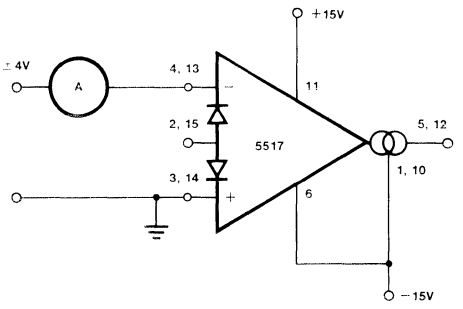

BUFFER V_{BE} TEST CIRCUIT



NE5532/5532A-FE,N, SE5532/5532A-FE

DESCRIPTION

The 5532 is a dual high-performance low noise operational amplifier. Compared to most of the standard operational amplifiers, such as the 1458, it shows better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

This makes the device especially suitable for application in high quality and professional audio equipment, instrumentation and control circuits, and telephone channel amplifiers. The op amp is internally compensated for gains equal to one. If very low noise is of prime importance, it is recommended that the 5532A version be used which has guaranteed noise specifications.

FEATURES

- Small-signal bandwidth: 10MHz
- Output drive capability: 600Ω, 10V (rms)
- Input noise voltage: 5nV/√Hz
- DC voltage gain: 50000
- AC voltage gain: 2200 at 10kHz
- Power bandwidth: 140kHz
- Slew-rate: 9V/μs
- Large supply voltage range: ±3 to ±20V

PIN CONFIGURATION

N, FE PACKAGE

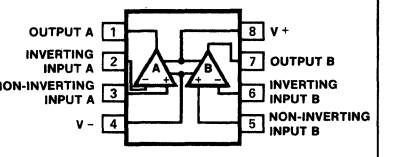

ORDER PART NO.
NE5532FE,N, SE5532FE
NE5532AFE,N, SE5532AFE

EACH AMPLIFIER

EQUIVALENT SCHEMATIC

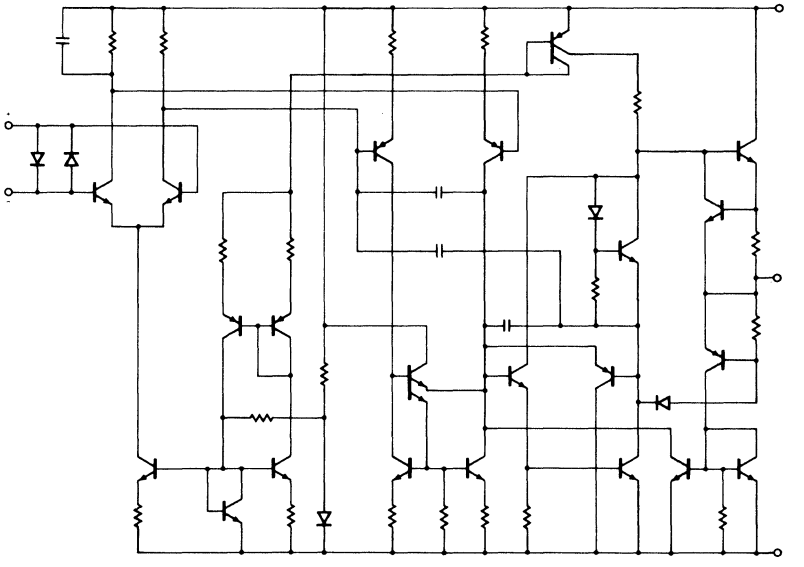

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
V_S	Supply voltage	±22	V
V_{IN}	Input voltage	±V supply	V
V_{DIFF}	Differential input voltage[1]	±.5	V
T_A	Operating temperature range	0 to 70	°C
T_{STG}	Storage temperature	−65 to +150	°C
T_J	Junction temperature	150	°C
P_D	Power dissipation		
	5532FE	1000	mW
	Lead temperature (soldering, 10 sec)	300	°C

NOTES:

1. Diodes protect the inputs against over-voltage. Therefore, unless current-limiting resistors are used, large currents will flow if the differential input voltage exceeds 0.6V. Maximum current should be limited to ± 10mA.
2. Thermal resistance of the FE package is 125°C/W.

NE5532/5532A-FE,N, SE5532/5532A-FE

DC ELECTRICAL CHARACTERISTICS T_A = 25°C, V_S = ±15V unless otherwise specified.[1,2]

PARAMETER		TEST CONDITIONS	SE5532/5532A			NE5532/5532A			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage			.5	2		.5	4	mV
		Over temperature			3			5	mV
I_{OS}	Offset current				100		10	150	nA
		Over temperature			200			200	nA
I_B	Input current			200	400		200	800	nA
		Over temperature			700			1000	nA
I_{CC}	Supply current						8	16	mA
		Over temperature			13				mA
V_{CM}	Common mode input range		±12	±13		±12	±13		V
CMRR	Common mode rejection ratio		80	100		70	100		dB
PSRR	Power supply rejection ratio			10	50		10	100	μV/V
A_{VOL}	Large signal voltage gain	$R_L \geq 2k\Omega$ V_O = ±10V	50			25	100		V/mV
		Over temperature	25			15			V/mV
		$R_L \geq 600\Omega$, V_O = ±10V	40			15	50		V/mV
		Over temperature	20			10			V/mV
V_{OUT}	Output swing	$R_L \geq 600\Omega$				±12	±13		V
		$R_L \geq 600\Omega$, V_S = ±18V				±15	±16		V
		$R_L \geq 2k\Omega$	±12	±13					V
R_{IN}	Input resistance		30	300		30	300		kΩ
I_{SC}	Output short circuit current			38			38		mA

NOTES
1. For NE5532, NE5532A, T_{Min} = 0°C, T_{Max} = 70°C.
2. For SE5532/5532A, T_{Min} = −55°C, T_{Max} = +125°C.

AC ELECTRICAL CHARACTERISTICS T_A = 25°C, V_S = ±15V unless otherwise specified.

PARAMETER		TEST CONDITIONS	NE/SE5532/5532A			UNIT
			Min	Typ	Max	
R_{OUT}	Output resistance	A_V = 30dB Closed loop f = 10kHz, R_L = 600Ω		0.3		Ω
	Overshoot	Voltage follower V_{IN} = 100mV p-p C_L = 100pF R_L = 600Ω		10		%
	Gain	f = 10kHz		2.2		V/mV
	Gain bandwidth product	C_L = 100pF R_L = 600Ω		10		MHz
	Slew rate			9		V/μs
	Power bandwidth	V_{OUT} = ±10V		140		kHz
		V_{OUT} = ±14V, R_L = 600Ω, V_{CC} = ±18V		100		kHz

ELECTRICAL CHARACTERISTICS T_A = 25°C, V_S = ±15V unless otherwise specified.

PARAMETER	TEST CONDITIONS	NE/SE5532			NE/SE5532A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input noise voltage	f_O = 30Hz		8			8	12	nV/√Hz
	f_O = 1kHz		5			5	6	nV/√Hz
Input noise current	f_O = 30Hz		2.7			2.7		pA/√Hz
	f_O = 1kHz		0.7			0.7		pA/√Hz
Channel separation	f = 1kHz, RS = 5kΩ		110			110		dB

TYPICAL PERFORMANCE CHARACTERISTICS

OPEN LOOP FREQUENCY RESPONSE

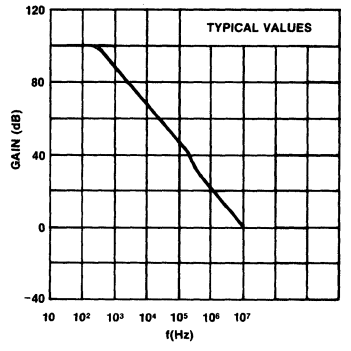

CLOSED LOOP FREQUENCY RESPONSE

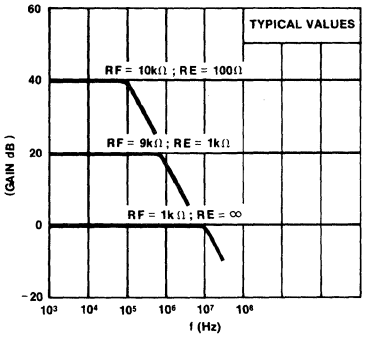

LARGE-SIGNAL FREQUENCY RESPONSE

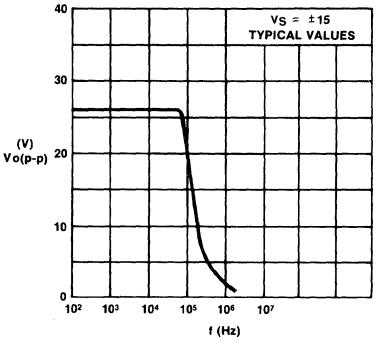

OUTPUT SHORT-CIRCUIT CURRENT

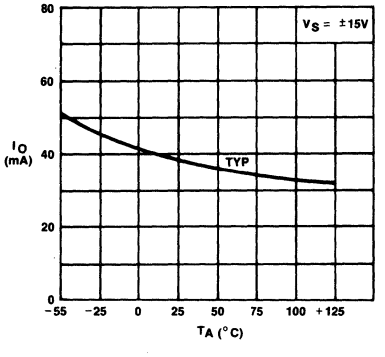

INPUT BIAS CURRENT

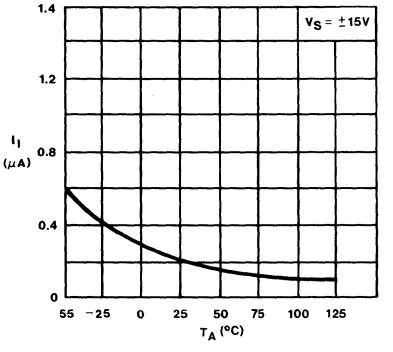

INPUT COMMON MODE VOLTAGE RANGE

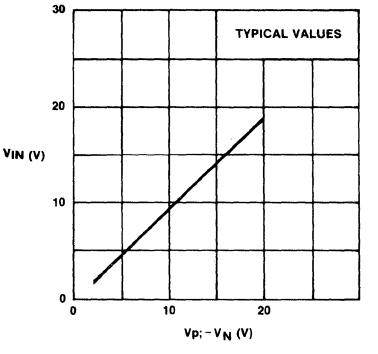

SUPPLY CURRENT



INPUT NOISE VOLTAGE DENSITY

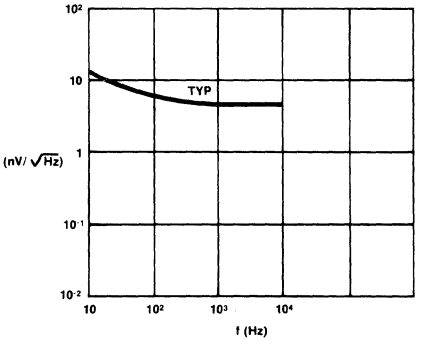

TEST CIRCUITS

CLOSED LOOP FREQUENCY RESPONSE

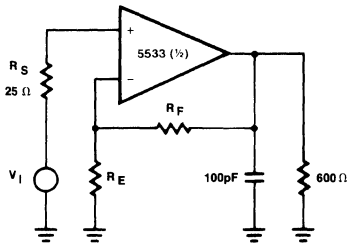

VOLTAGE FOLLOWER

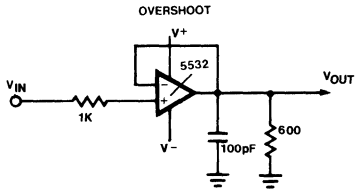

APPLICATIONS

The Signetics 5532 High Performance Op Amp is an ideal amplifier for use in high quality and professional audio equipment which requires low noise and low distortion.

The circuit included in this application note has been assembled on a P.C. board, and tested with actual audio input devices (Tuner and Turntable). It consists of an RIAA pre-amp, input buffer, 5-band equalizer, and mixer. Although the circuit design is not new, its performance using the 5532 has been improved.

The RIAA pre-amp section is a standard compensation configuration with low frequency boost provided by the Magnetic cartridge and the RC network in the op amp feedback loop. Cartridge loading is accomplished via R1. 47k was chosen as a typical value, and may differ from cartridge to cartridge.

The Equalizer section consists of an input buffer, 5 active variable band pass/notch (depending on R9's setting) filters, and an

RIAA—EQUALIZER SCHEMATIC

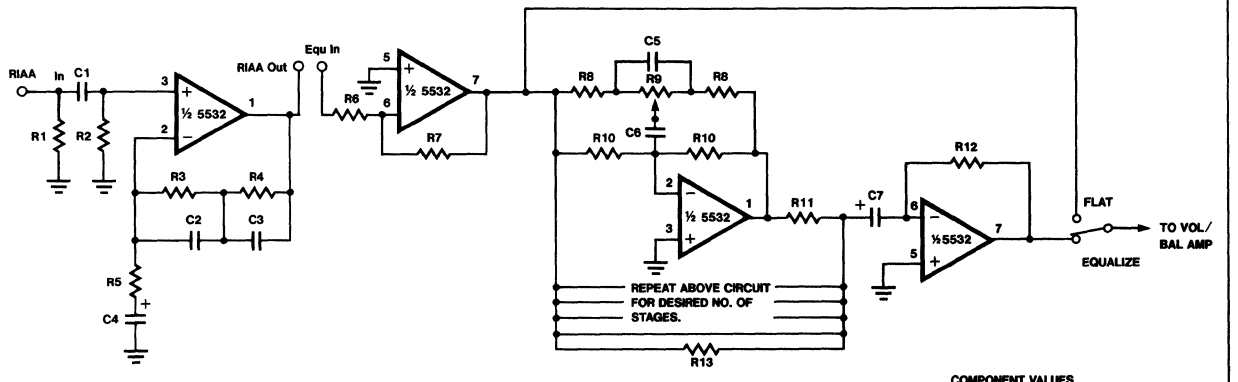

COMPONENT VALUE TABLES

R9 = 25k R8 = 2.4k R10 = 240k			R9 = 50 k R8 = 5.1k R10 = 510k			R9 = 100k R8 = 10k R10 = 1 meg		
fo	C5	C6	fo	C5	C6	fo	C5	C6
23 Hz	1μF	.1μF	25 Hz	.47μF	.047μF	12 Hz	.47μF	.047μF
50 Hz	.47μF	.047μF	36 Hz	.33μF	.033μF	18 Hz	.33μF	.033μF
72 Hz	.33μF	.033μF	54 Hz	.22μF	.022μF	27 Hz	.22μF	.022μF
108 Hz	.22μF	.022μF	79 Hz	.15μF	.015μF	39 Hz	.15μF	.015μF
158 Hz	.15μF	.015μF	119 Hz	.1μF	.01μF	59 Hz	.1μF	.01μF
238 Hz	.1μF	.01μF	145 Hz	.082μF	.0082μF	72 Hz	.082μF	.0082μF
290 Hz	.082μF	.0082μF	175 Hz	.068μF	.0068μF	87 Hz	.068μF	.0068μF
350 Hz	.068μF	.0068μF	212 Hz	.056μF	.0056μF	106 Hz	.056μF	.0056μF
425 Hz	.056μF	.0056μF	253 Hz	.047μF	.0047μF	126 Hz	.047μF	.0047μF
506 Hz	.047μF	.0047μF	360 Hz	.033μF	.0033μF	180 Hz	.033μF	.0033μF
721 Hz	.033μF	.0033μF	541 Hz	.022μF	.0022μF	270 Hz	.022μF	.0022μF
1082 Hz	.022μF	.0022μF	794 Hz	.015μF	.0015μF	397 Hz	.015μF	.0015μF
1588 Hz	.015μF	.0015μF	1191 Hz	.01μF	.001μF	595 Hz	.01μF	.001μF
2382 Hz	.01μF	.001μF	1452 Hz	.0082μF	820pF	726 Hz	.0082μF	820pF
2904 Hz	.0082μF	820pF	1751 Hz	.0068μF	680pF	875 Hz	.0068μF	680pF
3502 Hz	.0068μF	680pF	2126 Hz	.0056μF	560pF	1063 Hz	.0056μF	560pF
4253 Hz	.0056μF	560pF	2534 Hz	.0047μF	470pF	1267 Hz	.0047μF	470pF
5068 Hz	.0047μF	470pF	3609 Hz	.0033μF	330pF	1804 Hz	.0033μF	330pF
7218 Hz	.0033μF	330pF	5413 Hz	.0022μF	220pF	2706 Hz	.0022μF	220pF
10827 Hz	.0022μF	220pF	7940 Hz	.0015μF	150pF	3970 Hz	.0015μF	150pF
15880 Hz	.0015μF	150pF	11910 Hz	.001μF	100pF	5955 Hz	.001μF	100pF
23820 Hz	.001μF	100pF	14524 Hz	820pF	82pF	7262 Hz	820pF	82pF
			17514 Hz	680pF	68pF	8757 Hz	680pF	68pF
			21267 Hz	560pF	56pF	10633 Hz	560pF	56pF
						12670 Hz	470pF	47pF
						18045 Hz	330pF	33pF

COMPONENT VALUES

R1	47k	C1	.22μF
R2	1meg	C2	750pF
R3	100k	C3	.0033μF
R4	1meg	C4	33μF
R5	1.1k	C5	SEE TABLE
R6	100k	C6	SEE TABLE
R7	100k	C7	2.2μF
R8	SEE TABLE		
R9	(pot) SEE TABLE		
R10	SEE TABLE		
R11	100K		
R12	100K		
R13	20K (5 STAGES)		

Figure 1

output summing amplifier. The input buffer is a standard unity gain design providing impedance matching between the pre amplifiers and the equalizer section. Because the 5532 is internally compensated, no external compensation is required. The 5-band active filter section is actually 5 individual active filters with the same feedback design for all 5. The main differance in all five stages is the values of C5 and C6 which are responsible for setting the center frequency of each stage. Linear pots are recommended for R9. To simplify use of this circuit, a component value table is provided, which lists center frequencies and their associated capacitor values. Notice that C5 equals (10) C6, and that the Value of R8 and R10 are related to R9 by a factor of 10 as well. The values listed in the table are common and easily found standard values.

The final stage is the summing amplifier/buffer stage, to sum the individual filters (Figure 2). Note the original signal is subtracted from the sum by a factor dependant on the number of filter stages. This subtraction is necessary to maintain a unity gain configuration at the output with all pots set to the flat position. If R13 were omitted the output with 1 volt at each stage would equal 5 volts (in this case) instead of the desired 1 volt. Full boost and cut using the table values is about ± 15dB. Although 5 bands were chosen for this application, the user may have as many bands as are required. Please note that the subtracting resistor R13, must be adjusted to meet the unity requirement using $R13 = \frac{100K}{\#\text{ of stages}}$ i.e. 5 stages = 20k.

The remainder of the circuit employs the Philips TCA 730H volume, balance, and loudness-control circuit and the Signetics NE540 power driver circuit, which as shown will net about 35 watts per channel RMS. The NE540 can be found in the Signetics Analog Data Manual, and Applications Manual. Information on the TCA730A may be obtained from Signetics Analog Division.

VOLUME, BALANCE, LOUDNESS & POWER AMPS

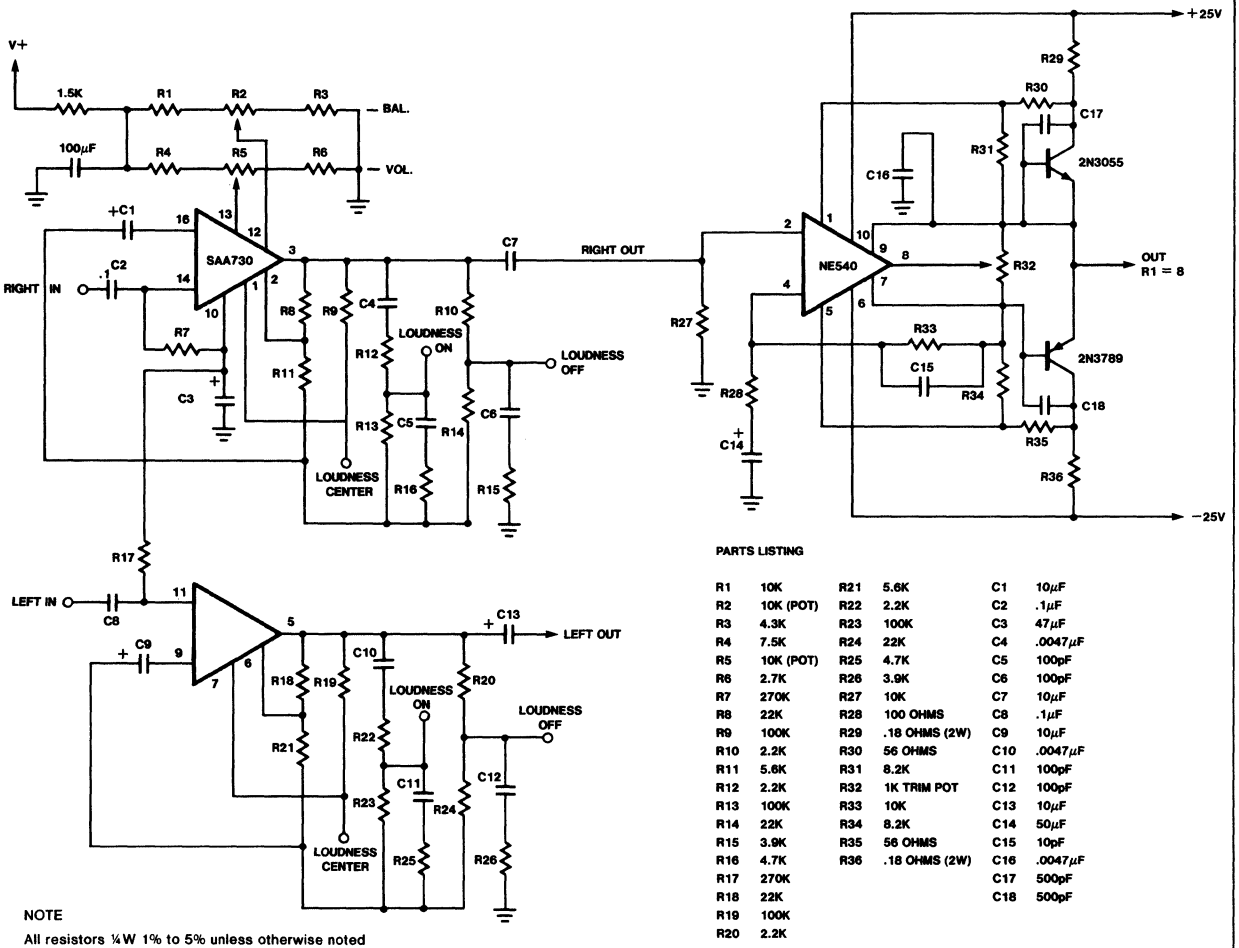

NOTE
All resistors ¼W 1% to 5% unless otherwise noted

PARTS LISTING

R1	10K	R21	5.6K	C1	10µF
R2	10K (POT)	R22	2.2K	C2	.1µF
R3	4.3K	R23	100K	C3	47µF
R4	7.5K	R24	22K	C4	.0047µF
R5	10K (POT)	R25	4.7K	C5	100pF
R6	2.7K	R26	3.9K	C6	100pF
R7	270K	R27	10K	C7	10µF
R8	22K	R28	100 OHMS	C8	.1µF
R9	100K	R29	.18 OHMS (2W)	C9	10µF
R10	2.2K	R30	56 OHMS	C10	.0047µF
R11	5.6K	R31	8.2K	C11	100pF
R12	2.2K	R32	1K TRIM POT	C12	100pF
R13	100K	R33	10K	C13	10µF
R14	22K	R34	8.2K	C14	50µF
R15	3.9K	R35	56 OHMS	C15	10pF
R16	4.7K	R36	.18 OHMS (2W)	C16	.0047µF
R17	270K			C17	500pF
R18	22K			C18	500pF
R19	100K				
R20	2.2K				

For additional information on the NE540, refer to Signetics Analog Data and Applications Manuals.

For additional information on the SAA730, contact Signetics Analog Division, Philips Representative.

Figure 2

NE5533/5533A-N,F • NE/SE5534/5534A-N,FE
NE5534-D

DESCRIPTION

The 5533/5534 are dual and single high-performance low noise operational amplifiers. Compared to other operational amplifiers, such as TL083, they show better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

This makes the devices especially suitable for application in high quality and professional audio equipment, in instrumentation and control circuits and telephone channel amplifiers. The op amps are internally compensated for gain equal to, or higher than, three. The frequency response can be optimized with an external compensation capacitor for various applications (unity gain amplifier, capacitive load, slew-rate, low overshoot, etc.) If very low noise is of prime importance, it is recommended that the 5533A/5534A version be used which has guaranteed noise specifications.

FEATURES

- **Small-signal bandwidth: 10MHz**
- **Output drive capability: 600Ω, 10V (rms) at $V_S = \pm 18V$**
- **Input noise voltage: 4nV/$\sqrt{Hz}$**
- **DC voltage gain: 100000**
- **AC voltage gain: 6000 at 10kHz**
- **Power bandwidth: 200kHz**
- **Slew-rate: 13V/μs**
- **Large supply voltage range: ±3 to ±20V**

PIN CONFIGURATIONS

F,N PACKAGE

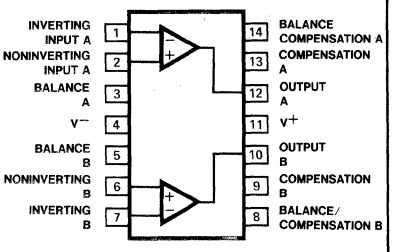

ORDER PART NO.
NE5533N,F
NE5533AN,AF

D,N,FE PACKAGE

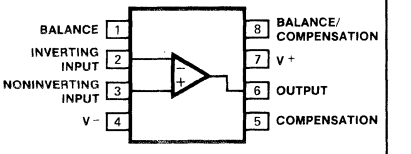

ORDER PART NO.
NE/SE5534N,FE
NE/SE5534AN,AFE
NE5534D

EQUIVALENT SCHEMATIC

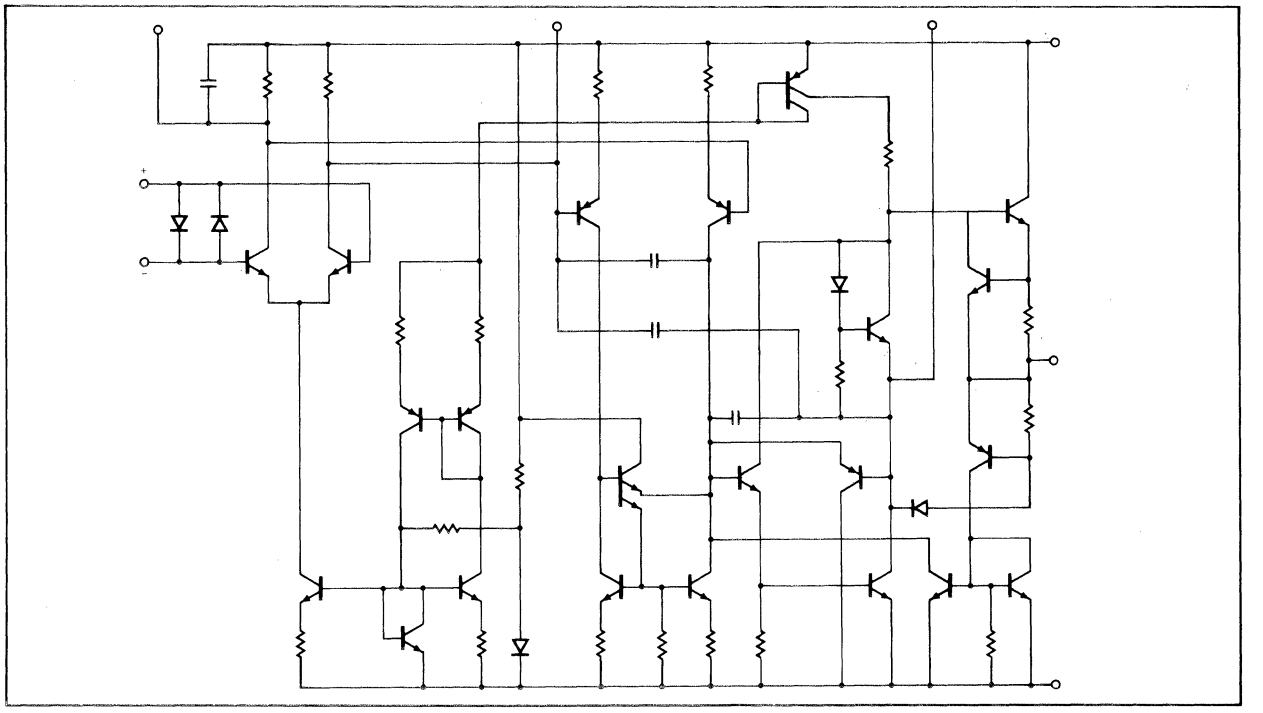

NE5533/5533A-N,F • NE/SE5534/5534A-N,FE
NE5534-D

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_S	Supply voltage	±22	V
V_{IN}	Input voltage	±V supply	V
V_{DIFF}	Differential input voltage[1]	±.5	V
T_A	Operating temperature range		
	SE5534/5534A	-55 to +125	°C
	NE5533/5533A/5534/5534A	0 to +70	°C
T_{STG}	Storage temperature	-65 to +150	°C
T_J	Junction temperature	150	°C
P_D	Power dissipation at 25°C[2]		
	5533N, 5534N, 5534FE	800	mW
	5533F	1000	mW
	Output short circuit duration[3]	indefinite	
	Lead temperature (soldering 10 sec)	300	°C

NOTES

1. Diodes protect the inputs against over-voltage. Therefore, unless current-limiting resistors are used, large currents will flow if the differential input voltage exceeds 0.6V. Maximum current should be limited to ±10mA.
2. For operation at elevated temperature, derate packages based on the following junction-to-ambient thermal resistances:
   8-pin ceramic (FE) 140°C/W
   14-pin ceramic (F) 110°C/W
   8-pin plastic (N) 162°C/W
   14-pin plastic (N) 150°C/W
3. Output may be shorted to ground at V_S = ±15V, T_A = 25°C. Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.

DC ELECTRICAL CHARACTERISTICS T_A = 25°C, V_S = ±15V unless otherwise specified.[1,2]

PARAMETER		TEST CONDITIONS	SE5534/5534A			NE5533/5533A 5534/5534A			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage			.5	2		.5	4	mV
		Over temperature			3			5	mV
I_{OS}	Offset current			10	200		20	300	nA
		Over temperature			500			400	nA
I_B	Input current			400	800		500	1500	nA
		Over temperature			1500			2000	nA
I_{CC}	Supply current			4	6.5		4	8	mA
	Per op amp	Over temperature			9				mA
V_{CM}	Common mode input range		±12	±13		±12	±13		V
CMRR	Common mode rejection ratio		80	100		70	100		dB
PSRR	Power supply rejection ratio			10	50		10	100	μV/V
A_{VOL}	Large signal voltage gain	$R_L \geq 600\Omega$, V_O = ±10V	50	100		25	100		V/mV
		Over temperature	25			15			V/mV
V_{OUT}	Output swing	$R_L \geq 600\Omega$	±12	±13		±12	±13		V
		$R_L \geq 600\Omega$ V_S = ±18V	±15	±16		±15	±16		V
R_{IN}	Input resistance		50	100		30	100		kΩ
I_{SC}	Output short circuit current			38			38		mA

NOTES

1. For NE5533/5533A/5534/5534A, T_{MIN} = 0°C, T_{MAX} = 70°C
2. For SE5534/5534A, T_{MIN} = −55°C, T_{MAX} = +125°C

NE5533/5533A-N,F • NE/SE5534/5534A-N,FE
NE5534-D

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE5534/5534A			NE5533/5533A 5534/5534A			UNIT
		Min	Typ	Max	Min	Typ	Max	
R_{OUT} Output resistance	A_V = 30dB closed loop f = 10kHz, R_L = 600Ω, C_C = 22pF		0.3			0.3		Ω
Transient response	Voltage follower, V_{IN} = 50mV R_L = 600Ω, C_C = 22pF, C_L = 100pF							
T_R Rise time			20			20		ns
Overshoot			20			20		%
Transient response	V_{IN} = 50mv, R_L = 600Ω C_C = 47pF, C_L = 500pF							
T_R Rise time			50			50		ns
Overshoot			35			35		%
AC Gain	f = 10kHz, C_C = 0		6			6		V/mV
	f = 10kHz, C_C = 22pF		2.2			2.2		V/mV
Gain bandwidth product	C_C = 22pF, C_L = 100pF		10			10		mHz
Slew rate	C_C = 0		13			13		V/μS
	C_C = 22pF		6			6		V/μS
Power bandwidth	V_{OUT} = ±10V, C_C = 0		200			200		kHz
	V_{OUT} = ±10V, C_C = 22pF		95			95		kHz
	V_{OUT} = ±14V, R_L = 600Ω C_C = 22pF, V_{CC} = ±18V		70			70		kHz

ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	5533/5534			5533A/5534A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input noise voltage	f_o = 30Hz		7			5.5	7	$nV/\sqrt{Hz}$
	f_o = 1kHz		4			3.5	4.5	$nV/\sqrt{Hz}$
Input noise current	f_o = 30Hz		2.5			1.5		$pA/\sqrt{Hz}$
	f_o = 1kHz		0.6			0.4		$pA/\sqrt{Hz}$
Broadband noise figure	f = 10Hz – 20kHz, R_S = 5kΩ					0.9		dB
Channel separation	f = 1kHz, R_S = 5kΩ		110			110		dB

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT NOISE CURRENT DENSITY

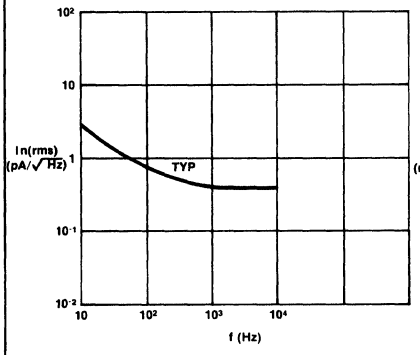

TOTAL INPUT NOISE DENSITY

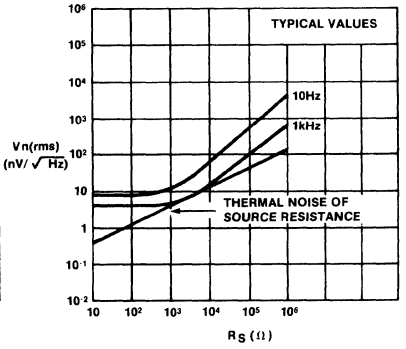

BROADBAND INPUT NOISE VOLTAGE

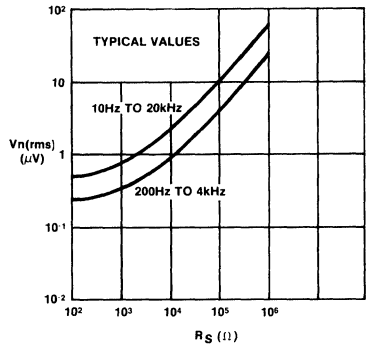

TEST LOAD CIRCUITS

FREQUENCY COMPENSATION AND OFFSET VOLTAGE ADJUSTMENT CIRCUIT

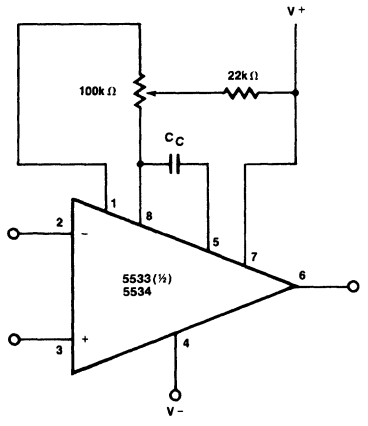

CLOSED LOOP FREQUENCY RESPONSE

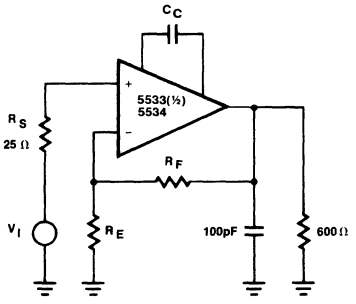

TYPICAL PERFORMANCE CHARACTERISTICS

OPEN LOOP FREQUENCY RESPONSE

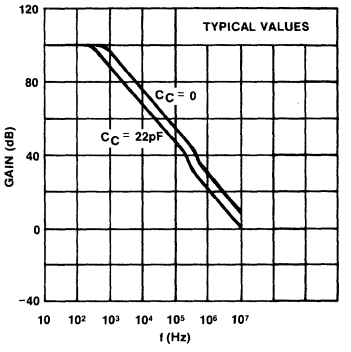

SLEW-RATE AS A FUNCTION OF COMPENSATION CAPACITANCE

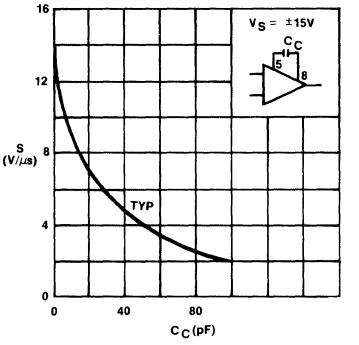

CLOSED LOOP FREQUENCY RESPONSE

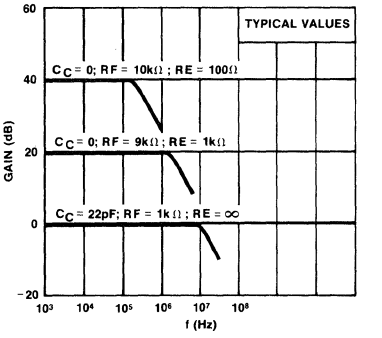

LARGE-SIGNAL FREQUENCY RESPONSE

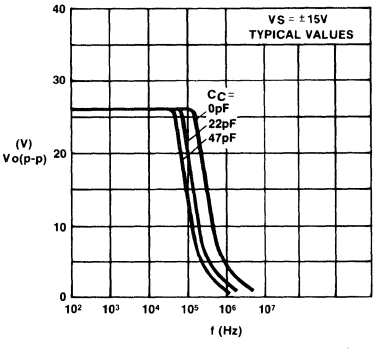

OUTPUT SHORT-CIRCUIT CURRENT

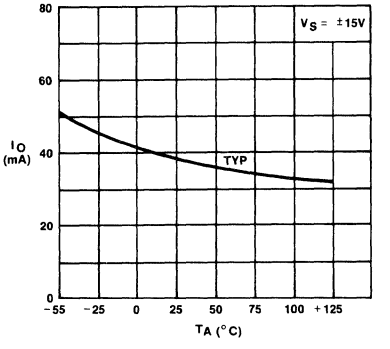

INPUT BIAS CURRENT

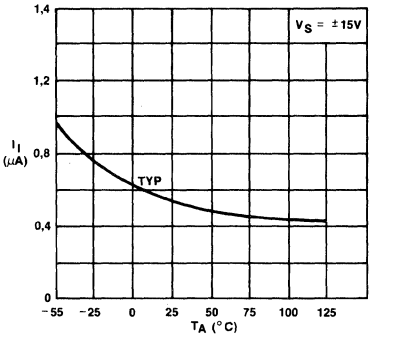

INPUT COMMON MODE VOLTAGE RANGE

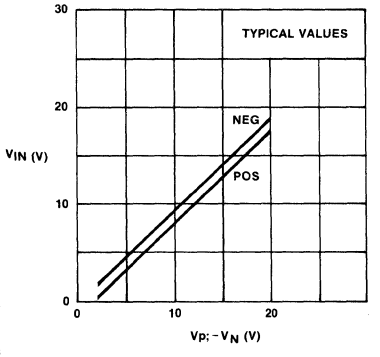

SUPPLY CURRENT PER OP AMP



INPUT NOISE VOLTAGE DENSITY

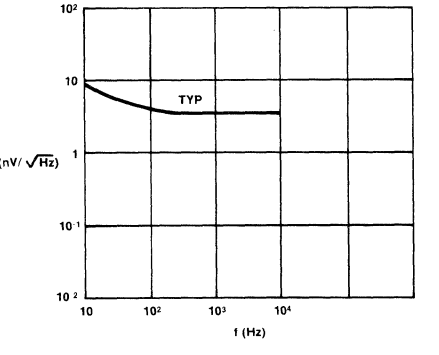

ULTRA HIGH FREQUENCY OPERATIONAL AMPLIFIER — NE/SE5539

NE/SE5539-F,N

DESCRIPTION

The Signetics NE5539 is a very wide bandwidth, high slew rate, monolithic operational amplifier for use in video amplifiers, RF amplifiers, and extremely high slew rate amplifiers.

Emitter follower inputs provide a true differential high input impedance device. Proper external compensation will allow design operation over a wide range of closed loop gains, both inverting and non-inverting, to meet specific design requirements.

FEATURES

- **Gain bandwidth product: 1.2GHz**
- **Slew rate: 600V/μsec**
- **Full power response: 48MHz**
- **A_{VOL}: 50dB**

APPLICATIONS

- **Fast pulse amplifiers**
- **RF oscillators**
- **Fast sample and hold**
- **High gain video amplifiers (BW > 20MHz)**

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.
NE/SE5539F
NE/SE5539N

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
V_{CC}	Supply voltage	±12	V
P_D	Internal power dissipation	550	mW
T_{STG}	Storage temperature range	−65 to +150	°C
T_J	Max junction temperature	150	°C
T_A	Operating temperature range		
	NE	0 to 70	°C
	SE	−55 to +125	°C
	Lead temperature	300	°C

EQUIVALENT CIRCUIT

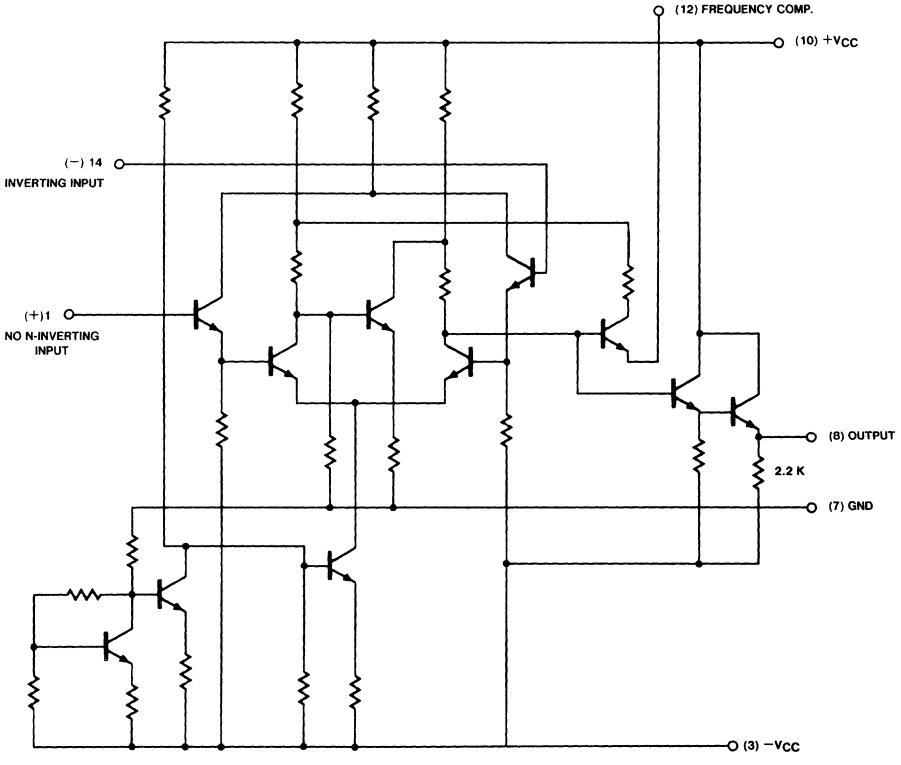

DC ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 8V$, $T_A = 25°C$ unless otherwise specified

PARAMETER		TEST CONDITIONS			SE5539			NE5539			UNIT
					Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage	$V_O = 0V$, $R_S = 100\Omega$		Over temp		2	5				mV
				$T_A = 25°C$		2	3		2.5	5	
I_{OS}	Input offset current			Over temp		.1	3				μA
				$T_A = 25°C$		.1	1			2	
I_B	Input bias current			Over temp		6	25				μA
				$T_A = 25°C$		5	13		5	20	
CMRR	Common mode rejection ratio	$F = 1$ kHz, $R_S = 100\Omega$, $V_{CM} = 1.7V$			70	80		70	85		dB
R_{IN}	Input impedance					100			100		kΩ
R_{OUT}	Output impedance					10			10		Ω
V_{OUT}	Output voltage swing	$R_L = 150\Omega$ to GND and 470Ω to $-V_{CC}$		+Swing				+2.3	+2.7		V
				−Swing				−1.7	−2.2		
V_{OUT}	Output voltage swing	$R_L = 2\Omega$ to GND	Over temp	+Swing	+2.3	+3.0					V
				−Swing	−1.5	−2.1					
			$T_A = 25°C$	+Swing	+2.5	+3.1					V
				−Swing	−2.0	−2.7					
$I_{CC}+$	Positive supply current	$V_O = 0$, $R_1 = \infty$		Over temp		14	18				mA
				$T_A = 25°C$		14	17		14	18	
$I_{CC}-$	Negative supply current	$V_O = 0$, $R_1 = \infty$		Over temp		11	15				mA
				$T_A = 25°C$		11	14		11	15	
PSRR	Power supply rejection ratio	$\Delta V_{CC} = \pm 1V$		Over temp		300	1000				μV/V
				$T_A = 25°C$					200	1000	
A_{VOL}	Large signal voltage gain	$V_O = +2.3V, -1.7V$ $R_L = 150\Omega$ to GND, 470Ω to $-V_{CC}$						47	52	57	dB
A_{VOL}	Large signal voltage gain	$V_O = +2.3V, -1.7V$ $R_L = 2K$ to GND		Over temp							dB
				$T_A = 25°C$				47	52	57	
A_{VOL}	Large signal voltage gain	$V_O = +2.5V, -2.0V$ $R_L = 2\Omega$ to GND		Over temp	46		60				dB
				$T_A = 25°C$	48	53	58				

NOTE

1. Differential input voltage should not exceed 0.25 volts to prevent excessive input bias current and common mode voltage 2.5 volts. These voltage limits may be exceeded if current limit is 10mA.

AC ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 8V$, $R_L = 150\Omega$ to GND & 390Ω to $-V_{CC}$ unless otherwise specified

PARAMETER	TEST CONDITIONS	SE5539			NE5539			UNIT
		Min	Typ	Max	Min	Typ	Max	
Gain bandwidth product	$A_{CL} = 7$ $V_O = 0.1$ Vp-p					1200		MHz
Small signal bandwidth	$A_{CL} = 2$ $R_L = 150\Omega$					110		MHz
Settling time	$A_{CL} = 2$ $R_L = 150\Omega$					15		nSec
Slew rate	$A_{CL} = 2$ $R_L = 150\Omega$		330			600		V/μSec
Propagation delay	$A_{CL} = 2$ $R_L = 150\Omega$		10			7		nSec
Full power response	$A_{CL} = 2$ $R_L = 150\Omega$		20			48		MHz
Full power response	$A_V = 7$, $R_L = 150\Omega$					20		MHz
Wide band noise (RMS)	$B_W = 5$MHz, $R_S = 50\Omega$					5		μV

NE/SE5539-F,N

DC ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 6V$, $T_A = 25°C$ unless otherwise specified

PARAMETER		TEST CONDITIONS			SE5539			NE5539			UNIT
					Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage			Over temp		2	5				mV
				$T_A = 25°C$		2	3				
I_{OS}	Input offset current			Over temp		.1	3				μA
				$T_A = 25°C$		.1	1				
I_B	Input bias current			Over temp		5	20				μA
				$T_A = 25°C$		4	10				
CMRR	Common mode rejection ratio	$V_{CM} = \pm 1.3V$, $R_S = 100\Omega$			70	85					dB
$I_{CC}+$	Positive supply current			Over temp		11	14				mA
				$T_A = 25°C$		11	13				
$I_{CC}-$	Negative supply current			Over temp		8	11				mA
				$T_A = 25°C$		8	10				
PSRR	Power supply rejection ratio	$\Delta V_{CC} = \pm 1V$		Over temp		300	1000				μV/V
				$T_A = 25°C$							
V_{OUT}	Output voltage swing	$R_L = 150\Omega$ to GND and 390Ω to $-V_{CC}$	Over temp	+Swing	+1.4	+2.0					V
				−Swing	−1.1	−1.7					
			$T_A = 25°C$	+Swing	+1.5	+2.0					V
				−Swing	−1.4	−1.8					

AC ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 6V$, $R_L = 150\Omega$ to GND and 390Ω to $-V_{CC}$ unless otherwise specified

PARAMETER	TEST CONDITIONS	SE5539			NE5539			UNIT
		Min	Typ	Max	Min	Typ	Max	
Gain bandwidth product	$A_{CL} = 7$		700					MHz
Small signal bandwidth	$A_{CL} = 2$		120					MHz
Settling time	$A_{CL} = 2$		23					nSec
Slew rate	$A_{CL} = 2$		330					V/μSec
Propagation delay	$A_{CL} = 2$		4.5					nSec
Full power response	$A_{CL} = 2$		20					MHz

NE5539 COLOR VIDEO AMPLIFIER

The NE5539 wide band operational amplifier is easily adapted for use as a color video amplifier. A typical circuit is shown (figure 1) along with the Vectorscope photograph showing the amplifier response to a standard NTSC color signal. (Note that the input reference vectors are displayed simultaneously with the output.) The polar representation indicates amplifier differential phase error overall to be less than 2°. Gain also remains linear or constant with the varying input amplitudes.

The amplifier circuit was optimized for a 75Ω input and output termination impedance with a gain of 10 (20dB).

A second series of test waveforms show the amplifier's response to a 3.58MHz burst signal (figures 2 and 3).

Finally, the amplifier response is shown as a function of time for the NTSC signal with no perceptible droop or overshoot in response to step functions (see figure 4). Note that no external compensation was required since the gain was greater than 7 (17dB).

V_{CC} is ±8 volts for all cases shown.

POWER BANDWIDTH (SE)

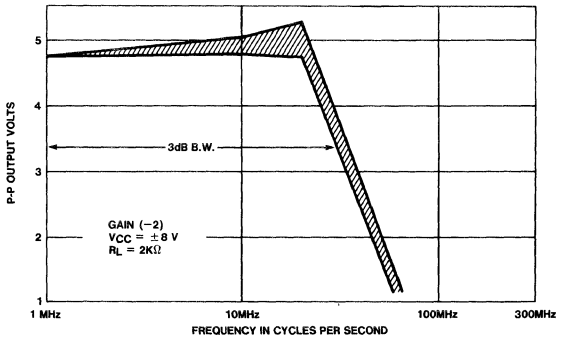

POWER BANDWIDTH (NE)

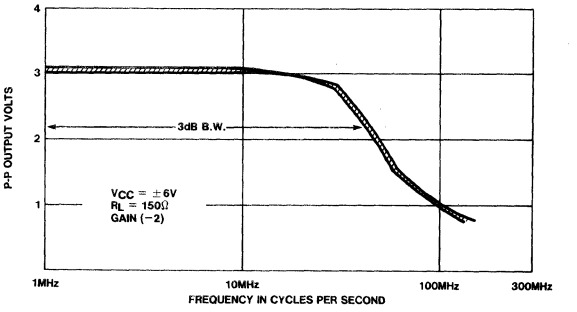

SE5539 OPEN LOOP GAIN vs FREQUENCY

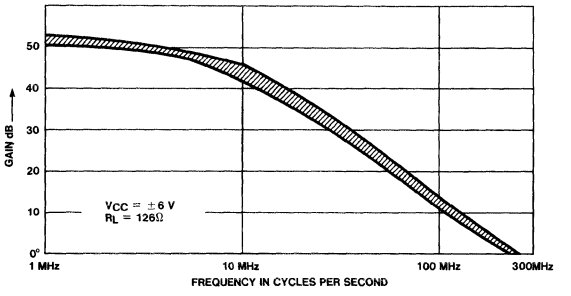

POWER BANDWIDTH

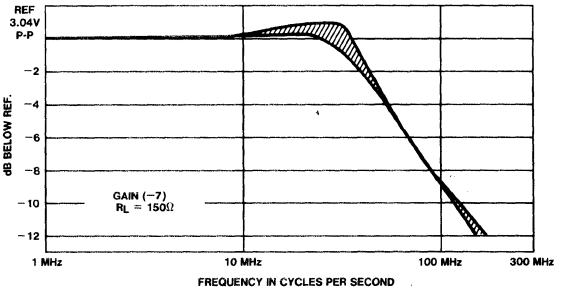

SE5539 OPEN LOOP PHASE vs FREQUENCY

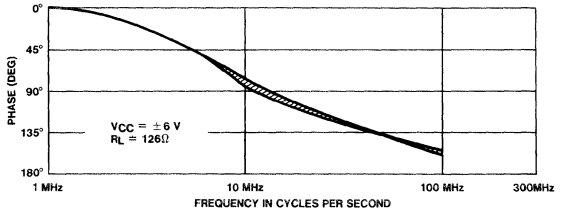

GAIN BANDWIDTH PRODUCT vs FREQUENCY

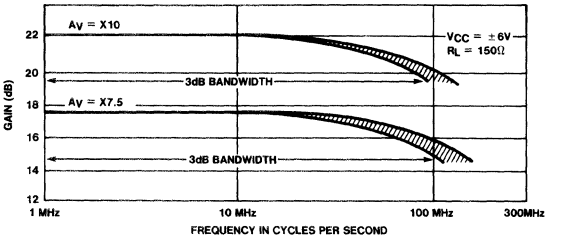

NOTE

Indicates typical distribution $-55°C \leq T_A \leq 125°C$

28dB NON-INVERTING AMP SAMPLE P.C. LAYOUT

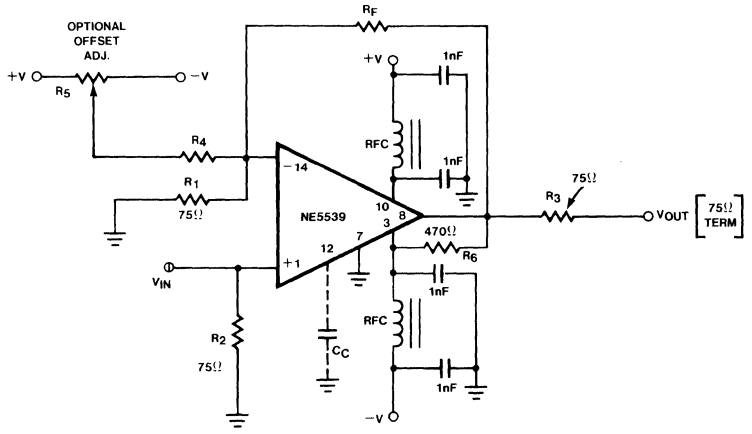

R_1 = 75Ω 5% CARBON
R_2 = 75Ω 5% CARBON
R_3 = 75Ω 5% CARBON
R_4 = 36K 5% CARBON

R_5 = 20K TRIMPOT (CERMET)
R_F = 1.5K (28dB GAIN)
R_6 = 470Ω 5% CARBON

RFC 3T # 26 BUSSWIRE ON FERROXCUBE VK 200 09/3B CORE
BYPASS CAPACITORS
1nF CERAMIC
(MEPCO OR EQUIV.)

TOP PLANE COPPER[1] (Component Side)

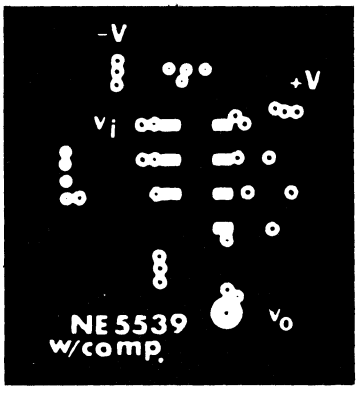

COMPONENT SIDE (Component Layout)



NOTE
(X) indicates ground connection to top plane.
* R_6 is on bottom side.

BOTTOM PLANE COPPER[1]

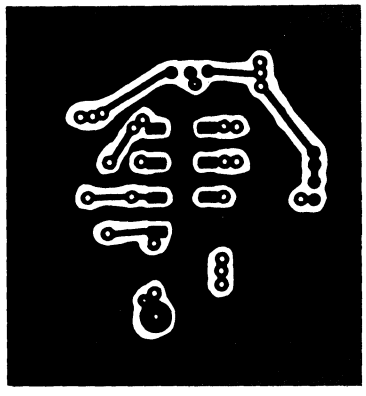

NOTE
Bond edges of top and bottom ground plane copper.

Figure 10

Copyright © Signetics 1979

SMALL SIGNAL RESPONSE

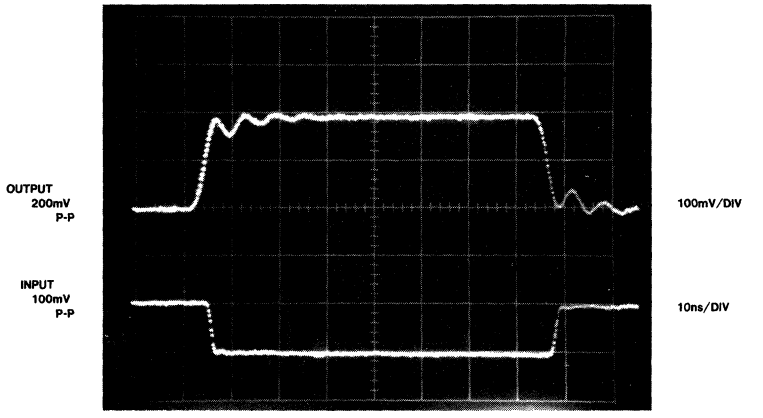

Figure 8

LARGE SIGNAL RESPONSE

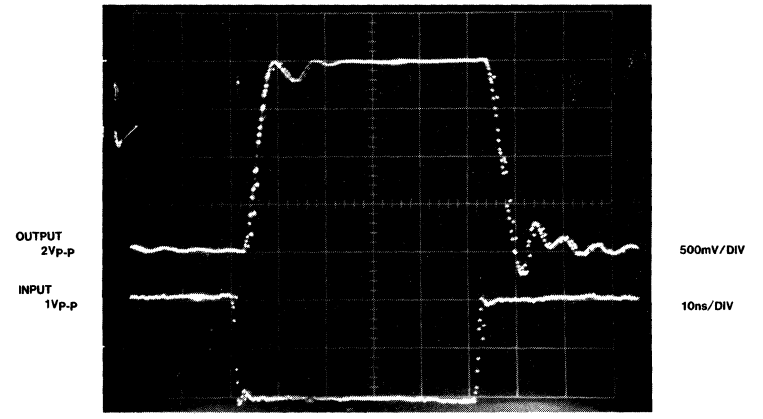

Figure 9

Copyright © Signetics 1979

The primary reasoning behind this procedure is to force the closed loop circuit to appear as a gain of X7 above the critical frequency where phase changes rapidly (approx. 70MHz; refer to figure 7a). The lag network raises the phase at the upper operating frequencies, greatly improving the phase margin.

The calculations below show the application of these principles to the circuit in figure 7b.

The circuit shown has an inverting gain of 2, therefore solving for R_2:

$$R_2 \leqq \frac{R_f}{7 - |A_{CL}|} \leqq \frac{2K}{7 - 2} = 400$$

Let $R_2 = 330\Omega$

Assuming a gain band width product of 350 MHz, C_G may now be calculated as follows:

$$\therefore C_G \simeq \frac{5}{\pi \cdot 330 \cdot 350 \cdot 10^6} \simeq \boxed{14pF}$$

In the circuit shown, a lead compensation capacitor of $\simeq$ 1.6pF was used with a value of R_2 of 330Ω and C_G was a 2 – 20pF trimmer cap (JFD piston-type). Rise and fall times of 2.8 to 3ns were measured in the small signal mode with quite adequate range in the lag compensation trimmer to optimize overshoot and reduce ringing (see pulse response—figures 9 and 10).

INVERTING GAIN OF 7
GAIN-PHASE RESPONSE
(UNCOMPENSATED)

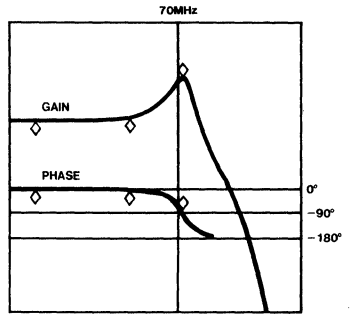

Figure 7a

NE5539
INVERTING GAIN OF 2 AMPLIFIER

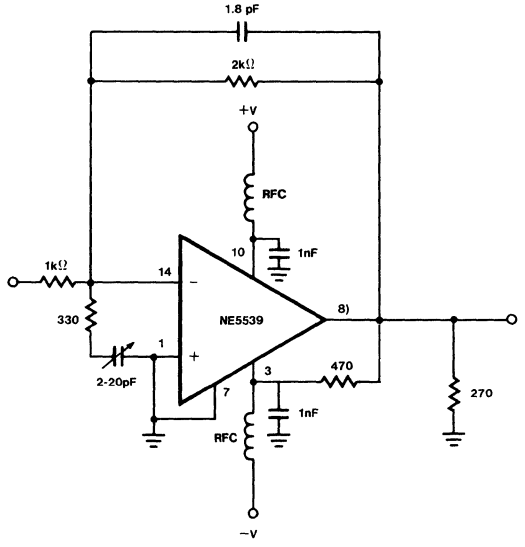

Note
Resistors - ¼ watt carbon.
RFC-3T #26 buss wire on Ferroxcube VK200 09/3B wideband threaded core.

Figure 7b

Copyright © Signetics 1979

CIRCUIT LAYOUT CONSIDERATIONS

As may be expected for an ultra-high frequency, wide gain bandwidth amplifier, the physical circuit layout is extremely critical. A double-sided printed circuit board will result in more favorable system operation (see figure 10).

The effect of the distributed and input capacitance added by the inverting node of the amplifier must be considered when calculating actual system closed loop performance. The RC product of the input resistor (R_{IN}) in parallel with C_{dist}. and feedback resistor (R_F) create a pole at pin 14 (figure 5). This frequency must fall beyond the unity gain frequency of the system in order to maintain stability and system performance.

CLOSED LOOP GAIN LESS THAN 7

The NE5539 is stable for all closed loop gains greater than seven (7). When operating at gains less than seven (7), the device can become unstable. The circuit in figure 7 is an example of a unity gain inverting amplifier. The compensation components are added to obtain stable operation.

Capacitor C_L improves the phase margin (of the operational amplifier) by compensating for the lag introduced by the distributed capacitor (C_D).

It can be shown that the optimal conditions for amplifier stability occur when $R_1C_D = R_FC_L$; however, when the stability criteria is obtained, it should be noted that the actual bandwidth of the closed loop amplifier will be reduced.

The actual value for C_L, based on a distributed capacitance of 3.5pFd, would be $\simeq$ 2pF.

NON-INVERTING BLOCK DIAGRAM

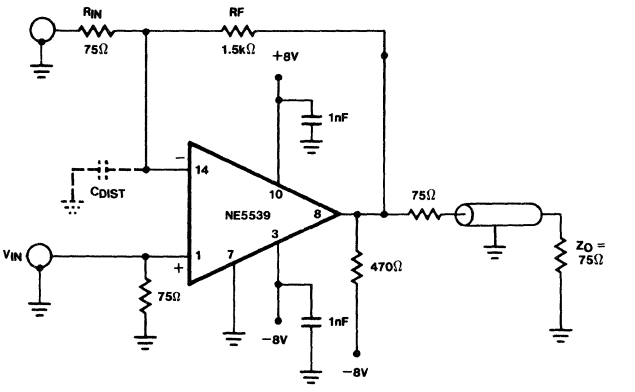

Figure 5

WIDE BAND UNITY GAIN
INVERTING AMPLIFIER CIRCUIT
IN A 75Ω SYSTEM

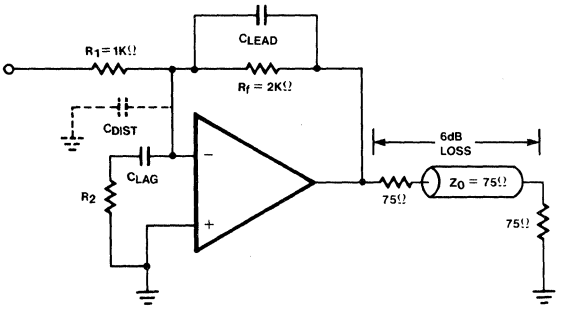

Figure 6

Determination of Compensation Capacitance:

$$C_{lead} = \frac{C_{dist}}{A_{CL}}$$

The above equation defines the relationship between the distributed capacitance, closed loop gain (A_{CL}), and the compensation capacitor (C_L). For closed loop stability and gains less than 5, C_{lead} becomes a practical consideration. When bandwidth is of primary concern, the simple lead compensation will usually be adequate. However, if transient response is also a factor in the design, then a lag compensation network (C_G, R_2) may be necessary.

For practical applications, the following equations can be used to determine the proper lag compensation components:

$$\frac{R_f}{R_1 \,||\, R_2} \geq 7 \qquad \text{(Equation 1)}$$

$$\therefore R_2 \leq \frac{R_f}{7 - A_{CL}} \qquad \text{(Equation 2)}$$

(Using Equation 1 to insure a closed loop gain of X7 above the network break frequency allows you to solve for R_2, the lag network resistor.)

C_{lag} may be approximated by the following equations. First set the lag network break frequency in relation to the amplifier total gain product (open loop).

$$\text{Set } \omega_{lag} \simeq \frac{2\pi \cdot GBW}{10} \text{ rad/sec}$$

$$\simeq \frac{\pi \cdot GBW}{5} \text{ rad/sec,}$$

$$\text{then } \omega_{lag} = \frac{1}{R_2 C_{lag}}$$

and C_{lag} may now be determined.

$$\therefore C_{lag} \simeq \frac{5}{\pi \cdot R_2 \cdot GBW}$$

< Assume GBW = 350MHz > (Equation 3)

Copyright © Signetics 1979

NE5539 VIDEO AMPLIFIER

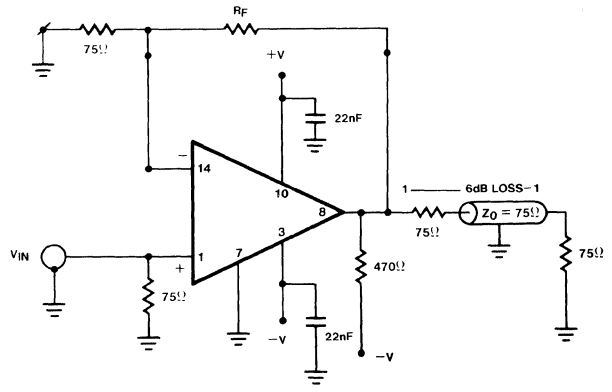

Figure 1

NE5539 NTSC VECTOR POLAR GRAPH

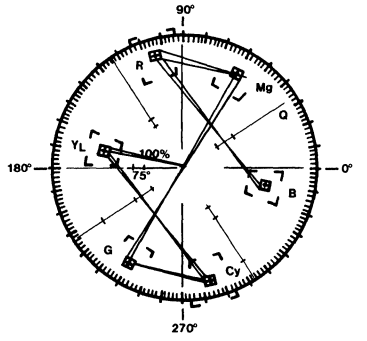

Figure 2

3.58MHz BURST SIGNAL

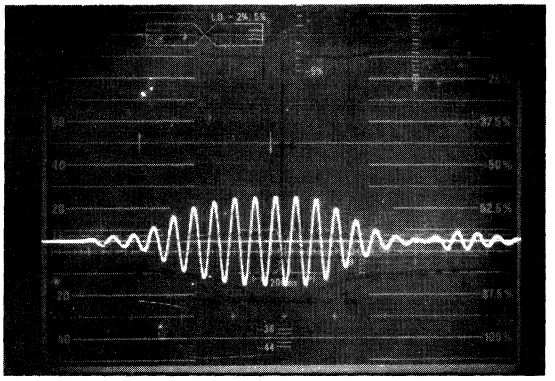

NOTE
3.58MHz burst through a 5539 20dB amplifier.

Figure 3

NTSC OUTPUT SIGNAL

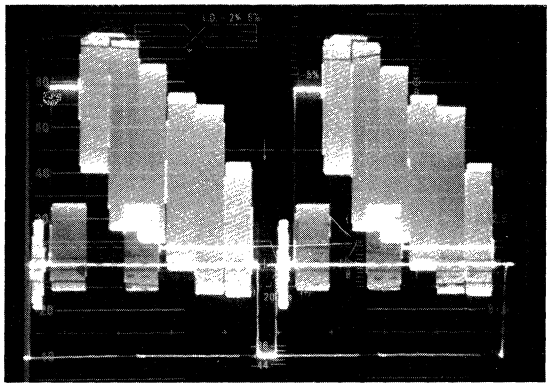

NOTE
Output of NE5539 20dB amplifier.
Z in = 75Ω's
Z out = 75Ω's

Figure 4

NE5539 OPEN LOOP PHASE

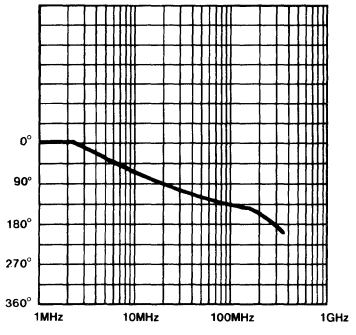

NE5539 OPEN LOOP GAIN

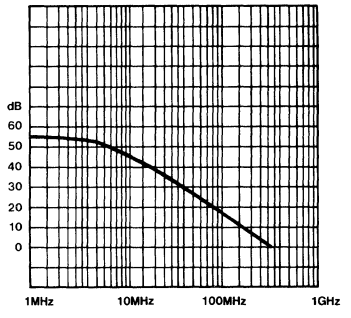

Copyright © Signetics 1979

OPEN LOOP GAIN/PHASE TEST CIRCUIT

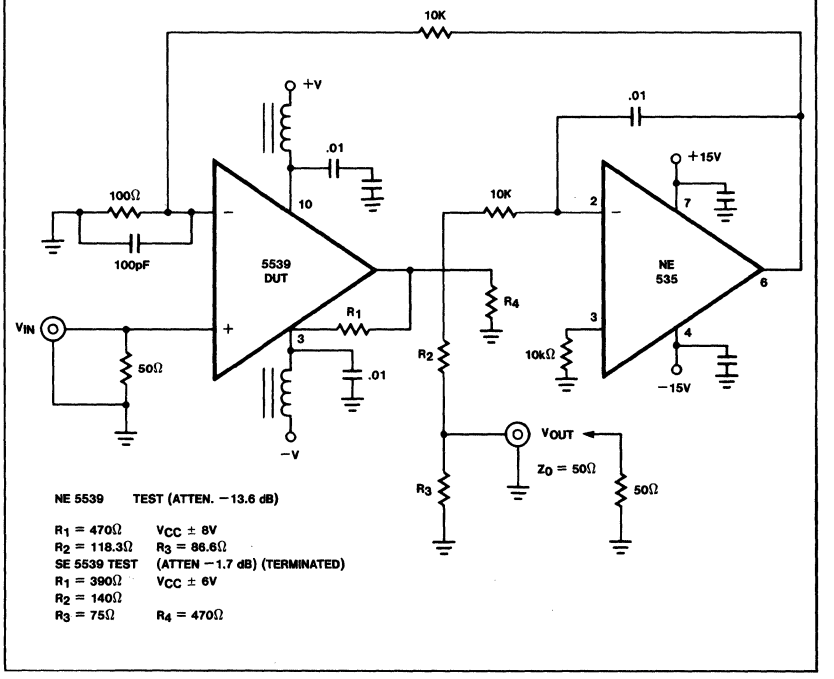

NE 5539 TEST (ATTEN. −13.6 dB)

$R_1 = 470\Omega$ $V_{CC} \pm 8V$
$R_2 = 118.3\Omega$ $R_3 = 86.6\Omega$
SE 5539 TEST (ATTEN −1.7 dB) (TERMINATED)
$R_1 = 390\Omega$ $V_{CC} \pm 6V$
$R_2 = 140\Omega$
$R_3 = 75\Omega$ $R_4 = 470\Omega$

GENERAL PURPOSE OPERATIONAL AMPLIFIER — μA741/μA741C/SA741C

μA741/741C-N,FE
SA741C-N
μA741C-D

DESCRIPTION

The μA741 is a high performance operational amplifier with high open loop gain, internal compensation, high common mode range and exceptional temperature stability. The μA741 is short-circuit protected and allows for nulling of offset voltage.

FEATURES

- **Internal frequency compensation**
- **Short circuit protection**
- **Excellent temperature stability**
- **High input voltage range**

PIN CONFIGURATION

D,N,FE PACKAGE



ORDER PART NO.

μA741N μA741FE
μA741CN μA741CFE
SA741CN
μA741CD

EQUIVALENT SCHEMATIC

μA741, μA741C, SA741C

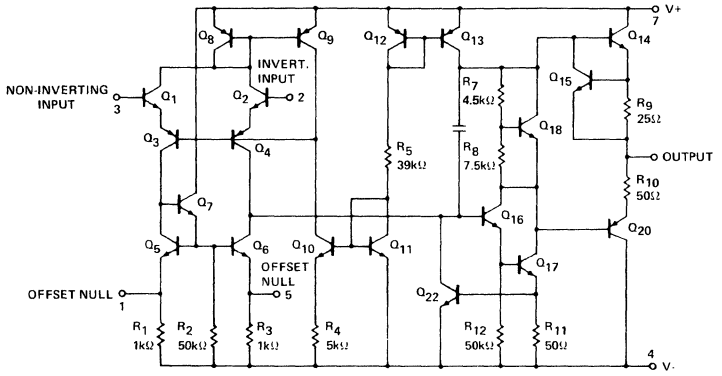

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
μA741C	±18	V
μA741	±22	V
Internal power dissipation		
N package	500	mW
FE package	1000	mW
Differential input voltage	±30	V
Input voltage[1]	±15	V
Output short-circuit duration	Continuous	
Operating temperature range		
μA741C	0 to +70	°C
SA741C	-40 to +85	°C
μA741	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	300	°C

NOTE

1. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

μA741/741C-N,FE
SA741C-N
μA741C-D

DC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER		TEST CONDITIONS	μA741			μA741C			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S = 10k\Omega$		1.0	5.0		2.0	6.0	mV
		$R_S = 10k\Omega$, over temp.		1.0	6.0			7.5	mV
I_{OS}	Offset current			20	200		20	200	nA
		Over temp.						300	nA
		$T_A = +125°C$		7.0	200				nA
		$T_A = -55°C$		20	500				nA
I_{BIAS}	Input bias current			80	500		80	500	nA
		Over temp.						800	nA
		$T_A = +125°C$		30	500				nA
		$T_A = -55°C$		300	1500				nA
V_{OUT}	Output voltage swing	$R_L = 10k\Omega$	±12	±14		±12	±14		V
		$R_L = 2k\Omega$, over temp.	±10	±13		±10	±13		V
A_{VOL}	Large signal voltage gain	$R_L = 2k\Omega$, $V_O = \pm 10V$	50	200		20	200		V/mV
		$R_L = 2k\Omega$, $V_O = \pm 10V$, over temp.	25			15			V/mV
	Offset voltage adjustment range			±30			±30		mV
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$					10	150	μV/V
		$R_S \leq 10k\Omega$, over temp.		10	150				μV/V
CMRR	Common mode rejection ratio								dB
		Over temp.	70	90					dB
I_{CC}	Supply current			1.4	2.8		1.4	2.8	mA
		$T_A = +125°C$		1.5	2.5				mA
		$T_A = -55°C$		2.0	3.3				mA
V_{IN}	Input voltage range	(μA741, over temp.)	±12	±13		±12	±13		V
R_{IN}	Input resistance		0.3	2.0		0.3	2.0		MΩ
P_d	Power consumption			50	85		50	85	mW
		$T_A = +125°C$		45	75				mW
		$T_A = -55°C$		45	100				mW
R_{OUT}	Output resistance			75			75		Ω
I_{SC}	Output short-circuit current			25			25		mA

μA741/741C-N,FE
SA741C-N
μA741C-D

DC ELECTRICAL CHARACTERISTICS (Cont'd) $T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER		TEST CONDITIONS	SA741C			UNIT
			Min	Typ	Max	
V_{OS}	Offset voltage	$R_S = 10k\Omega$ $R_S = 10k\Omega$, over temp.		2.0	6.0 7.5	mV mV
I_{OS}	Offset current	 Over temp.		20	200 500	nA nA
I_{BIAS}	Input bias current	 Over temp.		80	500 1500	nA nA
V_{OUT}	Output voltage swing	$R_L = 10k\Omega$ $R_L = 2k\Omega$, over temp.	±12 ±10	±14 ±13		V V
A_{VOL}	Large signal voltage gain	$R_L = 2k\Omega$, $V_O = \pm 10V$ $R_L = 2k\Omega$, $V_O = \pm 10V$, over temp.	20 15	200		V/mV V/mV
	Offset voltage adjustment range			±30		mV
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$		10	150	μV/V
CMRR	Common mode rejection ratio					dB
I_{CC}	Supply current			1.4	2.8	mA
V_{IN}	Input voltage range	(μA741, over temp.)	±12	±13		V
R_{IN}	Input resistance		0.3	2.0		MΩ
P_d	Power consumption			50	85	mW
R_{OUT}	Output resistance			75		Ω
I_{SC}	Output short-circuit current			25		mA

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$, unless otherwise specified.

PARAMETER	TEST CONDITIONS	μA741, μA741C			UNIT
		Min	Typ	Max	
Parallel input resistance	Open loop, f = 20Hz				MΩ
Parallel input capacitance	Open loop, f = 20Hz		1.4		pF
Unity gain crossover frequency	Open loop		1.0		MHz
Transient response unity gain	$V_{IN} = 20mV$, $R_L = 2k\Omega$, $C_L \leq 100pf$				
Rise time			0.3		μs
Overshoot			5.0		%
Slew rate	$C \leq 100pf$, $R_L \geq 2k$, $V_{IN} = \pm 10V$		0.5		V/μs

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE



POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE



μA741/741C-N,FE
SA741C-N
μA741C-D

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT RESISTANCE AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT OFFSET CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE



OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE



OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY



INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY

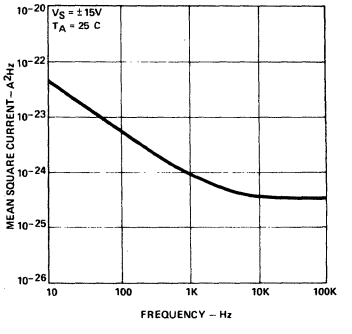

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

BROADBAND NOISE FOR VARIOUS BANDWIDTHS



OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY



OPEN LOOP PHASE RESPONSE AS A FUNCTION OF FREQUENCY



OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY



COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY



TRANSIENT RESPONSE



POWER BANDWIDTH (Large Signal Swing vs Frequency)

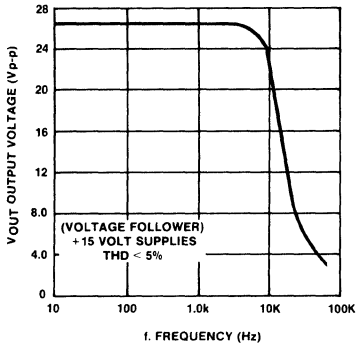

μA747/747C-F,H,N
SA747C-N
μA747C-D

DESCRIPTION

The 747 is a pair of high performance monolithic operational amplifiers constructed on a single silicon chip. High common mode voltage range and absence of "latch-up" make the 747 ideal for use as a voltage follower. The high gain and wide range of operating voltage provides superior performance in integrator, summing amplifier, and general feedback applications. The 747 is short-circuit protected and requires no external components for frequency compensation. The internal 6dB/octave roll-off insures stability in closed loop applications. For single amplifier performance, see μA741 data sheet.

FEATURES

- **No frequency compensation required**
- **Short-circuit protection**
- **Offset voltage null capability**
- **Large common-mode and differential voltage ranges**
- **Low power consumption**
- **No latch-up**

PIN CONFIGURATIONS

D,F,N PACKAGE



ORDER PART NO.
μA747CN, μA747CF, μA747N,
μA747F, SA747CN
μA747CD

H PACKAGE*



ORDER PART NO.
μA747CH, μA747H

*Metal cans (H) not recommended for new designs

EQUIVALENT SCHEMATIC

EQUIVALENT CIRCUIT (EACH SIDE)

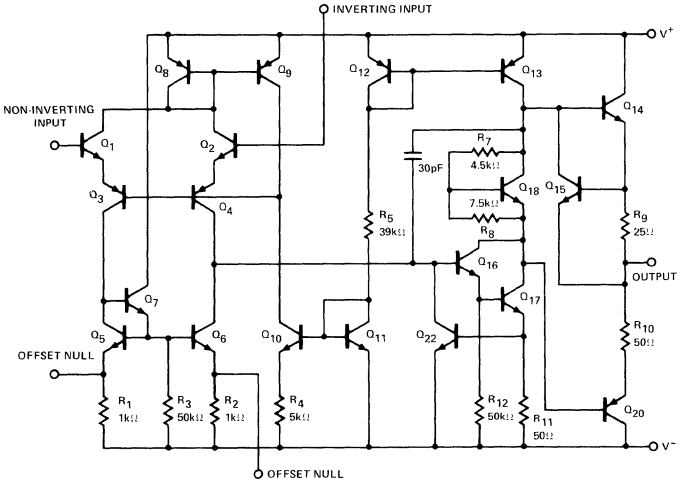

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
μA747	±22	V
μA747C	±18	V
SA747C	±18	V
Internal power dissipation		
H Package	500	mW
N,F Packages	670	mW
Differential input voltage	±30	V
Input voltage	±15	V
Voltage between offset null and V-	±0.5	V
Storage temperature range	-65 to +155	°C
Operating temperature range		
μA747	-55 to +125	°C
μA747C	0 to +70	°C
SA747C	-40 to +85	°C
Lead temperature (soldering, 60 sec)	300	°C
Output short-circuit duration	indefinite	

μA747/747C-F,H,N
SA747C-N
μA747C-D

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SA747C			UNIT
			Min	Typ	Max	
V_{OS}	Offset voltage	$R_S \leq 10k\Omega$ $R_S \leq 10k\Omega$, over temp		2.0 3.0	6.0 7.5	mV mV
I_{OS}	Offset current	 Over temp		20	200 500	nA nA
I_{BIAS}	Input current	 Over temp			500 1500	nA nA
V_{OUT}	Output voltage swing	$R_L \geq 2k\Omega$, over temp $R_L \geq 10k\Omega$, over temp	±10 ±12	±13 ±14		V V
I_{CC}	Supply current	 Over temp		1.7 2.0	2.8 3.3	mA mA
	Power consumption	 Over temp		50 60	85 100	mW mW
	Input capacitance			1.4		pF
	Offset voltage adjustment range			±15		V
	Output resistance			75		Ω
	Channel separation			120		dB
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$, over temp		30	150	μV/V
A_{VOL}	Large signal voltage gain (DC)	$R_L \geq 2k\Omega$ $V_{OUT} = \pm 10V$	25,000			V/V
C_{MRR}		$R_S \leq 10K\Omega$, V_{CM} ±12V over temp	70			dB

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	μA747/μA747C/SA747C			UNIT
		Min	Typ	Max	
Transient response Risetime Overshoot	$V_{IN} = 20mV$, $R_1 = 2k\Omega$, $C_1 < 100pf$ Unity gain CL ≤ 100pf Unity gain CL ≤ 100pf		 0.3 5.0		 μs %
Slew rate	RL > 2kΩ		0.5		V/μs

μA747/747C-F,H,N
SA747C-N
μA747C-D

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_S = ±15V unless otherwise specified.

	PARAMETER	TEST CONDITIONS	μA747			μA747C			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S \leq 10k\Omega$		2.0	5.0		2.0	6.0	mV
		$R_S \leq 10k\Omega$, over temp		3.0	6.0		3.0	7.5	mV
I_{OS}	Offset current			20	200		20	200	nA
		T_A = +125°C		7.0	200				nA
		T_A = -55°C		85	500				nA
		Over temp					7.0	300	nA
I_{BIAS}	Input current			80	500		80	500	nA
		T_A = 125°C		30	500				nA
		T_A = -55°C		300	1500				nA
		Over temp					30	800	nA
V_{OUT}	Output voltage swing	$R_L \geq 2k\Omega$, over temp	±10	±13		±10	±13		V
		$R_L \geq 10k\Omega$, over temp	±12	±14		±12	±14		V
I_{CC}	Supply current each side			1.7	2.8		1.7	2.8	mA
		T_A = 125°C		1.5	2.5				mA
		T_A = -55°C		2.0	3.3				mA
		Over temp					2.0	3.3	mA
	Power consumption			50	85		50	85	mW
		T_A = 125°C		45	75				mW
		T_A = -55°C		60	100				mW
		Over temp					60	100	mW
	Input capacitance			1.4			1.4		pF
	Offset voltage adjustment range			±15			±15		V
	Output resistance			75			75		Ω
	Channel separation			120			120		dB
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$, over temp		30	150		30	150	μV/V
A_{VOL}	Large signal voltage gain (DC)	$R_L \geq 2k\Omega$ V_{OUT} = ±10V	50,000			25,000			V/V
		Over temp	25,000			15,000			V/V
C_{MRR}		$R_S \leq 10K\Omega$, V_{CM} ±12V over temp	70			70			dB

μA747/747C-F,H,N
SA747C-N
μA747C-D

TYPICAL PERFORMANCE CHARACTERISTICS

OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY



OPEN LOOP PHASE RESPONSE AS A FUNCTION OF FREQUENCY



OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY



OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE



OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE



TRANSIENT RESPONSE



VOLTAGE FOLLOWER LARGE SIGNAL PULSE RESPONSE



FREQUENCY CHARACTERISTICS AS A FUNCTION OF SUPPLY VOLTAGE



μA747/747C-F,H,N
SA747C-N
μA747C-D

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

FREQUENCY CHARACTERISTICS AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE



INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT RESISTANCE AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT OFFSET CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE



OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE



OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



μA747/747C-F,H,N
SA747C-N
μA747C-D

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

ABSOLUTE MAXIMUM POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE

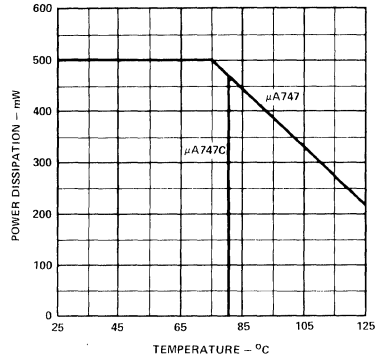

INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY

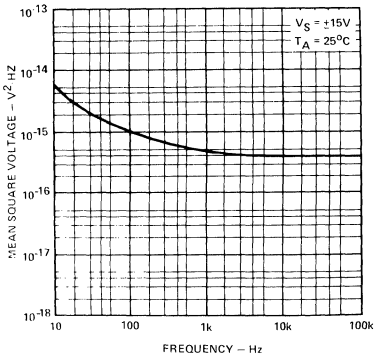

INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY

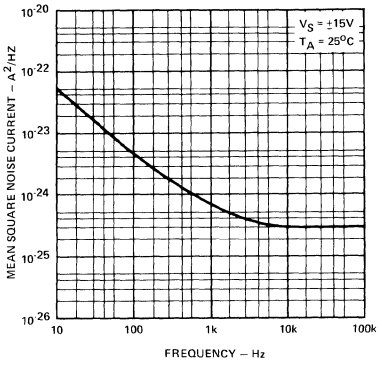

BROADBAND NOISE FOR VARIOUS BANDWIDTHS

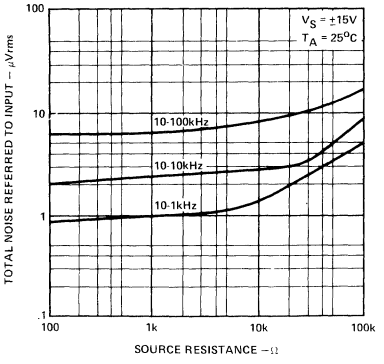

TEST CIRCUITS

TRANSIENT RESPONSE TEST CIRCUIT



VOLTAGE OFFSET NULL CIRCUIT



μA748/748C-F,N
μA748C-D

DESCRIPTION

The 748 is a High Performance Operational Amplifier featuring high gain, short circuit immunity, offset voltage null capability, simplified compensation and excellent temperature stability.

FEATURES

- **Short circuit protection**
- **Offset voltage null capability**
- **Large common-mode and differential voltage ranges**
- **Low power consumption**
- **No latch-up**

PIN CONFIGURATIONS

F PACKAGE



ORDER PART NO.
μA748F, μA748CF,

D,N PACKAGE



ORDER PART NO.
μA748N, μA748CN
μA748CD

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
μA748	±22	V
μA748C	±18	V
Internal power dissipation[1]	500	mW
Differential output voltage	±30	V
Input voltage[2]	±15	V
Storage temperature range	-65 to +150	°C
Operating temperature range		
μA748	-55 to +125	°C
μA748C	0 to +70	°C
Lead temperature	300	°C
Output short circuit duration[3]	indefinite	

NOTES

1. Rating applies for case temperatures to +70°C.
2. For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply. Rating applies to +70°C ambient temperature.

EQUIVALENT CIRCUIT

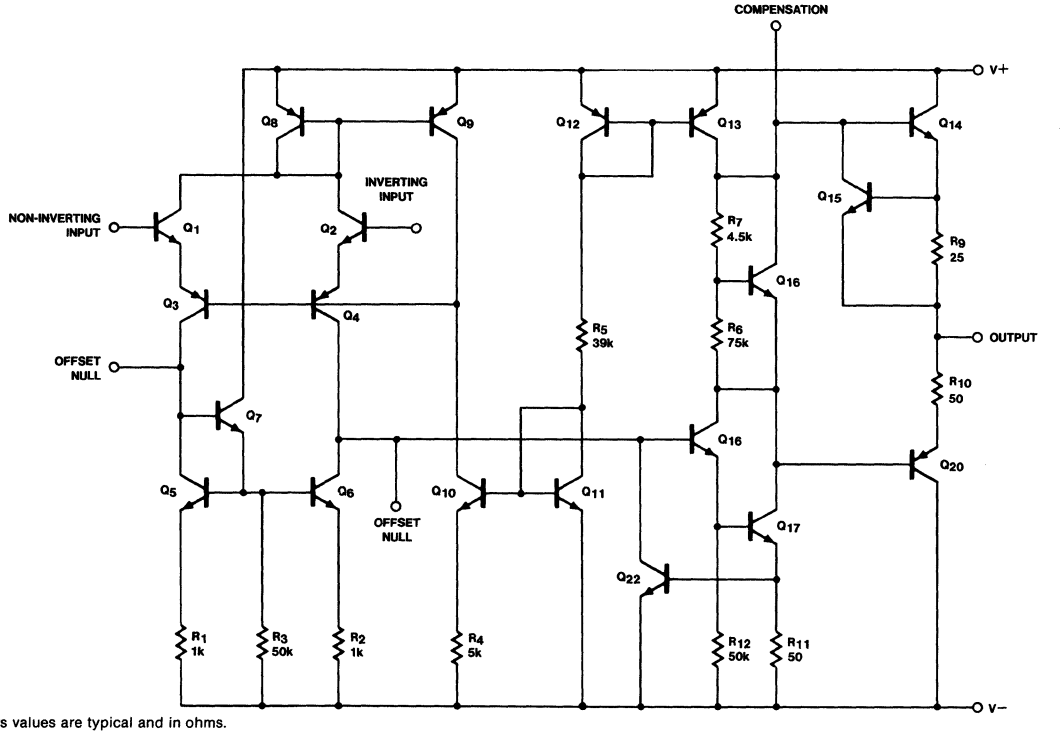

NOTE
All resistors values are typical and in ohms.

μA748/748C-F,N
μA748C-D

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	μA748			μA748C			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Offset voltage	$R_S \leq 10k\Omega$, $T_A = 25°C$		1.0	5.0		2.0	6.0	mV
		Over temperature			6.0			7.5	mV
I_{OS}	Offset current			20	200		20	200	nA
		$25° \leq T_A \leq T_{max}$		7.0	200		9.0	300	nA
		$T_{min} \leq T_A \leq 25°C$		85	500		35	300	nA
I_{BIAS}	Input current			80	500		80	500	nA
		$25° \leq T_A \leq T_{max}$		30	500		40	800	nA
		$T_{min} \leq T_A \leq 25°C$		300	1500		130	800	nA
V_{CM}	Common mode voltage range	Over temperature	±12	±13		±12	±13		V

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = \pm 15V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	μA748			μA748C			UNIT
			Min	Typ	Max	Min	Typ	Max	
C_{MRR}	Common mode rejection ratio	$R_S \leq \pm 10k\Omega$, over temperature	70	90		70	90		dB
R_{IN}	Input resistance		0.3	2.0		.30	2.0		MΩ
V_{OUT}	Output voltage swing	$R_L \geq 2k\Omega$, over temperature	±10	±13		±10	±13		V
		$R_L \geq 10k\Omega$, over temperature	±12	±14		±12	±14		V
I_{CC}	Supply current			1.7	2.83		1.7	2.83	mA
		$25° \leq T_A \leq T_{max}$		1.5	2.50		1.6	3.33	mA
		$T_{min} \leq T_A \leq 25°C$		2.0	3.33		1.8	3.33	mA
P_d	Power consumption	$T_A = 25°C$		50	85		50	85	mW
		$25° \leq T_A \leq T_{max}$		45	75		48	100	mW
		$T_{min} \leq T_A \leq 25°C$		60	100		54	100	mW
P_{SRR}	Supply voltage rejection ratio	$R_S \leq 10k\Omega$, over temperature		30	150		30	150	μV/V
	Output resistance	$T_A = 25°C$		75			75		Ω
A_{VOL}	Large signal voltage gain	$R_L \geq 2k\Omega$ V_{OUT} ±10V ±15V	50	200		50	200		V/mV
		Over temperature	25			25			V/mV
	Input capacitance			1.4			1.4		pF
	Offset voltage adjustment range			±15			±15		mV

AC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	μA748			μA748C/SA748C			UNIT
		Min	Typ	Max	Min	Typ	Max	
Transient response (unity gain)	$V_{IN} = 20mV$, $R_L = 2k\Omega$ $C_L \leq 100pF$							
Rise time	$C_1 = 30pF$		0.3			0.3		μs
Overshoot			5.0			5.0		%
Slew rate	$R_L \geq 2k\Omega$ $C_1 = 30pF$		0.5			0.5		V/μs

μA748/748C-F,N
μA748C-D

TYPICAL CHARACTERISTIC CURVES

POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE



INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT RESISTANCE AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT OFFSET CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE



OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE



OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE



ABSOLUTE MAXIMUM POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE



INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY



INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY



BROADBAND NOISE AS A FUNCTION OF SOURCE RESISTANCE



μA748/748C-F,N
μA748C-D

TYPICAL CHARACTERISTIC CURVES (Cont'd)

OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY



OPEN LOOP PHASE RESPONSE AS A FUNCTION OF FREQUENCY



OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY



INPUT RESISTANCE AND INPUT CAPACITANCE AS A FUNCTION OF FREQUENCY



OUTPUT RESISTANCE AS A FUNCTION OF FREQUENCY



COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY



TRANSIENT RESPONSE



VOLTAGE FOLLOWER LARGE SIGNAL PULSE RESPONSE



FREQUENCY CHARACTERISTICS AS A FUNCTION OF SUPPLY VOLTAGE



FREQUENCY CHARACTERISTICS AS A FUNCTION OF AMBIENT TEMPERATURE



OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE



OUTPUT VOLTAGE SWING AS A FUNCTION OF SUPPLY VOLTAGE



SECTION 2
VIDEO AMPLIFIERS

Section 2—VIDEO AMPLIFIERS

NE/SE592	Video Amplifier	137
μA733/733C	Differential Video Amplifier	143

NE592-D,F,H,N
SE592-F,H

DESCRIPTION

The SE/NE592 is a monolithic, two stage, differential output, wideband video amplifier. It offers fixed gains of 100 and 400 without external components and adjustable gains from 400 to 0 with one external resistor. The input stage has been designed so that with the addition of a few external reactive elements between the gain select terminals, the circuit can function as a high pass, low pass, or band pass filter. This feature makes the circuit ideal for use as a video or pulse amplifier in communications, magnetic memories, display, video recorder systems, and floppy disc head amplifiers. The 592 is a pin-for-pin replacement for the μA733.

FEATURES

- **120MHz bandwidth**
- **Adjustable gains from 0 to 400**
- **Adjustable pass band**
- **No frequency compensation required**
- **Wave shaping with minimal external components**

PIN CONFIGURATION

D,F,N PACKAGE



H PACKAGE*



NOTE
Pin 5 connected to case.
*Metal cans (H) not recommended for new designs.

EQUIVALENT CIRCUIT

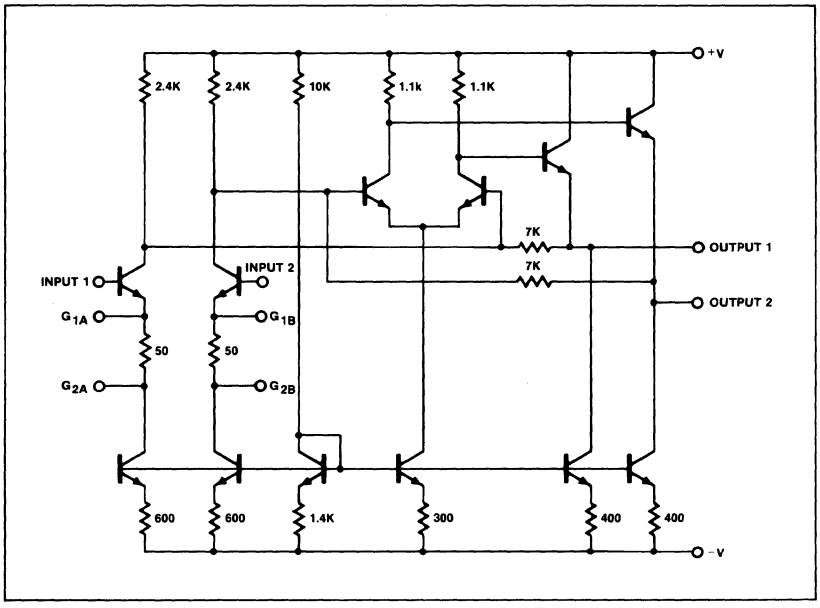

ABSOLUTE MAXIMUM RATINGS $T_A = 25°C$ unless otherwise specified.

PARAMETER	RATING	UNIT
Supply voltage	±8	V
Differential input voltage	±5	V
Common mode		
Input voltage	±6	V
Output current	10	mA
Operating temperature range		
SE592K	-55 to +125	°C
NE592K	0 to +70	°C
Storage temperature range	-65 to +150	°C
Power dissipation	500	mW

NE592-D,F,H,N
SE592-F,H

DC ELECTRICAL CHARACTERISTICS

T_A = +25°C, V_S = ±6V, V_{CM} = 0 unless otherwise specified
Recommend operating supply voltages V_S = ±6.0V

PARAMETER	TEST CONDITIONS	NE592			SE592			UNITS
		Min	Typ	Max	Min	Typ	Max	
Differential voltage gain								
Gain 1[1]	R_L = 2kΩ, V_{OUT} = 3V p-p	250	400	600	300	400	500	V/V
Gain 2[2]		80	100	120	90	100	110	V/V
Bandwidth								
Gain 1[1]			40			40		MHz
Gain 2[2]			90			90		MHz
Rise time								
Gain 1[1]	V_{OUT} = 1V p-p		10.5			10.5		ns
Gain 2[2]			4.5	12		4.5	10	ns
Propagation delay								
Gain 1[1]	V_{OUT} = 1V p-p		7.5			7.5		ns
Gain 2[2]			6.0	10		6.0	10	ns
Input resistance								
Gain 1[1]			4.0			4.0		kΩ
Gain 2[2]		10	30		20	30		kΩ
Input capacitance[2]	Gain 2		2.0			2.0		pF
Input offset current			0.4	5.0		0.4	3.0	μA
Input bias current			9.0	30		9.0	20	μA
Input noise voltage	BW 1kHz to 10MHz		12			12		μVrms
Input voltage range				±1.0			±1.0	V
Common mode rejection ratio								
Gain 2	VCM ±1V,F < 100kHz	60	86		60	86		dB
Gain 2	VCM ±1V,F = 5MHz		60			60		dB
Supply voltage rejection ratio								
Gain 2	ΔVS = ±0.5V	50	70		50	70		dB
Output offset voltage								
Gain 2[2]	R_L = ∞		0.35	0.75		0.35	0.75	V
Output common mode voltage	R_L = ∞	2.4	2.9	3.4	2.4	2.9	3.4	V
Out put voltage swing differential	R_L = 2K	3.0	4.0		3.0	4.0		
Output resistance			20			20		Ω
Power supply current	R_L = ∞		18	24		18	24	mA

NOTES

1. Gain select pins G_{1A} and G_{1B} connected together.
2. Gain select pins G_{2A} and G_{2B} connected together.
3. All gain select pins open.

TYPICAL PERFORMANCE CHARACTERISTICS

COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY

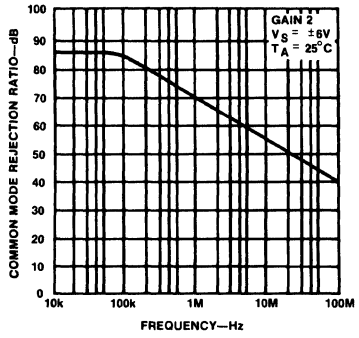

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY

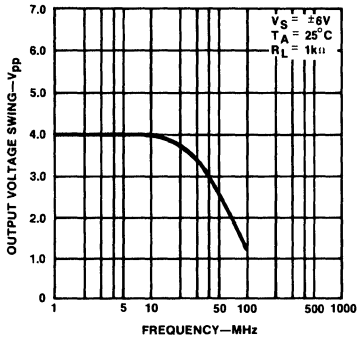

PULSE RESPONSE

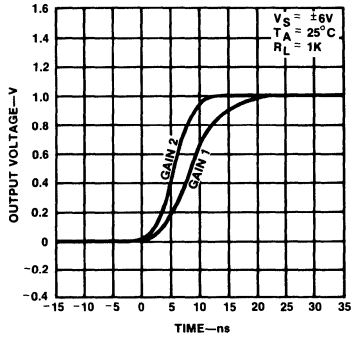

DIFFERENTIAL OVERDRIVE RECOVERY TIME

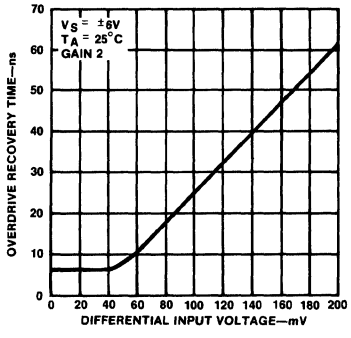

PULSE RESPONSE AS A FUNCTION OF SUPPLY VOLTAGE

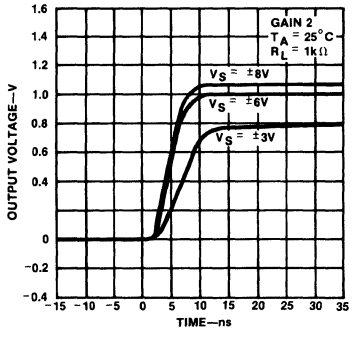

PULSE RESPONSE AS A FUNCTION OF TEMPERATURE

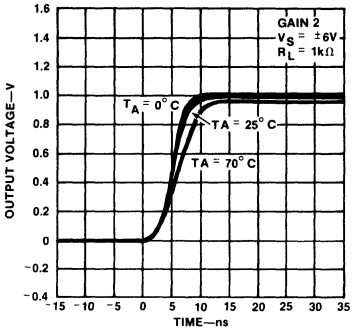

VOLTAGE GAIN AS A FUNCTION OF TEMPERATURE

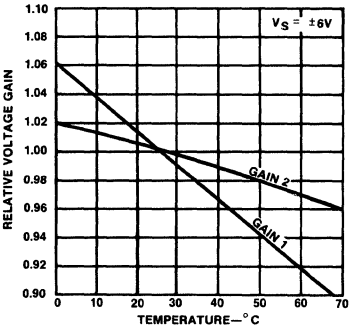

GAIN vs FREQUENCY AS A FUNCTION OF TEMPERATURE

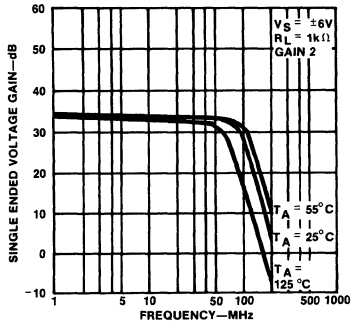

VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE

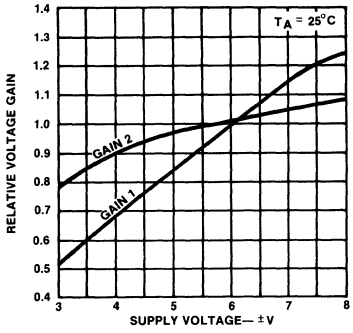

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

GAIN vs FREQUENCY AS A FUNCTION OF SUPPLY VOLTAGE

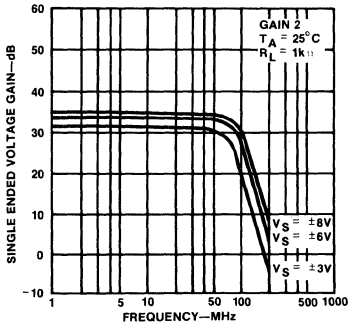

VOLTAGE GAIN ADJUST CIRCUIT

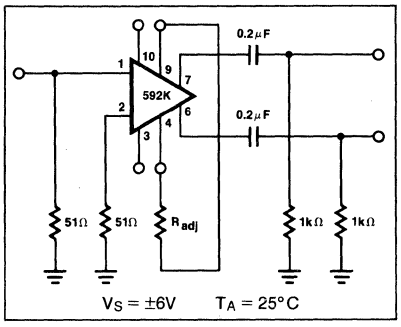

VOLTAGE GAIN AS A FUNCTION OF RADJ (FIGURE 3)

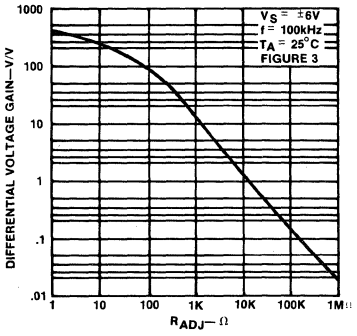

SUPPLY CURRENT AS A FUNCTION OF TEMPERATURE

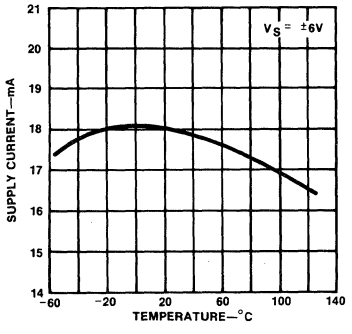

SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



OUTPUT VOLTAGE AND CURRENT SWING AS A FUNCTION OF SUPPLY VOLTAGE

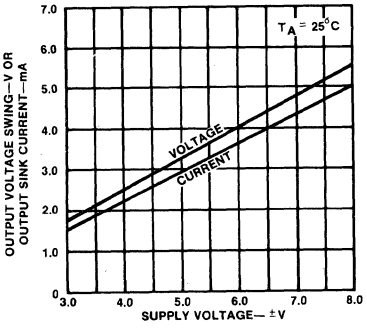

OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE

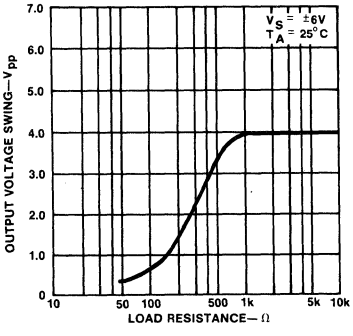

INPUT RESISTANCE AS A FUNCTION OF TEMPERATURE

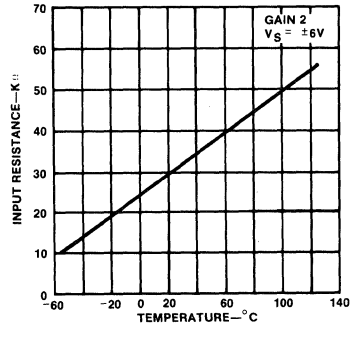

INPUT NOISE VOLTAGE AS A FUNCTION OF SOURCE RESISTANCE

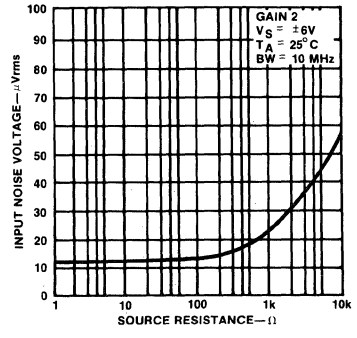

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

PHASE SHIFT AS A FUNCTION OF FREQUENCY

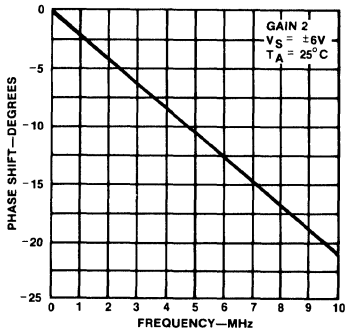

PHASE SHIFT AS A FUNCTION OF FREQUENCY

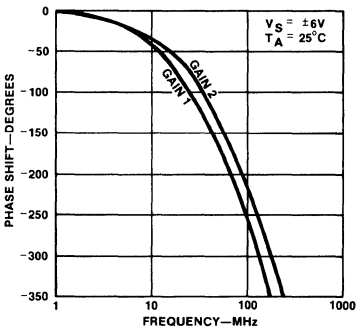

VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

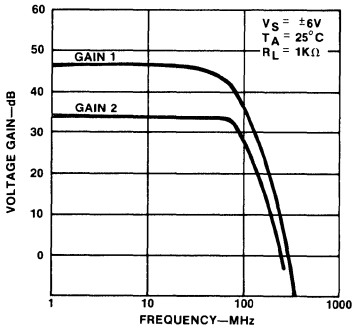

VOLTAGE GAIN AS A FUNCTION OF FREQUENCY (ALL GAIN SELECT PINS OPEN)

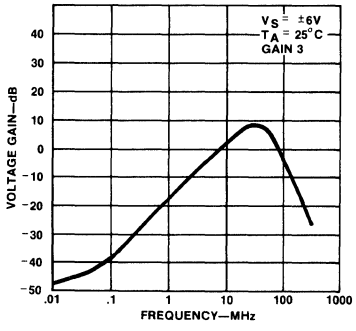

TEST CIRCUITS

T_A = 25°C unless otherwise specified

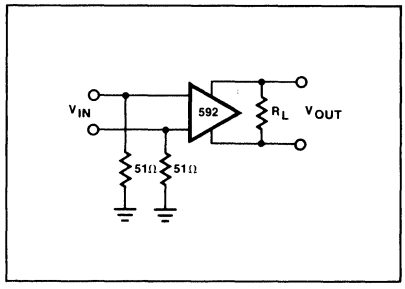

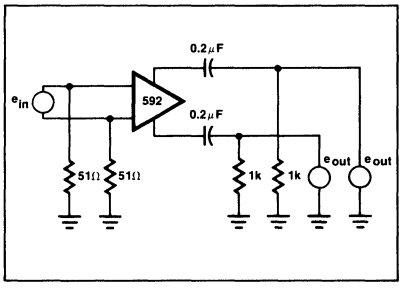

NE592-D,F,H,N
SE592-F,H

TYPICAL APPLICATIONS

FILTER NETWORKS



$$\frac{V_0(s)}{V_1(s)} \cong \frac{1.4 \times 10^4}{Z(s) + 2r_e}$$

$$\cong \frac{1.4 \times 10^4}{Z(s) + 32}$$

BASIC CONFIGURATION

Z NETWORK	FILTER TYPE	V_0 (s) TRANSFER V_1 (s) FUNCTION
	LOW PASS	$\frac{1.4 \times 10^4}{L}\left[\frac{1}{s + R/L}\right]$
	HIGH PASS	$\frac{1.4 \times 10^4}{R}\left[\frac{s}{s + 1/RC}\right]$
	BAND PASS	$\frac{1.4 \times 10^4}{L}\left[\frac{s}{s^2 + R/L\ s + 1/LC}\right]$
	BAND REJECT	$\frac{1.4 \times 10^4}{R}\left[\frac{s^2 + 1/LC}{s^2 + 1/LC + s/RC}\right]$

NOTE

In the networks above, the R value used is assumed to include $2r_e$, or approximately 32Ω.

DISC/TAPE PHASE MODULATED READBACK SYSTEMS

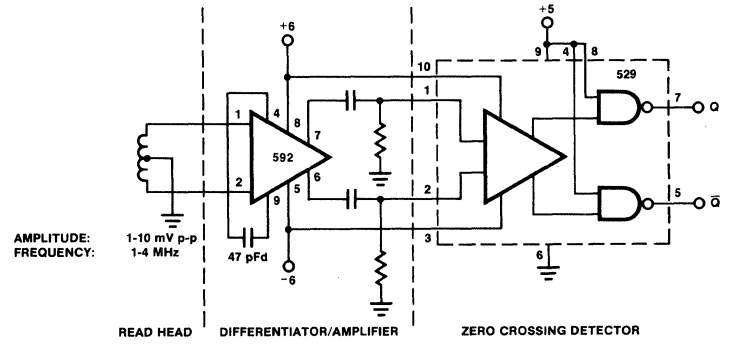

DIFFERENTIATION WITH HIGH COMMON MODE NOISE REJECTION

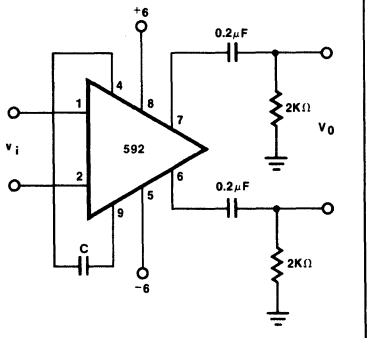

FOR FREQUENCY $F_1 << 1/2\ \pi\ (32)\ C$

$V_0 \cong 1.4 \times 10^4 C \frac{dVi}{dT}$

μA733/733C-F,H,N

DESCRIPTION

The 733 is a monolithic differential input, differential output, wideband video amplifier. It offers fixed gains of 10,100 or 400 without external components, and adjustable gains from 10 to 400 by the use of an external resistor. No external frequency compensation components are required for any gain option. Gain stability, wide bandwidth and low phase distortion are obtained through use of the classic series-shunt feedback from the emitter follower outputs to the inputs of the second stage. The emitter follower outputs provide low output impedance, and enable the device to drive capacitive loads. The 733 is intended for use as a high performance video and pulse amplifier in communications, magnetic memories, display and video recorder systems.

FEATURES

- **120MHz bandwidth**
- **250kΩ input resistance**
- **Selectable gains of 10,100 and 400**
- **No frequency compensation required**
- **Mil std 883A,B,C available**

PIN CONFIGURATION

F,N PACKAGE



H PACKAGE*



NOTE
Pin 5 connected to case.
*Metal cans (H) not recommended for new designs

CIRCUIT SCHEMATIC

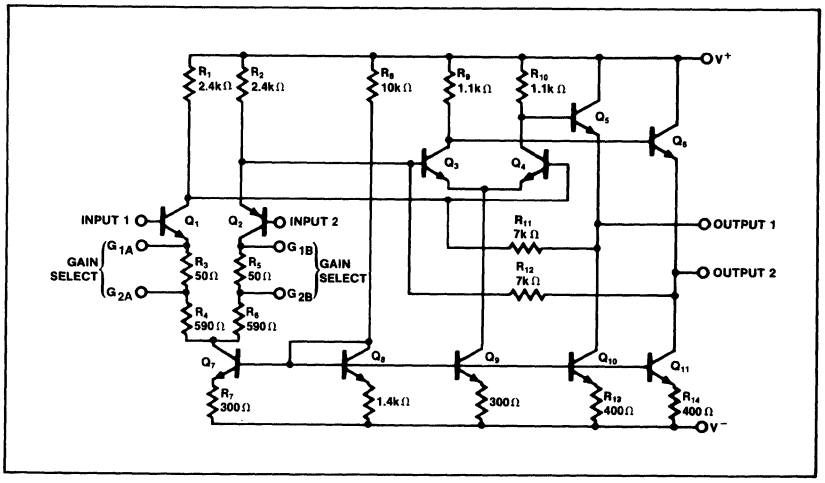

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Differential input Voltage	±5	V
Common mode input Voltage	±6	V
V_{CC}	±8	V
Ouput current	10	mA
Junction temperature	+150	°C
Storage temperature range	-65 to +150	°C
Operation temperature range		
μA733C	0 to +75	°C
μA733	-55 to +125	°C
P_D Power dissipation		
K package	500	mW
N, F package	670	mW

μA7733/733C-F,H,N

DC ELECTRICAL CHARACTERISTICS

T_A = +25°C, V_S = ±V, VCM = 0 unless otherwise specified.
Recommended operating supply voltages V_S = ±6.0V.

PARAMETER	TEST CONDITIONS	μA733C			μA733			UNITS
		Min	Typ	Max	Min	Typ	Max	
Differential voltage gain								
Gain 1[1]		250	400	600	300	400	500	V/V
Gain 2[2]	R_l = 2kΩ, V_{OUT} = 3Vp-p	80	100	120	90	100	110	V/V
Gain 3[3]		8.0	10	12	9.0	10	11	V/V
Bandwidth								
Gain 1[1]			40			40		MHz
Gain 2[2]			90			90		MHz
Gain 3[3]			120			120		MHz
Rise time								
Gain 1[1]			10.5			10.5		ns
Gain 2[2]	V_{OUT} = 1Vp-p		4.5	12		4.5	10	ns
Gain 3[3]			2.5			2.5		ns
Propagation delay								
Gain 1[1]			7.5			7.5		ns
Gain 2[2]	V_{OUT} = 1Vp-p		6.0	10		6.0	10	ns
Gain 3[3]			3.6			3.6		ns
Input resistance								
Gain 1[1]			4.0			4.0		kΩ
Gain 2[2]		10	30		20	30		kΩ
Gain 3[3]			250			250		kΩ
Input capacitance[2]	Gain 2		2.0			2.0		pF
Input offset current			0.4	5.0		0.4	3.0	μA
Input bias current			9.0	30		9.0	20	μA
Input noise voltage	BW = 1kHz to 10MHz		12			12		μVrms
Input voltage range		±1.0			±1.0			V
Common mode Rejection ratio								
Gain 2	VCM = ±V,f ≤ 100kHz	60	86		60	86		dB
Gain 2	VCM = ±1V,F = 5MHz		60			60		dB
Supply voltage Rejection ratio								
Gain 2	ΔV_S = ±0.5V	50	70		50	70		dB
Output offset voltage								
Gain 1[1]	R_L = ∞		0.6	1.5		0.6	1.5	V
Gain 2 and 3[2,3]			0.35	1.5		0.35	1.0	V
Output common mode voltage	R_L= ∞	2.4	2.9	3.4	2.4	2.9	3.4	V
Output voltage swing, differential	R_L = 2k	3.0	4.0		3.0	4.0		
Output sink current		2.5	3.6		2.5	3.6		mA
Output resistance			20			20		Ω
Power supply current	R_L ± ∞		18	24		18	24	mA

NOTES

1. Gain select pins G_{1A} and G_{1B} connected together.
2. Gain select pins G_{2A} and G_{2B} connected together.
3. All gain select pins open.

TYPICAL PERFORMANCE CHARACTERISTICS

PHASE SHIFT AS A FUNCTION OF FREQUENCY

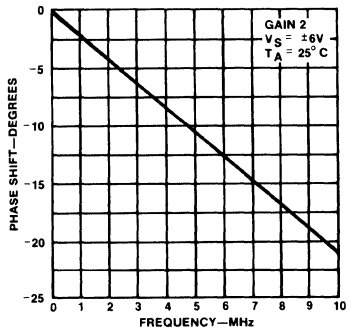

PHASE SHIFT AS A FUNCTION OF FREQUENCY

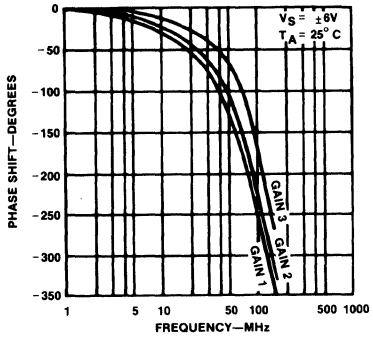

VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

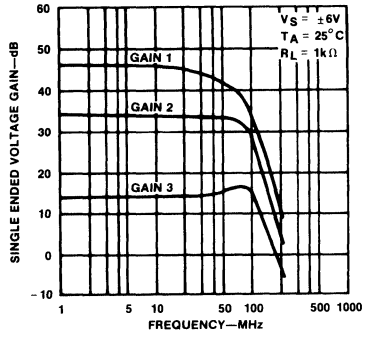

COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY

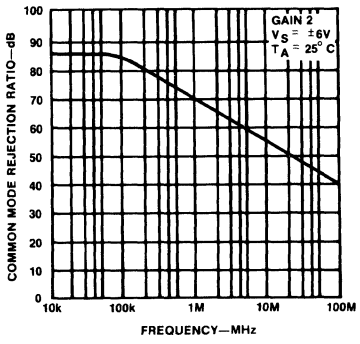

OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY

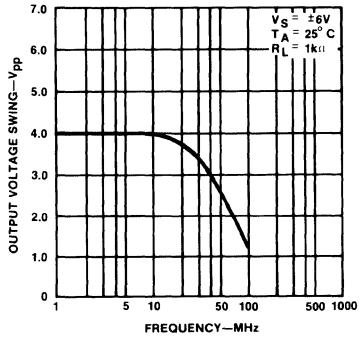

PULSE RESPONSE

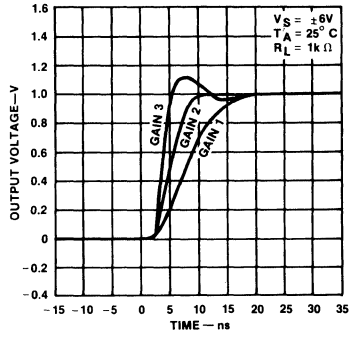

DIFFERENTIAL OVERDRIVE RECOVERY TIME

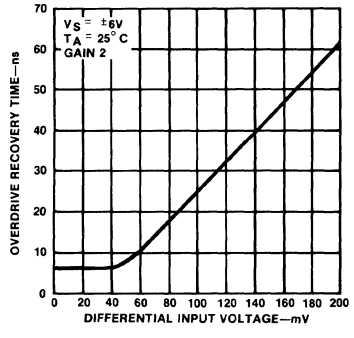

PULSE RESPONSE AS A FUNCTION OF SUPPLY VOLTAGE

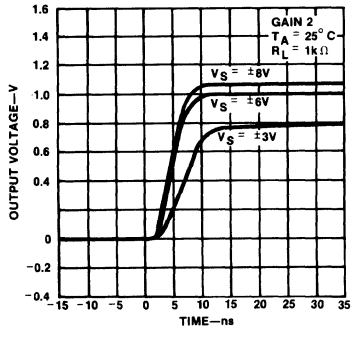

PULSE RESPONSE AS A FUNCTION OF TEMPERATURE

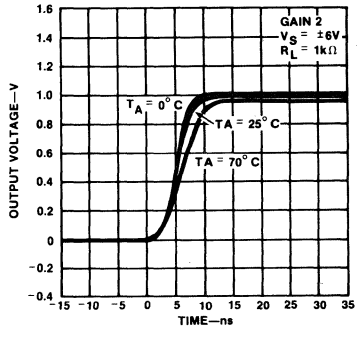

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

VOLTAGE GAIN AS A FUNCTION OF TEMPERATURE



GAIN vs FREQUENCY AS A FUNCTION OF TEMPERATURE

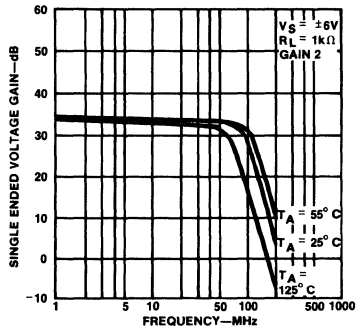

VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE



GAIN vs FREQUENCY AS A FUNCTION OF SUPPLY VOLTAGE

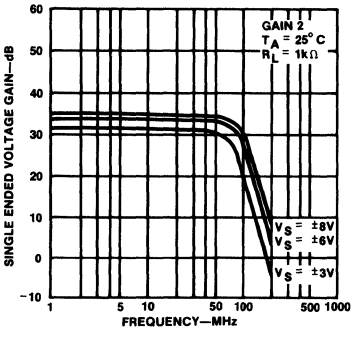

VOLTAGE GAIN ADJUST CIRCUIT

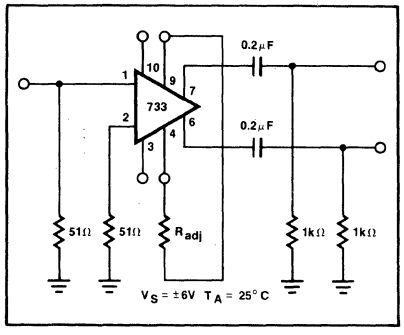

(Pin numbers apply to K Package)

VOLTAGE GAIN AS A FUNCTION OF RADJ (FIGURE 3)

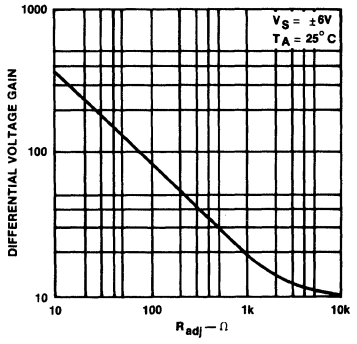

SUPPLY CURRENT AS A FUNCTION OF TEMPERATURE

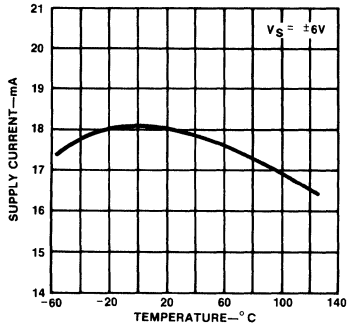

SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE

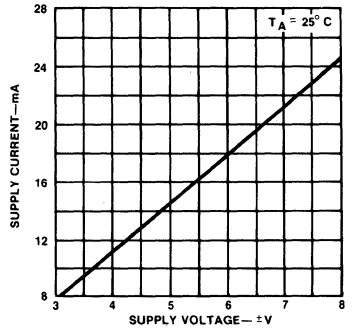

OUTPUT VOLTAGE AND CURRENT SWING AS A FUNCTION OF SUPPLY VOLTAGE

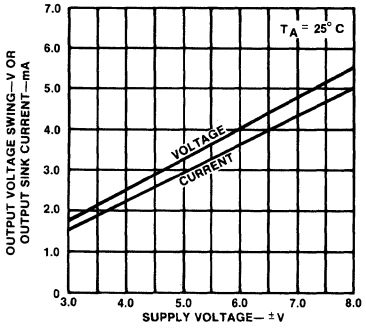

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE

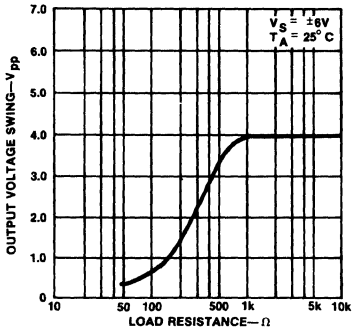

INPUT RESISTANCE AS A FUNCTION OF TEMPERATURE



INPUT NOISE VOLTAGE AS A FUNCTION OF SOURCE RESISTANCE



TEST CIRCUITS T_A = 25°C unless otherwise specified.

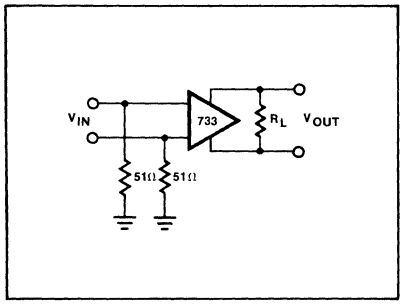

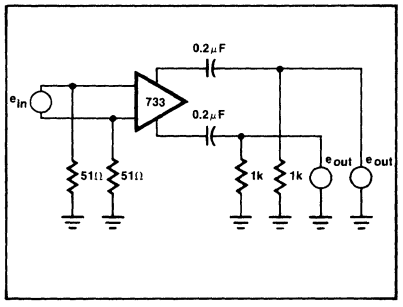

SECTION 3
POWER CONTROLLERS

Section 3—POWER CONTROLLERS

NE/SE5553/5554	Dual Polarity Regulator	153
NE/SE5560	Switched-Mode Power Supply Control Circuit	157
SG1524/2524/3524	Regulating Pulse Width Modulator	161
μA723/723C/SA723C	Precision Voltage Regulator	169

VOLTAGE REGULATOR DEFINITIONS

T_A
Ambient temperature range. Range of the surrounding environment of the operating device.

T_J
Junction Temperature. The maximum temperature of the device. 150°C is standard for silicon devices.

T_{STG}
Storage temperature range. Temperature range that the device can be stored in a non-operating condition.

T_{SOLD}
Soldering Temperature. The temperature which can be applied to the lead frame of the device for short periods of time (normally specified for a duration of 10 sec).

Truth Tables
0 is logic level low
1 is logic level high
X - don't care condition - has no effect under circuit conditions listed.

Absolute Maximum Rating
Operating safe zones exceeding these limits could cause permanent damage to the device and are not meant to imply that devices can operate at these limits.

Power Dissipation
The power that the device can safely handle at 25°C. The dissipation must be derated as indicated for the individual package type.

Package Type Designation
See full package designations in Appendix.

V_{CC} ($-V_{CC}$)
Supply Voltage. The range of power supply voltage over which the device will operate safely.

Line Regulation
Sometimes referred to as "static regulation". This term refers to the changes in the output as the input is varied slowly from its rated minimum value to its rated maximum value (from 105 VAC_{RMS} to 125 VAC_{RMS}). Measured in mv/V.

Load Regulation
Sometimes referred to as "dynamic regulation". This term refers to the changes in the output when load conditions are suddenly changed (from no load to full load). Measured in mv/V.

Thermal Regulation
Referred to as changes due to ambient variations or thermal drift. Also referred to as temperature coefficient, measured in ppm/°C or mv/°C.

Transient Response
The ability of a regulator to respond to rapid changes in line variations, load variations, or intermittent transient input conditions. (Transient Response is often referred to as "recovery time"). Measured in milliseconds (ms).

Voltage Limiting
The ability of the regulator to "shut down" in the event that the internal reference sources fail to function properly. Measured in Volts.

Current Limiting
The ability of the amplified segment to limit the output current of the device when safe operating limits are exceeded. Measured in amperes (pre-determined).

Thermal Shutdown
The ability of the regulator to shut itself down when the maximum die temperature is exceeded. Measured in degrees Celsius (C).

Power Dissipation
The ability of the regulator to tolerate excessively high levels of input power while maintaining its operation within the safe operating area of its active devices. Measured in watts.

Efficiency
Regarding a regulator, the ratio of the total power input to the usable power output. Expressed as a percentage. (For example, if a regulator has a 50 watt input and a 40 watt output, its efficiency is 80 percent).

EMI/RFI
("Electromagnetic Interference/Radio Frequency Interference") regarding regulators, magnetic field disturbance and radio frequency interference signals generated especially by SMPS devices. Measurement is generally unspecified.

Safe Operating Area Restriction (SOAR)
Limits the output current of the amplifier to maintain safe (no thermal runaway) operating conditions. (Accomplished through internal sensor amplifiers).

NOTE
Refer to Section 4 of Analog Applications Manual for an in-depth explanation of Voltage Regulators

DUAL TRACKING VOLTAGE REGULATOR

COMPETITION	INDUSTRY VALUE	KEY PARAMETER	SIGNETICS AVAILABLE VALUE	SIGNETICS ORIGINATED DEVICES	QR&A		COMMENTS
					SURE II	SUPR II	
NATIONAL MOTOROLA RAYTHEON		Line Regulator	1 %	SE/NE 555X	Yes		I_{OUT} 400mA
LM125, −6, −7	0.1 %	Line Regulator	0.25 %				
Raytheon 4194	±.05 to ±40	V_{OUT}	± 5 to ±20 Volts	SE/NE 5553/4	Yes		
Motorola 1568	100 mA	I_{OUT}	±400 mA	SE/NE 5553/4			
		Package Power Dissipation	8 Watts	SE, NE { 5553/4 Series in SIL-9 package			

NE/SE5553/5554-F,H,N,U

DESCRIPTION

The NE/SE5553,4 are dual polarity tracking regulators designed to produce balanced or unbalanced output voltages from 5 to 20 volts with up to 300 mA output current. Similar in specifications to the 78MXX and 79MXX fixed regulators, the 5553/4 series can be continuously adjusted, balanced or unbalanced. The fixed voltage on the 5553 is ±12V, and on the 5554 is ±15V. Employing current limiting and thermal shutdown protection, these dual polarity regulators are ideal for local on-card regulation.

FEATURES

- **Output current to 300mA**
- **Internally current limited**
- **Thermal overload protected**
- **Input voltage to ±32V**
- **Output balance 1% typ.**
- **External balance control**
- **Continuously adjustable from 5 to 20 volts, balanced or unbalanced**
- **No external components required**
- **Short circuit current 400mA**
- **Maximum power capability can be achieved with proper heat sinking**

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_{IN}	Input voltage	±32	V
T_{SG}	Storage temperature	-65 to +150	°C
T_J	Operating junction temperature		
	NE5553/5554	0 to +125	°C
	SE5553/5554	-55 to +150	°C
	Lead temperature 10 sec.	300	°C

BLOCK DIAGRAM

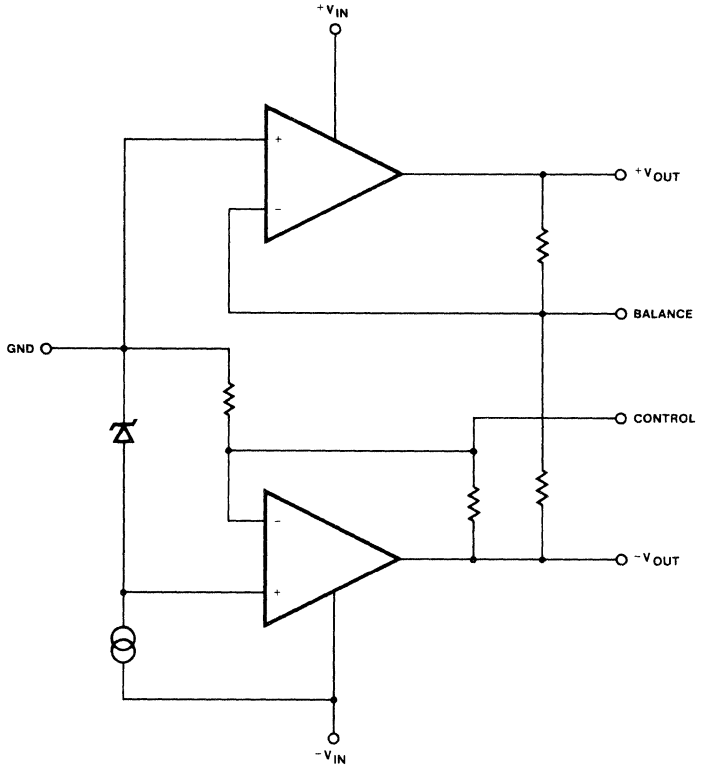

PIN CONFIGURATIONS

F,N PACKAGE



ORDER PART NO.

VOLTAGE	PART NO.
±12V	NE/SE5553F,N
±15V	NE/SE5554F,N

H PACKAGE*



ORDER PART NO.

VOLTAGE	PART NO.
±12V	NE/SE5553H
±15V	NE/SE5554H

*Metal cans (H) not recommended for new designs

U PACKAGE



ORDER PART NO.

VOLTAGE	PART NO.
±12V	NE/SE5553U
±15V	NE/SE5554U

THERMAL RESISTANCE

H Package: Θ_{JC} = 20°C/W Θ_{JA} = 150°C/W
N Package: Θ_{JC} = 33°C/W Θ_{JA} = 95°C/W
U Package: Θ_{JC} = 30°C/W Θ_{JA} = 62°C/W
F Package: Θ_{JC} = 30°C/W Θ_{JA} = 110°C/W

DC ELECTRICAL CHARACTERISTICS

V_{IN} = ±20V, I_L = 100mA, T_J = 25°C, C_{IN} = C_{OUT} = 0.1μF unless otherwise specified.[2]

PARAMETER		TEST CONDITIONS	SE5553			NE5553			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OUT}+ V_{OUT}−	Positive output voltage Negative output voltage		+11.5 −12.5	+12 −12	+12.5 −11.5	+11.5 −12.5	+12 −12	+12.5 −11.5	V
ΔVOUT	Line regulation	±20 ≤ V_{IN} ≤ ±30V		100	150		100	300	mV
ΔVOUT	Load regulation	1mA ≤ I_{Load} ≤ 50mA 1mA ≤ I_{Load} ≤ 200mA		10 30	25 100		10 30	50 200	mV mV
V_{OUT}+ V_{OUT}−	Positive output voltage Negative output voltage	1mA ≤ I_L ≤ 100mA ±20V ≤ V_{IN} ≤ ±30V over temp.[1]	+11.4 −12.6	+12 −12	+12.6 −11.4	+11.4 −12.6	+12 −12	+12.6 −11.4	V V
I_Q+ I_Q−	Positive quiescent current Negative quiescent current	I_{Load} = 0 I_{Load} = 0		1.70 5.60	3.5 8.5		1.70 5.60	3.5 8.5	mA mA
V_{BAL}	Input/output differential voltage Output voltage balance Output noise voltage	 100Hz to 10kHz		2.5 .2 55			2.5 .2 55		V V μVrms
I_{Peak}	Peak output current Temperature stability of output voltage			400 1			400 1		mA mV/°C

DC ELECTRICAL CHARACTERISTICS

V_{IN} = ±20V, I_L = 100mA, T_J = 25°C, C_{IN} = C_{OUT} = 0.1μF unless otherwise specified.[2]

PARAMETER		TEST CONDITIONS	SE5554			NE5554			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OUT}+ V_{OUT}−	Positive output voltage Negative output voltage		+14.4 −15.6	+15 −15	+15.6 −14.4	+14.4 −15.6	+15 −15	+15.6 −14.4	V
ΔVOUT	Line regulation	±20 ≤ V_{IN} ≤ ±30V		100	150		100	300	mV
ΔVOUT	Load regulation	1mA ≤ I_{Load} ≤ 50mA 1mA ≤ I_{Load} ≤ 200mA		10 30	25 100		10 30	50 200	mV mV
V_{OUT}+ V_{OUT}−	Positive output voltage Negative output voltage	1mA ≤ I_L ≤ 100mA ±20V ≤ V_{IN} ≤ ±30V over temp.[1]	+14.25 −15.75	+15 −15	+15.75 −14.25	+14.25 −15.75	+15 −15	+15.75 −14.25	V V
I_Q+ I_Q−	Positive quiescent current Negative quiescent current	I_{Load} = 0 I_{Load} = 0		1.70 5.60	3.5 8.5		1.70 5.60	3.5 8.5	mA mA
V_{BAL}	Input/output differential voltage Output voltage balance Output noise voltage	 100Hz to 10kHz		2.5 .2 55			2.5 .2 55		V V μVrms
I_{Peak}	Peak output current Temperature stability of output voltage			400 1			400 1		mA mV/°C

NOTES

1. Junction temperature range
   SE prefix −55°C < T_J < 150°C
   NE prefix 0°C < T_J < 125°C
2. C_{IN} needed only when remote from filter capacitors
   C_{OUT} needed only if dynamic regulation is to be improved.

TYPICAL PERFORMANCE CHARACTERISTICS

LOAD REGULATION

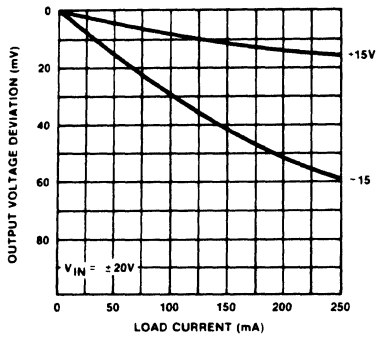

IQ +, IQ -

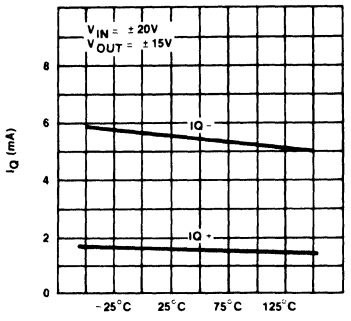

RIPPLE REJECTION

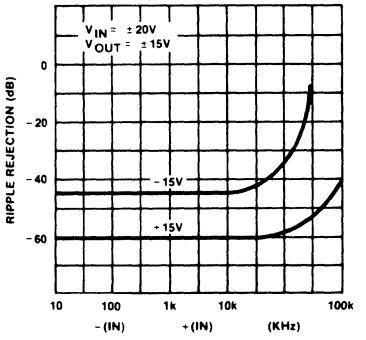

MAXIMUM CURRENT CAPABILITY

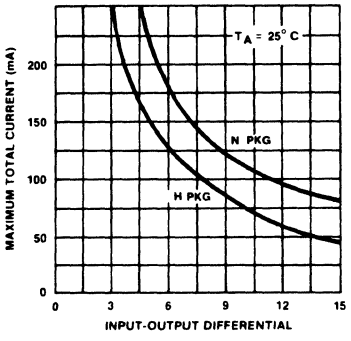

MAXIMUM FREE AIR POWER DISSIPATION

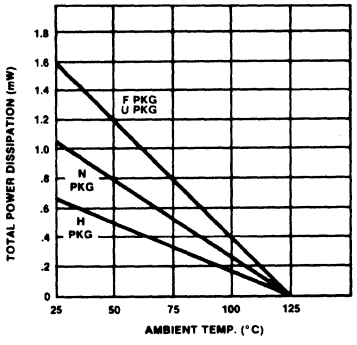

LINE TRANSIENT RESPONSE, POSITIVE

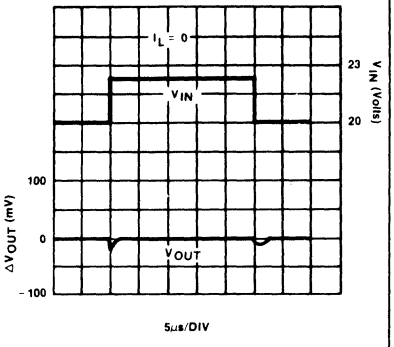

LINE TRANSIENT RESPONSE, NEGATIVE

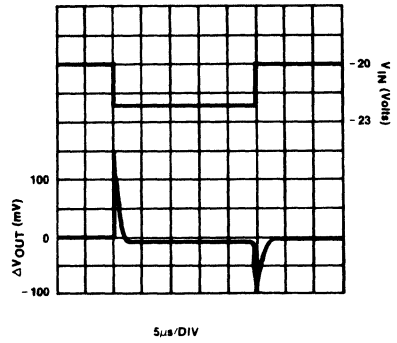

LOAD TRANSIENT RESPONSE, POSITIVE

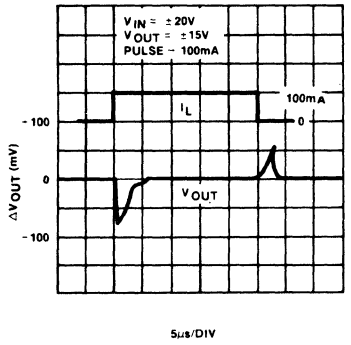

LOAD TRANSIENT RESPONSE, NEGATIVE

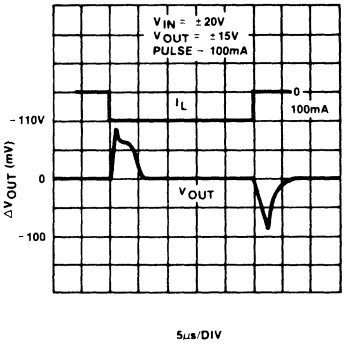

4. Device capability in free air.

BLOCK DIAGRAM

TYPICAL CONNECTION

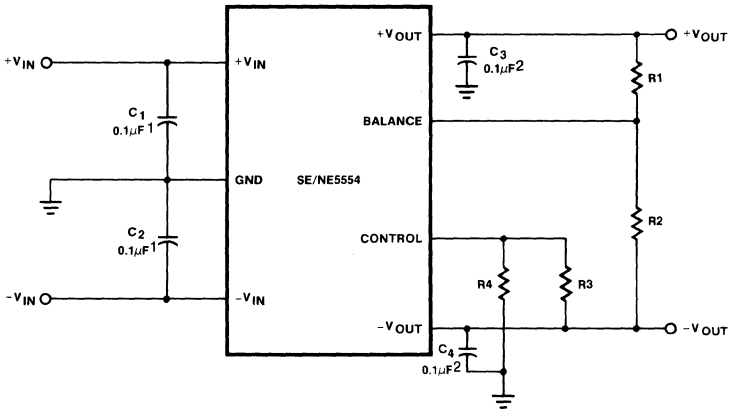

R1 and R2 adjust $+V_{OUT}$ with respect to $-V_{OUT}$
R3 and R4 adjust $-V_{OUT}$ From -5V to -20V

NOTES

1. Required if regulator is operated any distance from filter capacitor.
2. Not required for stability, but improves dynamic regulation.

TYPICAL APPLICATIONS

HIGH CURRENT TRACKING REGULATOR

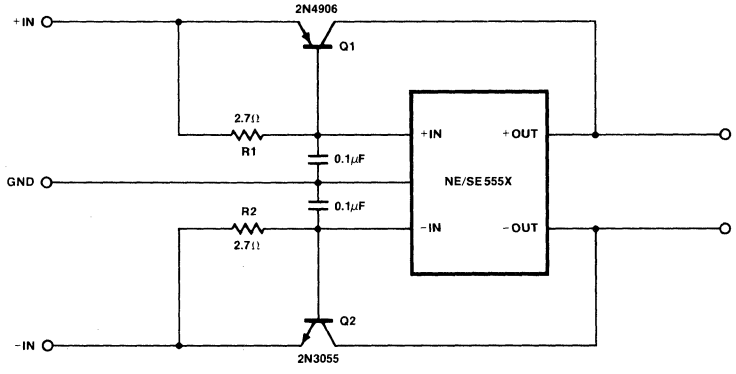

$$R1 = R2 = \frac{V_{BE}}{I_{REG(max)}\,(\beta + 1) - I_{out(max)}}$$

For

$$\beta(Q) \geq \frac{I_{out\ (max)}}{I_{reg\ (max)}}$$

NE/SE5560-F,N

DESCRIPTION

The NE/SE5560 is a control circuit for use in switched mode power supplies. This single monolithic chip incorporates all the control and housekeeping (protection) functions required in switched mode power supplies, including an internal temperature compensated reference source, internal Zener reference, sawtooth generator, pulse width modulator, output stage and various protection circuits.

FEATURES

- **Stabilized power supply**
- **Temperature compensated reference source**
- **Sawtooth generator**
- **Pulse width modulator**
- **Remote on/off switching**
- **Current limiting**
- **Low supply voltage protection**
- **Loop fault protection**
- **Demagnetization/overvoltage protection**
- **Maximum duty cycle adjustment**
- **Feed forward control**
- **External synchronization**

PIN CONFIGURATION

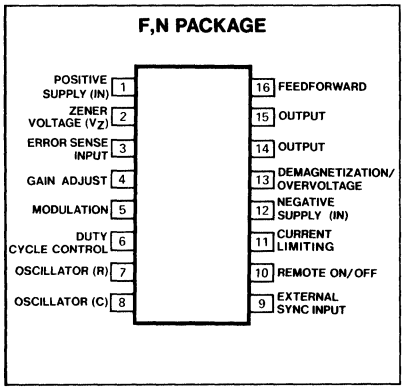

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage (Voltage sourced)	+18	V
Supply current (Current sourced)	30	mA
Output current	40	mA
Operating temperature range (ambient)		
SE5560	−55 to +125	°C
NE5560	0 to +70	°C
Storage temperature range	−65 to +150	°C

BLOCK DIAGRAM

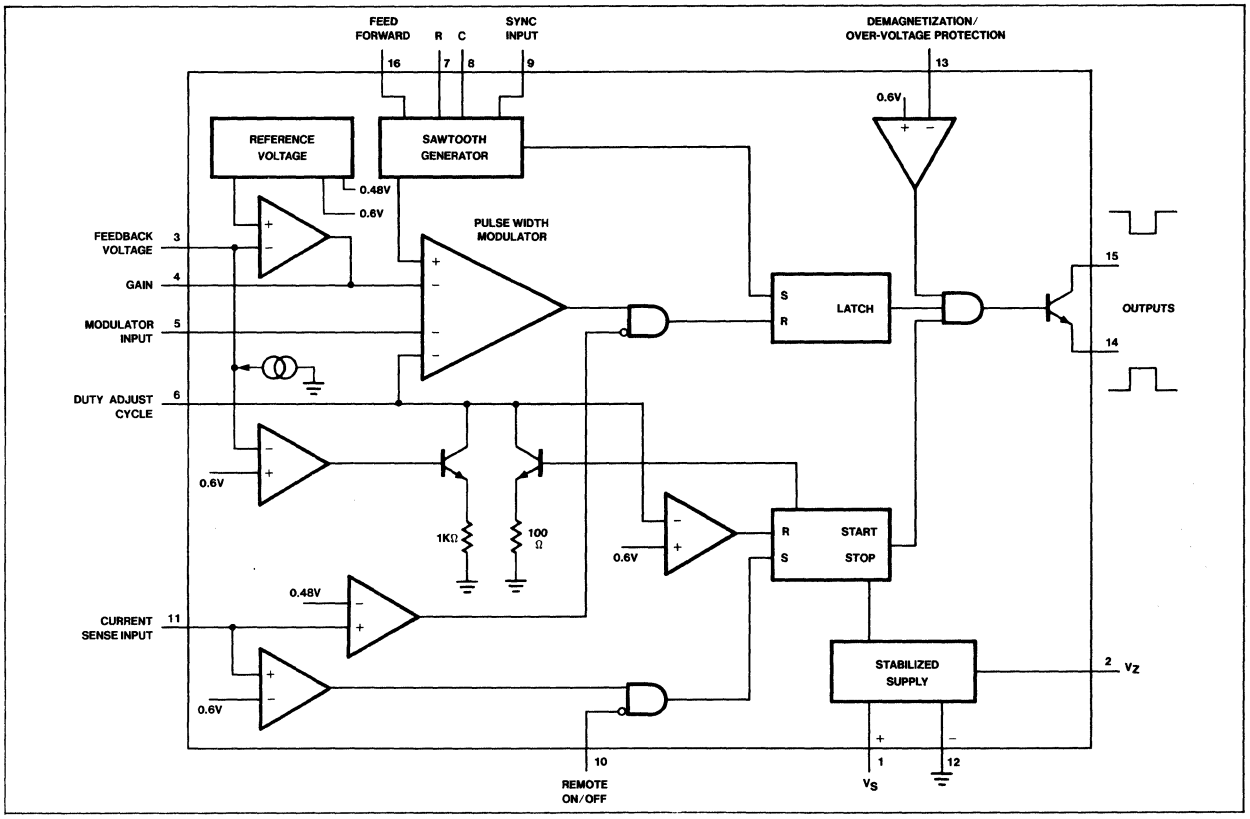

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = 12V$ unless otherwise specified

PARAMETER	TEST CONDITIONS	SE5560			NE5560			UNIT
		Min	Typ	Max	Min	Typ	Max	
REFERENCE SECTIONS								
Internal reference voltage (V_{ref})	25°C	3.69	3.76	3.84	3.57	3.76	3.96	V
Internal Zener reference (V_Z)	I_L = 7mA	7.8	8.4	9.0	7.8	8.4	9.0	V
Temperature coefficient of V_{ref}				± 100		± 100		ppm/°C
Temperature coefficient of V_Z			± 150			± 150		ppm/°C
OSCILLATOR SECTION								
Frequency range		50		100K	50		100K	Hz
Initial accuracy	R = 5K		5			5		%
Duty cycle range[1]	fo = 20kHz	0		98	0		98	%
MODULATOR								
Modulator input current	Voltage at Pin 5 = 1V		0.2	20		0.2	20	μA
HOUSEKEEPING FUNCTION								
Pin 6 Duty cycle limit control	(For 50% Maximum duty cycle) 15kHz to 50kHz	38	40	42	37	40	43	% of V_Z
Pin 6 Input current			.2	20		0.2	20	μA
Pin 1 Low supply voltage protection thresholds		8.5	9.1	10.5	8.5	9.1	10.5	V
Pin 3 Feedback loop protection trip on threshold		400	500	720	400	500	720	mV
Pin 3 Pull up current			−15	−35		−15	−35	μA
Pin 13 Demagnetization/over voltage protection trip on threshold		470	600	720	470	600	720	mV
Pin 13 Input current	25°C		0.6	10		0.6	10	μA
Pin 16 Feed forward duty cycle[2] control	Voltage at Pin 16 = $2V_Z$		0.4			0.4		original duty cycle
Feed forward input current	25°C		0.2	5		0.2	5	μA
EXTERNAL SYNCHRONIZATION								
Pin 9 off		0		0.8	0		0.8	V
on		2		V_Z	2		V_Z	V
Sink current	Voltage at Pin 9 = 0V 25°C		−65	−100		−65	−125	μA
REMOTE								
Pin 10 off		0		0.8	0		0.8	V
on		2		V_Z	2		V_Z	V
Sink current	25°C		−85	−100		−75	−125	μA
CURRENT LIMITING								
Pin 11; I_{IN}	Voltage at Pin 11 = 250mV, 25°C		−2	−10		−2	−10	μA
Single pulse inhibit delay	Inhibit delay time for 20% overdrive at 40mA I_{OUT}		0.7	0.8		0.7	0.8	μs
Trip Levels:								
Shut down/slow start		.500	.600	.700	.500	.600	.700	V
Current limit		.400	.48	.56	.400	.480	.560	V

NOTES
1. See graph
2. See graph

DC ELECTRICAL CHARACTERISTICS (Con't) T_A = 25°C, V_{CC} = 12V unless otherwise specified

PARAMETER	TEST CONDITIONS	SE5560			NE5560			UNIT
		Min	Typ	Max	Min	Typ	Max	
ERROR AMPLIFIER								
Open loop gain			60			60		dB
Feedback resistor		10K			10K			Ω
Small signal bandwith			3			3		MHz
Output voltage swing (positive)		6.2			6.2			V
Output voltage swing (negative)				0.7			0.6	V
OUTPUT STAGE								
Output Current (Pin 15)		40			40			mA
Max emitter voltage (Pin 14)		5	6		5	6		V
V_{CE}(SAT) I_C = 40mA				0.5			0.5	V
SUPPLY VOLTAGE/CURRENT								
I_{CC}	I_Z=0, Voltage fed, V_{CC}=12V, 25°C			10			10	mA
V_{CC}	I_{CC} = 10 mA, Current fed	20		23	19		24	V
V_{CC}	I_{CC} = 30 mA, Current fed	20		30	20		30	V

NOTES
1. See graph
2. See graph

TYPICAL PERFORMANCE CHARACTERISTICS

GRAPH FOR DETERMINING δ MAX

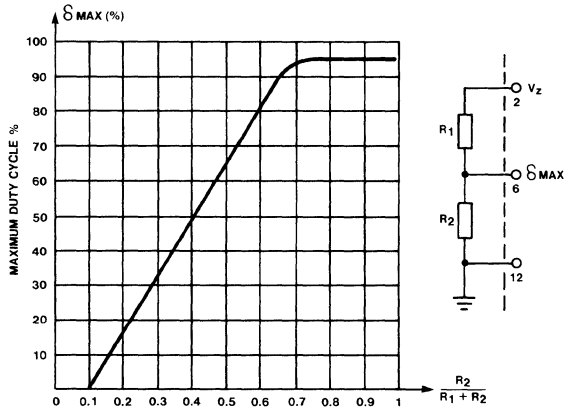

SOFT-START MIN. DUTY CYCLE VS $R_1 + R_2$

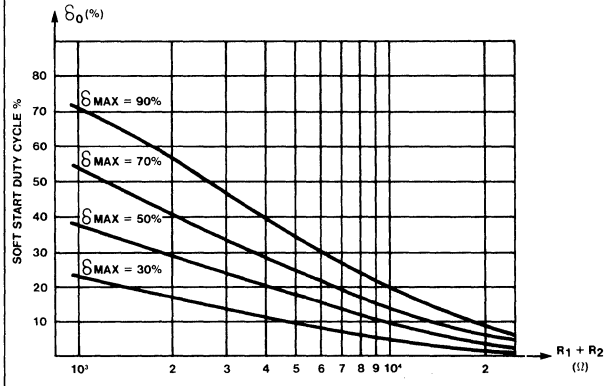

POWER DERATING CURVE

$Pd = V_{CC} I_{CC} + (V_{CC} - V_Z) I_Z + [(V_{15} - V_{14}) I_{15} \times \text{DUTY CYCLE}]$



NE5560 VOLTAGE/CURRENT FED SUPPLY CHARACTERISTICS



TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

REGULATION VS ERROR AMP CLOSED LOOP GAIN

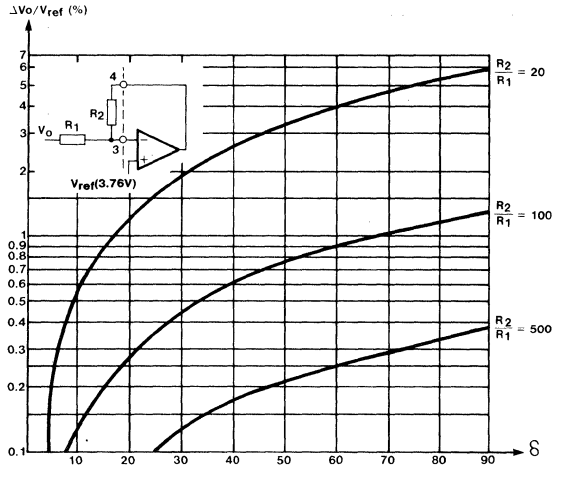

TRANSFER CURVE OF PULSE WIDTH MODULATOR DUTY CYCLE VS INPUT VOLTAGE

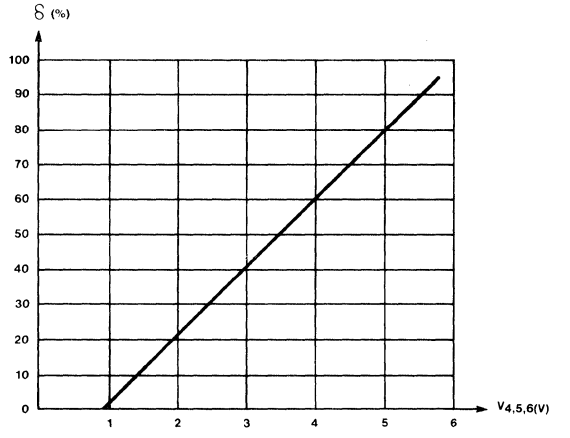

TYPICAL FREQUENCY PLOT VS R_T AND C_T

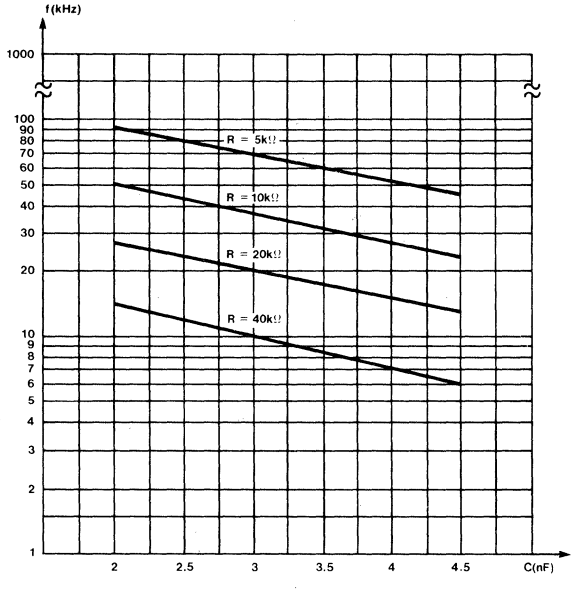

DUTY CYCLE SENSITIVITY TO FEED FORWARD VOLTAGE (PIN 16)

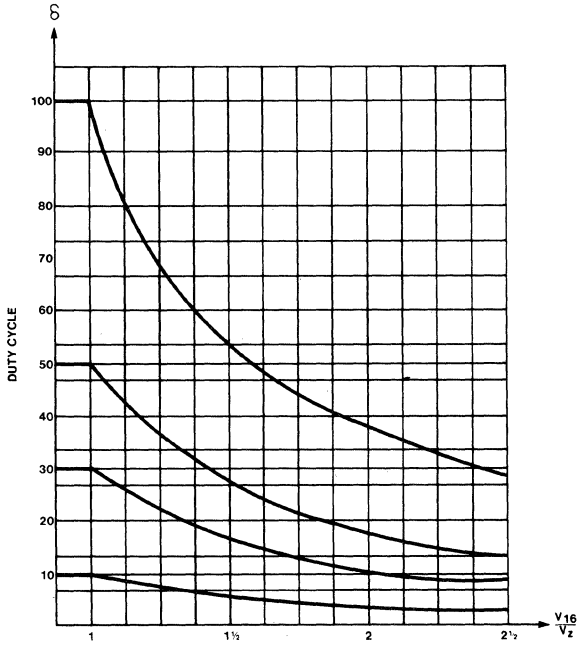

SG1524/SG2524/SG3524-F,N

DESCRIPTION

This monolithic integrated circuit contains all the control circuitry for a regulating power supply inverter or switching regulator. Included in a 16-pin dual-in-line package is the voltage reference, error-amplifier, oscillator, pulse width modulator, pulse steering flip-flop, dual alternating output switches and current limiting and shut-down circuitry. This device can be used for switching regulators of either polarity, transformer coupled DC to DC converters, transformerless voltage doublers and polarity converters, as well as other power control applications. The SG1524 is specified for operation over the full military temperature range of −55°C to +125°C, while the SG2524 and SG3524 are designed for commercial applications of 0°C to +70°C.

FEATURES

- **Complete PWM power control circuitry**
- **Single ended or push-pull outputs**
- **Line and load regulation of 0.2%**
- **1% maximum temperature variation**
- **Total supply current is less than 10mA**
- **Operation beyond 100kHz**

PIN CONFIGURATION

CONNECTION DIAGRAM
F,N PACKAGE

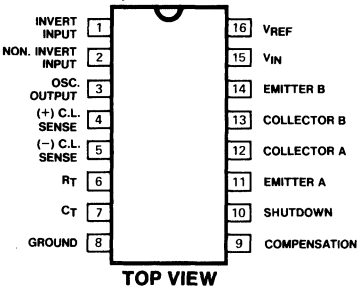

TOP VIEW
ORDER PART NO.
SG1524F, SG2524F
SG2524N, SG3524F
SG3524N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Input voltage	40	V
Output current (each output)	100	mA
Reference output current	50	mA
Oscillator charging current	5	mA
Power dissipation		
Package limitation	1000	mW
Derate above 25°C	8	mW/°C
Operating temperature range		
SG1524	−55 to +125	°C
SG2524/SG3524	0 to +70	°C
Storage temperature range	−65 to +150	°C

BLOCK DIAGRAM

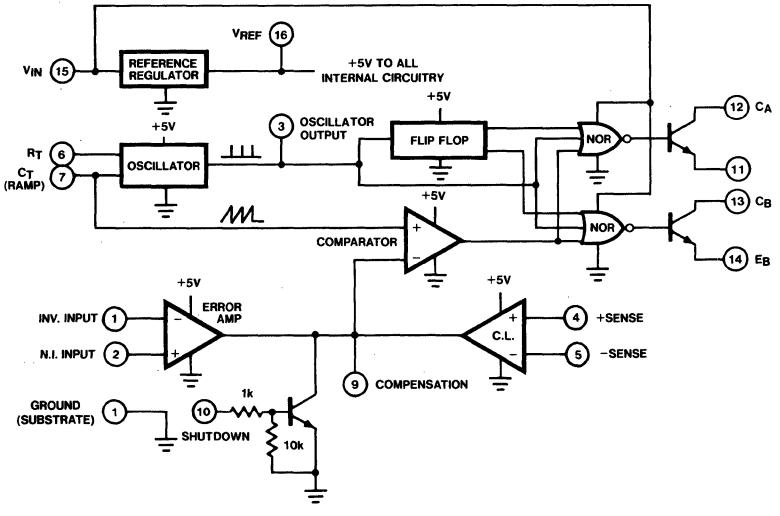

DC ELECTRICAL CHARACTERISTICS

(Unless otherwise stated, these specifications apply for T_A = −55°C to +125°C for the SG1524 and 0°C to +70°C for the SG2524 and SG3524, V_{IN} = 20V, and f = 20kHz)

PARAMETER	TEST CONDITIONS	SG1524 SG2524			SG3524			UNIT
		Min	Typ	Max	Min	Typ	Max	
REFERENCE SECTION								
Output voltage		4.8	5.0	5.2	4.6	5.0	5.4	V
Line regulation	V_{IN} = 8 to 40V		10	20		10	30	mV
Load regulation	I_L = 0 to 20mA		20	50		20	50	mV
Ripple rejection	f = 120Hz, T_A = 25°C		66			66		dB
Short circuit current limit	V_{REF} = 0, T_A = 25°C		100			100		mA
Temperature stability	Over operating temperature range		0.3	1		0.3	1	%
Long term stability	T_A = 25°C		20			20		mV/kHr
OSCILLATOR SECTION								
Maximum frequency	C_T = .001 mfd, R_T = 2kΩ		300			300		kHz
Initial accuracy	R_T and C_T constant		5			5		%
Voltage stability	V_{IN} = 8 to 40V, T_A = 25°C			1			1	%
Temperature stability	Over operating temperature range						2	%
Output amplitude	Pin 3, T_A = 25°C		3.5			3.5		V_P
Output pulse width	C_T = .01 mfd, T_A = 25°C		0.5			0.5		μs
ERROR AMPLIFIER SECTION								
Input offset voltage	V_{CM} = 2.5V		0.5	5		2	10	mV
Input bias current	V_{CM} = 2.5V		2	10		2	10	μA
Open loop voltage gain		72	80		60	80		dB
Common mode voltage	T_A = 25°C	1.8		3.4	1.8		3.4	V
Common mode rejection ratio	T_A = 25°C		70			70		dB
Small signal bandwidth	A_V = 0dB, T_A = 25°C		3			3		MHz
Output voltage	T_A = 25°C	0.5		3.8	0.5		3.8	V
COMPARATOR SECTION								
Duty cycle	% each output "ON"	0		45	0		45	%
Input threshold	Zero duty cycle		1			1		V
Input threshold	Maximum duty cycle		3.5			3.5		V
Input bias current			1			1		μA
CURRENT LIMITING SECTION								
Sense voltage	Pin 9 = 2V with error amplifier set for maximum out, T_A = 25°C	190	200	210	180	200	220	mV
Sense voltage T.C.			0.2			0.2		mV/°C
Common mode voltage		−1		+1	−1		+1	V
OUTPUT SECTION (each output)								
Collector-emitter voltage (breakdown)		40			40			V
Collector-leakage current	V_{CE} = 40V		0.1	50		0.1	50	μA
Saturation voltage	I_C = 50mA		1	2		1	2	V
Emitter output voltage	V_{IN} = 20V	17	18		17	18		V

DC ELECTRICAL CHARACTERISTICS (Cont'd) (Unless otherwise stated, these specifications apply for T_A = −55°C to +125°C for the SG1524 and 0°C to +70°C for the SG2524 and SG3524, V_{IN} = 20V, and f = 20kHz)

PARAMETER	TEST CONDITIONS	SG1524 SG2524			SG3524			UNIT
		Min	Typ	Max	Min	Typ	Max	
Rise time	R_C = 2K ohm, T_A = 25°C		0.2			0.2		μs
Fall time	R_C = 2K ohm, T_A = 25°C		0.1			0.1		μs
TOTAL STANDBY CURRENT (excluding oscillator charging current, error and current limit dividers, and with outputs open)	V_{IN} = 40V		8	10		8	10	mA

OPEN LOOP TEST CIRCUIT

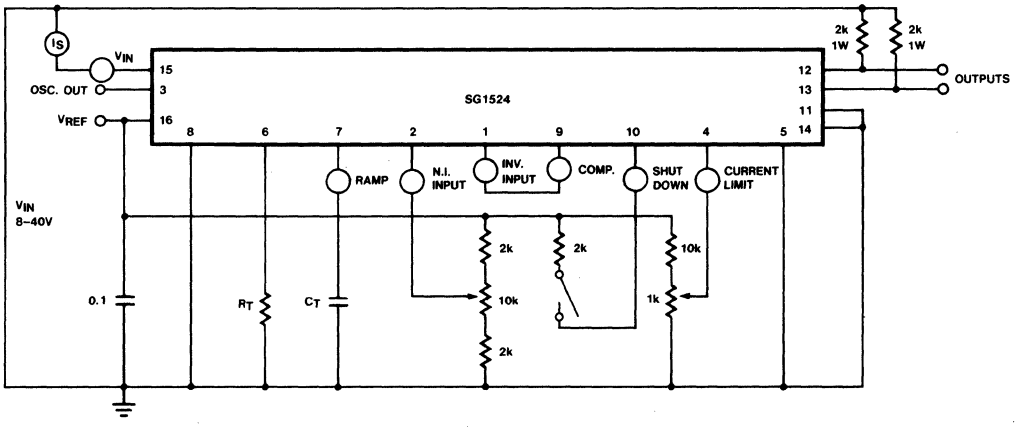

APPLICATIONS

Voltage Reference

An internal series regulator provides a nominal 5 volt output which is used both to generate a reference voltage and is the regulated source for all the internal timing and controlling circuitry. This regulator may be bypassed for operation from a fixed 5 volt supply by connecting pins 15 and 16 together to the input voltage. In this configuration, the maximum input voltage is 6.0 volts.

This reference regulator may be used as a 5 volt source for other circuitry. It will provide up to 50mA of current itself and can easily be expanded to higher currents with an external PNP as shown in Figure 1.

Oscillator

The oscillator in the SG1524 uses an external resistor (R_T) to establish a constant charging current into an external capacitor (C_T). While this uses more current than a series connected RC, it provides a linear ramp voltage on the capacitor which is also used as a reference for the comparator. The charging current is equal to 3.6V ÷ R_T and should be kept within the range of approximately 30μA to 2mA, i.e., 1.8K<R_T<100K.

The range of values for C_T also has limits as the discharge time of C_T determines the pulse width of the oscillator output pulse. This pulse is used (among other things) as a blanking pulse to both outputs to insure that there is no possibility of having both outputs on simultaneously during transitions. This output dead time relationship is shown in Figure 2. A pulse width below approximately 0.5 microseconds may allow false triggering of one output by removing the blanking pulse prior to the flip-flops reaching a stable state. If small values of C_T must be used, the pulse width may still be expanded by adding a shunt capacitance (≈100pF) to ground at the oscillator output. (Note: Although the oscillator output is a convenient oscilloscope sync input, the cable and input capacitance may increase the blanking pulse width slightly.) Obviously, the upper limit to the pulse width is determined by the maximum duty cycle acceptable. Practical values of C_T fall between .001 and 0.1 microfarad.

The oscillator period is approximately t = R_TC_T where t is in microseconds when R_T = ohms and C_T = microfarads. The use of Figure 3 will allow selection of R_T and C_T for a wide range of operating frequencies. Note that for series regulator applications, the two outputs can be connected in parallel for an effective 0-90% duty cycle and the frequency of the oscillator is the frequency of the output. For push-pull applications, the outputs are separated and the flip-flop divides the frequency such that each outputs duty cycle is 0-45% and the overall frequency is one-half that of the oscillator.

External Synchronization

If it is desired to synchronize the SG1524 to an external clock, a pulse of ≈+3 volts may be applied to the oscillator output terminal with R_TC_T set slightly greater than the clock period. The same considerations of pulse width apply. The impedance to ground at this point is approximately 2K ohms.

If two or more SG1524's must be synchronized together, one must be designated as master with its R_TC_T set for the correct peri-

TYPICAL APPLICATION

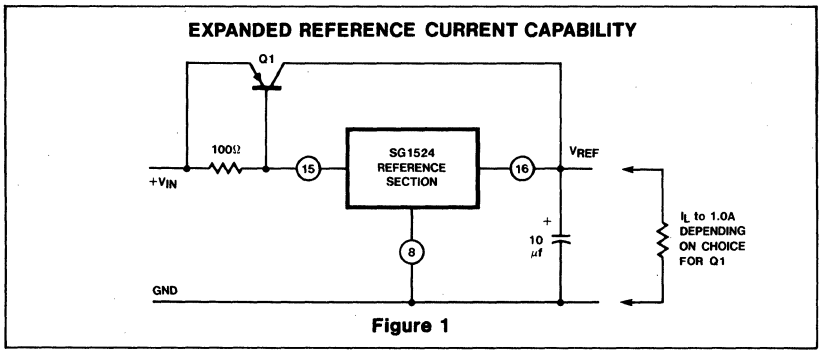

Figure 1

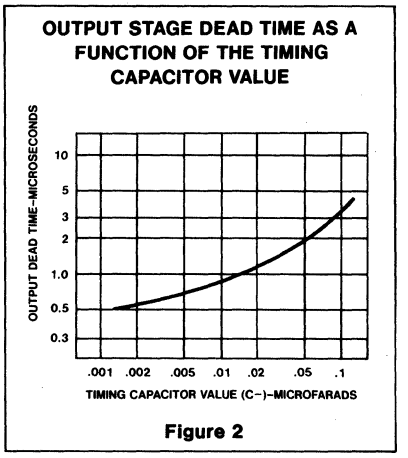

Figure 2

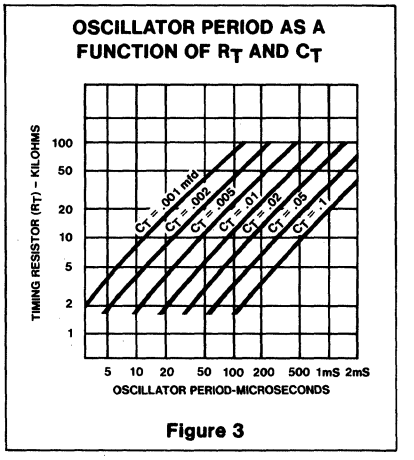

Figure 3

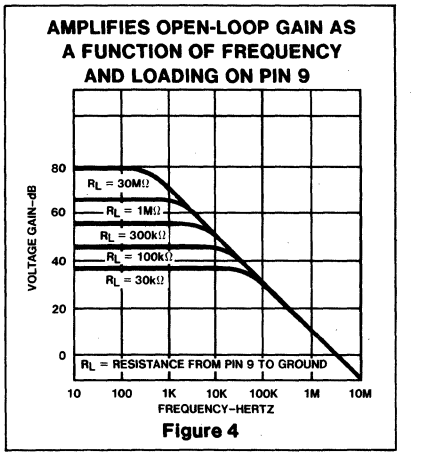

Figure 4

od. The slaves should each have an R_TC_T set for approximately 10% longer period than the master with the added requirement that C_T (slave) = one-half C_T (master). Then connecting Pin 3 on all units together will insure that the master output pulse—which occurs first and has a wider pulse width—will reset the slave units.

Error Amplifier

This circuit is a simple differential-input, transconductance amplifier. The output is the compensation terminal, pin 9, which is a high impedance node ($R_L \approx 5M\Omega$). The gain is

$$A_V = gmR_L = \frac{8\, I_C\, R_L}{2kT} \approx .002\, R_L$$

and can easily be reduced from a nominal of 10,000 by an external shunt resistance from pin 9 to ground, as shown in Figure 4.

In addition to DC gain control, the compensation terminal is also the place for AC phase compensation. The frequency response curves of Figure 4 show the uncompensated amplifier with a single pole at approximately 200Hz and a unity gain cross-over at 5MHz.

Typically, most output filter designs will introduce one or more additional poles at a significantly lower frequency. Therefore, the best stabilizing network is a series R-C combination between pin 9 and ground which introduces a zero to cancel one of the output filter poles. A good starting point is 50kΩ plus .001 microfarad.

One final point on the compensation terminal is that this is also a convenient place to insert any programming signal which is to override the error amplifier. Internal shutdown and current limit circuits are connected here, but any other circuit which can sink 200μA can pull this point to ground thus shutting off both outputs.

While feedback is normally applied around the entire regulator, the error amplifier can be used with conventional operational amplifier feedback and is stable in either the inverting or non-inverting mode. Regardless of the connections, however, input common-mode limits must be observed or output signal inversions may result. For conventional regulator applications, the 5 volt reference voltage must be divided down as shown in Figure 5. The error amplifier may also be used in fixed duty cycle applications by using the unity gain configuration shown in the open loop test circuit.

Current Limiting

The current limiting circuitry of the SG1524 is shown in Figure 6.

By matching the base-emitter voltages of Q1 and Q2, and assuming negligible voltage drop across R_1,

$$\text{Threshold} = V_{BE}(Q1) + I_1R_2 - V_{BE}(Q2)$$
$$= I_1R_2 \approx 200mV$$

Although this circuit provides a relatively small threshold with a negligible temperature coefficient, there are some limitations to its use, the most important of which is the ± 1 volt common mode range which requires sensing in the ground line. Another factor to consider is that the frequency compensation provided by R_1C_1 and Q1 provides a roll-off pole at approximately 300Hz.

Since the gain of this circuit is relatively low, there is a transition region as the current limit amplifier takes over pulse width control from the error amplifier. For testing purposes, threshold is defined as the input voltage to get 25% duty cycle with the error amplifier signaling maximum duty cycle.

In addition to constant current limiting, pins 4 and 5 may also be used in transformer-coupled circuits to sense primary current and shorten an output pulse, should transformer

saturation occur. (Refer to Figure 14). Another application is to ground pin 5 and use pin 4 as an additional shutdown terminal: i.e., the output will be off with pin 4 open and on when it is grounded. Finally, foldback current limiting can be provided with the network of Figure 7. This circuit can reduce the short-circuit current (I_{SC}) to approximately one-third the maximum available output current (I_{MAX}).

Output Circuits

The outputs of the SG1524 are two identical NPN transistors with both collectors and emitters uncommitted. This circuitry is very similar to that used in the SG111 comparator in that each output transistor has antisaturation circuitry for fast response, and current limiting set for a maximum output current of approximately 100mA. The availability of both collectors and emitters allows maximum versatility to enable driving either NPN or PNP external transistors.

In considering the application of the SG1524 to voltage regulator circuitry, there are a multitude of output configurations possible. In general, however, they fall into three basic classifications:

1. Capacitor-diode coupled voltage multipliers
2. Inductor-capacitor single-ended circuits
3. Transformer-coupled circuits

Examples of each category are shown in Figures 8, 9 and 10. In each case, the switches indicated can be either the output transistors in the SG1524 or added external transistors according to the load current requirements.

ERROR AMPLIFIER BIASING CIRCUITS

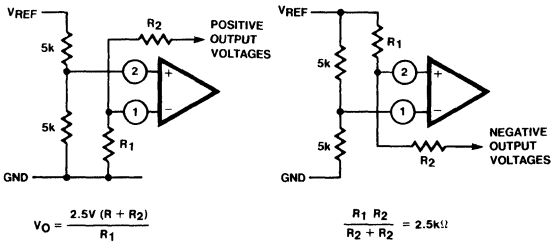

$V_O = \frac{2.5V\ (R + R_2)}{R_1}$ $\qquad \frac{R_1\ R_2}{R_2 + R_2} = 2.5k\Omega$

Note change in input connections for opposite polarity outputs.

Figure 5

CURRENT LIMITING CIRCUITRY OF THE SG 1524

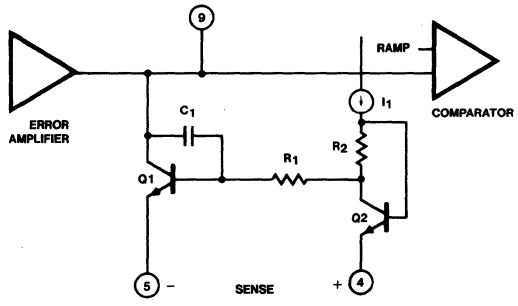

Figure 6

FOLDBACK CURRENT LIMITING

$I_{MAX} = \frac{1}{R_S}\left(V_{TH} + \frac{V_O\ R_2}{R_1 + R_2}\right)$

$I_{SC} = \frac{V_{TH}}{R_S}$ WHERE

$V_{TH} = 200\ mV$

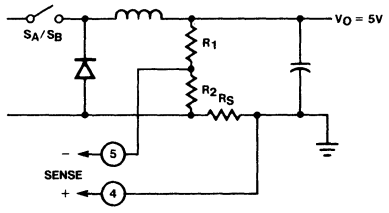

Foldback current limiting can be used to reduce power dissipation under shorted output conditions.

Figure 7

CAPACITOR-DIODE COUPLED VOLTAGE MULTIPLIER OUTPUT STAGES

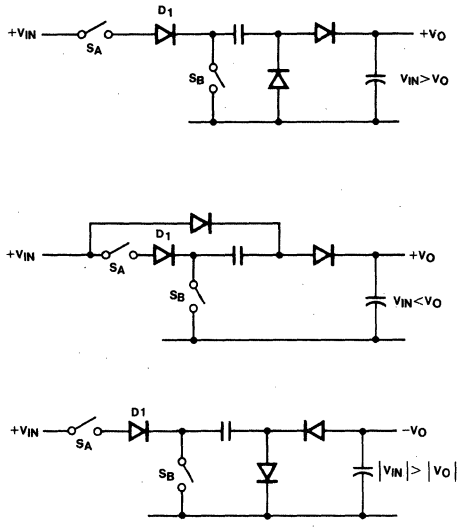

Note: Diode D1 is necessary to prevent reverse emitter-base breakdown to transistor switch S_A.

Figure 8

SINGLE-ENDED INDUCTOR CIRCUITS

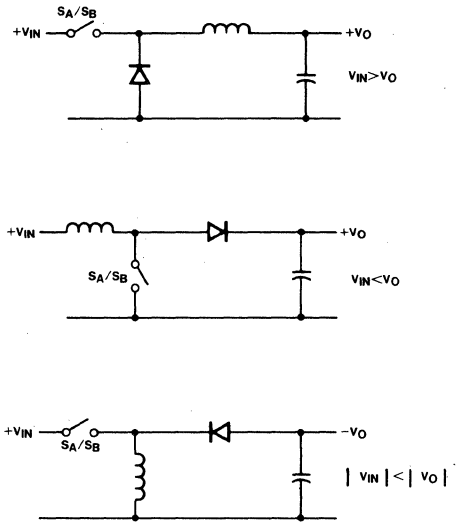

Single-ended inductor circuits where the two outputs of the SG1524 are connected in parallel.

Figure 9

TRANSFORMER-COUPLED OUTPUTS

Transformer-coupled outputs need not relate to the input in either amplitude or polarity.

Figure 10

TYPICAL APPLICATION

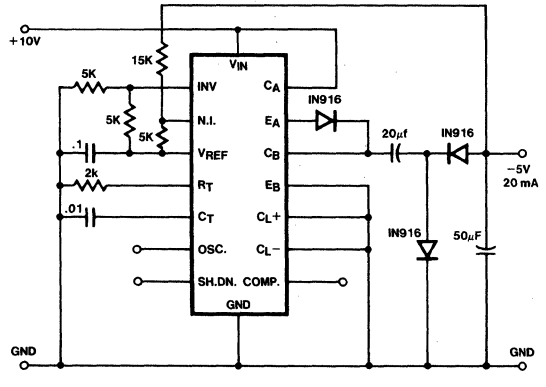

The capacitor-diode output circuit is used here as a polarity converter to generate a −5 volt supply from +15 volts. This circuit is useful for an output current of up to 20mA with no additional boost transistors required. Since the output transistors are current limited, no additional protection is necessary. Also, the lack of an inductor allows the circuit to be stabilized with only the output capacitor.

Figure 11

TYPICAL APPLICATION

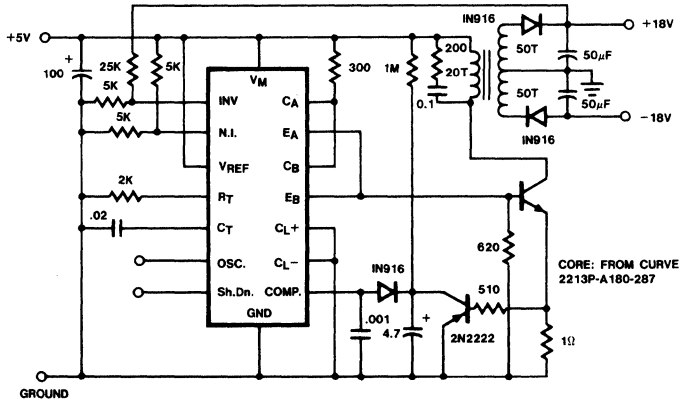

Another low-current supply is the flyback converter used here to generate ±15 volts at 20mA from a +5 volt regulated line. The reference generator in the SG1524 is unused with the input voltage providing the reference. Current limiting in a flyback converter is difficult and is accomplished here by sensing current in the primary line and resetting a soft-start circuit.

Figure 12

TYPICAL APPLICATION

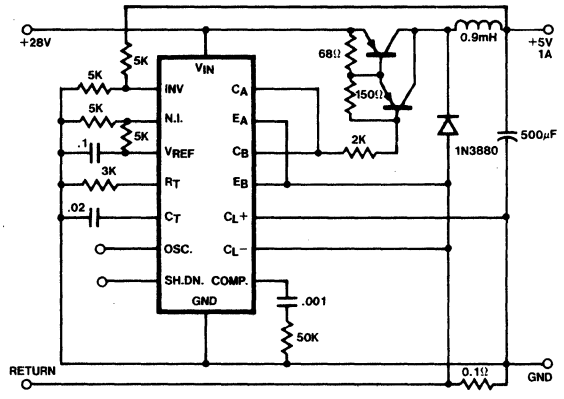

In this conventional single-ended regulator circuit, the two outputs of the SG1524 are connected in parallel for effective .0-90% duty-cycle modulation. The use of an output inductor requires an R-C phase compensation network for loop stability.

Figure 13

TYPICAL APPLICATION

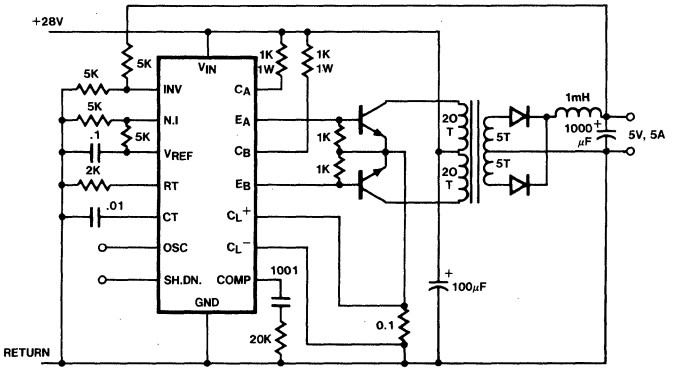

Push-pull outputs are used in this transformer-coupled DC-DC regulating converter. Note that the oscillator must be set at twice the desired output frequency as the SG1524's internal flip-flop divides the frequency by 2 as it switches the P.W.M. signal from one output to the other. Current limiting is done here in the primary so that the pulse width will be reduced should transformer saturation occur.

Figure 14

μA723/723C-F,H,N
SA723C-N
μA723C-D

3

DESCRIPTION

The μA723/SA723C is a Monolithic Precision Voltage Regulator capable of operation in positive or negative supplies as a series, shunt, switching or floating regulator. The 723 contains a temperature compensated reference amplifier, error amplifier, series pass transistor, and current limiter, with access to remote shutdown.

FEATURES

- **Positive or negative supply operation**
- **Series, shunt, switching or floating operation**
- **.01% line and load regulation**
- **Output voltage adjustable from 2 to 37 volts**
- **Output current to 150mA without external pass transistor**
- **μA723 MIL STD 88 3A, B, C available**

PIN CONFIGURATIONS

D,F,N PACKAGE

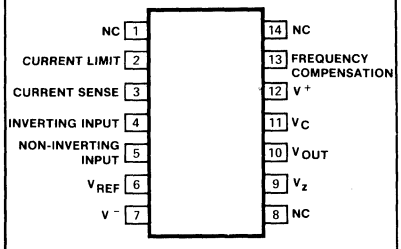

ORDER PART NO.
μA723F,N
μA723CF,CN
SA723CN
μA723CD

H PACKAGE*

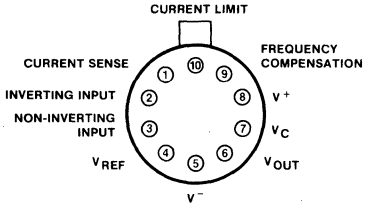

ORDER PART NO.
μA723H
μA723CH
*Metal cans (H) not recommended for new designs

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Pulse voltage from V+ to V- (50 ms)	50	V
Continous voltage from V+ to V-	40	V
Input-output voltage differential	40	V
Maximum output current	150	mA
Current from V_{REF}	15	mA
Current from V_Z	25	mA
Internal power dissipation[1]	800	mw
Operating temperature range		
μA723	-55 to +125	°C
μA723C	0 to 70	°C
SA723C	-40 to +85	°C
Storage temperature range	-65 to +150	°C
Lead temperature	300	°C

EQUIVALENT CIRCUIT

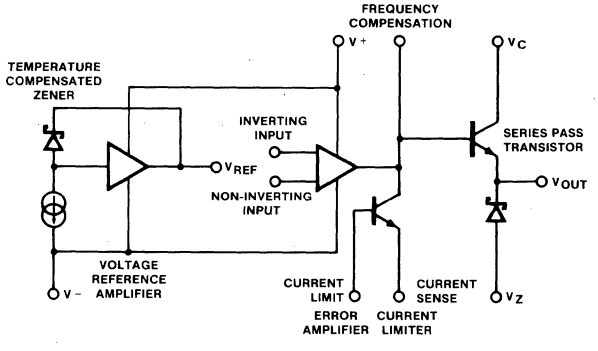

μA723/723C-F,H,N
SA723C-N
μA723C-D

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.[1]

PARAMETER	TEST CONDITIONS	μA723			μA723C/SA723C			UNIT
		Min	Typ	Max	Min	Typ	Max	
Line regulation[2]	V_{IN} = 12V to V_{IN} = 15V V_{IN} = 12V to V_{IN} = 40V		0.01 0.02	0.1 0.2		0.01 0.1	0.1 0.5	%V_{OUT} %V_{OUT}
Load regulation[2]	I_L = 1mA to I_L = 50mA f = 50Hz to 10kHz, C_{REF} = 0 f = 50Hz to 10kHz, C_{REF} = 5μF		0.03 74 86	0.15		0.03 74 86	0.2	%V_{OUT} dB dB
Short circuit current limit	R_{SC} = 10Ω, V_{OUT} = 0		65			65		mA
Reference voltage		6.95	7.15	7.35	6.80	7.15	7.50	V
Output noise voltage	BW = 100Hz to 10kHz, C_{REF} = 0 BW = 100Hz to 10kHz, C_{REF} = 5μF		20 2.5			20 2.5		μVrms μVrms
Long term stability			0.1			0.1	0.1	%/1000hrs.
Standby current drain	I_L = 0, V_{IN} = 30V		2.3	3.5		2.3	4.0	mA
Input voltage range		9.5		40	9.5		40	V
Output voltage range		2.0		37	2.0		37	V
Input-output voltage differential		3.0		38	3.0		38	V
The following specifications apply over the operating temperature ranges Line regulation				0.3			0.3	%V_{OUT}
Load regulation				0.6			0.6	%V_{OUT}
Average temperature coefficient of output voltage	V_{IN} = 12V to V_{IN} = 15V I_L = 1mA to I_L = 50mA		0.002	0.015		0.003	0.015	%/°C

NOTES

1. $V_{IN} = V+ = V_C = 12V$, $V- = 0V$, $V_{OUT} = 5V$, $I_L = 1mA$, $R_{SC} = 0$, $C_1 = 100pF$, $C_{REF} = 0$ and divider impedance as seen by error amplifier ≤ 10kΩ when connected as shown in Figure 3.
2. The load and line regulation specifications are for constant junction temperature. Temperature drift effects must be taken into account separately when the unit is operating under conditions of high dissipation.

TYPICAL PERFORMANCE CHARACTERISTICS

STANDBY CURRENT DRAIN AS A FUNCTION OF INPUT VOLTAGE

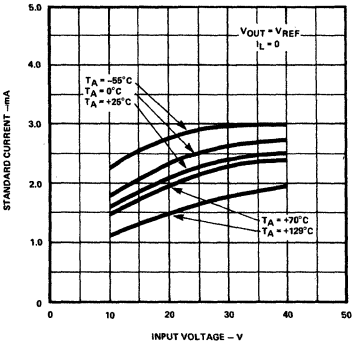

MAXIMUM LOAD CURRENT AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

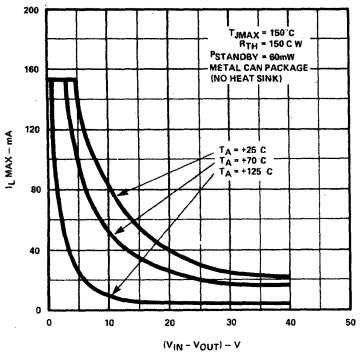

LOAD REGULATION CHARACTERISTICS WITH CURRENT LIMITING

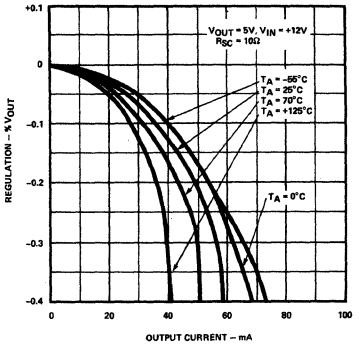

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

CURRENT LIMITING CHARACTERISTICS AS A FUNCTION OF JUNCTION TEMPERATURE

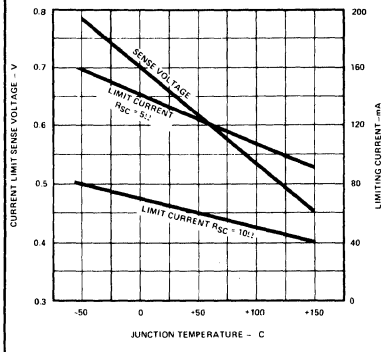

MAXIMUM LOAD CURRENT AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

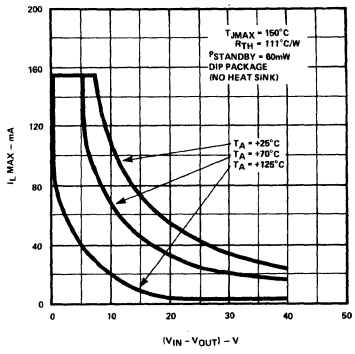

LOAD REGULATION CHARACTERISTICS WITHOUT CURRENT LIMITING

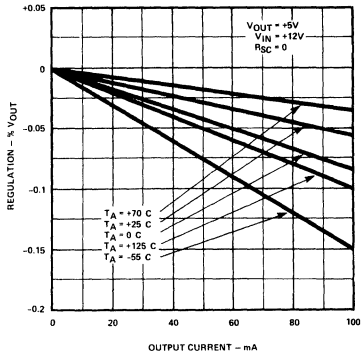

LOAD TRANSIENT RESPONSE

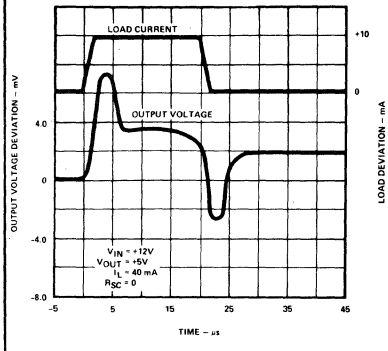

LINE REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

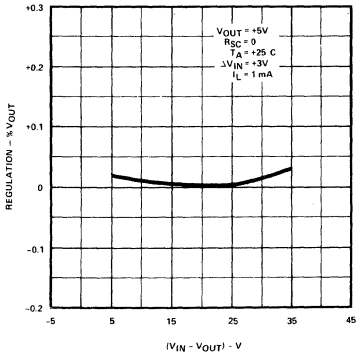

OUTPUT IMPEDANCE AS A FUNCTION OF FREQUENCY

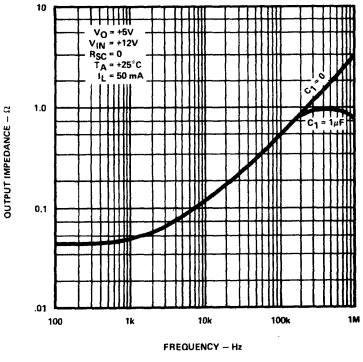

LINE TRANSIENT RESPONSE

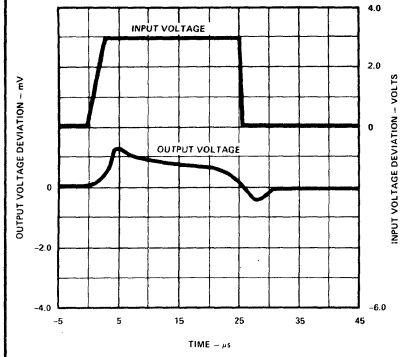

LOAD REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

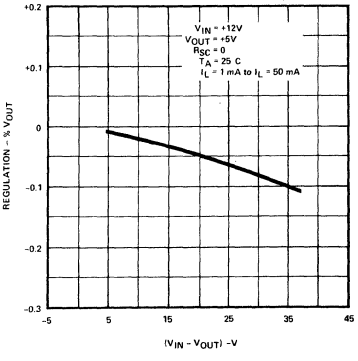

CURRENT LIMITING CHARACTERISTICS

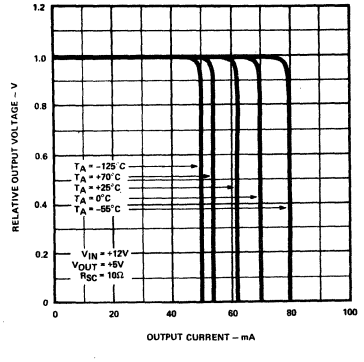

μA723/723C-F,H,N
SA723C-N
μA723C-D

TYPICAL APPLICATIONS

LOW VOLTAGE REGULATOR (VOUT = 2 TO 7 VOLTS)

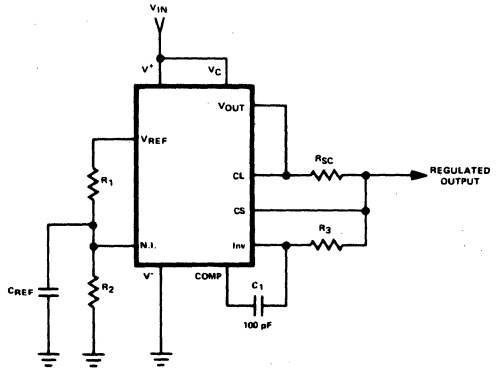

$$V_{out} = \left[V_{REF} \times \frac{R_2}{R_1 + R_2} \right]$$

$$R_3 = \frac{R_1 \; R_2}{R_1 + R_2} \quad \text{for minimum temperature drift}$$

NEGATIVE VOLTAGE REGULATOR

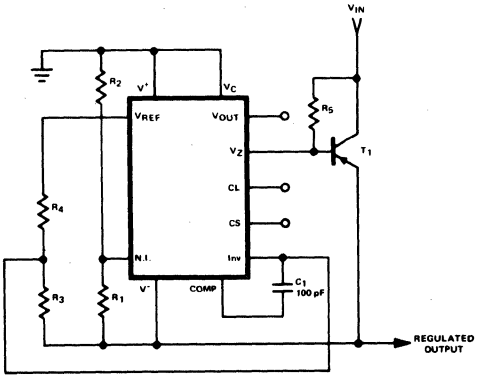

$$V_{out} = \left[\frac{V_{REF}}{2} \times \frac{R_1 + R_2}{R_1} \right]; \; R_3 = R_4$$

REMOTE SHUTDOWN REGULATOR WITH CURRENT LIMITING (VOUT = 2 TO 7 VOLTS)

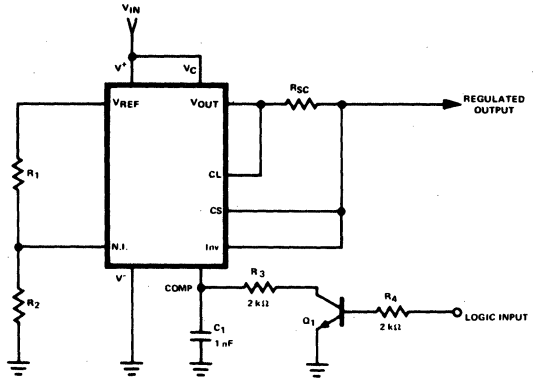

$$V_{out} = \left[V_{REF} \times \frac{R_2}{R_1 + R_2} \right]$$

HIGH VOLTAGE REGULATOR (VOUT = 7 TO 37 VOLTS)

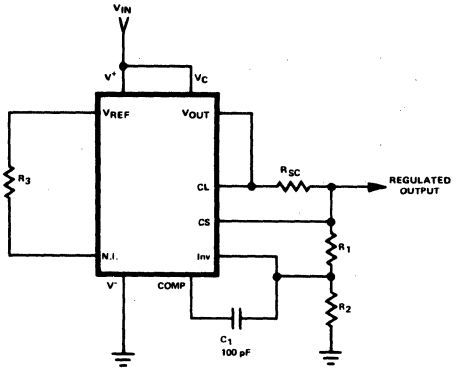

$$V_{out} = \left[V_{REF} \times \frac{R_1 + 2}{R_2} \right]$$

$$R_3 = \frac{R_1 \; R_2}{R_1 + R_2} \quad \text{for minimum temperature drift}$$

R_3 may be eliminated for minimum component count

TYPICAL APPLICATIONS (Cont'd)

FOLDBACK CURRENT LIMITING REGULATOR
(V_{OUT} = 2 TO 7 VOLTS)

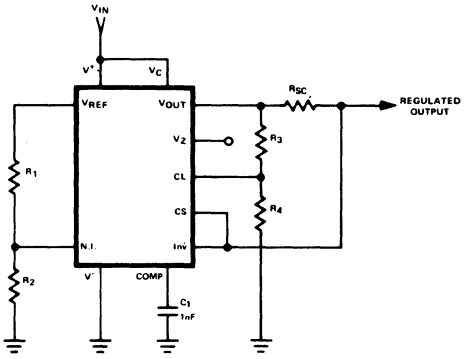

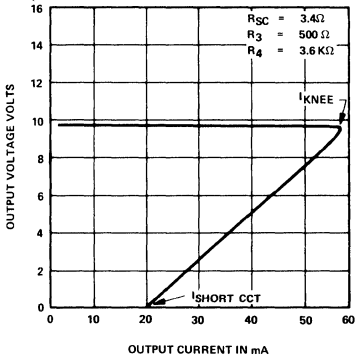

$$I_{KNEE} = \left[\frac{V_{out}\,R_3}{R_{SC}\,R_4} + \frac{V_{SENSE}\,(R_3 + R_4)}{R_{SC}\,R_4}\right]$$

$$V_{out} = \left[V_{REF} \times \frac{R_1 + R_2}{R_2}\right]$$

$$I_{SHORT\ CKT} = \left[\frac{V_{SENSE}}{R_{SC}} \times \frac{R_3 + R_4}{R_4}\right]$$

$$\frac{R_4}{R_3} = \frac{V_{OUT}\,I_{SC}}{V_{SENSE}\,(I_{KNEE} - I_{SHORTCKT})} - 1$$

$$R_{SC} = \frac{V_{SENSE}}{I_{SC}}\left[1 + \frac{R_3}{R_4}\right]$$

SECTION 4
TIMERS

Section 4—TIMERS

NE/SE555/SE555C	Timer	177
NE/SA/SE556	Dual Timer	180
NE/SA/SE556-1/SE556-1C	Dual Timer	183
NE/SA/SE558	Quad Timer	186

NE/SE555/SE555C-F,H,N,FE

DESCRIPTION

The 555 monolithic timing circuit is a highly stable controller capable of producing accurate time delays, or oscillation. In the time delay mode of operation, the time is precisely controlled by one external resistor and capacitor. For a stable operation as an oscillator, the free running frequency and the duty cycle are both accurately controlled with two external resistors and one capacitor. The circuit may be triggered and reset on falling waveforms, and the output structure can source or sink up to 200mA.

FEATURES

- **Turn off time less than 2μs**
- **Maximum operating frequency greater than 500kHz**
- **Timing from microseconds to hours**
- **Operates in both astable and monostable modes**
- **High output current**
- **Adjustable duty cycle**

PIN CONFIGURATIONS

N, FE PACKAGE

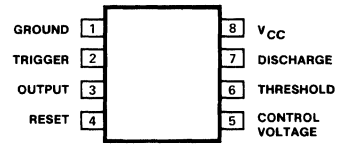

ORDER PART NO.
NE/SE555N,FE
SE555CN,CFE

- **TTL compatible**
- **Temperature stability of 0.005% per °C**

APPLICATIONS

- **Precision timing**
- **Pulse generation**
- **Sequential timing**
- **Time delay generation**
- **Pulse width modulation**
- **Pulse position modulation**
- **Missing pulse detector**

F PACKAGE



ORDER PART NO.
NE/SE555F
SE555CF

H PACKAGE*



ORDER PART NO.
NE/SE555H
SE555CH

*Metal cans (H) not recommended for new designs

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
SE555	+18	V
NE555, SE555C,	+16	V
Power dissipation	600	mW
Operating temperature range		
NE555	0 to +70	°C
SE555, SE555C	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60sec)	300	°C

EQUIVALENT SCHEMATIC

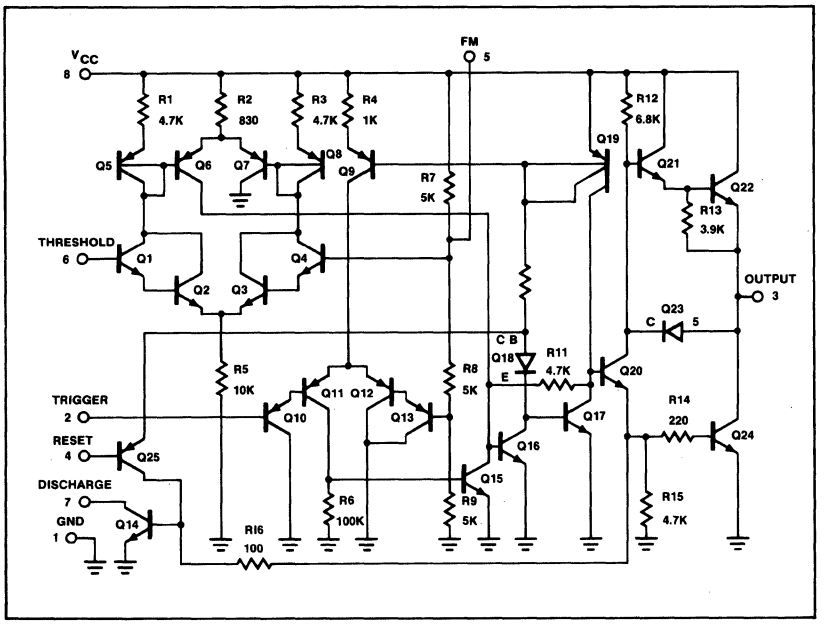

BLOCK DIAGRAM

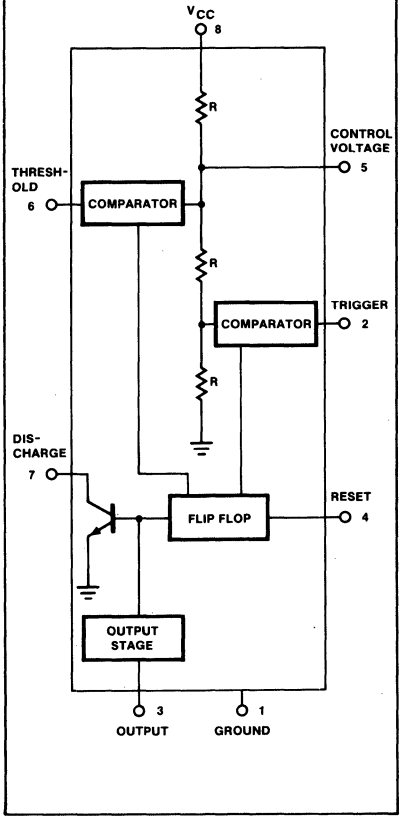

DC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = +5V$ to $+15$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE555			NE555/SE555C			UNIT
		Min	Typ	Max	Min	Typ	Max	
Supply voltage		4.5		18	4.5		16	V
Supply current (low state)[1]	$V_{CC} = 5V$ $R_L = \infty$		3	5		3	6	mA
	$V_{CC} = 15V$ $R_L = \infty$		10	12		10	15	mA
Timing error (monostable)	$R_A = 2K\Omega$ to $100K\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		0.5	2.0		1.0	3.0	%
Drift with temperature			30	100		50		ppm/°C
Drift with supply voltage			0.05	0.2		0.1	0.5	%/V
Timing error (astable)	R_A, $R_B = 1k\Omega$ to $100k\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		1.5			2.25		%
Drift with temperature	$V_{CC} = 15V$		90			150		ppm/°C
Drift with supply voltage			0.15			0.3		%/V
Control voltage level	$V_{CC} = 15V$	9.6	10.0	10.4	9.0	10.0	11.0	V
	$V_{CC} = 5V$	2.9	3.33	3.8	2.6	3.33	4.0	V
Threshold voltage	$V_{CC} = 15V$	9.4	10.0	10.6	8.8	10.0	11.2	V
	$V_{CC} = 5V$	2.7	3.33	4.0	2.4	3.33	4.2	V
Threshold current[3]			0.1	0.25		0.1	0.25	μA
Trigger voltage	$V_{CC} = 15V$	4.8	5.0	5.2	4.5	5.0	5.6	V
	$V_{CC} = 5V$	1.45	1.67	1.9	1.1	1.67	2.2	V
Trigger current	$V_{TRIG} = 0V$		0.5	0.9		0.5	2.0	μA
Reset voltage[4]		0.4	0.7	1.0	0.4	0.7	1.0	V
Reset current			0.1	0.4		0.1	0.4	mA
Reset current	$V_{RESET} = 0V$		0.4	1.0		0.4	1.5	mA
Output voltage (low)	$V_{CC} = 15V$							
	$I_{SINK} = 10mA$		0.1	0.15		0.1	0.25	V
	$I_{SINK} = 50mA$		0.4	0.5		0.4	0.75	V
	$I_{SINK} = 100mA$		2.0	2.2		2.0	2.5	V
	$I_{SINK} = 200mA$		2.5			2.5		V
	$V_{CC} = 5V$							
	$I_{SINK} = 8mA$		0.1	0.25		0.3	0.4	V
	$I_{SINK} = 5mA$		0.05	0.2		0.25	0.35	V
Output voltage (high)	$V_{CC} = 15V$							
	$I_{SOURCE} = 200mA$		12.5			12.5		V
	$I_{SOURCE} = 100mA$	13.0	13.3		12.75	13.3		V
	$V_{CC} = 5V$							
	$I_{SOURCE} = 100mA$	3.0	3.3		2.75	3.3		V
Turn off time[5]	$V_{RESET} = V_{CC}$		0.5	2.0		0.5		μs
Rise time of output			100	200		100	300	ns
Fall time of output			100	200		100	300	ns
Discharge leakage current			20	100		20	100	na

NOTES

1. Supply current when output high typically 1mA less.
2. Tested at $V_{CC} = 5V$ and $V_{CC} = 15V$.
3. This will determine the maximum value of $R_A + R_B$, for 15V operation, the max total R = 10 megohm, and for 5V operation, the max total R = 3.4 megohm.
4. Specified with trigger input high.
5. Time measured from a positive going input pulse from 0 to 0.8 x V_{CC} into the threshold to the drop from high to low of the output. Trigger is tied to threshold.

TYPICAL PERFORMANCE CHARACTERISTICS

MINIMUM PULSE WIDTH REQUIRED FOR TRIGGERING

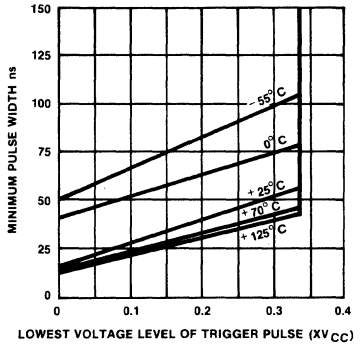

SUPPLY CURRENT vs SUPPLY VOLTAGE

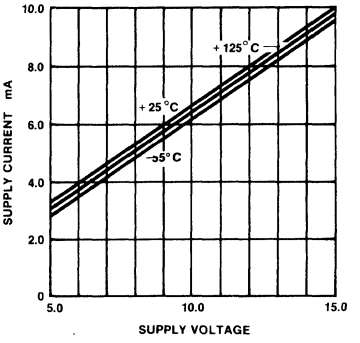

DELAY TIME vs TEMPERATURE

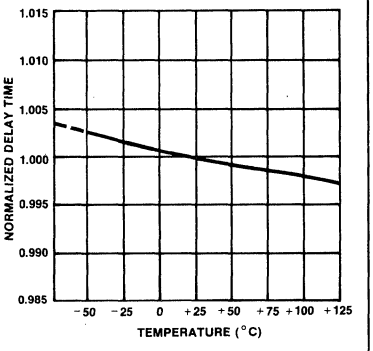

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

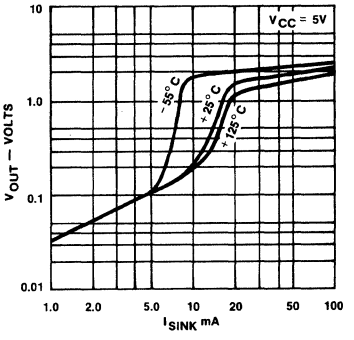

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

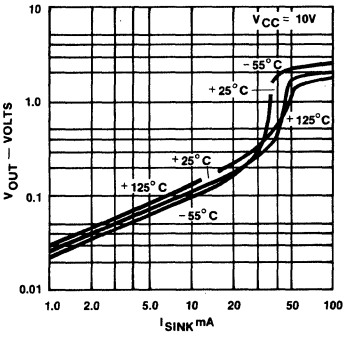

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

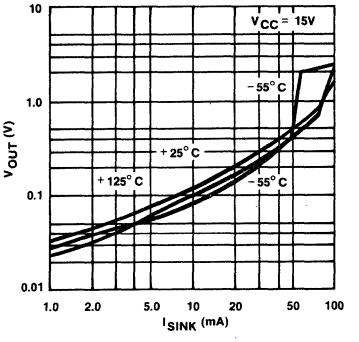

HIGH OUTPUT VOLTAGE DROP vs OUTPUT SOURCE CURRENT

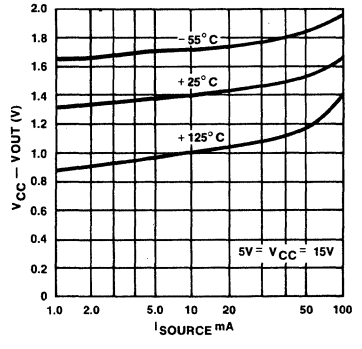

DELAY TIME vs SUPPLY VOLTAGE

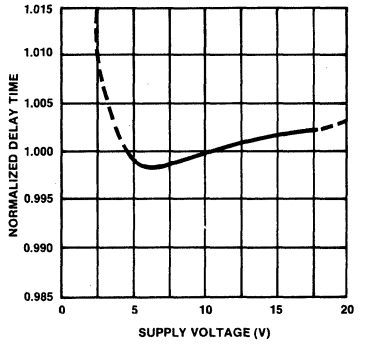

PROPAGATION DELAY vs VOLTAGE LEVEL OF TRIGGER PULSE

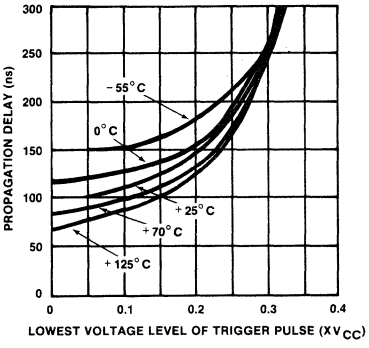

NE/SE556-F,N • SA556-N
SE556C-N

DESCRIPTION

The 556 Dual Monolithic timing circuit is a highly stable controller capable of producing accurate time delays or oscillation. The 556 is a dual 555. Timing is provided by an external resistor and capacitor for each timing function. The two timers operate independently of each other sharing only V_{CC} and ground. The circuits may be triggered and reset on falling waveforms. The output structures may sink or source 200mA.

APPLICATIONS

- **Precision timing**
- **Sequential timing**
- **Pulse shaping**
- **Pulse generator**
- **Missing pulse detector**
- **Tone burst generator**
- **Pulse width modulation**
- **Time delay generator**
- **Frequency division**
- **Industrial controls**
- **Pulse position modulation**
- **Appliance timing**
- **Traffic light control**
- **Touch tone encoder**

FEATURES

- **Timing from microseconds to hours**
- **Replaces two 555 timers**
- **Operates in both astable and monostable modes**
- **High output current**
- **Adjustable duty cycle**
- **TTL compatible**
- **Temperature stability of 0.005% per °C**
- **SE566 MIL STD 883A, B, C available, N38510 (JAN planned, 38510 processing available).**

PIN CONFIGURATION

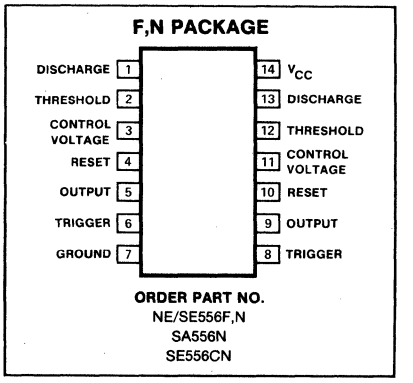

ORDER PART NO.
NE/SE556F,N
SA556N
SE556CN

BLOCK DIAGRAM

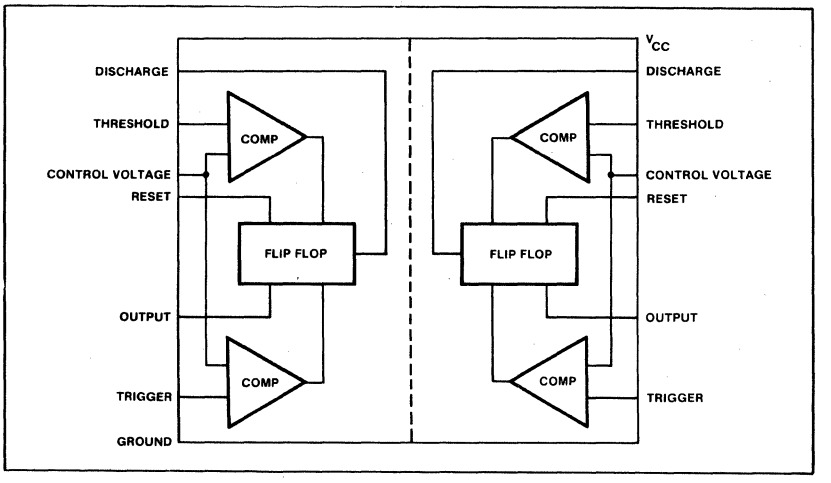

EQUIVALENT SCHEMATIC (Shown for one circuit only)

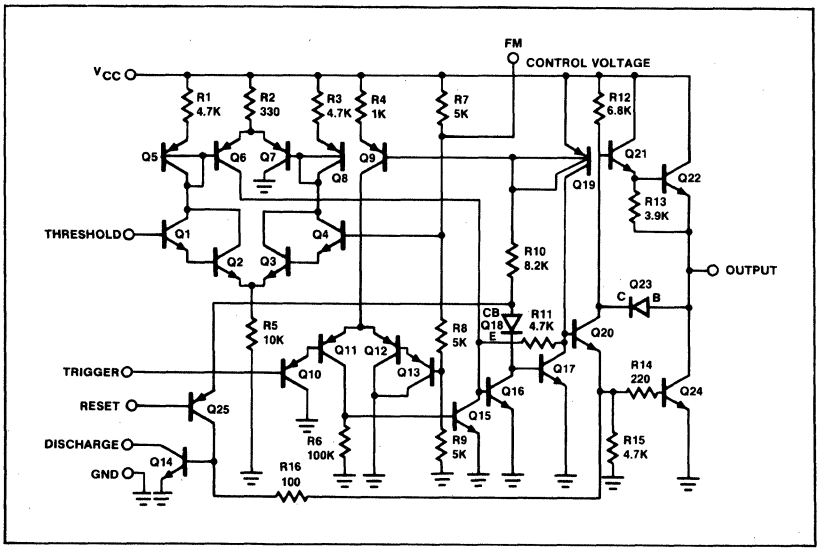

NE/SE556-F,N • SA556-N
SE556C-N

4

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
NE/SA556, SE556C	+16	V
SE556	+18	V
Power dissipation	600	mW
Operating temperature range		
NE556	0 to +70	°C
SA556	-40 to +85	°C
SE556, SE556C	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (Soldering, 60 sec)	+300	°C

ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = +5V$ to $+15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE556			NE/SA556/SE556C			UNITS
		Min	Typ	Max	Min	Typ	Max	
Supply voltage		4.5		18	4.5		16	V
Supply current (low state)[1]	$V_{CC} = 5V$ $R_L = \infty$		6	10		6	12	mA
	$V_{CC} = 15V$ $R_L = \infty$		20	24		20	30	mA
Timing error (monostable)	$R_A = 2k\Omega$ to $100k\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		0.5	1.5		0.75	3.0	%
Drift with temperature			30	100		50		ppm/°C
Drift with supply voltage			0.05	0.2		0.1	0.5	%/V
Timing error (astable)	R_A, $R_B = 1k\Omega$ to $100k\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		1.5			2.25		%
Drift with temperature	$V_{CC} = 15V$		90			150		ppm/°C
Drift with supply voltage			0.15			0.3		%/V
Control voltage level	$V_{CC} = 15V$	9.6	10.0	10.4	9.0	10.0	11.0	V
	$V_{CC} = 5V$	2.9	3.33	3.8	2.6	3.33	4.0	V
Threshold voltage	$V_{CC} = 15V$	9.4	10.0	10.6	8.8	10.0	11.2	V
	$V_{CC} = 5V$	2.7	3.33	4.0	2.4	3.33	4.2	V
Threshold current[3]			30	250		30	250	nA
Trigger voltage	$V_{CC} = 15V$	4.8	5.0	5.2	4.5	5.0	5.6	V
	$V_{CC} = 5V$	1.45	1.67	1.9	1.1	1.67	2.2	V
Trigger current	$V_{TRIG} = 0V$		0.5	0.9		0.5	2.0	μA
Reset voltage[5]		0.4	0.7	1.0	0.4	0.7	1.0	V
Reset current			0.1	0.4		0.1	0.6	mA
Reset current	$V_{RESET} = 0V$		0.4	1.0		0.4	1.5	mA
Output voltage (low)	$V_{CC} = 15V$							
	$I_{SINK} = 10mA$		0.1	0.15		0.1	0.25	V
	$I_{SINK} = 50mA$		0.4	0.5		0.4	0.75	V
	$I_{SINK} = 100mA$		2.0	2.25		2.0	3.2	V
	$I_{SINK} = 200mA$		2.5			2.5		V
	$V_{CC} = 5V$							
	$I_{SINK} = 8mA$		0.1	0.2		0.25	0.3	V
	$I_{SINK} = 5mA$		0.05	0.15		0.15	0.25	V
Output voltage (high)	$V_{CC} = 15V$							
	$I_{SOURCE} = 200mA$		12.5			12.5		V
	$I_{SOURCE} = 100mA$	13.0	13.3		12.75	13.3		V
	$V_{CC} = 5V$							
	$I_{SOURCE} = 100mA$	3.0	3.3		2.75	3.3		V
Rise time of output			100	200		100	300	ns
Fall time of output			100	200		100	300	ns
Discharge leakage current			20	100		20	100	nA
Matching characteristics[4]								
Initial accuracy[2]			0.5	1.0		1.0	2.0	%
Drift with temperature			10			10		ppm/°C
Drift with supply voltage			0.1	0.2		0.2	0.5	%/V

NOTES See following page

NOTES

1. Supply current when output is high is typically 1.0mA less.
2. Tested at V_{CC} = 5V and V_{CC} = 15V.
3. This will determine the maximum value of $R_A + R_B$. For 15V operation, the maximum total R = 10 meg-ohms, and for 5V operation, the max. total R = 3.4 meg-ohms.
4. Matching charactristics refer to the difference between performance characteristics for each timer section in the monostable mode.
5. Specified with trigger input high.

TYPICAL PERFORMANCE CHARACTERISTICS

MINIMUM PULSE WIDTH REQUIRED FOR TRIGGERING

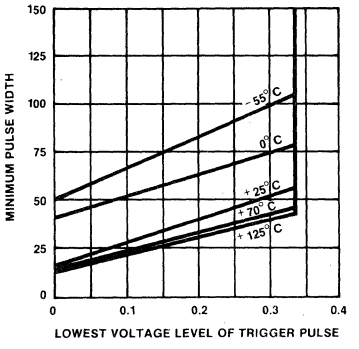

SUPPLY CURRENT vs SUPPLY VOLTAGE

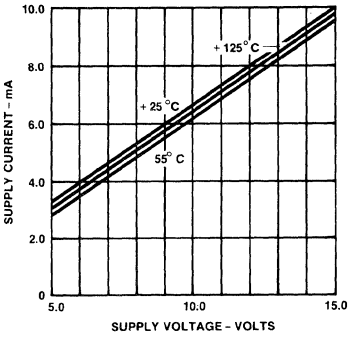

HIGH OUTPUT VOLTAGE DROP vs OUTPUT SOURCE CURRENT

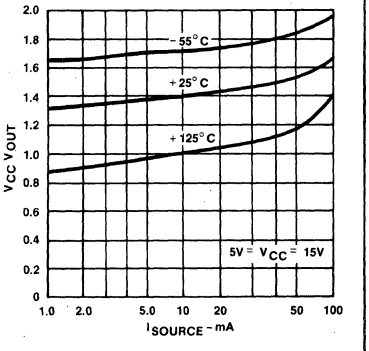

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

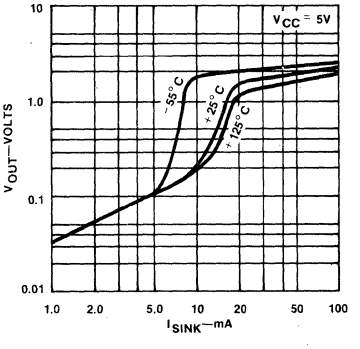

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

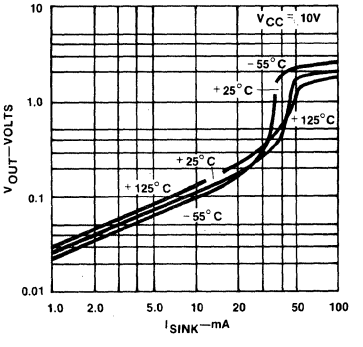

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

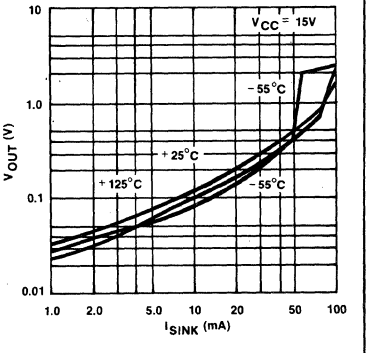

DELAY TIME vs TEMPERATURE

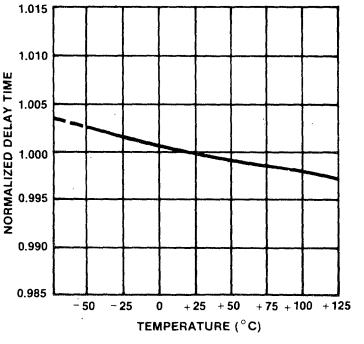

DELAY TIME vs SUPPLY VOLTAGE

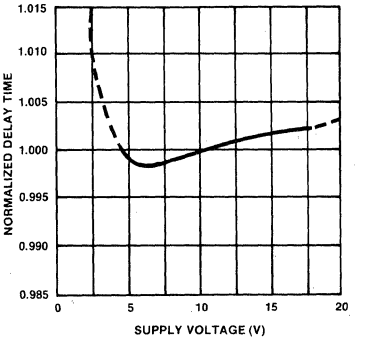

PROPAGATION DELAY vs VOLTAGE LEVEL OF TRIGGER PULSE

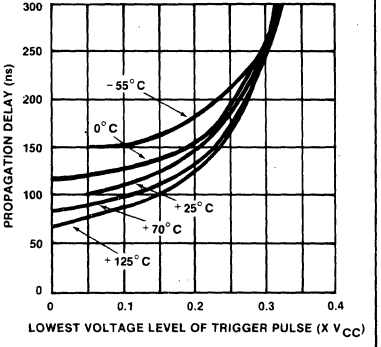

NE/SA/SE556-1/F,N • SE556-1C/F,N

DESCRIPTION

The 556-1 Dual Monolithic timing circuit is a highly stable controller capable of producing accurate time delays or oscillation. The 556-1 is a dual 555. Timing is provided by an external resistor and capacitor for each timing function. The two timers operate independently of each other sharing only V_{CC} and ground. The circuits may be triggered and reset on falling waveforms. The output structures may sink or source 200mA.

FEATURES

- **Turn off time less than 2μS**
- **Maximum operating frequency greater than 500kHz**
- **Timing from microseconds to hours**
- **Replaces two 555 timers**
- **Operates in both astable and monostable modes**
- **High output current**
- **Adjustable duty cycle**
- **TTL compatible**
- **Temperature stability of 0.005% per °C**

APPLICATIONS

- **Precision timing**
- **Sequential timing**
- **Pulse shaping**
- **Pulse generator**
- **Missing pulse detector**
- **Tone burst generator**
- **Pulse width modulation**
- **Time delay generator**
- **Frequency division**
- **Industrial controls**
- **Pulse position modulation**
- **Appliance timing**
- **Traffic light control**
- **Touch tone encoder**

PIN CONFIGURATION

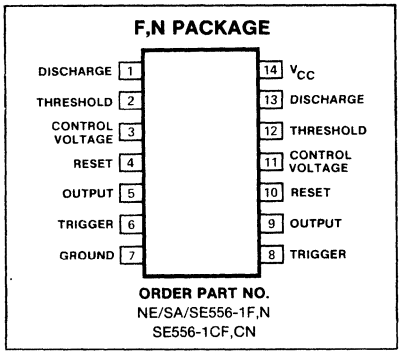

ORDER PART NO.
NE/SA/SE556-1F,N
SE556-1CF,CN

BLOCK DIAGRAM

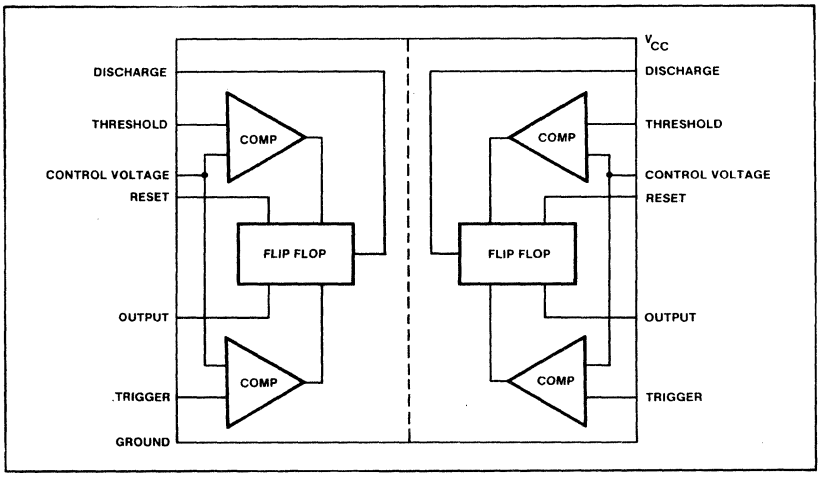

EQUIVALENT SCHEMATIC (Shown for one circuit only)

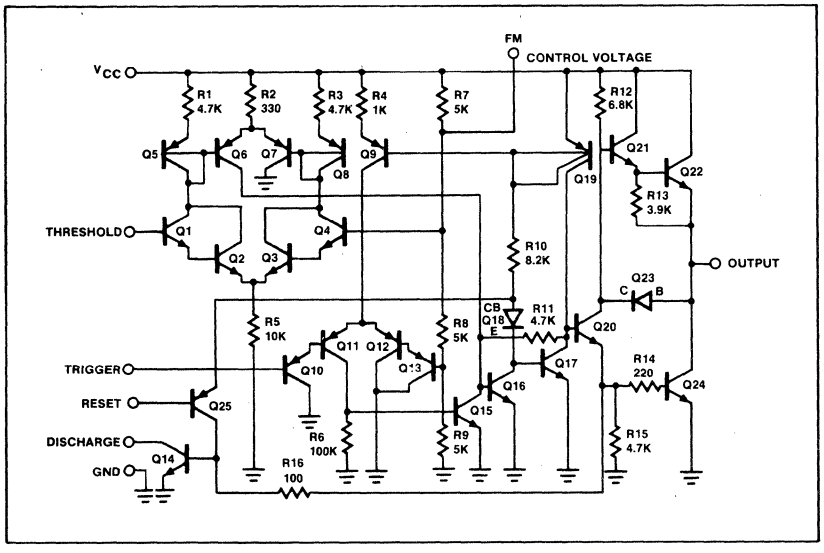

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
NE/SA556-1, SE556-1C	+16	V
SE556-1	+18	V
Power dissipation	1.20	W
Operating temperature range		
NE/SA556-1	0 to +70	°C
SA556-1	−40 to +85	°C
SE556-1, SE556-1C	−55 to +125	°C
Storage temperature range	−65 to +150	°C
Lead temperature		
(soldering, 60 sec)	+300	°C

ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = +5V$ to $+15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE556-1			NE556-1/SE556-1C			UNITS
		Min	Typ	Max	Min	Typ	Max	
Supply voltage		4.5		18	4.5		16	V
Supply current (low state)[1]	$V_{CC} = 5V$ $R_L = \infty$		6	10		6	12	mA
	$V_{CC} = 15V$ $R_L = \infty$		20	24		20	30	mA
Timing error (monostable)	$R_A = 2k\Omega$ to $100k\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		0.5	1.5		0.75	3.0	%
Drift with temperature			30	100		50		ppm/°C
Drift with supply voltage			0.05	0.2		0.1	0.5	%/V
Timing error (astable)	R_A, $R_B = 1k\Omega$ to $100k\Omega$							
Initial accuracy[2]	$C = 0.1\mu F$		1.5			2.25		%
Drift with temperature	$V_{CC} = 15V$		90			150		ppm/°C
Drift with supply voltage			0.15			0.3		%/V
Control voltage level	$V_{CC} = 15V$	9.6	10.0	10.4	9.0	10.0	11.0	V
	$V_{CC} = 5V$	2.9	3.33	3.8	2.6	3.33	4.0	V
Threshold voltage	$V_{CC} = 15V$	9.4	10.0	10.6	8.8	10.0	11.2	V
	$V_{CC} = 5V$	2.7	3.33	4.0	2.4	3.33	4.2	V
Threshold current[3]			30	250		30	250	nA
Trigger voltage	$V_{CC} = 15V$	4.8	5.0	5.2	4.5	5.0	5.6	V
	$V_{CC} = 5V$	1.45	1.67	1.9	1.1	1.67	2.2	V
Trigger current	$V_{TRIG} = 0V$		0.5	0.9		0.5	2.0	μA
Reset voltage[5]		0.4	0.7	1.0	0.4	0.7	1.0	V
Reset current			0.1	0.4		0.1	0.6	mA
Reset current	$V_{RESET} = 0V$		0.4	1.0		0.4	1.5	mA
Output voltage (low)	$V_{CC} = 15V$							
	$I_{SINK} = 10mA$		0.1	0.15		0.1	0.25	V
	$I_{SINK} = 50mA$		0.4	0.5		0.4	0.75	V
	$I_{SINK} = 100mA$		0.8	1.2		2.0	2.5	V
	$I_{SINK} = 200mA$		2.5			2.5		V
	$V_{CC} = 5V$							
	$I_{SINK} = 8mA$		0.1	0.2		0.25	0.3	V
	$I_{SINK} = 5mA$		0.05	0.15		0.15	0.25	V
Output voltage (high)	$V_{CC} = 15V$							
	$I_{SOURCE} = 200mA$		12.5			12.5		V
	$I_{SOURCE} = 100mA$	13.0	13.3		12.75	13.3		V
	$V_{CC} = 5V$							
	$I_{SOURCE} = 100mA$	3.0	3.3		2.75	3.3		V
Turn off time[6]	$V_{RESET} = V_{CC}$		0.5	2.0		0.5		μs
Rise time of output			100	200		100	300	ns
Fall time of output			100	200		100	300	ns
Discharge leakage current			20	100		20	100	nA
Matching characteristics[4]								
Initial accuracy[2]			0.5	1.0		1.0	2.0	%
Drift with temperature			±10			±10		ppm/°C
Drift with supply voltage			0.1	0.2		0.2	0.5	%/V

NOTES

See following page

NOTES

1. Supply current when output is high is typically 1.0mA less.
2. Tested at V_{CC} = 5V and V_{CC} = 15V.
3. This will determine the maximum value of $R_A + R_B$. For 15V operation, the maximum total R = 10 megohms, and for 5V operation, the max. total R = 3.4 megohms.
4. Matching characteristics refer to the difference between performance characteristics for each timer section in the monostable mode.
5. Specified with trigger input high.
6. Time measured from a positive going input pulse from 0 to 0.8 V_{CC} into the threshold to the drop from high to low of the output. Trigger is tied to threshold.

TYPICAL CHARACTERISTICS

MINIMUM PULSE WIDTH REQUIRED FOR TRIGGERING

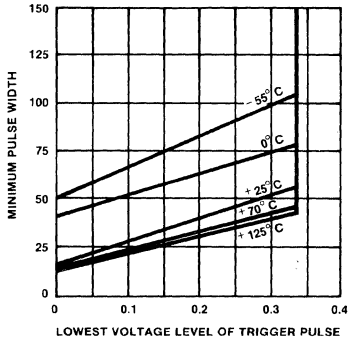

SUPPLY CURRENT vs SUPPLY VOLTAGE

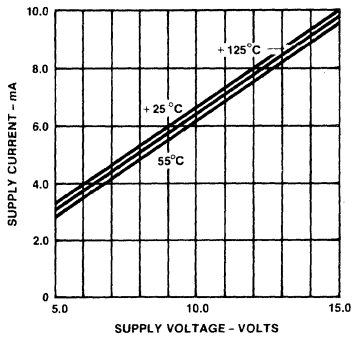

HIGH OUTPUT VOLTAGE DROP vs OUTPUT SOURCE CURRENT

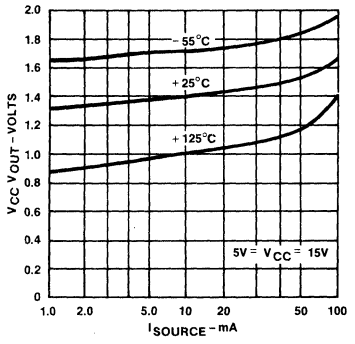

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

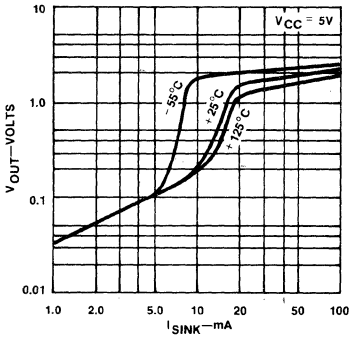

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

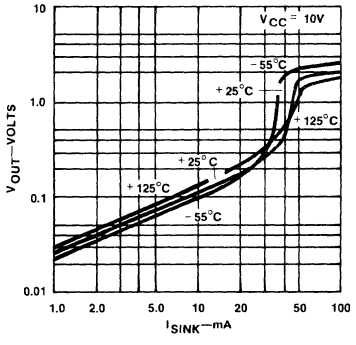

LOW OUTPUT VOLTAGE vs OUTPUT SINK CURRENT

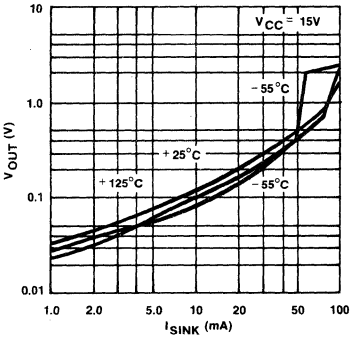

DELAY TIME vs TEMPERATURE

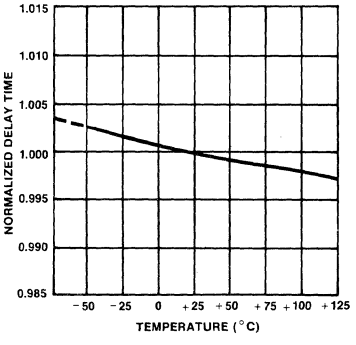

DELAY TIME vs SUPPLY VOLTAGE

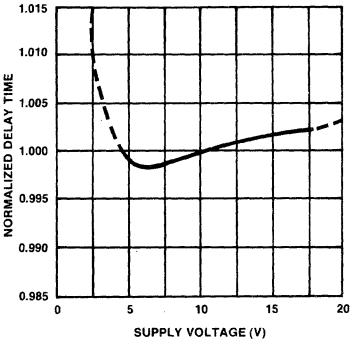

PROPAGATION DELAY vs VOLTAGE LEVEL OF TRIGGER PULSE

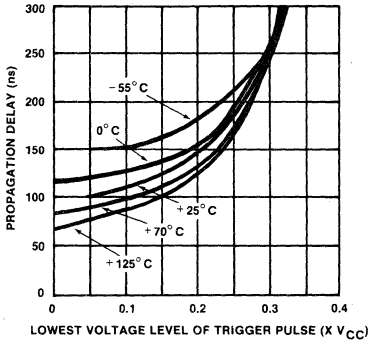

DESCRIPTION

The 558 Quad Timers are monolithic timing devices which can be used to produce four entirely independent timing functions. The 558 output sinks current. These highly stable, general purpose controllers can be used in a monostable mode to produce accurate time delays, from microseconds to hours. In the time delay mode of operation, the time is precisely controlled by one external resistor and one capacitor. A stable operation can be achieved by using two of the four timer sections.

The four timing sections in the 558 are edge triggered; therefore, when connected in tandem for sequential timing applications, no coupling capacitors are required. Output current capability of 100mA is provided in both devices.

FEATURES

- **100mA output current per section**
- **Edge triggered (no coupling capacitor)**
- **Output independent of trigger conditions**
- **Wide supply voltage range 4.5V to 18V**
- **Timer intervals from microseconds to hours**
- **Time period equals RC**
- **Military qualifications pending**

APPLICATIONS

- **Sequential timing**
- **Time delay generation**
- **Precision timing**
- **Industrial controls**
- **Quad one-shot**

PIN CONFIGURATION

F,N PACKAGE

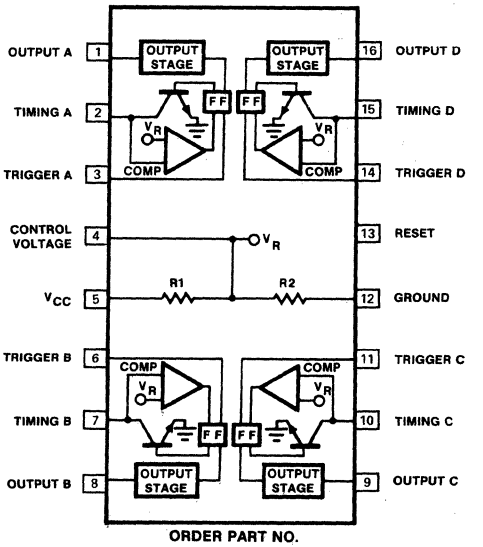

ORDER PART NO.

NE/SA/SE558F NE/SA/SE558N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
NE/SA558	+16	V
SE558	+18	V
Power dissipation	1.25	W
Operating temperature range		
NE558	0 to +70	°C
SA558	-40 to +85	°C
SE558	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60sec)	+300	°C

558 EQUIVALENT CIRCUIT

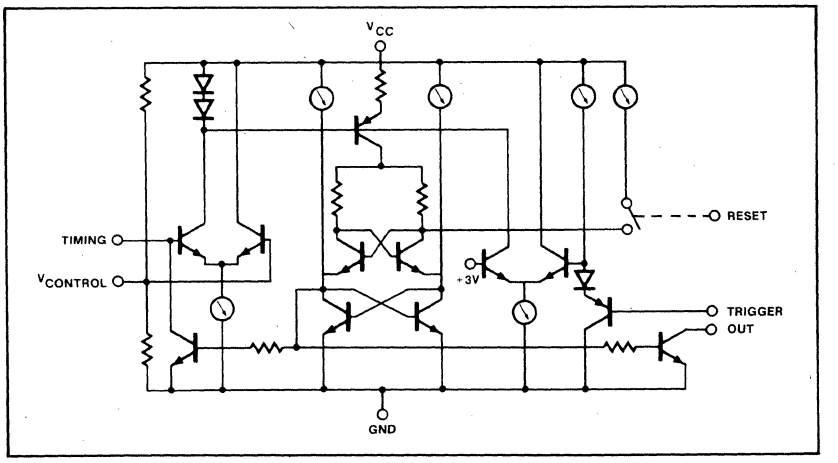

ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = +5V$ to $+15V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE558			NE/SA558			UNIT
		Min	Typ	Max	Min	Typ	Max	
Supply voltage		4.5		18	4.5		16	V
Supply current	V_{CC} = Reset = 15V		21	32		27	36	mA
Timing accuracy (T = RC)	R = 2kΩ to 100kΩ C = 1μF							
Initial accuracy			1.0	3		2		%
Drift with temperature			150			150		ppm/°C
Drift with supply voltage			0.1			0.1		%/V
Trigger voltage[1]	V_{CC} = 15V	0.8	1.5	2.4	0.8	1.5	2.4	V
Trigger current	Trigger = 0V		5	30		5	100	μA
Reset voltage[2]		0.8	1.5	2.4	0.8	1.5	2.4	V
Reset current	Reset		50	300		50		μA
Threshold voltage			0.63			0.63		xV_{CC}
Threshold leakage			15			15		nA
Output voltage[3]	I_L = 10mA		0.1	0.2		0.1	0.4	V
	I_L = 100mA		0.7	1.5		1.0	2.0	V
Output leakage			10			10		nA
Propagation delay			1.0			1.0		μs
Risetime of output	I_L = 100mA		100			100		ns
Falltime of output	I_L = 100mA		100			100		ns

NOTES

1. The trigger functions only on the falling edge of the trigger pulse only after previously being high. After reset the trigger must be brought high and then low to implement triggering.
2. For reset below 0.8 volts, outputs set low and trigger inhibited. For reset above 2.4 volts, trigger enabled.
3. The 558 output structure is open collector which requires a pull up resistor to V_{CC} to sink current. The output is normally low sinking current.

SECTION 5
COMPARATORS

Section 5—COMPARATORS

LM111/211/311	Voltage Comparator	191
LM119/219/319	Dual Voltage Comparator	194
LM139/239/339	Quad Voltage Comparator	199
LM193/A/293/A/393/A	Low Power Dual Voltage Comparator	204
LM2901	Quad Voltage Comparator	199
LM2903	Low Power Dual Voltage Comparator	204
MC3302	Quad Voltage Comparator	199
NE/SE521	High Speed Dual Differential Comparator/Sense Amp	207
NE/SE522	High Speed Dual Differential Comparator/Sense Amp	211
NE/SE527	Voltage Comparator	215
NE/SE529	Voltage Comparator	219

COMPARATORS SELECTION GUIDE

DEVICE	COM-PLEXITY	TEMP. RANGE*	MAX.INP. OFFSET VOLT. (mV)	MAX.INP. CURRENT Bias (μA)	MAX.INP. CURRENT Offset (μA)	SUPPLY VOLTAGE (V)	RESPONSE TIME (TYP.) (ns)	COMMON MODE VOLTAGE RANGE (V)	OUTPUT VOLTAGE VOL max (V)	OUTPUT VOLTAGE VOH min (V)	OUTPUT STRUCTURE	VOLTAGE GAIN (TYP.) V/mV	TTL FANOUT	MAX.DIFF. INP. VOLTAGE V	PACKAGES
LM111[1]	Single	M	4.00	0.15	0.02	±15	200	±14	0.4		O.C.	200	5	±30	F,T
LM211	Single	E	4.00	0.15	0.02	to	200	±14	0.4		O.C.	200	5	±30	F,N,T
LM311	Single	I	10.0	0.30	0.07	+5 and GND	200	±14	0.4		O.C.	200	5	±30	F,N,T
NE527[2]	Single	I	10.0	4.00	1.00	±5 to ±15	16	±6	0.5	2.7	TTL		5	±5	F,K,N
SE527	Single	M	6.00	4.00	1.00	and GND	16	±6	0.5	2.5	TTL		5	±5	F,K
NE529[2]	Single	I	10.0	50.0	15.0	±5 to ±15	12	±6	0.5	2.7	TTL		5	±5	F,K,N
SE529	Single	M	6.00	36.0	9.00	and GND	12	±6	0.5	2.5	TTL		5	±5	F,K
LM119[3]	Dual	M	7.00	1.00	0.10	±15	80	±13	0.6		O.C.	40	2	±5	K,F
LM219	Dual	E	7.00	1.00	0.10	to	80	±13	0.6		O.C.	40	2	±5	K,F
LM319	Dual	I	10.0	1.20	0.30	±5 and GND	80	±13	0.6		O.C.	40	2	±5	F,K,N
LM193[3]	Dual	M	9.00	0.30	0.10	±1 to ±18	1300	0 to VS −2	0.7		O.C.	200	2	36	T
LM293	Dual	E	9.00	0.40	0.15	or	1300	0 to VS −2	0.7		O.C.	200	2	36	N,T
LM393	Dual	I	9.00	0.40	0.15	+2 to +36 GND	1300	0 to VS −2	0.7		O.C.	200	2	36	N,T
LM2903	Dual	E	15.0	0.50	0.20		1300	0 to VS −2	0.7		O.C.	100	2	36	N,T
NE521[4]	Dual	I	10.0	40.0	12.0	+5, −5, GND	7	±3	0.5	2.7	TTL		12	±6	F,N
NE522	Dual	I	10.0	40.0	12.0	+5, −5, GND	9	±3	0.5		O.C.		12	±6	F,N
LM139[3]	Quad	M	9.00	0.30	0.10		1300	0 to VS −2	0.7		O.C.	200	2	36	F,N
LM239	Quad	E	9.00	0.40	0.15	±1 to ±18 or	1300	0 to VS −2	0.7		O.C.	200	2	36	F,N
LM339	Quad	I	9.00	0.40	0.15	+2 to +36	1300	0 to VS −2	0.7		O.C.	200	2	36	F,N
LM2901	Quad	E	15.0	0.50	0.20		1300	0 to VS −2	0.7		O.C.	100	2	36	N
MC3302[3]	Quad	E	40.0	1.00	0.20	+2 to +28 GND	2000	0 to VS −2	0.4		O.C.	30	2	28	N

*Temperature Range
E = Extended
I = Industrial
M = Military

NOTES
1. With strobe; will work from single supply
2. Complementary output gates with individual strobes
3. Will operate from single or dual supplies
4. Ultra high speed

LM111/211/311/-F,N,N-14,H
LM311-D

DESCRIPTION

The LM111 series are voltage comparators that have input currents approximately a hundred times lower than devices like the μA710. They are designed to operate over a wider range of supply voltages; from standard ±15V op amp supplies down to the single 5V supply used for IC logic. Their output is compatible with RTL, DTL, and TTL as well as MOS circuits. Further, they can drive lamps or relays, switching voltages up to 50V at currents as high as 50mA.

Both the inputs and the outputs of the LM111 series can be isolated from system ground, and the output can drive loads referred to ground, the positive supply or the negative supply. Offset balancing and strobe capability are provided and outputs can be wire OR'ed. Although slower than the μA710 (200ns response time vs 40ns) the devices are also much less prone to spurious oscillations. The LM111 series has the same pin configuration as the μA710 series.

FEATURES

- **Operates from single 5V supply**
- **Maximum input bias current: 150nA (LM311 - 250nA)**
- **Maximum offset current: 20nA (LM311 - 50nA)**
- **Differential input voltage range: ±30V**
- **Power consumption: 135mW at ±15V**
- **High sensitivity—200V/mV**
- **Military qualification pending**

PIN CONFIGURATIONS

F,N-14 PACKAGE



ORDER PART NO.
LM111F/LM211F/LM211N-14
LM311F/LM311N-14

N PACKAGE



ORDER PART NO.
LM211N/LM311N
LM311D

H PACKAGE*



ORDER PART NO.
LM111H/LM211H/LM311H

*Metal cans (H) not recommended for new designs

EQUIVALENT SCHEMATIC

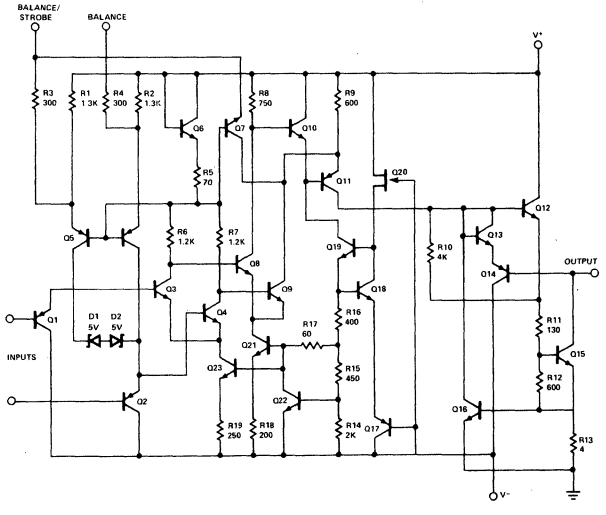

LM111/211/311/-F,N,N-14,H
LM311-D

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Total supply voltage	36	V
Output to negative supply voltage:		
LM111/LM211	50	V
LM311	40	V
Ground to negative supply voltage	30	V
Differential input voltage	±30	V
Input voltage[1]	±15	V
Power dissipation[2]	500	mW
Output short circuit duration	10	sec
Operating temperature range		
LM111	-55 to +125	°C
LM211	-25 to +85	°C
LM311	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 10sec)	300	°C

DC ELECTRICAL CHARACTERISTICS 1,2,3

PARAMETER	TEST CONDITIONS	LM111/LM211			LM311			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input offset voltage[4]	$T_A = 25°C$, $R_S \leq 50k\Omega$		0.7	3.0		2.0	7.5	mV
Input offset current[4]	$T_A = 25°C$		4.0	10		6.0	50	nA
Input bias current	$T_A = 25°C$		60	100		100	250	nA
Voltage gain	$T_A = 25°C$		200			200		V/mV
Response time[5]	$T_A = 25°C$		200			200		ns
Saturation voltage	$V_{IN} \leq -5mV$, $I_{OUT} = 50mA$							
	$T_A = 25°C$		0.75	1.5		0.75	1.5	V
Strobe on current	$T_A = 25°C$		3.0			3.0		mA
Output leakage current	$V_{IN} \geq 5mV$, $V_{OUT} = 35V$							
	$T_A = 25°C$, $I_{STROBE} = 3mA$		0.2	10		0.2	50	nA
Input offset voltage[4]	$R_S \leq 50k\Omega$			4.0			10	mV
Input offset current[4]				20			70	nA
Input bias current				150			300	nA
Input voltage range			±14			±14		V
Saturation voltage	V+ ≥ 4.5V, V- = 0							
	$V_{IN} \leq -6mV$, $I_{SINK} \leq 8mA$		0.23	0.4		0.23	0.4	V
Output leakage current	$V_{IN} \geq 5mV$, $V_{OUT} = 35V$		0.1	0.5				μA
Positive supply current	$T_A = 25°C$		5.1	6.0		5.1	7.5	mA
Negative supply current	$T_A = 25°C$		4.1	5.0		4.1	5.0	mA

NOTES

1. This rating applies for ±15V supplies. The positive input voltage limit is 30V above the negative supply. The negative input voltage limit is equal to the negative supply voltage or 30V below the positive supply, whichever is less.
2. The maximum junction temperature of the LM311 is 110°C. For operating at elevated temperatures, devices in the TO-5 package must be derated based on a thermal resistance of 150°C/W, junction to ambient, in the N package, a thermal resistance of 162°C/W, and °C/W for the Ceramic package. The maximum junction temperature of the LM111 is 150°C, while that of the LM211 is 110°C. For operating at elevated temperatures, devices in the TO-5 package must be derated based on a thermal resistance of 150°C/W, junction to ambient. The thermal resistance of the Cerdip package is 110°C/W, junction to ambient.
3. These specifications apply for $V_S = \pm 15V$ and $0°C < T_A < 70°C$ unless otherwise specified. With the LM211, however, all temperature specifications are limited to $-25°C \leq T_A \leq 85°C$ and for the LM111 is limited to $-55°C < T_A < 125°C$. The offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5V supply up to ±15V supplies.
4. The offset voltages and offset currents given are the maximum values required to drive the output within a volt of either supply with 1mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
5. The response time specified (see definitions) is for a 100mV input step with 5mV overdrive.

LM111/211/311/-F,N,N-14,H
LM311-D

TYPICAL APPLICATIONS

ZERO CROSSING DETECTOR DRIVING MOS LOGIC



DETECTOR FOR MAGNETIC TRANSDUCER



TTL INTERFACE WITH HIGH LEVEL LOGIC

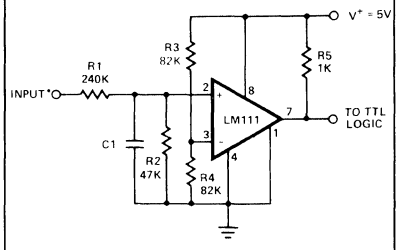

*Values shown are for a 0 to 30V logic swing and a 15V threshold.

†May be added to control speed and reduce susceptability to noise spikes.

5

LM119/219/319-F,H,N
LM319-D

DESCRIPTION

The LM119 series are precision high speed dual comparators fabricated on a single monolithic chip. They are designed to operate over a wide range of supply voltages down to a single 5V logic supply and ground. Further, they have higher gain and lower input currents than devices like the μA710. The uncommitted collector of the output stage makes the LM119 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA.

Although designed primarily for applications requiring operation from digital logic supplies, the LM119 series are fully specified for power supplies up to ±15V. It features faster response than the LM111 at the expense of higher power dissipation. However, the high speed, wide operating voltage range and low package count make the LM119 much more versatile than older devices like the μA711.

The LM119 is specified from -55°C to +125°C, the LM219 is specified from -25°C to +85°C, and the LM319 is specified from 0°C to +70°C.

FEATURES

- **Two independent comparators**
- **Operates from a single 5V supply**
- **Typically 80ns response time at ±15V**
- **Minimum fan-out of 3 (each side)**
- **Maximum input current of 1μA over temperature**
- **Inputs and outputs can be isolated from system ground**
- **High common mode slew rate**
- **Mil std 883 A, B, C available**

PIN CONFIGURATIONS

D,F,N PACKAGE



H PACKAGE*



*Metal cans (H) not recommended for new designs

EQUIVALENT SCHEMATIC

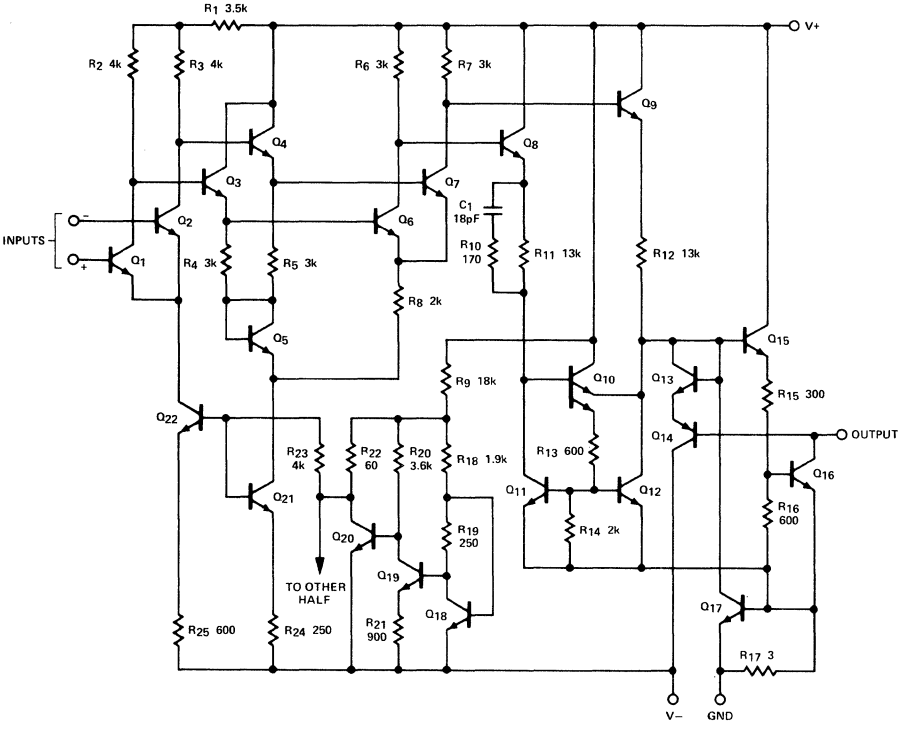

LM119/219/319-F,H,N
LM319-D

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Total supply voltage	36	V
Output to negative supply voltage	36	V
Ground to negative supply voltage	25	V
Ground to positive supply voltage	18	V
Differential input voltage	±5	V
Input voltage[1]	±15	V
Power dissipation[2]	500	mW
Output short circuit duration	10	s
Operating temperature range		
LM119	-55 to +125	°C
LM219	-25 to +85	°C
LM319	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 10sec)	300	°C

NOTES

1. For supply voltages less than ±15V, the absolute maximum rating is equal to the supply voltage.
2. The absolute maximum junction temperature is 150°C. Device dissipation must be derated as follows:
   N/K package—150°C/watt above 75°C
   F package —110°C/watt above 95°C

DC ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V$, for LM119, $-55°C \le T_A \le 125°C$; LM219, $-25°C \le T_A \le 85°C$; LM319, $0°C \le T_A \le 70°C$ unless otherwise specified.

	PARAMETER	TEST CONDITIONS	LM119/219			LM319			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage[1,2]	$R_S \le 5K\Omega$, $T_A = 25°C$		0.7	4.0		2.0	8.0	mV
		Over temp.			7			10	mV
I_{OS}	Input offset current[1,2]	$T_A = 25°C$		30	75		80	200	nA
		Over temp.			100			300	nA
I_B	Input bias current[1]	$T_A = 25°C$		150	500		250	1000	nA
		Over temp.			1000			1200	nA
A_V	Voltage gain	$T_A = 25°C$	10	40		8	40		V/mV
V_{OL}	Saturation voltage	$V_{IN} = 5mV$, $I_{OUT} = 25mA$, $T_A = 25°C$		0.75	1.5				V
		$V_{IN} = 10mV$, $I_{OUT} = 25mA$, $T_A = 25°C$					0.75	1.5	V
		$V^+ \ge 4.5V$, $V^- = 0$							
		$V_{IN} = 6mV$, $I_{OUT} = 3.2mA$							
		$T_A \ge 0°C$		0.23	0.4				V
		$T_A \le 0°C$			0.6				
		$V_{IN} = 10mV$, $I_{OUT} = 3.2mA$					0.3	0.4	V
I_{OH}	Output leakage current	$V^- = 0V$, $V_{IN} = 5mV$							
		$V_{OUT} = 35V$, $T_A = 25°C$		0.2	2				μA
		Over temp.		1	10				μA
		$V^- = 0V$, $V_{IN} = 10mV$							
		$V_{OUT} = 35V$, $T_A = 25°C$					0.2	10	μA
V_{IN}	Input voltage range	$V_S = \pm 15V$		±13			±13		V
		$V^+ = 5V$, $V^- = 0V$	1		3	1		3	V
V_{ID}	Differential input voltage				±5			±5	V
I^+	Positive supply current	$V^+ = 5V$, $V^- = 0V$, $T_A = 25°C$		4.3			4.3		mA
I^+	Positive supply current	$V_S = \pm 15V$, $T_A = 25°C$		8.0	11.5		8.0	12.5	mA
I^-	Negative supply current	$V_S = \pm 15V$, $T_A = 25°C$		3.0	4.5		3.0	5.0	mA

NOTES

1. V_{OS}, I_{OS} and I_B specifications apply for a supply voltage range of $V_S = \pm 15V$ down to a single 5V supply.
2. The offset voltages and offset currents given are the maximum values required to drive the output to within 1 volt of either supply with a 1mA load. Thus these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.

AC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	LIMITS			UNIT
		Min	Typ	Max	
Response time*	$V_S = \pm 15V$, $T_A = 25°C$ $R_L = 500\Omega$ (see test figure)		80		ns

*NOTE

The response time specified is for a 100mV step with 5mV overdrive.

TEST CIRCUIT

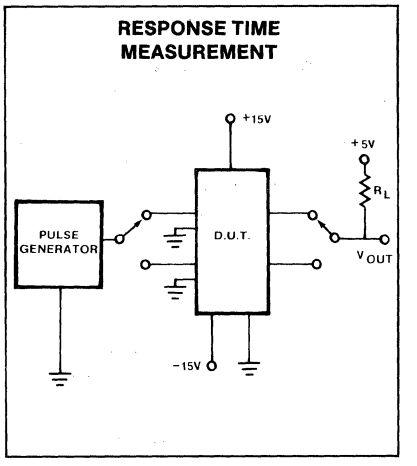

TYPICAL PERFORMANCE CHARACTERISTICS

TRANSFER FUNCTION

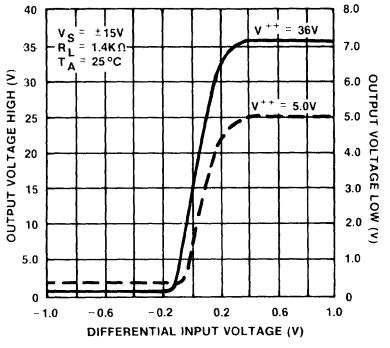

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

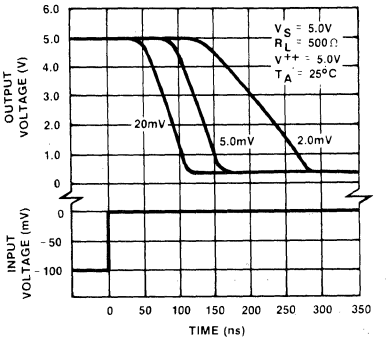

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

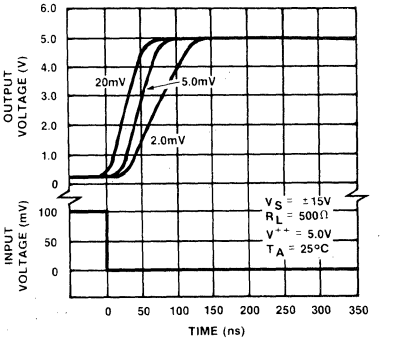

INPUT CHARACTERISTICS

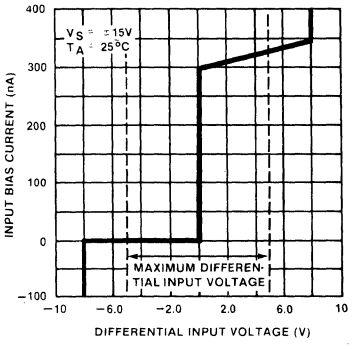

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

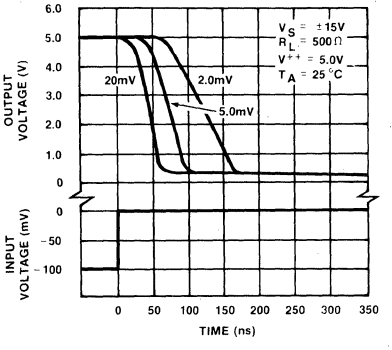

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

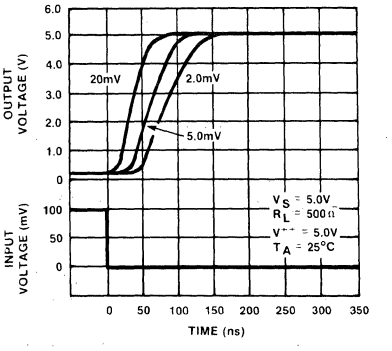

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

OUTPUT SATURATION VOLTAGE

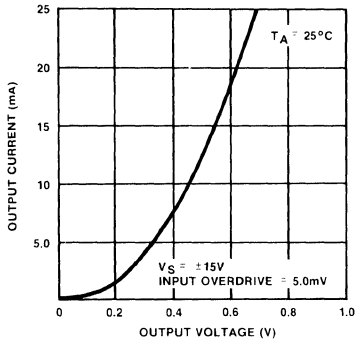

SUPPLY CURRENT

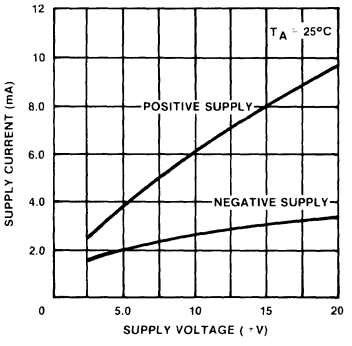

OUTPUT LIMITING CHARACTERISTICS

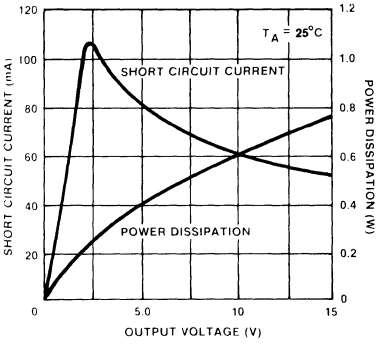

INPUT CURRENTS (LM119/219)

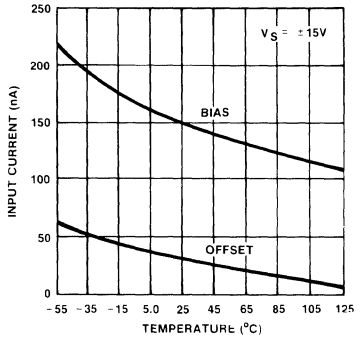

COMMON MODE LIMITS (LM119/219)

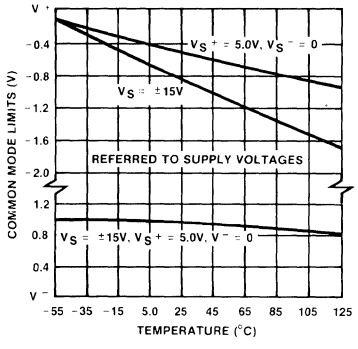

SUPPLY CURRENT (LM119/219)

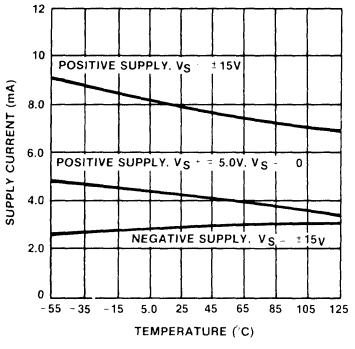

INPUT CURRENTS (LM319)

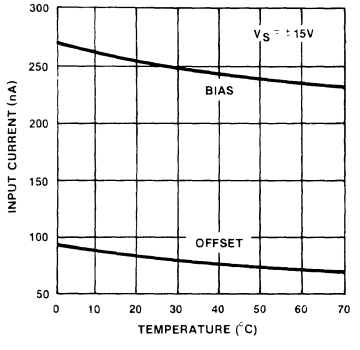

SUPPLY CURRENTS (LM319)

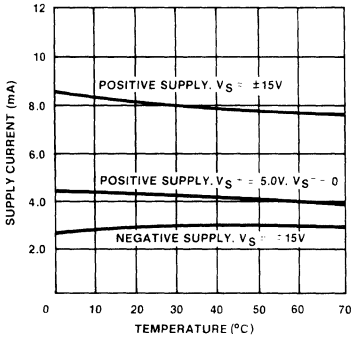

COMMON MODE LIMITS (LM319)

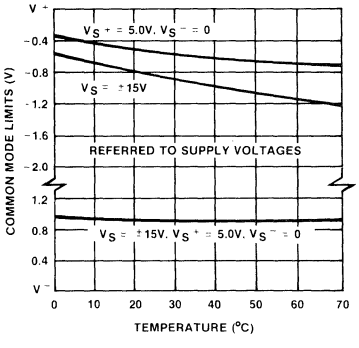

LM119/219/319-F,H,N
LM319-D

TYPICAL APPLICATIONS

RELAY DRIVER



WINDOW DETECTOR



$V_{OUT} = 5V$ for $V_{LT} < V_{IN} < V_{UT}$
$V_{OUT} = 0$ for $V_{IN} < V_{LT}$ or $V_{IN} > V_{UT}$

WIDE RANGE VARIABLE OSCILLATOR

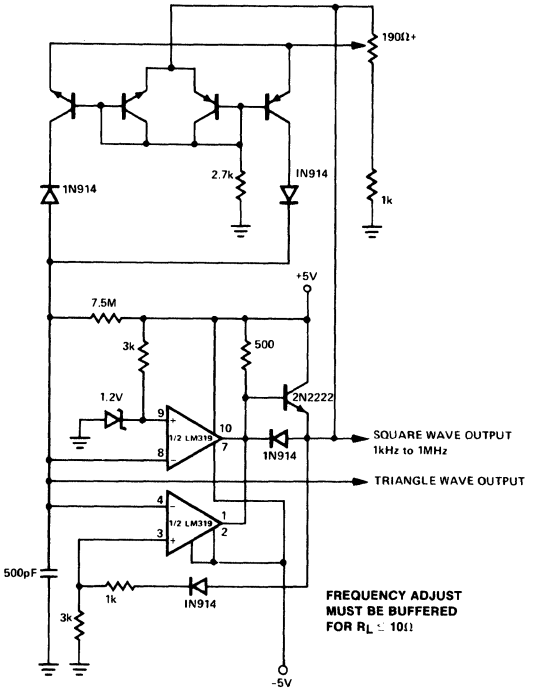

LM139/239/339/2901/MC3302-F,N
LM339-D

DESCRIPTION

The LM139 series consists of four independent precision voltage comparators with an offset voltage specification as low as 2.0mV max for each comparator which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. These comparators also have a unique characteristic in that the input common mode voltage range includes ground, even though operated from a single power supply voltage.

The LM139 series was designed to directly interface with TTL and CMOS. When operated from both plus and minus power supplies, the LM139 series will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

FEATURES

- **Wide single supply voltage range 2.0Vdc to 36Vdc or dual supplies ±1.0Vdc to ±18Vdc**
- **Very low supply current drain (0.8mA) independent of supply voltage (1.0mW/-comparator at 5.0Vdc)**
- **Low input biasing current 25nA**
- **Low input offset currrent ±5nA and offset voltage ±2mV**
- **Input common-mode voltage range includes ground**
- **Differential input voltage range equal to the power supply voltage.**
- **Low output 250mV at 4mA saturation voltage**
- **Output voltage compatible with TTL, DTL, ECL, MOS and CMOS logic systems.**

APPLICATIONS

- **A/D converters**
- **Wide range VCO**
- **MOS clock generator**
- **High voltage logic gate**
- **Multivibrators**

PIN CONFIGURATION

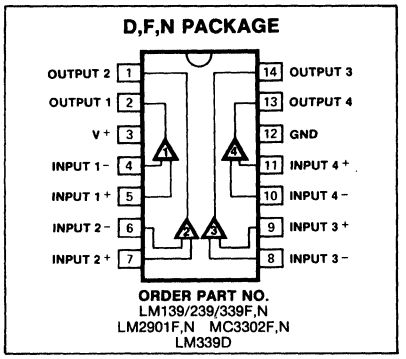

EQUIVALENT CIRCUIT

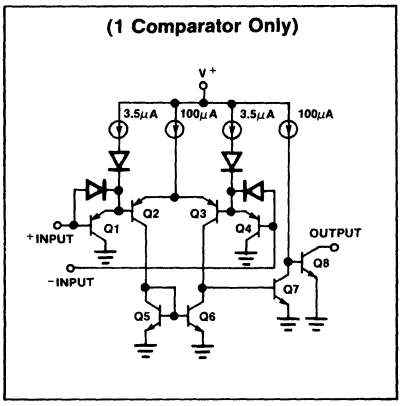

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
V_{CC} supply voltage	36 or ±18	
Differential input voltage	36	
Input voltage	-0.3 to +36	
Power dissipation[1]		
Molded DIP	570	mW
CERDIP	900	mW
Output short circuit to ground[2]	Continuous	
Input current (V_{IN} < -0.3Vdc)[3]	50	mA
Operating temperature range		
LM139	-55 to +125	°C
LM239	-25 to +85	°C
LM339	0 to +70	°C
LM2901/MC3302	-40 to +85	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 10 sec.)	300	°C

5

LM139/239/339/2901/MC3302-F,N
LM339-D

DC ELECTRICAL CHARACTERISTICS

V+ = 5Vdc, LM139: $-55°C \leq T_A \leq 125°C$ unless otherwise specified
LM239: $-25°C \leq T_A \leq 85°C$ unless otherwise specified
LM339: $0°C \leq T_A \leq 70°C$ unless otherwise specified

PARAMETER	TEST CONDITIONS	LM139			LM239/339			UNIT
		Min	Typ	Max	Min	Typ	Max	
V_{OS} Input offset voltage[5]	$T_A = 25°C$ Over temp.		±2.0	±5.0 9.0		±2.0	±5.0 9.0	mV
V_{CM} Input common mode voltage range[6]	$T_A = 25°C$ Over temp.	0 0		V+-1.5 V+-2.0	0 0		V+-1.5 V+-2.0	V
V_{IDR} Differential input voltage[4]	Keep all V_{IN}'s ≥ 0Vdc (or V-if used)			V+			V+	V
I_B Input bias current[7]	$I_{IN(+)}$ or $I_{IN(-)}$ with output in linear range $T_A = 25°C$ Over temp.		25	100 300		25	250 400	nA
I_{OS} Input offset current	$I_{IN(+)} - I_{IN(-)}$ $T_A = 25°C$ Over temp.		±3.0	±25 ±100		±5.0	±50 ±150	nA nA
I_{OL} Output sink current	$V_{IN(-)} \geq 1Vdc$, $V_{IN(+)} = 0$, $V_O \leq 1.5Vdc$, $T_A = 25°C$	6.0	16		6.0	16		mA
I_{OH} Output leakage current	$V_{IN(+)} \geq 1Vdc$, $V_{IN(-)} = 0$ $V_O = 5Vdc$, $T_A = 25°C$ $V_O = 30Vdc$, over temp.		0.1	 1.0		0.1	 1.0	nA μA
I_{CC} Supply current	$R_L = \infty$ on all comparators, $T_A = 25°C$		0.8	2.0		0.8	2.0	mA
A_V Voltage gain	$R_L \geq 15k\Omega$, V+ = 15Vdc $T_A = 25°C$	50	200		50	200		V/mV
V_{OL} Saturation voltage	$V_{IN(-)} \geq 1Vdc$, $V_{IN(+)} = 0$, $I_{SINK} \leq 4mA$ $T_A = 25°C$ Over temp.		250	400 700		250	400 700	mV
T_{LSR} Large signal response time	V_{IN} = TTL logic swing, $V_{REF} = 1.4Vdc$, $V_{RL} = 5Vdc$, $R_L = 5.1k\Omega$, $T_A = 25°C$		300			300		ns
T_R Response time[8]	$V_{RL} = 5Vdc$, $R_L = 5.1k\Omega$, $T_A = 25°C$		1.3			1.3		μs

LM139/239/339/2901/MC3302-F,N
LM339-D

DC ELECTRICAL CHARACTERISTICS

V+ = 15Vdc, MC3302
LM2901/MC3302: -40°C ≤ T_A ≤ 85°C unless otherwise specified

PARAMETER	TEST CONDITIONS	LM2901			MC3302			UNIT
		Min	Typ	Max	Min	Typ	Max	
V_{OS} Input offset voltage[5]	T_A = 25°C Over temp.		±2.0 ±9	±7.0 ±15		±3.0	±20 ±40	mV
V_{CM} Input common mode voltage range[6]	T_A = 25°C Over temp.	0 0		V+-1.5 V+-2.0			V+-1.5 V+-2.0	V
V_{IDR} Differential input voltage[4]	Keep all $V_{IN's}$ ≥ 0Vdc (or V-if need)			V+			V+	V
I_B Input bias current[7]	$I_{IN(+)}$ or $I_{IN(-)}$ with output in linear range T_A = 25°C Over temp.		25 200	250 500		25	500 1000	nA
I_{OS} Input offset current	$I_{IN(+)}$ - $I_{IN(-)}$ T_A = 25°C Over temp.		±5 ±50	±50 ±200		±5		nA nA
I_{OL} Output sink current	$V_{IN(-)}$ ≥ 1Vdc, $V_{IN(+)}$ = 0, V_O ≤ 1.5Vdc, T_A = 25°C V_O = 800mV, Over temp.	6.0	16		2.0			mA
I_{OH} Output leakage current	$V_{IN(+)}$ ≥ 1Vdc, $V_{IN(-)}$ = 0 V_O = 5Vdc, T_A = 25°C V_O = 30V Over temp. V_O = 28V T_A = 25° C		0.1	1.0		0.1	1.0	nA μA
I_{CC} Supply current	R_L = ∞ on comparators, V+ = 5Vdc, T_A = 25°C V+ = 30V, T_A = 25°C V+ = 5 to 28 Vdc, T_A = 25°C		0.8 1.0	2.0 2.5		0.8	2.0	mA
A_V Voltage gain	R_L ≥ 15kΩ, V+ = 15Vdc T_A = 25°C	25	100		2	100		V/mV
V_{OL} Saturation voltage	$V_{IN(-)}$ ≥ 1Vdc, $V_{IN(+)}$ = 0, I_{SINK} ≤ 4mA T_A = 25°C Over temp. I_{SINK} = 2mA, V+ = 5V to 28V, T_A = 25°C		400	400 700		150	400	mV
T_{LSR} Large signal response time	V_{IN} = TTL logic swing, V_{REF} = 1.4Vdc, V_{RL} = 5Vdc, R_L = 5.1kΩ, T_A = 25°C		300			300		ns
T_R Response time[8]	V_{RL} = 5Vdc, R_L = 5.1kΩ, T_A = 25°C		1.3			1.3		μs

5

NOTES

1. For operating at high temperatures, the LM339/339A, LM2901 and MC3302 must be derated based on a 125° C maximum junction temperature and a thermal resistance of 175° C/W which applies for the device soldered in a printed circuit board, operating in a still air ambient. The LM139/139A/239/239A must be derated on a 150° C maximum junction temperature. The low power dissipation and the "On-Off" characteristics of the outputs keep the chip dissipation very small ($P_D \leq 100mW$), provided the output transistors are allowed to saturate.
2. Short circuits from the output to V+ can cause excessive heating and eventual destruction. The maximum output current is approximately 20mA independent of the magnitude of V+.
3. This input current will only exist when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistors becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also lateral NPN parasitic transistor action on the IC chip. This transistor action can cause the output voltages of the comparators to go to the V+ voltage level (or to ground for a large overdrive) for the time duration that an input is driven negative. This is not destructive and normal output states will re-establish when the input voltage, which was negative, again returns to a value greater than -0.3Vdc.
4. Positive excursions of input voltage may exceed the power supply level. As long as the other voltage remains within the common-mode range, the comparator will provide a proper output state. The low input voltage state must not be less than -0.3Vdc (or 0.3Vdc below the magnitude of the negative power supply, if used).
5. At output switch point, $V_O \cong 1.4Vdc$, $R_S = 0\Omega$ with V+ from 5Vdc to 30Vdc; and over the full input common-mode range (0Vdc to V+ -1.5Vdc).
6. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ -1.5V, but either or both inputs can go to 30Vdc without damage.
7. The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the reference or input lines.
8. The response time specified is for a 100mV input step with a 5mV overdrive. For larger overdrive signals, 300ns can be obtained, see typical performance characteristics section.

TYPICAL APPLICATIONS

TWO-DECADE HIGH-FREQUENCY VCO

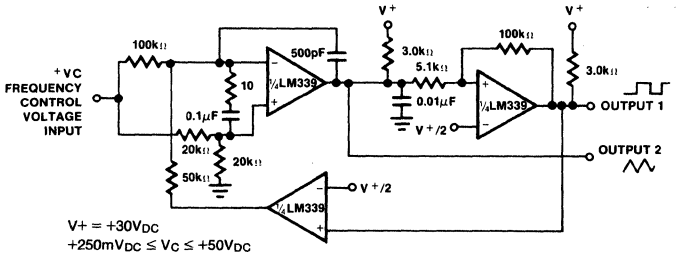

$V+ = +30V_{DC}$
$+250mV_{DC} \leq V_C \leq +50V_{DC}$
$700Hz \leq f_o \leq 100kHz$

LIMIT COMPARATOR



VISIBLE VOLTAGE INDICATOR

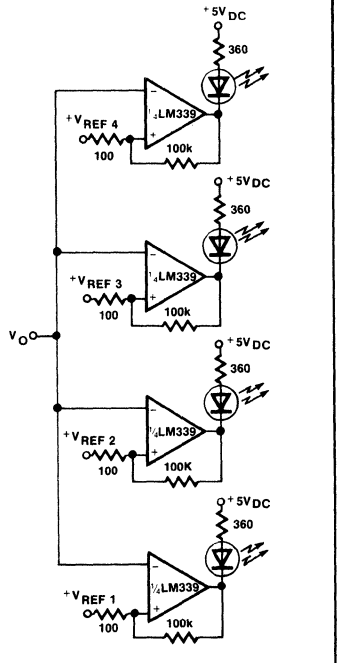

TTL TO MOS LOGIC CONVERTER



CRYSTAL CONTROLLED OSCILLATOR



TYPICAL PERFORMANCE CHARACTERISTICS

SUPPLY CURRENT

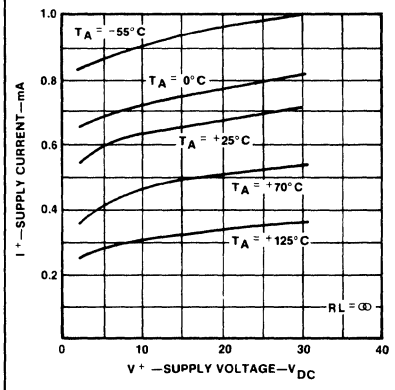

INPUT CURRENT

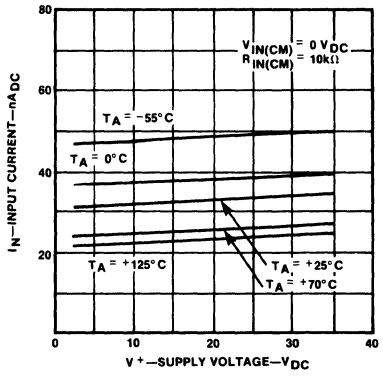

OUTPUT SATURATION VOLTAGE

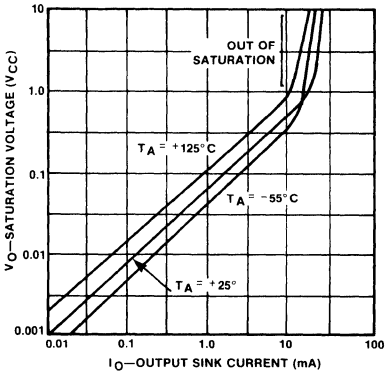

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES— NEGATIVE TRANSITION

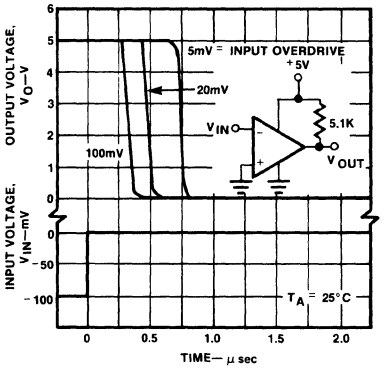

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES— POSITIVE TRANSITION

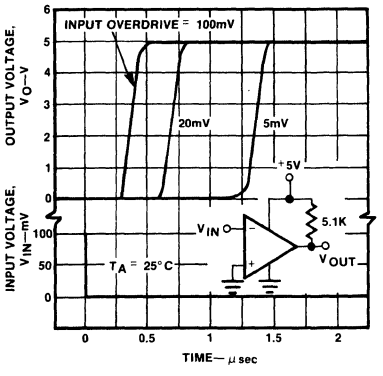

LM193/293/393/193A/293A/393A/2903-N,FE,H

DESCRIPTION

The LM193 series consists of two independent precision voltage comparators with an offset voltage specification as low as 2.0mV max for two comparators which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. These comparators also have a unique characteristic in that the input common mode voltage range includes ground, even though operated from a single power supply voltage.

The LM193 series was designed to directly interface with TTL and CMOS. When operated from both plus and minus power supplies, the LM193 series will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

FEATURES

- **Wide single supply voltage range 2.0Vdc to 36Vdc or dual supplies ±1.0Vdc to ±18Vdc**
- **Very low supply current drain (0.8mA) independent of supply voltage (2.0mW/-comparator at 5.0Vdc)**
- **Low input biasing current 25nA**
- **Low input offset current ±5nA and offset voltage ±2mV**
- **Input common-mode voltage range includes ground**
- **Differential input voltage range equal to the power supply voltage.**
- **Low output 250mV at 4mA saturation voltage**
- **Output voltage compatible with TTL, DTL, ECL, MOS and CMOS logic systems.**

APPLICATIONS

- **A/D converters**
- **Wide range VCO**
- **MOS clock generator**
- **High voltage logic gate**
- **Multivibrators**

PIN CONFIGURATIONS

N,FE PACKAGE

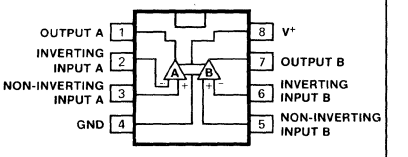

H PACKAGE*



*Metal cans (H) not recommended for new designs

EQUIVALENT CIRCUIT

(One Comparator Only)

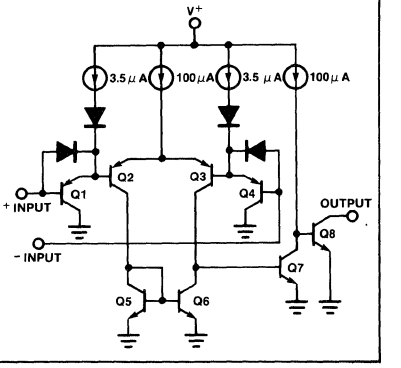

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
V_{CC} supply voltage	36 or ±18	Vdc
Differential input voltage	36	Vdc
Input voltage	-0.3 to +36	Vdc
Power dissipation[1]		
Molded DIP	570	mW
Metal can	900	mW
Output short circuit to ground[2]	Continuous	
Input current (V_{IN} < -0.3Vdc)[3]	50	mA
Operating temperature range		
LM193/193A	-55 to +125	°C
LM293/293A	-25 to +85	°C
LM393/393A	0 to +70	°C
LM2903	-40 to +85	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 10 sec.)	300	°C

LM193/293/393/193A/293A/393A/2903-N,FE,H

DC ELECTRICAL CHARACTERISTICS

V+ = 5Vdc, LM193/193A: $-55°C \leq T_A \leq +125°C$ unless otherwise specified.
LM293/293A: $-25°C \leq T_A \leq +85°C$ unless otherwise specified.
LM393/393A: $0°C \leq T_A \leq +70°C$ unless otherwise specified.
LM2903: $-40°C \leq T_A \leq +85°C$ unless otherwise specified.[7]

PARAMETER	TEST CONDITIONS	LM193A			LM293A/393A			LM2903			UNIT
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V_{OS} Input offset voltage[5]	$T_A = 25°C$ Over temp.		±1.0	±2.0 ±4.0		±1.0	±2.0 ±4.0		±2.0 ±9	±7.0 ±15	mV
V_{CM} Input common mode voltage range[6,10]	$T_A = 25°C$ Over temp.	0 0		V+-1.5 V+-2.0	0 0		V+-1.5 V+-2.0	0 0		V+-1.5 V+-2.0	V
V_{IDR} Differential input voltage[4]	Keep all V_{IN}'s ≥ 0Vdc (or V- if need)			V+			V+			V+	V
I_B Input bias current[8]	$I_{IN(+)}$ or $I_{IN(-)}$ with output in linear range $T_A = 25°C$ Over temp.		25	100 300		25	250 400		25 200	250 500	nA
I_{OS} Input offset current	$I_{IN(+)} - I_{IN(-)}$ $T_A = 25°C$ Over temp.		±3.0	±25 ±100		±5.0	±50 ±150		±5 ±50	±50 ±200	nA nA
I_{OL} Output sink current	$V_{IN(-)} \geq 1Vdc$, $V_{IN(+)} = 0$, $V_O \leq 1.5Vdc$, $T_A = 25°C$	6.0	16		6.0	16		6.0	16		mA
I_{OH} Output leakage current	$V_{IN(+)} \geq 1Vdc$, $V_{IN(-)} = 0$, $V_O = 30Vdc$ Over temp. $V_O = 5Vdc$, $T_A = 25°C$		0.1	1.0		0.1	1.0		0.1	1.0	μA na
I_{CC} Supply current	$R_L = \infty$ on both comparators. $T_A = 25°C$ V+ = 30V, over temp.		0.8 1	1 2.5		0.8 1	1 2.5		0.8 1	1 2.5	mA
A_V Voltage gain	$R_L \geq 15k\Omega$, V+ = 15Vdc, $T_A = 25°C$	50	200		50	200		25	100		V/mV
V_{OL} Saturation voltage	$V_{IN(-)} \geq 1Vdc$, $V_{IN(+)} = 0$, $I_{SINK} \leq 4mA$ $T_A = 25°C$ Over temp.		250	400 700		250	400 700		400	400 700	mV
T_{LSR} Large signal response time	V_{IN} = TTL logic swing, $V_{REF} = 1.4Vdc$, $V_{RL} = 5Vdc$, $R_L = 5.1k\Omega$, $T_A = 25°C$		300			300			300		ns
T_R Response time[9]	$V_{RL} = 5Vdc$, $R_L = 5.1k\Omega$, $T_A = 25°C$		1.3			1.3			1.3		μs

LM193/293/393/193A/293A/393A/2903-N,FE,H

DC ELECTRICAL CHARACTERISTICS (Cont'd) V+ = 5Vdc, LM193/193A: $-55°C \le T_A \le +125°C$ unless otherwise specified.
LM293/293A: $-25°C \le T_A \le +85°C$ unless otherwise specified.
LM393/393A: $0°C \le T_A \le +70°C$ unless otherwise specified.
LM2903: $-40°C \le T_A \le +85°C$ unless otherwise specified.[7]

PARAMETER		TEST CONDITIONS	LM193			LM293/393			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage[5]	$T_A = 25°C$ Over temp.		±2.0	±5.0 ±9.0		±2.0	±5.0 ±9.0	mV
V_{CM}	Input common mode voltage range[6,10]	$T_A = 25°C$ Over temp.	0 0		V±-1.5 V±-2.0	0 0		V±-1.5 V±-2.0	V
V_{IDR}	Differential input voltage[4]	Keep all V_{IN}'s ≥ 0Vdc (or V-if need)			V+			V+	V
I_B	Input bias current[8]	$I_{IN(+)}$ or $I_{IN(-)}$ with output in linear range $T_A = 25°C$ Over temp.		25	100 300		25	250 400	nA
I_{OS}	Input offset current	$I_{IN(+)} - I_{IN(-)}$ $T_A = 25°C$ Over temp.		±3.0	±25 ±100		±5.0	±50 ±150	nA nA
I_{OL}	Output sink current	$V_{IN(-)} \ge 1Vdc$, $V_{IN(+)} = 0$, $V_O \le 1.5Vdc$, $T_A = 25°C$	6.0	16		6.0	16		mA
I_{OH}	Output leakage current	$V_{IN(+)} \ge 1Vdc$, $V_{IN(-)} = 0$, $V_O = 5Vdc$, $T_A = 25°C$ $V_O = 30Vdc$, over temp.		0.1	1.0		0.1	1.0	nA μA
I_{CC}	Supply current	$R_L = \infty$ on both comparators $T_A = 25°C$ V+ = 30V, over temp.		0.8	1 2.5		0.8	1 2.5	mA
A_V	Voltage gain	$R_L \ge 15K\Omega$, V+ = 15Vdc	50	200		50	200		V/mV
V_{OL}	Saturation voltage	$V_{IN(-)} \ge 1Vdc$, $V_{IN(+)} = 0$, $I_{SINK} \le 4mA$ $T_A = 25°C$ Over temp.		250	400 700		250	400 700	mV
T_{LSR}	Large signal response time	V_{IN} = TTL logic swing, V_{REF} = 1.4Vdc, V_{RL} = 5Vdc, $R_L = 5.1k\Omega$, $T_A = 25°C$		300			300		ns
T_R	Response time[9]	V_{RL} = 5Vdc, $R_L = 5.1k\Omega$, $T_A = 25°C$		1.3			1.3		μs

NOTES

1. For operating at high temperatures, the LM393/393A and LM2903 must be derated based on a 125°C maximum junction temperature and a thermal resistance of 175°C/W which applies for the device soldered in a printed circuit board, operating in a still air ambient. The LM193/193A/293/293A must be derated based on a 150°C maximum junction temperature. The low bias dissipation and the "On-Off" characteristics of the outputs keeps the chip dissipation very small ($P_D \le 100mW$), provided the output transistors are allowed to saturate.
2. Short circuits from the output to V+ can cause excessive heating and eventual destruction. The maximum output current is approximately 20mA independent of the magnitude of V+.
3. This input current will only exist when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistors becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also lateral NPN parasitic transistor action on the IC chip. This transistor action can cause the output voltages of the comparators to go to the V+ voltage level (or to ground for a large overdrive) for the time duration that an input is driven negative. This is not destructive and normal output states will re-establish when the input voltage, which was negative, again returns to a value greater than -0.3Vdc.
4. Positive excursions of input voltage may exceed the power supply level. As long as the other voltage remains within the common-mode range, the comparator will provide a proper output state. The low input voltage state must not be less than -0.3Vdc (Vdc below the magnitude of the negative power supply, if used).
5. At output switch point, $V_O \cong 1.4Vdc$, $R_S = 0\Omega$ with V+ from 5Vdc to 30Vdc; and over the full input common-mode range (0Vdc to V+ -1.5Vdc).
6. The input common-mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V+ -1.5V, but either or both inputs can go to 30Vdc without damage.
7. With the LM293/293A, all temperature specifications are limited to $-25°C \le T_A \le +85°C$ and the LM393/393A, all temperature specifications are limited to $0°C \le T_A \le +70°C$. The LM2903 is limited to $-40°C \le T_A \le 85°C$.
8. The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the reference or input lines.
9. The response time specified is for a 100mV input step with a 5mV overdrive.
10. For input signals that exceed V_{CC}, only the overdriven comparator is affected. With a 5V supply, V_{IN} should be limited to 25V max., and a limiting resistor should be used on all inputs that might exceed the positive supply.

NE521-F,N
SE521-F

FEATURES

- 12ns maximum guaranteed propagation delay
- 20μA maximum input bias current
- TTL compatible strobes and outputs
- Large common mode input voltage range
- Operates from standard supply voltages
- Military qualifications pending

APPLICATIONS

- MOS memory sense amp
- A-to-D conversion
- High speed line receiver

PIN CONFIGURATION

F,N PACKAGE

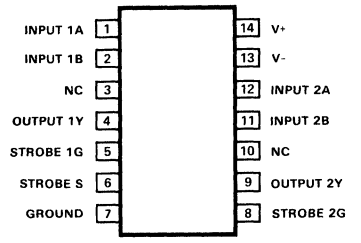

Order Part No.
NE521 F,N
SE521 F

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
	Supply voltage		V
V+	Positive	+7	
V-	Negative	-7	
V_{IDR}	Differential input voltage	±6	V
V_{IN}	Input voltage		V
	Common mode	±5	
	Strobe/gate	+5.25	
P_D	Power dissipation	600	mW
T_A	Operating temperature range		
	NE	0 to 70	°C
	SE	-55 to +125	
T_{stg}	Storage temperature range	-65 to +150	°C
	Lead temperature (solder, 60 sec)	+300	°C

BLOCK DIAGRAM

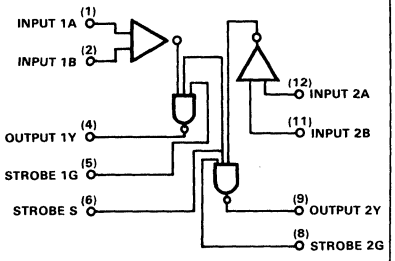

EQUIVALENT SCHEMATIC

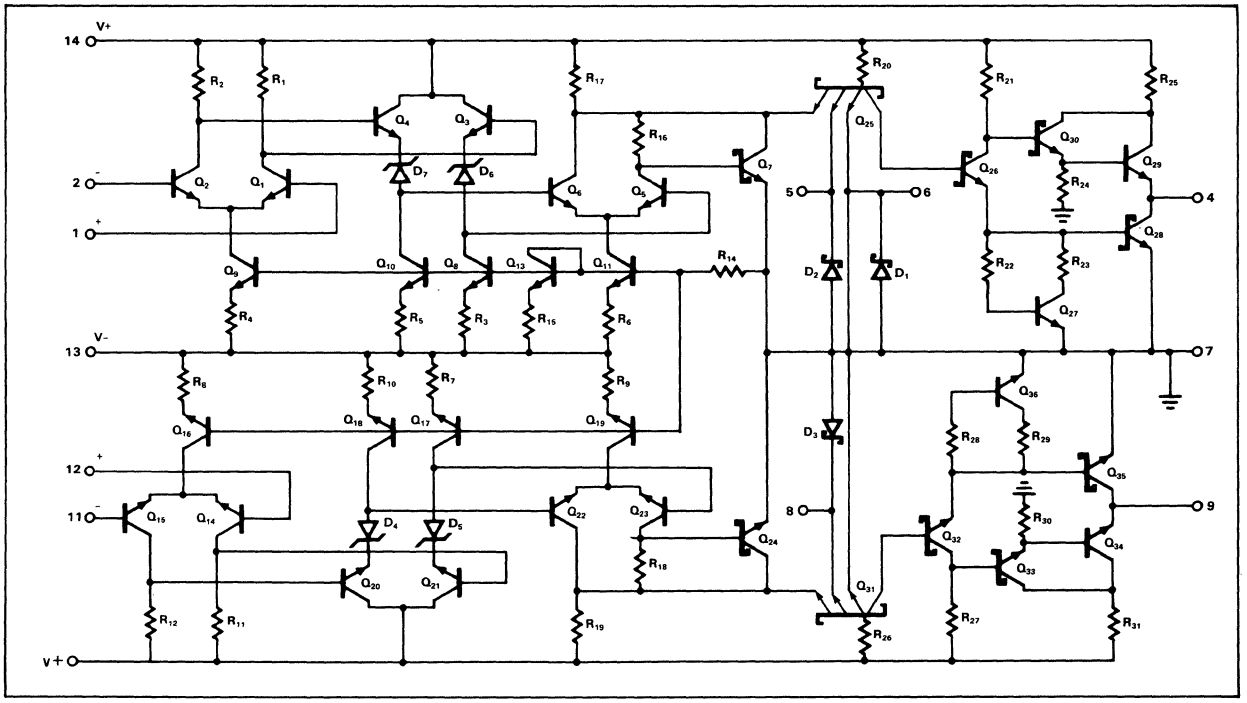

NE521-F,N
SE521-F

DC ELECTRICAL CHARACTERISTICS $V+ = +5V$, $V- = -5V$, $T_A = -55$ to $+125°C$ unless otherwise specified

PARAMETER		TEST CONDITIONS	SE LIMITS			UNITS
			Min	Typ	Max	
V_{OS}	Input offset voltage At 25°C Over temperature range	V+ = +4.5V, V- = -4.5V		 6	 7.5 15	mV
I_{BIAS}	Input bias current At 25°C Over temperature range	V+ = +5.5V, V- = -5.5V		 7.5	 20 40	μA
I_{OS}	Input offset current At 25°C Over temperature range	V+ = +5.5V, V- = -5.5V		 1.0	 5 12	μA
V_{CM}	Common mode voltage range	V+ = +4.5V, V- = -4.5V	±3			V
V_{IL}	Low level input voltage At 25°C Over temperature				 0.8 0.7	V
V_{IH}	High level input voltage		2.0			V
I_{IH}	Input current High	V+ = +5.5V, V- = -5.5V V_{IH} = 2.7V 1G or 2G strobe Common strobe S			 50 100	 μA μA
I_{IL}	Low	V_{IL} = 0.5V 1G or 2G strobe Common strobe S			 -2.0 -4.0	 mA mA
V_{OH} V_{OL}	Output voltage High Low	$V_{I(S)}$ = 2.0V V+ = +4.5V, V- = -4.5V, I_{LOAD} = -1mA V+ = +4.5V, V- = -4.5V, I_{LOAD} = 10mA $T_A = 25°C$, $I_{LOAD} = 20mA$	 2.5	 3.4	 0.5 0.5	V
 V+ V-	Supply voltage Positive Negative		 4.5 -4.5	 5.0 -5.0	 5.5 -5.5	V
 I_{CC+} I_{CC-}	Supply current Positive Negative	V+ = 5.5V, V- = -5.5V, T_A = 25°C		 27 -15	 50 -28	mA
I_{SC}	Short circuit output current		-35		-115	μA

NE521-F,N
SE521-F

DC ELECTRICAL CHARACTERISTICS (Cont'd) V+ = +5V, V- = -5V, T_A = 0 to 70°C unless otherwise specified

PARAMETER		TEST CONDITIONS	NE LIMITS			UNITS
			Min	Typ	Max	
V_{OS}	Input offset voltage At 25°C Over temperature range	V+ = +4.75V, V- = -4.75V		 6	 7.5 10	mV
I_{BIAS}	Input bias current At 25°C Over temperature range	V+ = +5.25V, V- = -5.25V		 7.5	 20 40	µA
I_{OS}	Input offset current At 25°C Over temperature range	V+ = +5.25V, V- = -5.25V		 1.0	 5 12	µA
V_{CM}	Common mode voltage range	V+ = +4.75V, V- = -4.75V	±3			V
I_{IH}	Input current High	V+ = +5.25V, V- = -5.25V V_{IH} = 2.7V 1G or 2G strobe Common strobe S			 50 100	 µA µA
I_{IL}	Low	V_{IL} = 0.5V 1G or 2G strobe Common strobe S			 -2.0 -4.0	 mA mA
V_{OH} V_{OL}	Output voltage High Low	$V_{I(S)}$ = 2.0V V+ = +4.75V, V- = -4.75V, I_{LOAD} = -1mA V+ = +5.25V, V- = -5.25V, I_{LOAD} = 20mA	 2.7	 3.4	 0.5	V
V+ V-	Supply voltage Positive Negative		 4.75 -4.75	 5.0 -5.0	 5.25 -5.25	V
I_{CC+} I_{CC-}	Supply current Positive Negative	V+ = 5.25V, V- = -5.25V, T_A = 25°C		 27 -15	 50 -28	mA
I_{SC}	Short circuit output current		-40		-100	µA

AC ELECTRICAL CHARACTERISTICS T_A = 25°C, R_L = 280Ω C_L = 15pF V+ = +5V V- = -5V

PARAMETER		FROM INPUT	TO OUTPUT	LIMITS			UNIT
				Min	Typ	Max	
Large Signal Switching Speed							
	Propagation delay						ns
$t_{PLH(D)}$	Low to high[1]	Amp	Output		8	12	
$t_{PHL(D)}$	High to low[1]	Amp	Output		6	9	
$t_{PLH(S)}$	Low to high[2]	Strobe	Output		4.5	10	
$t_{PHL(S)}$	High to low[2]	Strobe	Output		3.0	6	
	Maximum operating frequency			40	55		MHz

NOTES
1. Response time measured from 0V point of ±100mV p-p 10MHz square wave to the 1.5V point of the output
2. Response time measured from 1.5V point of input to 1.5V point of the output

NE521-F,N
SE521-F

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

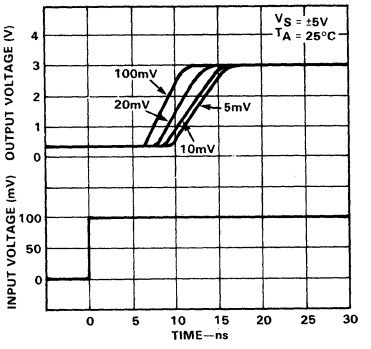

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

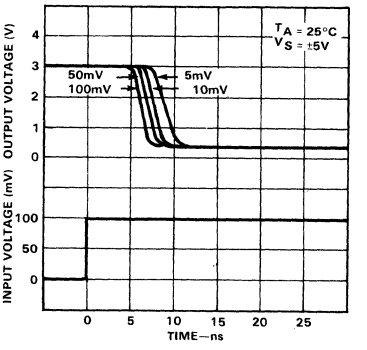

RESPONSE TIME vs TEMPERATURE

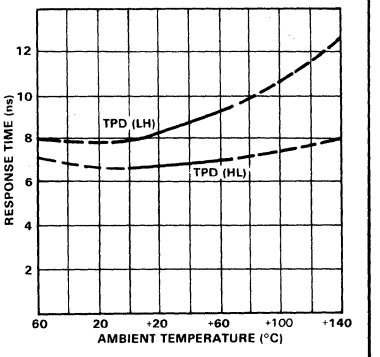

PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGE

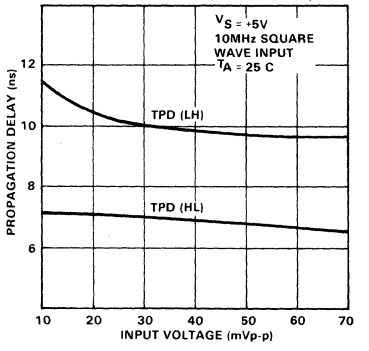

PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

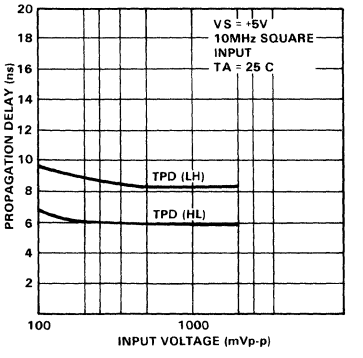

OUTPUT VOLTAGE vs AMBIENT TEMPERATURE

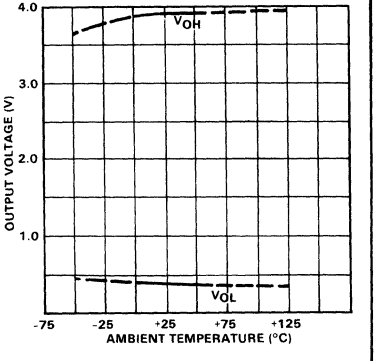

INPUT BIAS CURRENT vs AMBIENT TEMPERATURE

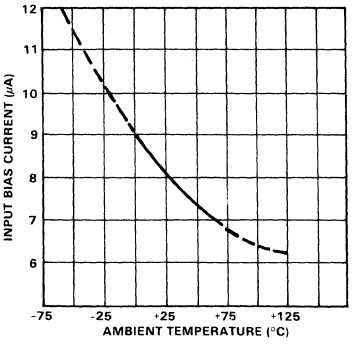

INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE

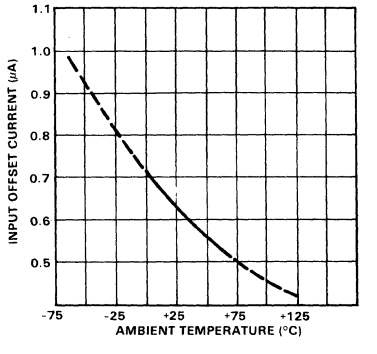

NE522-F,N • SE522-F

FEATURES

- 15ns maximum guaranteed propagation delay
- 20μA maximum input bias current
- TTL compatible strobes and outputs
- Open collector output for wire-OR'd applications
- Large common mode input voltage range
- Operates from standard supply voltages

APPLICATIONS

- MOS memory sense amp
- A-to-D conversion
- High speed line receiver

PIN CONFIGURATION

F,N PACKAGE

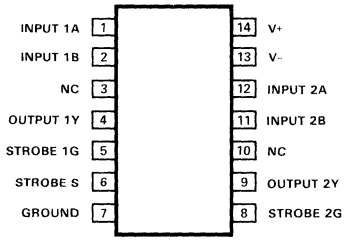

Order Part No.

NE522 F,N
SE522 F

BLOCK DIAGRAM

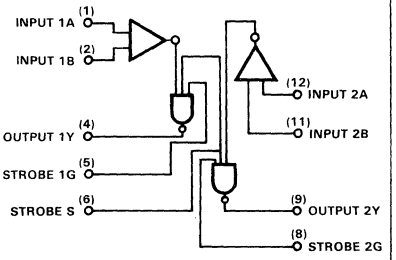

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
	Supply voltage		V
V+	Positive	+7	
V-	Negative	-7	
V_{IDR}	Differential input voltage	±6	V
V_{IN}	Input voltage		V
	Common mode	±5	
	Strobe/gate	±5.25	
P_D	Power dissipation	600	mW
T_A	Operating temperature range NE	0 to 70	°C
	SE	-55 to +125	
T_{stg}	Storage temperature range	-65 to +150	°C
	Lead temperature (solder, 60 sec)	+300	°C

EQUIVALENT SCHEMATIC

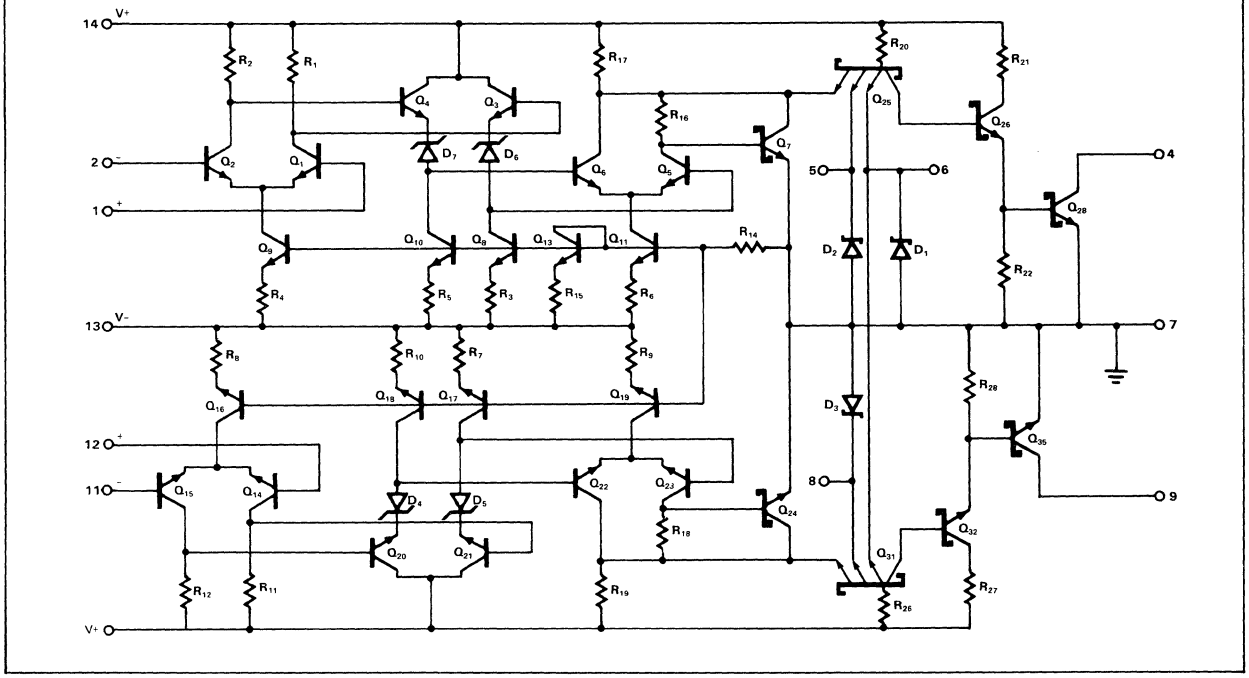

DC ELECTRICAL CHARACTERISTICS ±5V ±10%, T_A = -55 to 125°C unless otherwise specified

PARAMETER		TEST CONDITIONS	SE LIMITS			UNIT
			Min	Typ	Max	
V_{OS}	Input offset voltage At 25°C Over temperature range	V+ = +4.5V, V- = -4.5V		 6	 7.5 15.	mV
I_{BIAS}	Input bias current At 25°C Over temperature range	V+ = +5.5V, V- = -5.5V		 7.5	 20. 40.	µA
I_{OS}	Input offset current At 25°C Over temperature range	V+ = +5.5V, V- = -5.5V		 1.0	 5. 12.	µA
V_{CM}	Common mode voltage range	V+ = +4.5V, V- = -4.5V	±3			V
V_{IL}	Low level input Voltage at 25°C over temperature				 .08 .07	V
V_{IH}	High level temperature		2.0			V
I_{IH}	Input current High	V+ = +5.5V, V- = -5.5V V_{IH} = 2.7V 1G or 2G strobe Common strobe S			 50 100	 µA µA
I_{IL}	Low	V_{IL} = 0.5V 1G 2G strobe Common strobe S			 -2 -4	 mA mA
V_{OL}	Output voltage Low	V+ = +4.5V, V- = -4.5V I_{OL} = 20mA, T_A = 25°C I_{OL} = 10mA			 .5 .5	V
I_{OH}	Output current High	V_{CC+} = +4.5, V_{CC-} = -4.5V, V_{OH} = 5.5V			 250	µA
V+ V-	Supply voltage Positive Negative		4.5 -4.5	5.0 -5.0	5.5 -5.5	V
I_{CC+} I_{CC-}	Supply current Positive Negative	V+ = 5.5V, V- = -5.5V		 27 -15	 50 -28	mA

DC ELECTRICAL CHARACTERISTICS (Cont'd) ±5V ±5%, T_A = 0 to 70°C unless otherwise specified

PARAMETER		TEST CONDITIONS	NE LIMITS			UNIT
			Min	Typ	Max	
V_{OS}	Input offset voltage At 25°C Over temperature range	V+ = +4.75V, V- = -4.75V		 6	 7.5 10	mV
I_{BIAS}	Input bias current At 25°C Over temperature range	V+ = +5.25V, V- = -5.25V		 7.5	 20 40	μA
I_{OS}	Input offset current At 25°C Over temperature range	V+ = +5.25V, V- = -5.25V		 1.0	 5 12	μA
V_{CM}	Common mode voltage range	V+ = +4.75V, V- = -4.75V	±3			V
I_{IH}	Input current High	V+ = +5.25V, V- = -5.25V V_{IH} = 2.7V 1G or 2G strobe Common strobe S			 50 100	 μA μA
I_{IL}	Low	V_{IL} = 0.5V 1G 2G strobe Common strobe S			 -2.0 -4.0	 mA mA
V_{OL}	Output voltage Low	V+ = +5.25V, V- = -5.25V, $V_{I\,(S)}$ = 2.0V I_{LOAD} = 20mA			 0.5	V
I_{OH}	Output current High	V_{CC+} = +4.75, V_{CC-} = -4.75V, V_{OH} = 5.25V			 250	μA
V+ V-	Supply voltage Positive Negative		 4.75 -4.75	 5.0 -5.0	 5.25 -5.25	V
I_{CC+} I_{CC-}	Supply current Positive Negative	V+ = 5.25V, V- = -5.25V, T_A = 25°C		 27 -15	 50 -28	mA

AC ELECTRICAL CHARACTERISTICS T_A = 25°C, R_L = 280Ω, C_L = 15pF

PARAMETER		FROM INPUT	TO OUTPUT	LIMITS			UNIT
				Min	Typ	Max	
	Input resistance				4		kΩ
	Input capacitance				3		pF
Large Signal Switching Speed							
	Propagation delay						ns
$t_{PLH(D)}$	Low to high[1]	Amp	Output		10	15	
$t_{PHL(D)}$	High to low[1]	Amp	Output		8	12	
$t_{PLH(S)}$	Low to high[2]	Strobe	Output		6	13	
$t_{PHL(S)}$	High to low[2]	Strobe	Output		5	9	
	Maximum operating frequency			25	35		MHz

NOTES

1. Response time measured from 0V point of ±100mV p-p 10MHz square wave to the 1.5V point of the output
2. Response time measured from 1.5V point of input to 1.5V point of the output

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

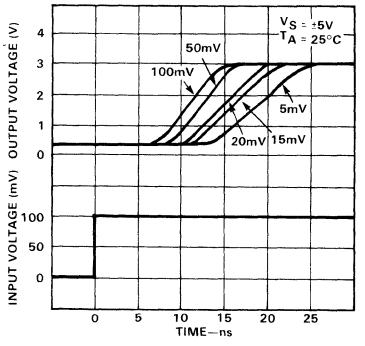

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

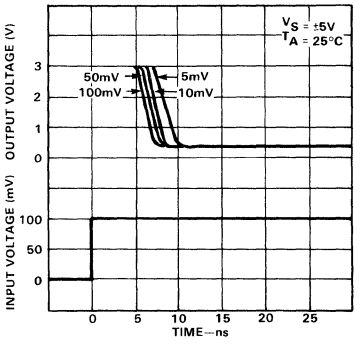

RESPONSE TIME vs TEMPERATURE

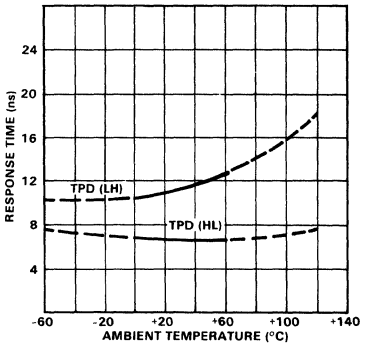

PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

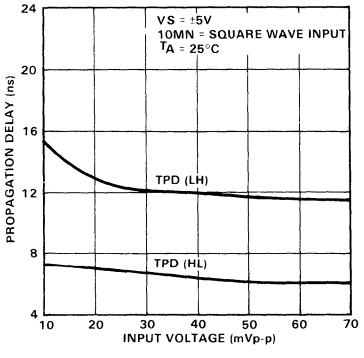

PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

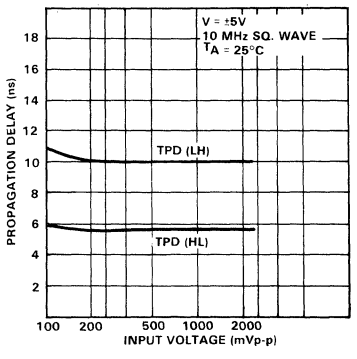

INPUT BIAS CURRENT vs AMBIENT TEMPERATURE

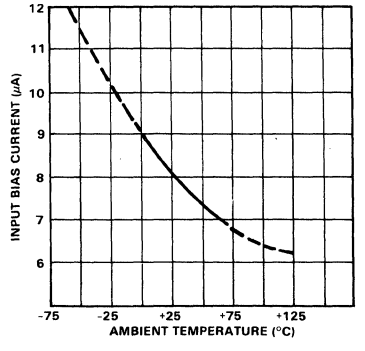

INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE

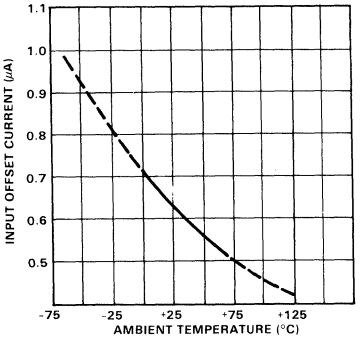

NE527-F,H,N/SE527-F,H

DESCRIPTION

The SE/NE527 is a high speed analog voltage comparator which, in the first time mates state-of-the-art Schottky diode technology with the conventional linear process. This allows simultaneous fabrication of high speed T²L gates with a precision linear amplifier on a single monolithic chip. The SE/NE527 is similar in design to the Signetics SE/NE529 voltage comparator except that it incorporates a "Emitter Follower" input stage for extremely low input currents. This opens the door to a whole new range of applications for analog voltage comparators.

FEATURES

- **15ns propagation delay**
- **Complementary output gates**
- **TTL or ECL compatible outputs**
- **Wide common mode and differential voltage range**
- **Mil std 883A,B,C available**

APPLICATIONS

- **A/D conversion**
- **ECL to TTL interface**
- **TTL to ECL interface**
- **Memory sensing**
- **Optical data coupling**

BLOCK DIAGRAM

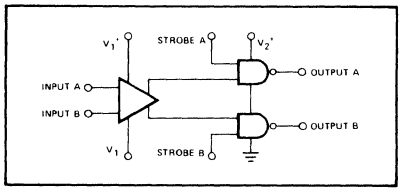

PIN CONFIGURATIONS

F,N PACKAGE



H PACKAGE *



*Metal cans (H) not recommended for new designs

EQUIVALENT SCHEMATIC

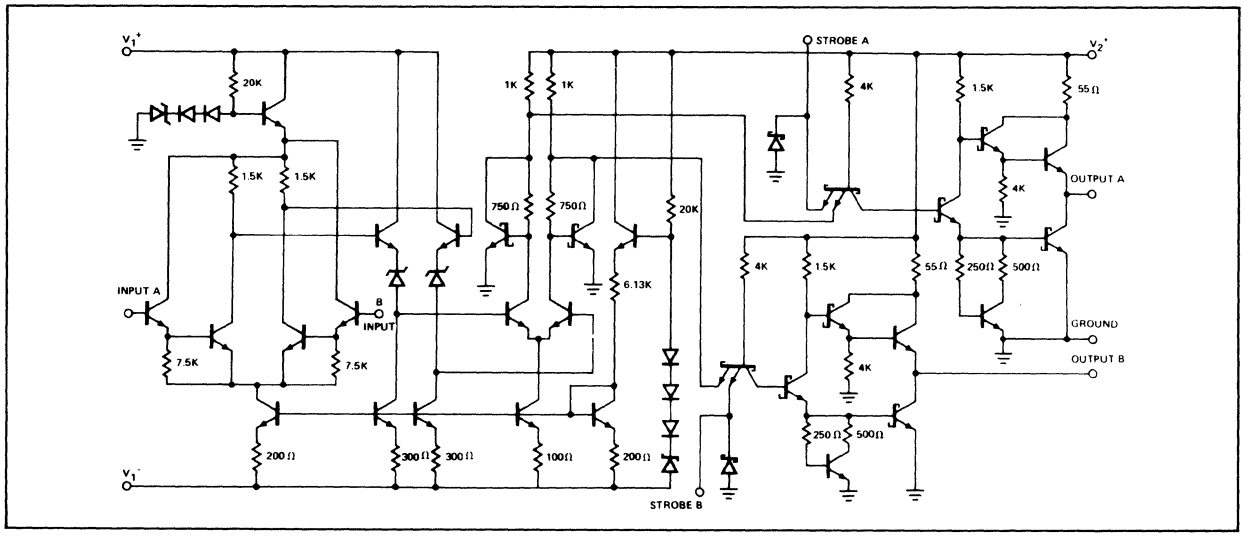

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V1+)	+15	V
Negative supply voltage (V1-)	-15	V
Gate supply voltage (V2+)	+7	V
Output voltage	+15	V
Differential input voltage	±5	V
Input common mode voltage	±6	V
Power dissipation	600	mW
Operating temperature range		
NE527	0 to +70	°C
SE527	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60sec)	+300	°C

DC ELECTRICAL CHARACTERISTICS $V_1^+ = 10V$, $V_1^- = -10V$, $V_2^+ = +5.0V$

PARAMETER	TEST CONDITIONS	SE527			NE527			UNIT
		Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS								
Input offset voltage @ 25°C				4			6	mV
Over temperature range				6			10	mV
Input bias current @ 25°C				2			2	μA
Over temperature range				4			4	μA
Input offset current @ 25°C				0.5			0.75	μA
Over temperature range	$V_{IN} = 0V$			1			1	μA
GATE CHARACTERISTICS								
Output voltage								
"1" State	$V_2^+ = 4.75V$, $I_{SOURCE} = -1mA$	2.5	3.3		2.7	3.3		V
"0" State	$V_2^+ = 4.75V$, $I_{SINK} = 10mA$			0.5			0.5	V
Strobe inputs								
"0" Input current	$V_2^+ = 5.25V$, $V_{STROBE} = 0.5V$			-2			-2	mA
"1" Input current @ 25°C	$V_2^+ = 5.25V$, $V_{STROBE} = 2.7V$			50			100	μA
Over temperature range	$V_2^+ = 5.25V$, $V_{STROBE} = 2.7V$			200			200	μA
"0" Input voltage	$V_2^+ = 4.75V$			0.8			0.8	V
"1" Input voltage	$V_2^+ = 4.75V$	2.0			2.0			V
Short circuit								
Output current	$V_2^+ = 5.25V$, $V_{OUT} = 0V$	-18		-70	-18		-70	mA
POWER SUPPLY REQUIREMENTS								
Supply voltage								
V_1^+		5		10	5		10	V
V_1^-		-6		-10	-6		-10	V
V_2^+		4.5	5	5.5	4.75	5	5.25	V
Supply current	$V_1^+ = 10V$, $V_1^- = -10V$							
	$V_2^+ = 5.25V$							
I_1^+	Over temp.			5			5	mA
I_1^-	Over temp.			10			10	mA
I_2^+	Over temp.			20			20	mA

*NOTE

Parameters are guaranteed over the temperature range unless otherwise specified.

NE527-F,H,N/SE527-F,H

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	LIMITS			UNIT
		Min	Typ	Max	
Transient response propagation delay time	$V_{IN} = \pm 100mV$ step				
t_{PLH}			16	26	ns
t_{PHL}			14	24	ns
Delay between output A and B			2	5	ns
Strobe delay time					
t_{on} Turn-on time			6		ns
t_{off} Turn-off time			6		ns

5

TYPICAL PERFORMANCE CHARACTERISTICS

INPUT CURRENTS vs TEMPERATURE



SUPPLY CURRENT vs TEMPERATURE



POWER DISSIPATION vs SUPPLY VOLTAGE



SUPPLY CURRENT vs SUPPLY VOLTAGE



OUTPUT PROPAGATION DELAYS



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES



APPLICATIONS

One of the main features of the device is that supply voltages (V1+, V1-) need not be balanced, as indicated in the following diagrams. For proper operation, however, negative supply (V1-) should always be at least six volts more negative than the ground terminal (pin 6). Input Common Mode range should be limited to values of two volts less than the supply voltages (V1+ and V1-) up to a maximum of ±6 volts as supply voltages are increased.

It is also important to note that Output A is in phase with Input A and Output B is in phase with Input B.

TYPICAL APPLICATIONS

PHOTODIODE DETECTOR



ECL TO TTL INTERFACE

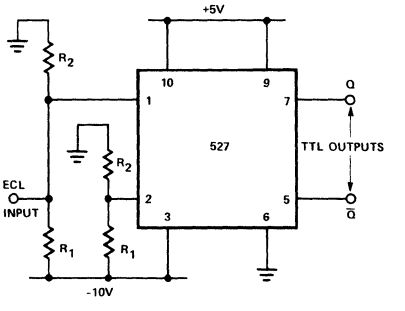

MOS MEMORY SENSE AMP

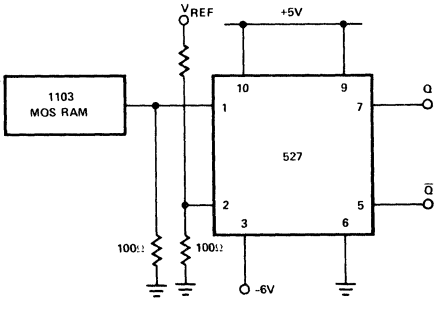

TTL TO ECL INTERFACE

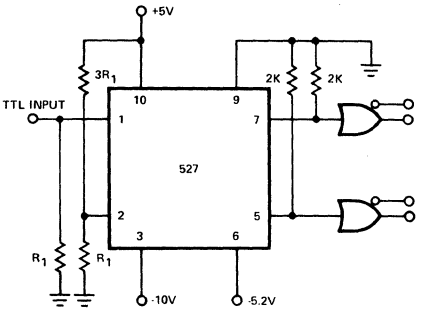

NE529-F,H,N/SE529-F,H

DESCRIPTION

The SE/NE529 is a high speed analog voltage comparator which, for the first time mates state-of-the-art Schottky diode technology with the conventional linear process. This allows simultaneous fabrication of high speed T²L gates with a precision linear amplifier on a single monolithic chip.

FEATURES

- **10ns propagation delay**
- **Complementary output gates**
- **TTL or ECL compatible outputs**
- **Wide common mode and differential voltage range**

APPLICATIONS

- **A/D conversion**
- **ECL to TTL interface**
- **TTL to ECL interface**
- **Memory sensing**
- **Optical data coupling**
- **Mil std 883A,B,C available**

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.
NE/SE529F, NE529N

H PACKAGE*



ORDER PART NO.
NE/SE529H
*Metal cans (H) not recommended for new designs

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V1+)	+15	V
Negative supply voltage (V1-)	-15	V
Gate supply voltage (V2+)	+7	V
Output voltage	+15	V
Differential input voltage	±5	V
Input common mode voltage	±6	V
Power dissipation	600	mW
Operating temperature range		
NE529	0 to +70	°C
SE529	-55 to +125	°C
Storage temperature range	-65 to +150	°C
Lead temperature		
(soldering, 60 sec)	+300	°C

BLOCK DIAGRAM



EQUIVALENT SCHEMATIC

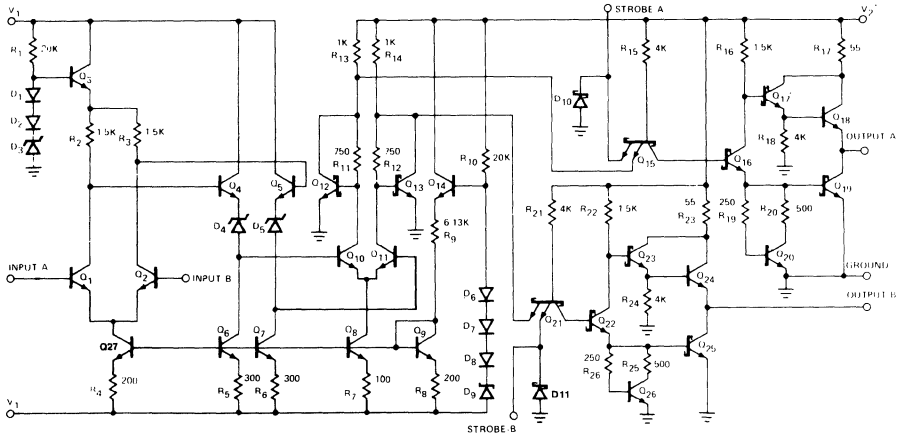

DC ELECTRICAL CHARACTERISTICS $V_1+ = +10V, V_2+ = +5.0V, V_1- = -10V$

PARAMETER	TEST CONDITIONS	SE529			NE529			UNIT
		Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS								
Input offset voltage @25°C				4			6	mV
Over temperature range				6			10	mV
Input bias current @25°C			5	12		5	20	μA
Over temperature range	V_{IN} = 0V			36			50	μA
Input offset current @25°C			2	3		2	5	μA
Over temperature range	V_{IN} = 0V			9			15	μA
GATE CHARACTERISTICS								
Output voltage								
"1" state	$V_2+ = 4.75V, I_{source} = -1mA$	2.5	3.3		2.7	3.3		V
"0" state	$V_2+ = 4.75V, I_{sink} = 10mA$			0.5			0.5	V
Strobe inputs								
"0" input current	$V_2+ = 5.25V, V_{strobe} = 0.5V$			-2			-2	mA
"1" input current @25°C	$V_2+ = 5.25V, V_{strobe} = 2.7V$			50			100	μA
Over temperature range	$V_2+ = 5.25V, V_{strobe} = 2.7V$			200			200	μA
"0" input voltage	$V_2+ = 4.75V$			0.8			0.8	V
"1" input voltage	$V_2+ = 4.75V$	2.0			2.0			V
Short circuit								
Output current	$V_2+ = 5.25V, V_{OUT} = 0V$	-18		-70	-18		-70	mA
POWER SUPPLY REQUIREMENTS								
Supply voltage								
V_1+		5		10	5		10	V
V_1-		-6		-10	-6		-10	V
V_2+		4.5	5	5.5	4.75	5	5.25	V
Supply current	$V_1+ = 10V, V_1- = -10V$ $V_2+ = 5.25V$							
I_1+	Over temp.			5			5	mA
I_1-	Over temp.			10			10	mA
I_2+	Over temp.			20			20	mA

Parameters are guaranteed over the temperature range unless otherwise specified.

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$

PARAMETER	TEST CONDITIONS	LIMITS			UNIT
		Min	Typ	Max	
Transient response	$V_{IN} = \pm 100mV$ step				
Propagation delay time					
t_{PLH}			12	22	ns
t_{PHL}			10	20	ns
Delay between output A and B			2	5	ns
Strobe delay time					
t_{ON} turn-on time			6		ns
t_{OFF} turn-off time			6		ns

TYPICAL PERFORMANCE CHARACTERISTICS

INPUT CURRENTS vs TEMPERATURE



SUPPLY CURRENT vs TEMPERATURE



POWER DISSIPATION vs SUPPLY VOLTAGE



SUPPLY CURRENT vs SUPPLY VOLTAGE



OUTPUT PROPAGATION DELAYS



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES



APPLICATIONS

One of the main features of the device is that supply voltages (V1+, V1-) need not be balanced, as indicated in the following diagrams. For proper operation, however, negative supply (V1-) should always be at least six volts more negative than the ground terminal (pin 6). Input Common Mode range should be limited to values of two volts less than the supply voltages (V1+ and V1-) up to a maximum of ±6 volts as supply voltages are increased.

It is also important to note that Output A is in phase with Input A and Output B is in phase with Input B.

TYPICAL APPLICATIONS

PHOTODIODE DETECTOR



ECL TO TTL INTERFACE

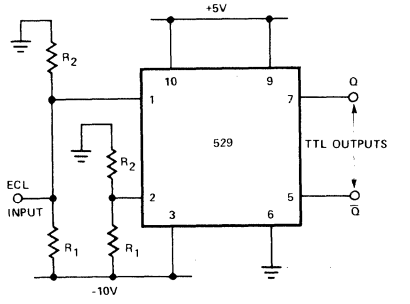

MOS MEMORY SENSE AMP

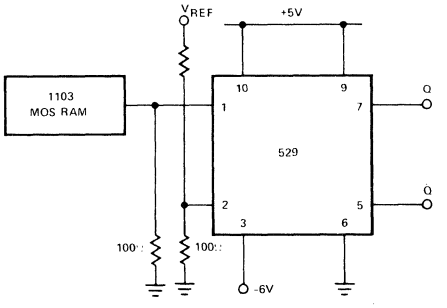

TTL TO ECL INTERFACE

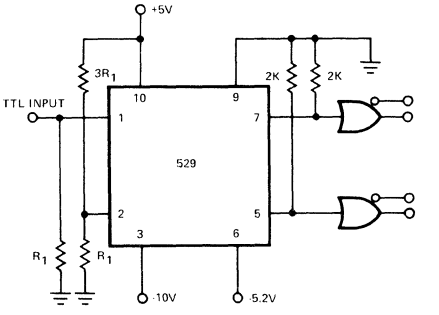

SECTION 6
MICROPROCESSOR INTERFACE

Section 6—MICROPROCESSOR INTERFACE

NE590/591 Addressable Peripheral Drivers 225

NE590-F,N • NE591-F,N

DESCRIPTION

The NE590/591 addressable peripheral drivers are high current latched drivers, similar in function to the 9334 address decoder. The device has 8 Darlington power outputs, each capable of 250mA load current. The outputs are turned on or off by respectively loading a logic high or logic low into the device data input. The required output is defined by a 3-bit address. The device must be enabled by a $\overline{CE}$ input line which also serves the function of further address decoding. A common clear input, $\overline{CLR}$, turns all outputs off when a logic low is applied.

The NE590 has 8 open collector Darlington outputs which sink current to ground. The device is packaged in a 16-pin molded or cerdip package.

The NE591 has 8 open emitter Darlington outputs which source current to an external load from a common collector line, V_S. This V_S line need not necessarily be the same as the 5 volt V_{CC} supply. The device is packaged in an 18-pin molded or cerdip package.

FEATURES

- **8 high current outputs**
- **Low-loading bus compatible inputs**
- **Power-on clear ensures safe operation**
- **NE590 will operate in addressable or demultiplex mode**
- **Allows random (addressed) data entry**
- **Easily expandable**
- **NE590 is pin compatible with 9334**

APPLICATIONS

- **Relay driver**
- **Indicator lamp driver**
- **Triac trigger**
- **LED display digit driver**
- **Stepper motor driver**

PIN CONFIGURATIONS

NE590
F,N PACKAGE



NE591
F,N PACKAGE



PIN DESIGNATION

590 PIN NO.	591 PIN NO.	SYMBOL	NAME & FUNCTION
1-3	2-4	A_0-A_2	A 3-bit binary address on these pins defines which of the 8 output latches is to receive the data.
4-7, 9-12	5-8, 11-14	Q_0-Q_7	The 8 device outputs. The NE590 has open collector Darlington outputs. The NE591 has open emitter follower outputs.
13	15	D	The data input. When the chip is enabled, this data bit is transferred to the defined output such that: "1" turns output switch "ON" "0" turns output switch "OFF" Thus in logic terms, the NE590 inverts data to the relevant output. The NE591 retains true data at the output.
14	16	$\overline{CE}$	The chip enable. When this input is low, the output latches will accept data. When $\overline{CE}$ goes high, all outputs will retain their existing state, regardless of address or data input conditions.
15	17	$\overline{CLR}$	The clear input. When $\overline{CLR}$ goes low all output switches are turned "OFF". On the NE590, a high data input will override the clear function on the addressed latch. On the NE591, $\overline{CLR}$ low will override any other condition.
—	1	$\overline{CS}$	The chip select input provides for an additional level of address decoding.
—	10	V_S	The V_S line provides the power to all 8 output devices. It is connected to the collectors of all 8 output transistors. This pin may be connected to the V_{CC} or another supply.

TRUTH TABLE (NE590)

INPUTS						OUTPUTS								MODE
$\overline{CLR}$	$\overline{CE}$	D	A_0	A_1	A_2	Q_0	Q_1	Q_2	Q_3	Q_4	Q_5	Q_6	Q_7	
L	H	X	X	X	X	H	H	H	H	H	H	H	H	Clear
L	L	L	L	L	L	H	H	H	H	H	H	H	H	Demultiplex
L	L	H	L	L	L	L	H	H	H	H	H	H	H	
L	L	L	H	L	L	H	H	H	H	H	H	H	H	
L	L	H	H	L	L	H	L	H	H	H	H	H	H	
L	L	L	H	H	H	H	H	H	H	H	H	H	H	
L	L	H	H	H	H	H	H	H	H	H	H	H	L	
H	H	X	X	X	X	Q_{N-1} →								Memory
H	L	L	L	L	L	H Q_{N-1} →								Addressable Latch
H	L	H	L	L	L	L Q_{N-1} →								
H	L	L	H	L	L	Q_{N-1} H Q_{N-1} →								
H	L	H	H	L	L	Q_{N-1} L Q_{N-1}								
H	L	L	H	H	H	Q_{N-1} → H								
H	L	H	H	H	H	Q_{N-1} → L								

X = Don't care condition
Q_{N-1} = Previous output state
L = Low voltage level/"ON" output state
H = High voltage level/"OFF" output state

TRUTH TABLE (NE591)

INPUTS							OUTPUTS								MODE
$\overline{CLR}$	$\overline{CE}$	$\overline{CS}$	D	A_0	A_1	A_2	Q_0	Q_1	Q_2	Q_3	Q_4	Q_5	Q_6	Q_7	
L	X	X	X	X	X	X	L	L	L	L	L	L	L	L	Clear
H	H	H	X	X	X	X	Q_{N-1} →								Memory
H	H	L	X	X	X	X	Q_{N-1} →								
H	L	H	X	X	X	X	Q_{N-1} →								
H	L	L	L	L	L	L	L Q_{N-1} →								Addressable Latch
H	L	L	H	L	L	L	H Q_{N-1} →								
H	L	L	L	H	L	L	Q_{N-1} L Q_{N-1} →								
H	L	L	H	H	L	L	Q_{N-1} H Q_{N-1} →								
H	L	L	L	H	H	H	Q_{N-1} → L								
H	L	L	H	H	H	H	Q_{N-1} → H								

X = Don't care
Q_{N-1} = Previous output state
L = Low voltage level/"OFF" output state
H = High voltage level/"ON" output state

NE590-F,N • NE591-F,N

BLOCK DIAGRAMS

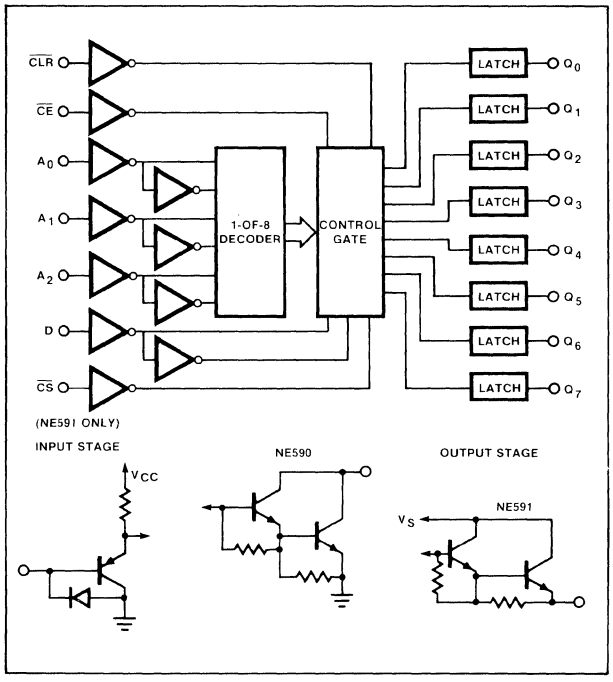

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C unless otherwise specified.

PARAMETER		RATING	UNIT
V_{CC}	Supply voltage	-0.5 to +7	V
V_{IN}	Input voltage	-0.5 to +15	V
V_{OUT}	Output voltage		V
	NE590	0 to +7	
	NE591	0 to V_{CC}	
V_S	Source bus voltage		V
	NE591 only	-0.5 to +7	
V_S-V_{CC}	Source/supply differential voltage		V
	NE591 only	-5 to +2	
I_{OUT}	Output current		mA
	Each output	300	
	All outputs	1000	
P_D	Power dissipation[1]	1	W
	Temperature range		°C
T_A	Ambient	0 to +70	
T_J	Junction	150	
T_{STG}	Storage	-65 to +150	
T_{sold}	Lead soldering temperature (10sec max)	300	°C

DC ELECTRICAL CHARACTERISTICS

V_{CC} = 4.75 to 5.25V, 0°C ≤ T_A ≤ 70°C unless otherwise specified.[2,3]

PARAMETER		TEST CONDITIONS	LIMITS			UNIT
			Min	Typ	Max	
	Input voltage					V
V_{IH}	High		2.0			
V_{IL}	Low				0.8	
	Output voltage					V
V_{OL}	Low (NE590 only)	I_{OL} = 250mA, T_A = 25°C		1.0	1.3	
		Over temperature			1.5	
V_{OH}	High (NE591 only)	I_{OH} = -250mA, V_{CC} = V_S = 5V	2.9			
	Input current					μA
I_{IH}	High	V_{in} = V_{CC}		0.1	10	
I_{IL}	Low	V_{in} = 0V				
	$\overline{CE}$ input			-25	-60	
	All other inputs			-15	-50	
	Supply current[4]	V_S = V_{CC} = 5V				mA
I_{CCL}	All outputs low					
	NE590			33	50	
	NE591			15	50	
I_{CCH}	All outputs high					
	NE590			15	50	
	NE591			30	50	

NOTES

1. Derate power dissipation as indicated above threshold ambient temperature:
   NE590N at 95°C/W above 55°C
   NE590F at 100°C/W above 50°C
   NE591N at 90°C/W above 60°C
   NE591F at 93°C/W above 57°C
2. All typical values are at V_{CC} = 5V and T_A = 25°C.
3. For the NE591, V_S = V_{CC} in all tests.
4. Supply current for the NE591 is measured with no output load.

SWITCHING CHARACTERISTICS V_{CC} = 5V, T_A = 25°C

PARAMETER	TO	FROM	NE590			NE591			UNIT
			Min	Typ	Max	Min	Typ	Max	
Propagation delay time									ns
t_{PLH} Low to high[5]	Output	$\overline{CE}$		100			70		
t_{PHL} High to low[5]				130			80		
t_{PLH} Low to high[6]	Output	Data		80			60		
t_{PHL} High to low[6]				100			70		
t_{PLH} Low to high[7]	Output	Address		125			70		
t_{PHL} High to low[7]				115			70		
t_{PLH} Low to high[8]	Output	$\overline{CLR}$		80					
t_{PHL} High to low[8]							60		
t_{PLH} Low to high[5]	Output	$\overline{CS}$					70		
t_{PHL} High to low[5]							80		
SWITCHING SET-UP REQUIREMENTS									
$t_{s(H)}$[9]	Chip enable	High data		120			50		ns
$t_{s(L)}$[9]	Chip enable	Low data		120			70		ns
$t_{s(A)}$[10]	Chip enable	Address		-60			-10		ns
$t_{h(H)}$[9]	Chip enable	High data		-60			-60		ns
$t_{h(L)}$[9]	Chip enable	Low data		-60			-20		ns
$t_{s(CS)}$[9]	Chip enable	Low chip select					70		ns
$t_{pw(E)}$ Chip enable pulse width[5]				150			80		ns

NOTES

5. See Turn-On and Turn-Off Delays, Enable to Output and Enable Pulse Width timing diagram.
6. See Turn-On and Turn-Off Delays, Data to Output timing diagram.
7. See Turn-On and Turn-Off Delays, Address to Output timing diagram.
8. See Turn-Off Delay, Clear to Output timing diagram.
9. See Setup and Hold Time, Data to Enable timing diagram.
10. See Setup Time, Address to Enable timing diagram.

TIMING DIAGRAMS

TURN-ON AND TURN-OFF DELAYS, ENABLE TO OUTPUT AND ENABLE PULSE WIDTH

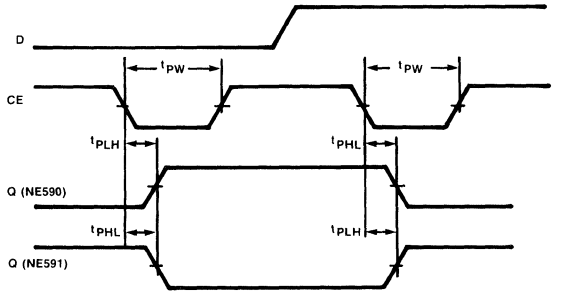

Other Inputs: $\overline{CLR}$ = H, A = Stable, $\overline{CS}$ = L

TURN-ON AND TURN-OFF DELAYS, DATA TO OUTPUT

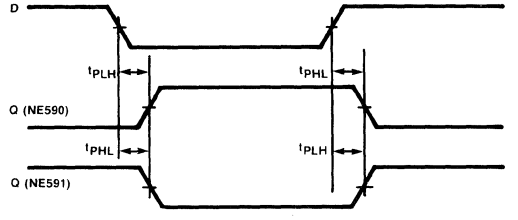

Other Inputs: $\overline{CE}$ = $\overline{CS}$ = L, $\overline{CLR}$ = H, A = Stable

TIMING DIAGRAMS (Cont'd)

TURN-ON AND TURN-OFF DELAYS, ADDRESS TO OUTPUT

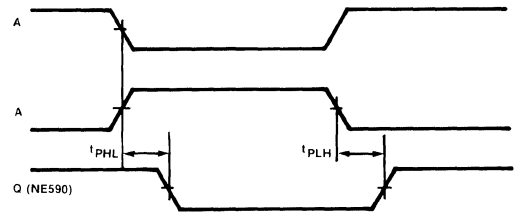

Other Inputs: $\overline{CE}$ = L, $\overline{CLR}$ = L, D = H

TURN-OFF DELAY, CLEAR TO OUTPUT

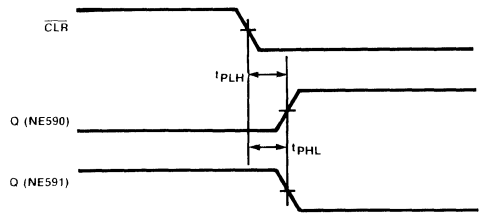

Other Inputs: $\overline{CE}$ = H, $\overline{CS}$ = H

SETUP TIME, ADDRESS TO ENABLE

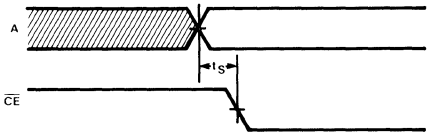

Other Inputs: $\overline{CLR}$ = H, $\overline{CS}$ = L

SETUP AND HOLD TIME, DATA TO ENABLE

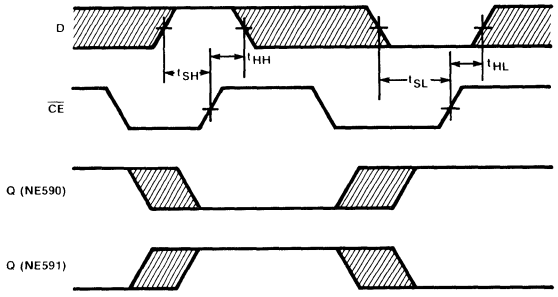

Other Inputs: $\overline{CLR}$ = H, A = Stable, $\overline{CS}$ = L

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE VS LOAD CURRENT (NE590)

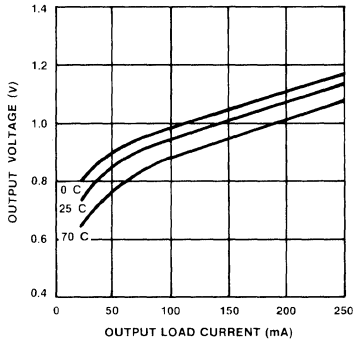

OUTPUT VOLTAGE DROP VS LOAD CURRENT (NE591)

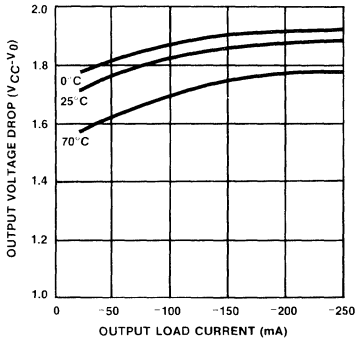

TYPICAL APPLICATIONS

INTERFACING THE 590/591 WITH A MICROPROCESSOR SYSTEM

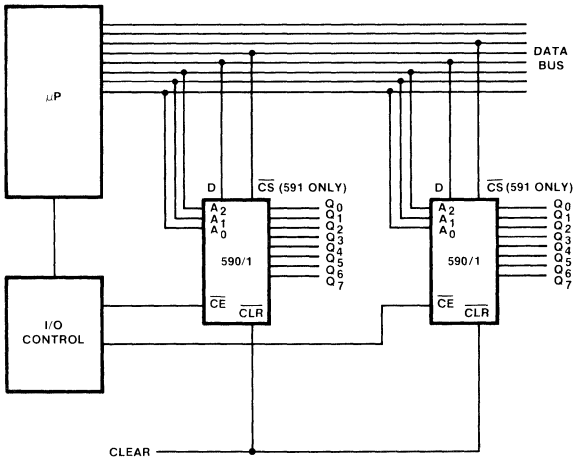

A_0, A_1, A_2, and $\overline{CS}$ may be connected to the address bus if permitted by system design.

TYPICAL APPLICATIONS (Cont'd)

NE590 DRIVING SIMPLE LOADS

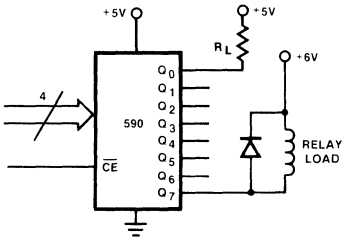

NE591 DRIVING SIMPLE LOADS

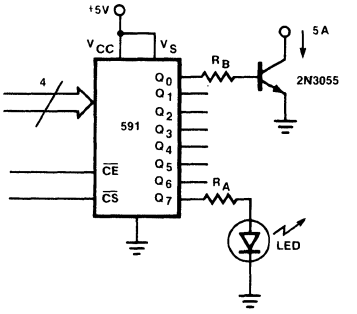

NE590 OPERATING IN DEMULTIPLEX MODE

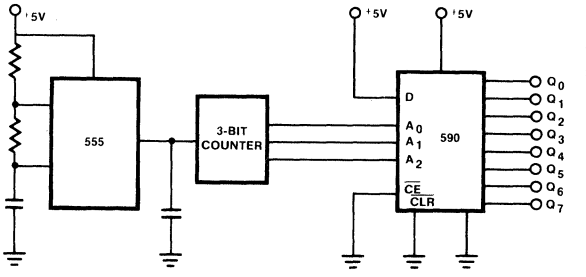

NE591 OPERATING IN DEMULTIPLEX MODE

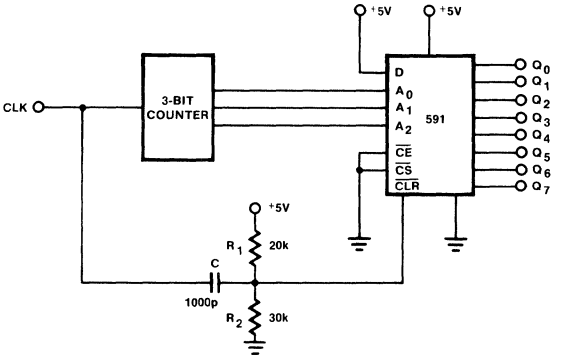

For display applications, interdigit blanking is provided by time constant $\tau = C(R_1/R_2) \approx 10\mu s$ with values shown.

NE591 DRIVING HIGH CURRENT (5A) TRANSISTORS

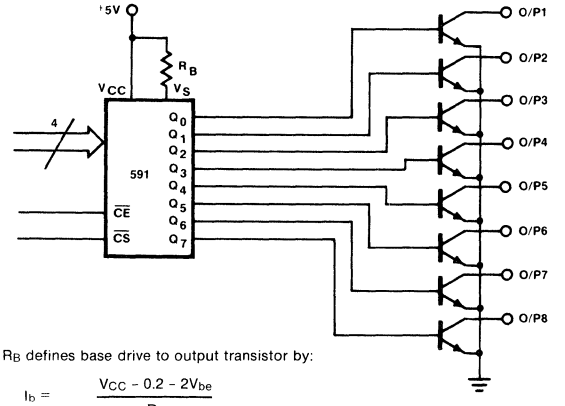

R_B defines base drive to output transistor by:

$$I_b = \frac{V_{CC} - 0.2 - 2V_{be}}{R_b}$$

provided that only one output is ON at any time.

NE591 AS THE DIGIT DRIVER IN A LED DISPLAY SYSTEM

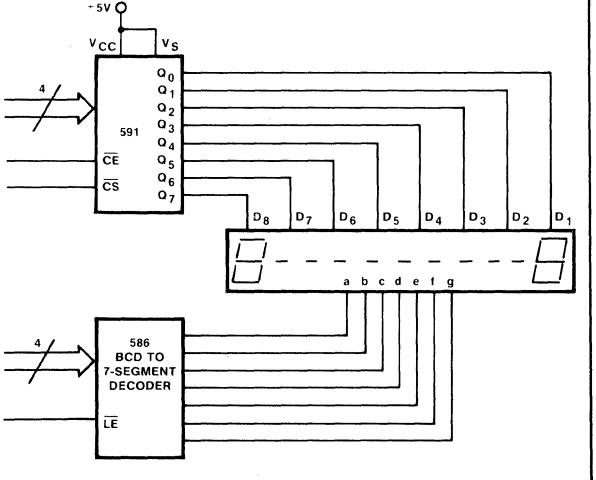

SECTION 7
TRANSISTOR ARRAYS

Section 7—TRANSISTOR ARRAYS

CA3081/3082	Seven Transistor Array	233
ULN2001/2003/2004	High Voltage/High Current Darlington Transistor Arrays	236

DESCRIPTION

The CA3081 and CA3082 are monolithic integrated circuits, each consisting of seven separate npn transistors on a common substrate. The transistors are capable of driving loads of up to 100mA. At the same time, the transistor geometry used gives maximum current gain at quite low currents, making the devices also suitable for small-signal applications. In the CA3081, the transistors are connected in a common emitter configuration, while in the CA3082, the collectors are common. The transistor arrays are particularly suitable for driving light-emitting diodes and seven-segment displays, as well as for general purpose applications. The CA3081 and CA3082 are available in both 16-lead dual-in-line plastic and cerdip packages.

FEATURES

- **Seven transistors permit a wide range of applications in either a common emitter (CA3081) or common-collector (CA3082) configuration.**
- **High I_C: 100mA maximum**
- **Low $V_{CE\ sat}$ (at 50mA): 0.4V typical**

APPLICATIONS

- **Drivers for:**
  Incandescent display devices
  LED
  Relay control
  Thyristor firing

PIN CONFIGURATIONS

CA3081 F,N PACKAGE



ORDER PART NO.
CA3081F, CA3081N

CA3082 F,N PACKAGE



ORDER PART NO.
CA3082F, CA3082N

PIN DESIGNATION (CA3081)

PIN NO.	SYMBOL	NAME AND FUNCTION
1	C1	Collector, Transistor 1
2	C2	Collector, Transistor 2
3	B2	Base, Transistor 2
4	C5	Collector, Transistor 5
5	SUB	Substrate
6	B5	Base, Transistor 5
7	C7	Collector, Transistor 7
8	B7	Base, Transistor 7
9	C6	Collector, Transistor 6
10	B6	Base, Transistor 6
11	B4	Base, Transistor 4
12	C4	Collector, Transistor 4
13	B3	Base, Transistor 3
14	C3	Collector, Transistor 3
15	E	Common emitter
16	B1	Base, Transistor 1

PIN DESIGNATION (CA3082)

PIN	SYMBOL	NAME AND FUNCTION
1	E1	Emitter, Transistor 1
2	E2	Emitter, Transistor 2
3	B2	Base, Transistor 2
4	E5	Emitter, Transistor 5
5	SUB	Substrate
6	B5	Base, Transistor 5
7	E6	Emitter, Transistor 6
8	B6	Base, Transistor 6
9	E7	Emitter, Transistor 7
10	B7	Base, Transistor 7
11	B4	Base, Transistor 4
12	E4	Emitter, Transistor 4
13	B3	Base. Transistor 3
14	E3	Emitter, Transistor 3
15	C	Common collector
16	B1	Base, Transistor 1

BLOCK DIAGRAM

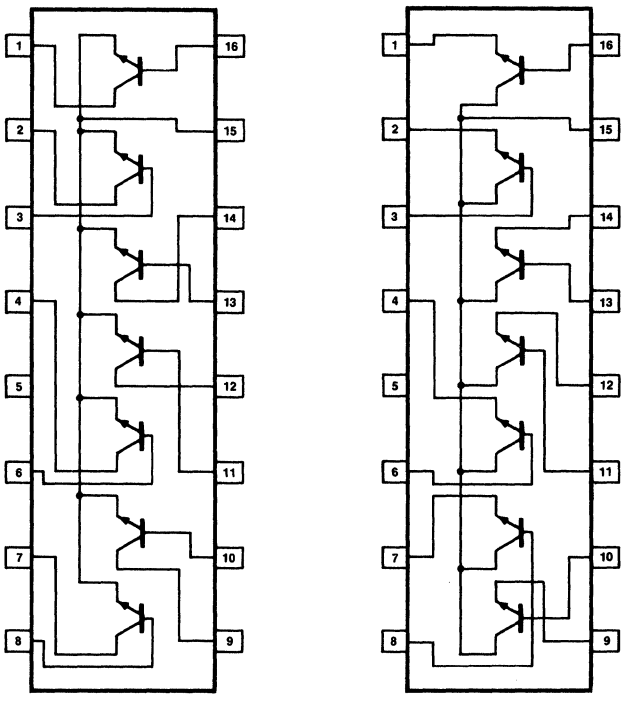

CA3081 CA 3082

ABSOLUTE MAXIMUM RATINGS T_A = 25°C

	PARAMETER	RATING	UNIT
P	Power dissipation:		
	Any one transistor	500	mW
P_{TOT}	Total package	750	mW
	Above 55°C	Derate Linearly 6.67	mW/°C
	Ambient temperature range:		
T_A	Operating	−55 to +125	°C
T_{stg}	Storage	−65 to +150	°C
	Lead temperature (10 seconds)	265	°C
V_{CEO}	Collector to emitter voltage[1]	16	V
V_{CBO}	Collector to base voltage[1]	20	V
V_{CIO}	Collector to substrate voltage[1,2]	20	V
V_{EBO}	Emitter to base voltage[1]	5	V
I_C	Collector current[1]	100	mA
I_B	Base current[1]	20	mA

NOTES

1. Ratings apply for each transistor in the device.
2. The collector of each transistor of the CA3081 and CA3082 is isolated from the substrate by an integral diode. The substrate must be connected to a voltage which is more negative than any collector voltage in order to maintain isolation between transistors and provide normal transistor action. To avoid undesired coupling between transistors, the substrate terminal (5) should be maintained at either DC or signal (AC) ground. A suitable bypass capacitor can be used to establish a signal ground.

TYPICAL READ-OUT DRIVER APPLICATIONS



NOTE
Schematic diagram showing one transistor of the CA3081 driving one segment of an incandescent display.

Figure 6

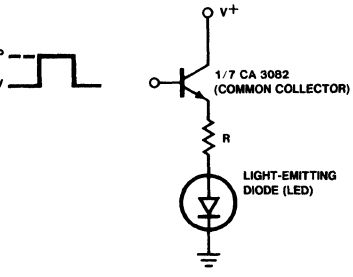

NOTES
Schematic diagram showing one transistor of the CA3082 driving a light-emitting diode (LED).

*The resistance for R is determined by the relationship

$$R = \frac{V_P - V_{BE} - V_F(LED)}{I(LED)}$$

$R = 0$ for $V_P = V_{BE} + V_F(LED)$

Where: V_P = Input pulse voltage
V_F = Forward voltage drop across the diode

Figure 7

STATIC ELECTRICAL CHARACTERISTICS FOR EACH TRANSISTOR $T_A = 25°C$

PARAMETER		TEST CONDITIONS	LIMITS			UNIT
			Min	Typ	Max	
V_{CBO} (BR)	Collector to base breakdown voltage	$I_C = 500\mu A$, $I_E = 0$	20	60		V
V_{CIO} (BR)	Collector to substrate breakdown voltage	$I_C = 500\mu A$, $I_E = 0$, $I_B = 0$	20	60		V
V_{CEO} (BR)	Collector to emitter breakdown voltage	$I_C = 1mA$, $I_B = 0$	16	24		V
V_{EBO} (BR)	Emitter to base breakdown voltage	$I_C = 500\mu A$	5	6.9		V
h_{FE}	DC forward current Transfer Ratio	$V_{CE} = 0.5V$, $I_C = 30mA$	30	68		
		$V_{CE} = 0.8V$, $I_C = 50mA$	40	70		
V_{BE} sat	Base to emitter saturation voltage	$I_C = 30mA$, $I_B = 1mA$		0.87	1.0	V
V_{CE} sat	Collector to emitter saturation voltage					
	CA3081/CA3082	$I_C = 30mA$, $I_B = 1mA$		0.27	0.5	V
	CA3081	$I_C = 50mA$, $I_B = 5mA$		0.4	0.7	V
	CA3082	$I_C = 50mA$, $I_B = 5mA$		0.4	0.8	V
I_{CEO}	Collector cutoff current	$V_{CE} = 10V$, $I_B = 0$			10	μA
I_{CBO}	Collector cutoff current	$V_{CB} = 10V$, $I_E = 0$			1	μA

TYPICAL PERFORMANCE CHARACTERISTICS

h_{FE} vs I_C

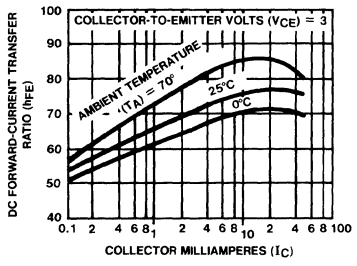

Figure 2

V_{BEsat} vs I_C

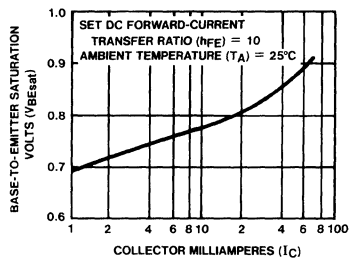

Figure 3

V_{CEsat} vs I_C at $T_A = 25°C$

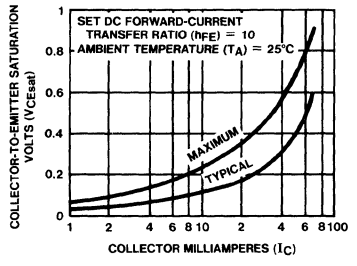

Figure 4

V_{CEsat} vs I_C at $T_A = 70°C$

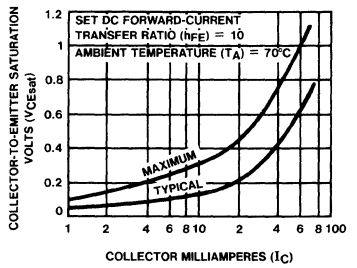

Figure 5

DESCRIPTION

These high-voltage, high-current Darlington transistor arrays are comprised of seven silicon NPN Darlington pairs on a common monolithic substrate. All units feature open collector outputs and integral suppression diodes for inductive loads. Peak inrush currents to 600mA are allowable, making them ideal for driving tungsten filament lamps also.

The Type ULN-2001 is a general-purpose array which may be used with DTL, TTL, PMOS, CMOS, etc. It is pinned with inputs opposite outputs to facilitate ease of circuit board layout and is priced to compete directly with discrete transistor alternatives.

The Type ULN-2003 has a series base resistor to each Darlington pair, and thus allows operation directly with TTL or CMOS operating at a supply voltage of 5V.

The Type ULN-2004 has an appropriate series input resistor to allow its operation directly from CMOS or PMOS outputs utilizing supply voltages of 6 to 15V. The required input current is below that of the Type ULN-2003.

In all cases, the individual Darlington pair collector current rating is 500mA. However, outputs may be paralleled for higher load current capability. All devices are supplied in a 16-pin dual in-line plastic package.

FEATURES

- **Peak inrush current 600mA**
- **Protected internally against inductive loads**
- **Open collector topology**
- **Compatible with most logic technologies**

EQUIVALENT SCHEMATICS

TYPE ULN2001
(each driver)



TYPE ULN2003
(each driver)

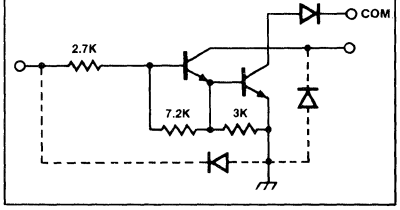

TYPE ULN2004
(each driver)

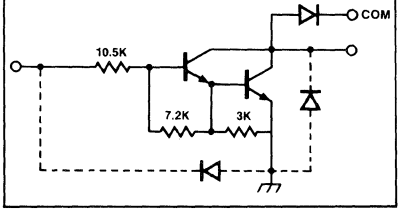

PIN CONFIGURATION

N,F PACKAGE



ORDER PART NO.
ULN2001N,F
ULN2003N,F
ULN2004N,F

ABSOLUTE MAXIMUM RATINGS

at 25°C Free-Air temperature for any one Darlington pair unless otherwise specified.

PARAMETER		RATING	UNIT
V_{CE}	Output voltage	50	V
V_{IN}	Input voltage	30	V
V_{EBO}	Emitter base voltage	6	V
I_C	Continuous collector current	500	mA
I_B	Continuous base current	25	mA
P_D	Power dissipation	1.3	W
	Derating factor above 25°C	95	°C/W
T_A	Ambient temperature range (operating)	0 to +85	°C
T_S	Storage temperature range	-65 to +150	°C

*NOTE
Under normal operating conditions, these units will sustain 350mA per output with $V_{CE(SAT)}$ = 1.6V at 70°C with a pulse width of 20 ms and a duty cycle of 30%.

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.[1,2,3]

PARAMETER		TEST CONDITIONS	Test Fig.	LIMITS Min	LIMITS Typ	LIMITS Max	UNIT
I_{CEX}	Output leakage current	$V_{CE} = 50V$, $T_A = 70°C$	1A	—	—	100	μA
	Type ULN-2004	$V_{CE} = 50V$, $T_A = 70°C$, $V_{IN} = 1V$	1B	—	—	500	μA
$V_{CE(SAT)}$	Collector-emitter Saturation voltage	$I_C = 350mA$, $I_B = 500\mu A$	2	—	1.25	1.6	V
		$I_C = 200mA$, $I_B = 350\mu A$	2	—	1.1	1.3	V
		$I_C = 100mA$, $I_B = 250\mu A$	2	—	0.9	1.1	V
$I_{IN(ON)}$	Input current						
	Type ULN-2003	$V_{IN} = 3.85V$	3	—	0.93	1.35	mA
	Type ULN-2004	$V_{IN} = 5V$	3	—	0.35	0.5	mA
		$V_{IN} = 12V$	3	—	1.0	1.45	mA
$I_{IN(OFF)}$	Input current	$I_C = 500\mu A$, $T_A = 70°C$	4	50	65	—	μA
$V_{IN(ON)}$	Input voltage						
	Type ULN-2003	$V_{CE} = 2V$, $I_C = 200mA$	5	—	—	2.4	V
		$V_{CE} = 2V$, $I_C = 250mA$	5	—	—	2.7	V
		$V_{CE} = 2V$, $I_C = 300mA$	5	—	—	3.0	V
	Type ULN-2004	$V_{CE} = 2V$, $I_C = 125mA$	5	—	—	5.0	V
		$V_{CE} = 2V$, $I_C = 200mA$	5	—	—	6.0	V
		$V_{CE} = 2V$, $I_C = 275mA$	5	—	—	7.0	V
		$V_{CE} = 2V$, $I_C = 350mA$	5	—	—	8.0	V
h_{FE}	D-C forward current transfer ratio Type ULN-2001	$V_{CE} = 2V$, $I_C = 350mA$	2	1000		—	—
C_{IN}	Input capacitance		—	—	15	30	pF
I_R	Clamp diode leakage current	$V_R = 50V$	6	—	—	50	μA
V_F	Clamp diode forward voltage	$I_F = 350mA$	7	—	1.7	2	V

NOTES

1. All limits stated apply to the complete Darlington series except as specified for a single device type.
2. The $I_{IN(OFF)}$ current limit guarantees against partial turn-on of the output.
3. The $V_{IN(ON)}$ voltage limit guarantees a minimum output sink current per the specified test conditions.

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.[1,2,3]

PARAMETER		TEST CONDITIONS	Test Fig.	LIMITS Min	LIMITS Typ	LIMITS Max	UNIT
t_{PLH}	Turn-on delay	0.5 E_{IN} to 0.5 E_{OUT}	—	—	1.0	5	μs
t_{PHL}	Turn-off delay	0.5 E_{IN} to 0.5 E_{OUT}	—	—	1.0	5	μs

NOTES

1. All limits stated apply to the complete Darlington series except as specified for a single device type.
2. The $I_{IN(OFF)}$ current limit guarantees against partial turn-on of the output.
3. The $V_{IN(ON)}$ voltage limit guarantees a minimum output sink current per the specified test conditions.

TYPICAL PERFORMANCE CHARACTERISTICS

COLLECTOR CURRENT AS A FUNCTION OF SATURATION VOLTAGE

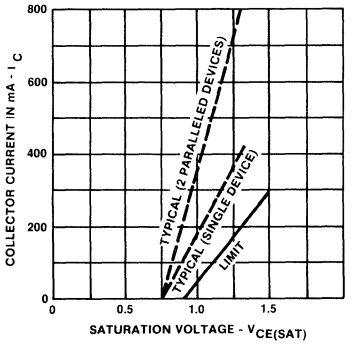

COLLECTOR CURRENT AS A FUNCTION OF INPUT CURRENT

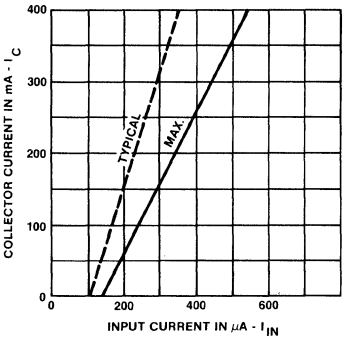

ALLOWABLE AVERAGE PACKAGE POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE

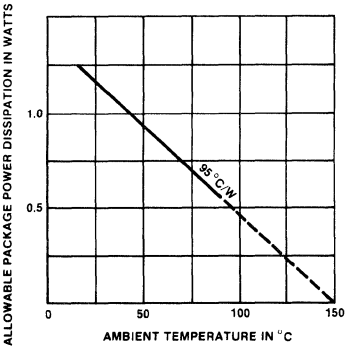

INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE FOR TYPE ULN-2003



INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE FOR TYPE ULN-2004

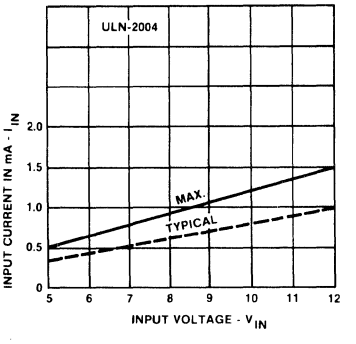

TEST FIGURES

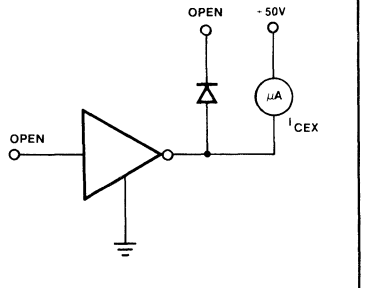

Figure 1A

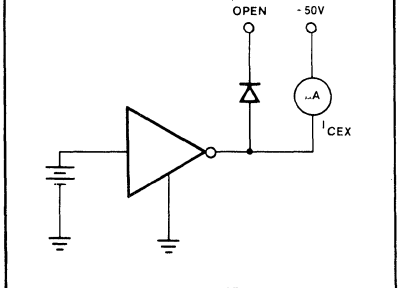

Figure 1B

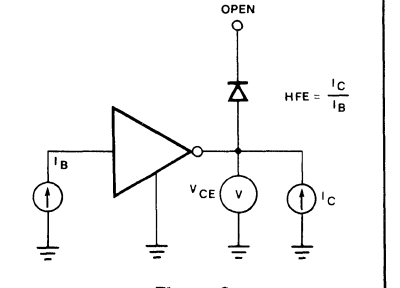

Figure 2

TEST FIGURES (Cont'd)

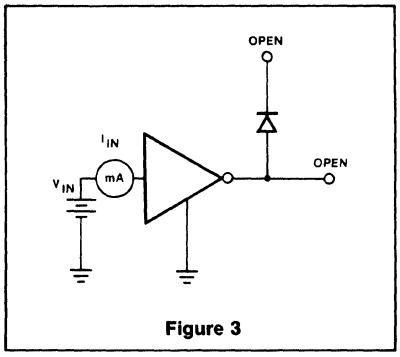

Figure 3

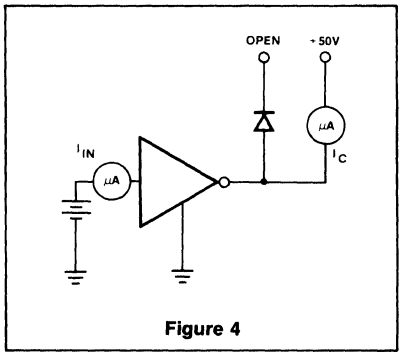

Figure 4

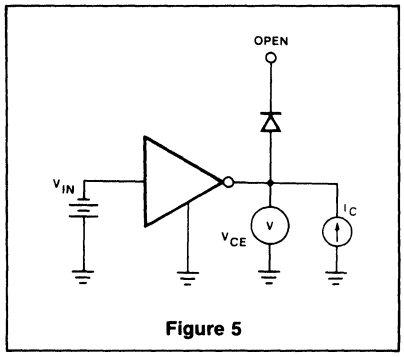

Figure 5

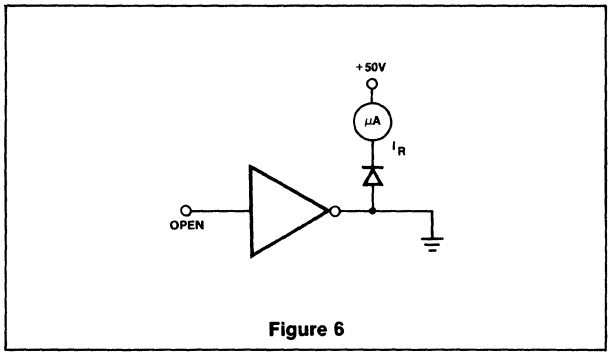

Figure 6

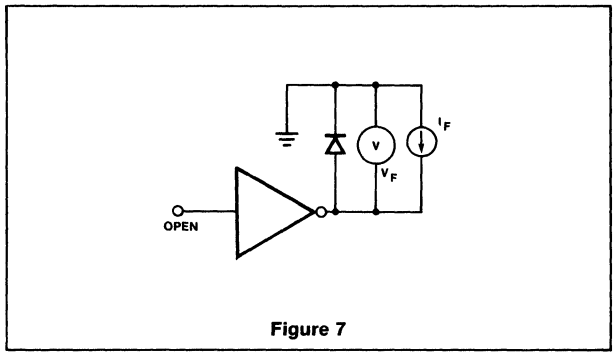

Figure 7

TYPICAL APPLICATIONS

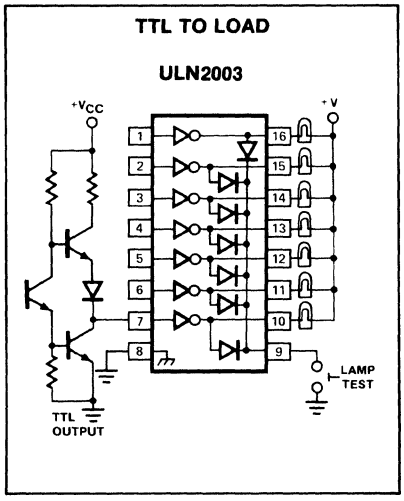

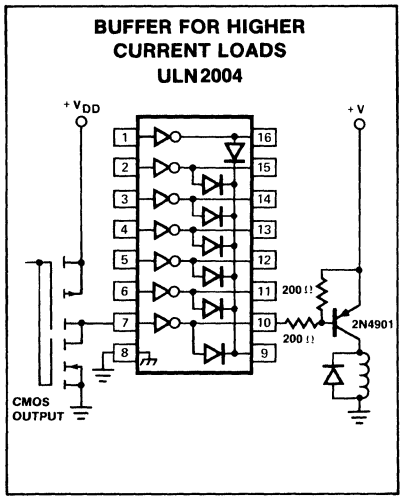

7

SECTION 8
INTERFACE

Section 8—INTERFACE

DS7820/8820	Dual Line Receiver	243
DS7820A/8820A	Dual Line Receiver	245
DS7830/8830	Dual Differential Line Driver	249
MC1488	Quad Line Driver	251
MC1489/1489A	Quad Line Receivers	254
75S107	High Speed Dual Line Receiver	256
75S108	High Speed Dual Line Receiver	259
75S207	High Speed Dual Sense Amplifier for MOS Memories	263
75S208	High Speed Dual Sense Amplifier for MOS Memories	266

DS7820/8820-F,N

DESCRIPTION

The DS7820, specified from -55°C to 125°C, and the DS8820, specified from 0°C to 70°C, are digital line receivers with two completely independent units fabricated on a single silicon chip. Intended for use with digital systems connected by twisted pair lines, they have a differential input designed to reject large common mode signals while responding to small differential signals. The output is directly compatible with RTL, DTL or TTL integrated circuits.

The response time can be controlled with an external capacitor to eliminate noise spikes, and the output state is determined for open inputs. Termination resistors for the twisted pair line are also included in the circuit. Both the DS7820 and the DS8820 are specified, worst case, over their full operating temperature range, for ±10-percent supply voltage variations and over the entire input voltage range.

FEATURES

- **Operation from a single +5V logic supply**
- **Input voltage range of ±15V**
- **Independent channel strobing**
- **High input resistance**
- **Fanout of two with DTL or TTL**
- **Output can be wire OR'ed**
- **DS7820 Mil std 883A,B,C available**

PIN CONFIGURATION

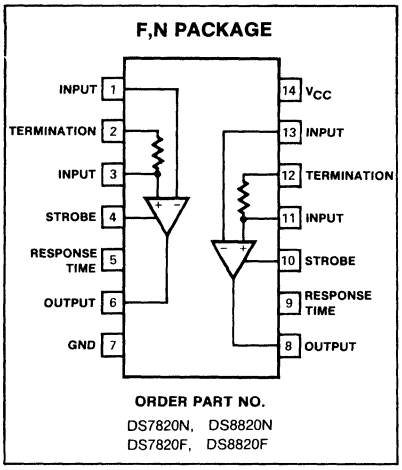

CIRCUIT SCHEMATIC

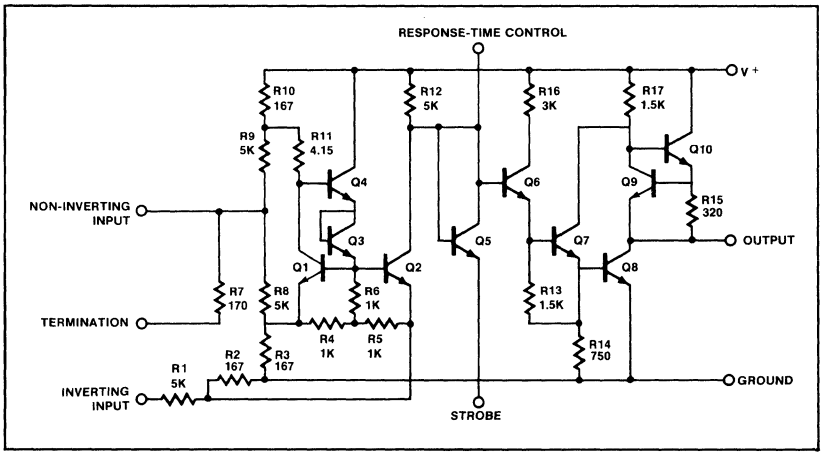

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	8.0	V
Input voltage	±20	V
Differential input voltage	±20	V
Strobe voltage	8.0	V
Output sink current	25	mA
Power dissipation	600	mW
Operating temperature range		
DS7820	-55 to +125	°C
DS8820	0 to 70	°C
Lead temperature (soldering, 10sec)	300	°C

NOTE

"Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

DS7820/8820-F,N

DC ELECTRICAL CHARACTERISTICS

Specifications apply for $4.5V \le V_{CC} \le 5.5$, $-15V \le V_{CM} \le 15V$ and $-55°C \le T_A \le +125°C$ for the DS7820 or $0°C \le T_A \le +70°C$ for the DS8820 unless otherwise specified. Typical values given are for $V_{CC} = 5.0V$, $T_A = 25°C$ and $V_{CM} = 0V$ unless stated differently.[1,2,3]

PARAMETER		TEST CONDITIONS	DS7820			DS8820			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{TH}	Input threshold	$V_{IN} = 0V$	-0.5	0	0.5	-0.5	0	0.5	V
V_{TH}	Input threshold	$-15V \le V_{IN} \le 15V$	-1.0	0	1.0	-1.0	0	1.0	V
V_{OH}	High output level	$I_{OUT} \le -0.2mA$	2.5		5.5	2.5		5.5	V
V_{OL}	Low output level	$I_{SINK} \le 3.5mA$	0		0.4	0		0.4	V
$R_{IN}-$	Inverting input resistance		3.6	5.0		3.6	5.0		kΩ
$R_{IN}+$	Noninverting input resistance		1.8	2.5		1.8	2.5		kΩ
R_T	Line termination resistance		120	170	250	120	170	250	Ω
I_{ST}	Strobe current	$V_{Strobe} = 0.4V$		1.0	1.4		1.0	1.4	mA
I_{ST}	Strobe current	$V_{Strobe} = 5.5V$			-5			-5	μA
I_{CC}	Supply current[3]	$V_{IN} = 15V$		3.2	6.0		3.2	6.0	mA
I_{CC}	Supply current[3]	$V_{IN} = 0V$		5.8	10.2		5.8	10.2	mA
I_{CC}	Supply current[3]	$V_{IN} = -15V$		8.3	15.0		8.3	15.0	mA
$I_{IN}+$	Noninverting input current	$V_{IN} = 15V$		3.0	7.0		5.0	7.0	mA
$I_{IN}+$	Noninverting input current	$V_{IN} = 0V$	-1.6	-1.0		-1.6	-1.0		mA
$I_{IN}+$	Noninverting input current	$V_{IN} = -15V$	-9.8	-7.0		-9.8	-7.0		mA
$I_{IN}-$	Inverting input current	$V_{IN} = 15V$		3.0	4.2		3.0	4.2	mA
$I_{IN}-$	Inverting input current	$V_{IN} = 0V$		0	-0.5		0	-0.5	mA
$I_{IN}-$	Inverting input current	$V_{IN} = -15V$	-4.2	-3.0		-4.2	-3.0		mA

NOTES

1. All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.
2. Only one output at a time should be shorted.
3. The specifications and curves given are for one side only. Therefore, the total package dissipation and supply currents will be double the values given when both receivers are operated under identical conditions.

AC ELECTRICAL CHARACTERISTICS

PARAMETER	TEST CONDITIONS	DS7820			DS8820			UNIT
		Min	Typ	Max	Min	Typ	Max	
T_R Response time	$C_{delay} = 0$		40			40		ns
T_R Response time	$C_{delay} = 100pF$		150			150		ns

DS7820-DS8820 TYPICAL APPLICATION

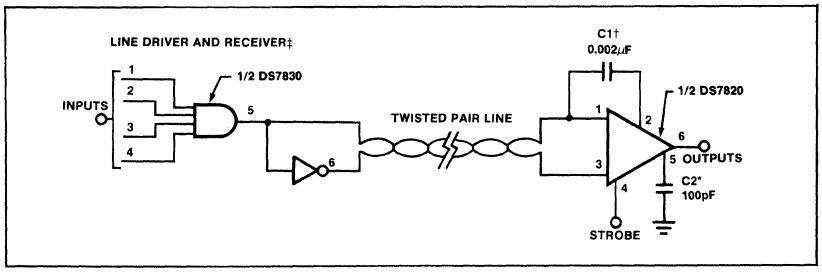

†Exact value depends on line length
‡V_{CC} is 4.5V to 5.5V for both the DS7820 and DS7830
*Optional to control response time

N/F

DESCRIPTION

The DS7820A and the DS8820A are improved performance digital line receivers with two completely independent units fabricated on a single silicon chip. Intended for use with digital systems connected by twisted pair lines, they have a differential input designed to reject large common mode signals while responding to small differential signals. The output is directly compatible with RTL, DTL or TTL integrated circuits.

The response time can be controlled with an external capacitor to reject input noise spikes. The output state is a logic "1" for both inputs open. Termination resistors for the twisted pair line are also included in the circuit. Both the DS7820A and the DS8820A are specified, worst case, over their full operating temperature range (-55°C to 125°C and 0°C to 70°C respectively), over the entire input voltage range, for ±10% supply voltage variations.

FEATURES

- **Operation from a single +5V logic supply**
- **Input voltage range of ±15V**
- **Strobe low forces output to "1" state**
- **High input resistance**
- **Fanout of ten with either DTL or TTL integrated circuits**
- **Outputs can be wire OR'ed**
- **Series 54/74 compatible**

PIN CONFIGURATION

N/F PACKAGE

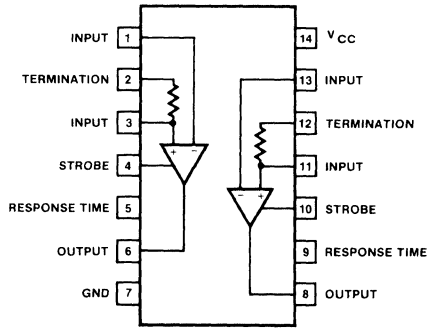

ORDER PART NO.
DS7820AN, DS7820AF
DS8820AN, DS8820AF

EQUIVALENT SCHEMATIC

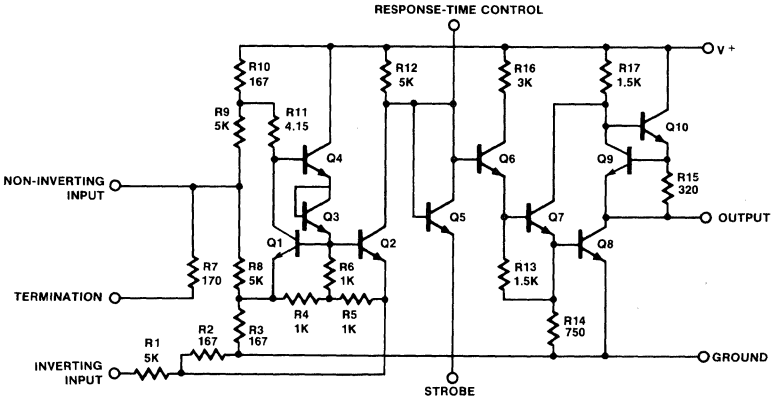

ABSOLUTE MAXIMUM RATINGS*

PARAMETER	RATING	UNIT
Supply voltage	8.0	V
Input voltage	±20	V
Differential input voltage	±20	V
Strobe voltage	8.0	V
Output sink current	50	mA
Power dissipation	600	mW
Operating temperature range		
DS7820A	-55 to +125	°C
DS8820A	0 to +70	°C
Lead temperature (soldering, 60sec)	300	°C

*NOTE

"Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.[1,2,3,4]

PARAMETER		TEST CONDITIONS	DS7820A/DS8820A Min	Typ	Max	UNIT
V_{TH}	Differential threshold voltage	$I_{OUT} = -400\mu A$ $-3V \le V_{CM} \le +3V$ $V_{OUT} \ge 2.5V$ $-15V \le V_{CM} \le +15V$ $I_{OUT} = +16mA$ $-3V \le V_{CM} \le +3V$ $V_{OUT} \le 0.4V$ $-15V \le V_{CM} \le +15V$		0.06 0.06 -0.08 -0.08	0.5 1.0 -0.5 -1.0	V V V V
R_I^-	Inverting input resistance	$-15V \le V_{CM} \le +15V$	3.6	5		kΩ
R_I^+	Non-inverting input resistance	$-15V \le V_{CM} \le +15V$	1.8	2.5		kΩ
R_T	Line termination resistance		120	170	250	Ω
I_I^-	Inverting input current	$V_{CM} = 15V$ $V_{CM} = 0V$ $V_{CM} = -15V$		3.0 0 -3.0	4.2 -0.5 -4.2	mA mA mA
I_I^+	Non-inverting input current	$V_{CM} = 15V$ $V_{CM} = 0V$ $V_{CM} = -15V$		5.0 -1.0 -7.0	7.0 -1.6 -9.8	mA mA mA
I_{CC}	Power supply current	$V_{DIFF} = -1V$, $V_{CM} = 15V$ I_{OUT} = Logical "0" $V_{CM} = -15V$ $V_{DIFF} = -0.5V$, $V_{CM} = 0V$		3.9 9.2 6.5	6.0 14.0 10.2	mA mA mA
V_{OH} V_{OL}	Logical "1" output voltage Logical "0" output voltage	$I_{OUT} = -400\mu A$, $V_{DIFF} = 1V$ $I_{OUT} = +16mA$, $V_{DIFF} = -1V$	2.5 0	4.0 0.22	5.5 0.4	V V
V_{SH} V_{SL}	Logical "1" strobe input voltage Logical "0" strobe input voltage	$I_{OUT} = +16mA$, $V_{OUT} \le 0.4V$, $V_{DIFF} = -3V$ $I_{OUT} = -400\mu A$, $V_{OUT} \ge 2.5V$, $V_{DIFF} = -3V$	2.1		 0.9	V V
I_{SH} I_{SL}	Logical "1" strobe input current Logical "0" strobe input current	$V_{STROBE} = 5.5V$, $V_{DIFF} = 3V$ $V_{STROBE} = 0.4V$, $V_{DIFF} = -3V$		0.01 -1.0	5.0 -1.4	μA mA
I_{SC}	Output short circuit current	$I_{OUT} = 0V$, $V_{CC} = 5.5V$, $V_{STROBE} = 0V$	-2.8	-4.5	-6.7	mA

NOTES

1. These specifications apply for $4.5V \le V_{CC} \le 5.5V$, $-15V \le V_{CM} \le 15V$ and $-55°C \le T_A \le +125°C$ for the DS7820A or $0°C \le T_A \le +70°C$ for the DS8820A unless otherwise specified. Typical values given are for $V_{CC} = 5.0V$, $T_A = 25°C$ and $V_{CM} = 0V$ unless stated differently.
2. All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.
3. Only one output at a time should be shorted.
4. The specifications and curves given are for one side only. Therefore, the total package dissipation and supply currents will be double the values given when both receivers are operated under identical conditions.

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = 5V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	DS7820A/DS8820A Min	Typ	Max	UNIT
t_{PD0}	Propagation delay, differential input to "0" output			30	45	ns
t_{PD1}	Propagation delay, differential input to "1" output			27	40	ns
t_{PD0}	Propagation delay, strobe input to "0" output			16	25	ns
t_{PD1}	Propagation delay, strobe input to "1" output			18	30	ns

TYPICAL PERFORMANCE CHARACTERISTICS

SUPPLY VOLTAGE SENSITIVITY

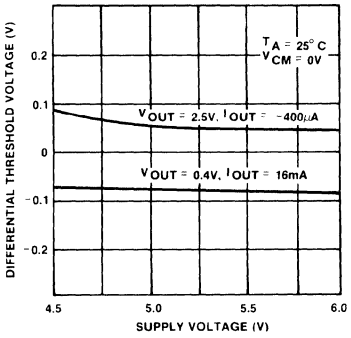

COMMON-MODE VOLTAGE SENSITIVITY

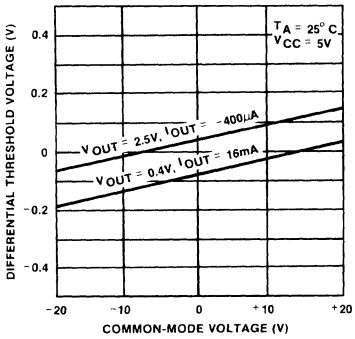

TEMPERATURE SENSITIVITY

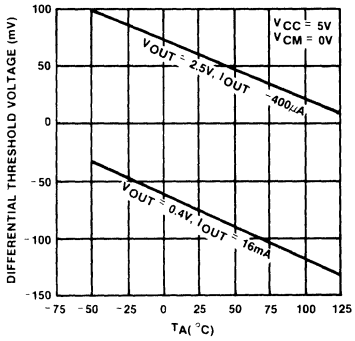

TRANSFER FUNCTION

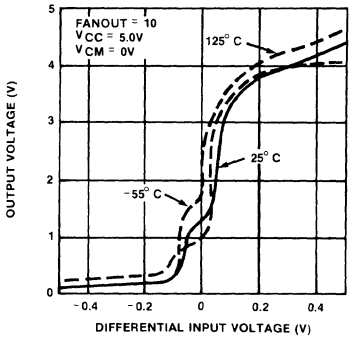

TERMINATION RESISTANCE

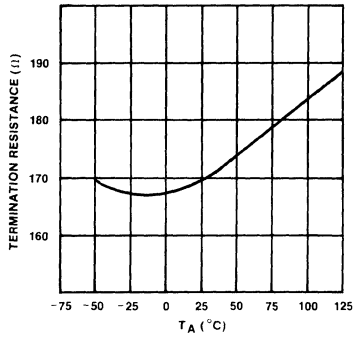

INPUT CHARACTERISTICS

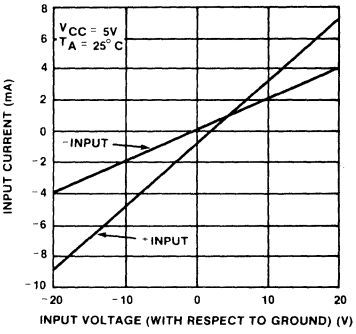

POWER SUPPLY CURRENT

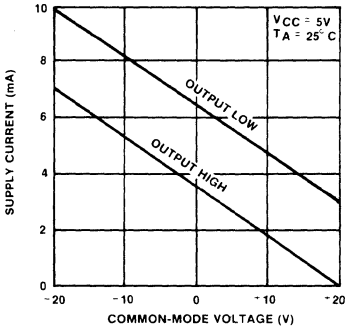

INTERNAL POWER DISSIPATION

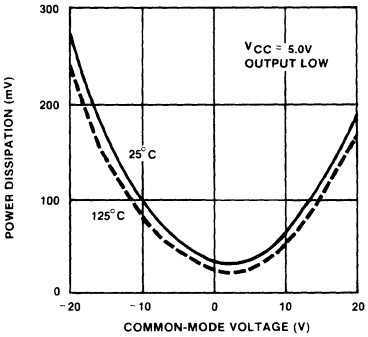

OUTPUT VOLTAGE LEVELS

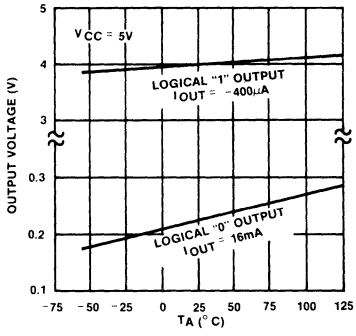

8

N/F

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

DIFFERENTIAL INPUT DELAYS

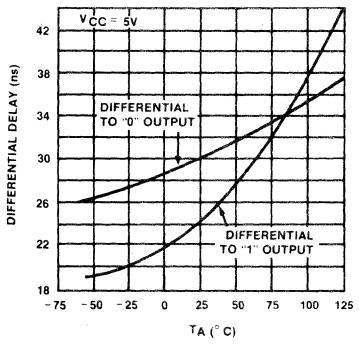

STROBE DELAYS

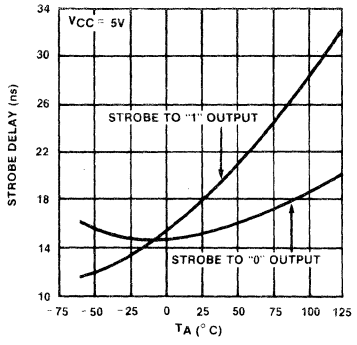

NOISE REJECTION

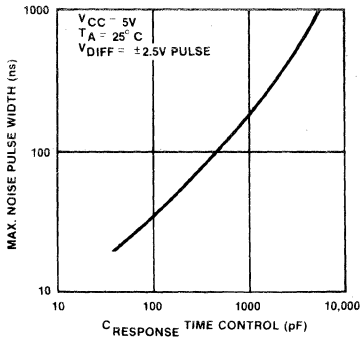

AC TEST CIRCUIT

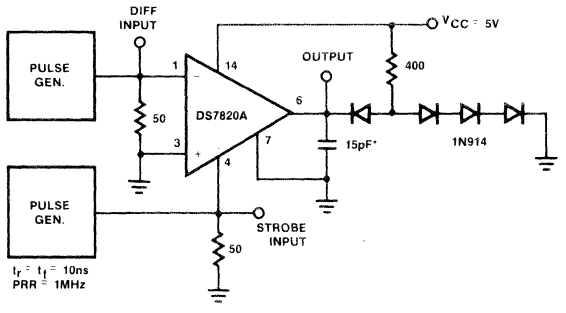

*Includes Jig and Probe

VOLTAGE WAVEFORM

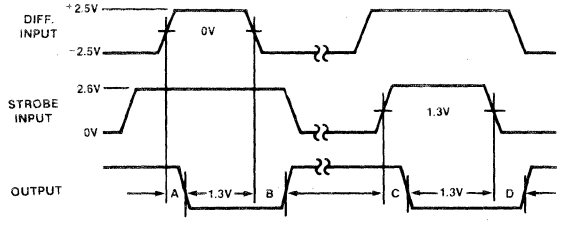

A = Differential input to "0" output
B = Differential input to "1" output
C = Strobe input to "0" output
D = Strobe input to "1" output

TYPICAL APPLICATIONS

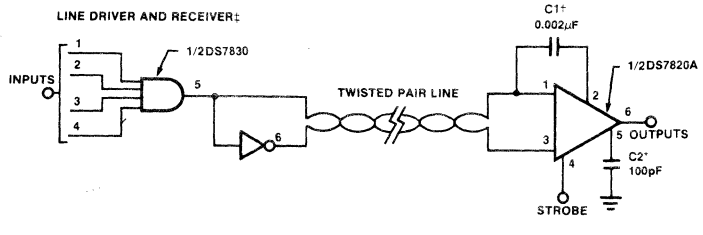

NOTES

†Exact value depends on line length
‡V_{CC} is 4.5V to 5.5V for both the DS7820 and DS7830
*Optional to control response time

SINGLE ENDED (EIA-RS232C) RECEIVER WITH HYSTERESIS

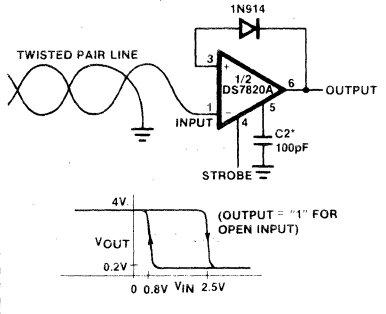

DS7830/8830-F,N

DESCRIPTION

The DS7830/DS8830 is a dual differential line driver that also performs the dual four-input NAND or dual four-input AND function.

TTL (Transistor-Transistor-Logic) multiple emitter inputs allow this line driver to interface with standard TTL or DTL systems. The differential outputs are balanced and are designed to drive long lengths of coaxial cable, strip line, or twisted pair transmission lines with characteristic impedances of 50Ω to 500Ω. The differential feature of the output eliminates troublesome ground-loop errors normally associated with single-wire transmissions.

FEATURES

- **Single 5 volt power supply**
- **High speed**
- **Diode protected outputs for termination of positive and negative voltage transients**
- **Diode protected inputs to prevent line ringing**
- **Short circuit protection**
- **DS7830 Mil std 883A,B,C available**

PIN CONFIGURATION

F,N PACKAGE

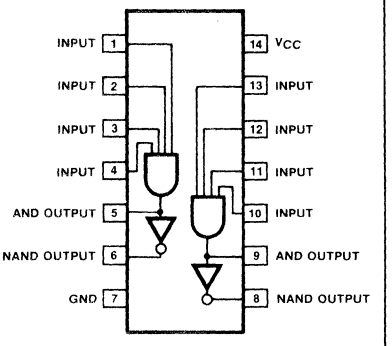

EQUIVALENT SCHEMATIC

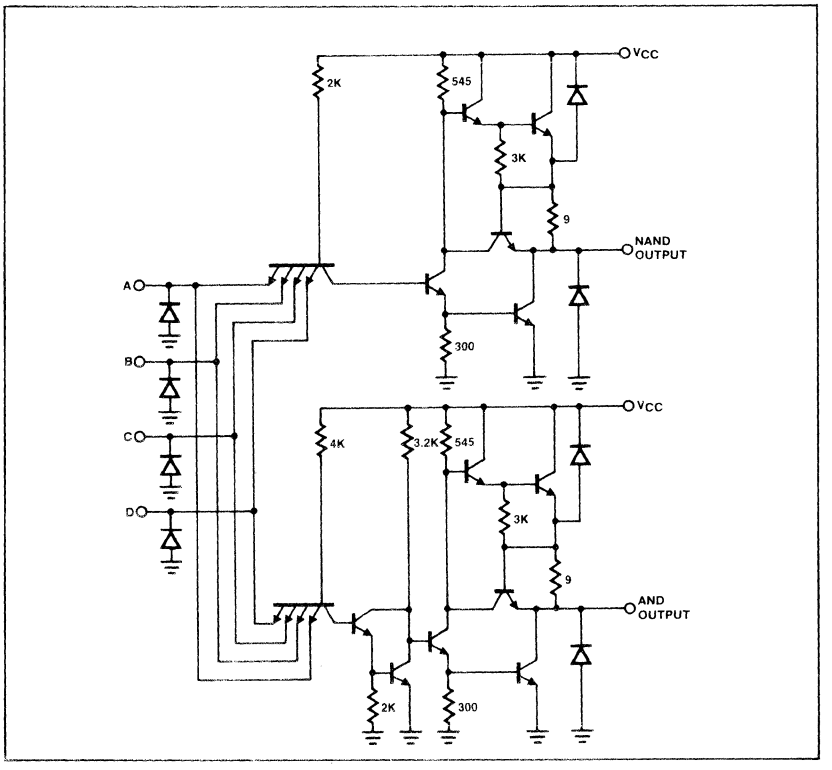

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
V_{CC}	7.0	V
Input voltage	5.5	V
Operating temperature range		
DS7830	-55 to +125	°C
DS8830	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 10sec)	300	°C

ELECTRICAL CHARACTERISTICS $T_A = 25°C$ $V_{CC} = 5V$ unless otherwise specified.[1,2]

PARAMETER	TEST CONDITIONS	LIMITS			UNIT
		Min	Typ	Max	
Logical "1" input voltage		2.0			V
Logical "0" input voltage				0.8	V
Logical "1" output voltage	$V_{IN} = 0.8V$ $I_{OUT} = -0.8mA$	2.4			V
Logical "1" output voltage	$V_{IN} = 0.8V$ $I_{OUT} = -40mA$	1.8	2.9		V
Logical "0" output voltage	$V_{IN} = 2.0V$ $I_{OUT} = +32mA$		0.2	0.4	V
Logical "0" output voltage	$V_{IN} = 2.0V$ $I_{OUT} = +40mA$		0.22	0.5	V
Logical "1" input current	$V_{IN} = +2.4V$			120	μA
Logical "1" input current	$V_{IN} = 5.5V$			2	mA
Logical "0" input current	$V_{IN} = 0.4V$			4.8	mA
Output short circuit current[2]	$V_{CC} = 5.0V$	-40	-100	-120	mA
Supply current	$V_{CC} = 5.0V$ $V_{IN} = 5.0V$ (Each driver)		11	18	mA
Propagation delay AND gate $t_{pd}1$	$T_A = 25°C$		8	12	ns
Propagation delay AND gate $t_{pd}0$	$V_{CC} = 5.0V$		11	18	ns
Propagation delay NAND gate $t_{pd}1$	$C_L = 15pF$		8	12	ns
Propagation delay NAND gate $t_{pd}0$	See Figure 1		5	8	ns
Differential delay t_1	Load, 100Ω and 5000pF		12	16	ns
Differential delay t_2	See Figure 2		12	16	ns

NOTES

1. Specifications apply for DS7830 $-55°C \le T_A \le +125°C$, $V_{CC} = +5V \pm 10\%$, DS8830 $0°C \le T_A \le 70°C$, $V_{CC} = +5V \pm 5\%$ unless otherwise specified.
2. Applies for $T_A = +125°C$, only one output at a time to be shorted.

AC TEST CIRCUIT

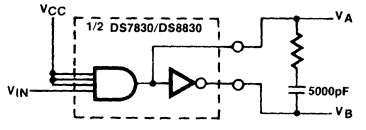

†V_{CC} is 4.5V to 5.5V for both the DS7820 and DS7830

†Exact value depends on transmission rate

*Optional to control response time

SWITCHING TIME WAVEFORMS

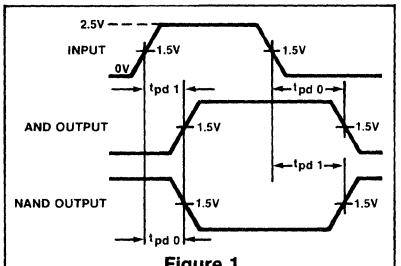

Figure 1

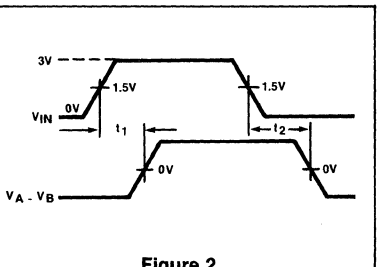

Figure 2

TYPICAL APPLICATION

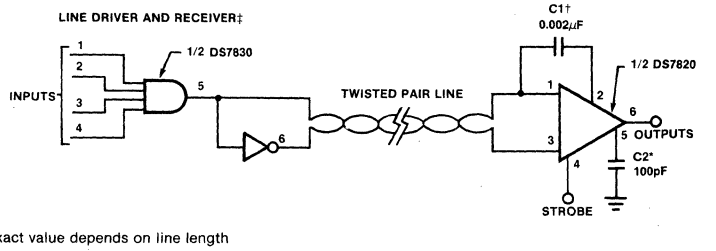

†Exact value depends on line length

‡V_{CC} is 4.5V to 5.5V for the DS7820 and DS7830

*Optional to control response time

MC1488-F,N

DESCRIPTION

The MC1488 is a quad line driver which converts standard DTL/TTL input logic levels through one stage of inversion to output levels which meet EIA Standard No. RS-232C and CCITT Recommendation V.24.

FEATURES

- **Current limited output: ±10mA Typ**
- **Power-off source impedance: 300Ω Min**
- **Simple slew rate control with external capacitor**
- **Flexible operating supply range**
- **Inputs are DTL/TTL compatible**

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.
MC1488N/F

CIRCUIT SCHEMATIC

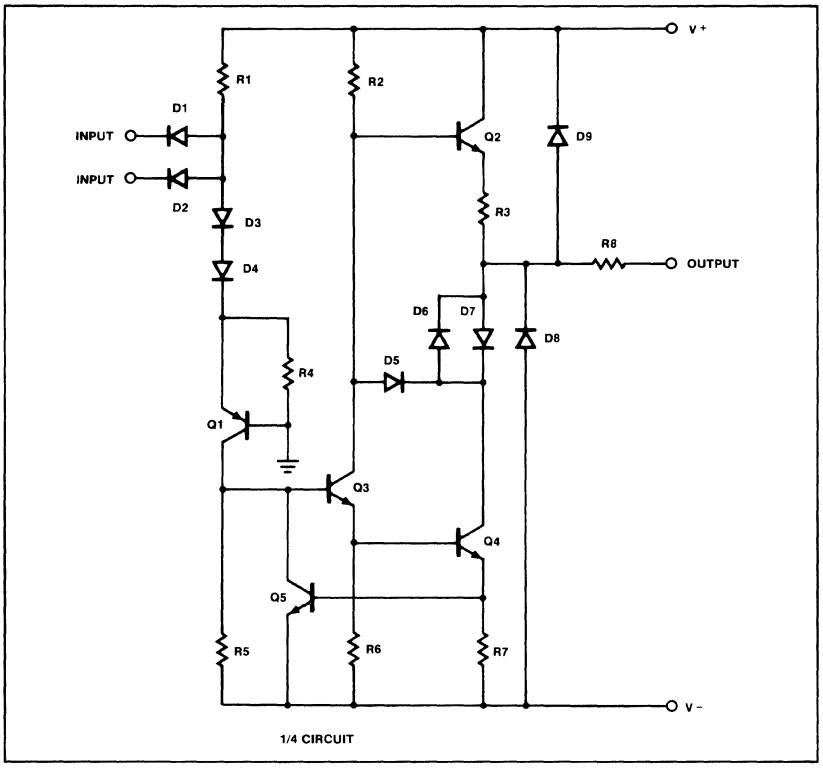

1/4 CIRCUIT

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage V+	+15	V
V-	-15	V
Input voltage (V_{IN})	$-15 \leq V_{IN} \leq 7.0$	V
Output voltage	±15	V
Power dissipation:		
F package	1000	mW
N package	800	mW
Operating temperature range	0 to +75	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 10sec)	300	°C

8

MC1488-F,N

DC ELECTRICAL CHARACTERISTICS

$V+ = +9.0V \pm 1\%$, $V- = -9.0V \pm 1\%$, $T_A = 0°C$ to $+75°C$ unless otherwise specified.
All typicals are for $V+ = 9.0V$, $V- = -9.0V$, and $T_A = 25°C$.*

PARAMETER	TEST CONDITIONS		LIMITS			UNIT
			Min	Typ	Max	
Logic "0" input current	$V_{IN} = 0V$			-1.0	-1.6	mA
Logic "1" input current	$V_{IN} = +5.0V$			.005	10.0	μA
High level output voltage	$R_L = 3.0k\Omega$, $V_{IN} = 0.8V$	$V+ = 9.0V$, $V- = -9.0V$	6.0	7.0		V
		$V+ = 13.2V$, $V- = -13.2V$	9.0	10.5		V
Low level output voltage	$R_L = 3.0k\Omega$, $V_{IN} = 1.9V$	$V+ = 9.0V$, $V- = -9.0V$	-6.0	-6.8		V
		$V+ = 13.2V$, $V- = -13.2V$	-9.0	-10.5		V
High level output Short-circuit current	$V_{OUT} = 0V$, $V_{IN} = 0.8V$		-6.0	-10.0	-12.0	mA
Low level output Short-circuit current	$V_{OUT} = 0V$, $V_{IN} = 1.9V$		6.0	10.0	12.0	mA
Output resistance	$V+ = V- = 0V$, $V_{OUT} = \pm 2V$		300			Ω
Positive supply current (output open)	$V_{IN} = 1.9V$	$V+ = 9.0V$, $V- = -9.0V$		15.0	20.0	mA
		$V+ = 12V$, $V- = -12V$		19.0	25.0	mA
		$V+ = 15V$, $V- = -15V$		25.0	34.0	mA
	$V_{IN} = 0.8V$	$V+ = 9.0V$, $V- = -9.0V$		4.5	6.0	mA
		$V+ = 12V$, $V- = -12V$		5.5	7.0	mA
		$V+ = 15V$, $V- = -15V$		8.0	12.0	mA
Negative supply current (output open)	$V_{IN} = 1.9V$	$V+ = 9.0V$, $V- = -9.0V$		-13.0	-17.0	mA
		$V+ = 12V$, $V- = -12V$		-18.0	-23.0	mA
		$V+ = 15V$, $V- = -15V$		-25.0	-34.0	mA
	$V_{IN} = 0.8V$	$V+ = 9.0V$, $V- = -9.0V$		-1	-15	μA
		$V+ = 12V$, $V- = -12V$		-1	-15	μA
		$V+ = 15V$, $V- = -15V$		-.01	-2.5	mA
Power dissipation	$V+ = 9.0V$, $V- = -9.0V$			252	333	mW
	$V+ = 12V$, $V- = -12V$			444	576	mW
Propagation delay to "1" (t_{pd1})	$R_L = 3.0k\Omega$, $C_L = 15pF$, $T_A = 25°C$			275	560	ns
Propagation delay to "0" (t_{pd0})	$R_L = 3.0k\Omega$, $C_L = 15pF$, $T_A = 25°C$			70	175	ns
Rise time (t_r)	$R_L = 3.0k\Omega$, $C_L = 15pF$, $T_A = 25°C$			75	100	ns
Fall time (t_f)	$R_L = 3.0k\Omega$, $C_L = 15pF$, $T_A = 25°C$			40	75	ns

NOTE

*Voltage values shown are with respect to network ground terminal. Positive current is defined as current into the referenced pin.

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT VOLTAGE AND CURRENT-LIMITING CHARACTERISTICS

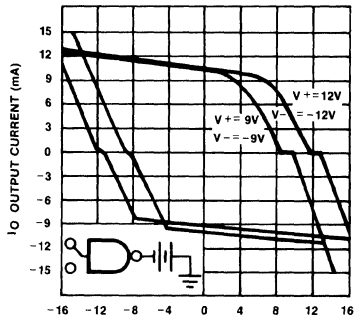

RS232C DATA TRANSMISSION

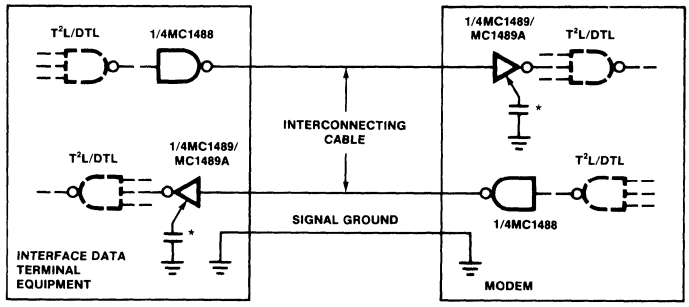

NOTE

*Optional for noise filtering

AC LOAD CIRCUIT



NOTE

*C_L includes probe and jig capacitance.

SWITCHING WAVEFORMS

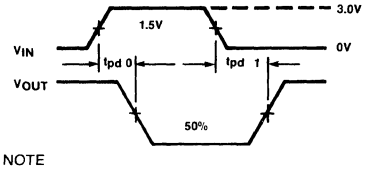

NOTE

t_r and t_f are measured between 10% and 90% of the output waveform

APPLICATIONS

By connecting a capacitor to each driver output the slew rate can be controlled utilizing the output current limiting characteristics of the MC1488. For a set slew rate the appropriate capacitor value may be calculated using the following relationship

$$C = I_{SC}\,(\Delta T/\Delta V)$$

where C is the required capacitor, I_{SC} is the short circuit current value, and $\Delta V/\Delta T$ is the slew rate.

RS232C specifies that the output slew rate must not exceed 30V per microsecond. Using the worst case output short circuit current of 12mA in the above equation, calculations result in a required capacitor of 400pF connected to each output.

TYPICAL APPLICATIONS

DTL/TTL-TO-MOS TRANSLATOR

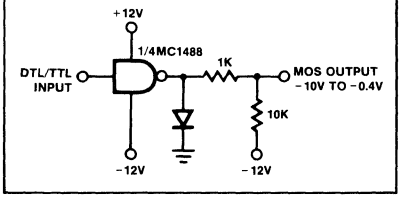

DTL/TTL-TO-HTL TRANSLATOR

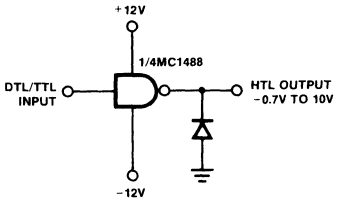

DTL/TTL-TO-RTL TRANSLATOR

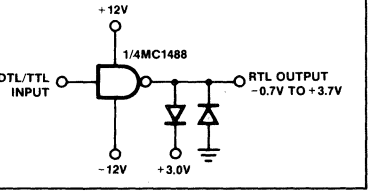

8

DESCRIPTION

The MC1489/MC1489A are quad line receivers designed to interface data terminal equipment with data communications equipment. They are constructed on a single monolithic silicon chip. These devices satisfy the specifications of EIA standard No. RS232C.

FEATURES

- **Four totally separate receivers per package**
- **Programmable threshold**
- **Built-in input threshold hysteresis**
- **"Fail safe" operating mode**
- **Inputs withstand ±30V**

PIN CONFIGURATION

F,N PACKAGE

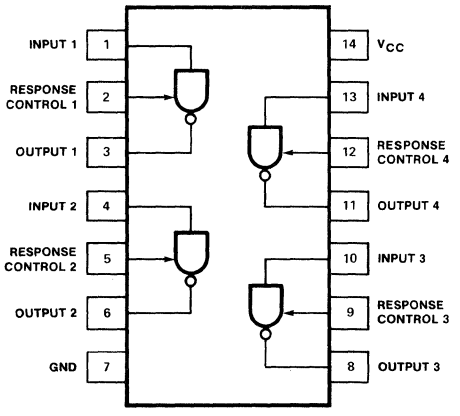

ORDER PART NO.
MC1489F/MC1489AF/MC1489N/MC1489AN

EQUIVALENT SCHEMATIC

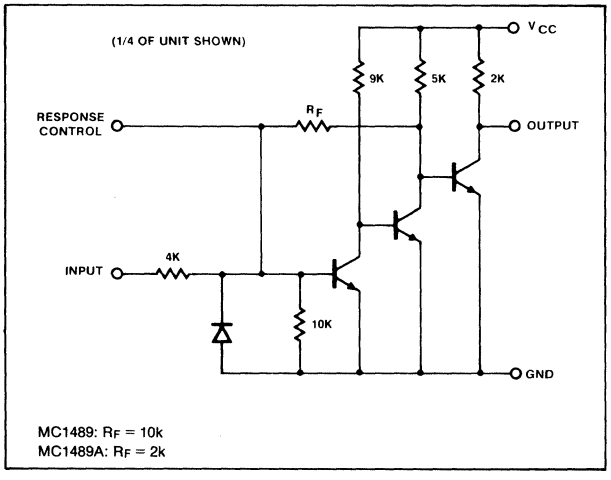

MC1489: R_F = 10k
MC1489A: R_F = 2k

AC TEST CIRCUIT

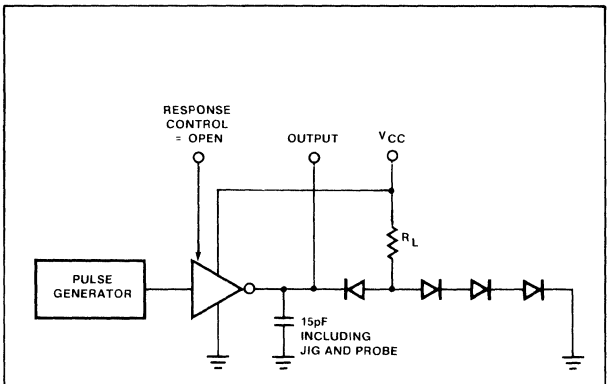

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Power supply voltage	10	V
Input voltage range	±30	V
Output load current	20	mA
Power dissipation:		
F package	1	W
N package	800	mW
Operating temperature range	0 to +75	°C
Storage temperature range	-65 to +150	°C

VOLTAGE WAVEFORMS

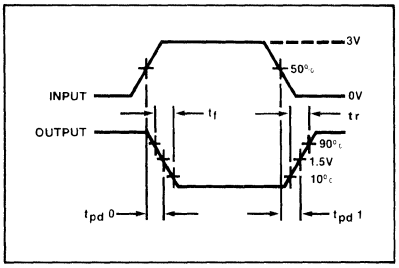

DC ELECTRICAL CHARACTERISTICS V_{CC} = 5.0V ± 1%, 0°C ≤ T_A ≤ +75°C unless otherwise specified.[1,2]

PARAMETER	TEST CONDITIONS	MC1489			MC1489A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input high threshold voltage	T_A = 25°C, V_{OUT} ≤ 0.45V, I_{OUT} = 10mA	1.0		1.5	1.75		2.25	V
Input low threshold voltage	T_A = 25°C, V_{OUT} ≤ 2.5V, I_{OUT} = -0.5mA	0.75		1.25	0.75		1.25	V
	V_{IN} = +25V	+3.6	+5.6	+8.3	+3.6	+5.6	+8.3	mA
	V_{IN} = -25V	-3.6	-5.6	-8.3	-3.6	-5.6	-8.3	
Input current	V_{IN} = +3V	+0.43	+0.53		+0.43	+0.53		mA
	V_{IN} = -3V	-0.43	-0.53		-0.43	-0.53		
Output high voltage	V_{IN} = 0.75V, I_{OUT} = -0.5mA	2.6	3.8	5.0	2.6	3.8	5.0	V
	Input = Open, I_{OUT} = -0.5mA	2.6	3.8	5.0	2.6	3.8	5.0	V
Output low voltage	V_{IN} = 3.0V, I_{OUT} = 10mA		0.33	0.45		0.33	0.45	V
Output short circuit current	V_{IN} = 0.75V		3.0			3.0		mA
Supply current	V_{IN} = 5.0V		20	26		20	26	mA
Power dissipation	V_{IN} = 5.0V		100	130		100	130	mW

NOTES

1. Voltage values shown are with respect to network ground terminal. Positive current is defined as current into the referenced pin.
2. These specifications apply for response control pin = open.

AC ELECTRICAL CHARACTERISTICS V_{CC} = 5.0V ± 1%, T_A = 25°C unless otherwise specified.[1,2]

PARAMETER	TEST CONDITIONS	MC1489			MC1489A			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input to output "high" Propagation delay (t_{pd1})	R_L = 3.9kΩ (AC test circuit)		25	85		25	85	ns
Input to output "low" Propagation delay (t_{pd0})	R_L = 390Ω (AC test circuit)		20	50		20	50	ns
Output rise time	R_L = 3.9kΩ (AC test circuit)		110	175		110	175	ns
Output fall time	R_L = 390Ω (AC test circuit)		9	20		9	20	ns

NOTES

1. Voltage values shown are with respect to network ground terminal. Positive current is defined as current into the referenced pin.
2. These specifications apply for response control pin = open.

TYPICAL APPLICATIONS

RS232C DATA TRANSMISSION

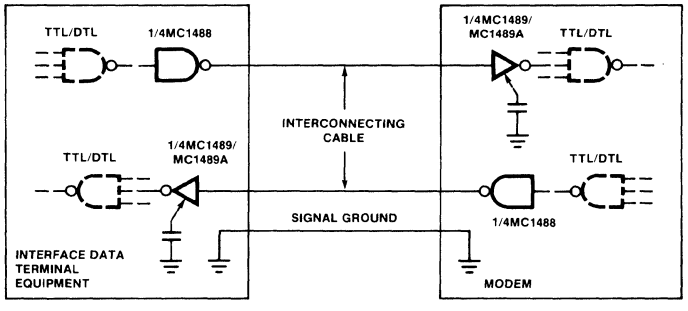

*Optional for noise filtering

MOS TO TTL/DTL TRANSLATOR



75S107-F,N

DESCRIPTION

The 75S107 is a high speed dual line receiver that is functionally equivalent and pin compatible to the SN75107A. If features less than 17ns propagation delay without sacrificing input performance characteristics. This is accomplished through the utilization of Schottky technology.

The 75S107 maintains ±3V common mode voltage range, 7.5mV input offset voltage and 5μA offset current. It also features STTL compatible output levels with a minimum sink/source capability of 10 Schottky gate loads.

FEATURES

- **Functionally equivalent and pin compatible to SN75107A**
- **17ns maximum guaranteed propagation delay**
- **20μA maximum input bias current**
- **STTL compatible strobes and outputs**
- **Large common mode input voltage range**
- **Operates from standard supply voltages**

APPLICATIONS

- **MOS memory sense amp**
- **A/D conversion**
- **High speed line receiver**

PIN CONFIGURATION

F,N PACKAGE

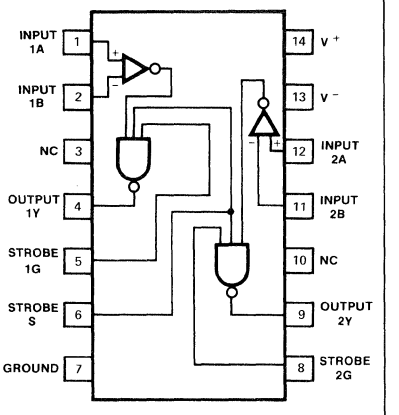

ORDER PART NO.
75S107F
75S107N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V+)	+7	V
Negative supply voltage (V−)	-7	V
Differential input voltage	±6	V
Common mode input voltage	±5	V
Strobe/gate input voltage	+5.25	V
Power dissipation	600	mW
Operating temperature range	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	+300	°C

EQUIVALENT SCHEMATIC

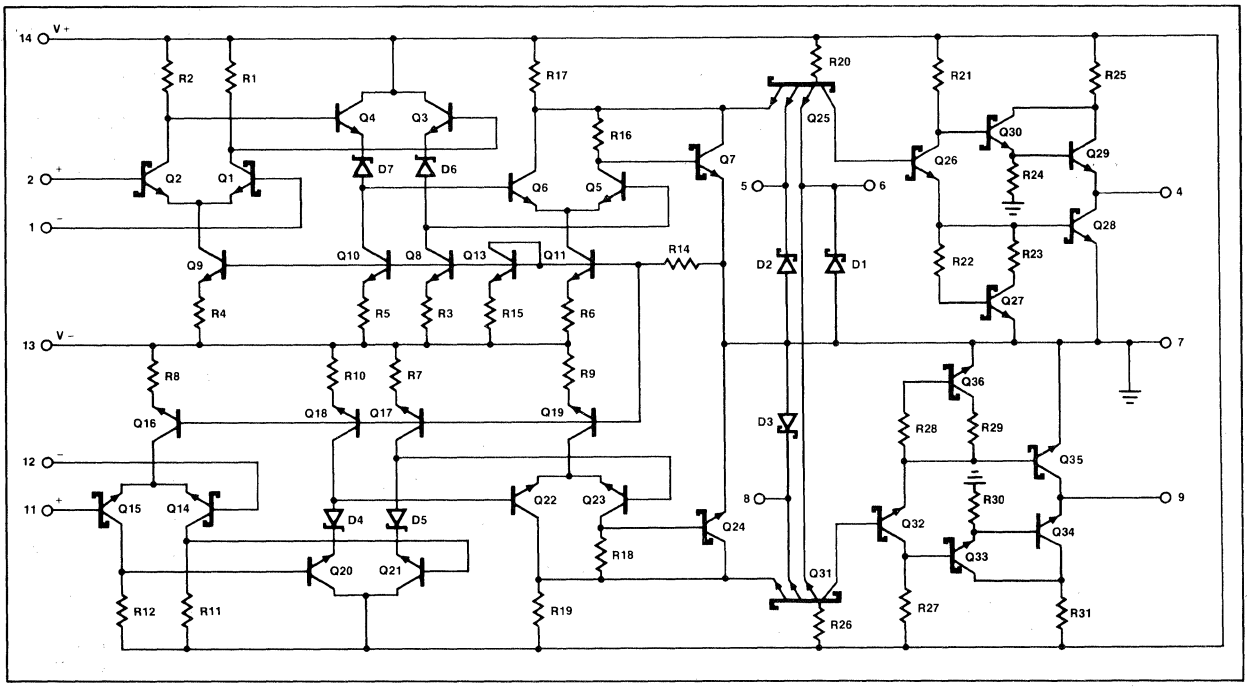

ELECTRICAL CHARACTERISTICS T_A = 0 to +70°C, V+ = +5.00, V- = -5.00 unless otherwise specified.

PARAMETER		TEST CONDITIONS	75S107			UNIT
			Min	Typ	Max	
AMPLIFIER INPUT						
	Input offset voltage	V+ = 4.75, V- = -4.75			25	mV
	Input bias current @ 25°C	V+ = 5.25, V- = -5.25		7.5	20	μA
	over temp. range	V+ = 5.25, V- = -5.25			40	μA
	Input offset current @ 25°C	V+ = 5.25, V- = -5.25		1.0	5	μA
	over temp. range	V+ = 5.25, V- = -5.25			12	μA
	Input common mode voltage range	V+ = 4.75, V- = -4.75	±3			V
	Input resistance			4		kΩ
	Input capacitance			3	6	pF
	Voltage gain			5		V/mV
SCHOTTKY GATE/OUTPUT CHARACTERISTICS						
I_{IH}	High level input current into 1G or 2G strobe	V+ = 5.25, V- = -5.25				
		V_{IH} = 2.7V			50	μA
		V_{IH} = 5.25V			1	mA
I_{IH}	High level input current into common strobe S	V+ = 5.25, V- = -5.25				
		V_{IH} = 2.7V			100	μA
		V_{IH} = 5.25V			2	mA
I_{IL}	Low level input current into 1G or 2G	V+ = 5.25, V- = -5.25			-2.0	mA
		V_{IL} = 0.5V				
I_{IL}	Low level input current into common strobe S	V+ = 5.25, V- = -5.25			-4.0	mA
		V_{IL} = 0.5V				
V_{OH}	High level output voltage	V+ = 4.75V, $V_{I(S)}$ = 2.0V	2.7	3.4		V
		V- = -4.75V				
		I_{LOAD} = -1mA				
V_{OL}	Low level output voltage	V+ = 4.75			0.5	V
		V- = -4.75				
		I_{LOAD} = 20mA				
		$V_{I(S)}$ = 2.0V				
POWER SUPPLY REQUIREMENTS						
	Supply voltage					
V+			4.75	5.00	5.25	V
V-			-4.75	-5.00	-5.25	V
I_{CC}+	Supply current	V+ = 5.25V		20	30	mA
I_{CC}-		V- = -5.25V		-11	-15	mA
		T_A = 25°C				
I_{OS}	Short circuit	V+ = +5.25	-40		-100	mA
	output current	V- = -5.25				
LARGE SIGNAL SWITCHING SPEED						
T_PLH (D)	Low to high propagation delay from amp	R_L = 280Ω C_L = 15pF		12	17	ns
	inputs to output[1]	T_A = 25°C				
T_PHL (D)	High to low propagation delay from amps	R_L = 280Ω C_L = 15pF		9	13	ns
	inputs to output[1]	T_A = 25°C				
T_PLH (S)	Low to high propagation delay from strobes	R_L = 280Ω C_L = 15pF		4.5	6	ns
	input to output[2]	T_A = 25°C				
T_PHL (S)	High to low propagation delay strobe	R_L = 280Ω C_L = 15pF		3.0	4.5	ns
	input to output[2]	T_A = 25°C				
	Maximum operating frequency	R_L = 280Ω C_L = 15pF	40	55		MHz
		T_A = 25°C				

NOTES

1. Response time measured from 0V point of ±100mV$_{P-P}$ 10MHz square wave to the 1.5 point of the output.
2. Response time measured from 1.5V point to input to 1.5V point of output.
3. Response time measured from the start of a 100mV input step with 5mV overdrive to the 1.5V point of the output.

8

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME vs TEMPERATURE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

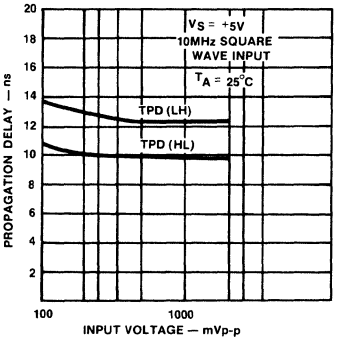

OUTPUT VOLTAGE vs AMBIENT TEMPERATURE



INPUT BIAS CURRENT vs AMBIENT TEMPERATURE



INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE

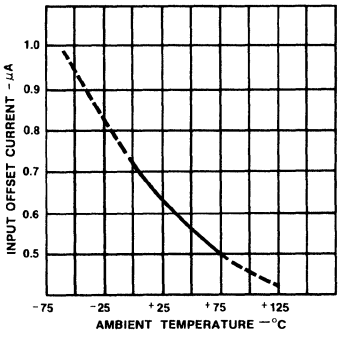

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

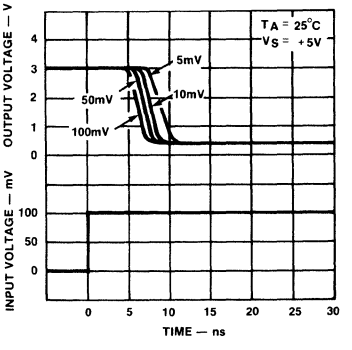

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

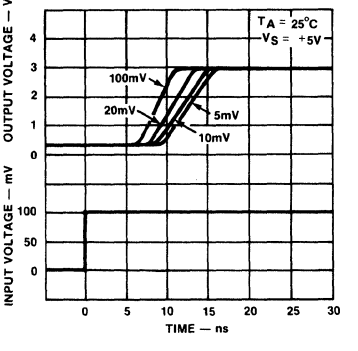

75S108-F,N

DESCRIPTION

The 75S108 is a high speed dual line receiver that is functionally equivalent and pin compatible to the SN75108N. It features less than 17ns propagation delay without sacrificing input performance characteristics. This is accomplished through the utilization of Schottky technology.

The 75S108 maintains ±3V common mode voltage range, 7.5mV input offset voltage and 5μA offset current. It also features STTL compatible output levels with an open collector configuration for wired-AND logic applications.

FEATURES

- **Functionally equivalent and pin compatible to SN75108A**
- **17ns maximum guaranteed propagation delay**
- **20μA maximum input bias current**
- **TTL compatible strobes and outputs**
- **Open collector outputs**
- **Large common mode input voltage range**
- **Operates from standard supply voltages**

APPLICATIONS

- **High speed line receiver**
- **MOS memory sense amp**
- **A/D conversion**

PIN CONFIGURATION

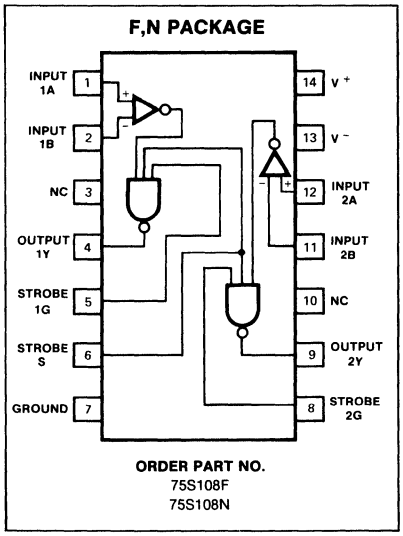

ORDER PART NO.
75S108F
75S108N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V+)	+7	V
Negative supply voltage (V-)	-7	V
Differential input voltage	±6	V
Common mode input voltage	±5	V
Strobe gate input voltage	+5.25	V
Power dissipation	600	mW
Operating temperature range	0 to 70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60 sec)	+300	°C

EQUIVALENT SCHEMATIC

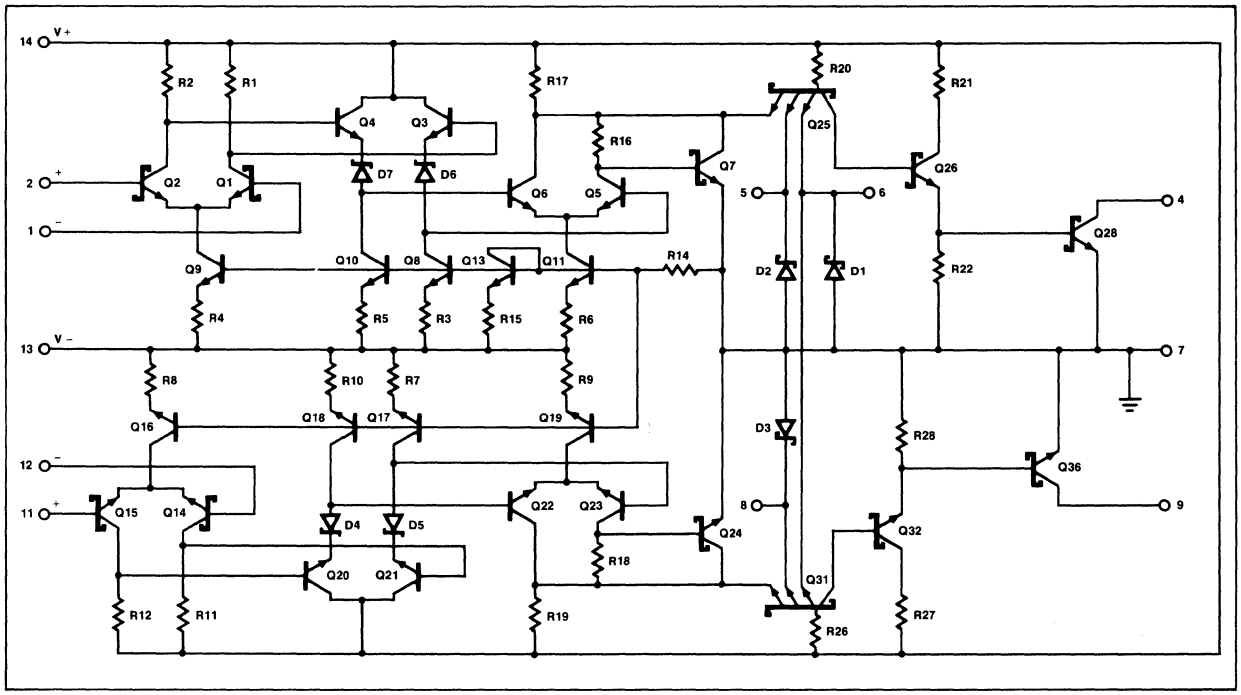

8

ELECTRICAL CHARACTERISTICS T_A = 0 to 70°C, V+ = +5.00, V- = -5.00 unless otherwise specified.

PARAMETER	TEST CONDITIONS	75S108			UNIT
		Min	Typ	Max	
AMPLIFIER INPUT Input offset voltage	V+ = 4.75, V- = -4.75			25	mV
Input bias current @ 25°C over temp range	V+ = 5.25, V- = -5.25 V+ = 5.25, V- = -5.25		7.5	20 40	μA μA
Input offset current @ 25°C over temp range	V+ = 5.25, V- = -5.25 V+ = 5.25, V- = -5.25		1.0	5 12	μA μA
Input common mode voltage range Input resistance Input capacitance	V+ = 4.75, V- = -4.75	±3	 4 3	±3 6	V kΩ pF
Voltage gain			5		V/mV
SCHOTTKY GATE/OUTPUT CHARACTERISTICS I_{IH} High level input current into 1G or 2G strobe	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			 50 1	 μA mA
I_{IH} High level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			 100 2	 μA mA
I_{IL} Low level input current into 1G or 2G	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-2.0	mA
I_{IL} Low level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-4.0	mA
V_{OL} Low level output voltage	V+ = 4.75, $V_{I(S)}$ = 2.0V V- = -4.75 I_{LOAD} = 20mA			0.5	V
I_{OH} High level output current	V_{CC}+ = 5.25V V_{CC}- = -5.25V V_{OH} = 5.25V			250	μA
POWER SUPPLY REQUIREMENTS Supply voltage V+ V-		 4.75 -4.75	 5.00 -5.00	 5.25 -5.25	 V V
Supply current	V+ = 5.25V V- = -5.25V T_A = 25°C				
I_{CC}+ I_{CC}-			20 -11	30 -15	mA mA
LARGE SIGNAL SWITCHING SPEED T_PLH (D) Low to high propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		12	17	ns
T_PHL (D) High to low propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		9	13	ns
T_PLH (S) Low to high propagation delay from strobes input to output[2]	R_L = 280Ω C_L = 15pF T_A 25°C		6	10	ns
T_PHL (S) High to low propagation delay strobe input to output[2]	R_L = 280Ω C_L = 15pF T_A = 25°C		5	8	ns
Maximum operating frequency	R_L = 280Ω C_L = 15pF T_A = 25°C	25	35		MHz

NOTES:

1. Response time measured from 0V point of ±100 mV_{P-P} 10MHz square wave to the 1.5 point of the output.
2. Response time measured from 1.5V point of input to 1.5V point of output.
3. Response time measured from the start of a 100mV input step with 5mV overdrive to the 1.5V point of the output.

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME vs TEMPERATURE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGE

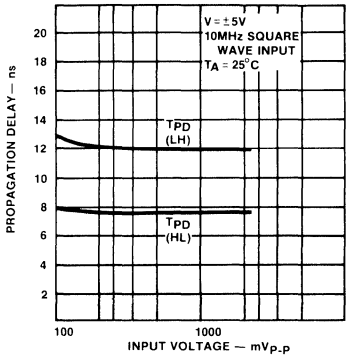

OUTPUT VOLTAGE vs AMBIENT TEMPERATURE



INPUT BIAS CURRENT vs AMBIENT TEMPERATURE



INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE

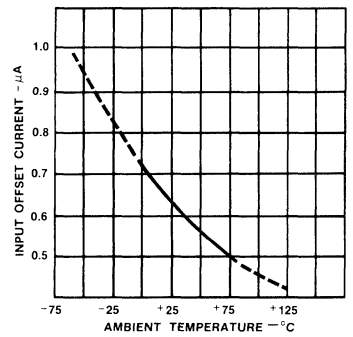

RESPONSE TIME vs TEMPERATURE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

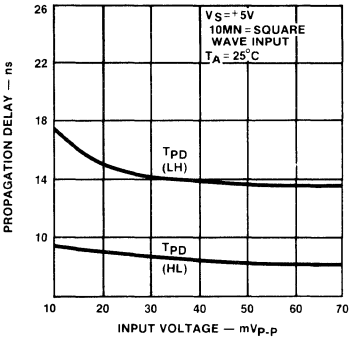

PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES

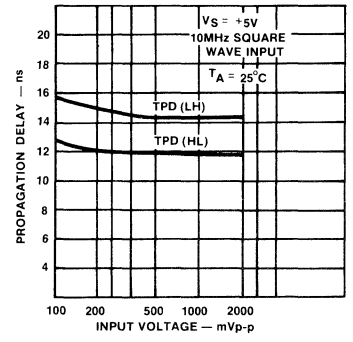

8

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

INPUT BIAS CURRENT vs AMBIENT TEMPERATURE



INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

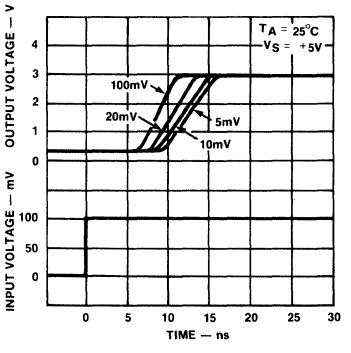

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

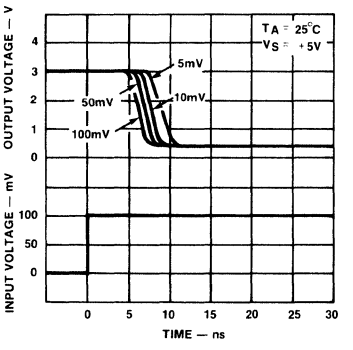

75S207-F,N

DESCRIPTION

The 75S207 is a high speed dual sense amplifier that is functionally equivalent and pin compatible to the SN75207. The improved input sensitivity of ±10mV makes it suitable as a MOS memory sense amplifier which can result in faster memory cycles. The 75S207 features less than 17ns propagation delay without sacrificing input performance characteristics. This is accomplished through the utilization of Schottky technology.

The 75S207 also features STTL compatible output levels with a minimum sink/source capability of 10 Schottky gate loads.

FEATURES

- **Functionally equivalent and pin compatible to SN75207**
- **17ns maximum guaranteed propagation delay**
- **20μA maximum input bias current**
- **STTL compatible strobes and outputs**
- **Large common mode input voltage range**
- **Operates from standard supply voltages**

APPLICATIONS

- **MOS memories sense amp**
- **A/D conversion**
- **High speed line receiver**

PIN CONFIGURATION

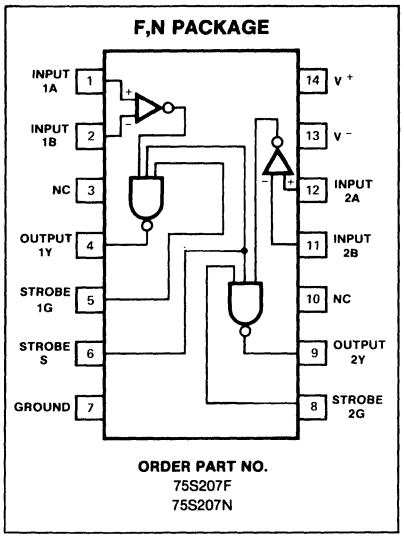

ORDER PART NO.
75S207F
75S207N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V+)	+7	V
Negative supply voltage (V-)	-7	V
Differential input voltage	±6	V
Common mode input voltage	±5	V
Strobe/gate input voltage	+5.25	V
Power dissipation	600	mW
Operating temperature rnage	0 to 70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	+300	°C

EQUIVALENT SCHEMATIC

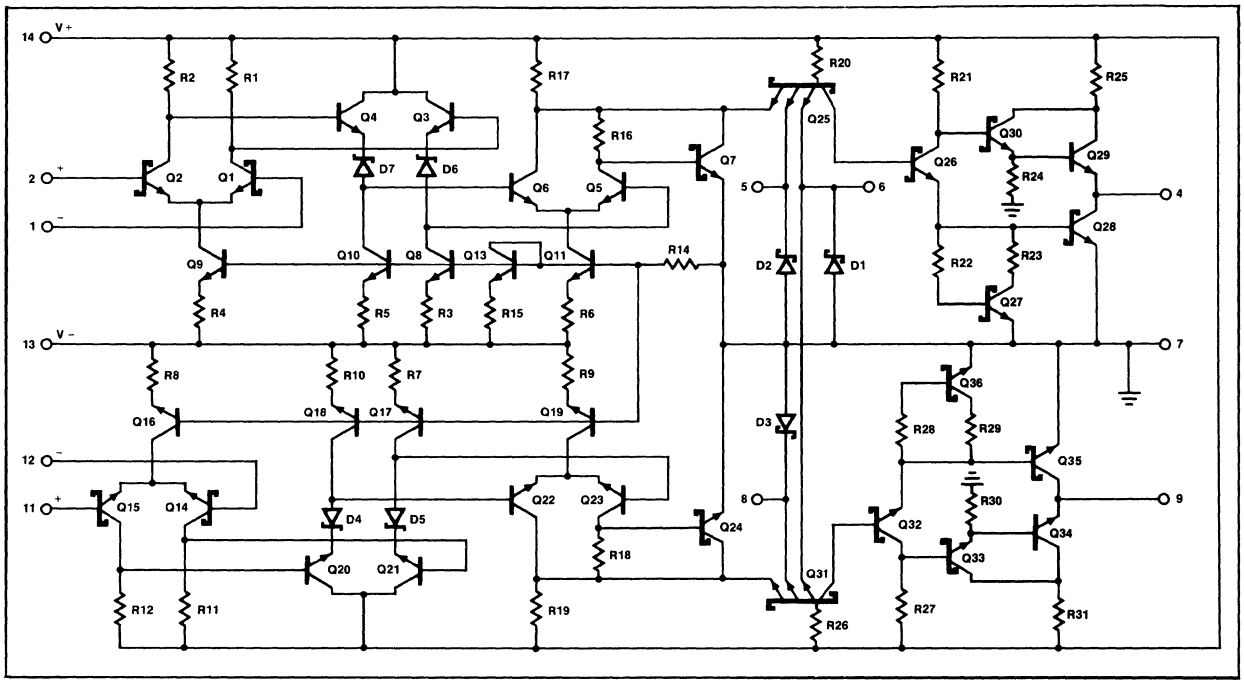

8

DC ELECTRICAL CHARACTERISTICS

V+ = +5.00, V- = -5.00, T_A = 0 to 70°C unless otherwise specified.

PARAMETER		TEST CONDITIONS	75S207			UNIT
			Min	Typ	Max	
AMPLIFIER INPUT						
	Input offset voltage	V+ = 4.75, V- = -4.75			10	mV
	Input bias current @ 25°C over temp. range	V+ = 5.25, V- = -5.25 V+ = 5.25, V- = -5.25		7.5	20 40	μA μA
	Input offset current @ 25°C over temp. range	V+ = 5.25, V- = -5.25 V+ = 5.25, V- = -5.25		1.0	5 12	μA μA
	Input common mode voltage range Input resistance Input capacitance	V+ = 4.75, V- = -4.75	±3	 4 3	 6	V kΩ pF
	Voltage gain			5		V/mV
SCHOTTKY GATE/OUTPUT						
I_{IH}	High level input current into 1G or 2G strobe	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			50 1	μA mA
I_{IH}	High level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			100 2	μA mA
I_{IL}	Low level input current into 1G or 2G	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-2.0	mA
I_{IL}	Low level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-4.0	mA
V_{OH}	High level output voltage	V+ = 4.75, $V_{I(S)}$ = 2.0V V- = -4.75 I_{LOAD} = -1mA	2.7	3.4		V
V_{OL}	Low level output voltage	V+ = 4.75, V- = -4.75 I_{LOAD} = 20mA $V_{I(S)}$ = 2.0V			0.5	V
POWER SUPPLY REQUIREMENTS						
	Supply voltage V+ V-		 4.75 -4.75	 5.00 -5.00	 5.25 -5.25	 V V
I_{CC+} I_{CC-}	Supply current	V+ = 5.25V V- = -5.25V T_A = 25°C		20 -11	30 -15	mA mA
I_{OS}	Short circuit output current	V+ = 5.25 V- = -5.25	-40		-100	mA
LARGE SIGNAL SWITCHING SPEED						
$T_{pLH(D)}$	Low to high propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		12	17	ns
$T_{pHL(D)}$	High to low propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		9	13	ns
$T_{pLH(S)}$	Low to high propagation delay from strobes input to output[2]	R_L = 280Ω C_L = 15pF T_A = 25°C		4.5	6	ns
$T_{pHL(S)}$	High to low propagation delay strobe input to output[2]	R_L = 280Ω C_L = 15pF T_A = 25°C		3.0	4.5	ns
	Maximum operating frequency	R_L = 280Ω C_L = 15pF T_A = 25°C	40	55		MHz

NOTES

1. Response time measured from 0V point of ±100mV P-P 10MHz square wave to the 1.5 point of the output.
2. Response time measured from 1.5V point of input to 1.5V point of the output.
3. Response time measured from the start of a 100mV input step with 5mV overdrive to the 1.5V point of the output.

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME vs TEMPERATURE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES



OUTPUT VOLTAGE vs AMBIENT TEMPERATURE



INPUT BIAS CURRENT vs AMBIENT TEMPERATURE



INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES



8

75S208-F,N

DESCRIPTION

The 75S208 is a high speed dual sense amplifier that is functionally equivalent and pin compatible to the SN75208. The improved input sensitivity of ±10mV makes it suitable as a MOS memory sense amplifier which can result in faster memory cycles.

The 75S208 features less than 17ns propagation delay without sacrificing input performance characteristics. This is accomplished through the utilization of Schottky technology. It also features STTL compatible output levels with an open collector configuration for wired-AND logic applications.

FEATURES

- **Functionally equivalent and pin compatible to 75208**
- **17ns maximum guaranteed propagation delay**
- **20μA maximum input bias current**
- **STTL compatible strobes and outputs**
- **Open collector outputs**
- **Large common mode input voltage range**
- **Operates from standard supply voltages**

APPLICATIONS

- **MOS memories sense amp**
- **A/D conversion**
- **High speed line receiver**

PIN CONFIGURATION

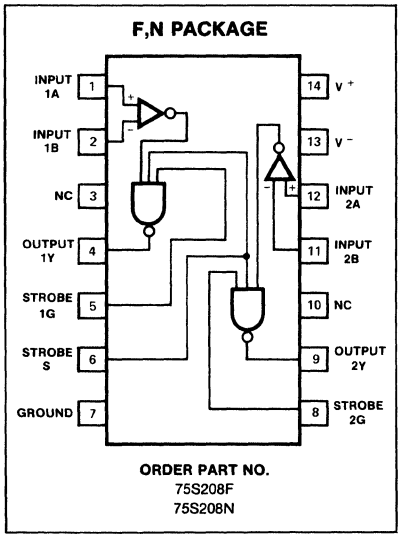

ORDER PART NO.
75S208F
75S208N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Positive supply voltage (V+)	+7	V
Negative supply voltage (V-)	-7	V
Differential input voltage	±6	V
Common mode input voltage	±5	V
Strobe/gate input voltage	+5.25	V
Power dissipation	600	mW
Operating temperature range	0 to + 70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering 60sec)	+300	°C

EQUIVALENT SCHEMATIC

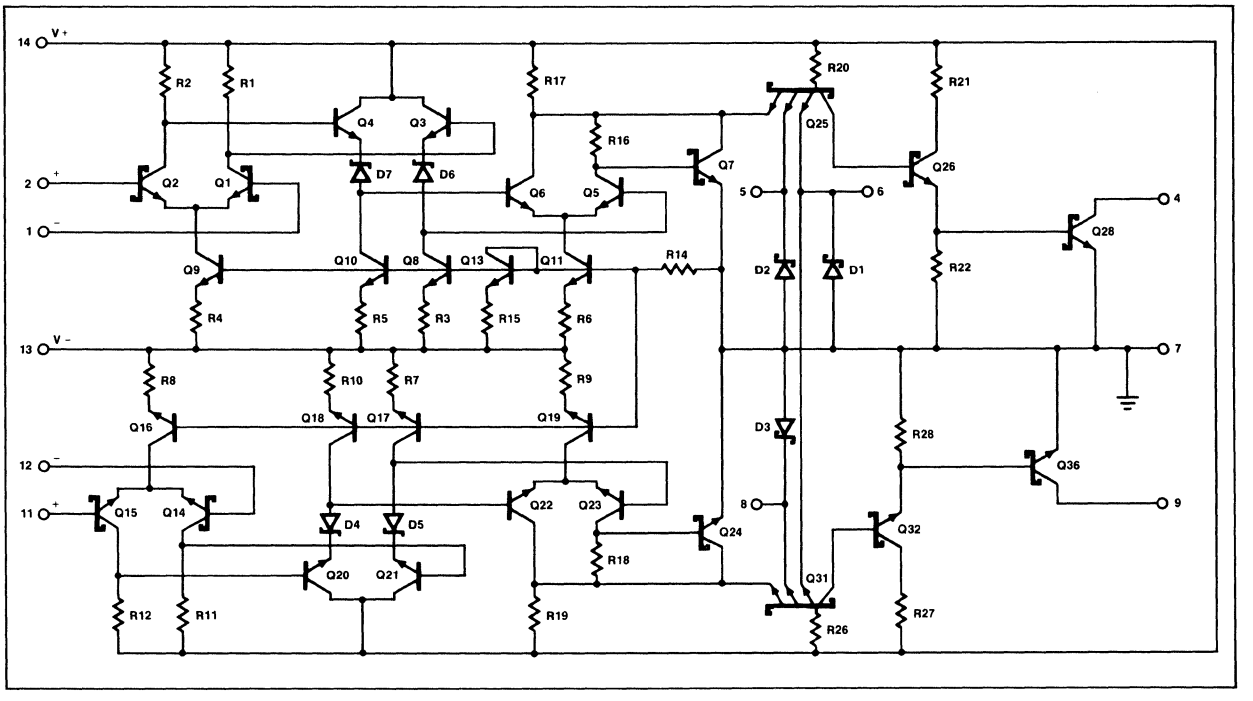

DC ELECTRICAL CHARACTERISTICS

V+ = +5.00, V- = -5.00, T_A = 0 to 70°C unless otherwise specified.

PARAMETER	TEST CONDITIONS	75S208			UNIT
		Min	Typ	Max	
AMPLIFIER INPUT					
Input offset voltage	V+ = 4.75, V- = -4.75			10	mV
Input bias current @ 25°C	V+ = 5.25, V- = -5.25		7.5	20	μA
over temp. range	V+ = 5.25, V- = -5.25			40	μA
Input offset current @ 25°C	V+ = 5.25, V- = -5.25		1.0	5	μA
over temp. range	V+ = 5.25, V- = -5.25			12	μA
Input common mode voltage range	V+ = 4.75, V- = -4.75	±3			V
Input resistance			4		kΩ
Input capacitance			3	6	pF
Voltage gain			5		V/mV
SCHOTTKY GATE/OUTPUT CHARACTERISTICS					
I_{IH} High level input current into 1G or 2G strobe	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			50 1	μA mA
I_{IH} High level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IH} = 2.7V V_{IH} = 5.25V			100 2	μA mA
I_{IL} Low level input current into 1G or 2G	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-2.0	mA
I_{IL} Low level input current into common strobe S	V+ = 5.25, V- = -5.25 V_{IL} = 0.5V			-4.0	mA
V_{OL} Low level output voltage	V+ = 4.75, $V_{I(S)}$ = 2.0V V- = -4.75 I_{LOAD} = 20mA			0.5	V
I_{OH} High level output current	V_{CC}+ = 5.25 V V_{CC}- = -5.25V V_{OH} = 5.25V			250	μA
POWER SUPPLY REQUIREMENTS					
Supply voltage					
V+		4.75	5.00	5.25	V
V-		-4.75	-5.00	-5.25	V
I_{CC}+ Supply current	V+ = 5.25V		20	30	mA
I_{CC}-	V- = -5.25V		-11	-15	mA
	T_A = 25°C				
LARGE SIGNAL SWITCHING SPEED					
$T_pLH(D)$ Low to high propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		12	17	ns
$T_pHL(D)$ High to low propagation delay from amp inputs to output[1]	R_L = 280Ω C_L = 15pF T_A = 25°C		9	13	ns
$T_pLH(S)$ Low to high propagation delay from strobes input to output[2]	R_L = 280Ω C_L = 15pF T_A = 25°C		6	10	ns
$T_pHL(S)$ High to low propagation delay strobe input to output[2]	R_L = 280Ω C_L = 15pF T_A = 25°C		5	8	ns
Maximum operating frequency	R_L = 280Ω C_L = 15pF T_A = 25°C	25	35		MHz

NOTES

1. Response time measured from 0V point of ±100MHz square wave to the 1.5 point of the output.
2. Response time measured from 1.5V point of input to 1.5V point of the output.
3. Response time measured from the start of a 100mV input step with 5mV overdrive to the 1.5V point of the output.

TYPICAL PERFORMANCE CHARACTERISTICS

RESPONSE TIME vs TEMPERATURE



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES



PROPAGATION DELAY FOR VARIOUS INPUT VOLTAGES



INPUT BIAS CURRENT vs AMBIENT TEMPERATURE



INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE



RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES

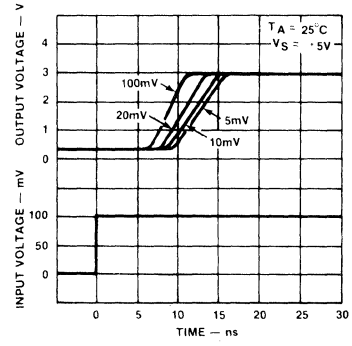

RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES



SECTION 9
DISPLAY DRIVERS

Section 9—DISPLAY DRIVERS

NE582	Hex Universal Driver	273
NE587	LED Decoder/Driver	275
NE589	LED Decoder/Driver	284
NE/SA594	Vacuum Flourescent Display Driver	293

DISPLAY DRIVER DEFINITIONS

T_A

Ambient temperature range. Range of the surrounding environment of the operating device.

T_J

Junction Temperature. The maximum temperature of the device. 150°C is standard for silicon devices.

T_{STG}

Storage temperature range. Temperature range that the device can be stored in a non-operating condition.

T_{SOLD}

Soldering Temperature. The temperature which can be applied to the lead frame of the device for short periods of time (normally specified for a duration of 10 sec).

Truth Tables

0 is logic level low
1 is logic level high
X - don't care condition - has no effect under circuit conditions listed.

Absolute Maximum Rating

Operating safe zones exceeding these limits could cause permanent damage to the device and are not meant to imply that devices can operate at these limits.

Power Dissipation

The power that the device can safely handle at 25°C. The dissipation must be derated as indicated for the individual package type.

Package Type Designation

See full package designations in Appendix.

V_{CC} ($-V_{CC}$)

Supply Voltage. The range of power supply voltage over which the device will operate safely.

LED

Light Emitting Diode

$\overline{XX}$

Negate Bar-when it appears over a function indicates that the "true" or valid condition of that function is a logic low level.

i.e. LE - would require a logic high level to cause a latch enable.
$\overline{LE}$ - would require a logic low level to cause a latch enable.

I_{SEG}

Segment Current. The amount of current supplied to each segment in a display. Current ratios are generally compared to segment 'b'.

BCD

Binary Coded Decimal

$\overline{BI}$/RBO

Blanking Input or Ripple Blanking Output.

$\overline{RBI}$

Ripple Blanking Input. The maximum clock frequency: the maximum input frequency at a clock input for the predictable performance. Above this frequency the device may cease to function.

t_{PLH}

Propagation Delay Time. The time between the specified reference points on the input and output waveforms with the output changing from the defined LOW level to the defined HIGH level.

t_{PHL}

Propagation Delay Times. The time between the specified reference points on the input and output waveforms with the output changing from the defined HIGH level to the defined LOW level.

Segment Identification



t_h

Hold Time. The interval immediately following the active transition of the timing pulse (usually the clock pulse) or following the transition of the control input to its latching level, during which interval the data to be recognized must be maintained at the input to ensure its continued recognition. A negative hold time indicates that the current logic level may be released prior to the active transition of the timing pulse and still be recognized.

t_s

Setup Time. The interval immediately preceeding the active transition of the timing pulse (usually the clock pulse) or preceeding the transition of the control input to its latching level, during which interval the data to be recognized must be maintained at the input to ensure its recognition. A negative setup time indicates that the correct logic level may be initiated sometime after the active transition of the timing pulse and still be recognized.

t_W

Pulse Width. The time between the specified reference points on the leading and trailing edges of a pulse.

t_{rec}

Recovery Time. The time between the reference point on the trailing edge of an asynchronous input control pulse and the reference point on the activating edge of a synchronous (clock) pulse input such that the device will respond to the synchronous input.

V_S

Source Voltage. A separate V_{CC} line depending on part type.

I_{OH}

Output Current Source the device can supply while maintaining a specified voltage output level.

Typical Value

The typical value of a particular parameter determined by characterization of the device or sampling. Usually indicates that the particular device is not 100% tested for the parameter because it does not vary or can be determined by design and other tested variables. Occasionally typical values are given rather than min-

DISPLAY DRIVER DEFINITIONS (Cont'd)

max values because 100% testing would raise the cost of the product to a prohibitive level. If a typical value must be guaranteed to ensure specific operation, custom testing can often be provided at an additional cost to the user.

I_S

Source Current. Current flowing into the V_S supply terminal of the device with specified operating conditions.

Duty Cycle

Ratio of time on to time off. Generally expressed in percentage.

V_F

Forward voltage drop of a device at a specified current level.

I_B

Input Bias Current Current into an analog circuit input, specified at a particular voltage level.

CLR

Clear. Clear command will preset all internal circuits to a predetermined state.

CE

Chip Enable.

V_{IH}

Input High Voltage. The range of input voltages recognized by the device as a logic high.

V_{IL}

Input Low Voltage. The range of input voltages recognized by the device as a logic low.

V_{OH}

Output High Voltage. The minimum guaranteed High voltage at an output terminal for the specified output current I_{OH} and at the minimum V_{CC} value.

V_{OL}

Output Low Voltage. The maximum guranteed low voltage at an output terminal sinking the specified load current I_{OL}.

V_{BR}

Output Breakdown Voltage. Maximum voltage applied to a disabled (off) output to ensure a leakage current less than the specified value.

V_{IN}

The range of voltage on any input which the device can safely handle or a specified input voltage to the device.

V_{OUT}

The range of voltage on any output which the device can safely handle or a specified output voltage to the device.

$I_{CC}(-I_{CC})$

Supply Current. The current flowing into the $+V_{CC}$ $(-V_{CC})$ supply terminal of the circuit with specified input conditions and open outputs. Input conditions are chosen to guarantee worst case operation unless specified.

I_{IH}

Input High Current. The Current flowing into or out of an input when a specified High level voltage is applied to that input.

I_{IL}

Input Low Current. The current flowing out of an input when a specified Low level voltage is applied to that input.

I_{OL}

Output Low Current. The current flowing into an output when a which is in the Low State.

I_{OS}

Output Short-Circuit Current. The current flowing out of an output which is in the High state when that output is short circuit to the ground.

I_{CEX}

Output Leakage Current. The current flowing out of or into a disabled (off) output with a specified High output voltage applied.

NE582-N

DESCRIPTION

The NE582 is a general interface device comprising a high current output transistor and drive circuitry in each of 6 elements. Each output transistor is individually capable of sinking 400mA with a typical saturation voltage of 0.5V. Input loading is such that direct interfacing with P-MOS, N-MOS, C-MOS or TTL is possible.

The NE582 has applications as a LED display driver, low voltage relay/lamp drivers and many others where high current capability without speed constraints is required.

The NE582 is supplied in a 16-pin high dissipation dual-in-line plastic package.

FEATURES

- **Low saturation voltage (typically 0.5V) for minimum power dissipation**
- **High output sink current capability—400mA**
- **Low input current loading for MOS compatibility**
- **Low standby power consumption**
- **Suitable for 3 volt battery operation**
- **Inputs/outputs are compatible with 75494**

PIN CONFIGURATION

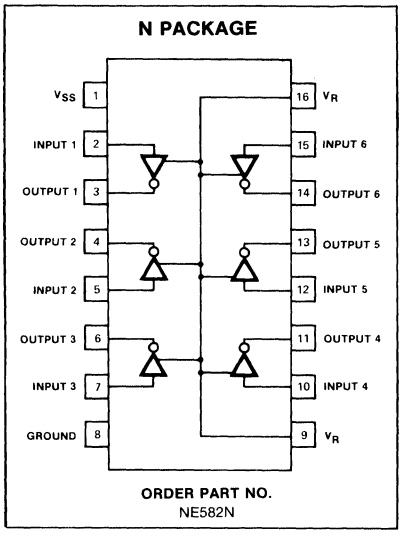

EQUIVALENT SCHEMATIC

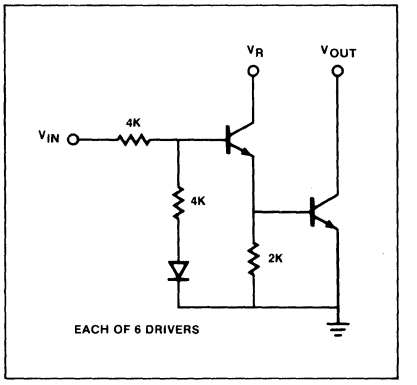

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Input voltage range[1]	-12 to V_{SS}	V
Output voltage[2]	10	V
Output to input voltage differential	10	V
Voltage at V_{SS} (pin 1)	10	V
Output current—each output	400	mA
Output current—all outputs	800	mA
Continuous total power dissipation at or below 25°C[3]	800	mW
Current in V_R (pin 9 or 16)	25	mA
Operating free-air temperature range	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature 1/16 inch from case for 10sec	260	°C

NOTES

1. The inputs are the only pins which may be negative with respect to ground.
2. Voltage values are with respect to ground.
3. Above 25°C, derate power dissipation at 6.25mW/°C.

ELECTRICAL CHARACTERISTICS T_A = 0°C to 70°C unless otherwise specified.

PARAMETER		TEST CONDITIONS	LIMITS Min	LIMITS Typ	LIMITS Max	UNIT
V_{OL}	Low level output voltage	V_{IN} V, I_R mA, I_{OL} mA 6.5, 12, 250 6.5, 20, 400 R_{IN} = 1K (Series input resistance)		 .320 .500	 .450 .750	 V V
I_{OH}	High level output current	V_{OH} = 10V, I_{IN} = 40μA V_{OH} = 10V, V_{IN} = 0.5V			400 400	μA μA
I_{IN}	Input current at maximum Input voltage	V_{IN} = 10V, I_{OL} = 20mA, I_R = 2mA		2.2	3.3	mA
V_R		V_{IN} = 6.5V, I_R = 6mA, I_{OL} = 80mA		.9	1.5	V
I_{SS}	Current into pin 1	V_{SS} = 10V			100	μA

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	LIMITS			UNIT
			Min	Typ	Max	
	Switching characteristics					
T_{PLH}	Propagation delay, low to high level input	$R_R = 680\Omega$ $R_L = 39\Omega$ $C_L = 15pF$		300		ns
T_{PHL}	Propagation delay, high to low level input	$V_{IH} = 7.5V$ $V_{IL} = 0V$ $t_r = t_f \leq 10ns$ $t_w = 1\mu s$ PRR = 100kHz		30		ns

TYPICAL APPLICATION FOR DIGIT DRIVING OF AN LED DISPLAY

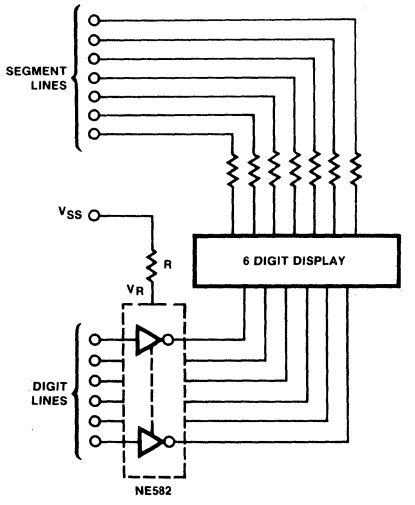

1/6 NE582 AS A RELAY DRIVER



1/6 NE582 AS A RELAY DRIVER

PRELIMINARY SPECIFICATION

OUTPUT SATURATION VOLTAGE AS A FUNCTION OF OUTPUT LOAD CURRENT, I_R = 25mA V_{IN} = 6.5 VOLTS

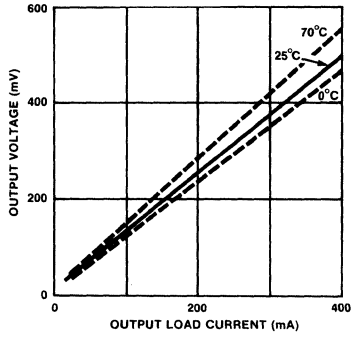

INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE, I_R = 25mA, V_{SS} = 10V, T_A = 25°C

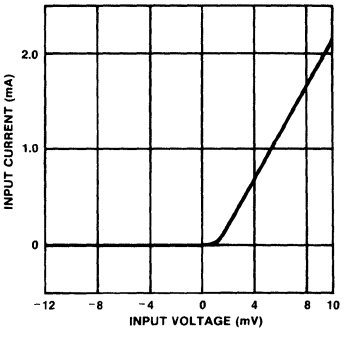

NE587-F,N

DESCRIPTION

The NE587 is a latch/decoder/driver for 7-segment common anode LED displays. The NE587 has a programmable current output up to 50mA which is essentially independent of output voltage, power supply voltage, and temperature. The data (BCD) inputs and $\overline{LE}$ (latch enable) input are low-loading so that they are compatible with any data bus system. The 7-segment decoding is implemented with a ROM so that alternative fonts can be made available.

FEATURES

- **Latched BCD inputs**
- **Low loading bus-compatible inputs**
- **Ripple-blanking on leading and/or trailing edge zeros**

APPLICATIONS

- **Digital panel meters**
- **Measuring instruments**
- **Test equipment**
- **Digital clocks**
- **Digital bus monitoring**

PIN CONFIGURATIONS

F,N PACKAGE



ORDER PART NO.
NE587F
NE587N

ABSOLUTE MAXIMUM RATINGS T_A = 25°C unless otherwise specified

PARAMETER		RATING	UNIT
V_{CC}	Supply voltage	−0.5 to +7	V
V_{IN}	Input voltage (D_0 - D_3, $\overline{LE}$, $\overline{RBI}$)	−0.5 to +15	V
V_{OUT}	Output voltage (a-g, RBO)	−0.5 to +7	V
P_D	Power dissipation (25°C)[1]	1000	mW
T_A	Ambient temperature range	0 to 70	°C
T_J	Junction temperature	150	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Soldering temperature (10 sec. max)	300	°C

NOTE
Derate power dissipation as indicated
N package - 95°C/watt above 55°C
F package - 100°C/watt above 50°C

BLOCK DIAGRAM

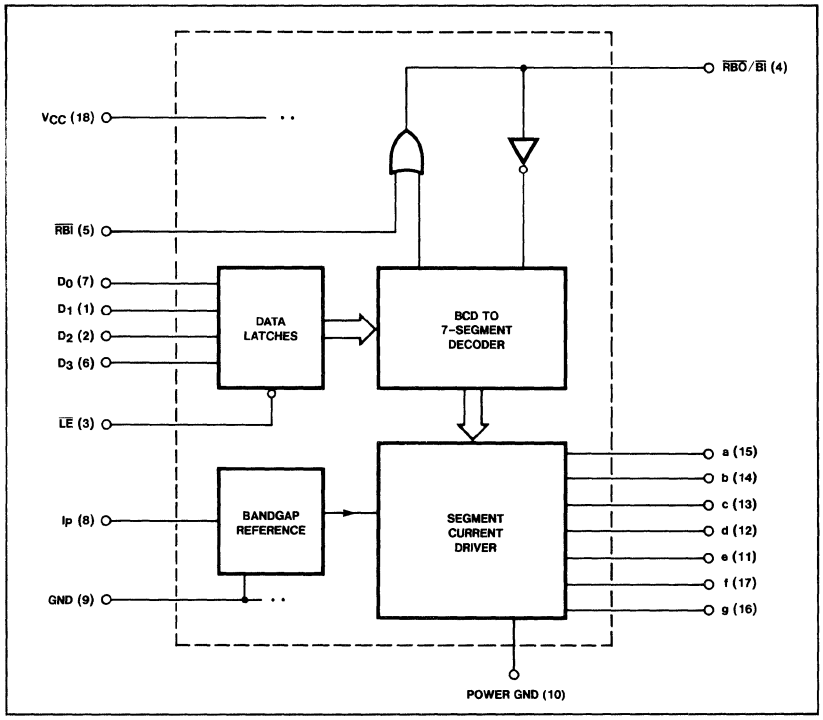

DC ELECTRICAL CHARACTERISTICS

V_{CC} = 4.75 to 5.25V, 0°C < T_A < 70°C.
Typical values are at V_{CC} = 5V, T_A = 25°C, R_P = 1kΩ (±1%) unless otherwise stated.

PARAMETER		TEST CONDITIONS	NE587			UNIT
			Min	Typ	Max	
V_{CC}	Operating supply voltage		4.75	5.00	5.25	V
V_{IH}	Input high voltage	All Inputs except $\overline{BI}$ $\overline{BI}$	2.0 2.0		15 5.5	V
V_{IL}	Input low voltage				0.8	V
V_{IC}	Input clamp voltage	I_{IN} = −12mA, T_A = 25°C			−1.5	V
I_{IH}	Input high current	Inputs D_0 −D_3, $\overline{LE}$, $\overline{RBI}$ V_{IN} = 2.4V V_{IN} = 15V Input $\overline{BI}$ (pin 4) $\overline{RBI}$ = H V_{IN} = V_{CC} = 5.25V		 0.1 10		µA µA
I_{IL}	Input low current	V_{IN} = 0.4V, Inputs D_0 − D_3 $\overline{LE}$, $\overline{RBI}$		−5 −200		µA
		Input $\overline{BI}$ V_{CC} = 5.25V $\overline{RBI}$ = H, V_{IN} = 0.4V		−0.7		mA
V_{OL}	Output low voltage	Output $\overline{RBO}$ I_{out} = 3.0mA		.2		V
V_{OH}	Output high voltage	Output $\overline{RBO}$ I_{OUT} = −50µA $\overline{RBI}$ = H		4.5		V
I_{OUT}	Output segment "ON" current	Outputs "a" thru "g" V_{OUT} = 2.0V	20	25	30	mA
ΔI_{OUT}	Output current ratio (all outputs ON)	With reference to "b" segment V_{OUT} = 2.0V	0.90	1.00	1.10	
I_{OFF}	Output segment "OFF" current	Outputs "a" thru "g" V_{OUT} = 5.0V		20	250	µA
I_{CCO}	Supply current	V_{CC} = 5.25V All outputs "ON" V_{OUT} > 1V		33		mA
I_{CCI}	Supply current	V_{CC} = 5.25V All outputs blanked		50		mA

NOTE
NE587 PROGRAMMING
The NE587 output current can be programmed, provided a program resistor, Rp, be connected between Ip (pin 8) and Ground (pin 9). The voltage at Ip (pin 8) is constant ($\approx$1.3V). Thus, a current through Rp is Ip $\approx \frac{1.3V}{Rp}$, as shown in Figure 5. $\frac{Io}{Ip}$ is 20 in the 15 to 50mA output current range.

AC ELECTRICAL CHARACTERISTICS

V_{CC} = 5V T_A = 25°C. R_L = 130Ω, C_L = 30pF including probe capacity.

PARAMETER		TEST CONDITIONS	NE587			UNIT
			Min	Typ	Max	
$t_{D_{av.}}$	Propagation delay Figure 2	From data to output		85		ns
$t_{D_{av.}}$	Propagation delay Figure 3	From $\overline{LE}$ to output		85		ns
t_W	Latch enable pulse width Figure 4		85			ns
t_S	Latch enable setup time Figure 4	From data to $\overline{LE}$	75			ns
t_H	Latch enable hold time Figure 4	From $\overline{LE}$ to data	0			ns

NOTE

$t_{D_{av.}} = \frac{1}{2}(t_{HL} + t_{LH})$

TRUTH TABLE

BINARY INPUT	INPUTS						OUTPUTS								DISPLAY
	$\overline{LE}$	$\overline{RBI}$	D_3	D_2	D_1	D_0	a	b	c	d	e	f	g	$\overline{RBO}$	
–	H	*	X	X	X	X	STABLE							**	STABLE
0	L	L	L	L	L	L	H	H	H	H	H	H	H	L	BLANK
0	L	H	L	L	L	L	L	L	L	L	L	L	H	H	0
1	L	X	L	L	L	H	H	L	L	H	H	H	H	H	1
2	L	X	L	L	H	L	L	L	H	L	L	H	L	H	2
3	L	X	L	L	H	H	L	L	L	L	H	H	L	H	3
4	L	X	L	H	L	L	H	L	L	H	H	L	L	H	4
5	L	X	L	H	L	H	L	H	L	L	H	L	L	H	5
6	L	X	L	H	H	L	L	H	L	L	L	L	L	H	6
7	L	X	L	H	H	H	L	L	L	H	H	H	H	H	7
8	L	X	H	L	L	L	L	L	L	L	L	L	L	H	8
9	L	X	H	L	L	H	L	L	L	L	H	L	L	H	9
10	L	X	H	L	H	L	H	H	H	H	H	H	L	H	-
11	L	X	H	L	H	H	L	H	H	L	L	L	L	H	E
12	L	X	H	H	L	L	H	L	L	H	L	L	L	H	H
13	L	X	H	H	L	H	H	H	H	L	L	L	H	H	L
14	L	X	H	H	H	L	L	L	H	H	L	L	L	H	P
15	L	X	H	H	H	H	H	H	H	H	H	H	H	H	blank
**BI	X	X	X	X	X	X	H	H	H	H	H	H	H	L**	blank

NOTES

H = HIGH voltage level, output is "OFF"

L = LOW voltage level, output is "ON"

X = Don't care

* The $\overline{RBI}$ will blank the display only if a binary zero is stored in the latches.

** $\overline{RBO/BI}$ used as an input overrides all other input conditions.

SEGMENT IDENTIFICATION



NE587 PROGRAMMING

NE587 output current can be programmed by using a programming resistor, R_P, connected between rp (pin 8) and Gnd (pin 9). The voltage at rp (pin 8) is constant ($\approx$1.40V). A partial schematic of the voltage reference used in the NE587 is shown in figure 1.

Output current to program current ratio, I_O/I_P, is 20 in the 15mA to 50mA range. Note that I_P must be derived from a resistor (R_P), and not from a high impedance source such as an I_{OUT} DAC used to control display brightness.

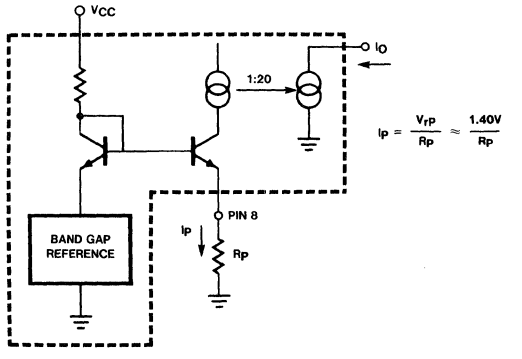

Figure 1

TIMING DIAGRAMS

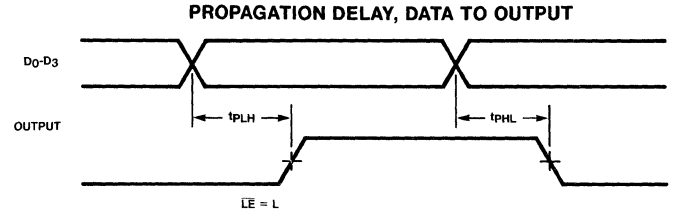

Figure 2

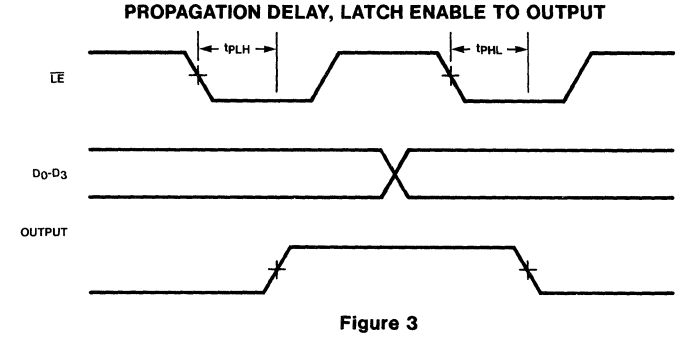

Figure 3

POWER DISSIPATION CONSIDERATIONS

LED displays are power-hungry devices, and inevitably somewhat inefficient in their use of the power supply necessary to drive them. Duty cycle control does afford one way of improving display efficiency, provided that the LEDS are not driven too far into saturation, but the improvement is marginal. Operation at higher peak currents has the added advantage of giving much better matching of light output, both from segment-to-segment and digit-to-digit.

An output current of 10 to 50mA was chosen so that it would be suitable for multiplexed operation of large size LED digits. When designing a display system, particular care must be taken to minimize power dissipation within the IC display driver. Since the output is a constant current source, all the remaining supply voltage, which is not dropped across the LED (and the digit driver, if used), will appear across the output. Thus, the power dissipation will go up sharply if the display power supply voltage rises. Clearly, then, it is good design practice to keep the display supply voltage as low as possible consistent with proper operation of the supply output current sources. Inserting a resistor or diode in series with the display supply is a good way of reducing the power dissipation within the integrated circuit segment driver, although, of course, total system power remains the same.

Power dissipation may be calculated as follows. Referring to figure 6, the two system power supplies are V_{CC} and V_S. In many cases, these will be the same voltage. Necessary parameters are:

V_{CC},	Supply voltage to driver
V_S,	Supply voltage to display
I_{CC},	Quiescent supply current of driver
I_{SEG},	LED segment current
V_F,	LED segment forward voltage at I_{seg}
K_{DC},	% Duty cycle

V_F, the forward LED drop, depends upon the type of LED material (hence the color) and the forward current. The actual forward voltage drops should be obtained from the LED display manufacturer's literature for the peak segment current selected; however, approximate voltages at nominal rated currents are:

Red	1.6 to 2.0V
Orange	2.0 to 2.5V
Yellow	2.2 to 3.5V
Green	2.5 to 3.5V

TIMING DIAGRAMS (Cont'd)

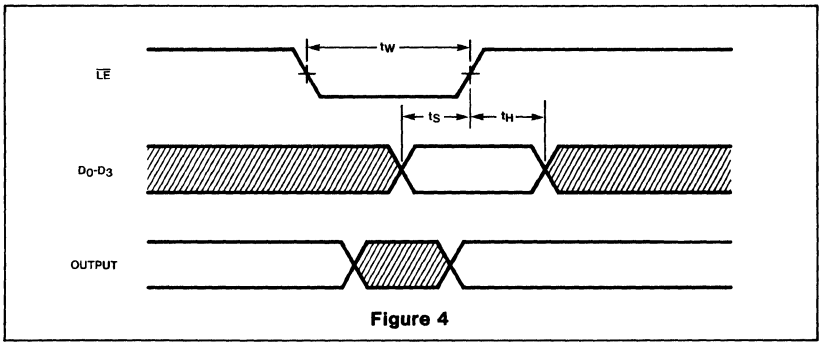

Figure 4

These voltages are all for single diode displays. Some early red displays had 2 series LEDS per segment; hence the forward voltage drop was around 3.5V.

Thus a maximum power dissipation calculation when all segments are on, is:

$P_d = V_{CC} \times I_{CC} + (V_S - V_F) \times 7 \times I_{seg} \times K_{DC}$ mW

Assuming $V_S = V_{CC} = 5.25V$
$V_F = 2.0V$
$K_{DC} = 100\%$
$P_{d\ max} = 5.25 \times 50 + 3.25 \times 7 \times 30$ mW
$= 945$ mW

TYPICAL PERFORMANCE CURVES

SUPPLY CURRENT VS SUPPLY VOLTAGE NE587

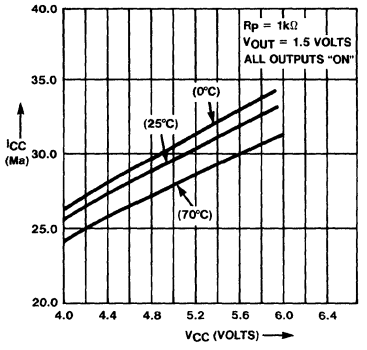

OUTPUT CURRENT VS OUTPUT VOLTAGE NE587 RP = 1Kohms

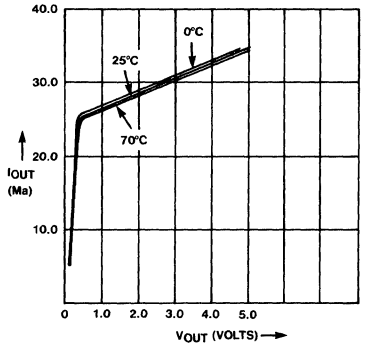

NORMALIZED OUTPUT CURRENT VS TEMPERATURE VCC = 5.0 VOLTS

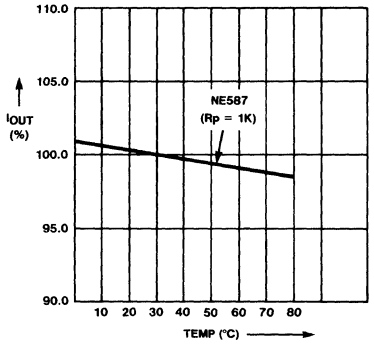

NORMALIZED OUTPUT CURRENT VS SUPPLY VOLTAGE VO = 1.5V TA = 25°C

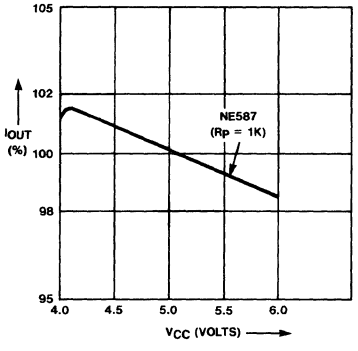

MAXIMUM POWER DISSIPATION VS TEMPERATURE

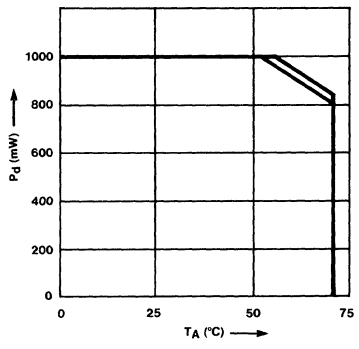

9

TYPICAL PERFORMANCE CURVES (Cont'd)

OUTPUT CURRENT VS PROGRAM RESISTOR

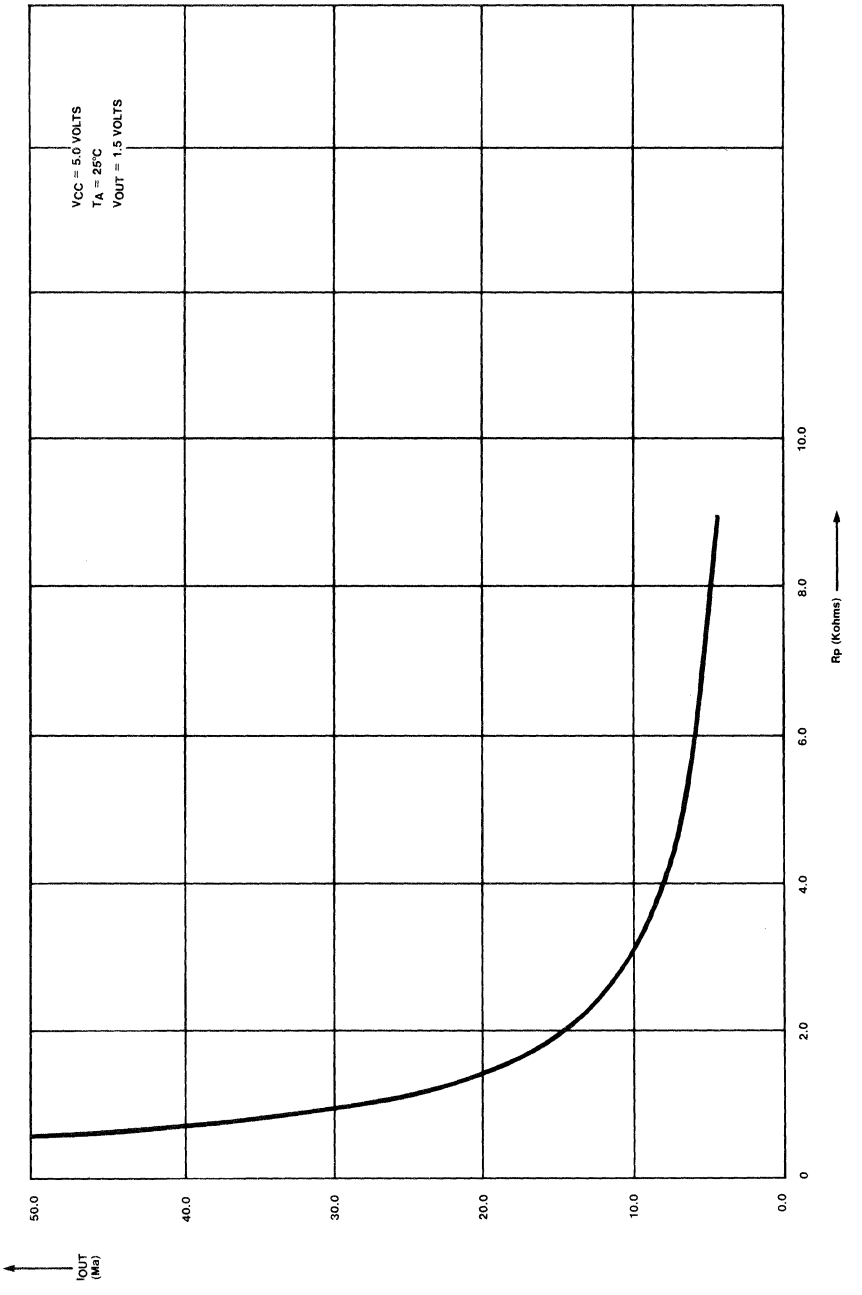

Figure 5

TYPICAL APPLICATIONS

DRIVING A SINGLE DIGIT

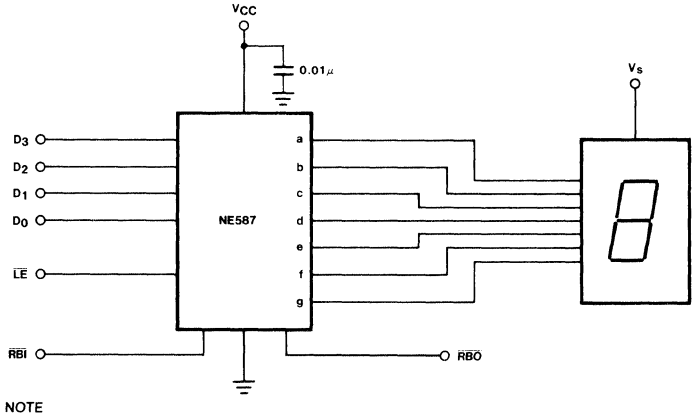

NOTE
Decoupling capacitor on V_{CC} should be 0.01 μF ceramic

Figure 6

However, the average power dissipation will be considerably less than this. Assuming 5 segments are on (the average for all output code combinations), then

$P_{d\,av} = 5.0 \times 30 + 3.00 \times 5 \times 25$ mW
$= 525$ mW

Operating temperature range limitations can be deduced from the power dissipation graph. (See Typical Performance Characteristics).

However, a major portion of this power dissipation ($P_{d\,max}$) is because the current source output is operating with 3.25 V across it. In practice, the outputs operate satisfactorily down to 0.5V, and so the extra voltage may be dropped external to the integrated circuit.

Suppose the worst case V_{CC}/V_S supply is 4.75 to 5.25V, and that the maximum V_E for the LED display is 2.25V. Only 2.75V is required to keep the display active, and hence 2.0V may be dropped externally with a resistor from V_{CC} to V_S. The value of this resistor is calculated by:

$$R_S = \frac{2.0}{7 \times I_{seg}} \simeq 10\Omega\ (\tfrac{1}{2}\ W\ rating)$$

assuming worst case I_{seg} of 30 mA

Hence now $P_{d\,max} = V_{CC} \times I_{CC} + (V_S - V_V - R_X \times 7 \times I_{seg}) \times 7 \times I_{seg} \times K_{DC}$
$= 5.25 \times 50 + 1.25 \times 7 \times 30$ mW
$= 525$ mW

and $P_{d\,av} = 5.0 \times 30 + 1.25 \times 5 \times 25$
$= 306$ mW

If a diode (or 2) is used to reduce voltage to the display, then the voltage appearing across the display driver will be independent of the number of "ON" segments and will be equal to

$V_S - V_F - nV_d$, $V_D \simeq 0.8V$

Where n is the number of diodes used, power dissipation can be calculated in a similiar manner.

In a multiplexed display system, the voltage drop across the digit driver must also be considered in computing device power dissipation. It may even be an advantage to use a digit driver which drops an appreciable voltage, rather than the saturating PNP transistors shown in figure 9. For example a darlington PNP or NPN emitter follower may be preferable. Figure 8 shows the NE591 as the digit driver in a multiplexed display system. The NE591 output drops about 1.8V which means that the power dissipation is evenly distributed between the two integrated circuits.

Where V_S and V_{CC} are two different supplies, the V_S supply may be optimized for minimum system power dissipation and/or cost. Clearly, good regulation in the V_S supply is totally unnecessary, and so this supply can be made much cheaper than the regulated 5V supply used in the rest of the system. In fact a simple unsmoothed full-wave rectified sine wave works extremely well if a slight loss in brightness can be tolerated. A transformer voltage of about 3-4.5V rms works well in most LED display systems. Waveforms are shown below:

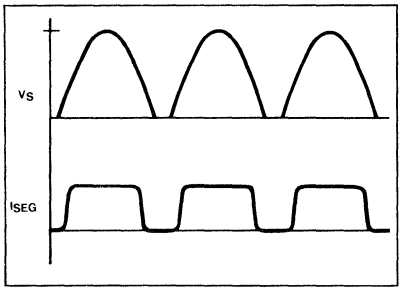

The duty cycle for this system depends upon V_S, V_F and the output characteristics of the display driver.

With
$V_S = 4.9V$ pk.
$V_F = 2.0V$

The duty cycle is approximately 60%.

TYPICAL APPLICATIONS (Cont'd)

4-DIGIT DISPLAY WITH BRIGHTNESS CONTROL AND LEADING EDGE RIPPLE BLANKING

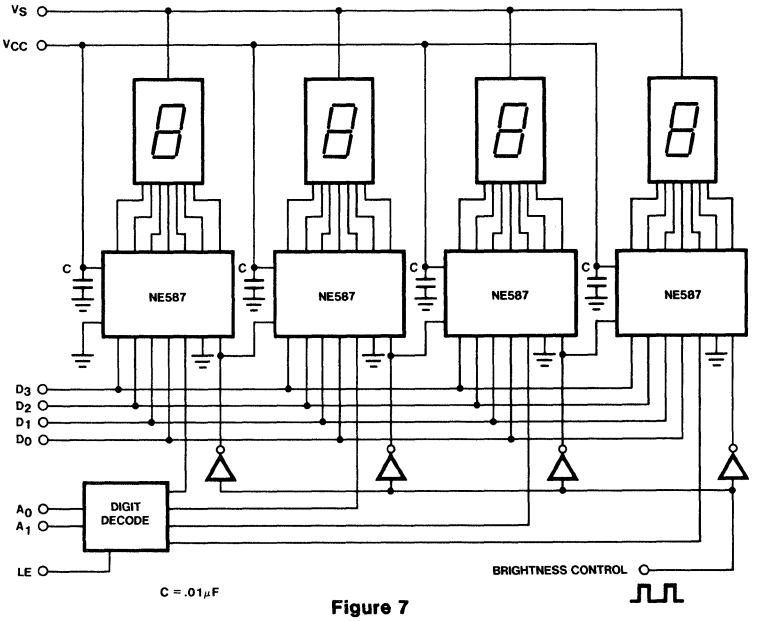

Figure 7

INTERFACING 8-DIGIT LED DISPLAY WITH μP BUS

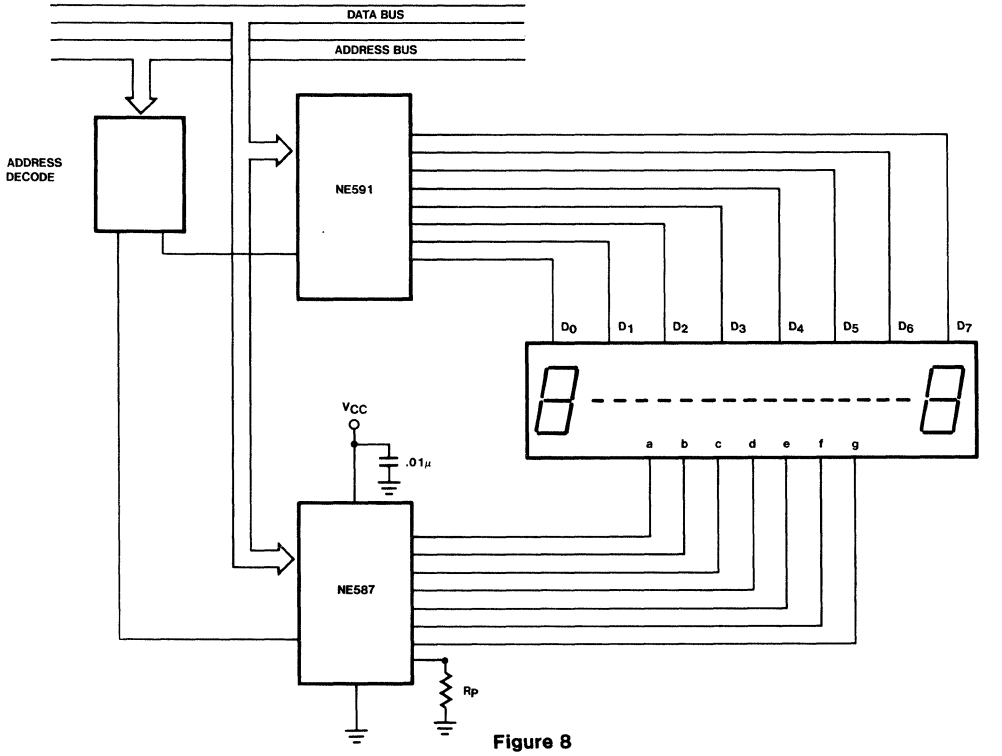

Figure 8

TYPICAL APPLICATIONS (Cont'd)

4-DIGIT MULTIPLEXED LED DISPLAY

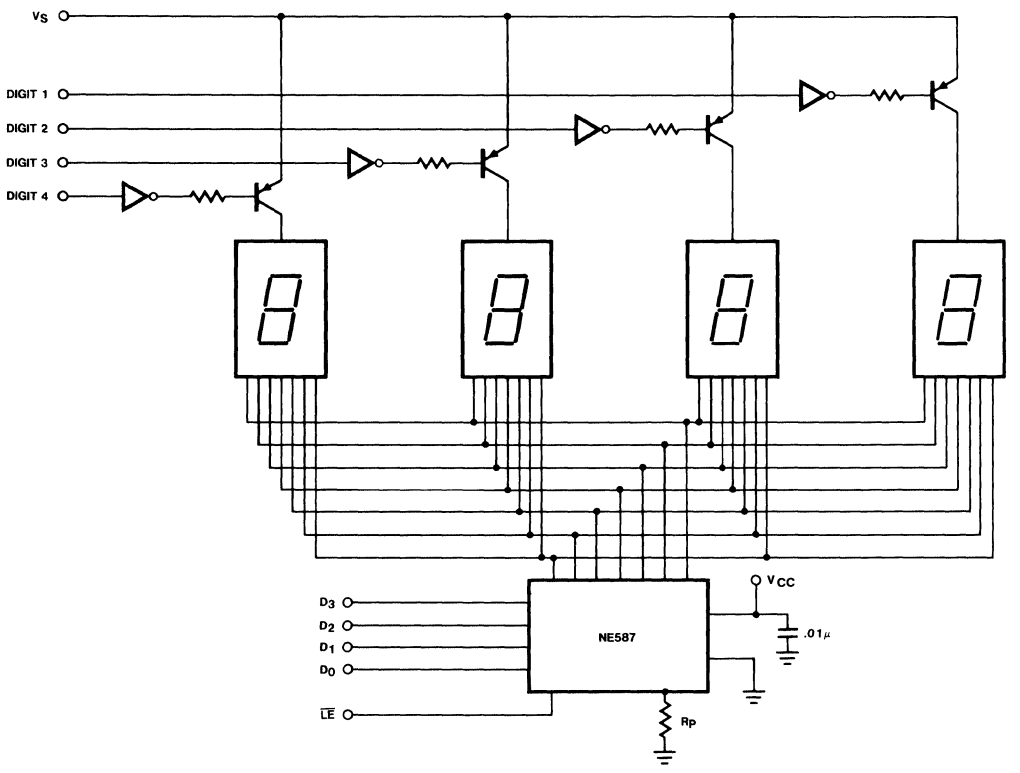

Figure 9

DESCRIPTION

The NE589 is a latch/decoder/driver for 7-segment common cathode LED displays. The NE589 has a programmable current output up to 50mA which is essentially independent of output voltage, power supply voltage, and temperature. The data (BCD) inputs and $\overline{LE}$ (latch enable) input are low-loading so that they are compatible with any data bus system. The 7-segment decoding is implemented with a ROM so that alternative fonts can be made available.

FEATURES

- **Latched BCD inputs**
- **Low loading bus-compatible inputs**
- **Ripple-blanking on leading and/or trailing edge zeros**

APPLICATIONS

- **Digital panel meters**
- **Measuring instruments**
- **Test equipment**
- **Digital clocks**
- **Digital bus monitoring**

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.
NE589F
NE589N

ABSOLUTE MAXIMUM RATINGS T_A = 25°C unless otherwise specified

PARAMETER		RATING	UNIT
V_{CC}, V_S	Supply voltage	−0.5 to +7	V
V_{IN}	Input voltage (D_0 - D_3, $\overline{LE}$, $\overline{RBI}$)	−0.5 to +15	V
V_{OUT}	Output voltage (a-g, RBO)	−0.5 to +7	V
P_D	Power dissipation (25°C)[1]	1000	mW
T_A	Ambient temperature range	0 to 70	°C
T_J	Junction temperature	150	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Soldering temperature (10 sec. max)	300	°C

NOTE
Derate power dissipation as indicated
N package - 95°C/watt above 55°C
F package - 100°C/watt above 50°C

BLOCK DIAGRAM

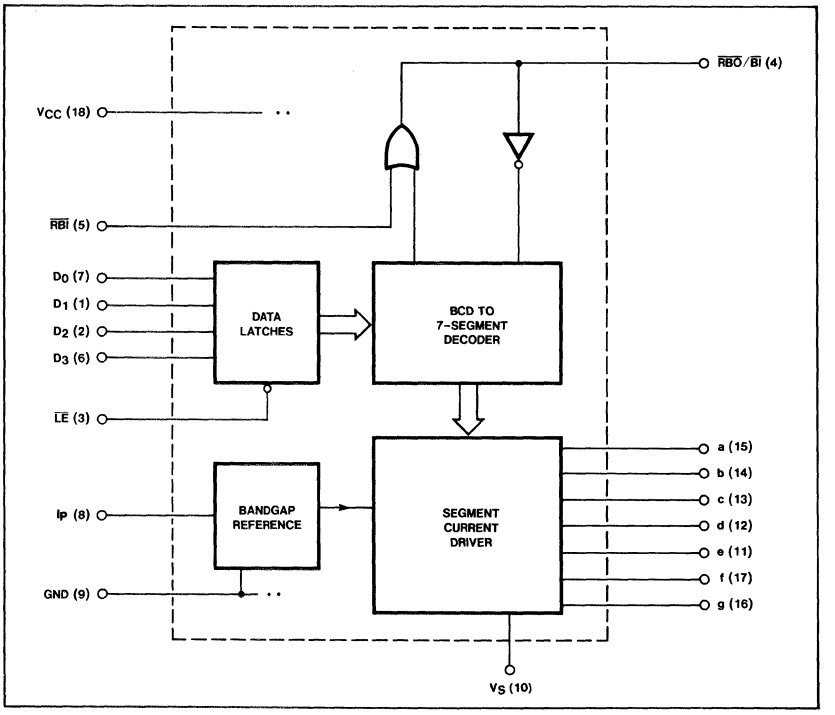

DC ELECTRICAL CHARACTERISTICS

V_{CC} = 4.75 to 5.25V, 0°C < T_A < 70°C.
Typical values are at V_{CC} = 5V, T_A = 25°C, R_P = 6kΩ (± 1%) unless otherwise stated.

PARAMETER		TEST CONDITIONS	NE589			UNIT
			Min	Typ	Max	
V_{CC}	Operating supply voltage		4.75	5.00	5.25	V
V_{IH}	Input high voltage	All Inputs except $\overline{BI}$ $\overline{BI}$	2.0 2.0		15 5.5	V
V_{IL}	Input low voltage				0.8	V
V_{IC}	Input clamp voltage	I_{IN} = −12mA, T_A = 25°C			−1.5	V
I_{IH} I_{IH}	Input high current Input high current	Inputs D_0 −D_3, $\overline{LE}$, $\overline{RBI}$ V_{IN} = 2.4V V_{IN} = 15V Input $\overline{BI}$ (pin 4) $\overline{RBI}$ = H V_{IN} = V_{CC} = 5.25V		0.1 10		µA µA µA
I_{IL}	Input low current	V_{IN} = 0.4V, Inputs D_0 − D_3 $\overline{LE}$, $\overline{RBI}$		−5 −200		µA
I_{IL}	Input low current	Input $\overline{BI}$ V_{CC} = 5.25V $\overline{RBI}$ = H, V_{IN} = 0.4V		−0.7		mA
V_{OL}	Output low voltage	Output $\overline{RBO}$ I_{OUT} = 3.0mA				V
V_{OH}	Output high voltage	Output $\overline{RBO}$ I_{OUT} = −50µA $\overline{RBI}$ = H		4.5		V
I_{OUT}	Output segment "ON" current	Outputs "a" thru "g" V_{OUT} = 2.0V	20	25	30	mA
ΔI_{OUT}	Output current ratio (all outputs ON)	With reference to "b" segment V_{OUT} = 2.0V	0.90	1.00	1.10	
I_{OFF}	Output segment "OFF" current	Outputs "a" thru "g"		20	250	µA
I_{CCO}	Supply current	V_{CC} = 5.25V All outputs "ON" V_{OUT} > 1V		25		mA
I_{CCI}	Supply current	V_{CC} = 5.25V All outputs blanked		30		mA

NOTE:
NE587 PROGRAMMING
The NE587 output current can be programmed, provided a program resistor, Rp, be connected between Ip (pin 8) and Ground (pin 9). The voltage at Ip (pin 8) is constant (≈ 1.3V). Thus, a current through Rp is Ip ≈ $\frac{1.3V}{Rp}$, as shown in Figure 10. $\frac{Io}{Ip}$ is 20 in the 15 to 50mA output current range.

9

AC ELECTRICAL CHARACTERISTICS

V_{CC} = 5V T_A = 25°C. R_L = 130Ω, C_L = 30pF including probe capacity.

PARAMETER		TEST CONDITIONS	NE589			UNIT
			Min	Typ	Max	
$t_{D_{av.}}$	Propagation delay Figure 2	From data to output		85		ns
$t_{D_{av.}}$	Propagation delay Figure 3	From $\overline{LE}$ to output		85		ns
t_W	Latch enable pulse width Figure 4		85			ns
t_S	Latch enable setup time Figure 4	From data to $\overline{LE}$	75			ns
t_H	Latch enable hold time Figure 4	From $\overline{LE}$ to data	0			ns

NOTE:
$t_{D_{AV.}} = ½ (t_{HL} + t_{LH})$

TRUTH TABLE

BINARY INPUT	INPUTS						OUTPUTS								DISPLAY
	$\overline{LE}$	$\overline{RBI}$	D_3	D_2	D_1	D_0	a	b	c	d	e	f	g	$\overline{RBO}$	
–	H	*	X	X	X	X	STABLE								STABLE BLANK
0	L	L	L	L	L	L	L	L	L	L	L	L	L	L	
0	L	H	L	L	L	L	H	H	H	H	H	H	L	H	0
1	L	X	L	L	L	H	L	H	H	L	L	L	L	H	1
2	L	X	L	L	H	L	H	H	L	H	H	L	H	H	2
3	L	X	L	L	H	H	H	H	H	H	H	L	H	H	3
4	L	X	L	H	L	L	L	H	H	L	L	H	H	H	4
5	L	X	L	H	L	H	H	L	H	H	L	H	H	H	5
6	L	X	L	H	H	L	H	L	H	H	H	H	H	H	6
7	L	X	L	H	H	H	H	H	H	L	L	L	L	H	7
8	L	X	H	L	L	L	H	H	H	H	H	H	H	H	8
9	L	X	H	L	L	H	H	H	H	H	L	H	H	H	9
10	L	X	H	L	H	L	H	H	H	L	H	H	L	H	a
11	L	X	H	L	H	H	L	L	H	H	H	H	H	H	b
12	L	X	H	H	L	L	H	L	L	H	H	H	L	H	c
13	L	X	H	H	L	H	L	H	H	H	H	L	H	H	d
14	L	X	H	H	H	L	H	L	L	H	H	H	H	H	e
15	L	X	H	H	H	H	H	L	L	L	H	H	H	H	f
**BI	X	X	X	X	X	X	L	L	L	L	L	L	L	L**	blank

NOTES
H = HIGH voltage level, output is "ON"
L = LOW voltage level, output is "OFF"
X = Don't care
* The $\overline{RBI}$ will blank the display only if a binary zero is stored in the latches.
** $\overline{RBO}/\overline{BI}$ used as an input overrides all other input conditions.

SEGMENT IDENTIFICATION



NE589 PROGRAMMING

NE589 output current can be programmed by using a programming resistor, R_P, connected between r_P (pin 8) and Gnd (pin 9). The voltage at r_P (pin 8) is constant ($\approx$1.25V). A partial schematic of the voltage reference used in the NE589 is shown in figure 1.

Output current to program current ratio, I_O/I_P, is 20 in the 15mA to 50mA range. Note that I_P must be derived from a resistor (R_P), and not from a high impedance source such as an I_{OUT} DAC used to control display brightness.

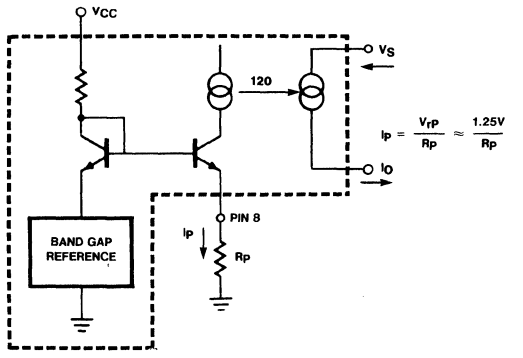

Figure 1

TIMING DIAGRAMS

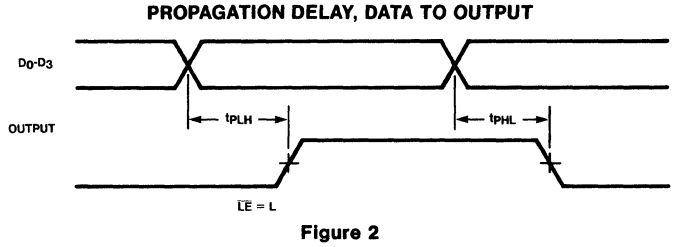

Figure 2

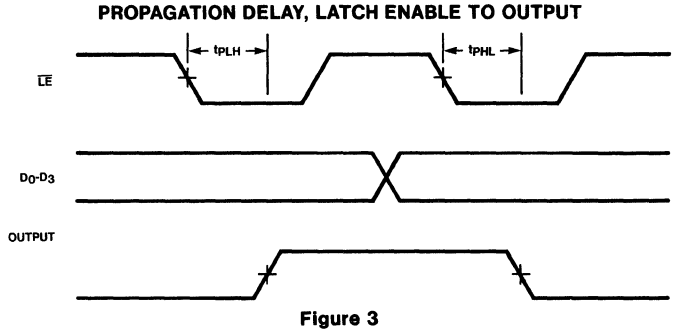

Figure 3

POWER DISSIPATION CONSIDERATIONS

LED displays are power-hungry devices, and inevitably somewhat inefficient in their use of the power supply necessary to drive them. Duty cycle control does afford one way of improving display efficiency, provided that the LEDS are not driven too far into saturation, but the improvement is marginal. Operation at higher peak currents has the added advantage of giving much better matching of light output, both from segment-to-segment and digit-to-digit.

An output current of 10 to 50mA was chosen so that it would be suitable for multiplexed operation of large size LED digits. When designing a display system, particular care must be taken to minimize power dissipation within the IC display driver. Since the output is a constant current source, all the remaining supply voltage, which is not dropped across the LED (and the digit driver, if used), will appear across the output. Thus, the power dissipation will go up sharply if the display power supply voltage rises. Clearly, then, it is good design practice to keep the display supply voltage as low as possible consistent with proper operation of the supply output current sources. Inserting a resistor or diode in series with the display supply is a good way of reducing the power dissipation within the integrated circuit segment driver, although, of course, total system power remains the same.

Power dissipation may be calculated as follows. Referring to figure 12, the two system power supplies are V_{CC} and V_S. In many cases, these will be the same voltage. Necessary parameters are:

V_{CC},	Supply voltage to driver
V_S,	Supply voltage to display
I_{CC},	Quiescent supply current of driver
I_{SEG},	LED segment current
V_F,	LED segment forward voltage at I_{seg}
K_{DC},	% Duty cycle

V_F, the forward LED drop, depends upon the type of LED material (hence the color) and the forward current. The actual forward voltage drops should be obtained from the LED display manufacturer's literature for the peak segment current selected; however, approximate voltages at nominal rated currents are:

Red	1.6 to 2.0V
Orange	2.0 to 2.5V
Yellow	2.2 to 3.5V
Green	2.5 to 3.5V

TIMING DIAGRAMS (Cont'd)

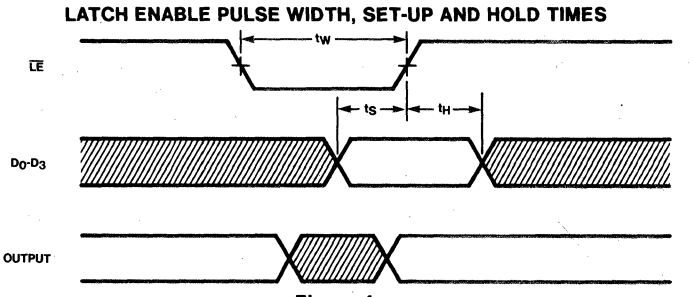

Figure 4

These voltages are all for single diode displays. Some early red displays had 2 series LEDS per segment; hence the forward voltage drop was around 3.5V.

Thus a maximum power dissipation calculation when all segments are on, is:

$P_d = V_{CC} \times I_{CC} + (V_S - V_F) \times 7 \times I_{seg} \times K_{DC}$ mW

Assuming $V_S = V_{CC} = 5.25V$
$V_F = 2.0V$
$K_{DC} = 100\%$

$P_{d\ max} = 5.25 \times 50 + 3.25 \times 7 \times 30$ mW
$= 945$ mW

TYPICAL PERFORMANCE CURVES

OUTPUT CURRENT VS OUTPUT VOLTAGE

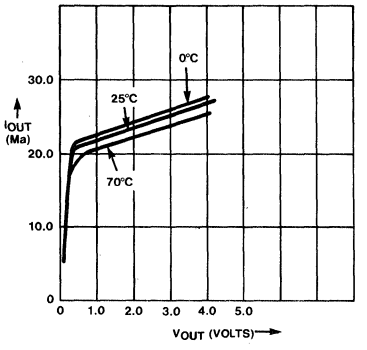

Figure 5

OUTPUT CURRENT VS OUTPUT VOLTAGE

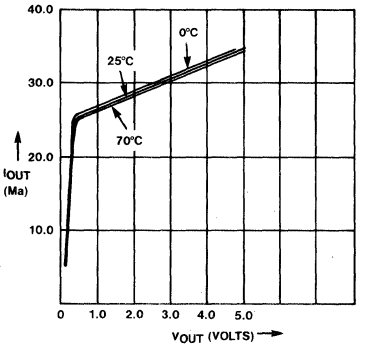

Figure 6

NORMALIZED OUTPUT CURRENT VS TEMPERATURE V_{CC} = 5.0 VOLTS

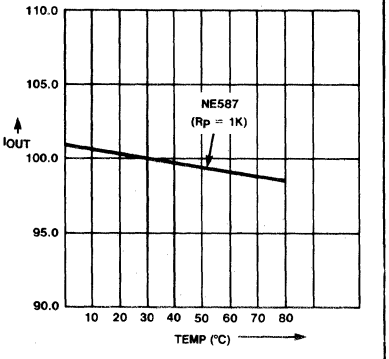

Figure 7

NORMALIZED OUTPUT CURRENT VS SUPPLY VOLTAGE V_{CC} V_O = 1.5V T_A = 25°C

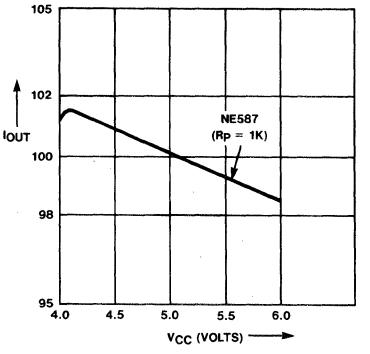

Figure 8

MAXIMUM POWER DISSIPATION VS TEMPERATURE

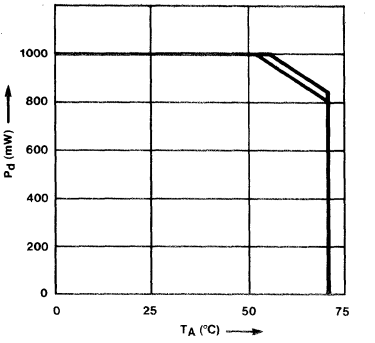

Figure 9

TYPICAL PERFORMANCE CURVES (Cont'd)

OUTPUT CURRENT VS PROGRAM RESISTOR

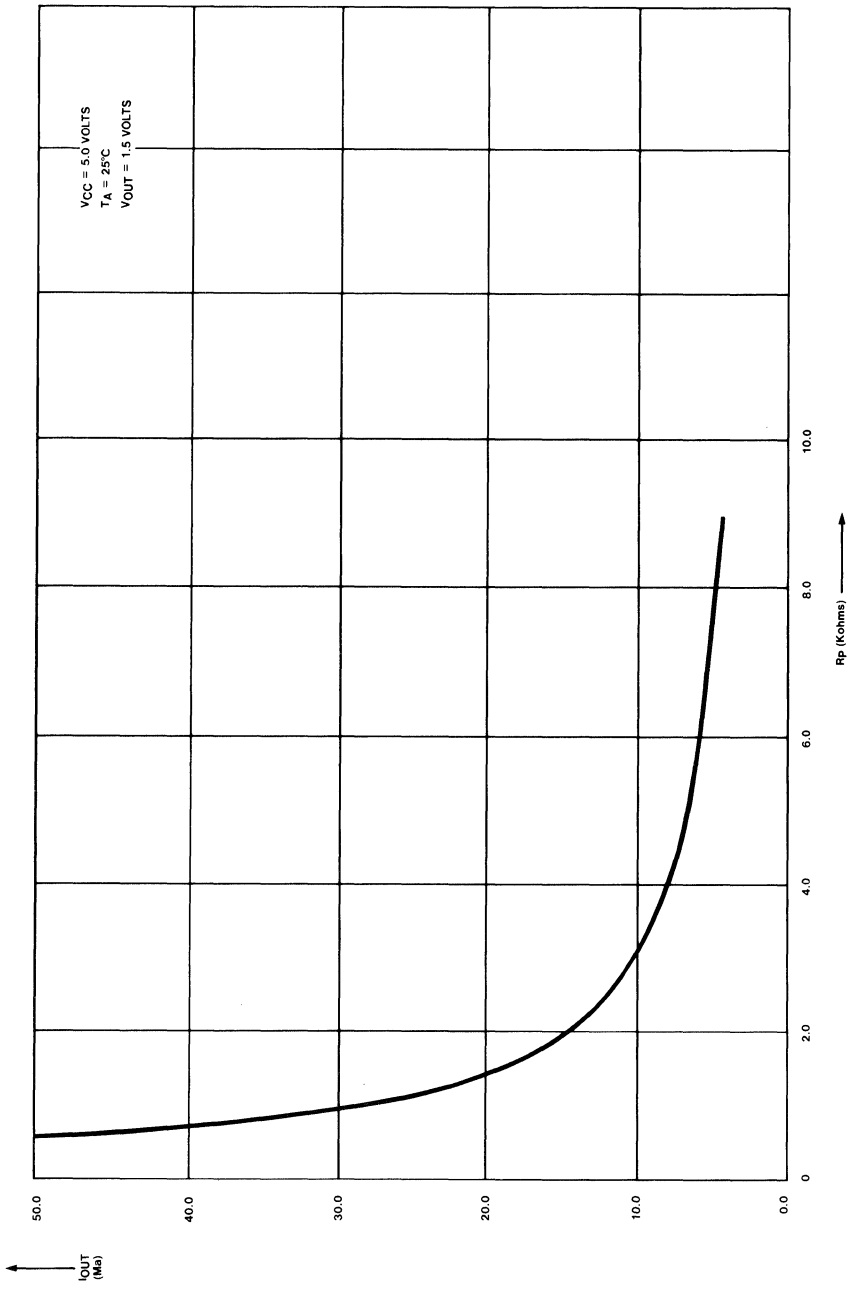

Figure 10

TYPICAL PERFORMANCE CURVES (Cont'd)

SUPPLY CURRENT VS SUPPLY VOLTAGE
NE589

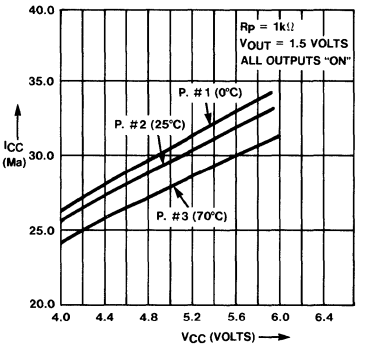

Figure 11

TYPICAL APPLICATIONS

DRIVING A SINGLE DIGIT

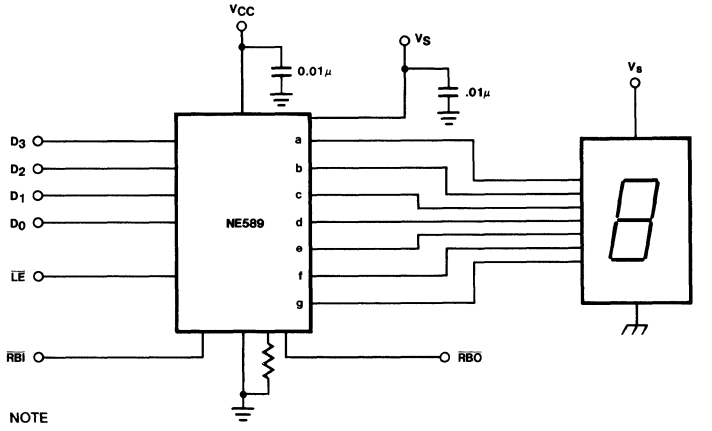

NOTE
Decoupling capacitor on V_{CC} should be 0.01 μF ceramic

Figure 12

However, the average power dissipation will be considerably less than this. Assuming 5 segments are on (the average for all output code combinations), then

$P_{d\,av}$ = 5.0 × 30 + 3.00 × 5 × 25 mW
= 525 mW

Operating temperature range limitations can be deduced from the power dissipation graph in figure 9.

However, a major portion of this power dissipation ($P_{d\,max}$) is because the current source output is operating with 3.25 V across it. In practice, the outputs operate satisfactorily down to 0.5V, and so the extra voltage may be dropped external to the integrated circuit.

Suppose the worst case V_{CC}/V_S supply is 4.75 to 5.25V, and that the maximum V_E for the LED display is 2.25V. Only 2.75V is required to keep the display active, and hence 2.0V may be dropped externally with a resistor from V_{CC} to V_S. The value of this resistor is calculated by:

$$R_S = \frac{2.0}{7 \times I_{seg}} \simeq 10\Omega \text{ (½ W rating)}$$

assuming worst case I_{seg} of 30 mA

Hence now $P_{d\,max}$ = $V_{CC} \times I_{CC} + (V_S - V_V - R_X \times 7 \times I_{seg}) \times 7 \times X\, I_{seg} \times K_{DC}$
= 5.25 × 50 + 1.25 × 7 × 30 mW
= 525 mW

and $P_{d\,av}$ = 5.0 × 30 + 1.25 × 5 × 25
= 306 mW

If a diode (or 2) is used to reduce voltage to the display, then the voltage appearing across the display driver will be independent of the number of "ON" segments and will be equal to

$V_S - V_F - nV_d$, $V_D \simeq 0.8V$

Where n is the number of diodes used, power dissipation can be calculated in a similiar manner.

In a multiplexed display system, the voltage drop across the digit driver must also be considered in computing device power dissipation. It may even be an advantage to use a digit driver which drops an appreciable voltage, rather than the saturating PNP transistors shown in figure 15. For example a darlington PNP or NPN emitter follower may be preferable. Figure 14 shows the NE591 as the digit driver in a multiplexed display system. The NE591 output drops about 1.8V which means that the power dissipation is evenly distributed between the two integrated circuits.

Where V_S and V_{CC} are two different supplies, the V_S supply may be optimized for minimum system power dissipation and/or cost. Clearly, good regulation in the V_S supply is totally unnecessary, and so this supply can be made much cheaper than the regulated 5V supply used in the rest of the system. In fact a simple unsmoothed full-wave rectified sine wave works extremely well if a slight loss in brightness can be tolerated. A transformer voltage of about 3-4.5V rms works well in most LED display systems. Waveforms are shown below:

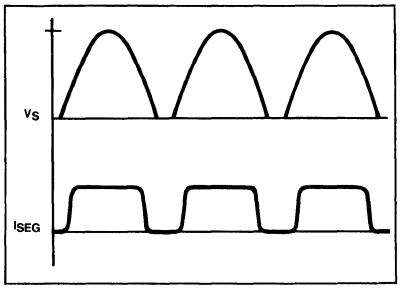

The duty cycle for this system depends upon V_S, V_F and the output characteristics of the display driver.

With
V_S = 4.9V pk.
V_F = 2.0V

The duty cycle is approximately 60%.

TYPICAL APPLICATIONS (Cont'd)

4-DIGIT DISPLAY WITH BRIGHTNESS CONTROL AND LEADING EDGE RIPPLE BLANKING

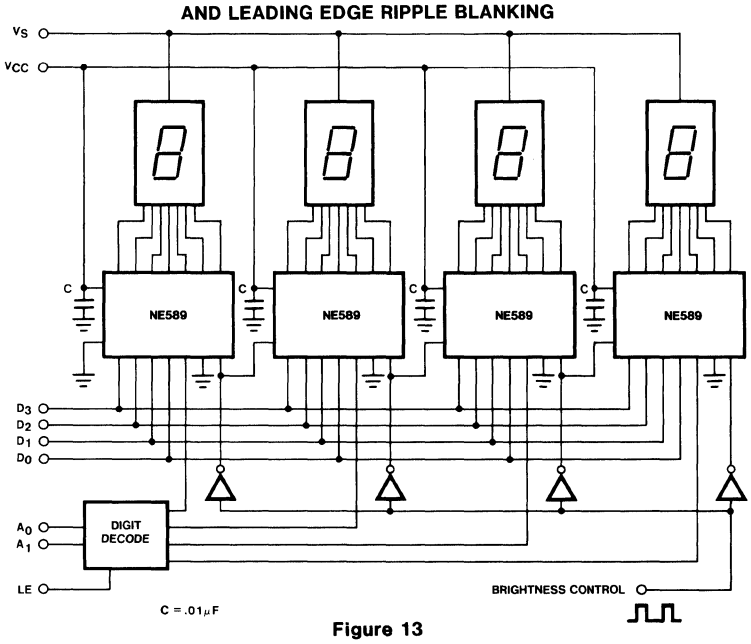

Figure 13

INTERFACING 8-DIGIT LED DISPLAY WITH μP BUS

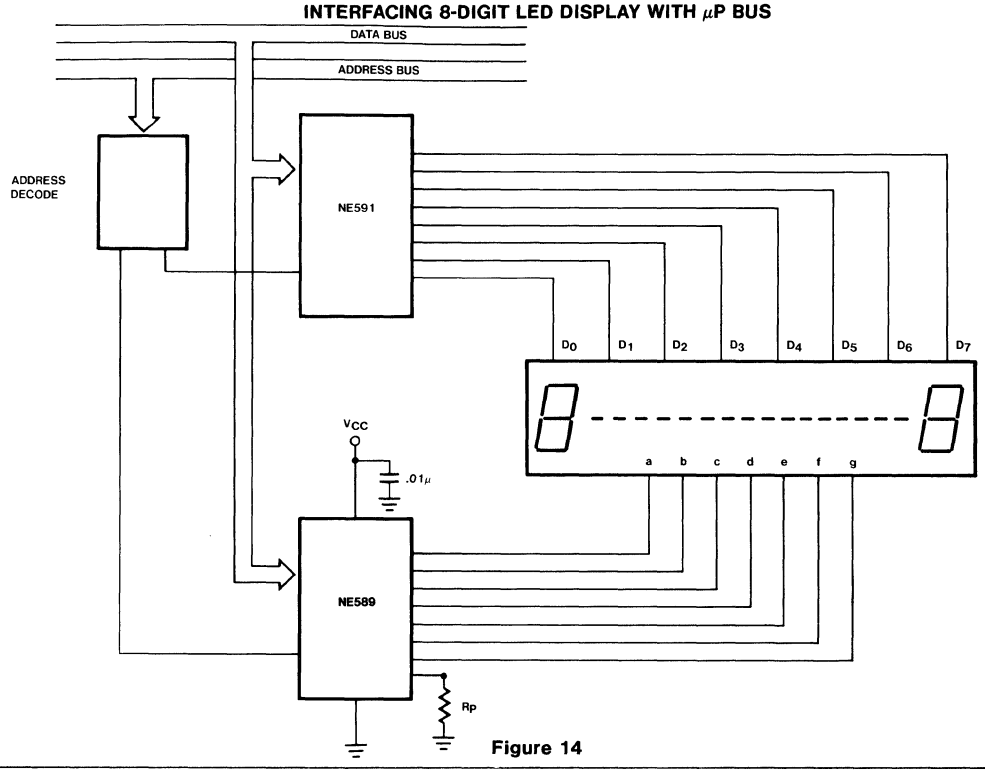

Figure 14

TYPICAL APPLICATIONS (Cont'd)

4-DIGIT MULTIPLEXED LED DISPLAY

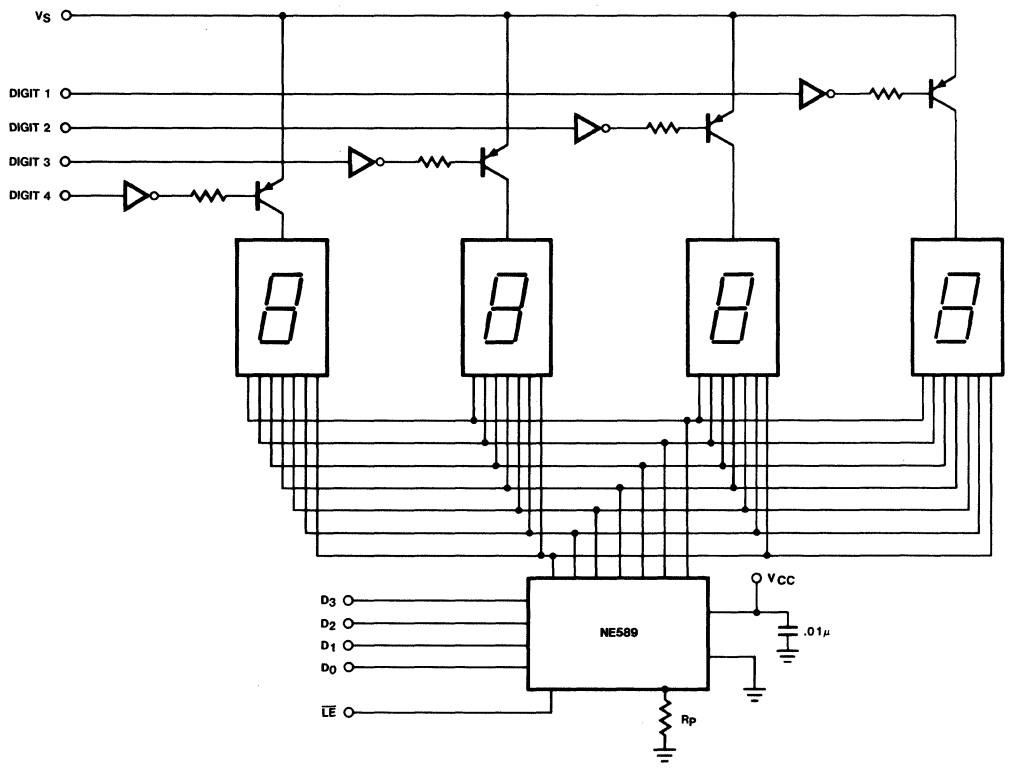

Figure 15

NE/SA594-N,F

DESCRIPTION

The NE/SA594 is a display driver interface for vacuum fluorescent displays. The device is comprised of 8 drivers and a bias network and is capable of driving the digits and/or segments of most vacuum fluorescent displays.

The inputs are designed to be compatible with TTL, DTL, NMOS, PMOS or CMOS output circuitry.

There is an active pull-down circuit on each output so that display ghosting is minimized and no external components are required for most fluorescent display applications.

FEATURES

- **Digit and/or segment drivers**
- **Active output pull-down circuitry**
- **High output breakdown voltage**
- **Low supply voltage**
- **Input compatible with all logic outputs**

PIN CONFIGURATION

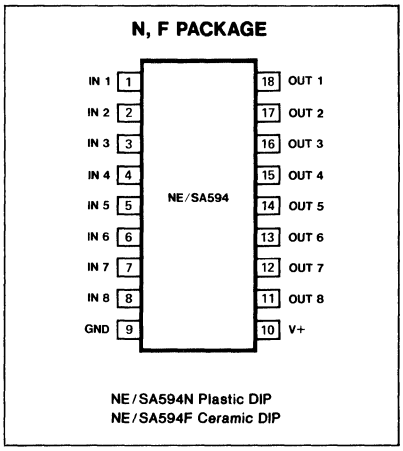

NE/SA594N Plastic DIP
NE/SA594F Ceramic DIP

ABSOLUTE MAXIMUM RATINGS (at 25°C unless otherwise noted)

	PARAMETER	RATING	UNIT
V_{CC}	Supply voltage	45	V
V_{OUT}	Output voltage	V_{CC}	
V_{IN}	Input voltage	−0.3, +20	V
I_{OUT}	Output current		
	Each output	50	mA
	All outputs	200	mA
Pd	Power dissipation* (at 25°C)	800	mW
T_A	Operating temperature range		
	NE	0 to 70	°C
	SA	−40 to +85	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_J	Maximum junction temperature	150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

NOTE

*Derate N (Plastic) Package above 38°C at 7.14 mW/°C.
Derate F (Ceramic) Package above 75°C at 10.8 mW/°C.

EQUIVALENT SCHEMATIC

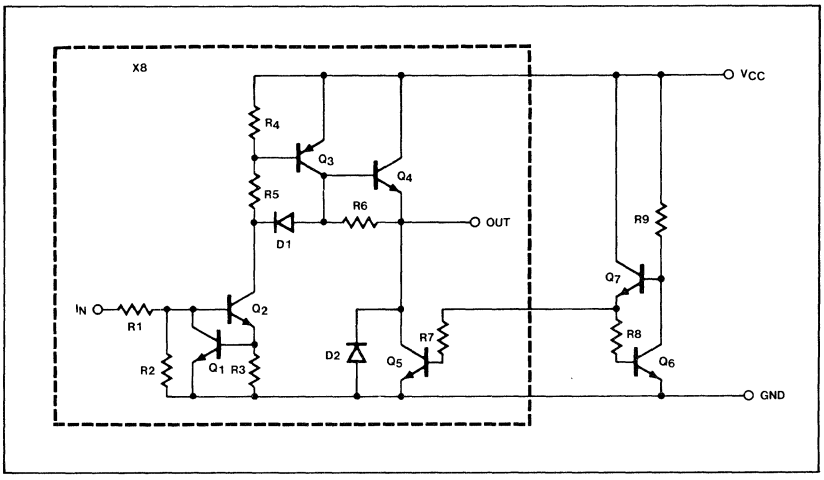

DC ELECTRICAL CHARACTERISTICS

V_{CC} = +4.75 to +40V, T_A (NE) = 0 to 70°C, T_A (SA) = −40 to +85°C unless otherwise stated.

SA594	PARAMETER	TEST CONDITIONS		Min	Typ	Max	UNIT
V_{CC}	Supply voltage range			4.75	35	40	V
I_{CCH}	Supply current (all outputs high)	V_{CC} = 40V	V_{IN} = 3.5V		3	6	mA
I_{CCL}	Supply current (all outputs low)	V_{CC} = 40V	V_{IN} = 0.4V		0.4	1	mA
V_{IN}	Input voltage range			0		15	V
V_{IH}	Input voltage to ensure logic '1'			2.6			V
V_{IL}	Input voltage to ensure logic '0'					0.8	V
I_{IH}	Input current to ensure logic '1'			100			μA
I_{IL}	Input current to ensure logic '0'					10	μA
I_{IN}	Input current	V_{IN} = 2.6V			60	130	μA
		V_{IN} = 5.0V			180	330	μA
		V_{IN} = 15.0V			.68	1.3	mA
V_{OH}	Output high voltage	V_{IN} = 3.5V	T_A = 25°C	V_{CC}−1.5	V_{CC}−1.1		V
		I_{OUT} = −25mA	Over Temp.	V_{CC} −2	V_{CC}−1.3		V
		V_{OUT} with respect to V_{CC}					
V_{OH}	Output high, *no load* voltage	V_{IN} = 3.5V I_{OUT} = 0, T_A=25°C V_{OUT} with respect to V_{CC}		V_{CC}−1	V_{CC}−0.8		V
V_{OFF}	Output 'OFF' voltage level	V_{IN} = 0.8V I_{OUT} = 0			10	200	mV
I_{OH}	Available output current	V_{CC} = 35V V_{OUT} = 30V T_A = 25°C	V_{IN} = 3.5V	−35			mA
I_{OUT}	Output pulldown current	V_{CC} = V_{OUT} = 35V Inputs open		100	200	400	μA
I_{CEX}	Output leakage current	T_A = 25°C V_{CC} = 40V,	V_{IN} = 0.4V V_{OUT} = 0V		−1 −1		μA

AC ELECTRICAL CHARACTERISTICS[1]

V_{CC} = 35V, T_A = 25°C

	PARAMETER	TEST CONDITIONS	NE/SA594 Min	NE/SA594 Typ	NE/SA594 Max	UNIT
t_{PdLH}	Propagation delay - low to high output transition.	50% V_{IN} to 50% V_{OUT}		1	5	μS
t_{PdHL}	Propagation delay - high to low output transition.	50% V_{IN} to 50% V_{OUT}		3	10	μS
t_R	Output rise time	10% V_{OUT} to 90% V_{OUT}		0.5	3	μS
t_F	Output fall time	90% V_{OUT} to 10% V_{OUT}		1.5	5	μS

NOTE

1. See figure 1

SWITCHING TIMES OF DRIVERS

VOLTAGE WAVEFORMS

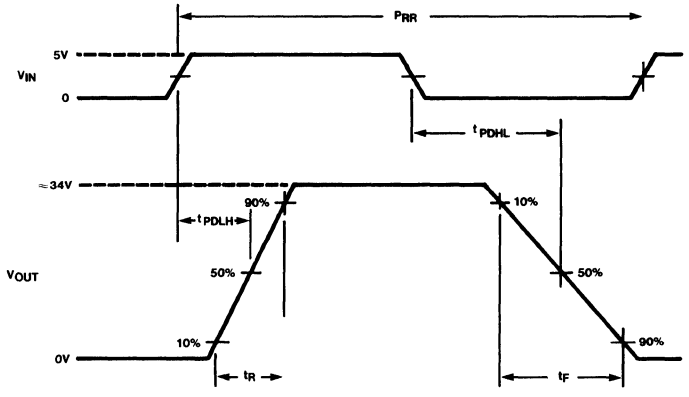

TEST CIRCUIT



INCLUDES PROBE AND FIXTURE CAPACITANCE

Figure 1

TYPICAL PERFORMANCE CHARACTERISTICS

I_{IN} VS V_{IN}

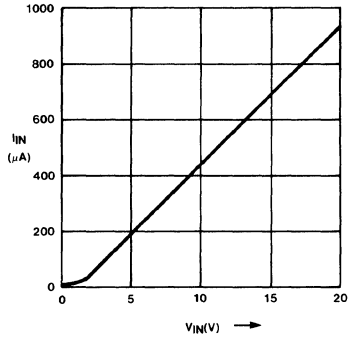

I_{CCH} VS TEMPERATURE

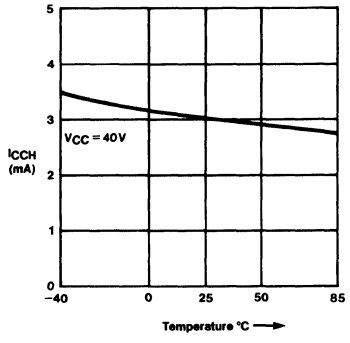

OUTPUT VOLTAGE VS OUTPUT CURRENT

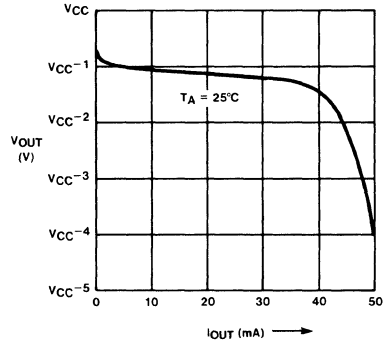

I_{CC} VS V_{CC} (ALL INPUTS HIGH)



TYPICAL APPLICATION
DIGITAL CLOCK WITH ALARM

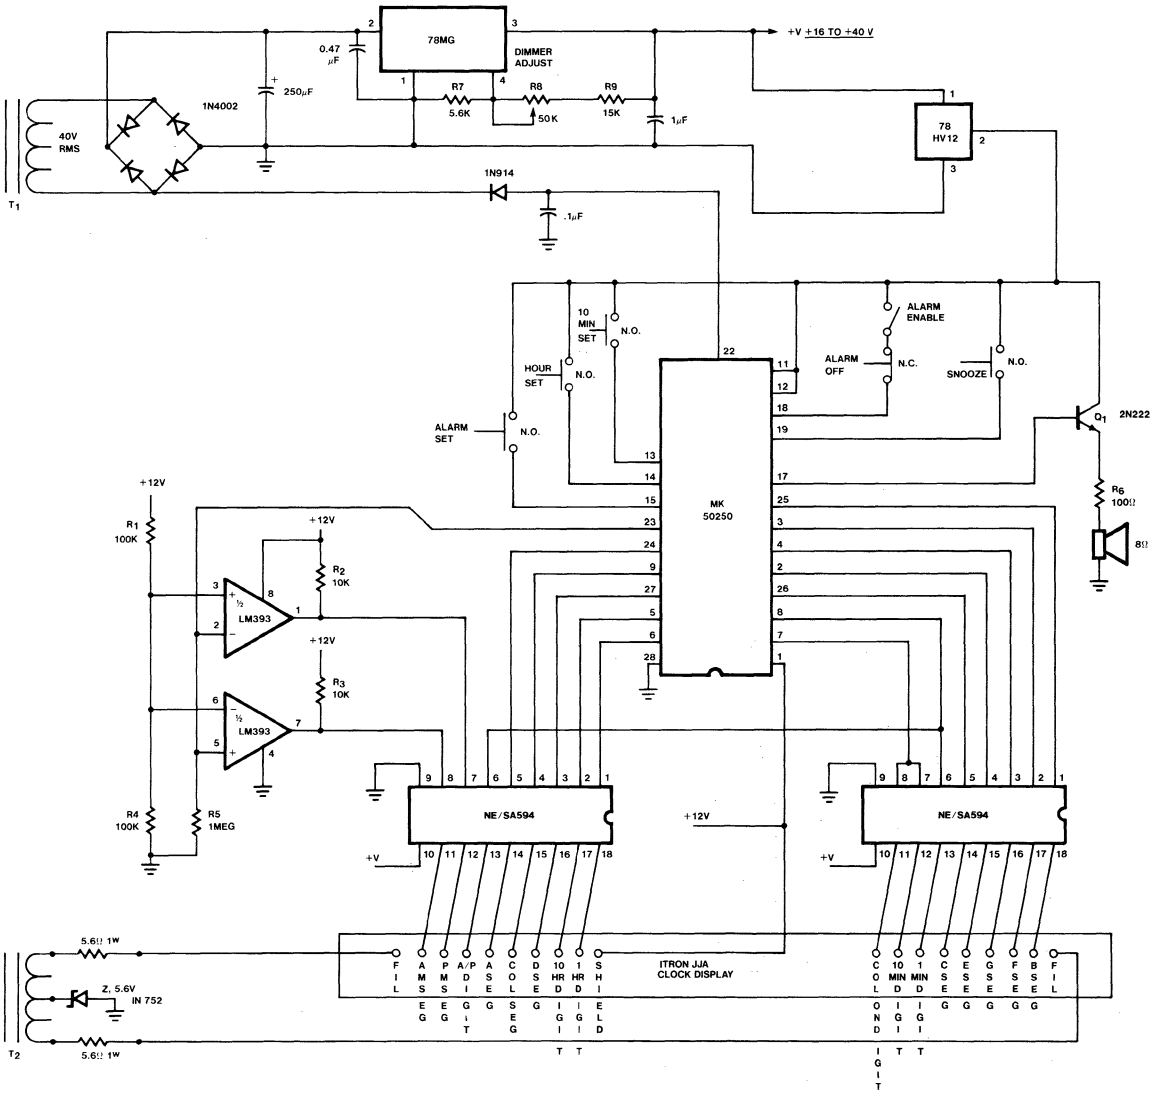

Figure 2

SECTION 10
DATA ACQUISITION

Section 10—DATA ACQUISTION

DAC-08 SERIES	8-Bit High Speed Multiplying D/A Converter	313
LF398	Monolithic Sample and Hold Circuits	303
MC1508-8/1408-8/1408-7	8-Bit Multiplying D/A Converter	307
NE5007/5008/SE5008	8-Bit High Speed Multiplying D/A Converter	313
NE/SE5009	8-Bit High Speed Multiplying D/A Converter	318
NE/SE5018	8-Bit Microprocessor-Compatible D/A Converter	325
NE/SE5019	8-Bit Microprocessor-Compatible D/A Converter	330
NE/SE5118	8-Bit Microprocessor-Compatible D/A Converter-Current Output	335
NE/SE5119	8-Bit Microprocessor-Compatible D/A Converter-Current Output	339
NE5020	10-Bit Microprocessor-Compatible D/A Converter	343
NE/SE5537	Sample and Hold Amplifier	351

T_A
Ambient temperature range. Range of the surrounding environment of the operating device.

T_J
Junction Temperature. The maximum temperature of the device. 150°C is standard for silicon devices.

T_{STG}
Storage temperature range. Temperature range that the device can be stored in a non-operating condition.

T_{SOLD}
Soldering Temperature. The temperature which can be applied to the lead frame of the device for short periods of time (normally specified for a duration of 10 sec).

Truth Tables
0 is logic level low
1 is logic level high
X - don't care condition - has no effect under circuit conditions listed.

Absolute Maximum Rating
Operating safe zones exceeding these limits could cause permanent damage to the device and are not meant to imply that devices can operate at these limits.

Power Dissipation
The power that the device can safely handle at 25°C. The dissipation must be derated as indicated for the individual package type.

Package Type Designation
See full package designations in Appendix.

V_{CC} ($-V_{CC}$)
Supply Voltage. The range of power supply voltage over which the device will operate safely.

Accuracy
The maximum deviation of the DAC output relative to an ideal straight line drawn from zero to full scale; 1 LSB for any bit combination.

Monotonicity
For a 1 LSB increase of input code, the output either increases or remains the same.

Differential Linearity
The incremental error from an ideal 1 LSB analog output change when the digital input is changed 1 LSB; guaranteed monotonicity requires the differential linearity error be less than 1 LSB and with a tempco of essentially zero.

Absolute Accuracy
Error of a D/A converter output is the difference between the analog output expected and the actual output with a given code applied. Error of an A/D converter is the difference between the theoretical analog output required to produce a given output code and the actual input required to produce a given output code and the actual input required to produce that same code. The actual input is a range and the measured value is the midpoint of the measured band and the theoretical midpoint.

Resolution
The number of bits on the input or output of an A/D or D/A converter. The number of discrete steps or states is equal to 2^n when n is the resolution of the converter. However, n bits of resolution does not guarantee n bits of accuracy.

Quantizing Error
In an A/D converter, there is an infinite number of possible input voltages, but only 2^n output codes (n = number of bits). Therefore, there will be an error as great as 1/2LSB because of this quantizing effect and the greatest error will occur at the transition voltage where the output changes state.

No Missing Codes
This is a property of an A/D converter that is related to, but is more stringent than monotonicity. If a converter is guaranteed to have no missing codes, there will be no output digital state that will be skipped when the input voltage is varied over the entire range.

Most Significant Bit (MSB)
The highest-order bit or the bit with the greatest weight.

Least Significant Bit (LSB)
The lowest-order bit or the bit with the least weight.

Gain Error
The error in the input-to-output ratio, usually expressed in percent.

Offset Error
This is an error in the reference point of the transfer function. It appears as a constant amplitude error signal at a D/A output or an A/D input. It also appears as a constant frequency shift in the output of a V/F converter. It is nulled prior to adjusting gain error by setting the input to the most-negative input and adjusting the output to the proper value.

Settling Time
The time delay between a change of input signal value and the effected change in the output signal. It is usually expressed in terms of how long it takes the output to arrive at, and remain within, a certain error band around the final value and is often given for several different magnitudes of input step change.

Conversation Time
Time required for a complete measurement by an A/D converter. Conversion times are a function of the number of bits (resolution) and the clock frequency.

Switching Time
The time it takes for a multiplexer to change from one channel to the next with the new output signal being within a certain percentage of its final value. It is expressed for a maximum voltage transition.

Throughput Rate
An A/D converter or a data acquisition system has a finite number of points that it can convert in any given time. Throughput rate is an expression of that quantity. It is dependent on the time it takes to make a conversion and the time required to set up to make the next conversion. In a data acquisition system this time includes the composite delay due to switching and settling times of the mux, settling time of the amplifier and acquisition time of the sample-and-hold.

Full Scale Tempco
The change in DAC full scale current with change in temperature expressed in ppm/°C.

Differential Non-Linearity Tempco
The non-linearity specification over a specified range of temperatures. This specification generally appears as the range of tem-

peratures that the device is monotonic (DAC) or has no missing codes (ADC).

Leakage Current

Multiplexer input current that does not flow through to the output but is shunted internally. It is also current that flows from OFF channels into the ON channel. In a current output D/A converter, there is a digital input code that ideally yields zero output current. If current flows with that input code, it is called leakage current. It is analogous to output voltage offset in a voltage-output D/A converter.

Power Supply Sensitivity

The change in DAC output current with changes in power supply voltage.

Output Voltage Compliance

The range of allowable voltage levels the output pins can assume without a major effect on circuit performance.

Compliance Voltage Range

For a current source the maximum range of terminal voltage for which the current source will maintain its specified values.

NOTE

Refer to Section 5 (Interface Circuits) of the 1979 Analog Applications Manual for an in-depth explanation of Converters and their applications

SIGNETICS D/A CONVERTER SELECTION GUIDE

PRODUCT	# BITS	ACC. %	OUTPUT			INT. REF.	INT. LATCH	PACKAGE		TEMPERATURE RANGE		RELIABILITY	
			V	I	T			N	F	Coml.	Mil	SURE II	SUPR II
MC1408-6	8	.78		X				X	X	X		X	
MC1408-7	8	.39		X				X	X	X		X	X
MC1408-8	8	.19		X				X	X	X		X	X
MC1508-8	8	.19		X					X		X	X	X
NE5007	8	.39		X	X			X	X	X		X	X
NE5008	8	.19		X	X			X	X	X		X	X
NE5009	8	.1		X	X			X	X	X		X	X
SE5008	8	.19		X	X				X		X	X	X
SE5009	8	.1		X	X				X		X	X	X
NE5018	8	.19	X			X	X	X	X	X		X	X
NE5019	8	.1	X			X	X	X	X	X		X	X
SE5018	8	.19	X			X	X		X		X	X	X
SE5019	8	.1	X			X	X		X		X	X	X
NE5118	8	.19		X		X	X	X	X	X		X	
NE5119	8	.1		X		X	X	X	X	X		X	
SE5118	8	.19		X		X	X		X		X	X	
SE5119	8	.1		X		X	X		X		X	X	
NE5020	10	.1	X			X	X	X	X	X		X	

SE/NE 5018 DAC

COMPETITION	INDUSTRY VALUE	KEY PARAMETER	SIGNETICS AVAILABLE VALUE	SIGNETICS ORIGINATED DEVICES	QR&A		COMMENTS
					SURE II	SUPR II	
AMD Analog Devices Datel Fairchild Harris Precision National	8	Resolution (Bits)	8 Bits	NE5018 SE5018 NE5019 SE5019	Yes Yes Yes Yes	Yes Yes Yes Yes	*Not pin for pin replacement. Do not have total capability of the NE5018 μP compatible series.
	.19	Linearity	0.1 %				
	2- 300 μ sec	Settling Time ½ LSB	2 μsec				
	10-50	Gain TC	20 PPM/°C				
	0-4	Current (Output)	 mA	NE/SE 5118 NE/SE 5119	Yes Yes	Yes Yes	
	−10 to +18	Voltage (Output)	0-10 ±5 Volts	NE5018 SE5019	Yes Yes	Yes Yes	

10

DAC-08/08A

COMPETITION	INDUSTRY VALUE	KEY PARAMETER	SIGNETICS AVAILABLE VALUE	SIGNETICS ORIGINATED DEVICES	QR&A		COMMENTS
					SURE II	SUPR II	
AMD							
Analog Devices	8	Resolution	8	NE/SE5008 NE/SE5009	Yes Yes	Yes Yes	
Datel							
Motorola			Bits				
National							
	.19	Linearity	19	NE/SE5008 NE/SE5009	Yes Yes	Yes Yes	
			%FS				
	85-300	Settling time	135	NE/SE5008 NE/SE5009	Yes Yes	Yes Yes	
			nsec				
	48-500	Power supply regulator	48	NE/SE5008 NE/SE5009	Yes Yes	Yes Yes	
			mW				

LF398-H,N

DESCRIPTION

The Signetics LF398 is a monolithic sample and hold circuit which utilizes high-voltage Ion-Inplant JFET technology to obtain ultra-high dc accuracy with fast acquisition of signal and low droop rate. Operating as a unity gain follower, dc gain accuracy is 0.004% typical and acquisition time is as low as 6μs to 0.01%. A bipolar input stage is used to achieve low offset voltage and wide bandwidth. Input offset adjust is accomplished with a single pin and does not degrade input offset drift. The wide bandwidth allows the LF398 to be included inside the feedback loop of 1MHz op amps without having stability problems. Input impedance of $10^{10}\Omega$ allows high source impedances to be used without degrading accuracy.

P-channel junction FET's are combined with bipolar devices in the output amplifier to give droop rates as low as 5mV/min with a 1μF hold capacitor. The JFET's have much lower noise than MOS devices used in previous designs and do not exhibit high temperature instabilities. The overall design guarantees no feed-through from input to output in the hold mode even for input signals equal to the supply voltages.

Logic inputs on the LF398 are fully differential with low input current, allowing direct connection to TTL, PMOS, and CMOS. Differential threshold is 1.4V. The LF398 will operate from ±5V to ±18V supplies. It is available in an 8-lead TO-5 package or an 8-pin plastic DIP.

FEATURES

- **Operates from ±5V to ±18V supplies**
- **Less than 10μs acquisition time**
- **TTL, PMOS, CMOS compatible logic input**
- **0.5mV typical hold step at C_h = 0.01μF**
- **Low input offset**
- **0.002% gain accuracy**
- **Low output noise in hold mode**
- **Input characteristics do not change during hold mode**
- **High supply rejection ratio in sample or hold**
- **Wide bandwidth**
- **The LF398 is ideally suited for a wide variety of sample and hold applications including data acquisition, analog to digital conversion, synchronous demodulation, and automatic test setup.**

PIN CONFIGURATION

H PACKAGE



TOP VIEW

ORDER PART NO. LF398H,N

N PACKAGE



ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	±18	V
Power dissipation (package limitation)[1]	500	mW
Operating ambient temperature range LF398	0 to +70	°C
Storage temperature range	−65 to +150	°C
Input voltage	Equal to supply voltage	
Logic to logic reference differential voltage[2]	+7, −30	V
Output short circuit duration	Indefinite	
Hold capacitor short circuit duration	10	sec
Lead temperature (soldering, 10sec)	300	°C

FUNCTIONAL DIAGRAM

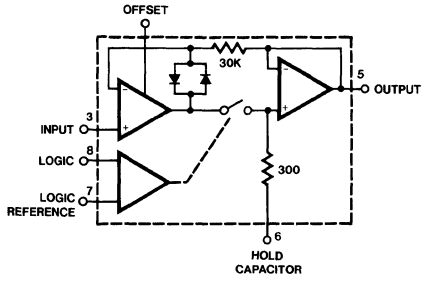

TYPICAL APPLICATIONS

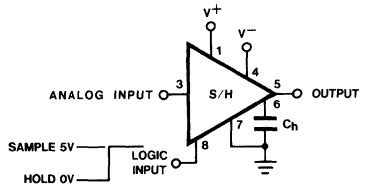

DC ELECTRICAL CHARACTERISTICS

Unless otherwise specified, the following conditions apply. Unit is in "sample" mode, $V_S = \pm 15V$, $T_j = 25°C$, $-11.5V \leq V_{IN} \leq +11.5V$, $C_h = 0.01\mu F$, and $R_L = 10k\Omega$. Logic reference voltage = OV and logic voltage = 2.5V.

PARAMETER	TEST CONDITIONS	LF398			UNIT
		Min	Typ	Max	
Input offset voltage[6]	$T_j = 25°C$ Full temperature range		2	7 10	mV mV
Input bias current[6]	$T_j = 25°C$ Full temperature range		10	50 100	nA nA
Input impedance	$T_j = 25°C$		10^{10}		Ω
Gain error	$T_j = 25°C$, $R_L = 10K$ Full temperature range		0.004	0.01 0.02	% %
Feedthrough attenuation ratio at 1kHz	$T_j = 25°C$, $C_h = 0.01\mu F$	80	90		dB
Output impedance	$T_j = 25°C$, "HOLD" mode Full temperature range		0.5	4 6	Ω Ω
"HOLD" step[4] Supply current[6]	$T_j = 25°C$, $C_h = 0.01\mu F$, $V_{OUT} = 0$ $T_j \geq 25°C$		1.0 4.5	2.5 6.5	mV mA
Logic and logic reference input current	$T_j = 25°C$		2	10	μA
Leakage current into hold capacitor[6]	$T_j = 25°C$[5] Hold mode		30	200	pA
Acquisition time to 0.1%	$\Delta V_{OUT} = 10V$, $C_h = 1000pF$ $C_h = 0.01\mu F$		4 20		μs μs
Hold capacitor charging current	$V_{IN}-V_{OUT} = 2V$		5		mA
Supply voltage rejection ratio	$V_{OUT} = 0$	80	110		dB
Differential logic threshold	$T_j = 25°C$	0.8	1.4	2.4	V

NOTES

1. The maximum junction temperature of the LF398 is 150°C. When operating at elevated ambient temperature, the TO-5 and plastic DIP packages must be derated based on a thermal resistance (θjA) of 150°C/W.
2. Although the differential voltage may not exceed the limits given, the common-mode voltage on the logic pins may be equal to the supply voltages without causing damage to the circuit. For proper logic operation, however, one of the logic pins must always be at least 2V below the positive supply and 3V above the negative supply.
3. Unless otherwise specified, the following conditions apply. Unit is in "sample" mode, $V_S = \pm 15V$, $T_j = 25°C$, $-11.5V \leq V_{IN} \leq +11.5V$, $C_h = 0.01\mu F$, and $R_L = 10k$. Logic reference voltage = OV and logic voltage = 2.5V.
4. Hold step is sensitive to stray capacitive coupling between input logic signals and the hold capacitor. 1pF, for instance, will create an additional 0.5mV step with a 5V logic swing and a $0.01\mu F$ hold capacitor. Magnitude of the hold step is inversely proportional to hold capacitor value.
5. Leakage current is measured at a junction temperature of 25°C. The effects of junction temperature rise due to power dissipation or elevated ambient can be calculated by doubling the 25°C value for each 11°C increase in chip temperature. Leakage is guaranteed over full input signal range.
6. The parameters guaranteed over a supply voltage of ±5 to ±18V.

TYPICAL AC PERFORMANCE CHARACTERISTICS (cont'd)

DYNAMIC SAMPLING ERROR

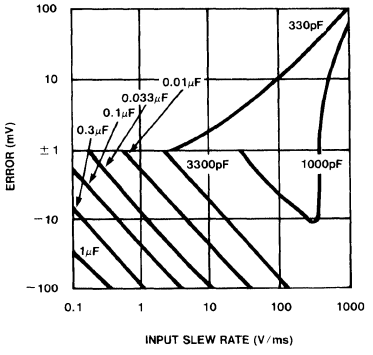

OUTPUT DROOP RATE

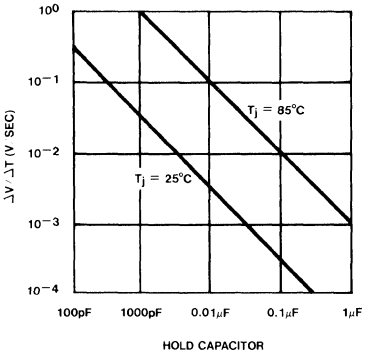

"HOLD" SETTLING TIME

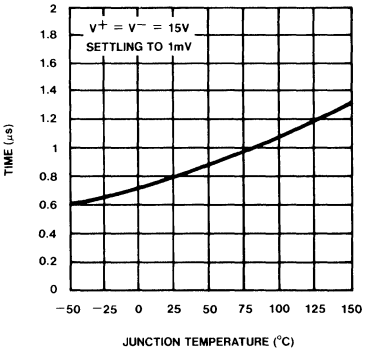

PHASE AND GAIN (INPUT TO OUTPUT, SMALL SIGNAL)

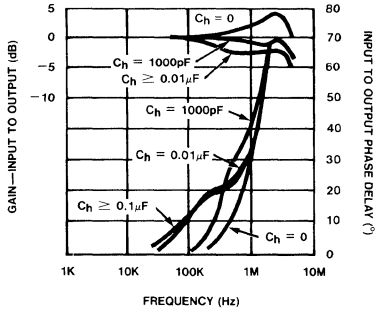

POWER SUPPLY REJECTION

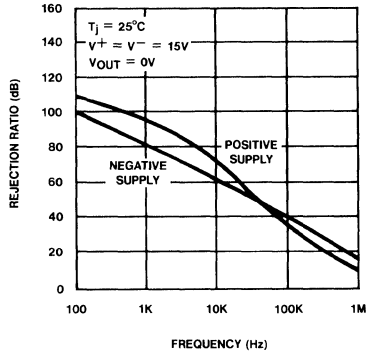

OUTPUT NOISE

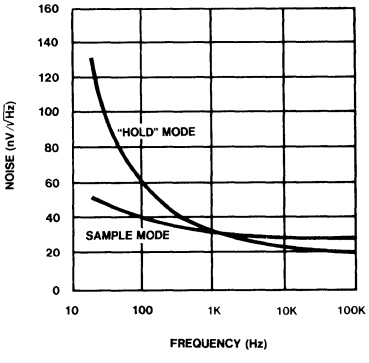

FEEDTHROUGH REJECTION RATIO (HOLD MODE)

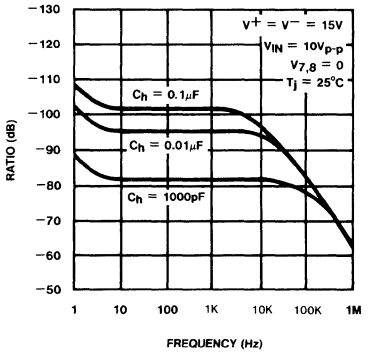

TYPICAL DC PERFORMANCE CHARACTERISTICS

INPUT BIAS CURRENT

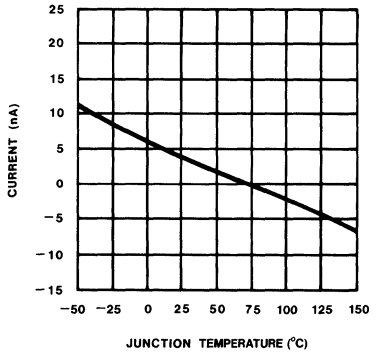

OUTPUT SHORT CIRCUIT CURRENT

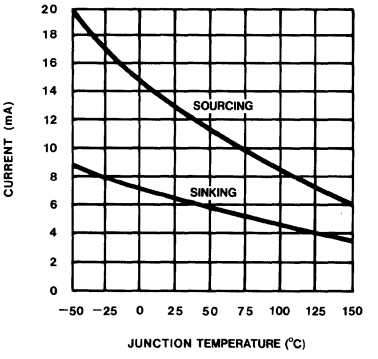

GAIN ERROR

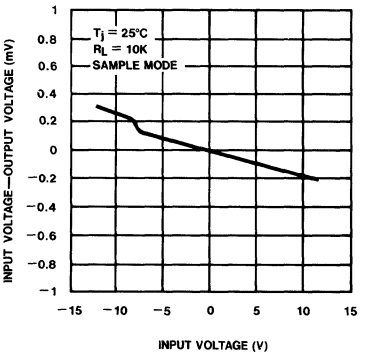

HOLD STEP

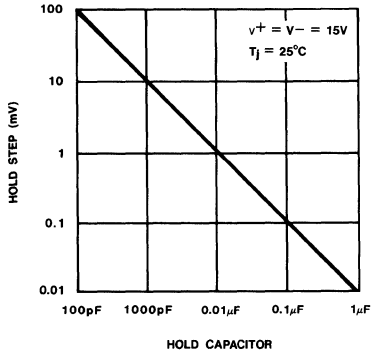

LEAKAGE CURRENT INTO HOLD CAPACITOR

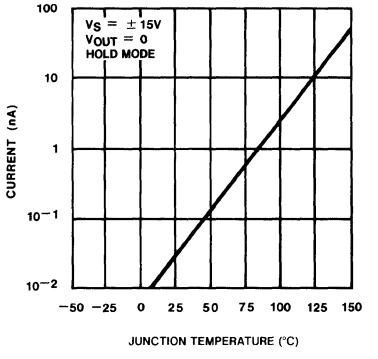

HOLD STEP INPUT VOLTAGE

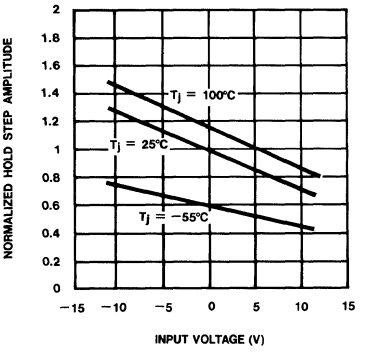

TYPICAL AC PERFORMANCE CHARACTERISTICS

ACQUISITION TIME

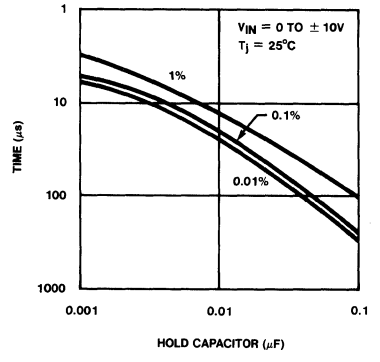

APERTURE TIME

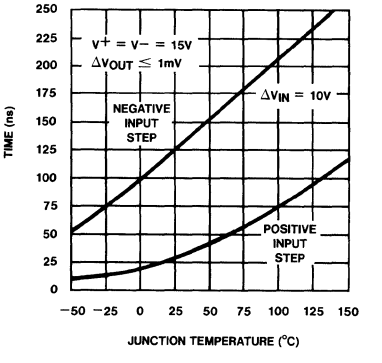

CAPACITOR HYSTERESIS

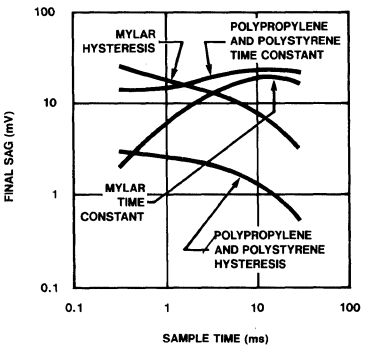

MC1508-8/MC1408-8/MC1408-7 -F,N

DESCRIPTION

The MC1508/MC1408 series of 8-bit monolithic digital-to-analog converters provide high speed performance with low cost. They are designed for use where the output current is a linear product of an 8-bit digital word and an analog reference voltage.

FEATURES

- **Fast settling time—300ns (typ)**
- **Relative accuracy ±0.19% (max error)**
- **Non-inverting digital inputs are TTL and CMOS compatible**
- **High speed multiplying rate 4.0mA/μs (input slew)**
- **Output voltage swing +.5V to -5.0V**
- **Standard supply voltages + 5.0V and -5.0V to -15V**
- **Military qualifications pending**

APPLICATIONS

- **Tracking A-to-D converters**
- **2½-digit panel meters and DVM's**
- **Waveform synthesis**
- **Sample and hold**
- **Peak detector**
- **Programmable gain and attenuation**
- **CRT character generation**
- **Audio digitizing and decoding**
- **Programmable power supplies**
- **Analog-digital multiplication**
- **Digital-digital multiplication**
- **Analog-digital division**
- **Digital addition and subtraction**
- **Speech compression and expansion**
- **Stepping motor drive**

TYPICAL PERFORMANCE CHARACTERISTICS

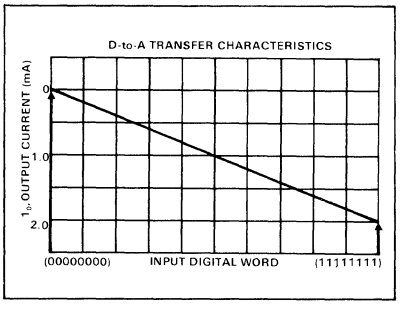

CIRCUIT DESCRIPTION

The MC1508/MC1408 consists of a reference current amplifier, and R-2R ladder, and 8 high speed current switches. For many applications, only a reference resistor and reference voltage need be added.

The switches are non-inverting in operation; therefore, a high state on the input turns on the specified output current component.

The switch uses current steering for high speed, and a termination amplifier consisting of an active load gain stage with unity gain feedback. The termination amplifier holds the parasitic capacitance of the ladder at a constant voltage during switching, and provides a low impedance termination of equal voltage for all legs of the ladder.

The R-2R ladder divides the reference amplifier current into binarily-related components, which are fed to the switches. Note that there is always a remainder current which is equal to the least significant bit. This current is shunted to ground, and the maximum output current is 255/256 of the reference amplifier current, or 1.992mA for a 2.0mA reference amplifier current if the NPN current source pair is perfectly matched.

PIN CONFIGURATION

F,N PACKAGE*



*N = Plastic DIP
F = Cerdip

BLOCK DIAGRAM

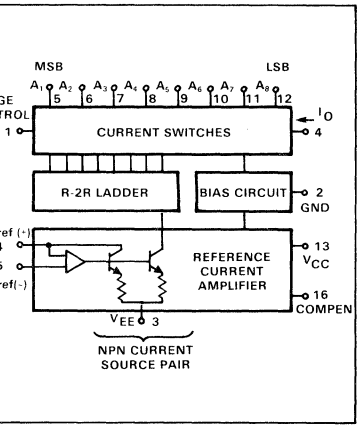

ABSOLUTE MAXIMUM RATNGS T_A = +25°C unless otherwise specified

	PARAMETER	RATING	UNIT
V_{CC}	Power supply voltage		V
V_{EE}	Positive	+5.5	
V_5-V_{12}	Negative	-16.5	
V_O	Digital input voltage	+5.5, 0	V
I_{14}	Applied output voltage	+0.5, -5.2	V
V_{14},V_{15}	Reference current	5.0	mA
	Reference amplifier inputs	V_{CC}, V_{EE}	V
P_D	Power dissipation (package limitation)		mW
	Ceramic package	1000	
	Plastic package	800	
T_A	Operating temperature range		°C
	MC1508	-55 to +125	
	MC1408	0 to +75	
T_{stg}	Storage temperature range	-65 to +70	°C

MC1508-8/MC1408-8/MC1408-7 -F,N

Pin 3 must be 3V more negative than the potential to which R_{15} is returned.

DC ELECTRICAL CHARACTERISTICS[1]

V_{CC} = +5.0Vdc, V_{EE} = -15Vdc, $\frac{V_{ref}}{R_{14}}$ = 2.0mA unless otherwise specified.

MC1508: T_A = -55°C to 125°C. MC1408: T_A = 0°C to 70°C

PARAMETER		TEST CONDITIONS	MC1508-8			MC1408-8			MC1408-7			UNIT
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
E_r	Relative accuracy	Error relative to full scale I_O, Figure 3			±0.19			±0.19			±0.39	%
t_s	Setting time[1]	To within 1/2 LSB, includes t'PLH, T'A = +25°C, Figure 4		300			300			300		ns
	Propagation delay time											ns
t_{PLH}	Low-to-high	T_A = +25°C,		30	100		30	100		30	100	
t_{PHL}	High-to-low	Figure 4										
TCI_O	Output full scale current drift			-20			-20			-20		PPM/°C
	Digital input logic level (MSB)											Vdc
V_{IH}	High	Figure 5	2.0			2.0			2.0			
V_{IL}	Low				0.8			0.8			0.8	
	Digital input current (MSB)	Figure 5										mA
I_{IH}	High	V_{IH} = 5.0V		0	0.04		0	0.04		0	0.04	
I_{IL}	Low	V_{IL} = 0.8V		-0.4	-0.8		-0.4	-0.8		-0.4	-0.8	
I_{15}	Reference input bias current	Pin 15, Figure 5		-1.0	-3.0		-1.0	-3.0		-1.0	-3.0	µA
I_{OR}	Output current range	Figure 5										mA
		V_{EE} = -5.0V	0	2.0	2.1	0	2.0	2.1	0	2.0	2.1	
		V_{EE} = -7.0V to -15V	0	2.0	4.2	0	2.0	4.2	0	2.0	4.2	
I_O	Output current	Figure 5										
		V_{ref} = 2.000V, R14 = 1000Ω	1.9	1.99	2.1	1.9	1.99	2.1	1.9	1.99	2.1	mA
$I_{O(min)}$	Off-state	All bits low		0	4.0		0	4.0		0	4.0	µA
V_O	Output voltage compliance	E_r≤0.19% at T_A = +25°C, Figure 5										Vdc
		V_{EE} = -5V			-0.6, +0.5			-0.6, +0.5			-0.6, +0.5	
		V_{EE} below -10V			-5.0, +0.5			-5.0, +0.5			-5.0, +0.5	
SRI_{ref}	Reference current slew rate	Figure 6		4.0			4.0			4.0		mA/µs
$PSRR_{(-)}$	Output current power supply sensitivity	I_{ref} = 1mA		0.5	2.7		0.5	2.7		0.5	2.7	µA/V
	Power supply current											mA
I_{CC}	Positive	All bits low,		+13.5	+22		+13.5	+22		+13.5	+22	
I_{EE}	Negative	Figure 5		-7.5	-13		-7.5	-13		-7.5	-13	
	Power supply voltage range											Vdc
V_{CCR}	Positive	T_A = +25°C,	+4.5	+5.0	+5.5	+4.5	+5.0	+5.5	+4.5	+5.0	+5.5	
V_{EER}	Negative	Figure 5	-4.5	-15	-16.5	-4.5	-15	-16.5	-4.5	-15	-16.5	
P_D	Power dissipation	All bits low, Figure 5										mW
		V_{EE} = -5.0Vdc		105	170		105	170		105	170	
		V_{EE} = -15Vdc		190	305		190	305		190	305	
		All bits high, Figure 5										
		V_{EE} = -5.0Vdc		90			90			90		
		V_{EE} = -15Vdc		160			160			160		

NOTES

1. All bits switched

EQUIVALENT CIRCUIT SCHEMATIC

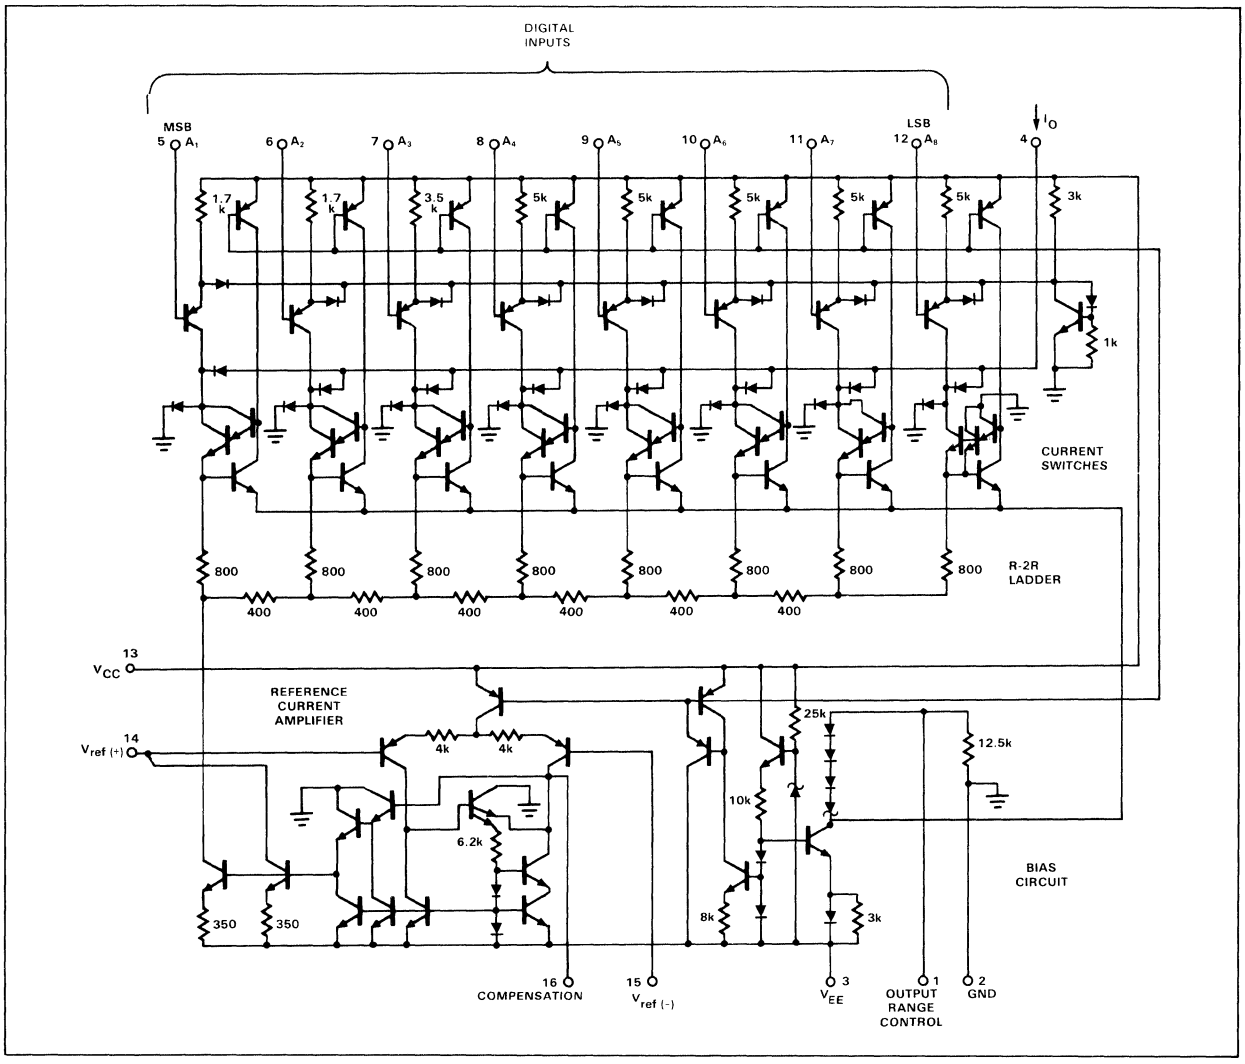

FUNCTIONAL DESCRIPTION

Reference Amplifier Drive and Compensation

The reference amplifier provides a voltage at pin 14 for converting the reference voltage to a current, and a turn-around circuit or current mirror for feeding the ladder. The reference amplifier input current (I_{14}) must always flow into pin 14 regardless of the setup method or reference voltage polarity.

Connections for a positive reference voltage are shown in Figure 1. The reference voltage source supplies the full current I_{14}. For bipolar reference signals, as in the multiplying mode, R_{15} can be tied to a negative voltage corresponding to the minimum input level. It is possible to eliminate R_{15} with only a small sacrifice in accuracy and temperature drift.

The compensation capacitor value must be increased with increases in R_{14} to maintain proper phase margin; for R_{14} values of 1.0, 2.5 and 5.0kΩ, minimum capacitor values are 15, 37, and 75pF. The capacitor may be tied to either V_{EE} or ground, but using V_{EE} increases negative supply rejection.

A negative reference voltage may be used if R_{14} is grounded and the reference voltage is applied to R_{15} as shown in Figure 2. A high input impedance is the main advantage of this method. Compensation involves a capacitor to V_{EE} on pin 16, using the values of the previous paragraph. The negative reference voltage must be at least 3.0V above the V_{EE} supply. Bipolar input signals may be handled by connecting R_{14} to a positive reference voltage equal to the peak positive input level at pin 15.

When a dc reference voltage is used, capacitive bypass to ground is recommended. The 5.0V logic supply is not recommended as a reference voltage. If a well regulated 5.0V supply which drives logic is to be used as the reference, R_{14} should be decoupled by connecting it to +5.0V through another resistor and bypassing the junction of the 2 resistors with 0.1μF to ground. For reference voltages greater than 5.0V, a clamp diode is recommended between pin 14 and ground.

If pin 14 is driven by a high inpedance such as a transistor current source, none of the above compensation methods apply and

the amplifier must be heavily compensated, decreasing the overall bandwidth.

Output Voltage Range

The voltage on pin 4 is restricted to a range of -0.6 to +0.5V at -24°C, due to the current switching methods employed in the MC1508/MC1408. When a current switch is turned off, the positive voltage on the output terminal can turn on the output diode and increase the output current level. When a current switch is turned on, the negative output voltage range is restricted. The base of the termination circuit Darlington transistor is 1 diode voltage below ground when pin 1 is grounded, so a negative voltage below ground when pin 1 is grounded, so a negative voltage below the specified safe level will drive the low current device of the Darlington into saturation, decreasing the output current level.

The negative output voltage compliance of the MC1508/MC1408 may be extended to -5.0V by opening the circuit at pin 1. The negative supply voltage must be more negative than -10V. Using a full scale current of 1.992mA and load resistor of 2.5kΩ between pin 4 and ground will yield a voltage output of 256 levels between 0 and -4.980V. Floating pin 1 does not affect the converter speed or power dissipation. However, the value of the load resistor determines the switching time due to increased voltage swing. Values of R_L up to 500Ω do not significantly affect performance, but 2.5kΩ load increases worst case settling time to 1.2μs (when all bits are switched on). Refer to the subsequent text section on settling time for more details on output loading.

If a power supply value between -5.0V and -10V is desired, a voltage of between 0 and -5.0V may be applied to pin 1. The value of this voltage will be the maximum allowable negative output swing.

Output Current Range

The output current maximum rating of 4.2mA may be used only for negative supply voltages more negative than -7.0V, due to the increased voltage drop across the 350Ω resistors in the reference current amplifier.

Accuracy

Absolute accuracy is the measure of each output current level with respect to its intended value, and is dependent upon relative accuracy and full scale current drift. Relative accuracy is the measure of each output current level as a fraction of the full scale current. The relative accuracy of the MC1508/MC1408 is essentially constant with temperature due to the excellent temperature tracking of the monolithic resistor ladder. The reference current may drift with temperature, causing a change in the absolute accuracy of output current. However, the MC1508/MC1408 has a very low full scale current drift with temperature.

The MC1508/±MC1408 series is guaranteed accurate to within ±1/2 LSB at +25°C at a full scale output current of 1.992mA. This corresponds to a reference amplifier output current drive to the ladder network of 2.0mA, with the loss of 1 LSB = 8.0μA which is the ladder remainder shunted to ground. The input current to pin 14 has a guaranteed value of between 1.9 and 2.1mA, allowing some mismatch in the NPN current source pair. The accuracy test circuit is shown in Figure 3. The 12-bit converter is calibrated for a full scale output current of 1.992mA. This is an optional step since the MC1508/MC1408 accuracy is essentially the same between 1.5 and 2.5mA. Then the MC1508/MC1408 circuits' full scale current is trimmed to the same value with R14 so that a zero value appears at the error amplifier output. The counter is activated and the error band may be displayed on an oscilloscope, detected by comparators, or stored in a peak detector.

Two 8-bit D-to-A converters may not be used to construct a 16-bit accurate D-to-A converter. Sixteen-bit accuracy implies a total error ±1/2 of 1 part in 65,536, or ±0.00076%, which is much more accurate than the ±0.19% specification provided by the MC1508/MC1408.

Multiplying Accuracy

The MC1508/MC1408 may be used in the multiplying mode with 8-bit accuracy when the reference current is varied over a range of 256:1. The major source of error is the bias current of the termination amplifier. Under worst case conditions, these 8 amplifiers can contribute a total of 1.6μA extra current at the output terminal. If the reference current in the multiplying mode ranges from 16μA to 4.0mA, the 1.6μA contributes an error of 0.1 LSB. This is well within 8-bit accuracy.

A monotonic converter is one which supplies an increase in current for each increment in the binary word. Typically, the MC1508/MC1408 in monotonic for all values of reference current above 0.5mA. The recommended range for operation with a dc reference current is 0.5 to 4.0mA.

Settling Time

The worst case switching condition occurs when all bits are switched on, which corresponds to a low-to-high transition for all bits. This time is typically 300ns for settling to within ±1/2 LSB for 8-bit accuracy and 200ns to 1/2 LSB for 7-bit accuracy. The turnoff is typically under 100ns. These times apply when $R_L \leq 500\Omega$ and C_O 25pF.

The slowest single switch is the least significant bit, which turns on and settles in 250ns and truns off in 80ns. In applications where the D-to-A converter functions in a positive going ramp mode, the worst case switching condition does not occur, and a settling time of less than 300ns may be realized. Bit A7 turns on in 200ns and off in 80ns, while bit A6 turns on in 150ns and off in 80ns.

The test circuit of Figure 4 requires a smaller voltage swing for the current switches due to internal voltage clamping in MC1508/MC1408. A 1.0kΩ load resistor from pin 4 to ground gives a typical settling time of 400ns. Thus, it is voltage swing and not the output R_C time constant that determines settling time for most applications.

Extra care must be taken in board layout since this is usually the dominant factor in satisfactory test results when measuring settling time. Short leads, 100μF supply bypassing for low frequencies, and minimum scope lead length are all mandatory.

TEST CIRCUITS

POSITIVE Vref

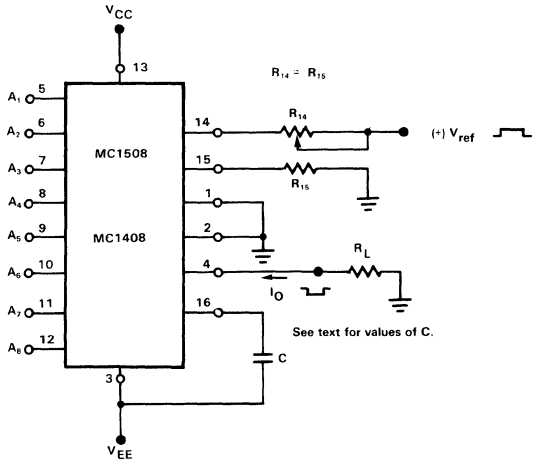

Figure 1

NEGATIVE Vref

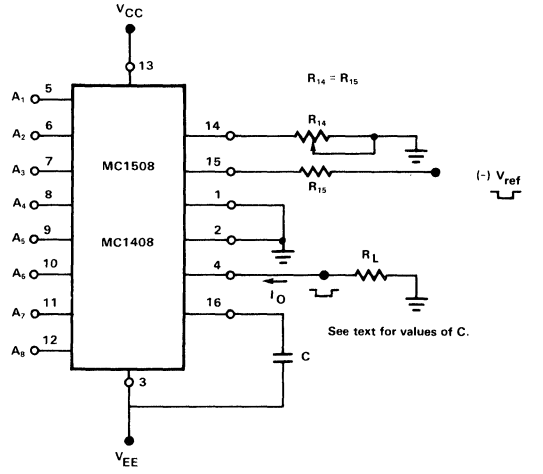

Figure 2

RELATIVE ACCURACY

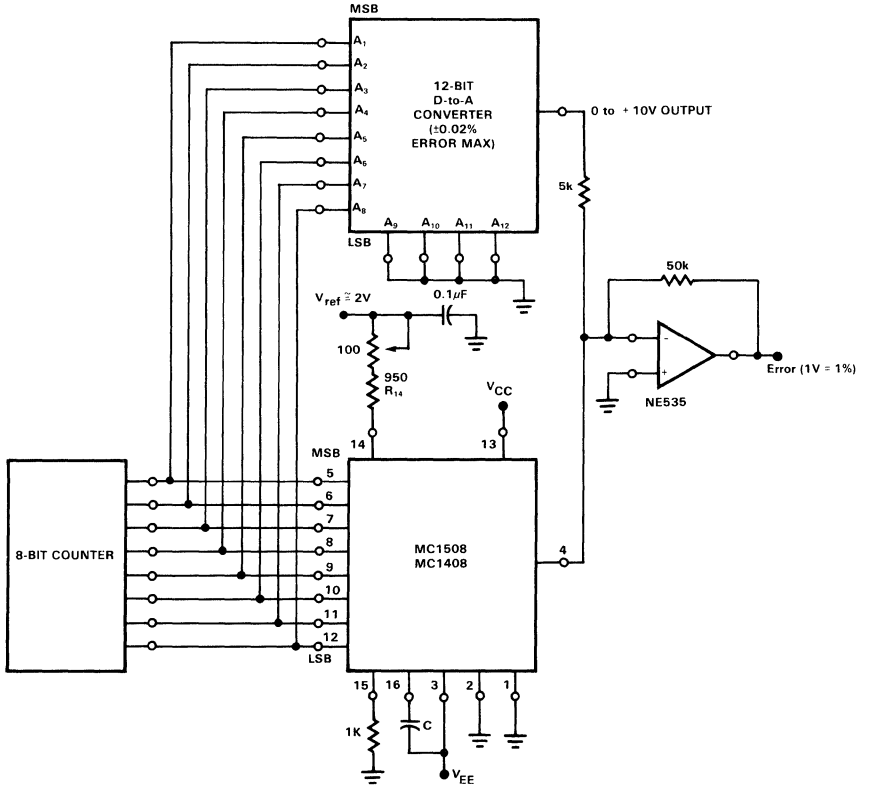

Figure 3

TEST CIRCUITS (Cont'd)

TRANSIENT RESPONSE AND SETTLING TIME

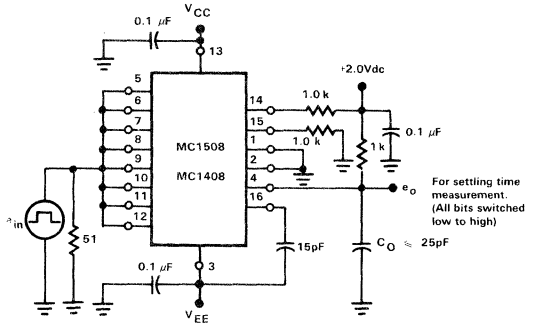

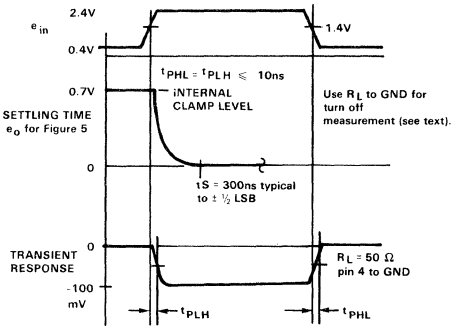

Figure 4

NOTATION DEFINITIONS

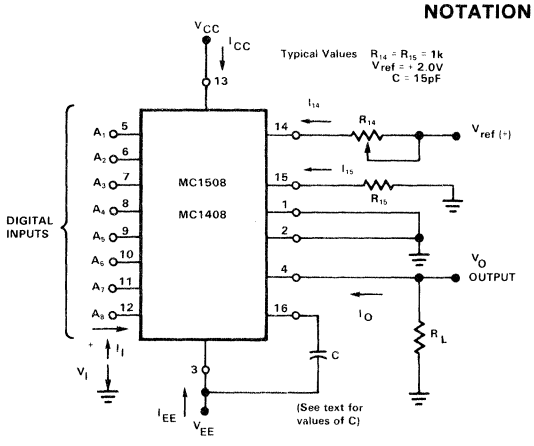

V_I and I_I apply to inputs A_1 thru A_8

The resistor tied to pin 15 is to temperature compensate the bias current and may not be necessary for all applications.

$$I_O = K\left\{\frac{A_1}{2} + \frac{A_2}{4} + \frac{A_3}{8} + \frac{A_4}{16} + \frac{A_5}{32} + \frac{A_6}{64} + \frac{A_7}{128} + \frac{A_8}{256}\right\}$$

where $K \cong \frac{V_{ref}}{R_{14}}$

and A_N = "1" if A_N is at high level
A_N = "0" if A_N is at low level

Figure 5

REFERENCE CURRENT SLEW RATE MEASUREMENT

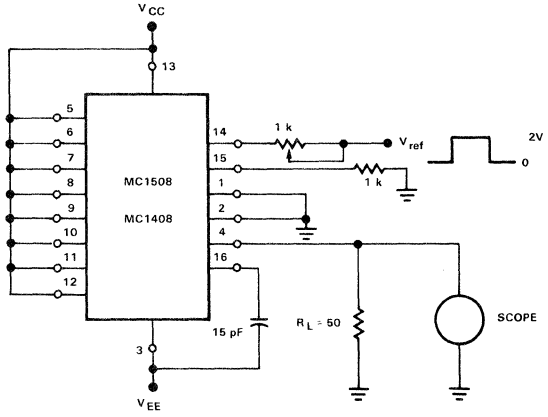

$$\frac{dI}{dt} = \frac{I}{R_L}\frac{dV}{dt}$$



Figure 6

NE5007/5008-F,N
SE5008-F

DESCRIPTION

The 5007/5008 series of 8-bit monolithic multiplying Digital-to-Analog Converters provide very high speed performance coupled with low cost and outstanding applications flexibility.

Advanced circuit design achieves 85ns settling times with very low glitch and at low power consumption. Monotonic multiplying performance is attained over a wide 20 to 1 reference current range. Matching to within 1 LSB between reference and full scale currents eliminates the need for full scale trimming in most applications. Direct interface to all popular logic families with full noise immunity is provided by the high swing, adjustable threshold logic inputs.

Dual complementary outputs are provided, increasing versatility and enabling differential operation to effectively double the peak-to-peak output swing. True high voltage compliance outputs allow direct output voltage conversion and eliminate output op amps in many applications.

All 5007/5008 series models guarantee full 8-bit monotonicity and linearities as tight as 0.1% over the entire operating temperature range are available. Device performance is essentially unchanged over the ±4.5V to ±18V power supply range, with 33mW power consumption attainable at ±5V supplies.

The compact size and low power consumption make the 5007/5008 attractive for portable and military/aerospace applications.

FEATURES

- **Fast settling output current—85ns**
- **Full scale current prematched to ±1 LSB**
- **Direct interface to TTL, CMOS, ECL, HTL, PMOS**
- **Relative accuracy to 0.1% maximum over temperature range**
- **High output compliance—-10V to +18V**
- **True and complemented outputs**
- **Wide range multiplying capability**
- **Low FS current drift—±10ppm/°C**
- **Wide power supply range—±4.5V to ±18V**
- **Low power consumption—33mW at ±5V**
- **SE5008 military qualifications pending**

APPLICATIONS

- **8-bit, 1μs A-to-D converters**
- **Servo-motor and pen drivers**
- **Waveform generators**
- **Audio encoders and attenuators**
- **Analog meter drivers**
- **Programmable power supplies**
- **CRT display drivers**
- **High speed modems**
- **Other applications where low cost, high speed and complete input/output versatility are required**

ORDERING INFORMATION

RELATIVE ACCURACY	0 to 70°C	-55 to 125°C
0.39% FS	NE5007N NE5007F	-
0.19% FS	NE5008N NE5008F	SE5008F

PIN CONFIGURATION

F,N PACKAGE



ORDER PART NO.

NE5007F,N
NE5008F,N
SE5008F

CROSS REFERENCE

The 5007/5008 series are pin and functionally compatible with the DAC-08 series of devices.

PMI	SIGNETICS
DAC-08A	SE5009
DAC-08	SE5008
DAC-08H	NE5009
DAC-08E	NE5008
DAC-08C	NE5007

ABSOLUTE MAXIMUM RATINGS T_A = 25°C unless otherwise noted

	PARAMETER	RATING	UNIT
T_A	Operating temperature range		°C
	SE5008	-55 to +125	
	NE5007/8	0 to +70	
t_{stg}	Storage temperature	-65 to +150	°C
P_D	Power dissipation	500	mW
	Lead soldering temperature (60sec)	300	°C
	V+ to V- supply	36	V
	Logic inputs	V- to V- plus 36V	
V_{LC}	Logic threshold control	V- to V+	
	Analog current outputs	See output current or output voltage performance curve	
V_{14}, V_{15}	Reference inputs	V- to V+	
V_{14} to V_{15}	Reference input differential voltage	±18	V
I_{14}	Reference input current	5.0	mA

NE5007/5008-F,N
SE5008-F

BLOCK DIAGRAM

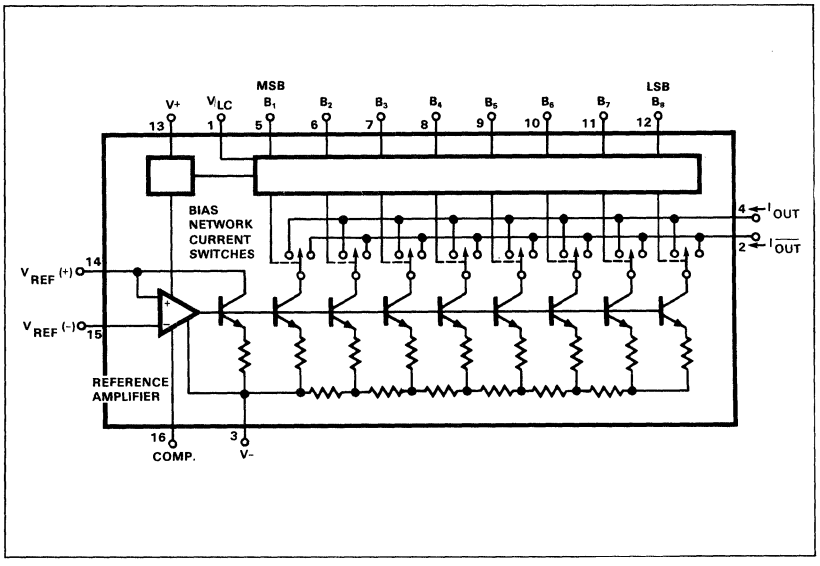

TEST CIRCUIT

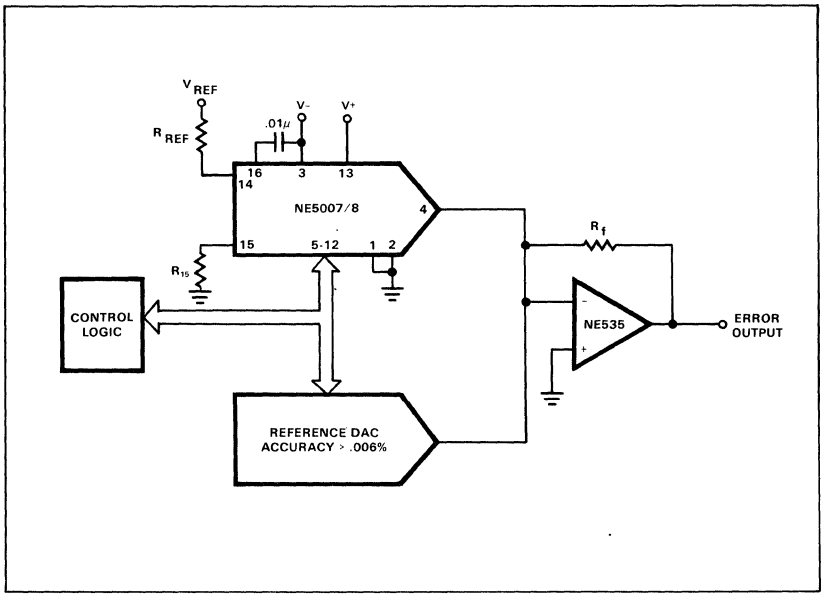

NE5007/5008-F,N
SE5008-F

Pin 3 must be 3V more negative than the potential to which R_{15} is returned.

ELECTRICAL CHARACTERISTICS V_S = ±15V, I_{REF} = 2.0mA, Output characteristics refer to both IOUT and $\overline{IOUT}$ unless otherwise noted. NE5008: T_A = 0°C to 70°C. SE5008: T_A = -55°C to 125°C.

PARAMETER		TEST CONDITIONS	NE5007			NE5008			SE5008			UNIT
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	8	8	8	Bits
	Monotonicity*		8	8	8	8	8	8	8	8	8	Bits
	Relative accuracy	Over temperature range			±0.39			±0.19			±0.19	%FS
t_S	Settling time	To ±½ LSB, all bits switched on or off, T_A=25°C		85	135		85	135		85	135	ns
t_{PLH} t_{PHL}	Propagation delay Low-to-high High-to-low	T_A=25°C, each bit. All bits switched		35	60		35	60		35	60	ns
TCI_{FS}	Full scale tempco			±10			±10			±10		ppm/°C
V_{OC}	Output voltage compliance	Full scale current change <½ LSB	-10		+18	-10		+18	-10		+18	V
I_{FS4}	Full scale current	V_{REF}=10.000V, R_{14}, R_{15}=5.000kΩ, T_A=25°C	1.94	1.99	2.04	1.94	1.99	2.04	1.94	1.99	2.04	mA
I_{FSS}	Full scale symmetry	$I_{FS4}-I_{FS2}$		±2.0	±16		±1.0	±8.0		±1.0	±8.0	μA
I_{ZS}	Zero scale current			0.2	4.0		0.2	2.0		0.2	2.0	μA
I_{FSR}	Output current	V-=-5.0V V-=-7.0V to -18V	0 0	2.0 2.0	2.1 4.2	0 0	2.0 2.0	2.1 4.2	0 0	2.0 2.0	2.1 4.2	mA
V_{IL} V_{IH}	Logic input levels Low High	V_{LC}=0V	 2.0		0.8	 2.0		0.8	 2.0		0.8	V
I_{IL} I_{IH}	Logic input current Low High	V_{LC}=0V V_{IN}=-10V to +0.8V V_{IN}=2.0V to 18V		-2.0 0.002	-10 10		-2.0 0.002	-10 10		-2.0 0.002	-10 10	μA
V_{IS}	Logic input swing	V-=-15V	-10		+18	-10		+18	-10		+18	V
V_{THR}	Logic threshold range	V_S=±15V	-10		+13.5	-10		+13.5	-10		+13.5	V
I_{15}	Reference bias current			-1.0	-3.0		-1.0	-3.0		-1.0	-3.0	μA
dI/dt	Reference input slew rate	Figures 1, 3	4.0	8.0		4.0	8.0		4.0	8.0		mA/μs
	Power supply sensitivity	I_{REF}=1mA										%FS/%VS
$PSSI_{FS+}$	Positive	V+=4.5 to 5.5V, V-=-15V; V+=13.5 to 16.5V, V-=-15V		0.0003	0.01		0.0003	0.01		0.0003	0.01	
$PSSI_{FS-}$	Negative	V-=-4.5 to -5.5V, V+=+15V; V-=-13.5 to -16.5, V+=+15V		0.002	0.01		0.002	0.01		0.002	0.01	
	Power supply current											mA
I+	Positive	V_S=±5V, IREF=1.0mA		2.3	3.8		2.3	3.8		2.3	3.8	
I-	Negative			-4.3	-5.8		-4.3	-5.8		-4.3	-5.8	
I+	Positive	V_S=+5V, -15V, I_{REF}=2.0mA		2.4	3.8		2.4	3.8		2.4	3.8	
I-	Negative			-6.4	-7.8		-6.4	-7.8		-6.4	-7.8	
I+	Positive	V_S=±15V, I_{REF}=2.0mA		2.5	3.8		2.5	3.8		2.5	3.8	
I-	Negative			-6.5	-7.8		-6.5	-7.8		-6.5	-7.8	
P_D	Power dissipation	±5V, I_{REF}=1.0mA		33	48		33	48		33	48	mW
		+5V, -15V, I_{REF}=2.0mA		108	136		108	136		108	136	
		±15V, I_{REF}=2.0mA		135	174		135	174		135	174	

NOTE *NE5007 must have a minimum reference current of .8μA.

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT CURRENT vs OUTPUT VOLTAGE (OUTPUT VOLTAGE COMPLIANCE)

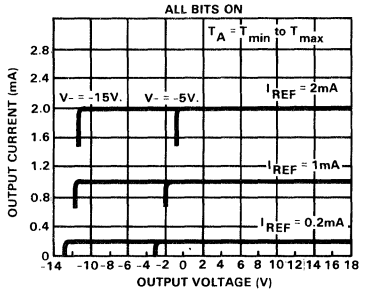

FAST PULSED REFERENCE OPERATION

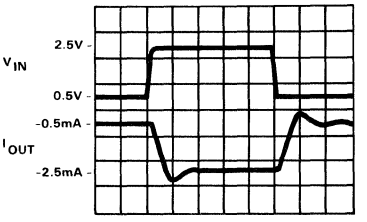

200ns/division
R_{EQ} = 200Ω, R_L = 100Ω, CC = O

TRUE AND COMPLEMENTARY OUTPUT OPERATION

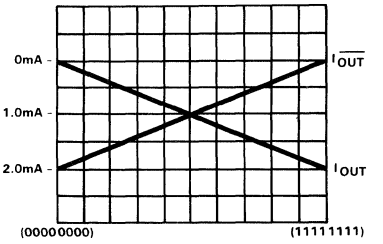

FULL SCALE SETTLING TIME

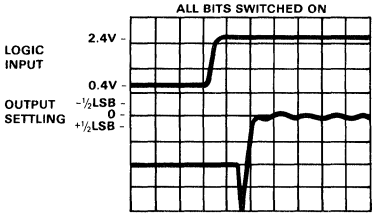

50ns/division

IFS = 2mA, R_L = 1kΩ ½ LSB = 4μA

LSB SWITCHING

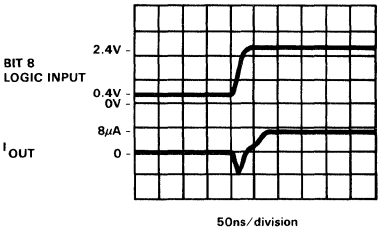

50ns/division

FULL SCALE CURRENT vs REFERENCE CURRENT

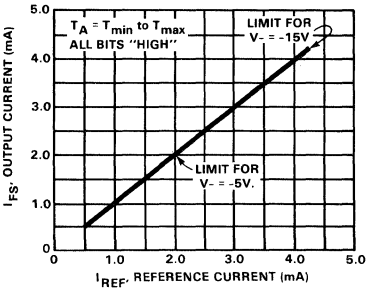

LSB PROPAGATION DELAY vs IFS

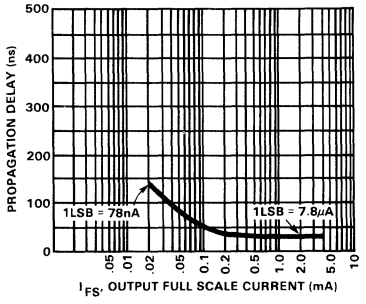

REFERENCE INPUT FREQUENCY RESPONSE

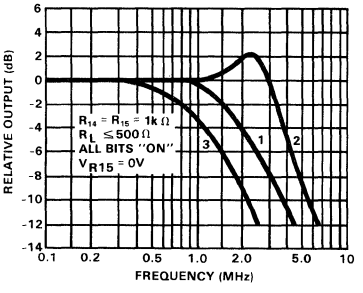

Curve 1: CC = 15pF, V_{IN} = 2.0V p-p centered at +1.0V.
Curve 2: CC = 15pF, V_{IN} = 50mV p-p centered at +200mV.
Curve 3: CC = 0pF, V_{IN} = 100mV p-p centered at 0V and applied thru 50Ω connected to pin 14. +2.0V applied to R_{14}.

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

REFERENCE AMP COMMON MODE RANGE

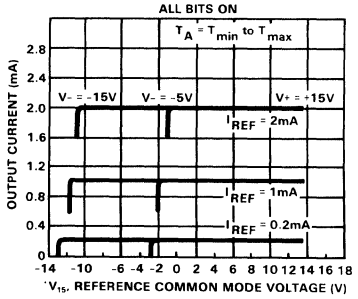

Positive common mode range is always (V+) - 1.5V

LOGIC INPUT CURRENT vs INPUT VOLTAGE

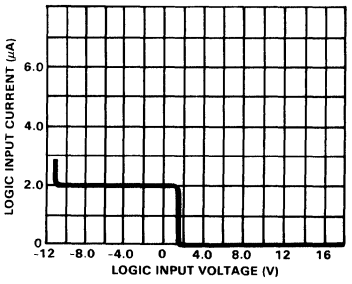

$V_{TH} - V_{LC}$ vs TEMPERATURE

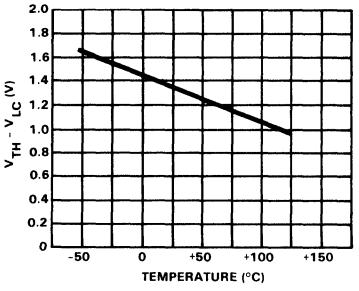

OUTPUT VOLTAGE COMPLIANCE vs TEMPERATURE

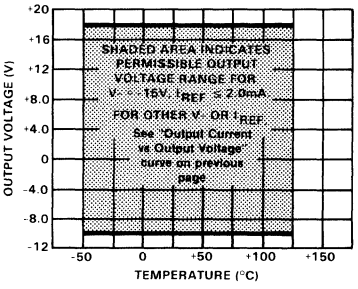

BIT TRANSFER CHARACTERISTICS

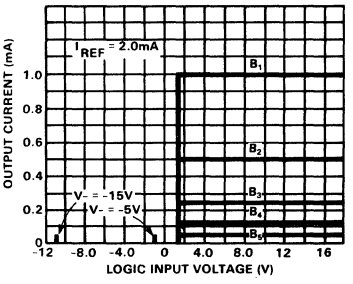

NOTE

B_1 through B_8 have identical transfer characteristics. Bits are fully switched, with less than ½ LSB error, at less than ±100mV from actual threshold. These switching points are guaranteed to lie between 0.8 and 2.0 volts over the operating temperature range (VLC = 0.0V).

POWER SUPPLY CURRENT vs V+

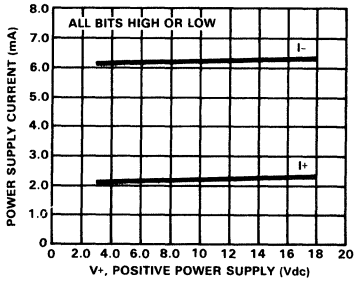

POWER SUPPLY CURRENT vs V-

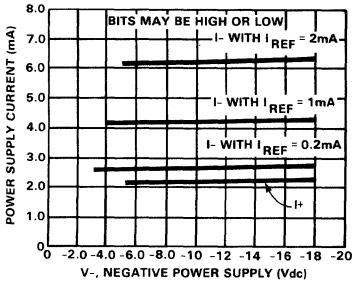

POWER SUPPLY CURRENT vs TEMPERATURE

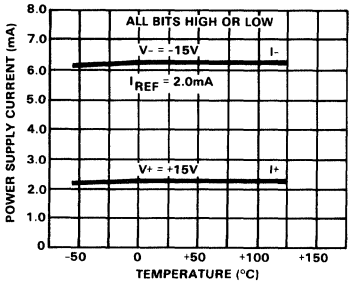

TYPICAL APPLICATION

PULSED REFERENCE OPERATION

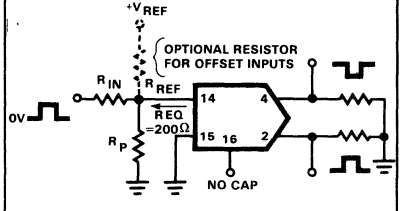

TYPICAL VALUES

R_{IN} = 5K
$+V_{IN}$ = 10V

10

NE5009-F,N • SE5009-F

DESCRIPTION

The 5009 monolithic 8-bit digital-to-analog converter is an electrical selection of the 5007/8 series of 8-bit D/A converters. Relative accuracy is specified to ±1/4 LSB maximum over the operating temperature range. Differential nonlinearity and settling times are also specified to maximum limits.

The device is specifically designed for precision applications in process control and military systems. The SE5009 is specified as equal or superior to the PMI DAC-08A in all respects. Additional relevant testing and application material is shown in the data sheet and application notes for the NE5007/8.

CROSS REFERENCE

The 5009 series are pin and functionally compatible with the DAC-08 series of devices.

PMI	SIGNETICS
DAC-08A	SE-5009
DAC-08	SE-5008
DAC-08H	NE-5009
DAC-08E	NE-5008
DAC-08C	NE-5007

FEATURES

- **Fast settling output current—60ns typical, 135ns maximum**
- **Relative accuracy— ±0.1% maximum**
- **Differential nonlinearity—±0.19% maximum**
- **Low full-scale current drift, ±10 ppm/°C typical**
- **SE5009 military qualifications pending**

APPLICATIONS

- **Fast 8-bit A/D converter**
- **Variable gain amplifiers**
- **Waveform generators**
- **3 digit BCD D/A converter (0.1%)**
- **Programmable power supplies**

PIN CONFIGURATION

F,N PACKAGE*



ORDER PART NO.
NE5009F,N
SE5009F

EQUIVALENT SCHEMATIC

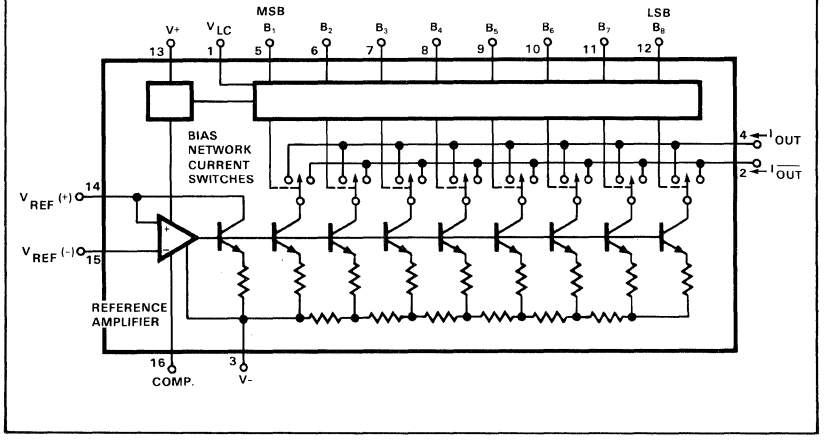

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C unless otherwise specified.

PARAMETER	RATING	UNIT
Total supply voltage (V+ - V-)	36	V
Logic input voltage	V- + 36	V
V_{LC} Voltage at pin 1	V- to V+	V
Reference input voltage	V- to V+	V
Reference input differential voltage	±18	V
Reference input current	5.0	mA
Operating temperature range		
SE5009	-55 to +125	°C
NE5009	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead soldering temperature (10sec)	300	°C
Power dissipation*	500	mW

NOTE

*Derate F package at 10mW/°C above 100°C.

DC ELECTRICAL CHARACTERISTICS

Pin 3 must be 3V more negative than the potential to which R_{15} is returned.
These specs apply for $V_S = \pm 15V$, $I_{REF} = 2mA$,
T_A for NE5009 0° to 70°C, T_A for SE5009 -55° to +125°C.
Output characteristic for both I_{OUT} and $\overline{I_{OUT}}$.

PARAMETER		TEST CONDITIONS	NE5009			SE5009			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	bits
	Monotonicity		8	8	8	8	8	8	bits
	Relative accuracy	Over temperature range			±0.1			±0.1	% FS
	Differential nonlinearity			±0.1	±0.19		±0.1	±0.19	% FS
TCI_{FS}	Full scale tempco			±10	±50		±10	±50	ppm/°C
V_{OC}	Output voltage compliance	Full scale current change < 1/2 LSB	-10		+18	-10		+18	V
I_{FS4}	Full scale current	$V_{REF} = 10.000V$, R_{14}·$R_{15} = 5.00CK$ $T_A = 25°C$	1.984	1.992	2.000	1.984	1.992	2.000	mA
I_{FSS}	Full scale symmetry	$I_{FS4} - I_{FS2}$		±0.5	±4.0		±0.5	±4.0	μA
I_{ZS}	Zero scale current			0.1	1.0		0.1	1.0	μA
I_{FSR}	Output current range	V- = -5.0V	0	2.0	2.1	0	2.0	2.1	mA
		V- = -7.0V to -18V	0	2.0	4.2	0	2.0	4.2	mA
	Logic input levels								
V_{IL}	Logic "0"	$V_{LC} = 0V$			0.8			0.8	V
V_{IH}	Logic "1"	$V_{LC} = 0V$	2.0			2.0			V
	Logic input current	$V_{LC} = 0V$							
I_{IL}	Logic "0"	V_{IN} = -10V to +0.8V		-2.0	-10		-2.0	-10	μA
I_{IH}	Logic "1"	V_{IN} = 2.0V to 18V		0.002	10		0.002	10	μA
V_{IS}	Logic input swing	V- = -15V	-10		+18	-10		+18	V
V_{THR}	Logic threshold range	$V_S = \pm 15V$	-10		+13.5	-10		+13.5	V
I_{15}	Reference bias current			-1.0	-3.0		-1.0	-3.0	μA
	Power supply sensitivity								
PSSIFS+		I_{REF} = 1mA, V- = -15V:							
		V+ = 4.5 to 5.5V		0.0003	0.01		0.0003	0.01	%FS/%VS
		V+ = 13.5 to 16.5V		0.0003	0.01		0.0003	0.01	%FS/%VS
PSSIFS-		I_{REF} = 1mA, V+ = +15V:							
		V- = -4.5 to -5.5V		0.0003	0.01		0.0003	0.01	%FS/%VS
		V- = -13.5 to -16.5V		0.0003	0.01		0.0003	0.01	%FS/%VS
	Power supply current	$V_S = \pm 15V$, I_{REF} = 1.0mA							
I+				2.3	3.8		2.3	3.8	mA
I-				-4.3	-5.8		-4.3	-5.8	mA
	Power supply current	V_S = +5V, -15V; I_{REF} = 2.0mA							
I+				2.4	3.8		2.4	3.8	mA
I-				-6.4	-7.8		-6.4	-7.8	mA
	Power supply current	$V_S = \pm 15V$, I_{REF} = 2.0mA							
I+				2.5	3.8		2.5	3.8	mA
I-				-6.5	-7.8		-6.5	-7.8	mA
P_D	Power dissipation	±5V, I_{REF} = 1.0mA		33	48		33	48	mW
		+5V, -15V, I_{REF} = 2.0mA		108	136		108	136	mW
		±15V, I_{REF} = 2.0mA		135	174		135	174	mW

AC ELECTRICAL CHARACTERISTICS

These specs apply for $V_S = \pm 15V$, $I_{REF} = 2mA$, Output characteristic for both I_{OUT} and $\overline{I_{OUT}}$.

PARAMETER		TEST CONDITIONS	SE/NE5009			UNIT
			Min	Typ	Max	
t_s	Settling time	To $\pm 1/2$ LSB all bits switched ON or OFF, $T_A = 25°C$		60	135	ns
	Major carry transition	To 90% complete, $T_A = 25°C$		20		ns
t_{PLH}, t_{PHL}	Propagation delay	$T_A = 25°C$				
	Each bit			35	60	ns
	All bits switched			35	60	ns
di/dt	Reference input slew rate		4.0	8.0		mA=μS

TEST CIRCUIT

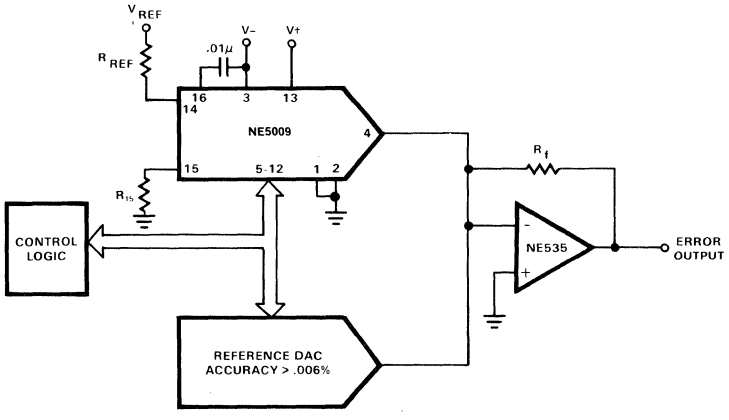

TYPICAL PERFORMANCE CHARACTERISTICS

OUTPUT CURRENT vs OUTPUT VOLTAGE (OUTPUT VOLTAGE COMPLIANCE)

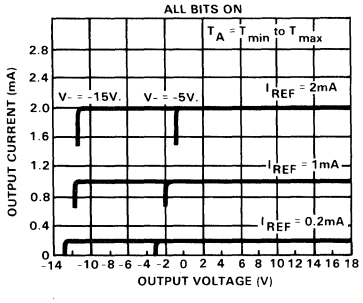

FAST PULSED REFERENCE OPERATION

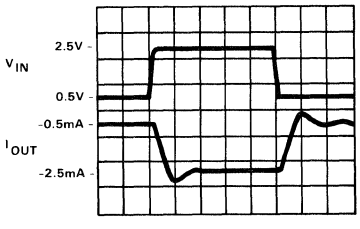

200ns/division

$R_{EQ} = 200\Omega$, $R_L = 100\Omega$, CC = O

TRUE AND COMPLEMENTARY OUTPUT OPERATION

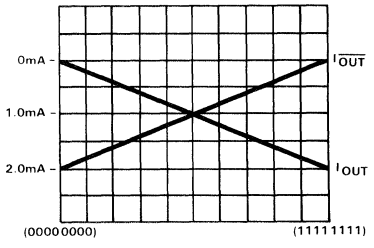

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

FULL SCALE SETTLING TIME

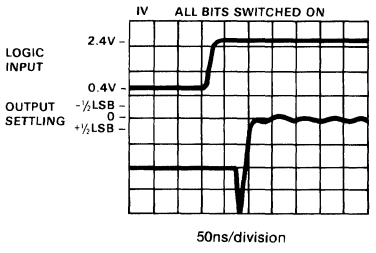

See Figure 13 for settling time fixture

LSB SWITCHING

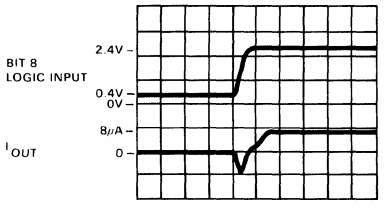

FULL SCALE CURRENT vs REFERENCE CURRENT

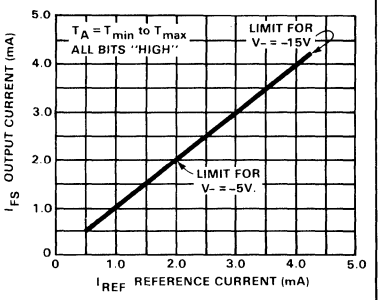

LSB PROPAGATION DELAY vs IFS

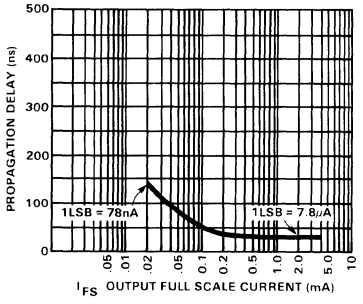

REFERENCE INPUT FREQUENCY RESPONSE

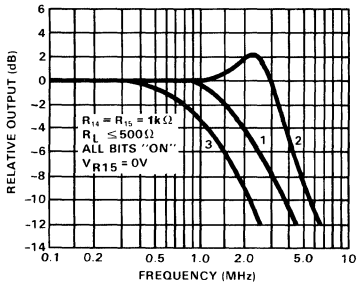

Curve 1:CC = 15pF, V_{IN} = 2.0V p-p centered at +1.0V.
Curve 2:CC = 15pF, V_{IN} = 50mV p-p centered at +200mV.
Curve 3:CC = 0pF, V_{IN} = 100mV p-p centered at 0V and applied thru 50Ω connected to pin 14. +2.0V applied to R_{14}.

REFERENCE AMP COMMON MODE RANGE

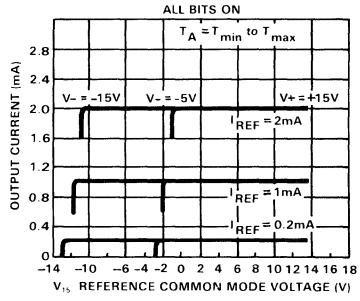

Positive common mode range is always (V+) - 1.5V

LOGIC INPUT CURRENT vs INPUT VOLTAGE

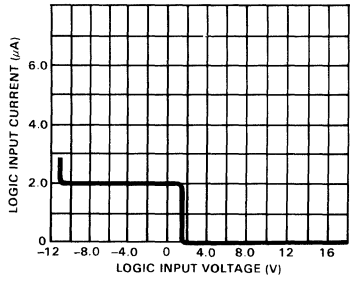

V_{TH}-V_{LC} vs TEMPERATURE

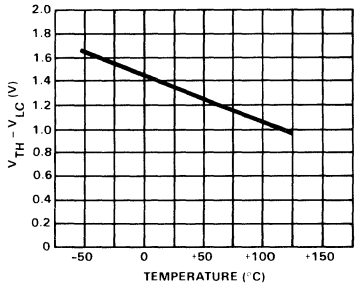

SETTLING TIME AND PROPAGATION DELAY

D_1, D_2 = IN6263 or equivalent
D_3 = IN914 or equivalent
C_1 = 0.01μf
C_2, C_3 = 0.1μf
Q_1 = 2N3904 or equivalent
C_4, C_5 = 15pf and includes all probe and fixturing capacitance

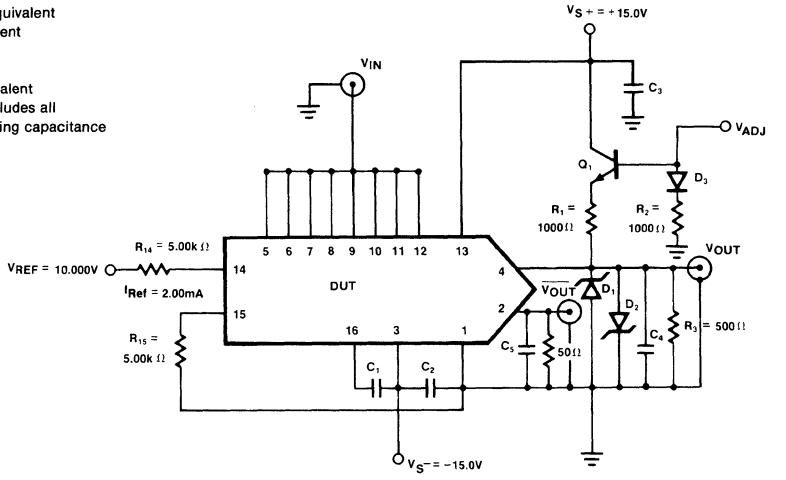

BASIC 5008/5009 CONFIGURATION

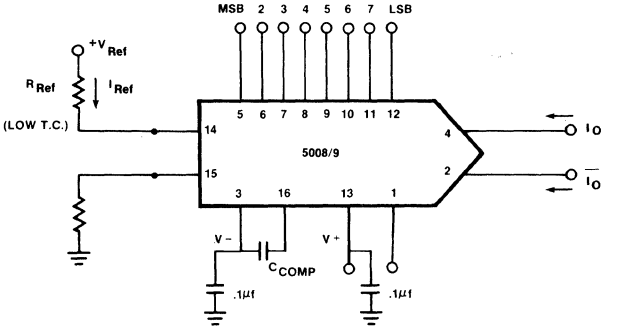

$$I_{FS} \approx \frac{+V_{Ref}}{R_{Ref}} \times \frac{255}{256}\ ;\ I_O + \overline{I_O} = I_{FS} \text{ for all logic states}$$

RECOMMENDED FULL SCALE AND ZERO SCALE ADJ.

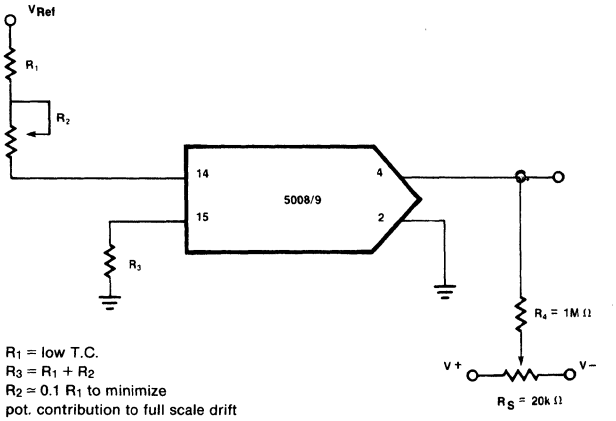

R_1 = low T.C.
$R_3 = R_1 + R_2$
$R_2 \approx 0.1\ R_1$ to minimize pot. contribution to full scale drift

UNIPOLAR VOLTAGE OUTPUT FOR LOW IMPEDANCE OUTPUT

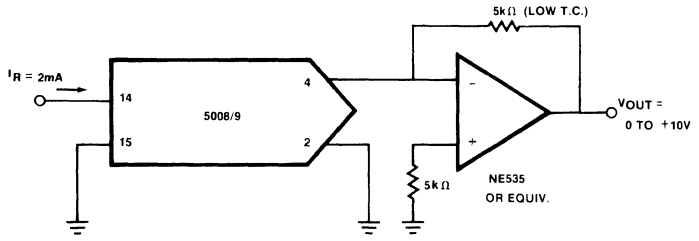

UNIPOLAR VOLT OUTPUT FOR HIGH IMPEDANCE OUTPUT

a) Positive Output

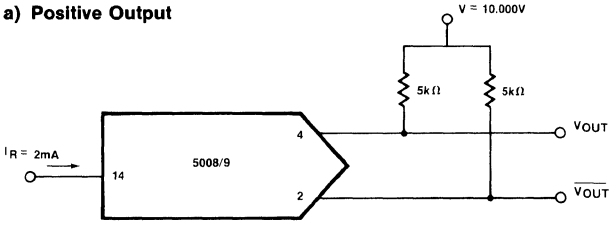

b) Negative Output

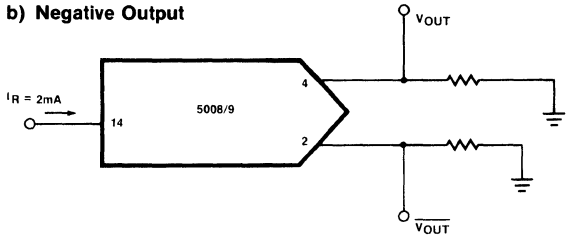

BASIC BIPOLAR OUTPUT OPERATION (OFFSET BINARY)

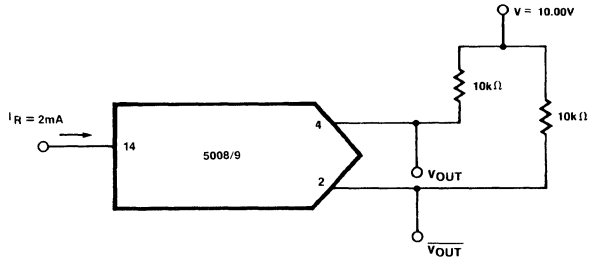

CODE CHART

	B_1	B_2	B_3	B_4	B_5	B_6	B_7	B_8	V_{OUT}	$\overline{V_{OUT}}$
POS full scale	1	1	1	1	1	1	1	1	-9.920V	+10.000
POS f.s. - 1LSB	1	1	1	1	1	1	1	0	-9.840V	+9.920
+ Zero scale + 1LSB	1	0	0	0	0	0	0	1	-0.080V	+0.160
Zero scale	1	0	0	0	0	0	0	0	0.000	+0.080
Zero scale - 1LSB	0	1	1	1	1	1	1	1	0.080	0.000
Neg full scale - 1LSB	0	0	0	0	0	0	0	1	+9.920	-9.840
Neg full scale	0	0	0	0	0	0	0	0	+10.000	-9.920

SYMMETRICAL OFFSET BINARY (BIPOLAR)

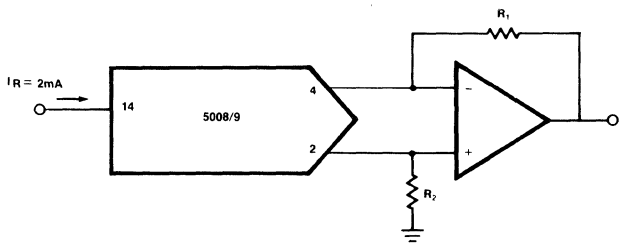

V_{OUT} = 0 to ±V*

±V *Range:
±5V for $R_1 = R_2 = 2.5K$
±10V for $R_1 = R_2 = 5.0K$

3 DIGIT BCD CONVERTER

A 3 digit BCD converter, using inexpensive 8-bit binary DACs, can achieve ±0.1% accuracy. The circuit shown in Figure 20 utilizes three DACs, one for each decade, to provide 0 to 999 output steps. DAC 1 contains the first four significant digits controlling the hundreds digit; DAC 2 controls the tens digit and DAC 3 steps 0 to 9. The feedback resistor (R_7) sets the zero scale at 0.00V.

The input coding is the popular 8-4-2-1 coding; i.e. the weighting ratios are 8, 4, 2 and 1. The full scale (999) BCD code is input code 100110011001.

Full scale adjustment procedure.

In the sequence below, switch on the following code combinations and adjust the indicated potentiometer for the proper output.

3 DIGIT BCD CONVERTER WITH ±0.1% ACCURACY

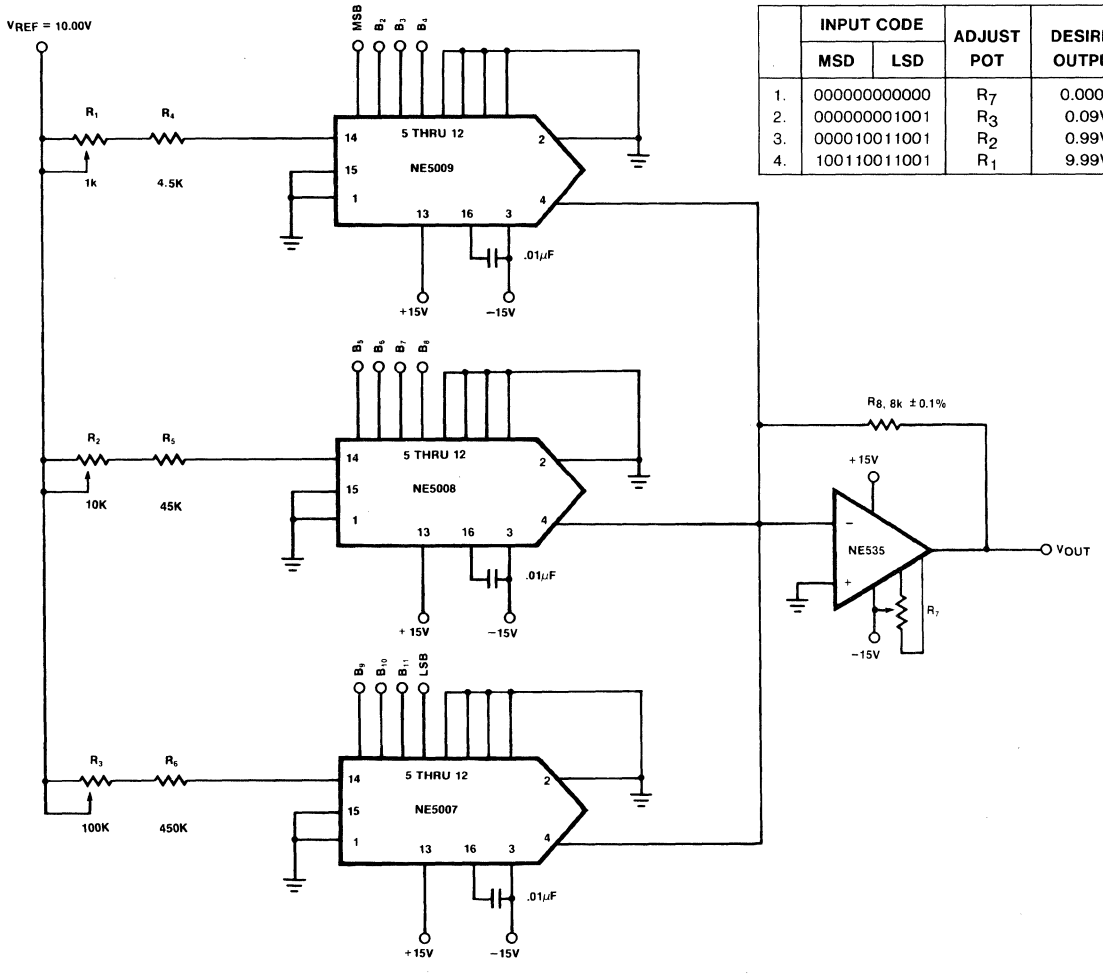

	INPUT CODE		ADJUST POT	DESIRED OUTPUT
	MSD	LSD		
1.	000000000000		R_7	0.000V
2.	000000001001		R_3	0.09V
3.	000010011001		R_2	0.99V
4.	100110011001		R_1	9.99V

DESCRIPTION

The NE5018 is a complete 8-bit digital to analog converter subsystem on one monolithic chip. The data inputs have input latches, controlled by a latch enable pin. The data and latch enable inputs are ultra-low loading for easy interfacing with all logic systems. The latches appear transparent when the $\overline{LE}$ input is in the low state. When $\overline{LE}$ goes high, the input data present at the moment of transition is latched and retained until $\overline{LE}$ again goes low. This feature allows easy compatibility with most micro-processors.

The chip also comprises a stable voltage reference (5V nominal) and a high slew rate buffer amplifier. The voltage reference may be externally trimmed with a potentiometer for easy adjustment of full scale, while maintaining a low temperature co-efficient.

The output of the buffer amplifier may be offset so as to provide bipolar as well as unipolar operation.

FEATURES

- **8-bit resolution**
- **Input latches**
- **Low-loading data inputs**
- **On-chip voltage reference**
- **Output buffer amplifier**
- **Accurate to ± 1/2 LSB (.19%)**
- **Monotonic to 8 bits**
- **Amplifier and reference both short-circuit protected**
- **Compatible with 2650,8080 and many other μP's**

APPLICATIONS

- **Precision 8-bit D/A converters**
- **A/D converters**
- **Programmable power supplies**
- **Test equipment**
- **Measuring instruments**
- **Analog-digital multiplication**

PIN CONFIGURATION

F,N PACKAGE

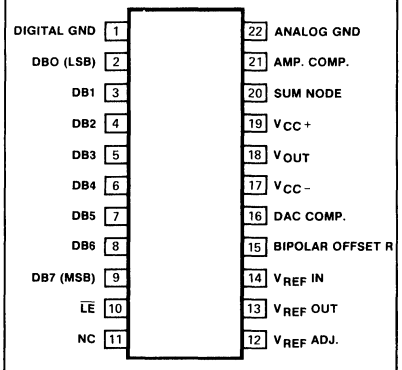

SE5018 available in F package only.

BLOCK DIAGRAM

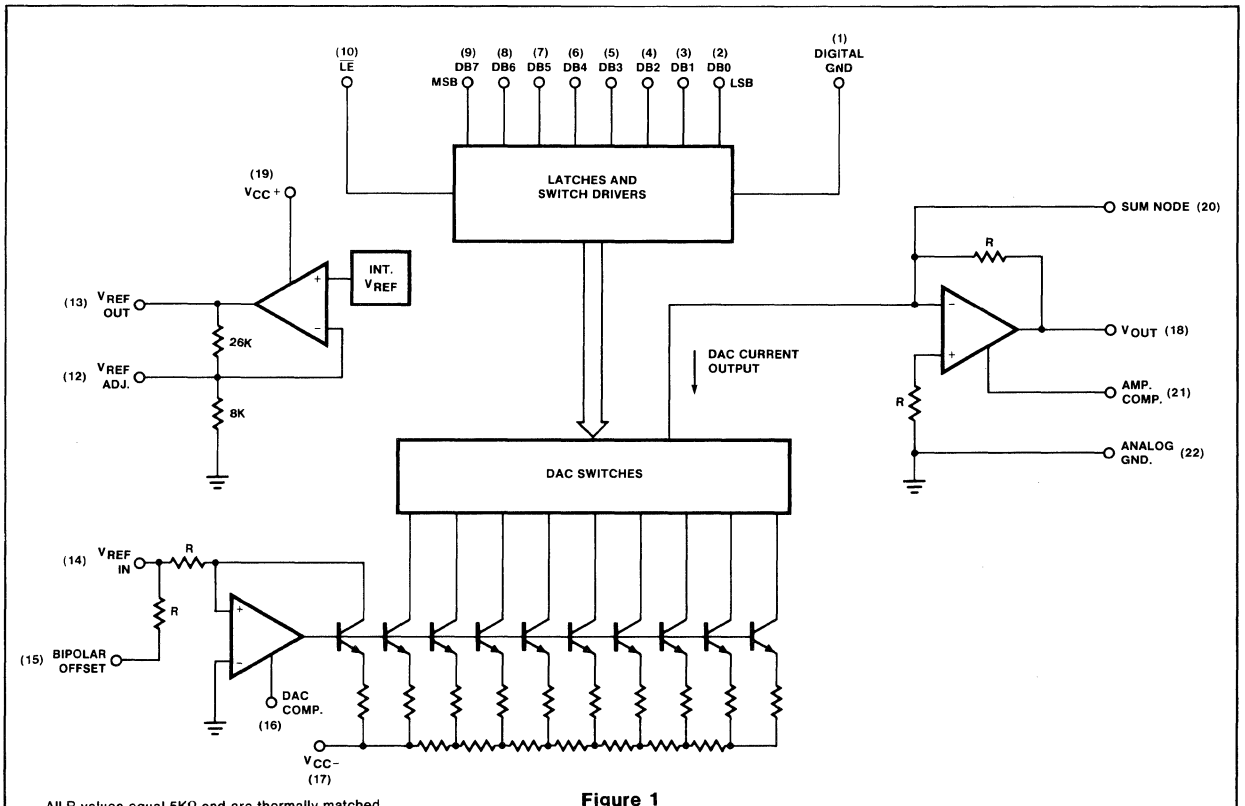

All R values equal 5KΩ and are thermally matched.

Figure 1

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
$V_{CC}+$	Positive supply voltage	18	V
$V_{CC}-$	Negative supply voltage	−18	V
V_{IN}	Logic input voltage	0 to 18	V
$V_{REF}IN$	Voltage at V_{REF} input	12	V
$V_{REF}ADJ$	Voltage at V_{REF} adjust	0 to V_{REF}	V
V_{SUM}	Voltage at sum node	12	V
I_{REFSC}	Short-circuit current to ground at V_{REF} OUT	Continuous	
I_{OUTSC}	Short-circuit current to ground or either supply at V_{OUT}	Continuous	
P_D	Power dissipation*		
	-N package	800	mW
	-F package	1000	mW
T_A	Operating temperature range		
	SE5018	−55 to +125	°C
	NE5018	0 to +70	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

*NOTES
For N package, derate at 120°C/W above 35°C
For F package, derate at 75°C/W above 75°C

DC ELECTRICAL CHARACTERISTICS

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5018. $-55°C \leq T_A \leq 125°C$, NE5018. $0°C \leq T_A \leq 70°C$ unless otherwise specified!
Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE5018			NE5018			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	Bits
	Monotonicity		8	8	8	8	8	8	Bits
	Relative accuracy				±0.19			±0.19	%FS
$V_{CC}+$	Positive supply voltage		11.4	15		11.4	15		V
$V_{CC}-$	Negative supply voltage		−11.4	−15		−11.4	−15		V
$V_{IN(1)}$	Logic "1" input voltage	Pin 1 = 0V	2.0			2.0			V
$V_{IN(0)}$	Logic "0" input voltage	Pin 1 = 0V			0.8			0.8	V
$I_{IN(1)}$	Logic "1" input current	Pin 1 = 0V, $2V < V_{IN} < 18V$		0.1	10		0.1	10	μA
$I_{IN(0)}$	Logic "0" input current	Pin 1 = 0V, $-5V < V_{IN} < 0.8V$		−2.0	−10		−2.0	−10	μA
V_{FS}	Full scale output voltage	Unipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C	9.50	9.961	10.50	9.50	9.961	10.50	V
V_{FS}	Full scale output voltage	Bipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C		+4.961			+4.961		V
V_{ZS}	Zero scale voltage			−5.000			−5.000		
				5			5		mV
I_{OS}	Output short circuit current	T_A = 25°C, V_{OUT} = 0V		15	40		15	40	mA
$PSR+_{(out)}$	Output power supply rejection (+)	V− = −15V, 13.5V≤V+≤16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
$PSR-_{(out)}$	Output power supply rejection (−)	V+ = 15V, −13.5V≤V−≤−16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
TC_{FS}	Full scale temperature coefficient	$V_{REF\ IN}$ = 5.000V		20			20		ppm/°C
TC_{ZS}	Zero scale temperature coefficient			5			5		ppm/°C

DC ELECTRICAL CHARACTERISTICS (Cont'd)

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5018. $-55°C \leq T_A \leq 125°C$, NE5018. $0°C \leq T_A \leq 70°C$ unless otherwise specified.[1]
Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE/5018			NE5018			UNIT
			Min	Typ	Max	Min	Typ	Max	
I_{REF}	Reference output current	Note 8			3			3	mA
I_{REFSC}	Reference short circuit current	$T_A = 25°C$, $V_{REF\ OUT} = 0V$		15	30		15	30	mA
$PSR+_{(REF)}$	Reference power supply rejection (+)	$V- = -15V$, $13.5V \leq V+ \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
$PSR-_{(REF)}$	Reference power supply rejection (−)	$V+ = 15V$, $-13.5V \leq V- \leq 16.5V$,		.003	.01		.003	.01	%VR/ %VS
V_{REF}	Reference voltage	$I_{REF} = 1.0mA$ $T_A = 25°C$	4.5	5.0	5.5	4.5	5.0	5.5	V
TC_{REF}	Reference voltage temperature coefficient	$I_{REF} = 1.0mA$		60			60		ppm/°C
Z_{IN}	DAC V_{REF} IN input impedance	$I_{REF} = 1.0mA$	4.0	5.0	6.0	4.0	5.0	6.0	KΩ
$I_{CC}+$	Positive supply current	$V_{CC}+ = 15V$		7	14		7	14	mA
$I_{CC}-$	Negative supply current	$V_{CC}- = -15V$		−10	−15		−10	−15	mA
P_D	Power dissipation	$I_{REF} = 1.0mA$, $V_{CC} = \pm 15V$		255	435		255	435	mW

NOTE

1. Refer to Figure 2.

AC ELECTRICAL CHARACTERISTICS[2]

$V_{CC} = \pm 15V$, $T_A = 25°C$

PARAMETER		TO	FROM	TEST CONDITIONS	SE/NE5018			UNIT
					Min	Typ	Max	
T_{SLH}	Settling time	± ½ LSB	Input	All bits low to high[3]		1.8		μs
T_{SHL}	Settling time	± ½ LSB	Input	All bits high to low[4]		2.3		μs
t_{plh}	Propagation delay	Output	Input	All bits switched low to high[3]		300		ns
t_{phl}	Propagation delay	Output	Input	All bits switched high to low[4]		150		ns
t_{plsb}	Propagation delay	Output	Input	1 LSB change[3,4]		150		ns
t_{plh}	Propagation delay	Output	$\overline{LE}$	low to high transition[5]		300		ns
t_{phl}	Propagation delay	Output	$\overline{LE}$	high to low transition[6]		150		ns
t_s	Set-up time	$\overline{LE}$	Input	2, 7	100			ns
t_h	Hold time	Input	$\overline{LE}$	2, 7	50			ns
t_{pw}	Latch enable pulse width			2, 7	150			ns

NOTES

2. Refer to Figure 3.
3. See Figure 6.
4. See Figure 7.
5. See Figure 8.
6. See Figure 9.
7. See Figure 10.
8. For reference currents > 3mA, use of an external buffer is required.

DC PARAMETRIC TEST CONFIGURATION

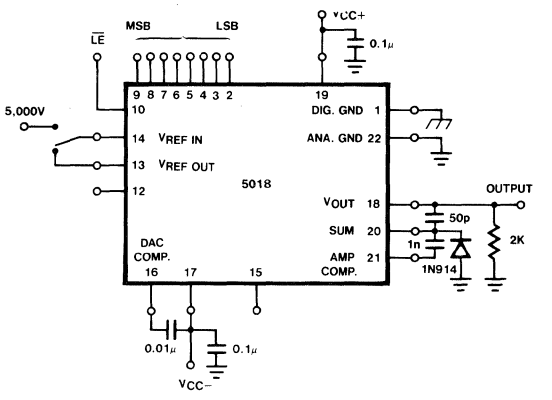

Figure 2

AC PARAMETRIC TEST CONFIGUTATION

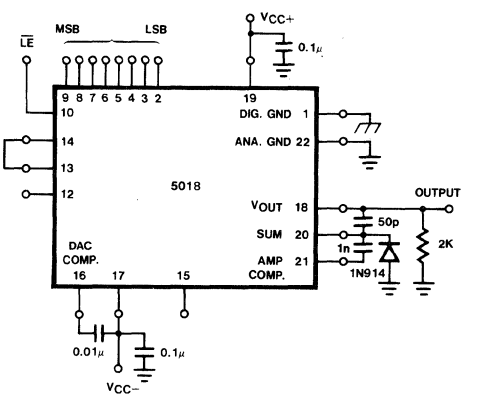

Figure 3

FULL/ZERO SCALE ADJUST—UNIPOLAR OUTPUT (0-10V)

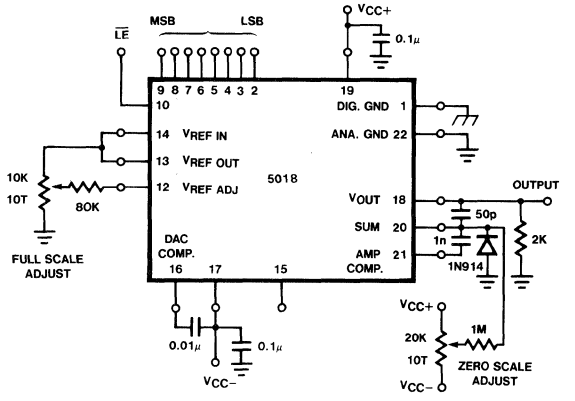

Figure 4

BIPOLAR OUTPUT OPERATION (−5 to +5V)

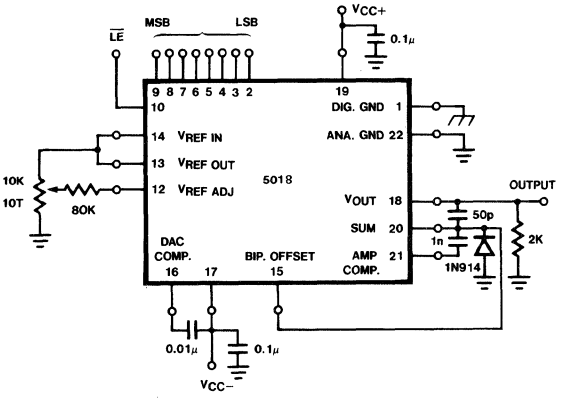

Figure 5

SETTLING TIME AND PROPAGATION DELAY, LOW TO HIGH DATA

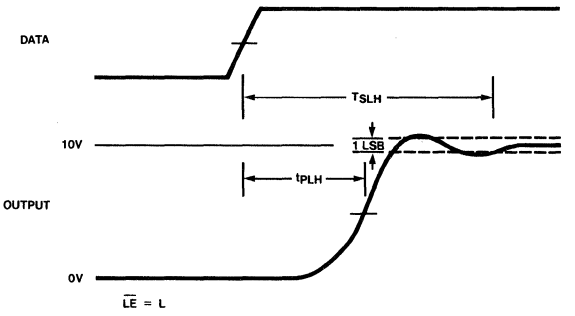

Figure 6

SETTLING TIME AND PROPAGATION DELAY, HIGH TO LOW DATA

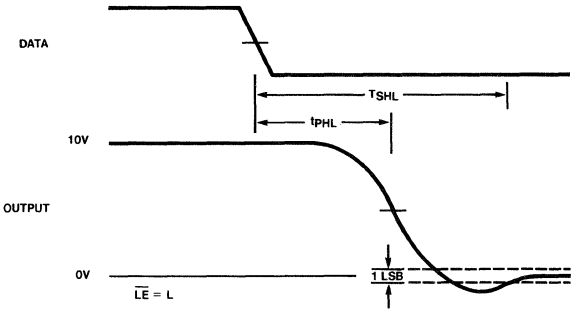

Figure 7

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

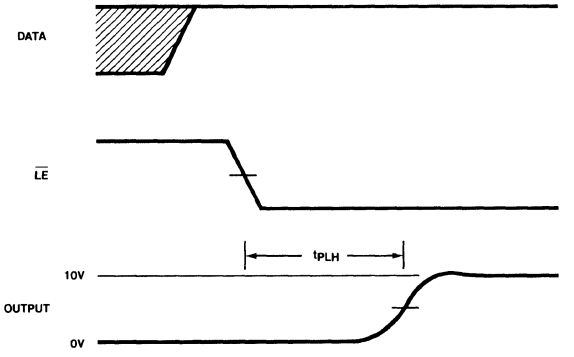

Figure 8

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

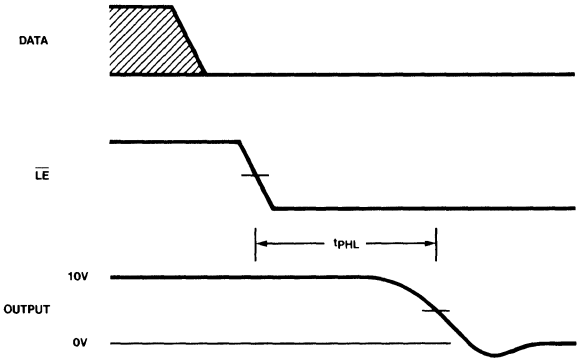

Figure 9

LATCH ENABLE PULSE WIDTH, SET-UP AND HOLD TIMES

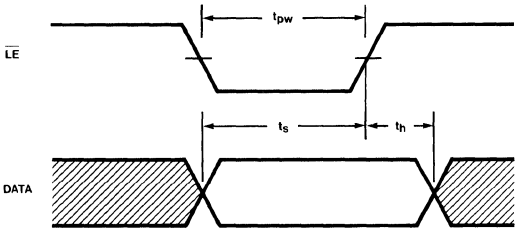

Figure 10

DESCRIPTION

The NE5019 is a complete 8-bit digital to analog converter subsystem on one monolithic chip. The data inputs have input latches, controlled by a latch enable pin. The data and latch enable inputs are ultra-low loading for easy interfacing with all logic systems. The latches appear transparent when the $\overline{LE}$ input is in the low state. When $\overline{LE}$ goes high, the input data present at the moment of transition is latched and retained until $\overline{LE}$ again goes low. This feature allows easy compatibility with most micro-processors.

The chip also comprises a stable voltage reference (5V nominal) and a high slew rate buffer amplifier. The voltage reference may be externally trimmed with a potentiometer for easy adjustment of full scale, while maintaining a low temperature co-efficient.

The output of the buffer amplifier may be offset so as to provide bipolar as well as unipolar operation.

FEATURES

- **8-bit resolution**
- **Input latches**
- **Low-loading data inputs**
- **On-chip voltage reference**
- **Output buffer amplifier**
- **Accurate to ± 1/4 LSB (.1%)**
- **Monotonic to 8 bits**
- **Amplifier and reference both short-circuit protected**
- **Compatible with 2650,8080 and many other μP's**

APPLICATIONS

- **Precision 8-bit D/A converters**
- **A/D converters**
- **Programmable power supplies**
- **Test equipment**
- **Measuring instruments**
- **Analog-digital multiplication**

PIN CONFIGURATION

F,N PACKAGE

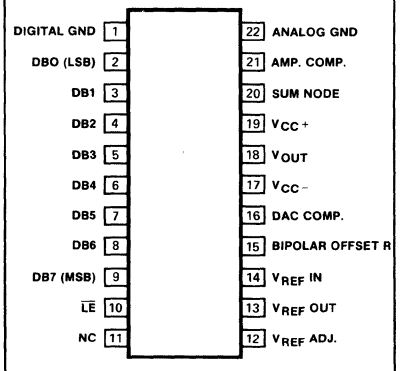

SE5019 available in F package only.

BLOCK DIAGRAM

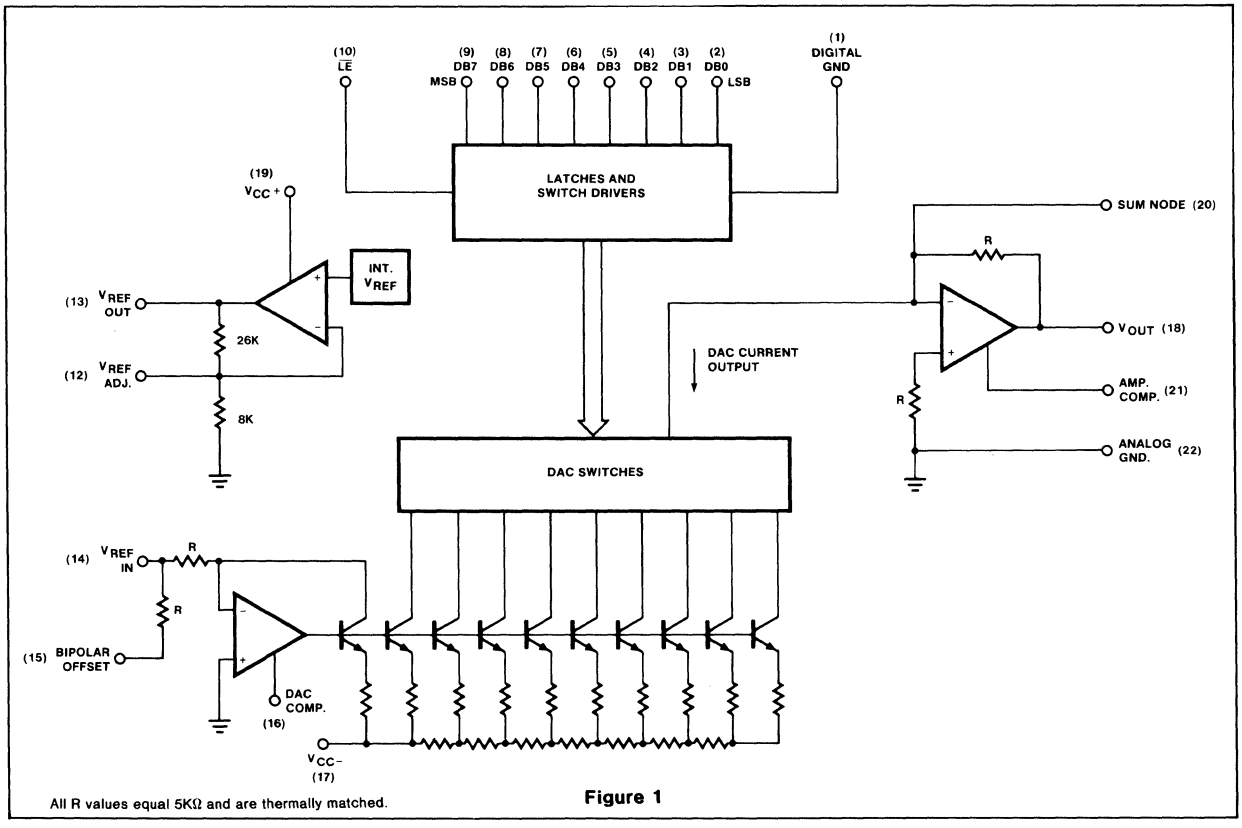

All R values equal 5KΩ and are thermally matched.

Figure 1

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
$V_{CC}+$	Positive supply voltage	18	V
$V_{CC}-$	Negative supply voltage	−18	V
V_{IN}	Logic input voltage	0 to 18	V
$V_{REF}IN$	Voltage at V_{REF} input	12	V
$V_{REF}ADJ$	Voltage at V_{REF} adjust	0 to V_{REF}	V
V_{SUM}	Voltage at sum node	12	V
I_{REFSC}	Short-circuit current to ground at V_{REF} OUT	Continuous	
I_{OUTSC}	Short-circuit current to ground or either supply at V_{OUT}	Continuous	
P_D	Power dissipation*		
	-N package	800	mW
	-F package	1000	mW
T_A	Operating temperature range		
	SE5019	−55 to +125	°C
	NE5019	0 to +70	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

*NOTES
For N package, derate at 120°C/W above 35°C
For F package, derate at 75°C/W above 75°C

DC ELECTRICAL CHARACTERISTICS

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5019. $-55°C \leq T_A \leq 125°C$, NE5019. $0°C \leq T_A \leq 70°C$ unless otherwise specified.[1]
Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE5019			NE5019			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	Bits
	Monotonicity		8	8	8	8	8	8	Bits
	Relative accuracy				±0.1			±0.1	%FS
$V_{CC}+$	Positive supply voltage		11.4	15		11.4	15		V
$V_{CC}-$	Negative supply voltage		−11.4	−15		−11.4	−15		V
$V_{IN(1)}$	Logic "1" input voltage	Pin 1 = 0V	2.0			2.0			V
$V_{IN(0)}$	Logic "0" input voltage	Pin 1 = 0V			0.8			0.8	V
$I_{IN(1)}$	Logic "1" input current	Pin 1 = 0V, $2V < V_{IN} < 18V$		0.1	10		0.1	10	μA
$I_{IN(0)}$	Logic "0" input current	Pin 1 = 0V, $-5V < V_{IN} < 0.8V$		−2.0	−10		−2.0	−10	μA
V_{FS}	Full scale output voltage	Unipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C	9.50	9.961	10.50	9.50	9.961	10.50	V
V_{FS}	Full scale output voltage	Bipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C		+4.961			+4.961		V
				−5.000			−5.000		
V_{ZS}	Zero scale voltage			5			5		mV
I_{OS}	Output short circuit current	T_A = 25°C, V_{OUT} = 0V		15	40		15	40	mA
$PSR+_{(out)}$	Output power supply rejection (+)	V− = −15V, 13.5V≤V+≤16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
$PSR-_{(out)}$	Output power supply rejection (−)	V+ = 15V, −13.5V≤V−≤−16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
TC_{FS}	Full scale temperature coefficient	$V_{REF\ IN}$ = 5.000V		20			20		ppm/°C
TC_{ZS}	Zero scale temperature coefficient			5			5		ppm/°C

NOTE
1. Refer to Figure 2.

DC ELECTRICAL CHARACTERISTICS (Cont'd)

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5019. $-55°C \leq T_A \leq 125°C$, NE5019. $0°C \leq T_A \leq 70°C$ unless otherwise specified.[1]
Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE5019			NE5019			UNIT
			Min	Typ	Max	Min	Typ	Max	
I_{REF}	Reference output current	Note 8			3			3	mA
I_{REFSC}	Reference short circuit current	$T_A = 25°C$, $V_{REF\ OUT} = 0V$		15	30		15	30	mA
$PSR+_{REF}$	Reference power supply rejection (+)	$V- = -15V$, $13.5V \leq V+ \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
$PSR-_{REF}$	Reference power supply rejection (−)	$V+ = 15V$, $-13.5V \leq V- \leq 16.5V$,		.003	.01		.003	.01	%VR/ %VS
V_{REF}	Reference voltage	$I_{REF} = 1.0mA$	4.5	5.0	5.5	4.5	5.0	5.5	V
TC_{REF}	Reference voltage temperature coefficient	$I_{REF} = 1.0mA$, $T_A = 25°C$		60			60		ppm/°C
Z_{IN}	DAC V_{REF}IN input impedance	$I_{REF} = 1.0mA$	4.0	5.0	6.0	4.0	5.0	6.0	KΩ
$I_{CC}+$	Positive supply current	$V_{CC}+ = 15V$		7	14		7	14	mA
$I_{CC}-$	Negative supply current	$V_{CC}- = -15V$		−10	−15		−10	−15	mA
P_D	Power dissipation	$I_{REF} = 1.0mA$, $V_{CC} = \pm 15V$		255	435		255	435	mW

NOTE

1. Refer to Figure 2.

AC ELECTRICAL CHARACTERISTICS[2]

$V_{CC} = \pm 15V$, $T_A = 25°C$

PARAMETER		TO	FROM	TEST CONDITIONS	SE/NE5019			UNIT
					Min	Typ	Max	
T_{SLH}	Settling time	± ½ LSB	Input	All bits low to high[3]		1.8		μs
T_{SHL}	Settling time	± ½ LSB	Input	All bits high to low[4]		2.3		μs
t_{plh}	Propagation delay	Output	Input	All bits switched low to high[3]		300		ns
t_{phl}	Propagation delay	Output	Input	All bits switched high to low[4]		150		ns
t_{plsb}	Propagation delay	Output	Input	1 LSB change[3,4]		150		ns
t_{plh}	Propagation delay	Output	$\overline{LE}$	low to high transition[5]		300		ns
t_{phl}	Propagation delay	Output	$\overline{LE}$	high to low transition[6]		150		ns
t_s	Set-up time	$\overline{LE}$	Input	2, 7	100			ns
t_h	Hold time	Input	$\overline{LE}$	2, 7	50			ns
t_{pw}	Latch enable pulse width			2, 7	150			ns

NOTES

2. Refer to Figure 3.
3. See Figure 6.
4. See Figure 7.
5. See Figure 8.
6. See Figure 9.
7. See Figure 10.
8. For reference currents > 3mA, use of an external buffer is required.

DC PARAMETRIC TEST CONFIGURATION

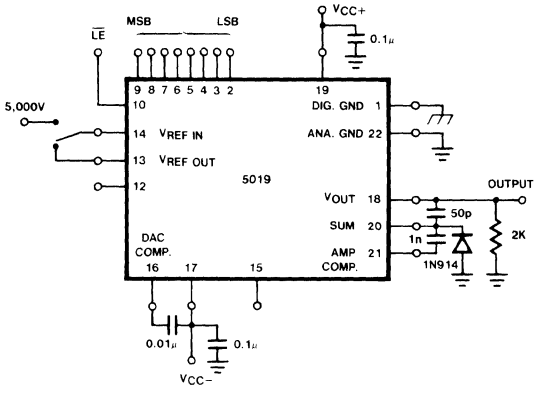

Figure 2

AC PARAMETRIC TEST CONFIGUTATION

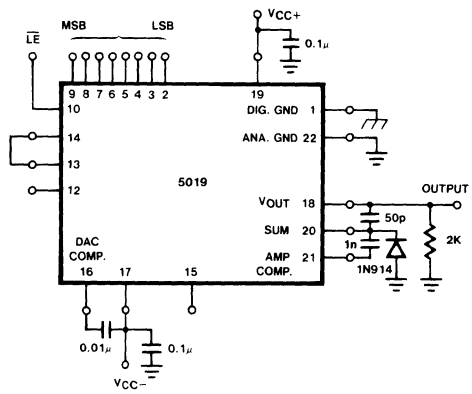

Figure 3

FULL/ZERO SCALE ADJUST—UNIPOLAR OUTPUT (0-10V)

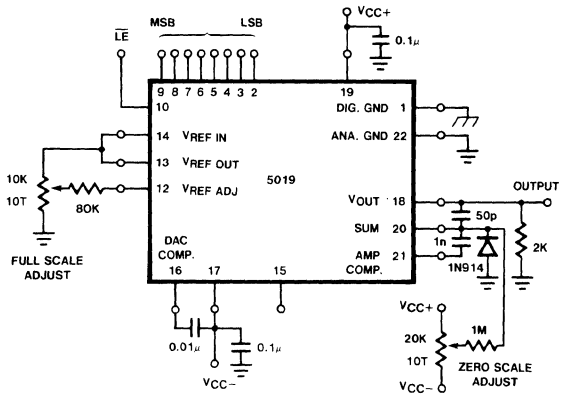

Figure 4

BIPOLAR OUTPUT OPERATION (−5 to +5V)

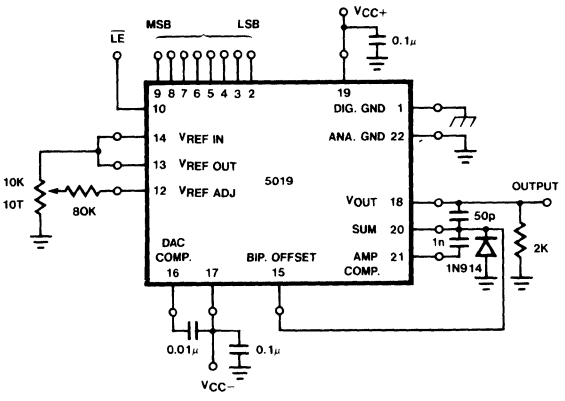

Figure 5

SETTLING TIME AND PROPAGATION DELAY, LOW TO HIGH DATA

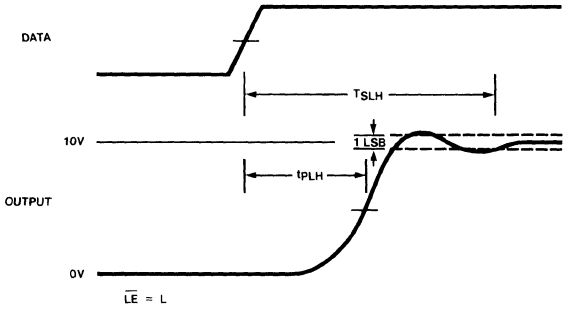

Figure 6

SETTLING TIME AND PROPAGATION DELAY, HIGH TO LOW DATA

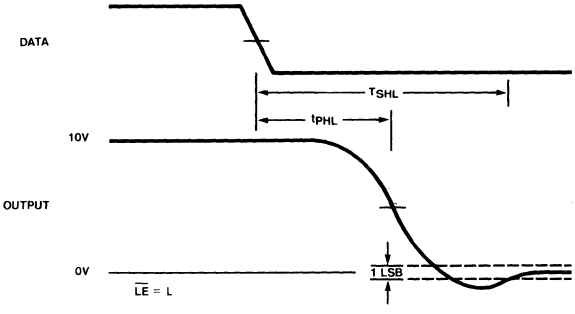

Figure 7

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

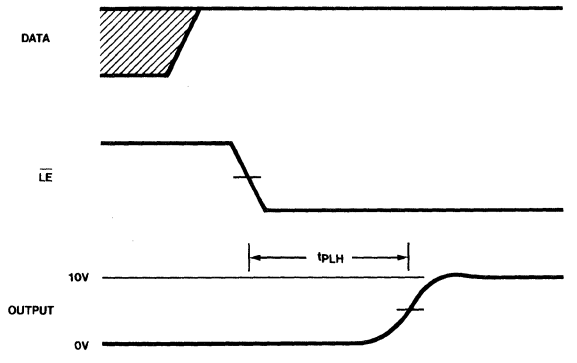

Figure 8

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

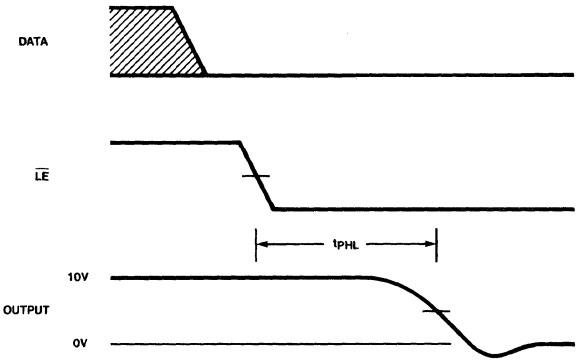

Figure 9

LATCH ENABLE PULSE WIDTH, SET-UP AND HOLD TIMES

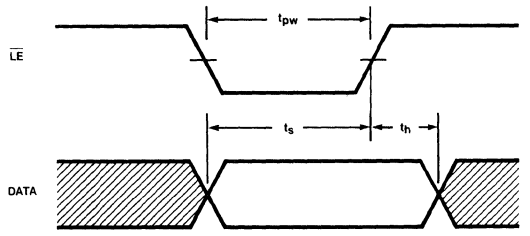

Figure 10

SE5118-F • NE5118-N

DESCRIPTION

The NE5118 is a high-speed 8-bit digital to analog converter subsystem on one monolithic chip. The data inputs have input latches, controlled by a latch enable pin. The data and latch enable inputs are ultra-low loading for easy interfacing with all logic systems. The latches appear transparent when the $\overline{LE}$ input is in the low state. When $\overline{LE}$ goes high, the input data present at the moment of transition is latched and retained until $\overline{LE}$ again goes low. This feature allows easy compatibility with most microprocessors.

The chip also comprises a stable voltage reference (5V nominal). The voltage reference may be externally trimmed with a potentiometer for easy adjustment of full scale, while maintaining a low temperature co-efficient.

The output has high voltage compliance increasing versatility.

FEATURES

- 8-bit resolution
- Input latches
- Low-loading data inputs
- On-chip voltage reference
- Fast settling output current—200ns
- Accurate to ± 1/2 LSB (.19%)
- Monotonic to 8 bits
- Reference short-circuit protected
- Compatible with 2650, 8080 and many other μP's

APPLICATIONS

- Precision 8-bit D/A converters
- A/D converters
- Programmable power supplies
- Test equipment
- Measuring instruments
- Analog-digital multiplication
- CRT display drivers
- High-speed modems

PIN CONFIGURATION

F,N PACKAGE

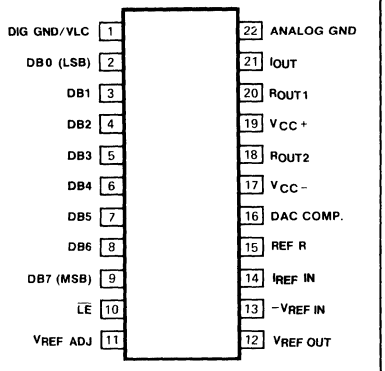

SE5118 available in F package only.

BLOCK DIAGRAM

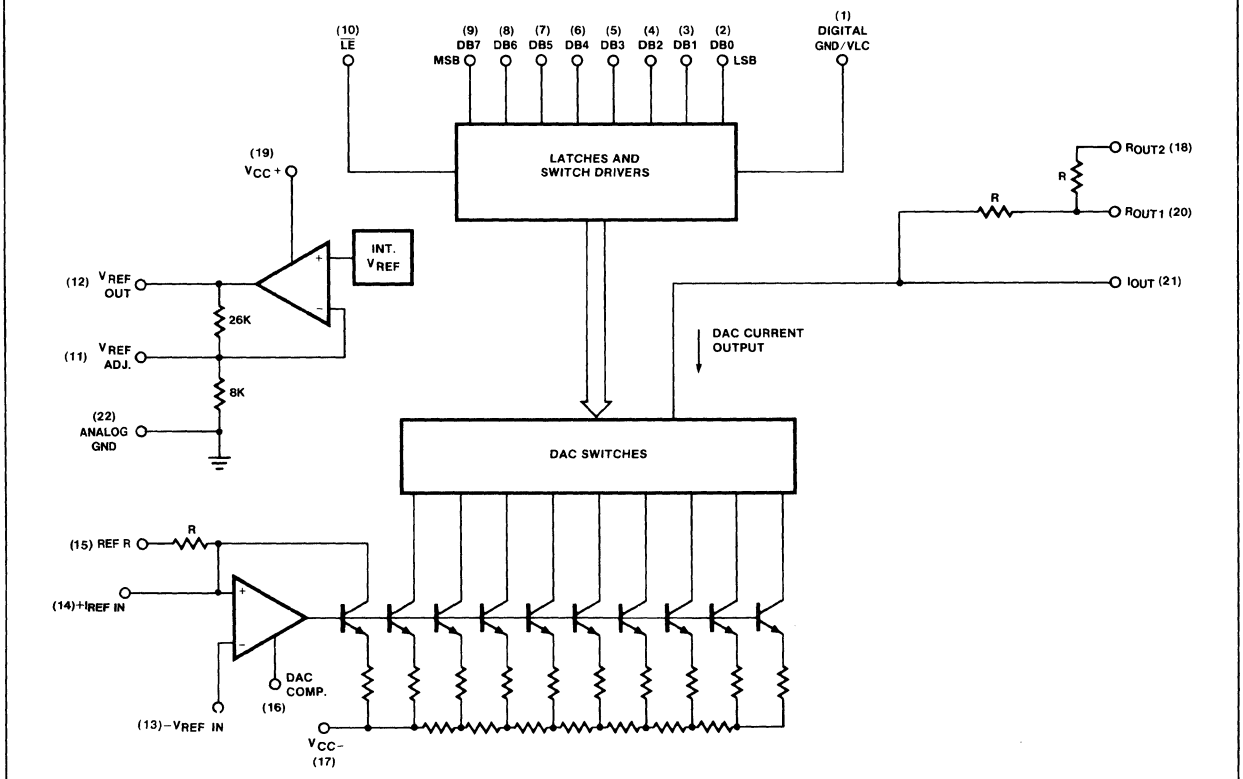

All R values equal 5kΩ and are thermally matched.

Figure 1

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
$V_{CC}+$	Positive supply voltage	18	V
$V_{CC}-$	Negative supply voltage	−18	V
V_{IN}	Logic input voltage	0 to 18	V
$V_{REF}IN$	Voltage at R_{REF} input	12	V
$V_{REF}ADJ$	Voltage at V_{REF} adjust	0 to V_{REF}	V
V_{SUM}	Voltage at sum node	12	V
I_{REFSC}	Short-circuit current to ground at V_{REF} OUT	Continuous	
$I_{REF_{IN}}$	Reference input current (Pin 14)	3	mA
P_D	Power dissipation*		
	-N package	800	mW
	-F package	1000	mW
T_A	Operating temperature range		
	SE5118	−55 to +125	°C
	NE5118	0 to +70	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

*NOTES

For N package, derate at 120°C/W above 35°C
For F package, derate at 75° C/W above 75°C

DC ELECTRICAL CHARACTERISTICS

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5118. $-55°C \leq T_A \leq 125°C$, NE5118. $0°C \leq T_A \leq 70°C$ unless otherwise specified.
Typical values are specified at 25°C

	PARAMETER	TEST CONDITIONS	SE5118			NE5118			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	Bits
	Monotonicity		8	8	8	8	8	8	Bits
	Relative accuracy				±0.19			±0.19	%FS
$V_{CC}+$	Positive supply voltage		11.4	15		11.4	15		V
$V_{CC}-$	Negative supply voltage		−11.4	−15		−11.4	−15		V
$V_{IN(1)}$	Logic "1" input voltage	Pin 1 = 0V	2.0			2.0			V
$V_{IN(0)}$	Logic "0" input voltage	Pin 1 = 0V			0.8			0.8	V
$I_{IN(1)}$	Logic "1" input current	Pin 1 = 0V, $2V < V_{IN} < 18V$		0.1	10		0.1	10	μA
$I_{IN(0)}$	Logic "0" input current	Pin 1 = 0V, $-5V < V_{IN} < 0.8V$		−2.0	−10		−2.0	−10	μA
I_{FS}	Full scale output current	Unipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C	1.90	1.992	2.10	1.90	1.992	2.10	mA
I_{ZS}	Zero scale current			1			1		μA
V_{REF}	Reference voltage	I_{REF} = 1mA T_A = 25°C	4.5	5.0	5.5	4.5	5.0	5.5	V
PSR+(out)	Output power supply rejection (+)	V− = −15V, 13.5V≤V+≤16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
PSR−(out)	Output power supply rejection (−)	V+ = 15V, −13.5V≤V−≤−16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/%VS
TC_{FS}	Full scale temperature coefficient	$V_{REF_{IN}}$ = 5.000V[1]		20			20		ppm/°C
TC_{ZS}	Zero scale temperature coefficient	$I_{REF_{IN}}$ = 1.00mA[2]		5			5		ppm/°C

NOTES

1. This is for voltage out only. See Unipolar Voltage Output schematic.
2. This is for current output mode.

DC ELECTRICAL CHARACTERISTICS

(Cont'd) $V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5118. $-55°C \leq T_A \leq 125°C$, NE5118. $0°C \leq T_A \leq 70°C$ unless otherwise specified. Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE5118			NE5118			UNIT
			Min	Typ	Max	Min	Typ	Max	
I_{REF}	Reference output current	Note 1			3			3	mA
I_{REFSC}	Reference short circuit current	$T_A = 25°C$, $V_{REF\ OUT} = 0V$		15	30		15	30	mA
$PSR+_{(REF)}$	Reference power supply rejection (+)	$V- = -15V$, $13.5V \leq V+ \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
$PSR-_{(REF)}$	Reference power supply rejection (−)	$V+ = 15V$, $-13.5V \leq V- \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
TC_{REF}	Reference voltage temperature coefficient	$I_{REF} = 1.0mA$		60			60		ppm/°C
Z_{IN}	DAC R_{REF}IN input impedance		4.0	5.0	6.0	4.0	5.0	6.0	kΩ
$I_{CC}+$	Positive supply current	$V_{CC}+ = 15V$		7	14		7	14	mA
$I_{CC}-$	Negative supply current	$V_{CC}- = -15V$		−10	−15		−10	−15	mA
P_D	Power dissipation	$I_{REF} = 1.0mA$, $V_{CC} = \pm 15V$		255	435		255	435	mW

AC ELECTRICAL CHARACTERISTICS

$V_{CC} = \pm 15V$, $T_A = 25°C$

PARAMETER		TO	FROM	TEST CONDITIONS	SE/NE5118			UNIT
					Min	Typ	Max	
T_{SLH}	Settling time	± ½ LSB	Input	All bits Low-to-high		200		ns
T_{SHL}	Settling time	± ½ LSB	Input	All bits High-to-low		200		ns
t_{PLH}	Propagation delay	Output	Input	All bits switched Low-to-high		60		ns
t_{PHL}	Propagation delay	Output	Input	All bits switched High-to-low		60		ns
t_{PLSB}	Propagation delay	Output	Input	1 LSB change		60		ns
t_{PLH}	Propagation delay	Output	$\overline{LE}$	Low-to-high transition		60		ns
t_{PHL}	Propagation delay	Output	$\overline{LE}$	High-to-low transition		60		ns
t_s	Set-up time	$\overline{LE}$	Input		100			ns
t_h	Hold time	Input	$\overline{LE}$		50			ns
t_{pw}	Latch enable pulse width				150			ns

NOTES

1. For reference currents > 3mA, use of an external buffer is required.

BIPOLAR OUTPUT OPERATION (−1mA TO +1mA)

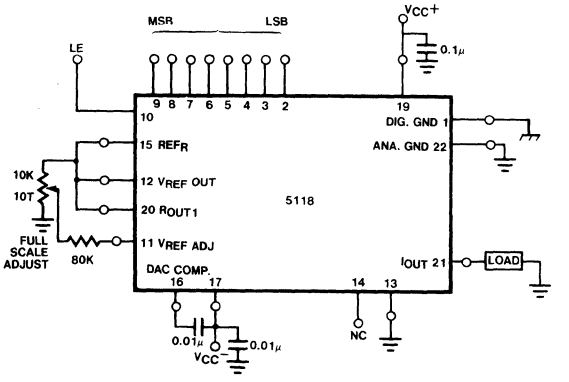

UNIPOLAR VOLTAGE OUTPUT (0 →+10V)

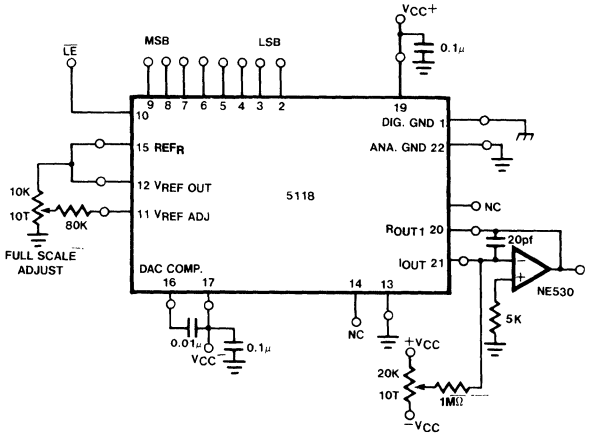

FAST VOLTAGE OUTPUT

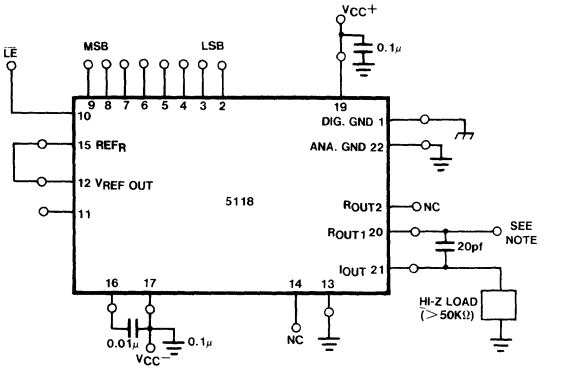

NOTE

DATA INPUT CODE	VOLTAGE OUTPUT (PIN 21)	
0 0 0 0 0 0 0 0	+10V	0V
1 1 1 1 1 1 1 1	0V	−10V
	Pin 20 tied to +10V	Pin 20 tied to 0V

BASIC UNIPOLAR CURRENT OUTPUT (0 →−2mA)

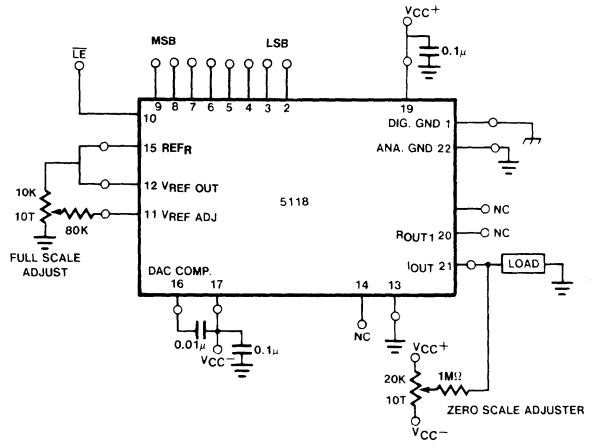

SE5119-F • NE5119-N

DESCRIPTION

The NE5119 is a high-speed 8-bit digital to analog converter subsystem on one monolithic chip. The data inputs have input latches, controlled by a latch enable pin. The data and latch enable inputs are ultra-low loading for easy interfacing with all logic systems. The latches appear transparent when the $\overline{LE}$ input is in the low state. When $\overline{LE}$ goes high, the input data present at the moment of transition is latched and retained until $\overline{LE}$ again goes low. This feature allows easy compatibility with most microprocessors.

The chip also comprises a stable voltage reference (5V nominal). The voltage reference may be externally trimmed with a potentiometer for easy adjustment of full scale, while maintaining a low temperature co-efficient.

The output has high voltage compliance increasing versatility.

FEATURES

- 8-bit resolution
- Input latches
- Low-loading data inputs
- On-chip voltage reference
- Fast settling output current—200ns
- Accurate to ± 1/4 LSB (.1%)
- Monotonic to 8 bits
- Reference short-circuit protected
- Compatible with 2650, 8080 and many other μP's

APPLICATIONS

- Precision 8-bit D/A converters
- A/D converters
- Programmable power supplies
- Test equipment
- Measuring instruments
- Analog-digital multiplication
- CRT display drivers
- High-speed modems

PIN CONFIGURATION

F,N PACKAGE

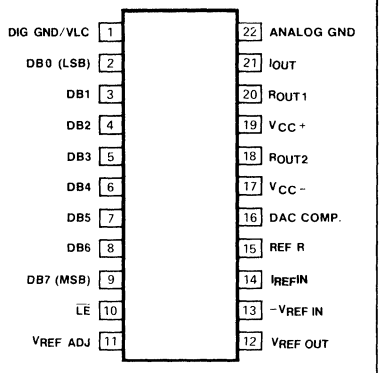

SE5119 available in F package only.

BLOCK DIAGRAM

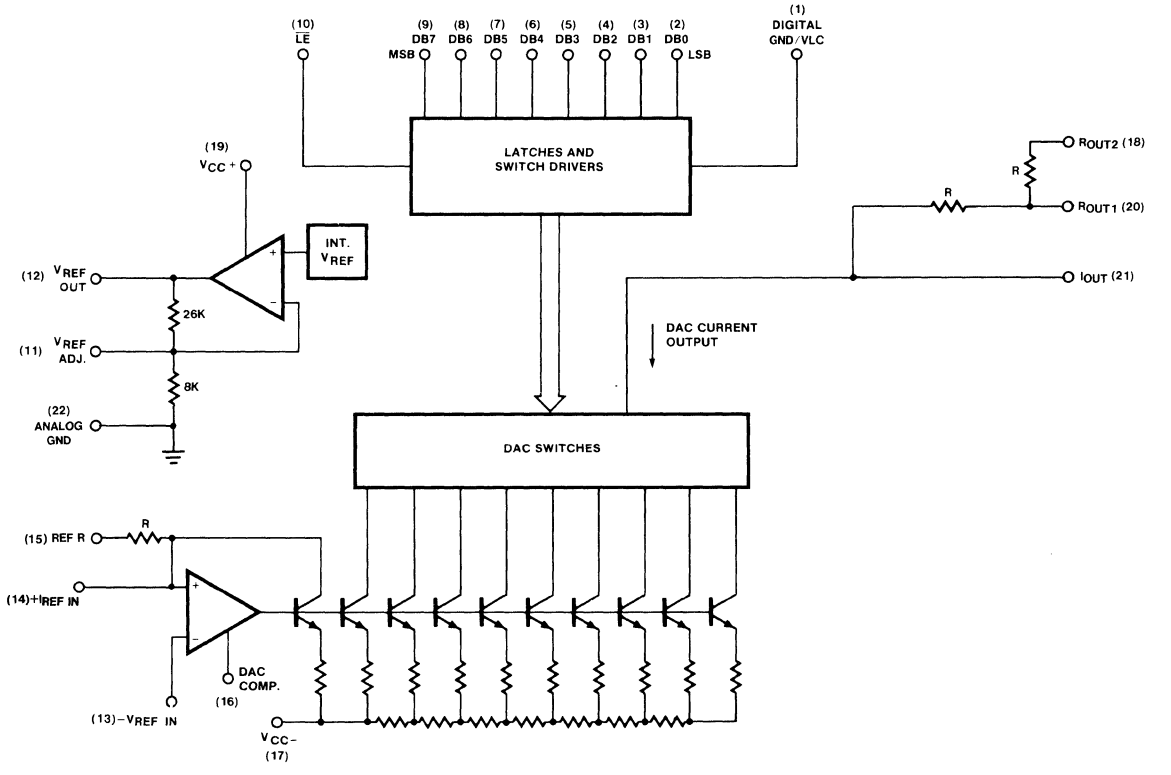

All R values equal 5kΩ and are thermally matched.

Figure 1

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
$V_{CC}+$	Positive supply voltage	18	V
$V_{CC}-$	Negative supply voltage	−18	V
V_{IN}	Logic input voltage	0 to 18	V
$V_{REF}IN$	Voltage at R_{REF} input	12	V
$V_{REF}ADJ$	Voltage at V_{REF} adjust	0 to V_{REF}	V
V_{SUM}	Voltage at sum node	12	V
I_{REFSC}	Short-circuit current to ground at V_{REF} OUT	Continuous	
$I_{REF_{IN}}$	Reference input current (Pin 14)	3	mA
P_D	Power dissipation*		
	-N package	800	mW
	-F package	1000	mW
T_A	Operating temperature range		
	SE5119	−55 to +125	°C
	NE5119	0 to +70	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

*NOTES

For N package, derate at 120°C/W above 35°C
For F package, derate at 75° C/W above 75°C

DC ELECTRICAL CHARACTERISTICS

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5119. $-55°C \leq T_A \leq 125°C$, NE5119. $0°C \leq T_A \leq 70°C$ unless otherwise specified.
Typical values are specified at 25°C

	PARAMETER	TEST CONDITIONS	SE5119			NE5119			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Resolution		8	8	8	8	8	8	Bits
	Monotonicity		8	8	8	8	8	8	Bits
	Relative accuracy				±0.1			±0.1	%FS
$V_{CC}+$	Positive supply voltage		11.4	15		11.4	15		V
$V_{CC}-$	Negative supply voltage		−11.4	−15		−11.4	−15		V
$V_{IN(1)}$	Logic "1" input voltage	Pin 1 = 0V	2.0			2.0			V
$V_{IN(0)}$	Logic "0" input voltage	Pin 1 = 0V			0.8			0.8	V
$I_{IN(1)}$	Logic "1" input current	Pin 1 = 0V, $2V < V_{IN} < 18V$		0.1	10		0.1	10	μA
$I_{IN(0)}$	Logic "0" input current	Pin 1 = 0V, $-5V < V_{IN} < 0.8V$		−2.0	−10		−2.0	−10	μA
I_{FS}	Full scale output current	Unipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C	1.90	1.992	2.10	1.90	1.992	2.10	mA
I_{ZS}	Zero scale current			1			1		μA
V_{REF}	Reference voltage	I_{REF} = 1mA T_A = 25°C	4.5	5.0	5.5	4.5	5.0	5.5	V
$PSR+_{(out)}$	Output power supply rejection (+)	V− = −15V, 13.5V≤V+≤16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/ %VS
$PSR-_{(out)}$	Output power supply rejection (−)	V+ = 15V, −13.5V≤V−≤−16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01		.001	.01	%FS/ %VS
TC_{FS}	Full scale temperature coefficient	$V_{REF_{IN}}$ = 5.000V[1]		20			20		ppm/°C
TC_{ZS}	Zero scale temperature coefficient	$I_{REF_{IN}}$ = 1.00mA[2]		5			5		ppm/°C

NOTES

1. This is for voltage out only. See Unipolar Voltage Output schematic
2. This is for current output mode

DC ELECTRICAL CHARACTERISTICS

(Cont'd) $V_{CC}+ = +15V$, $V_{CC}- = -15V$, SE5119. $-55°C \leq T_A \leq 125°C$, NE5119. $0°C \leq T_A \leq 70°C$ unless otherwise specified. Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	SE5119			NE5119			UNIT
			Min	Typ	Max	Min	Typ	Max	
I_{REF}	Reference output current	Note 1			3			3	mA
I_{REFSC}	Reference short circuit current	$T_A = 25°C$, $V_{REF\ OUT} = 0V$		15	30		15	30	mA
$PSR+(REF)$	Reference power supply rejection (+)	$V- = -15V$, $13.5V \leq V+ \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
$PSR-(REF)$	Reference power supply rejection (−)	$V+ = 15V$, $-13.5V \leq V- \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01		.003	.01	%VR/ %VS
TC_{REF}	Reference voltage temperature coefficient	$I_{REF} = 1.0mA$		60			60		ppm/°C
Z_{IN}	DAC $R_{REF}IN$ input impedance		4.0	5.0	6.0	4.0	5.0	6.0	kΩ
$I_{CC}+$	Positive supply current	$V_{CC}+ = 15V$		7	14		7	14	mA
$I_{CC}-$	Negative supply current	$V_{CC}- = -15V$		−10	−15		−10	−15	mA
P_D	Power dissipation	$I_{REF} = 1.0mA$, $V_{CC} = \pm 15V$		255	435		255	435	mW

AC ELECTRICAL CHARACTERISTICS

$V_{CC} = \pm 15V$, $T_A = 25°C$

PARAMETER		TO	FROM	TEST CONDITIONS	SE/NE5119			UNIT
					Min	Typ	Max	
T_{SLH}	Settling time	± ½ LSB	Input	All bits Low-to-high		200		ns
T_{SHL}	Settling time	± ½ LSB	Input	All bits High-to-low		200		ns
t_{PLH}	Propagation delay	Output	Input	All bits switched Low-to-high		60		ns
t_{PHL}	Propagation delay	Output	Input	All bits switched High-to-low		60		ns
t_{PLSB}	Propagation delay	Output	Input	1 LSB change		60		ns
t_{PLH}	Propagation delay	Output	$\overline{LE}$	Low-to-high transition		60		ns
t_{PHL}	Propagation delay	Output	$\overline{LE}$	High-to-low transition		60		ns
t_s	Set-up time	$\overline{LE}$	Input		100			ns
t_h	Hold time	Input	$\overline{LE}$		50			ns
t_{pw}	Latch enable pulse width				150			ns

NOTES

1. For reference currents > 3mA, use of an external buffer is required.

BIPOLAR OUTPUT OPERATION (−1mA TO +1mA)

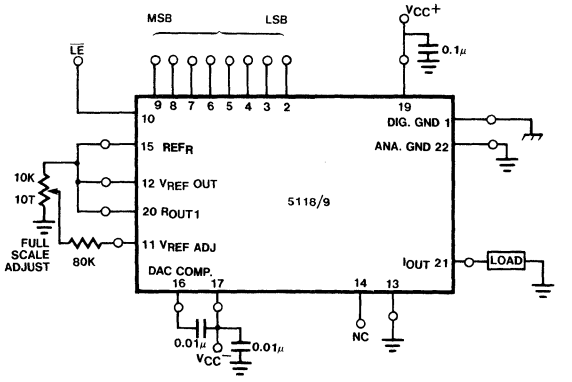

UNIPOLAR VOLTAGE OUTPUT (0 →+10V)

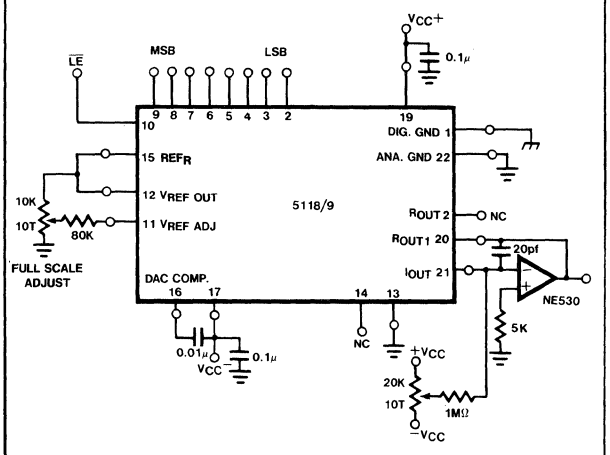

FAST VOLTAGE OUTPUT

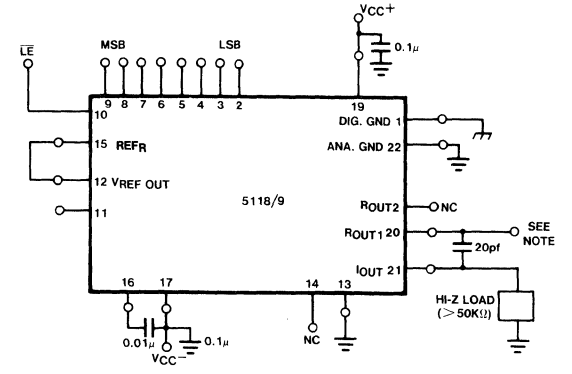

NOTE

DATA INPUT CODE	VOLTAGE OUTPUT (PIN 21)	
0 0 0 0 0 0 0 0	+10V	0V
1 1 1 1 1 1 1 1	0V	−10V
	Pin 20 tied to +10V	Pin 20 tied to 0V

BASIC UNIPOLAR CURRENT OUTPUT (0 →−2mA)

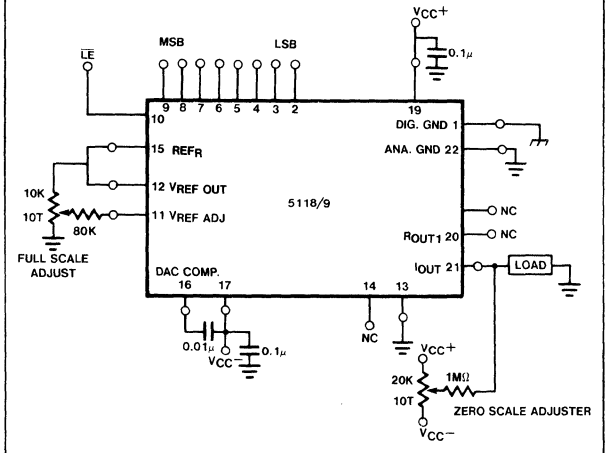

NE5020-F,N

DESCRIPTION

The NE5020 is a microprocessor-compatible monolithic 10-bit digital to analog converter subsystem. This device offers 10-bit resolution and ±0.1% accuracy and monotonicity guaranteed over full operating temperature range.

Low loading latches, adjustable logic thresholds and addressing capability allow the NE5020 to directly interface with most microprocessor and logic controlled systems.

The NE5020 contains internal voltage reference, DAC switches and resistor ladder. Also, the input buffer and output summing amplifier are included. In addition, the matched application resistors for scaling either unipolar or bipolar output values are included on a single monolithic chip.

The result is a near minimum component count 10-bit resolution DAC system.

FEATURES

- **10-bit resolution**
- **Guaranteed monotonicity over operating range**
- **±0.1% relative accuracy**
- **Unipolar (0V to +10V) and Bipolar (±5V) output range**
- **Logic bus compatible**
- **5μsec settling time**

APPLICATIONS

- **Precision 10-bit D/A converters**
- **10-bit Analog to Digital converters**
- **Programmable power supplies**
- **Test equipment**
- **Measurement instruments**

PIN CONFIGURATION

F, N PACKAGE

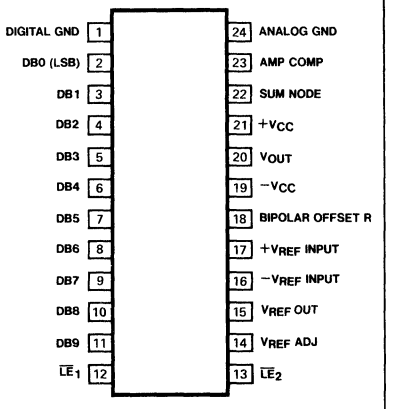

ORDER PART NO.
NE5020F
NE5020N

BLOCK DIAGRAM

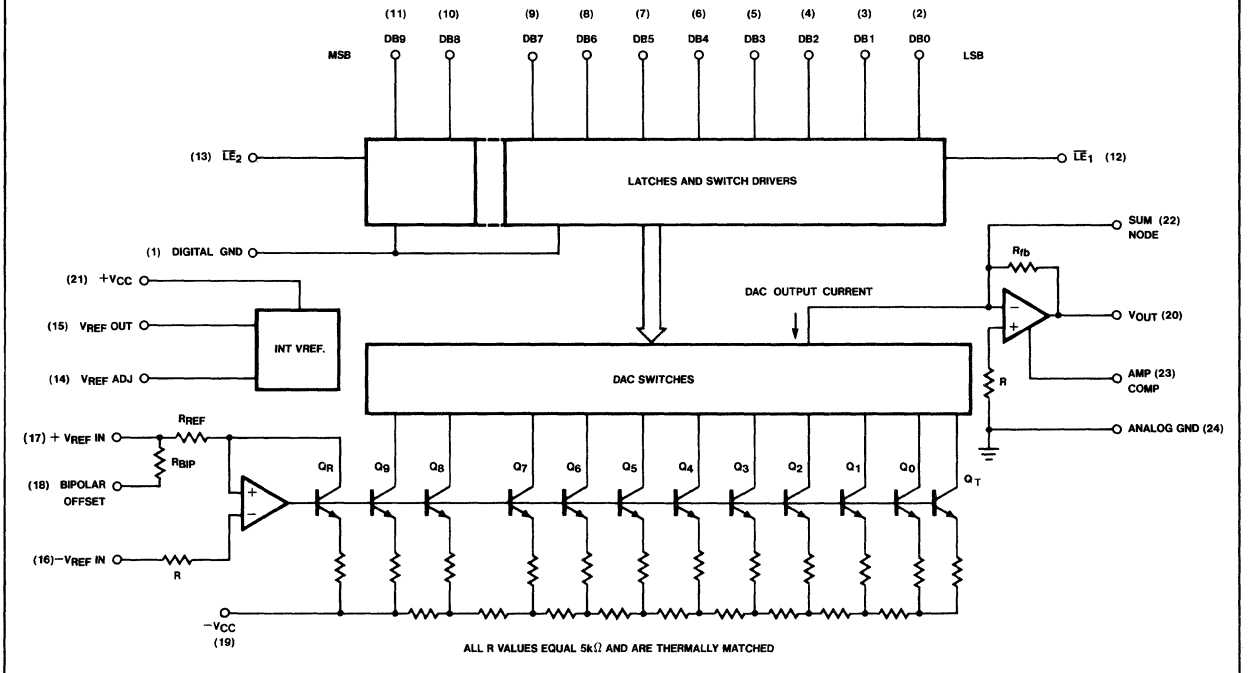

Figure 1

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
$V_{CC}+$	Positive supply voltage	18	V
$V_{CC}-$	Negative supply voltage	−18	V
V_{IN}	Logic input voltage	0 to 18	V
V_{REF} IN	Voltage at $+V_{REF}$ input	12	V
V_{REF} ADJ	Voltage at V_{REF} adjust	0 to V_{REF}	V
V_{SUM}	Voltage at sum node	12	V
I_{REFSC}	Short-circuit current to ground at V_{REF} OUT	Continuous	
I_{OUTSC}	Short-circuit current to ground or either supply at V_{OUT}	Continuous	
P_D	Power dissipation*		
	-N package	800	mW
	F package	1000	mW
T_A	Operating temperature range NE5020	0 to +70	°C
T_{STG}	Storage temperature range	−65 to +150	°C
T_{SOLD}	Lead soldering temperature (10 seconds)	300	°C

*NOTES
For N package, derate at 120°C/W above 35°C
For F package, derate at 75°C/W above 75°C

DC ELECTRICAL CHARACTERISTICS

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, $0°C \leq T_A \leq 70°C$ unless otherwise specified.[1]
Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	NE5020			UNIT
			Min	Typ	Max	
	Resolution				10	Bits
	Monotonicity				10	Bits
	Relative accuracy				±0.1	%FS
$V_{CC}+$	Positive supply voltage		11.4	15	16.5	V
$V_{CC}-$	Negative supply voltage		−11.4	−15	−16.5	V
$V_{IN(1)}$	Logic "1" input voltage	Pin 1 = 0V	2.0			V
$V_{IN(0)}$	Logic "0" input voltage	Pin 1 = 0V			0.8	V
$I_{IN(1)}$	Logic "1" input current	Pin 1 = 0V, $2V < V_{IN} < 18V$		0.1	10	μA
$I_{IN(0)}$	Logic "0" input current	Pin 1 = 0V, $-5V < V_{IN} < 0.8V$		−2.0	−10	μA
V_{FS}	Full scale output voltage	Unipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C		9.9902		V
V_{FS}	Full scale output voltage	Bipolar operation $V_{REF\ IN}$ = 5.000V, T_A = 25°C		4.9902		V
				−5.000		
V_{ZS}	Zero scale voltage	Unipolar operation		5		mV
I_{OS}	Output short circuit current	T_A = 25°C, V_{OUT} = 0V		±15	±40	mA
$PSR+_{(out)}$	Output power supply rejection (+)	V− = −15V, 13.5V≤V+≤16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01	%FS/%VS
$PSR-_{(out)}$	Output power supply rejection (−)	V+ = 15V, −13.5V≤V−≤−16.5V, external $V_{REF\ IN}$ = 5.000V		.001	.01	%FS/%VS
TC_{FS}	Full scale temperature coefficient	$V_{REF\ IN}$ = 5.000V		20		ppmFS/°C
TC_{ZS}	Zero scale temperature coefficient			5		ppmFS/°C

NOTE
1. Refer to Figure 2.

DC ELECTRICAL CHARACTERISTICS (Cont'd)

$V_{CC}+ = +15V$, $V_{CC}- = -15V$, $0°C \leq T_A \leq 70°C$ unless otherwise specified.[1] Typical values are specified at 25°C

PARAMETER		TEST CONDITIONS	NE5020 Min	NE5020 Typ	NE5020 Max	UNIT
I_{REF}[2]	Reference output current				3	mA
$I_{REF\ SC}$	Reference short circuit current	$T_A = 25°C$, $V_{REF\ OUT} = 0V$		15	30	mA
$PSR+_{REF}$	Reference power supply rejection (+)	$V- = -15V$, $13.5V \leq V+ \leq 16.5V$, $I_{REF} = 1.0mA$		.003	.01	%VR/%VS
$PSR-_{REF}$	Reference power supply rejection (−)	$V+ = 15V$, $-13.5V \leq V- \leq 16.5V$,		.003	.01	%VR/%VS
V_{REF}	Reference voltage	$I_{REF} = 1.0mA$, $T_A = 25°C$	4.5	5.0	5.5	V
TC_{REF}	Reference voltage temperature coefficient	$I_{REF} = 1.0mA$		60		ppm/°C
Z_{IN}	DAC V_{REF}IN input impedance	$I_{REF} = 1.0mA$	4.0	5.0	6.0	kΩ
$I_{CC}+$	Positive supply current	$V_{CC}+ = 15V$		7	14	mA
$I_{CC}-$	Negative supply current	$V_{CC}- = -15V$		−10	−15	mA
P_D	Power dissipation	$I_{REF} = 1.0mA$, $V_{CC} = \pm 15V$		255	435	mW

NOTE

1. Refer to Figure 2.
2. For I_{REF} OUT greater than 3mA, an external buffer is required.

AC ELECTRICAL CHARACTERISTICS[3]

$V_{CC} = \pm 15V$, $T_A = 25°C$

PARAMETER		TO	FROM	TEST CONDITIONS	NE5020 Min	NE5020 Typ	NE5020 Max	UNIT
T_{SLH}	Settling time	± ½ LSB	Input	All bits low to high[4]		5		μs
T_{SHL}	Settling time	± ½ LSB	Input	All bits high to low[5]		5		μs
t_{plh}	Propagation delay	Output	Input	All bits switched low to high[4]		300		ns
t_{phl}	Propagation delay	Output	Input	All bits switched high to low[5]		150		ns
t_{plsb}	Propagation delay	Output	Input	1 LSB change[4,5]		150		ns
t_{plh}	Propagation delay	Output	$\overline{LE}$	low to high transition[6]		300		ns
t_{phl}	Propagation delay	Output	$\overline{LE}$	high to low transition[7]		150		ns
t_s	Set-up time	$\overline{LE}$	Input	3, 8	100			ns
t_h	Hold time	Input	$\overline{LE}$	3, 8	50			ns
t_{pw}	Latch enable pulse width			3, 8	150			ns

NOTES

3. Refer to Figure 3.
4. See Figure 6.
5. See Figure 7.
6. See Figure 8.
7. See Figure 9.
8. See Figure 10.

DC PARAMETRIC TEST CONFIGURATION

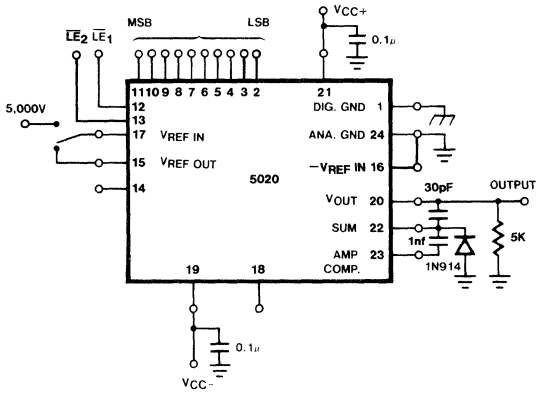

Figure 2

AC PARAMETRIC TEST CONFIGURATION

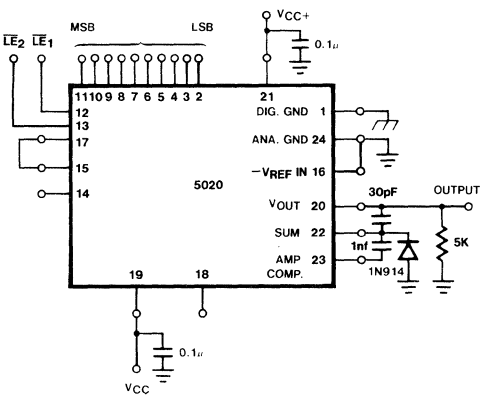

Figure 3

FULL/ZERO SCALE ADJUST—UNIPOLAR OUTPUT (0–10V)

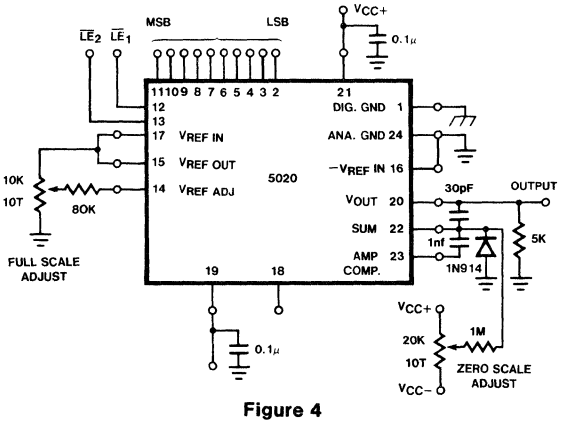

Figure 4

BIPOLAR OUTPUT OPERATION (−5 to +5V)

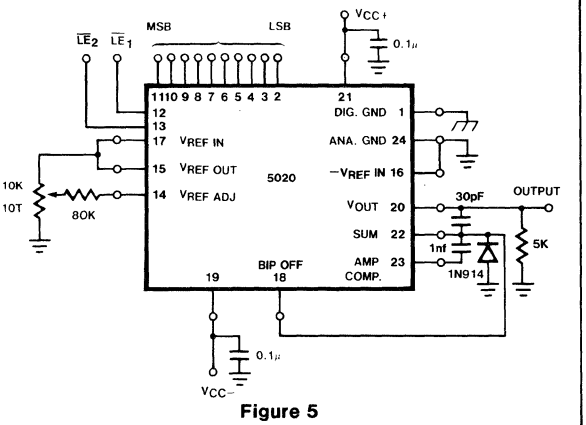

Figure 5

SETTLING TIME AND PROPAGATION DELAY, LOW TO HIGH DATA

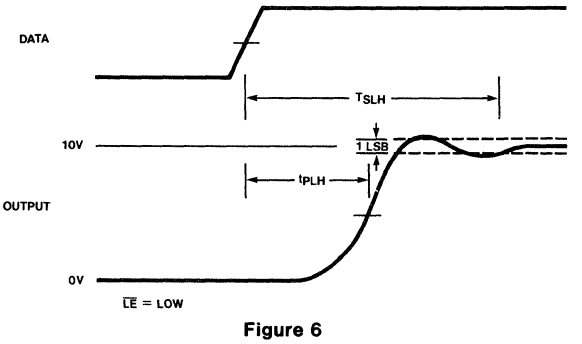

Figure 6

SETTLING TIME AND PROPAGATION DELAY, HIGH TO LOW DATA

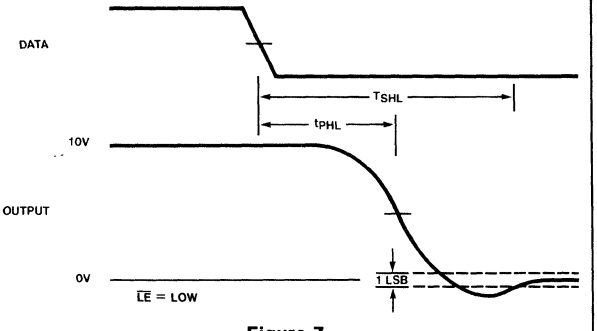

Figure 7

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

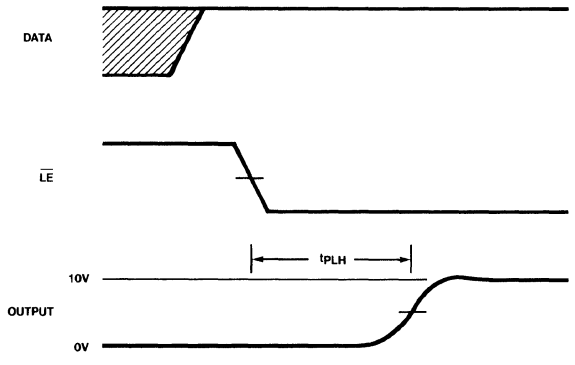

Figure 8

PROPAGATION DELAY, LATCH ENABLE TO OUTPUT

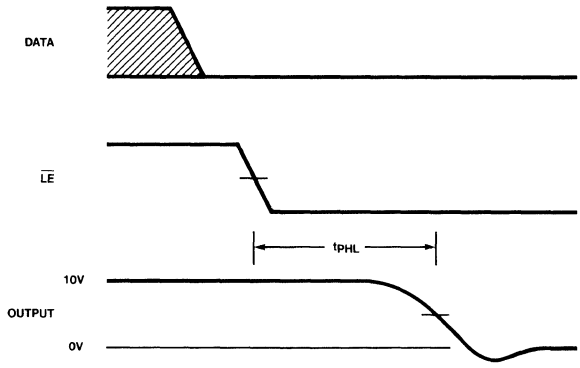

Figure 9

LATCH ENABLE PULSE WIDTH, SET-UP AND HOLD TIMES

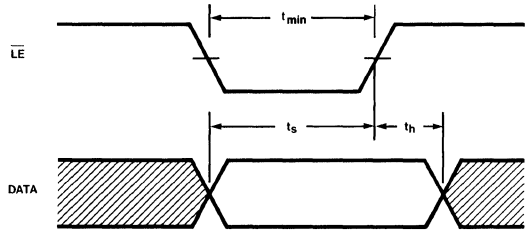

Figure 10

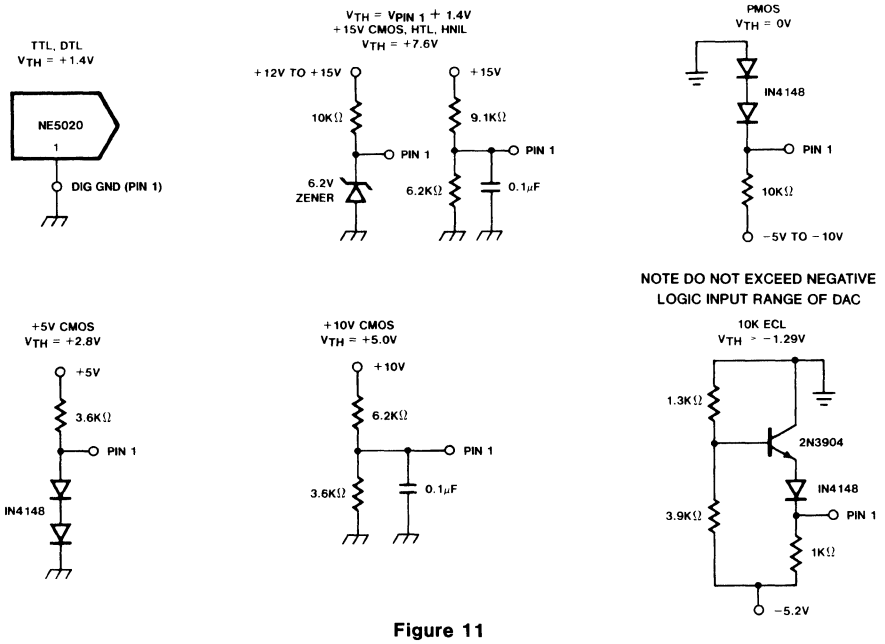

Figure 11

CIRCUIT DESCRIPTION

The NE5020 provides ten data latches, an internal voltage reference, application resistors, and a scaled output voltage, in addition to the basic DAC components (see block diagram, figure 1).

Latch Circuit

Digital interface with the NE5020 is readily accomplished through the use of two latch enable ports ($\overline{LE}_1$ and $\overline{LE}_2$) and ten data input latches. $\overline{LE}_2$ controls the two most significant bits of data (DB_9 and DB_8) while $\overline{LE}_1$ controls the eight lesser significant bits (DB_7 through DB_ϕ). Both the latch enable ports ($\overline{LE}$) and the data inputs are static and threshold sensitive. When the latch enable ports ($\overline{LE}$) are high (Logic '1') the data inputs become very high impedances and essentially disappear from the data bus. Addressing the $\overline{LE}$ with a low (Logic '0') the latches become active and adapt the logic states present on the data bus. During this state, the output of the DAC will change to the value proportional to the data bus value. When the latch enable returns to a high state, the selected set of data inputs (i.e., depending on which $\overline{LE}$ goes high) 'memorize' the data bus logic states and the output changes to the unique output value corresponding to the binary word in the latch.

The data inputs are inactive and high impedance (typically requiring $-2\mu A$ for low (.8V max) or $0.1\mu A$ for high (2.0V min)) when the $\overline{LE}$ is high. Any changes on the data bus with $\overline{LE}$ high will have no effect on the DAC output.

The digital logic inputs ($\overline{LE}$ and DB) for the NE5020 utilize a differential input logic system with a threshold level of +1.4 volts with respect to the voltage level on the digital ground pin (Pin 1). Figure 11 details several bias schemes used to provide the proper threshold voltage levels for various logic families.

To be compatible with a bus orientated system the DAC should respond in as short a period as possible to insure full utilization of the microprocessor, controller and I/O control lines. Figure 10 shows the typical timing requirements of the latch and data lines. This figure indicates that data on the data bus should be stable for at least 50nsec after $\overline{LE}$ is changed to a high state.

The independent $\overline{LE}$ ($\overline{LE}_1$ and $\overline{LE}_2$) lines allow for direct interface from an 8 bit data bus (see figure 12). Data for the two MSB's is supplied and stored when $\overline{LE}_2$ is activated low and returned high according to the NE5020 timing requirements. Then $\overline{LE}_1$ is activated low and the remaining eight LSB's of data are transferred into the DAC. With $\overline{LE}_1$ returning high the loading of ten bit data word from an eight bit data bus is complete.

Occasionally the analog output must change to its data value within one data address operation. This is no problem using the NE5020 on a 16 bit bus or any other data bus with 10 or greater data bits.

This can be accomplished from an 8 bit data bus by utilizing an external latch circuit to preload the two MSB data values. Figure 13 shows the circuit configuration.

After preloading (via $\overline{LE}$ pre-load) the external latch with the two MSB values, $\overline{LE}_2$ is activated low and the eight LSB's and the

NE5020 μP INTERFACE 8-BIT DATA BUS EXAMPLE

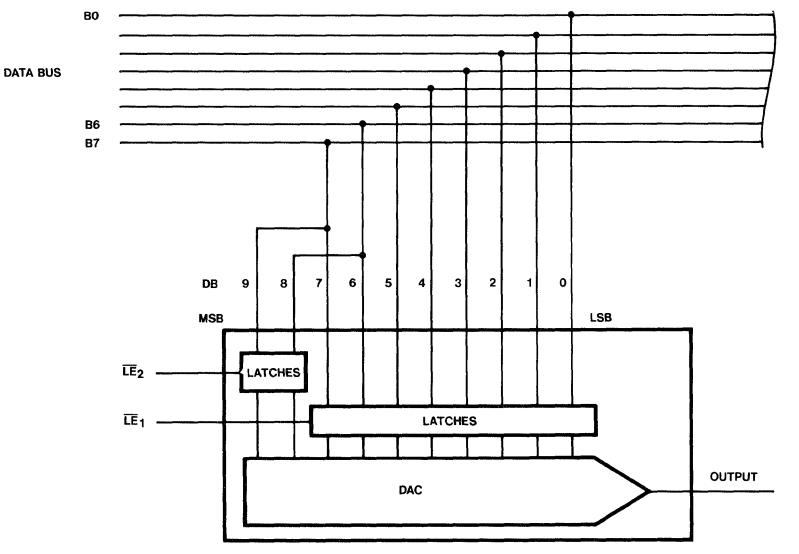

Figure 12

PRELOADING THE 2 MSB'S TO PROVIDE A SINGLE STEP OUTPUT

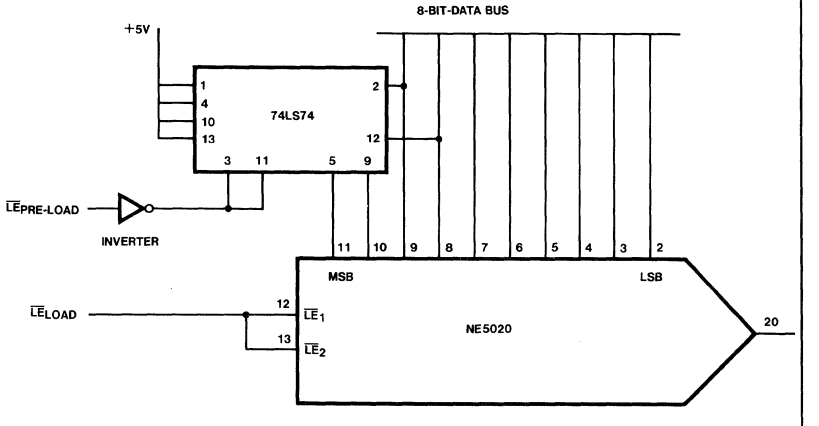

Figure 13

two MSB's are concurrently loaded into the DAC in one address operation. This permits the DAC output to make its appropriate change at one time.

Reference Interface

The NE5020 contains an internal bandgap voltage reference which is designed to have a very low temperature coefficient and excellent long term stability characteristics.

The internal bandgap reference (1.23V) is buffered and amplified to provide the 5 volt reference output. Providing a $V_{REF}ADJ$ (pin 14) allows trimming of the reference output. Utilization of the adjust circuit shown in figure 16 performs not only V_{REF} adjustment but also full scale output adjust. Notice that the $V_{REF}ADJ$ pin is essentially the sum node of an op amp and is sensitive to excessive node capacitance. Any capacitance on the node can be minimized by placing the external resistors as close as possible to the $V_{REF}ADJ$ pin and observing good layout practices.

The V_{REF} out node can drive loads greater than the DAC V_{REF} input requirements and can be used as an excellent system voltage reference. However, to minimize load effects on the DAC system accuracy, it is recommended that a buffer amplifier is used.

Input Amplifier

The DAC reference amplifier is a high gain internally compensated op amp used to convert the input reference voltage to a precision bias current for the DAC ladder network.

Figure 1 details the input reference amplifier and current ladder. The voltage to current converter of the DAC amp will generate a 1mA reference current through Q_R with a 5 volt V_{REF}. This current sets the input bias to the ladder network. Data bit 9 $(DB_9)(Q_9)$, when turned on, will mirror this current and will contribute 1mA to the output. DB_8 (Q_8) will contribute ½ of that value or 0.5mA and so on. These current values act as current sinks and will add at the sum node to produce a DAC ladder to sum node function of:

$$I_{OUT} = \frac{2V_{REF}}{R_{REF}} \left(\frac{DB9}{2} + \frac{DB8}{4} + \frac{DB7}{8} + \frac{DB6}{16} + \frac{DB5}{32} + \frac{DB4}{64} + \frac{DB3}{128} + \frac{DB2}{256} + \frac{DB1}{512} + \frac{DB0}{1024} \right)$$

Because of the fixed internal compensation of the reference amp, the slew rate is limited to typically 0.7V/μsec and source impedances at the V_{REF} INPUT greater than 5kΩ should be avoided to maintain stability.

The $-V_{REF}$ INPUT pin is uncommitted to allow utilization of negative polarity reference voltages. In this mode $+V_{REF}$ INPUT is grounded and the negative reference is tied directly to the $-V_{REF}$ INPUT. The $-V_{REF}$ INPUT contains a 5kΩ resistor that matches a like resistor in the $+V_{REF}$ INPUT to reduce voltage offset caused by op amp input bias currents.

Output Amplifier and Interface

The NE5020 provides an on chip output op amp to eliminate the need for additional external active circuits. Its two stage design with feed forward compensation allows it to slew at 15V/μsec and settle to within ±½LSB in 5μsec. These times are typical when driving the rated loads of $R_L \geq 5k$ and $C_L \leq 50pF$ with recommended values of $C_{FF} = 1nF$ and $C_{FB} = 30pF$. Typical input offset voltages of 5mV and 50k open loop gain insure an accurate current to voltage conversion is performed when using the on chip R_{FB} resistor. R_{FB} is matched to R_{REF} and R_{BIP} to maintain accurate voltage gain over operating conditions. The diode shown from ground to sum node prevents the DAC current switches from saturating the op amp during large signal transitions which would otherwise increase the settling time.

The output op amp also incorporates output short circuit protection for both positive and negative excursions. During this fault condition I_{OUT} will limit at ±15mA typical. Recovery from this condition to rated accuracy will be determined by duration of short circuit and die temperature stabilization.

Bipolar Output Voltage

The NE5020 includes a thermally matched resistor, R_{BIP}, to offset the output voltage by 5 volts to obtain −5V to +5V output voltage range operation. This is accomplished by shorting pins 18 and 22 (see figure 14). This connection produces a current equal to $(V_{REF\ IN} - V_{sum\ node}) \div R_{BIP}$, (1mA nominal), which is injected into the sum node. Since full scale current out is approximately 2mA (1.9980mA), (2mA − 1mA)5k = 5V will appear at the output. For zero DAC output currents, 1mA is still injected into sum mode and $V_{OUT} = -(5k)(1mA) = -5V$. Zero scale adjust and full scale adjust are performed as described below, noting that full scale voltage is now approximately +5 volts, zero scale adjust may be used to trim V_{OUT} = 0.00 with the MSB high or $V_{OUT} = -5.0V$ with all bits off.

Zero Scale Adjustment

The method of trimming the small offset error that may exist when all data bits are low is shown in figure 15. The trim is the result of injecting a current from resistor R_2 that counteracts the error current. Adjusting potentiometer R_1 until V_{OUT} equals 0.000 volts in the unipolar mode or −5.000 volts in the bipolar mode (see bipolar section) accomplishes this trim.

Full Scale Adjustment

A recommended full scale adjustment circuit when using the internal voltage reference is shown in figure 16. Potentiometer R_3 is adjusted until V_{OUT} equals 9.99023V. In many applications where the absolute accu-

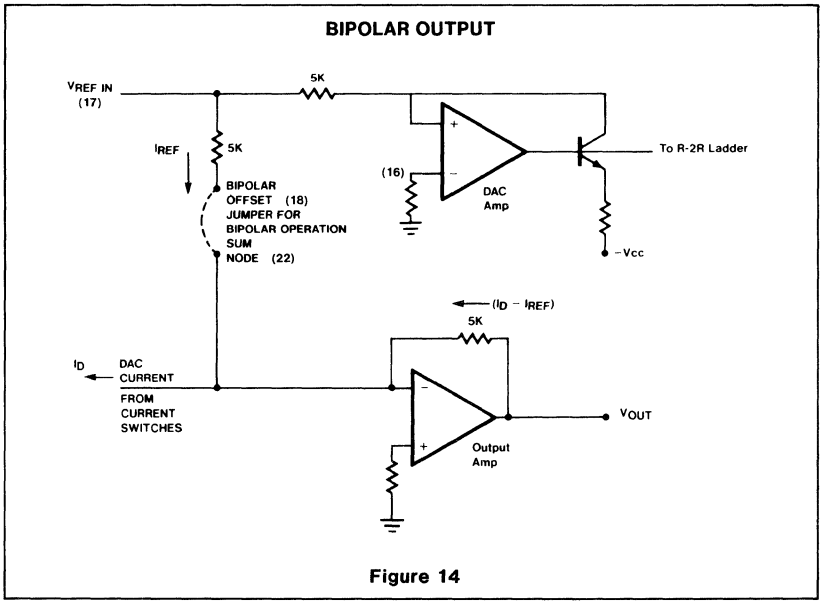

Figure 14

racy of full scale is of low importance when compared to the other system accuracy factors, then this adjustment circuit is optional.

As resistors R_{REF}, R_{fb} and R_{BIP} shown in figure 1 are integrated in close proximity, they match and track in value closely over wide ambient temperature variations. Typical matching is less than ±0.3% which implies that typical full scale (or gain) error is less than ±0.3% of ideal full scale value.

ZERO SCALE ADJUSTMENT

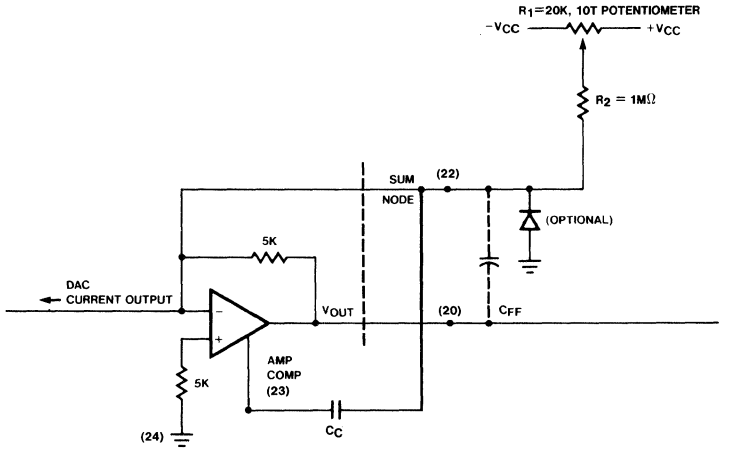

Figure 15

REFERENCE ADJUST CIRCUIT

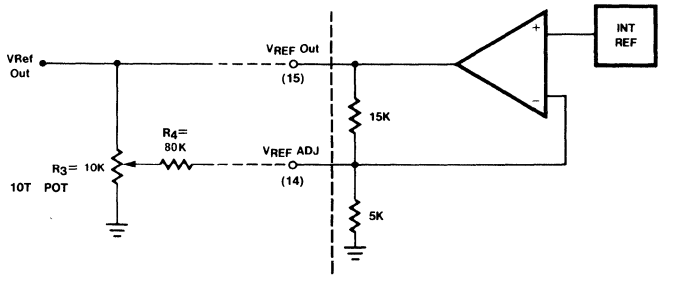

Figure 16

DESCRIPTION

The NE5537 monolithic Sample and Hold amplifier combines the best features of ion implanted JFET's with bipolar devices to obtain high accuracy, fast acquisition time, and low droop rate. This device is pin compatible with the LF198, and features superior performance in droop rate and output drive capability. The circuit shown in Figure 1 contains two operational amplifiers which function as a unity gain amplifier in the Sample mode. The first amplifier has bipolar input transistors which gives the system a low offset voltage. The second amplifier has JFET input transistors to achieve low leakage current from the hold capacitor. A unique circuit design for leakage current cancellation using current mirrors gives the NE5537 a low droop rate at higher temperature. The output stage has the capability to drive a 2KΩ load. The logic input is compatible with TTL, PMOS or CMOS logic. The differential logic threshold is 1.4V with the Sample mode occurring when the logic input is high. It is available in 8-lead TO-5 and 8-pin plastic DIP packages.

FEATURES

- **Operates from ±5V to ±18V supplies**
- **Hold leakage current 6pA @ T_j25°C**
- **Less than 10μs acquisition time**
- **TTL, PMOS, CMOS compatible logic input**
- **0.5mV typical hold step at C_h = 0.01μF**
- **Low input offset: 1MV (typical)**
- **0.002% gain accuracy with R_L = 2kΩ**
- **Low output noise in hold mode**
- **Input characteristics do not change during hold mode**
- **High supply rejection ratio in sample or hold**
- **Wide bandwidth**

PIN CONFIGURATION

H PACKAGE
Metal Can Package



TOP VIEW

ORDER PART NO.
NE/SE5537-H

N PACKAGE



ORDER PART NO.
NE/SE5537N

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	±18	V
Power dissipation (package limitation)[1]	500	mW
Operating ambient temperature range		
SE5537	−55 to +125	°C
NE5537	0 to +70	°C
Storage temperature range	−65 to +150	°C
Input voltage	Equal to supply voltage	
Logic to logic reference differential voltage[2]	+7, −30	V
Output short circuit duration	Indefinite	
Hold capacitor short circuit duration	10	sec
Lead temperature (soldering, 10sec)	300	°C

NOTES

1. The maximum junction temperature of the SE5537 is 150°C and for the NE5537 is 100°C. When operating at elevated ambient temperature, the TO-5 and plastic DIP packages must be derated based on a thermal resistance (θja) of 150°C/W.
2. Although the differential voltage may not exceed the limits given, the common mode voltage on the logic pins may be equal to the supply voltages without causing damage to the circuit. For proper logic operation, however, one of the logic pins must always be at least 2V below the positive supply and 3V above the negative supply.

BLOCK DIAGRAM

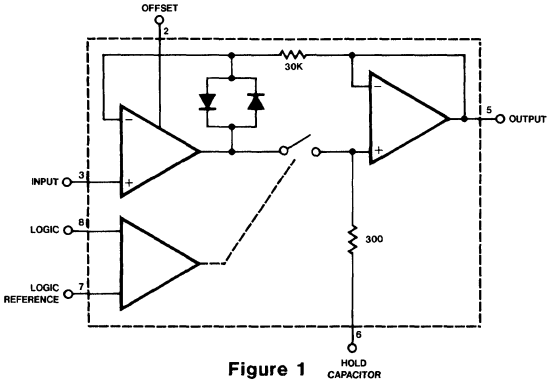

Figure 1

ELECTRICAL CHARACTERISTICS[3]

PARAMETER	TEST CONDITIONS	SE5537			NE5537			UNIT
		Min	Typ	Max	Min	Typ	Max	
Input offset voltage[6]	T_j = 25°C Full temperature range		1	3 5		2	7 10	mV mV
Input bias current[6]	T_j = 25°C Full temperature range		5	25 75		10	50 100	nA nA
Input impedance	T_j = 25°C		10^{10}			10^{10}		Ω
Gain error	T_j = 25°C, $-10V \leq V_{IN} \leq 10V$, R_L = 2K $-11.5V \leq V_{IN} \leq 11.5V$, R_L = 10K Full temperature range		0.002	0.007 0.02		0.004	0.01 0.02	% %
Feedthrough attenuation ratio at 1kHz	T_j = 25°C, C_h = 0.01μF	86	96		80	90		dB
Output impedance	T_j = 25°C, "HOLD" mode full temperature range		0.5	2 4		0.5	4 6	Ω
"HOLD" Step[4]	T_j = 25°C, C_h = 0.01μF, V_{OUT} = 0		0.5	2.0		1.0	2.5	mV
Supply current[6]	T_j=25°C		4.5	6.5		4.5	7.5	mA
Logic and logic reference input current	T_j = 25°C		2	10		2	10	μA
Leakage current into hold capacitor[6]	T_j = 25°C hold mode[5]		6	50		6	100	pA
Acquisition time to 0.1%	V_{OUT} = 10V, C_h = 1000pF C_h = 0.01μf		 4 20			 4 20		 μs μs
Hold capacitor charging current	$V_{IN} - V_{OUT}$ = 2V		5			5		mA
Supply voltage rejection ratio	V_{OUT} = 0	80	110		80	110		dB
Differential logic threshold	T_j = 25°C	0.8	1.4	2.4	0.8	1.4	2.4	V

NOTES

3. Unless otherwise specified, the following conditions apply. Unit is in "sample" mode, $V_S = \pm 15V$, T_j = 25°C, $-11.5V \leq V_{IN} \leq 11.5V$, C_h = 0.01μF, and R_L = 2kΩ. Logic reference voltage = 0V and logic voltage = 2.5V.
4. Hold step is sensitive to stray capacitive coupling between input logic signals and the hold capacitor. 1pF, for instance, will create an additional 0.5mV step with a 5V logic swing and a 0.01F hold capacitor. Magnitude of the hold step is inversely proportional to hold capacitor value.
5. Leakage current is measured at a junction temperature of 25°C. The effects of junction temperature rise due to power dissipation or elevated ambient can be calculated by doubling the 25°C value for each 11°C increase in chip temperature. Leakage is guaranteed over full input signal range.
6. These parameters guaranteed over a supply voltage range of ±5 to ±18V.

TYPICAL PERFORMANCE CHARACTERISTICS

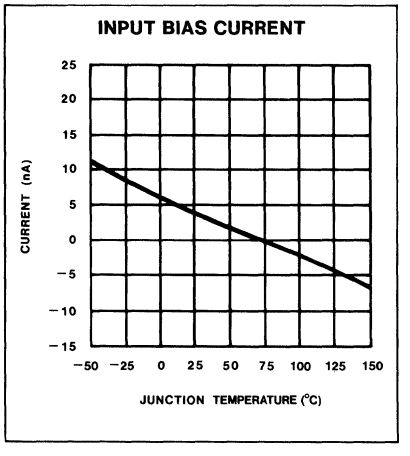

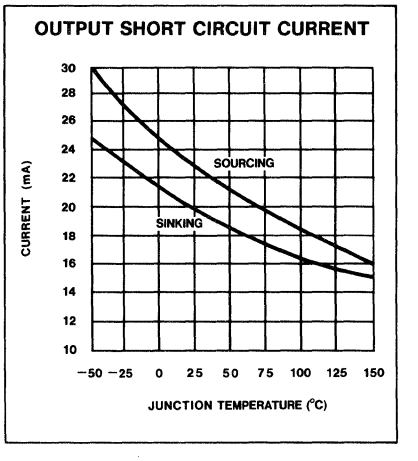

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

GAIN ERROR

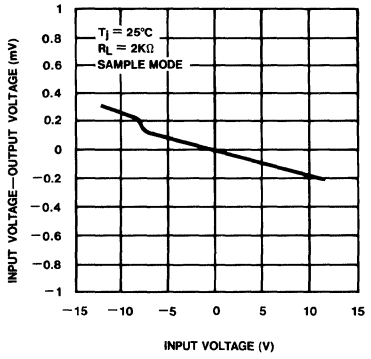

HOLD STEP

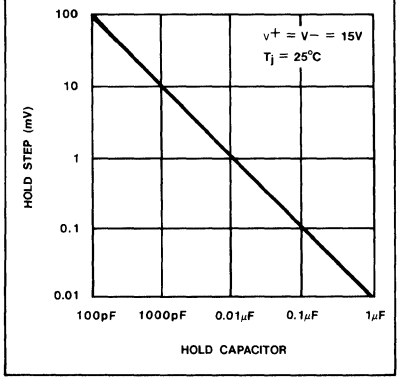

LEAKAGE CURRENT INTO HOLD CAPACITOR

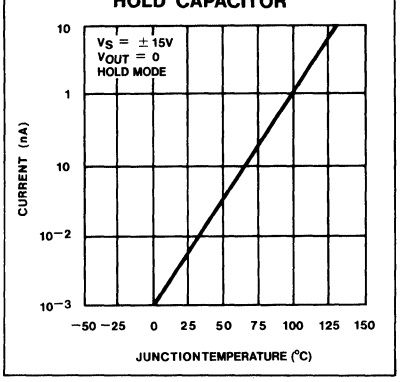

HOLD STEP vs INPUT VOLTAGE

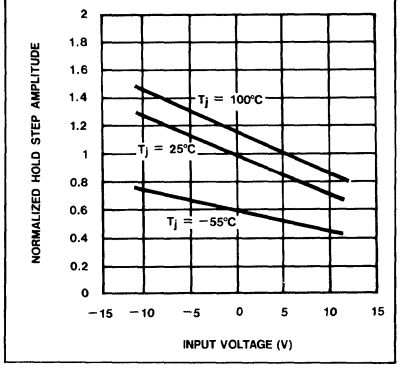

ACQUISITION TIME

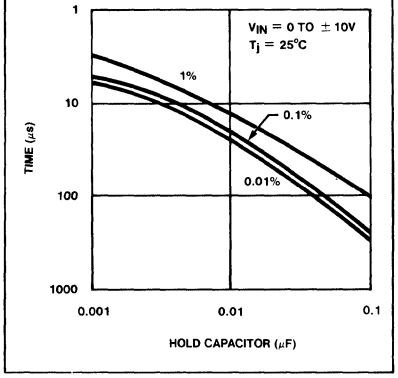

APERTURE TIME

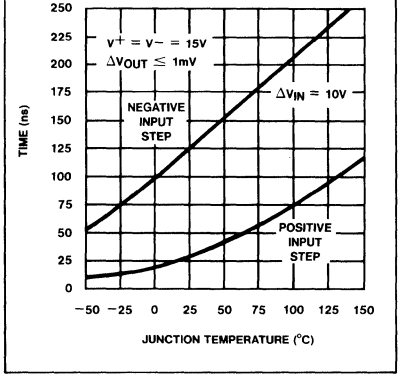

CAPACITOR HYSTERESIS

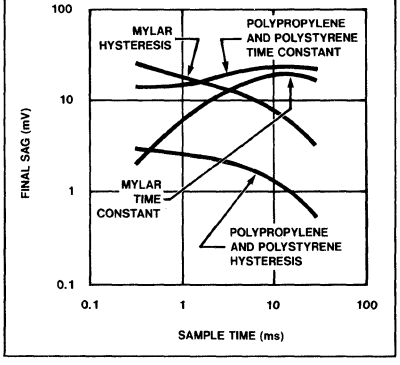

DYNAMIC SAMPLING ERROR

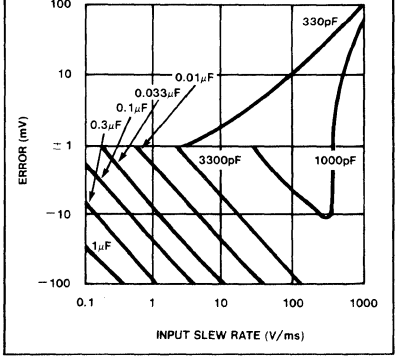

OUTPUT DROOP RATE

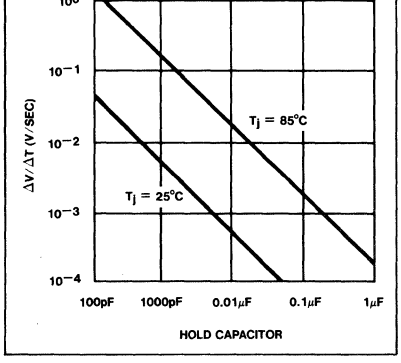

10

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

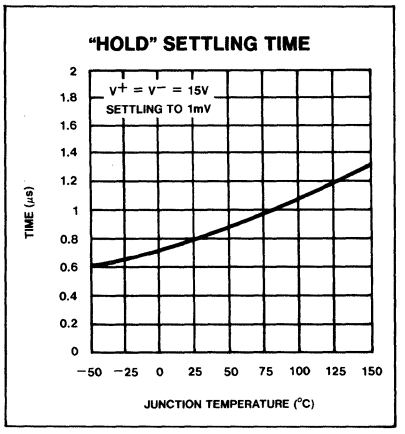

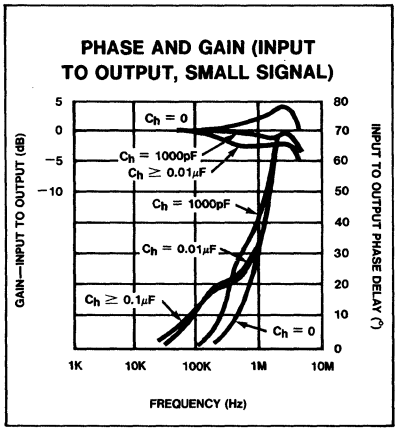

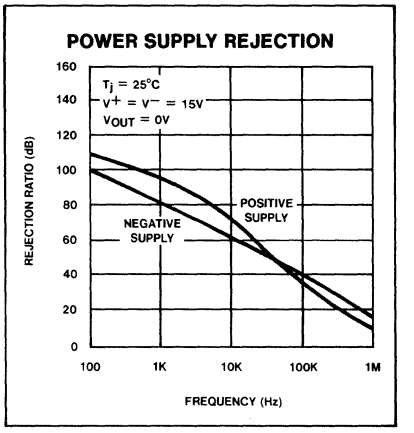

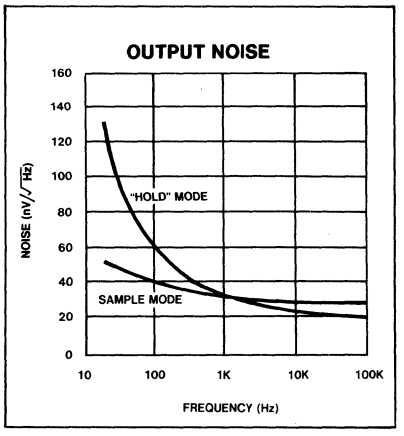

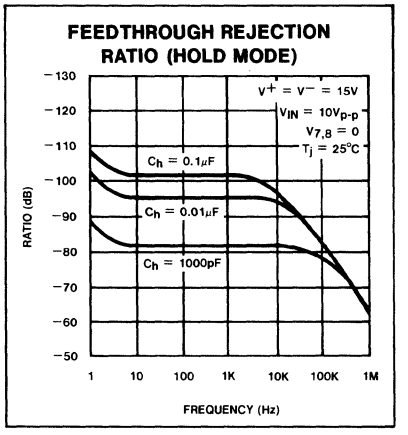

SAMPLE AND HOLD

INTRODUCTION

For many years designers have used the sample and hold (or track and hold) to operate on analog information in a time frame which is expedient.

By sampling a segment of the information and holding it until the proper timing for converting to some form of control signal or readout allows the designer certain freedom in performing predetermined manipulative functions. Therefore, the sample and hold can be defined as a "selective analog memory cell".

The memory is volatile and will also decay with time.

When using the sample and hold method for evaluating signal information, the designer is given the added feature of eliminating outside noise elements. With the analog to digital converter products available today the "dc memory" of the sample and hold can be easily converted to digital format and further incorporated into microprocessor based systems.

Parametric evaluation of the sample and hold will be discussed in the following paragraphs.

DEFINITION OF TERMS

ACQUISITION TIME: The time required to acquire a new analog input voltage with an output step of 10V. Note that acquisition time is not just the time required for the output to settle, but also includes the time required for all internal nodes to settle so that the output assumes the proper value when switched to the hold mode.

APERTURE DELAY TIME: The time elapsed from the hold command to the opening of the switch.

APERTURE JITTER: Also called "aperture uncertainty time", it's the time variation or uncertainty with which the switch opens, or the time variation in aperture delay.

APERTURE TIME: The delay required between "hold" command and an input analog transition, so that the transition does not affect the held output.

BANDWIDTH: The frequency at which the gain is down 3dB from its dc value. It's measured in sample (track) mode with a small-signal sine wave that doesn't exceed the slew rate limit.

EFFECTIVE APERTURE DELAY: The time difference between the hold command and the time at which the input signal is at the held voltage.

FIGURE OF MERIT: The ratio of the available charging current during sample mode to the leakage current during hold mode.

HOLD-MODE DROOP: The output voltage change per unit of time while in hold. Commonly specified in V/s, μV/μs or other convenient units.

HOLD-MODE FEEDTHROUGH: The percentage of an input sinusoidal signal that is measured at the output of a sample-hold when it's in hold mode.

HOLD SETTLING TIME: The time required for the output to settle within 1mV of final value after the "hold" logic command.

SAMPLE-TO-HOLD OFFSET ERROR: The difference in output voltage between the time the switch starts to open, and the time when the output has settled completely. It is caused by charge being transferred to the hold capacitor switch as it opens.

SLEW RATE: The fastest rate at which the sample & hold output can change (specified in V/μs).

HOLD STEP: The voltage step at the output of the sample and hold when switching from sample mode to hold mode with a steady (dc) analog input voltage. Logic swing is 5V.

DYNAMIC SAMPLING ERROR: The error introduced into the held output due to a changing analog input at the time the hold command is given. Error is expressed in mV with a given hold capacitor value and input slew rate. Note that this error term occurs even for long sample times.

GAIN ERROR: The ratio of output voltage swing to input voltage swing in the sample mode expressed as a percent difference.

THRESHOLD: Level shall be defined as that level which causes the switch control to change state.

BASIC BLOCK DIAGRAM

The basic circuit concept of the sample and hold circuit incorporates the use of two (2) operational amplifiers and a switch control mechanism (which determines sample, hold or track conditions). Reference figure 1.

The block diagram of the NE5537 is a closed loop non-inverting unity gain sample and hold system. The input buffer amplifier supplies the current necessary to charge the hold capacitor, while the output buffer amplifier closes the loop such that the output voltage is identical to the input voltage (with consideration for input offset voltage, offset current, and temperature variations which are common to *all* sample and hold circuits, be they monolithic, hybrid or modular).

When the sampling switch is open (in the hold mode) the clamping diodes close the loop around the input amplifier to keep it from being overdriven into saturation.

The switch control is driven by external logic levels via a timing sequence remote from the sample and hold device. Reference figure 2. The switch control has a floating reference (pin 7), referred to as the logic reference which makes the sample and hold device compatible to several types of external logic signals (TTL, PMOS, & CMOS). The switching device operates at a threshold level of 1.4V.

The switch mechanism is on (sampling an information stream) when the logic level is high (pin 8 is 1.4 volts higher than pin 7) and presents a load of 5 microamperes to the input logic signal. The analog sampled signal is amplified, stored (in the external holding capacitor), and buffered. At the end of the sampling period the internal switch mechanism turns off (switch opens) and the "stored analog memory" information on the external capacitor (pin 6) is loaded down by an operational amplifier connected in the unity gain non-inverting configuration. This amplifier, whose input impedance is effectively:

$$R = R_{IN}(A_{OL})/(1 + 1/A)$$

where
- R = Effective input impedance
- R_{IN} = Open loop input impedance
- A_{OL} = Open loop gain
- A = AC loop gain

Therefore, the higher the open loop gain of the second operational amplifier, the larger the effective loading on the capacitor. The larger the load, the lower the "leakage" current and the better the droop characteristics.

In actuality the amplifiers are designed with special leakage current cancellation circuits along with FET input devices. The leakage current cancellation circuits give better high temperature operation (remember that the FET amplifiers double in required bias current for every 10 degree increase in junction temperature).

Sampling time for the NE5537 is less than 10μsec, (measured to 0.1% of input signal). Leakage current is 6pA at a rate output load of 2kΩ.

BASIC APPLICATIONS

Multiplying DAC

As depicted in the block diagram of figure 3, the sample and hold circuit is used to supply a "variable" reference to the digital to analog converter. As the input reference varies, the output will change in accordance with equation 1, shown in figure 3.

Varying the input signal reference level can aid the system in performing both compression and expansion operations. The multiplying DAC's used are the Signetics SE/NE 5008; however, if the rate of change of the reference variation is kept slow enough a microprocessor compatible DAC can be incorporated, such as the NE5018 or the NE5020.

DATA ACQUISITION SYSTEMS

As mentioned earlier, the designer may wish to operate on several different segments of an "analog" signal; however he is limited by the fact that only one analog to digital converter channel is available to him. Figure 4 shows the means by which a multiplexing system may be accomplished.

APPLICATION HINTS

Hold Capacitor

A significant source of error in an accurate sample and hold circuit is dielectric absorption in the hold capacitor. A mylar cap, for instance, may "sag back" up to 0.2% after a quick change in voltage. A long "soak" time is required before the circuit can be put back into the hold mode with this type of capacitor. Dielectrics with very low hysteresis are polystyrene, polypropylene, and Teflon. Other types such as mica and polycarbonate are not nearly as good. Ceramic is unusable with >1% hysteresis. The advantage of polypropylene over polystyrene is that it extends the maximum ambient temperature from 85°C to 100°C. The hysteresis relaxation time constant in polystyrene, for instance, is 10-50ms. If A-to-D conversion can be made within 1ms, hysteresis error will be reduced by a factor of ten.

DC Zeroing

DC Zeroing is accomplished by connecting the offset adjust pin to the wiper of a 1kΩ potentiometer which has one end tied to V^+ and the other end tied through a resistor to ground. The resistor should be selected to give $\simeq$0.6mA through the 1KΩ potentiometer.

Sampling Dynamic Signals

Sampling errors due to moving (changing) input signals are of significant concern to designers employing sample and hold circuits. There exist finite phase delays through the sample and hold circuit causing an input-output phase differential for moving signals. In addition, the series protection resistor (300Ω to pin 6 of the NE5537) will add an RC time constant, over and above the slew rate limitation of the input buffer/current drive amplifier. This means that at the moment the "hold" command arrives, the hold capacitor voltage may be somewhat different than the actual analog input. The effect of these delays is opposite to the effect created by delays in the logic which switches the circuit from sample to hold. For example, consider an analog input of 20 Vp-p at 10kHz. Maximum dV/dt is 0.6V/μs. With no analog phase delay and 100ns logic delay, one could expect up to (0.1μs) (0.6V/μs) = 60mV error if the "hold" signal arrived near maximum dV/dt of the input. A positive going input would give a $\pm$60mV error. Now assume a 1MHz (3dB) bandwidth for the overall analog loop. This generates a phase delay of 160ns. If the hold capacitor sees this exact delay, then error due to analog delay will be (0.16μs) (0.6V/μs) = −96mV (analog) for a total of −36mV. To add to the confusion, analog delay is proportional to hold capacitor value while digital delay remains constant. A family of curves (dynamic sampling error) is included to help estimate errors.

A curve labeled *Aperture Time* has been included for sampling conditions where the input is steady during the sampling period, but may experience a sudden change nearly coincident with the "hold" command. This curve is based on a 1mV error fed into the output.

A second curve, *Hold Settling Time* indicates the time required for the output to settle to 1mV after the "hold" command.

Digital Feedthrough

Fast rise time logic signals can cause hold errors by feeding externally into the analog input at the same time the amplifier is put into the hold mode. To minimize this problem, board layout should keep logic lines as far as possible from the analog input. Grounded guarding traces may also be used around the input line, especially if it is driven from a high impedance source. Reducing high amplitude logic signals to 2.5V will also help.

Logic signals also couple to the hold capacitor. This hold capacitor should be guarded by a P.C. card trace connected to the sample-and-hold output. This will also minimize board leakage.

SPECIAL NOTES

1. Not all definitions herein defined are measured parametrically for the NE5537, but are legitimate terms used in sample and hold systems.
2. Reference should be made to Design Engineering, volumes 23 (Nov. 8, 1978), 25 (Dec. 6, 1978) and 26 (Dec. 20, 1978) for articles written by Eugene Zuch of Datel Systems, Inc. for a further discussion of sample and hold circuits.
3. Reference also made to National Semiconductor Corporation's Special Functions Data Book (1976).

TYPICAL APPLICATIONS

TYPICAL CONNECTION

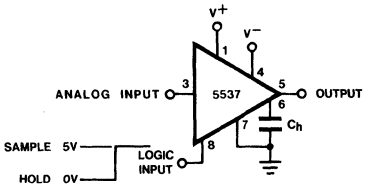

Figure 2

MULTIPLYING DAC APPLICATION

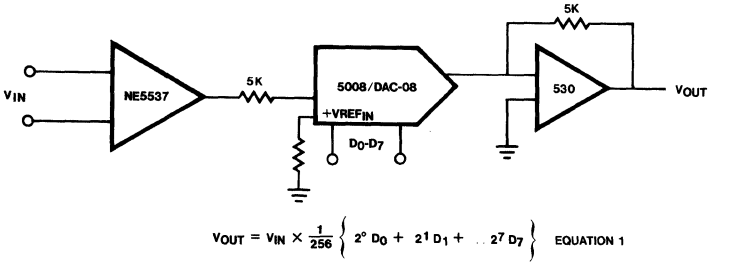

$$V_{OUT} = V_{IN} \times \frac{1}{256}\left\{2^0 D_0 + 2^1 D_1 + \ldots 2^7 D_7\right\} \quad \text{EQUATION 1}$$

Figure 3

ANALOG DATA MULTIPLEXING

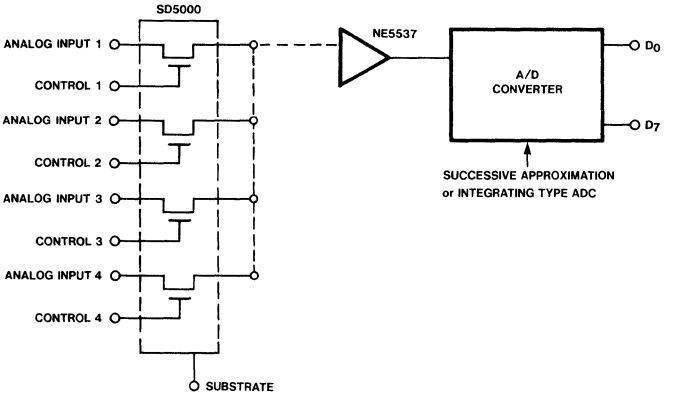

Figure 4

SECTION II
RADIO CIRCUITS

Section 11—RADIO CIRCUITS

CA3089	FM-IF System	359
MC1496/1596	Balanced Modulator-Demodulator	364
NE544/644	Servo Amplifier	367
NE5044	Programmable Seven Channel RC Encoder	373
NE5045	Seven Channel RC Decoder	376
NE5046	2-Channel RC Decoder	379
TCA440	AM Receiver Circuit	381
μA758	FM Stereo Multiplex Decoder, Phase Locked Loop	388

NEW PRODUCTS

CA3189	FM-IF System—Available 1st Quarter 1981
LM1870	FM Decoder with Stereo/Mono Switching—Available 3rd Quarter 1981

CA3089-N

DESCRIPTION

CA3089 is a monolithic integrated circuit that provides all the functions of a comprehensive FM-IF system. Figure 6 is a block diagram showing the CA3089 features, which include a three-stage FM-IF amplifier/limiter configuration with level detectors for each stage, a doubly-balanced quadrature FM detector and an audio amplifier that features the optional use of a muting (squelch) circuit.

The advanced circuit design of the IF system includes desirable features such as delayed AGC for the RF tuner, an AFC drive circuit, and an output signal to drive a tuning meter and/or provide stereo switching logic. In addition, internal power supply regulators maintain a nearly constant current drain over the voltage supply range of +8 to +18 volts.

The CA3089 is ideal for high-fidelity operation. Distortion in a CA3089 FM-IF system is primarily a function of the phase linearity characteristic of the outboard detector coil.

The CA3089 utilizes a 16-lead dual-in-line plastic package and can operate over the ambient temperature range of -40°C to +85°C.

FEATURES

- **Exceptional limiting sensitivity: 10μV typ. at -3dB point**
- **Low distortion: 0.1% typ. (with double-tuned coil)**
- **Single-coil tuning capability**
- **High recovered audio: 400mV typ.**
- **Provides specific signal for control of interchannel muting (squelch)**
- **Provides specific signal for direct drive of a tuning meter**
- **Provides delayed AGC voltage for RF amplifier**
- **Provides a specific circuit for flexible AFC**
- **Internal supply/voltage regulators**

APPLICATIONS

- **High-fidelity FM receivers**
- **Automotive FM receivers**
- **Communications FM receivers**

PIN CONFIGURATION

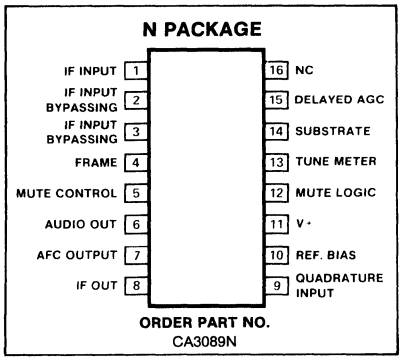

ABSOLUTE MAXIMUM RATINGS

	RATING	UNIT
DC supply voltage:		
Between terminals 11 and 4	18	V
Between terminals 11 and 14	18	V
DC Current (out of terminal 15)	2	mA
Device dissipation:		
Up to T_A = 60°C	600	mW
Above T_A = 60°C	derate linearly 6.7	mW/°C
Ambient temperature range:		
Operating	-40 to +85	°C
Storage	-65 to +150	°C
Lead temperature (during soldering):		
At distance not less than 1/32" (0.79mm) from case for 10 seconds max.	+265	°C

BLOCK DIAGRAM

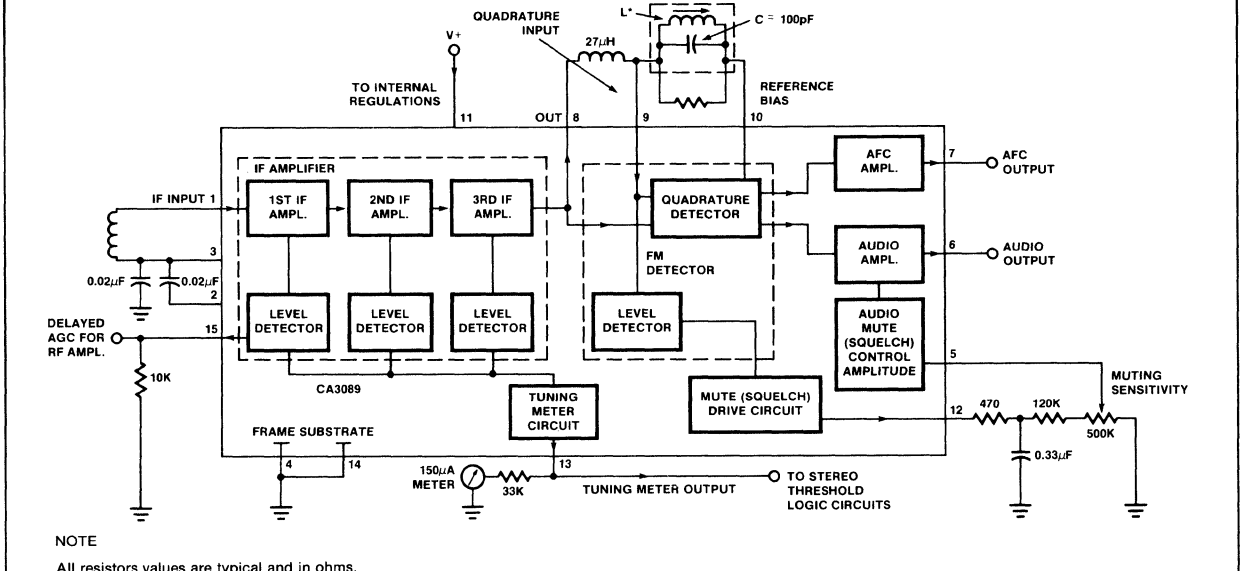

NOTE

All resistors values are typical and in ohms.
*L tunes with 100pF (C) at 10.7MHz
$Q_0 \cong 75$ (G.I. EX22741 or equivalent)

EQUIVALENT SCHEMATIC

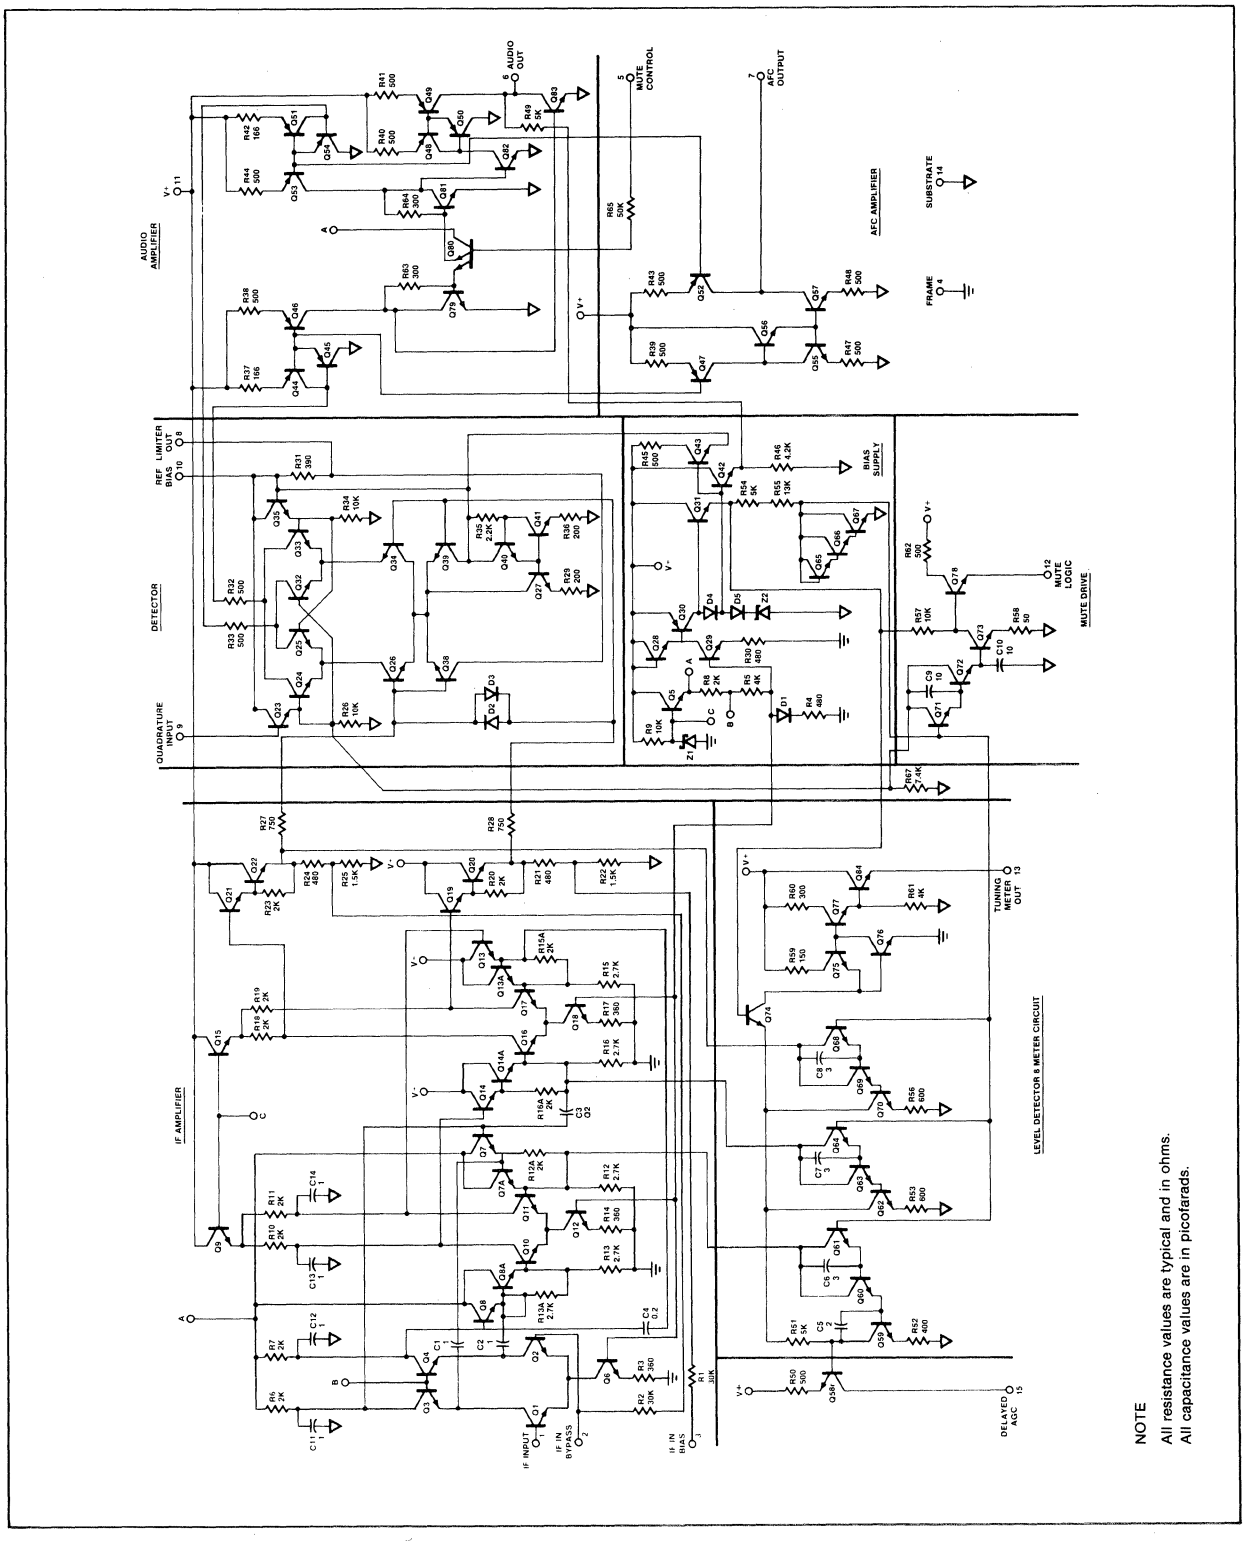

CA3089-N

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V^+ = 12V$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	CA3089			UNIT
			Min	Typ	Max	
STATIC (DC) CHARACTERISTICS						
I_{11}	Quiescent circuit current	No signal input, non-muted	16	23	30	mA
DC Voltages:[4]						
V_1	Terminal 1 (IF input)	No signal input, non-muted	1.2	1.9	2.4	V
V_2	Terminal 2 (ac return to input)	No signal input, non-muted	1.2	1.9	2.4	V
V_3	Terminal 3 (dc bias to input)	No signal input, non-muted	1.2	1.9	2.4	V
V_6	Terminal 6 (audio output)	No signal input, non-muted	5.0	5.6	6.4	V
V_7	Terminal 7 (A.F.C.)	No signal input, non-muted	5.0	5.6	6.0	V
V_{10}	Terminal 10 (dc reference)	No signal input, non-muted	5.0	5.6	6.0	V
DYNAMIC CHARACTERISTICS						
$V_{I(lim)}$	Input limiting voltage (-3dB point)[3]			10	30	μV
	AMR AM Rejection (terminal 6)[4]	$V_{IN} = 0.1V$, $F_O = 10.7MHz$, $f_{mod} = 400Hz$, AM Mod = 30%	45	55		dB
V_O	Recovered audio voltage (terminal 6)[3]		300	400	500	mV
Total harmonic distortion:[1]						
THD	Single tuned (terminal 6)[3]			0.5	1.0	%
THD	Double tuned (terminal 6)[4]	$f_{mod} = 400Hz$, $V_{IN} = 0.1$		0.1		%
S+N/N	Signal plus noise to noise ratio (terminal 6)[3]	Deviation = ±75kHz	60	67		dB
MU_{IN}	Mute input (terminal 5)	$V_5 = 2.5V$		70		dB
MU_{OUT}	Mute output (terminal 12)	$V_{IN} = 50\mu V$			.5	V
		$V_{IN} = 0V$	4.0			V
MTR	Meteroutput (terminal 13)	$V_{IN} = 0.1V$	3.5	4.5		V
		$V_{IN} = 500\mu V$	1.0	1.5		V
		$V_{IN} = 0V$			.7	V
AGC	Delayed AGC (terminal 15)	$V_{IN} = 0.1V$			.5	V
		$V_{IN} = 10\mu V$	4.0	5.0		V
THD	Double tuned (terminal 6)[4]	$f_{mod} = 400Hz$ $V_{IN} = 0.1$		0.1		%

NOTES

1. THD characteristics and Audio Level are essentiallly a function of the phase and Q characteristics of the network connected between terminals 8, 9 and 10.
2. Test circuit Figure 1.
3. Test circuit Figure 2.
4. Test circuit Figures 1 and 2.

II

TEST CIRCUITS

TYPICAL FM TUNER (With a single-tuned detector coil.)

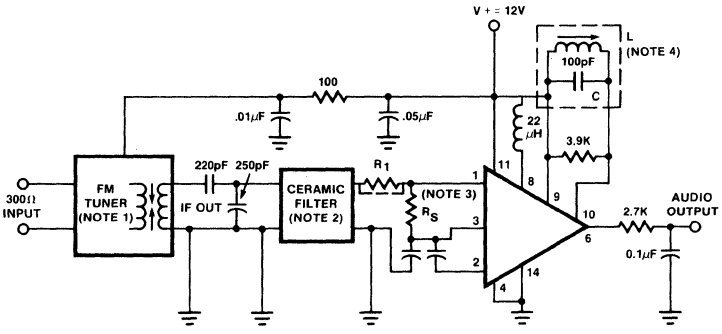

NOTES: All resistors values are typical and in ohms.

1. Waller 4SN3FIC or equivalent
2. Murate SFG 10.7mA or equivalent
3. R_S will affect stability depending on circuit layout. To increase stability R_S is decreased. Range of R_S is 330 to 50Ω, $R_1 + R_S \leq 330\Omega$
4. L tunes with 100pF (C) at 10.7MHz Q_o unloaded ≅ 75 (G.I. EX2274I or equivalent)

Performance data at f_o = 98MHz, f_{MOD} = 400Hz, deviation = ±74kHz:

-3dB limiting sensitivity	2μV (antenna level)
20dB quieting sensitivity	1μV (antenna level)
30dB quieting sensitivity	1.5μV (antenna level)

SYSTEM DESIGN CONSIDERATIONS

The CA3089 is a very high gain device and therefore careful consideration must be given to the layout of external components to minimize feedback. The input by-pass capacitors should be located close to the input terminals and the values should not be large nor should the capacitors be of the type which might introduce inductive reactance to the circuit. An example of good by-pass capacitors would be ceramic disc with values in the range of .01 to .05 microfarad.

The input impedance of the CA3089 is approximately 10,000 ohms. It is *not* recommended to match this impedance. The value of the input termination resistor should be as low as possible without degrading system operation. The lower the value of this resistor the greater the system stability. An input terminating resistor between 50 and 100 ohms is recommended.

TYPICAL PERFORMANCE CHARACTERISTICS

MUTING ACTION, TUNER AGC
(Tuning meter output as a function of input signal voltage.)

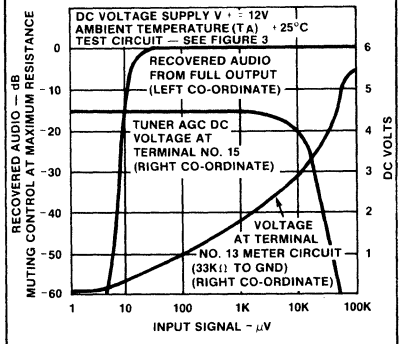

AFC CHARACTERISTICS
(Current at Term. 7 as a function of change in frequency.)

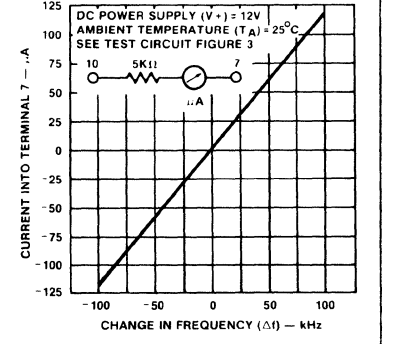

TEST CIRCUITS

TEST CIRCUIT
(Using a single-tuned detector coil.)

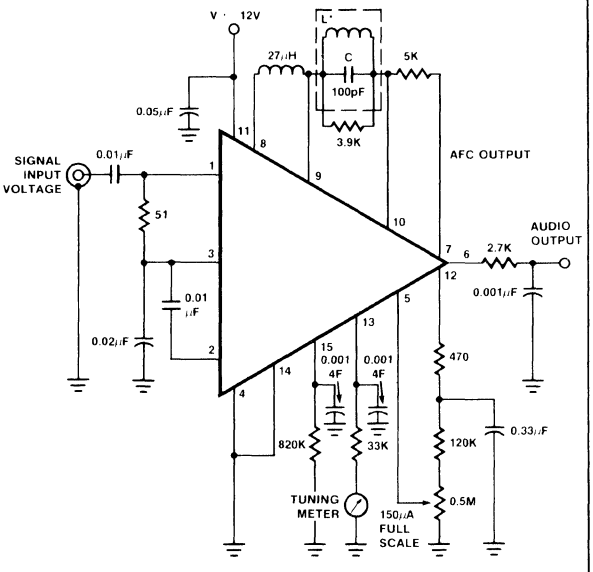

*NOTE

L tunes with 100pF (C) at 10.7MHz.
All resistors values are typical and in ohms.
Q_0 (unloaded) ≅ 75 (G.I. automatic mfg. div. EX22741 or equivalent).

Figure 1

TEST CIRCUIT
(Using a double-tuned detector coil.)

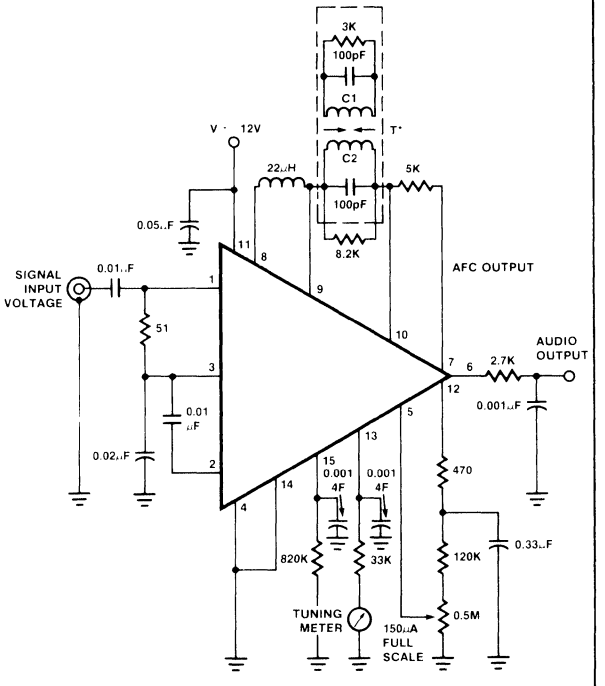

*NOTE: All resistors values are typical and in ohms.

T: Pri. - Q_0 (unloaded) ≅ 75 (tunes with 100pF (C1) 20 † of 34e on 7/32" dia. form)
Sec. - Q_0 (unloaded) ≅ 75 (tunes with 100pF (C2) 20 † of 34e on 7/32" dia. form)
kQ (percent of critical coupling) > 70%
(Adjusted for coil voltage V_C) = 150mV
Above values permit proper operation of mute (squelch) circuit "E" type slugs, spacing 4mm

Figure 2

MC1496-F,N,H
MC1596-F,H

DESCRIPTION

The MC1496 is a monolithic Double-Balanced Modulator/Demodulator designed for use where the output voltage is a product of an input voltage (signal) and a switched function (carrier). The MC1596 will operate over the full military temperature range of −55°C to +125°C. The MC 1496 is intended for applications within the range of 0°C to +70°C.

APPLICATIONS

- **Suppressed carrier and amplitude modulation**
- **Synchronous detection**
- **FM detection**
- **Phase detection**
- **Sampling**
- **Single sideband**
- **Frequency doubling**

FEATURES

- **Excellent carrier suppression**
  - **65dB typ @ 0.5MHz**
  - **50dB typ @ 10MHz**
- **Adjustable gain and signal handling**
- **Balanced inputs and outputs**
- **High common-mode rejection—85dB typ**

EQUIVALENT SCHEMATIC

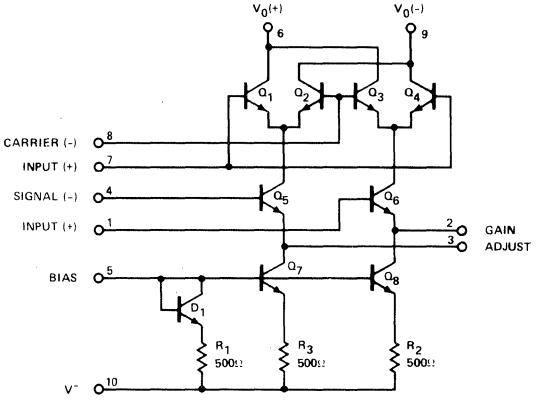

(Pinout for H pkg. shown)

PIN CONFIGURATIONS

F, N PACKAGE

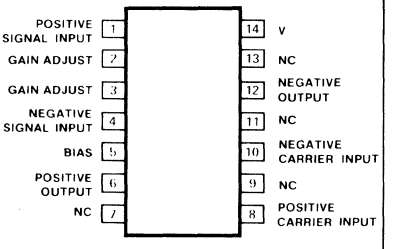

ORDER PART NO.
MC1496F,N
MC1596F

H PACKAGE

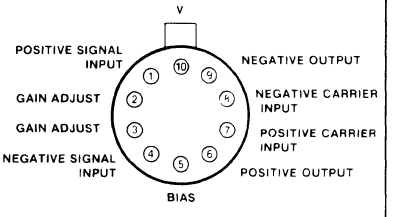

ORDER PART NO.
MC1496H
MC1596H

*Metal cans (H) not recommended for new designs

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Applied voltage[1,2]	30	V
Differential input signal (V_7-V_8)	±5.0	V
Differential input signal (V_4-V_1)	(5 ± I_5 R_e)	V
Input signal (V_2-V_1, V_3-V_4)	5.0	V
Bias current (I_5)	10	mA
Power dissipation (pkg. limitation)		
N package	900	mW
Operating temperature range		
MC1496	0 to +70	°C
MC1596	-55 to +125	°C
Storage temperature range	-65 to +150	°C

NOTES

1. Voltage applied between pins 6-7, 8-1, 9-7, 9-8, 7-4, 7-1, 8-4, 6-8, 2-5, 3-5.
2. Pin number references pertain to H package pinout only.

MC1496-F,N,H
MC1596-F,H

DC ELECTRICAL CHARACTERISTICS

$V^+ = +12Vdc$, $V^- = -8.0Vdc$, $I_5 = 1.0mAdc$, $R_L = 3.9k\Omega$, $R_e = 1.0k\Omega$, $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	MC1596			MC1496			UNIT
			Min	Typ	Max	Min	Typ	Max	
	Single-ended input impedance	Signal port, f = 5.0MHz							
R_{ip}	Parallel input resistance			200			200		kΩ
C_{ip}	Parallel input capacitance			2.0			2.0		pF
	Single-ended output impedance	f = 10MHz							
R_{op}	Parallel output resistance			40			40		kΩ
C_{op}	Parallel output capacitance			5.0			5.0		pF
	Input bias current								μA
I_{bS}	$I_{bS} = \frac{I_1 + I_4}{2}$			12	25		12	30	
I_{bC}	$I_{bS} = \frac{I_7 + I_8}{2}$			12	25		12	30	μA
	Input offset current								μA
I_{ioS}	$I_{ioS} = I_1 - I_4$			0.7	5.0		0.7	7.0	
I_{ioC}	$I_{ioC} = I_7 - I_8$			0.7	5.0		0.7	7.0	μA
T_CI_{io}	Average temperature coefficient of input offset current			2.0			2.0		nA/°C
	Output offset current								
I_{oo}	$I_6 - I_9$			14	50		15	80	μA
T_CI_{oo}	Average temperature coefficient of output offset current			90			90		nA/°C
	Common-mode quiescent								
V_o	Output voltage (Pin 6 or Pin 9)			8.0			8.0		Vdc
	Power supply current								mAdc
I_{D+}	$I_6 + I_9$			2.0	3.0		2.0	4.0	
I_{D-}	I_{10}			3.0	4.0		3.0	5.0	
P_D	DC power dissipation			33			33		mW

NOTE

Pin number references pertain to H package pinout only.

CARRIER REJECTION AND SUPPRESSION

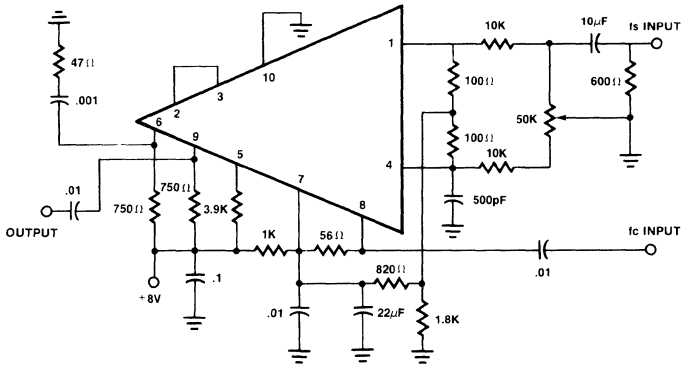

SIGNAL GAIN AND OUTPUT SWING

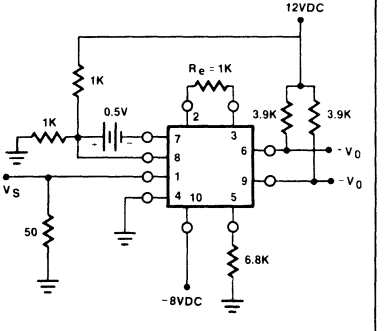

MC1496-F,N,H
MC1596-F,H

AC ELECTRICAL CHARACTERISTICS

$V^+ = +12Vdc$, $V^- = -9.0Vdc$, $I_5 = 1.0mAdc$, $R_L = 3.9k\Omega$, $R_e = 1.0k\Omega$, $T_A = +25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	MC1596			MC1496			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{CFT}	Carrier feedthrough	V_C = 60mVrms sinewave and offset adjusted to zero							
		f_C = 1.0kHz		40			40		μVrms
		f_C = 10MHz		140			140		
		V_C = 300mVp-p squarewave:							
		Offset adjusted to zero f_C = 1.0kHz		0.04	0.2		0.04	0.4	mVrms
		Offset not adjusted f_C = 1.0kHz		20	100		20	200	
V_{CS}	Carrier suppressions	f_S = 10kHz, 300mVrms sinewave							
		f_C = 500kHz, 60mVrms sinewave	50	65		40	65		dB
		f_C = 10MHz, 60mVrms sinewave		50			50		
BW_{3dB}	Transadmittance bandwidth (Magnitude) (R_L = 50Ω)	Carrier input port, V_C = 60mVrms sinewave f_S = 1.0kHz, 300mVrms sinewave		300			300		MHz
		Signal input port, V_S = 300mVrms sinewave $\|V_C\|$ = 0.5Vdc		80			80		MHz
A_{VS}	Signal gain	V_S = 100mVrms; f = 1.0kHz $\|V_C\|$ = 0.5Vdc	2.5	3.5		2.5	3.5		V/V
CMV	Common-mode input swing	Signal port, f_s = 1.0kHz		5.0			5.0		Vp-p
ACM	Common-mode gain	Signal port, f_S = 1.0kHz $\|V_C\|$ = 0.5Vdc		-85			-85		dB
DV_{OUT}	Differential output voltage swing capability			8.0			8.0		Vp-p

NOTE

Pin number references pertain to H package pinout only.

CARRIER REJECTION AND SUPPRESSION

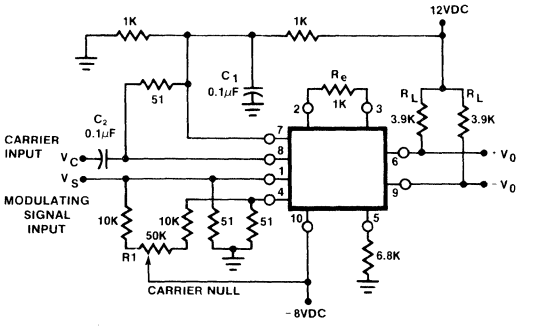

NE544/644-N,W
NE544-D

DESCRIPTION

The NE544 is a servo amplifier and pulse-width demodulator with internal motor drive transistors. It is designed for remote control applications in digital proportional systems but can be used in many other closed loop position control applications. It incorporates a linear one shot for improved positional accuracy and outputs for external pnp motor drive transistors.

FEATURES

- **500mA load current capability**
- **Bidirectional bridge output with single power supply**
- **Low standby power drain**
- **Adjustable deadband and trigger thresholds**
- **High linearity, 0.5% maximum error**
- **Output drive for external PNP transistors (optional)**
- **Wide supply voltage range**

BLOCK DIAGRAM

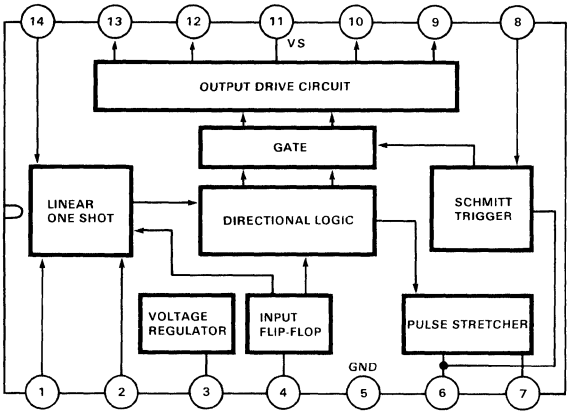

PIN CONFIGURATIONS

D,N PACKAGE

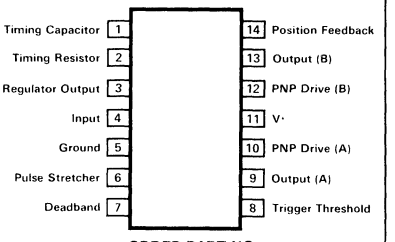

ORDER PART NO.
NE544N
NE544D

N PACKAGE

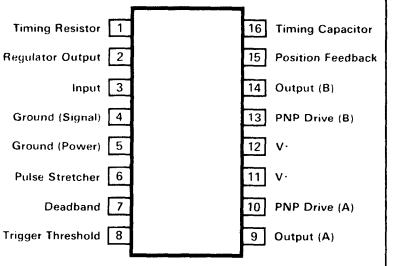

Order part no. NE644N

W PACKAGE*



*Pinout same as 644N package
Order part no. NE644W

ABSOLUTE MAXIMUM RATINGS $T_A = 25°C$ unless otherwise specified.

	PARAMETER	RATING	UNIT
V+	Supply voltage	6.0	V
I_O	Output current	500	mA
T_A	Operating temperature	-20 to +75	°C
T_{stg}	Storage temperature	-65 to +150	°C

II

NE544/644-N,W
NE544-D

EQUIVALENT CIRCUIT SCHEMATIC

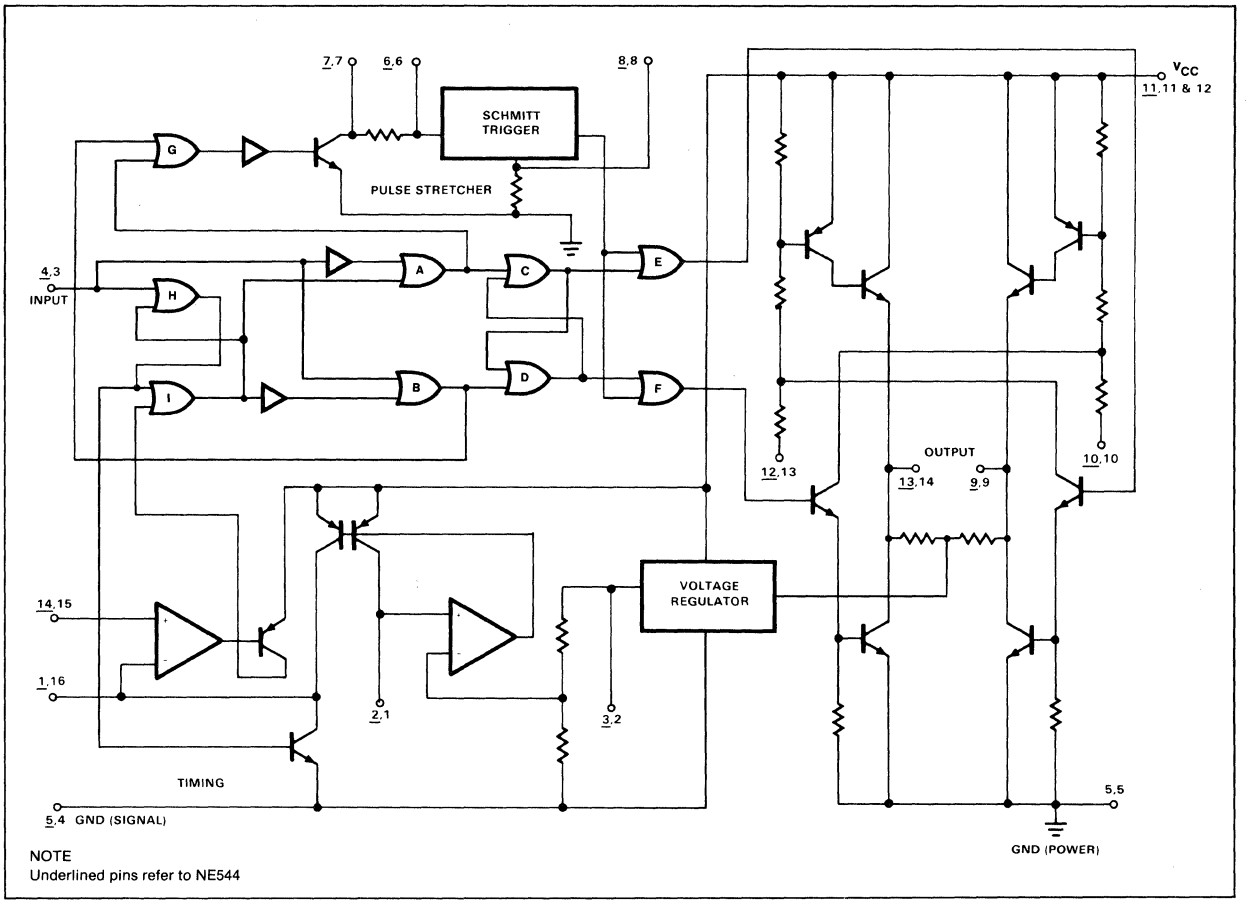

NOTE
Underlined pins refer to NE544

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_S = 4.8V$ unless otherwise specified.

PARAMETER			TEST CONDITIONS	LIMITS			UNIT
				Min	Typ	Max	
V_{CC}	Supply voltage			3.2	4.8	6	V
I_{CC}	Supply current	Pin 11	Quiescent	4.2	5.5	10	mA
V_{TH}	Input threshold	Pin 4					V
	On				1.5		
	Off				1.4		
Z_{IN}	Input resistance	Pin 4			18		kΩ
	Output voltage						V
V_{OL}	Low		Pin 9 or 13, I_L = 400mA		0.3		
V_{OH}	High				3.9		
V_{REG}	Regulated voltage	Pin 3		2.1	2.5	2.9	V
ΔV_{REG}	Regulation	Pin 3	3.5V ≤ V_{CC} ≤ 6V		10		mV/V
	Minimum dead band	Pin 7	R_{DB} = 0		1		μs
	One shot temperature coefficient				.01		%/°C
	Standby output voltage		Pin 9 and 13		2.5		V
	PNP drive current		Pin 10 and 12		20		mA

NE544/644-N,W
NE544-D

TYPICAL CONNECTION OF NE544N FOR LINEAR ONE SHOT TIMING

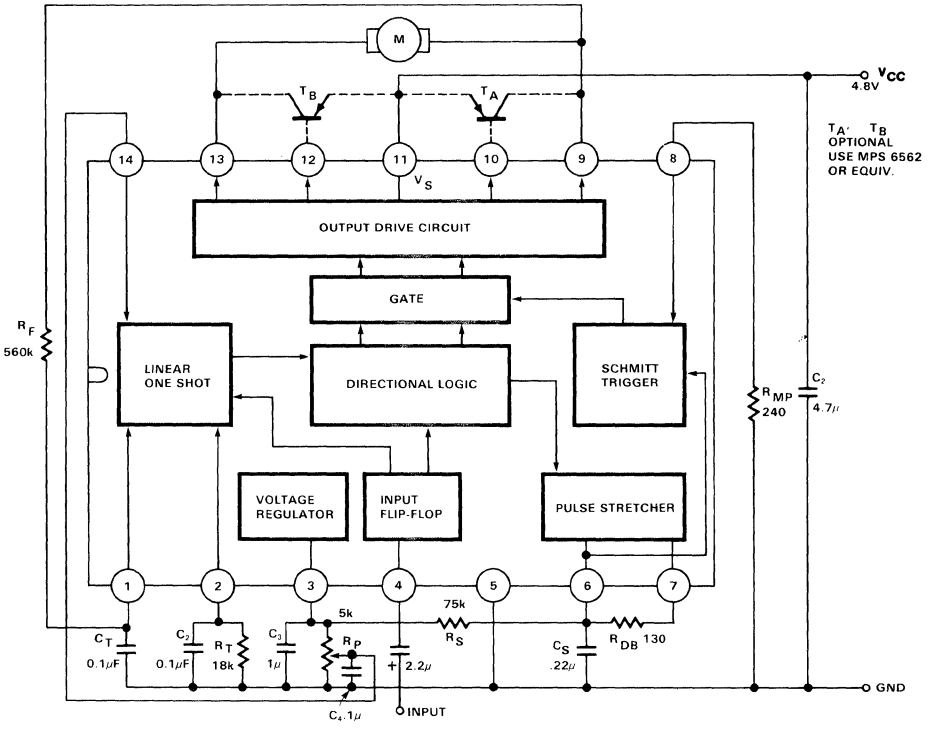

II

NE544/644-N,W
NE544-D

PC BOARD—N PACKAGE

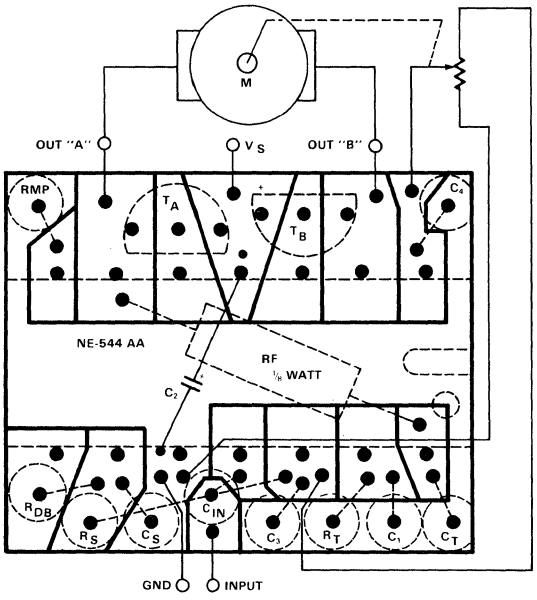

Typical PC Board Layout
Bottom View—4X

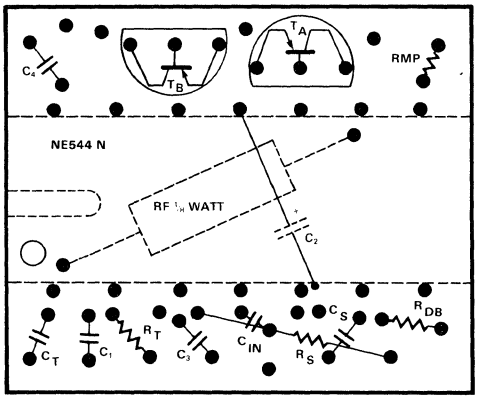

Parts Layout
Top View

PC BOARD—W PACKAGE

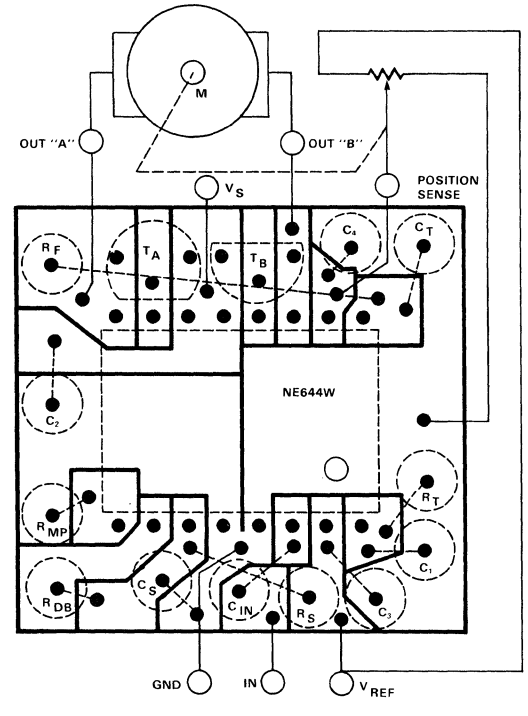

PC Board Layout
Bottom View—4X

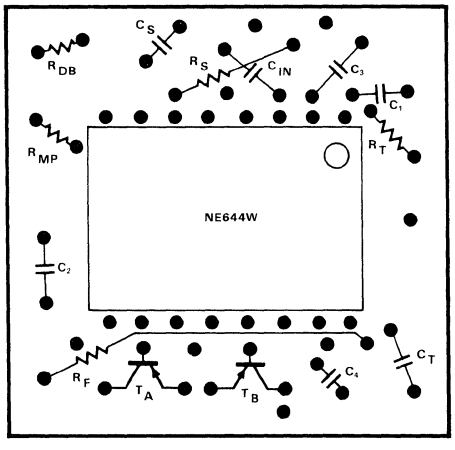

Parts Layout
Top View

NE544/644-N,W
NE544-D

TYPICAL CONNECTION OF NE644W AND NE644N FOR LINEAR ONE SHOT TIMING

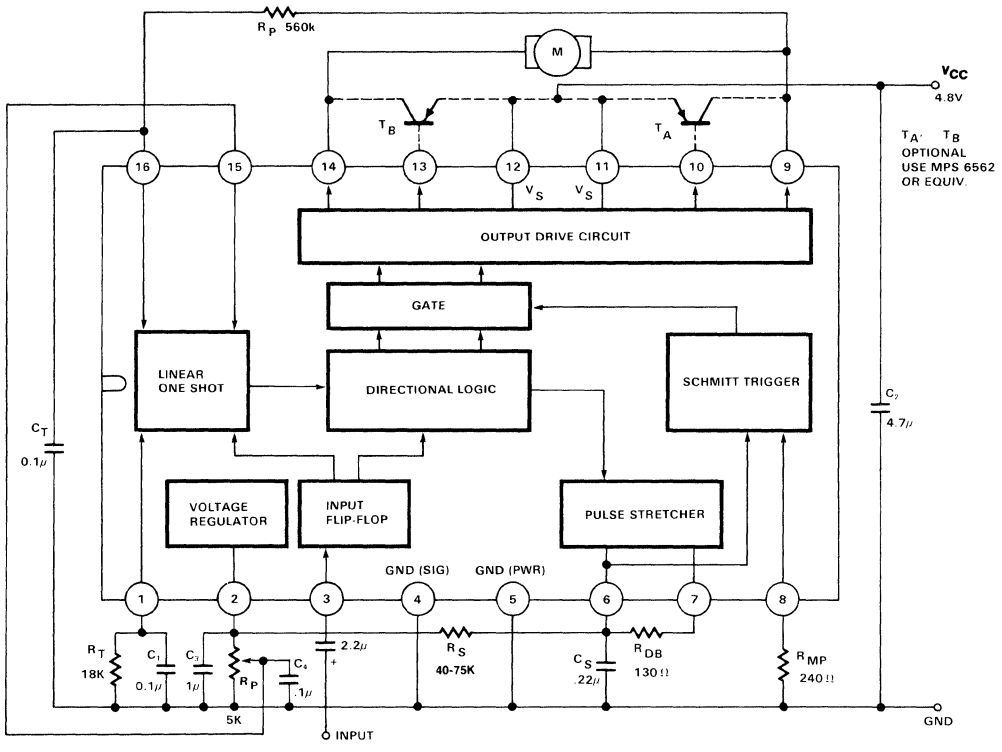

NE544/644-N,W
NE544-D

TYPICAL PERFORMANCE CHARACTERISTICS

MAXIMUM DISSIPATION vs AMBIENT TEMPERATURE

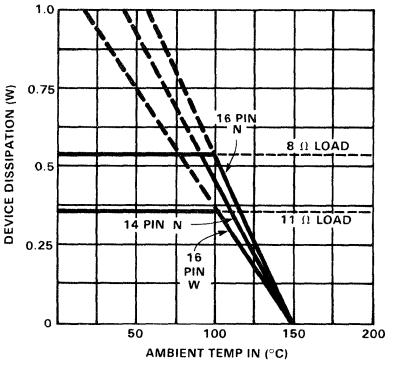

SUPPLY CURRENT vs SUPPLY VOLTAGE

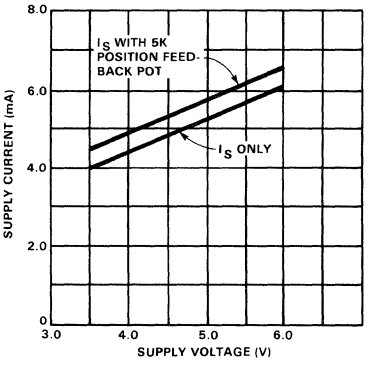

OUTPUT CURRENT vs LOAD RESISTANCE

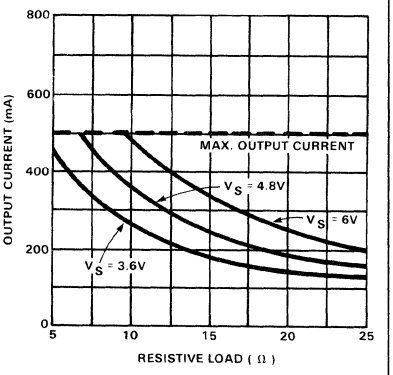

OUTPUT VOLTAGE vs LOAD CURRENT

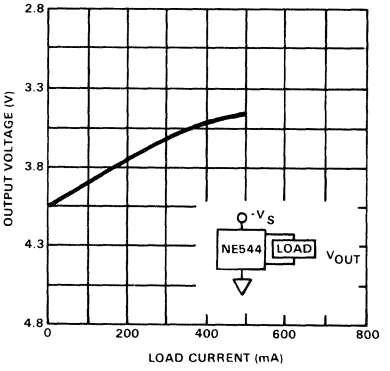

INPUT PULSE WIDTH vs FEEDBACK POT OUTPUT

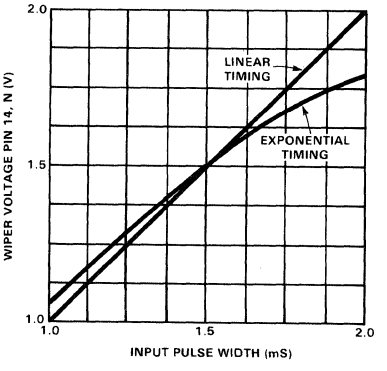

INPUT PULSE vs SERVO TRAVEL

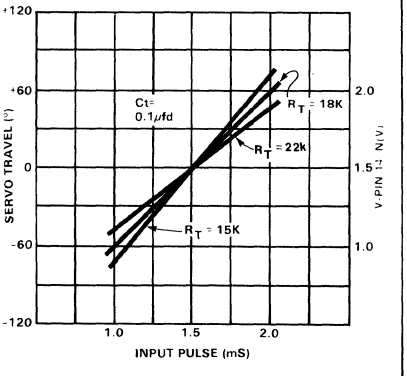

NE5044-D,N

DESCRIPTION

The NE5044 is a programmable parallel input, serial output pulsewidth encoder. A multiplexed dual linear ramp technique is used to allow up to 7 inputs to be converted to a serial pulsewidth modulated signal with excellent linearity and minimal crosstalk. Fixed or variable frame rates can be used, externally controlled, for ease of demodulation. An onboard 5V regulator eliminates power supply sensitivities and provides up to 20mA current capability for driving external loads.

FEATURES

- **3 to 7 channels, externally selectable**
- **Constant current dual linear ramp for linearity better than .3%**
- **Internal voltage regulator for low drift**
- **Wide supply range 4.5 – 16V**
- **Fixed or variable frame rate set by external R-C**
- **External control for channel gain or range**
- **Versatile applications; exponential rates, mixing, dual rate, reversing etc.**
- **Compatible with all transmission mediums**

APPLICATIONS

- **Radio controlled aircraft, cars, boats, trains**
- **Industrial controllers**
- **Remote controlled entertainment systems**
- **Security systems**
- **Instrumentation recorders/controls**
- **Remote Analog/digital data transmission**
- **Automotive sensor systems**

PIN CONFIGURATION

D,N PACKAGE



ORDER PART NO.
NE5044D
NE5044N

ABSOLUTE MAXIMUM RATINGS[1]

PARAMETER	RATING	UNIT
V_{CC}, Supply voltage	17	V
Regulator ouput current	−25	mA
Serial output peak current	30	mA
Constant current generator	−1	mA
Parallel inputs, range input	0-V_{REG}	V
One shot input, frame generator input	0-V_{REG}	V
Operating temperature	−20 to +75	°C
Storage temperature	−65 to +150	°C

NOTE
1. T_A = 25° unless otherwise stated.

BLOCK DIAGRAM

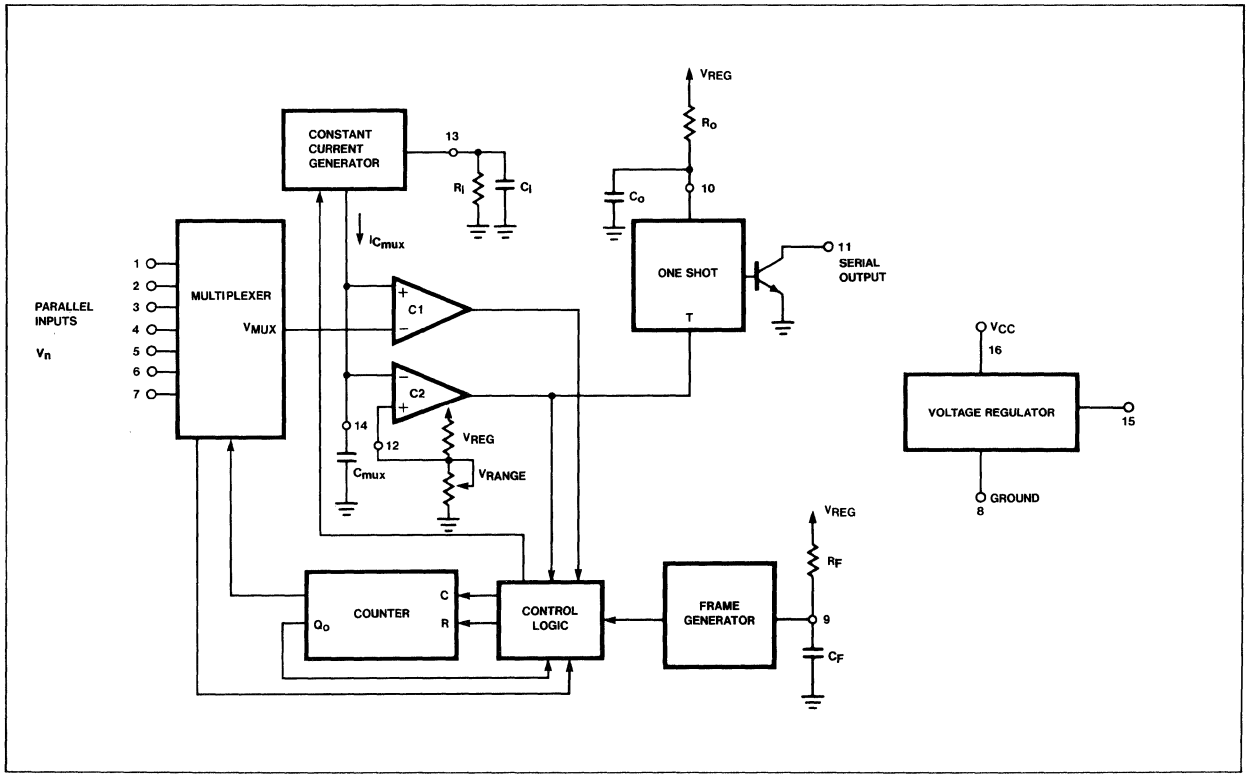

DC ELECTRICAL CHARACTERISTICS

Test conditions T_A = 25°C, V_{CC} = 10V using Test Circuit A unless otherwise stated.

PARAMETER		TEST CONDITIONS	NE 5044			UNIT
			Min	Typ	Max	
	POWER SUPPLY REQUIREMENTS[1]					
	Power supply voltage range		4.5		16	V
	Power supply current	Excluding control pots and serial output currents		11	15	mA
	VOLTAGE REGULATOR					
V_{REG}	Output voltage		4.5	5.0	5.5	V
	Output current	$V_R \geq 4.5V$			−20	mA
	Line regulation	$7 \leq V_{CC} \leq 16$		.005	0.2	V/V
	MULTIPLEXER					
	Input current	V_n = 2.5v		±30	±200	nA
	Input voltage range	$V_n - V_{Range} \geq .75V$	1.5		5	V
	Crosstalk			±1	±5	μs
	OUTPUT PULSE					
T_n	Position	$R_I \bullet C_{mux}$ = 1.25ms $V_n = .5V_{REG}$; $V_{RANGE} = .2V_{REG}$	1350	1500	1650	μs
	Position linearity error			5		μs
	Position tempco	0°C ≤ T_A ≤ 70°C.		.15		μs/°C
	Position PSR	6V ≤ V_{CC} ≤ 16V		.5	1	μs/V
T_O	Width	R_OC_O = 300μs	240	285	330	μs
	Saturation voltage	I_O = 25mA		.6	1	V
I_{11}	Leakage current			.05	50	μA
	Range input voltage	R_I = 50kΩ	.75			V
		R_I = 25kΩ	1.00			V
	Frame time (Fixed)	R_FC_F = 30ms	17	20	23	ms
	Inhibit threshold				.4	V

NOTE

1. At supply voltages exceeding 12 V, a current limiting resistor of 20 to 50Ω in series with V_{CC} is recommended.

OUTPUT PULSE WIDTH (T_n) vs INPUT VOLTAGE (V_n)

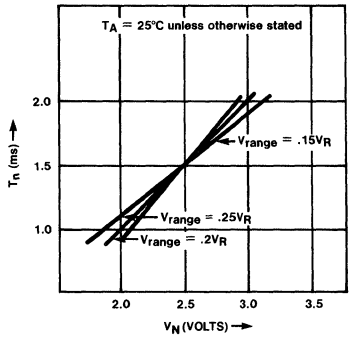

FRAME TIME (T_F) vs R_F



OUTPUT ONESHOT TIME (T_O) vs R_O

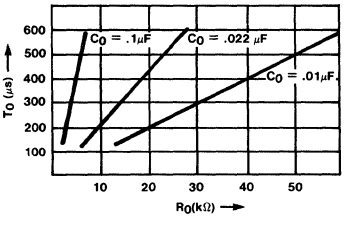

OUTPUT SATURATION VOLTAGE vs OUTPUT CURRENT

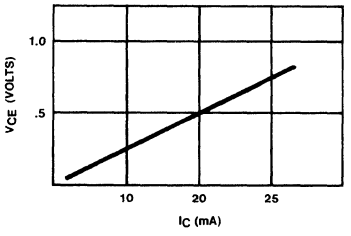

CONSTANT CURRENT vs R_I

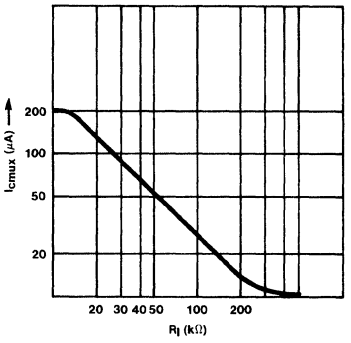

TEST CIRCUIT A

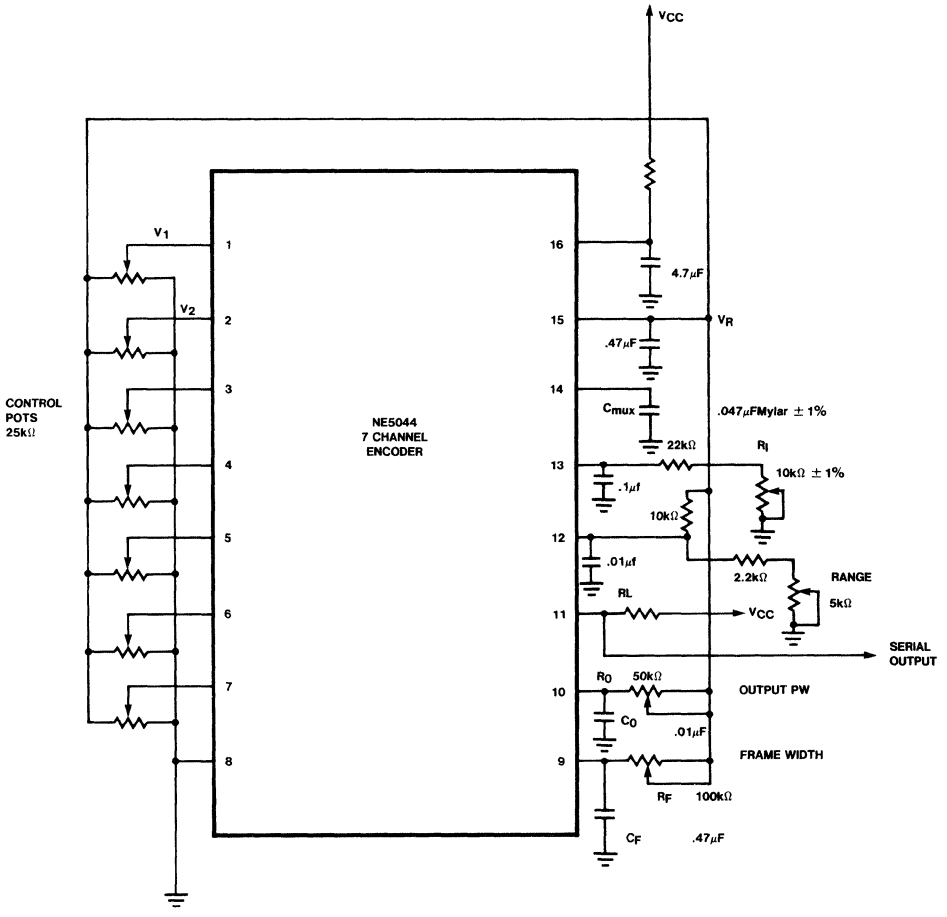

NE5045-D,N

DESCRIPTION

The NE5045 is a serial input, parallel output, decoder intended for applications in pulse width or pulse position modulation systems. The serial input pulse, either positive or negative, is shaped and amplified before being fed to the counter/decoder. An integrating type sync. separator detects pulses greater than $T_W = R_S C_S$. The amplified input pulse triggers an internal one-shot (minimum pulse) which in turn clocks the counter-decoder, thereby enhancing system noise rejection. A missing pulse detector resets the decoder during the sync. pause. An internal voltage regulator supplies power for the radio receiver providing excellent isolation from the power supply as well as the decoder logic.

APPLICATIONS

- **Radio controlled aircraft, cars, boats, trains**
- **Industrial controllers**
- **Remote controlled entertainment systems**
- **Security systems**
- **Instrumentation recorders/controls**
- **Remote Analog/digital data transmission**
- **Automotive sensor systems**

PIN CONFIGURATION

D,N PACKAGE

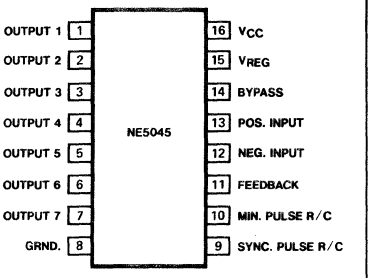

ORDER PART NO.
NE5045N
NE5045D

FEATURES

- **Decodes up to 7 channels**
- **High gain input amplifier**
- **Externally set sync. pause and minimum pulse**
- **Wide supply voltage range, 3.6V–8V.**
- **Positive or negative pulse inputs**
- **Noise and flutter rejection**
- **Outputs reset to zero without inputs**
- **Compatible with all transmission mediums**

ABSOLUTE MAXIMUM RATINGS[1]

PARAMETER	RATING	UNIT
V_{CC}, Supply voltage	10	V
Regulator output current	−25	mA
Decoded output current	±5	mA
Pause input voltage	0 to V_R	V
Input amplifier voltage	0 to V_R	V
Operating temperature	−20 to +75	°C
Storage temperature	−65 to +150	°C

NOTE
1. T_A = 25°C unless otherwise stated

BLOCK DIAGRAM

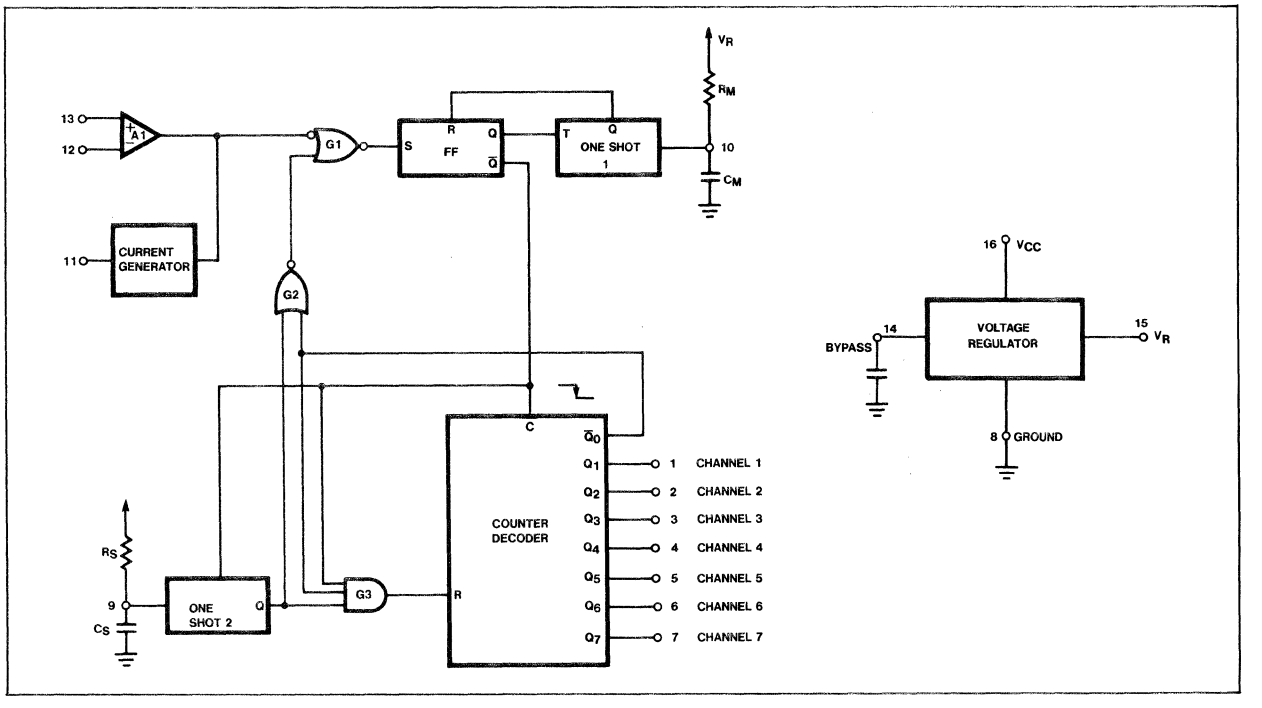

DC ELECTRICAL CHARACTERISTICS

Standard conditions: (T_A = 25°C, V_{CC} = 5.0V unless otherwise stated), using Test Circuit #1

	PARAMETER	TEST CONDITIONS	NE5045 Min	NE5045 Typ	NE5045 Max	UNIT
	POWER SUPPLY REQUIREMENTS					
	Power supply voltage range	Test circuit #1	3.6		8.0	V
	Power supply current	Excluding input bias current		9.0	14.0	mA
	VOLTAGE REGULATOR					
	Output voltage		3.7	4.1	4.5	V
V_R	Output current	$V_R \geq 3.7V$			−15	mA
	Line regulation	V_{CC} = 6V to 8V		.01	.05	V/V
	Voltage drop	V_{CC} = 4V, I_R = −10mA			1.3	V
	INPUT AMPLIFIER					
	Input bias current			10	100	nA
	Input voltage range		2.0		4.0	V
	Open loop gain			60		dB
	Feedback current		100	200	400	μA
	Detection threshold	Test circuit #1, ΔV12 & 13		8	20	mV
T_S	Sync. pause time	$R_S C_S$ = 6.0ms	5.1	6.0	6.9	ms
T_M	Minimum pulse time	$R_m C_m$ = 500μs	405	475	545	μs
	OUTPUTS-ALL CHANNELS					
	V_{OL}	I_{SINK} = 1mA		.25	.5	V
	V_{OH}	I_{SOURCE} = 2mA	2.7			V

V_{OL} vs SINK CURRENT AND V_{OH} vs SOURCE CURRENT



MINIMUM PULSE TIME, T_M vs R_M, C_M

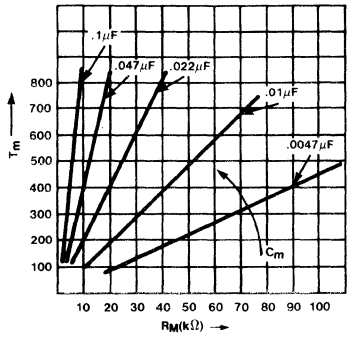

SYNC. PAUSETIME, T_S vs R_SC_S

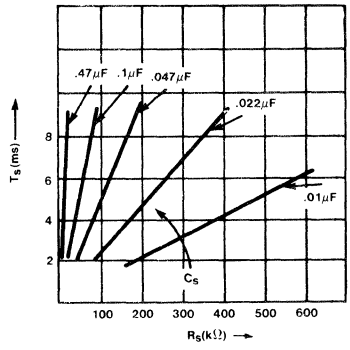

REGULATOR VOLTAGE vs LOAD CURRENT



TEST CIRCUIT #1

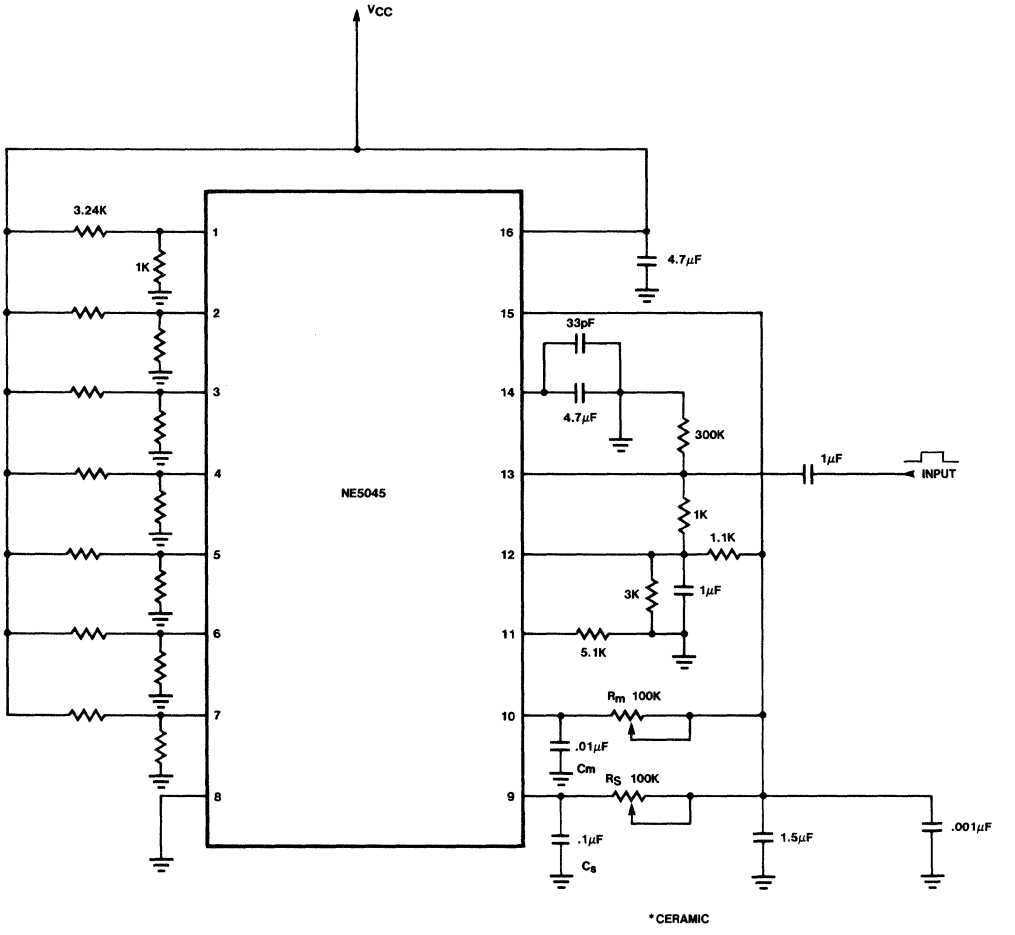

NE5046-N

DESCRIPTION

The NE5046 is a serial input parallel output decoder designed for 2 channel digital proportional pulse width or pulse position modulation systems. The detection threshold is internally set and has hysteresis to prevent false triggering on noise. In a typical application, the serial input from the receiver is processed through an amplifier and pulse shaper, then converted to parallel output with a shift register. An internal sync separator detects the sync pause and clears the shift register. An internal voltage regulator provides power for the decoder and can be used to supply power for a radio receiver.

FEATURES

- **High gain input amplifier with hysteresis**
- **Externally adjustable sync separator**
- **Wide supply voltage range 3.6V–8V**
- **Noise and flutter rejection**
- **Outputs reset to zero without input**
- **Compatible with all transmission mediums**

APPLICATIONS

- **Radio-controlled aircraft, cars, boats, trains**
- **Industrial controllers**
- **Remote-controlled entertainment systems**
- **Security systems**
- **Instrumentation recorders/controls**
- **Remote Analog/digital data transmission**
- **Automotive sensor systems**

PIN CONFIGURATION

N PACKAGE



ORDER NE5046N
2 CHANNEL DECODER

ABSOLUTE MAXIMUM RATINGS[1]

PARAMETER	RATING	UNIT
V_{CC}, Supply voltage	10	V
Regulator output current	−25	mA
Decoded output current	±5	mA
Sync pause input	0 to V_R	V
Input amplifier voltage	0 to V_R	V
Input amplifier current	±1	mA
Operating temperature	−20 to +75	°C
Storage temperature	−65 to +150	°C

NOTE
1. T_A = 25°C unless otherwise stated.

BLOCK DIAGRAM

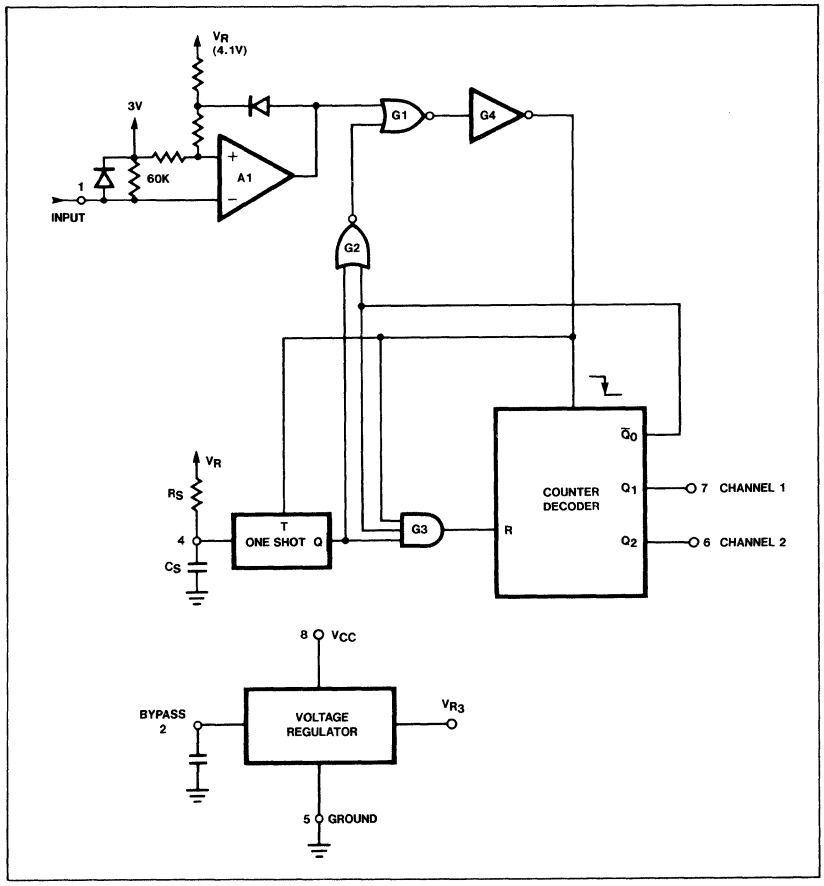

DC ELECTRICAL CHARACTERISTICS Test Conditions: T_A = 25°C, V_{CC} = 5V, Test Circuit 1, unless otherwise stated.

PARAMETER	TEST CONDITIONS	NE5046			UNIT
		Min	Typ	Max	
V_{CC} supply voltage		3.6	5.0	8.0	V
Power supply current			6.0	9.0	mA
Regulator output voltage		3.0	4.1	4.5	V
Regulator output current	$V_R \geq 3.6V$			−15	mA
Regulator line regulation	V_{CC} = 6V to 8V		.01	.05	V/V
Regulator voltage drop	V_{CC} = 4V, I_R = −10mA			1.0	V
Input threshold voltage			.15		V
Sync. pause time	$R_S C_S$ = 6ms		5.1	6.0	6.9	ms
Output voltage both channels				.25		
V_{OL}	I_{SINK} = 1mA				.5	V
V_{OH}	I_{SOURCE} = 2mA	2.7				V

TEST CIRCUITS

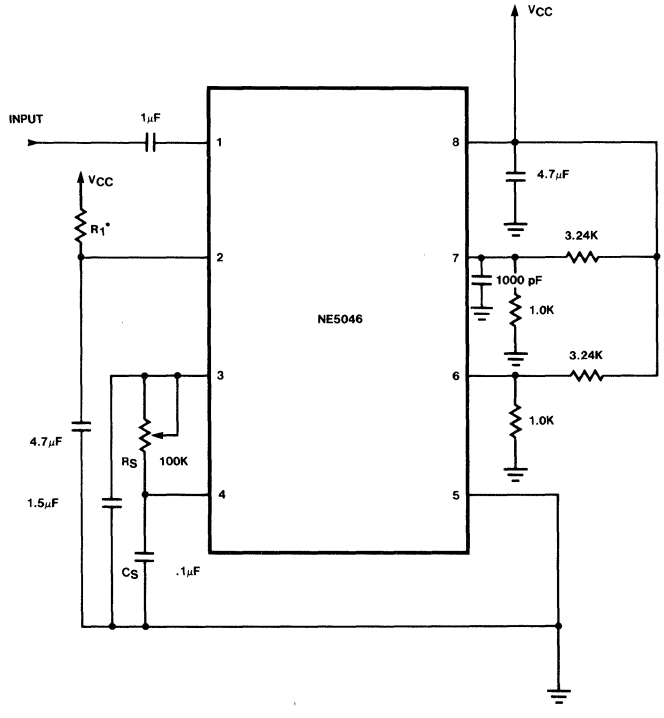

NOTE
*A 2kΩ to 10kΩ resistor may be required to insure start-up under extreme load current and supply voltage conditions at low temperatures.

TCA440-N

DESCRIPTION

TCA440 is a monolithic IC, especially developed for AM receivers up to 30MHz. It includes a RF stage with AGC, a balanced mixer, separate oscillator and an IF amplifier with AGC. Because of its low current consumption and of its internal stabilization the TCA440 is perfectly suited for battery operated portables, car and home radios.

FEATURES

- **Balanced circuit**
- **Separately controllable prestage**
- **Multiplicative push-pull mixer with separate oscillator**
- **High signal handling capability even with 4.5V supply voltage**
- **100dB feedback control range in 5 stages**
- **Direct connection for tuning meter**
- **Minimum external components**

PIN CONFIGURATION

N PACKAGE

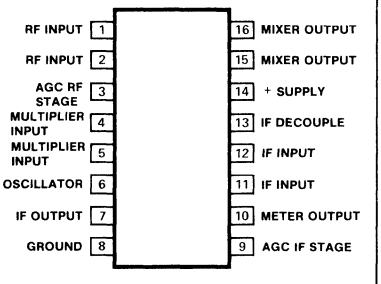

ORDER PART NO.
TCA440N

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_{CC}	Supply voltage	15	V
T_{amb}	Ambient temperature in operation	-15 to +80	°C
T_s	Storage temperature	-30 to +125	°C
V_{CC}	Range of operation	4.5 to 15	V

BLOCK DIAGRAM

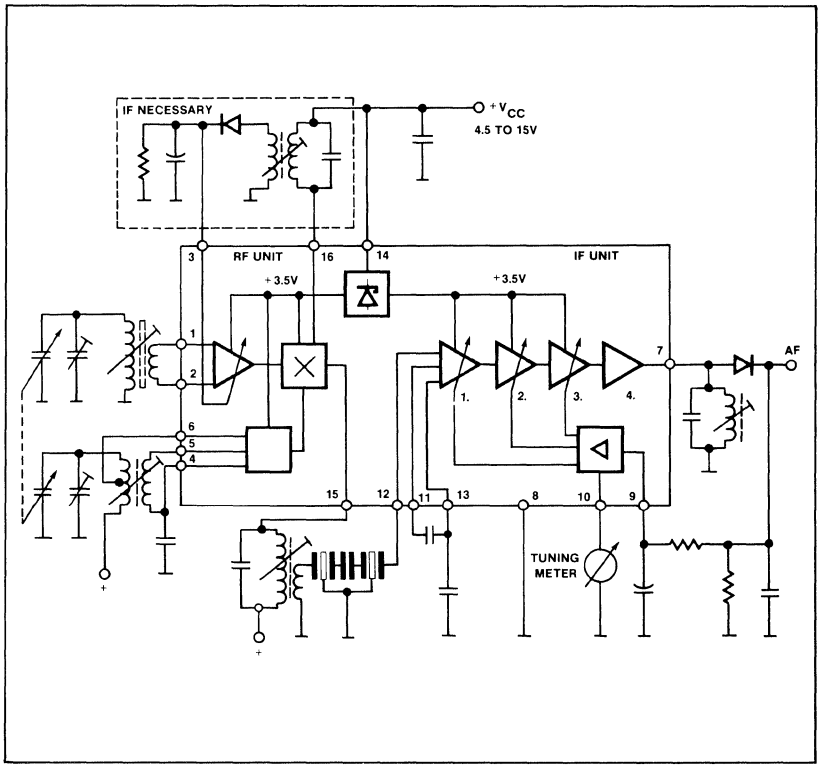

TUNING METER

Recommended instruments:

or $500\mu A$ ($R_I = 800\Omega$)
$300\mu A$ ($R_I = 1.5k\Omega$)

The IC offers at pin 10 a tuning meter voltage of 600 mV_{EMP} max. with a source impedance of approx. 400Ω.

FUNCTION

As pictured in the circuit diagram the TCA440 comprises two control loops independent of each other which control the RF stage and the IF stages. By AGCing the RF stage, excellent signal handling is obtained. A voltage of $2.6V_{pp}$ on the IC input can be handled with very low distortion. The push-pull mixer operates multiplicatively, thereby resulting in few harmonic mixing products and whistling points. The oscillator which is separated from the mixer is also apted excellently for short waves. From the AGC of the RF amplifier a voltage is derived for a tuning meter which can be connected directly to the meter. The symmetric composition of the circuit provides high stability against oscillation and, at the same time, an AGC range of more than 100dB. The bridge circuit of the mixer provides good isolation of the oscillator.

II

EQUIVALENT SCHEMATIC

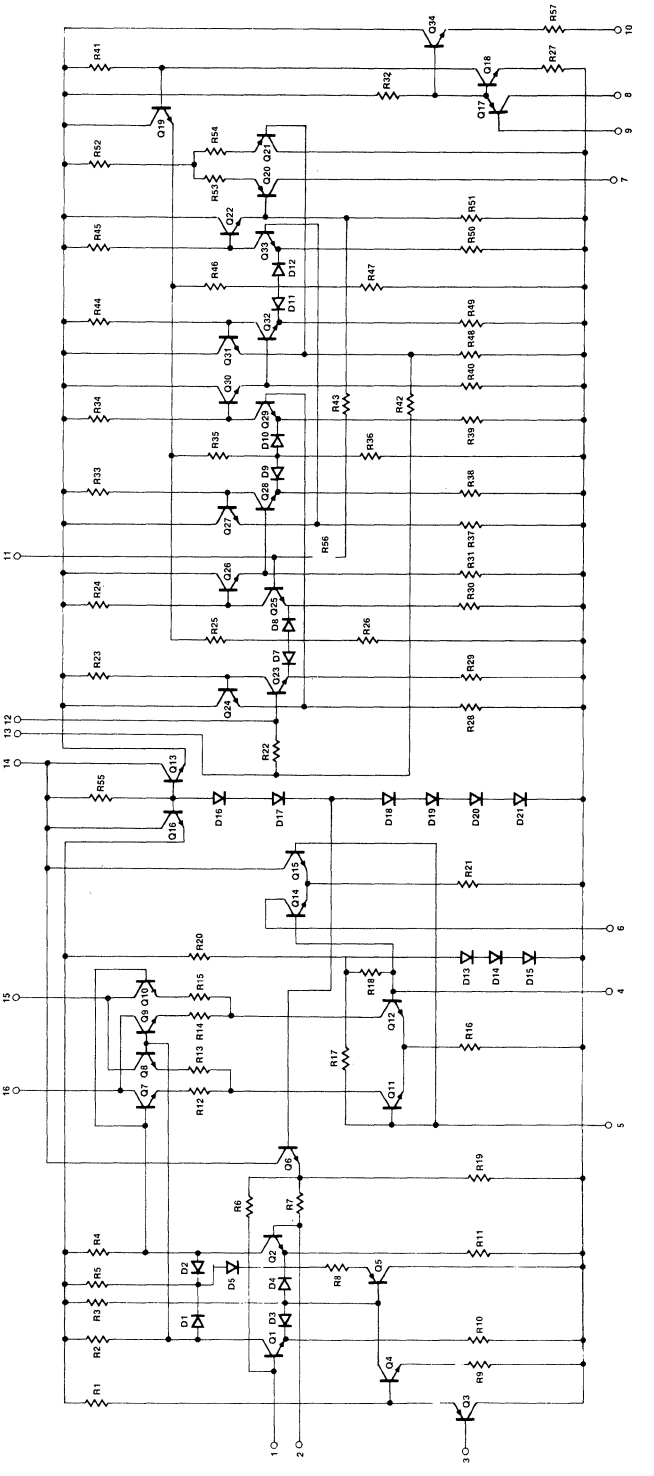

TCA440-N

DC ELECTRICAL CHARACTERISTICS V_{CC} = 9V, T_A = 25°C unless otherwise specified.

PARAMETER		TEST CONDITIONS	TCA 440			UNIT
			Min	Typ	Max	
I_{CC}	Total current consumption at:	V_{CC} = 4.5V V_{CC} = 9V V_{CC} = 15V		7 10.5 12		mA mA mA

AC ELECTRICAL TEST V_{CC} = 9V, T_A = 25°C, f_C = 1MHz, f_{MOD} = 1kHz unless otherwise specified.

PARAMETER		TEST CONDITIONS	TCA 440			UNIT
			Min	Typ	Max	
V_O	Audio output voltage	m = 30% V_{IN} = 1.0mV		100		mV
SEN	Input sensitivity (f_C = 1MHz, m = 30%/0%, R_G = 540Ω)	V_O = 30mV		10		µV
	Noise	V_{IN} = 1.0mV NO MOD.		1.5		mV
M_O	Meter Output	V_{IN} = 4µV		150		µV

TYPICAL APPLICATIONS

APPLICATION EXAMPLE FOR BROADCAST BAND

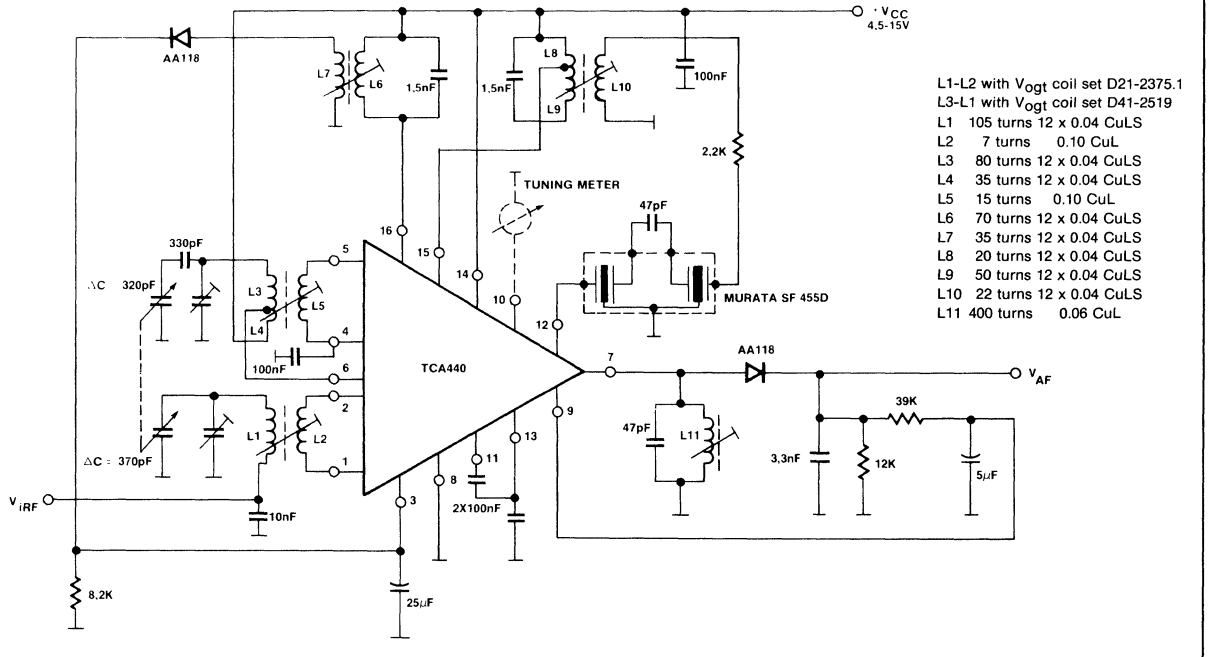

TYPICAL APPLICATIONS (Cont'd)

APPLICATION EXAMPLE FOR BROADCAST BAND

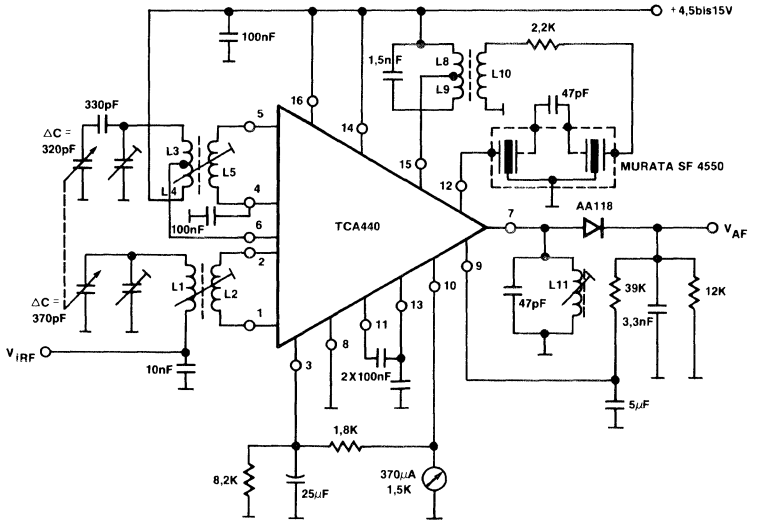

Prestage control is derived from IF control

L1 105 turns 12 x 0.04 CuLS
L2 7 turns 0.10 CuL
L3 80 turns 12 x 0.04 CuLS
L4 35 turns 12 x 0.04 CuLS
L5 15 turns 0.10 CuL
L8 20 turns 12 x 0.04 CuLS
L9 50 turns 12 x 0.04 CuLS
L10 22 turns 12 x 0.04 CuLS
L11 400 turns 0.04 CuL
L1-L2 with V_{ogt} coil set D21-23751
L3-L11 with V_{ogt} coil set D41-2519

APPLICATION EXAMPLE FOR AM USING VARICAP DIODES BB 113

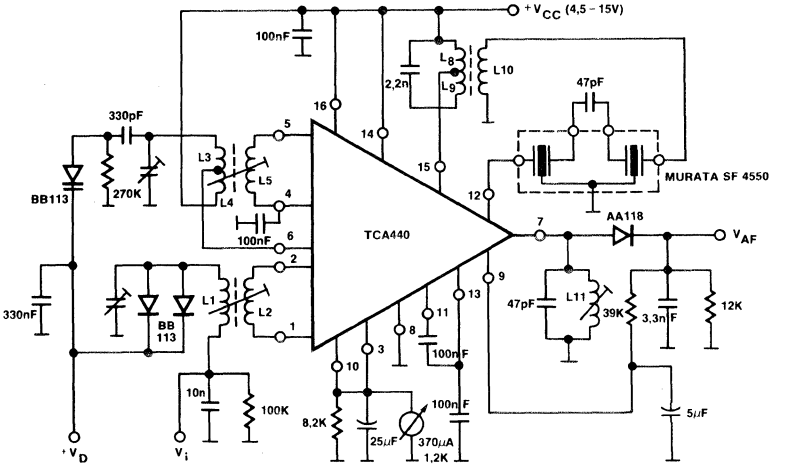

L1 105 turns 12 x 0.04 CuLS
L2 7 turns 0.10 CuL
L3 80 turns 12 x 0.04 CuLS
L4 35 turns 12 x 0.04 CuLS
L5 15 turns 0.10 CuL
L8 20 turns 12 x 0.04 CuLS
L9 50 turns 12 x 0.04 CuLS
L10 22 turns 12 x 0.04 CuLS
L11 400 turns 0.06 CuL

L1-L2 with Vogt coil set D21-23751
L3-L11 with Vogt coil set D41-2519

V_D = 8.5V→f_i = 800kHz
V_D = 30V→f_i = 1620kHz

TYPICAL APPLICATIONS (Cont'd)

CONVERSION CONDUCTANCE vs OSCILLATOR VOLTAGE

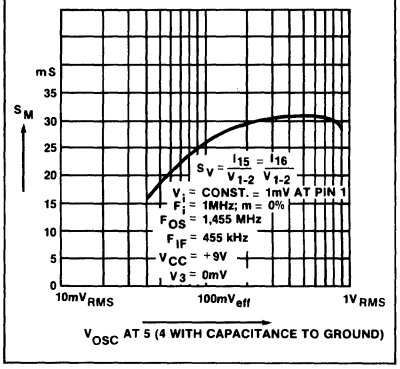

RF STAGE CONTROL

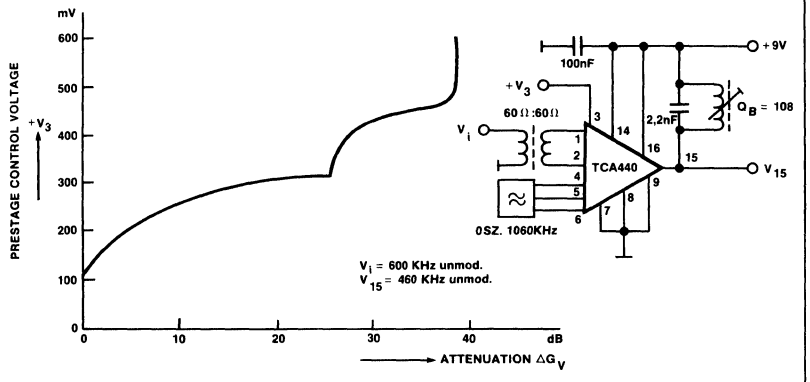

The input is not power matched and can be driven with a higher resistance, V_i is chosen so that a constant V_{15} is obtained ($50mV_{pp}$).

IF CONTROL

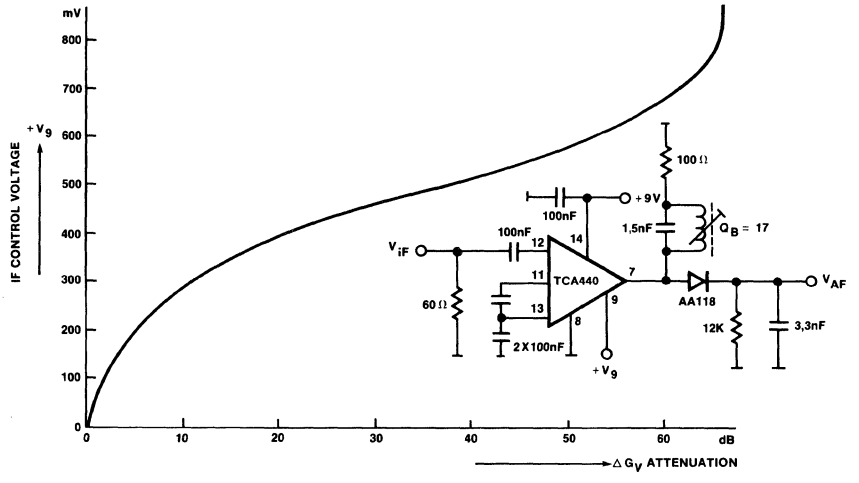

V_{IF} (469kHz; m = 80%; f_{mod} = 1kHz) is chosen so that always a constant V_{AF} is obtained ($200mV_{RMS}$)

TYPICAL PERFORMANCE CHARACTERISTICS

AF OUTPUT VOLTAGE AND NOISE FIGURE vs RF INPUT VOLTAGE (switching position 1)

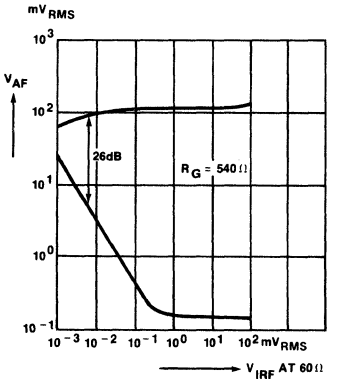

SIGNAL TO NOISE RATIO vs RF INPUT VOLTAGE (switching position 2)

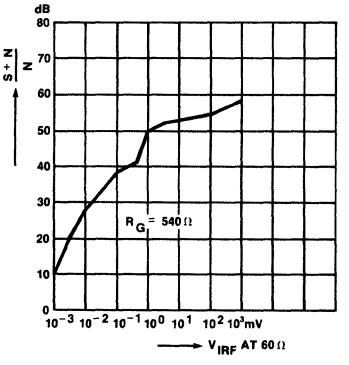

SIGNAL TO NOISE RATIO vs RF INPUT VOLTAGE (parameter is generator impedance) (switching position 1)

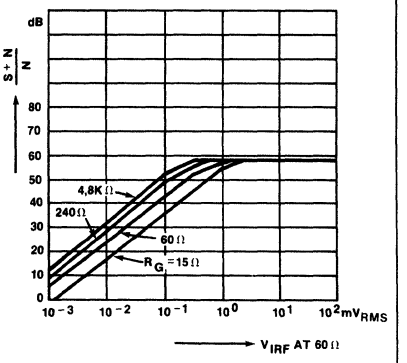

TEST FIGURES FOR APPLICATION EXAMPLE FOR MW HARMONIC DISTORTION AND AF OUTPUT VOLTAGE vs RF INPUT VOLTAGE MEASURED SYMMETRICALLY AT PINS 1 AND 2 f_i = 1MHz, f_{mod} = 1kHz, f_{IF} = 455kHz, V_{CC} = 9V

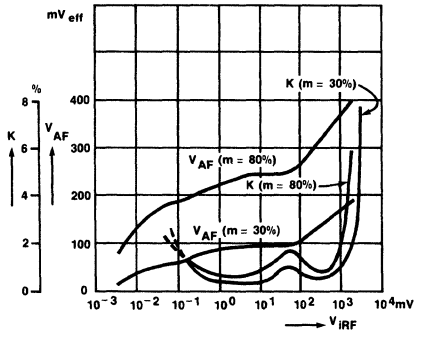

TEST FIGURES FOR APPLICATION EXAMPLE FOR AM USING BB 113 f_i = 1MHz, f_{mod} = 1kHz, f_{IF} = 455 kHz, V_{CC} = 9V, V_{IRF} measured symmetrically at pins 1 and 2

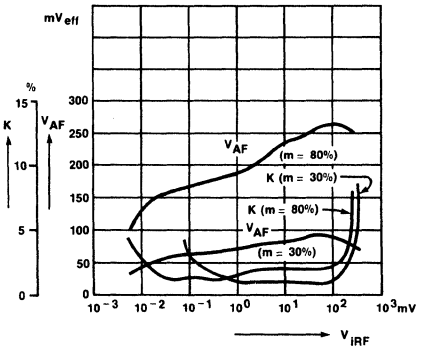

Example for moving coil instruments

R_i for full-scale deflection

1.5kΩ	100μA
1.5kΩ	170μA
2kΩ	200μA
350Ω	500μA

TUNING METER VOLTAGE vs IF CONTROL VOLTAGE (parameter is impedance of tuning meter)

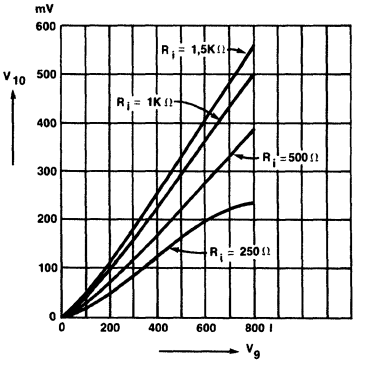

TEST CIRCUITS

TEST CIRCUIT FOR NOISE FIGURE

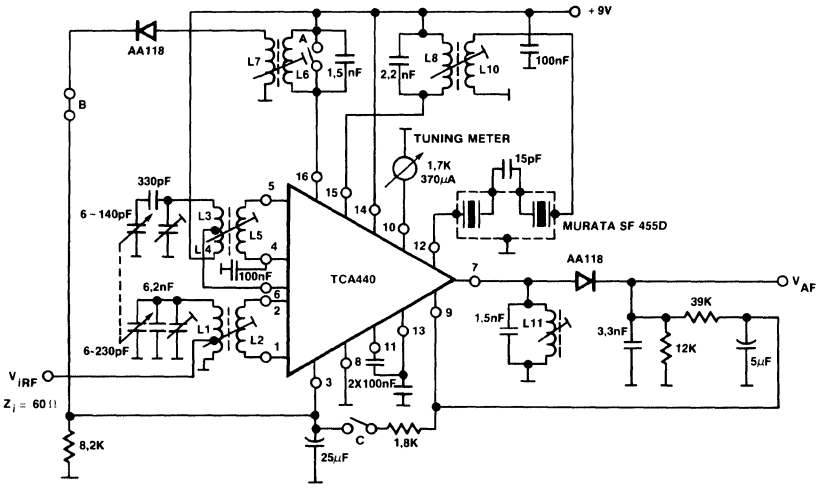

L1-L2 M25 pot core
L3-L11 with Vogt coil set D41-2519

L1	2 + 6	turns	6 x 12 x 0.04 CuLS
L2	n		0.15 CuL
L3	90	turns	12 x 0.04 CuLS
L4	35	turns	12 x 0.04 CuLS
L5	15	turns	0.10 CuL
L6	70	turns	12 x 0.04 CuLS
L7	35	turns	12 x 0.04 CuLS
L8	60	turns	12 x 0.04 CuLS
L10	22	turns	12 x 0.04 CuLS
L11	68	turns	0.06 CuL

switch A	switch B	switch C	
off	on	off	separate RF stage control
on	off	on	RF stage control voltage derived from IF control voltage

f_i = 1MHz; m = 30%

n(turns)	$R_{Generator}(\Omega)$
1	15
2	60
4	240
6	540
9	1,2K
12	2,2K
18	4,8K

μA758-N

DESCRIPTION

The μA758 is a monolithic phase-locked loop FM stereo multiplex decoder. The device decodes an FM stereo multiplex signal into right and left audio channels while inherently suppressing SCA information when it is contained in the composite input signal. The device includes automatic mono-stereo mode switching and drive for an external lamp to indicate stereo mode operation.

The μA758 operates over a large voltage range and requires a minimum number of external components. A simple setting of an external potentiometer adjusts the oscillator frequency. No coils are required.

FEATURES

- **45dB channel separation**
- **Automatic stereo/mono switching**
- **70dB SCA rejection**
- **10V to 16V supply range**
- **High impedance input—low impedance output**

PIN CONFIGURATION

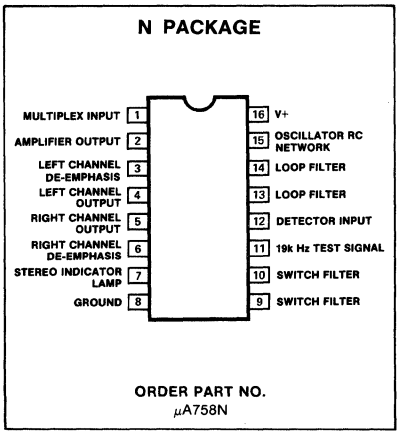

ORDER PART NO.
μA758N

BLOCK DIAGRAM

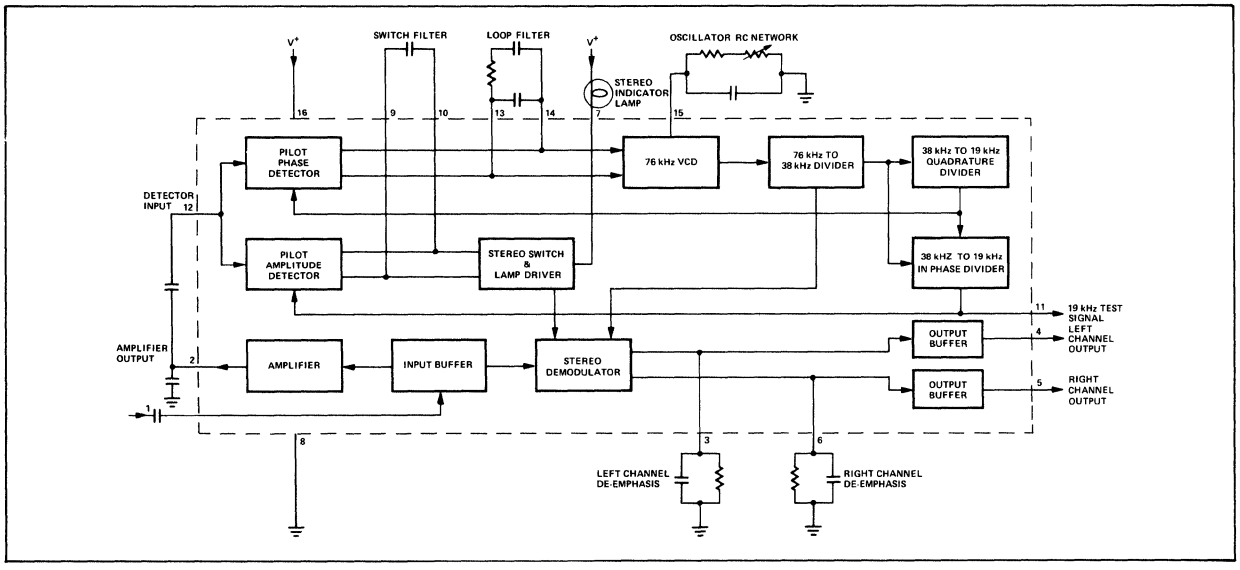

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	+18	V
Supply voltage (≤ 15 seconds)	+22	V
Voltage at lamp driver terminal (Lamp OFF)	+22	V
Internal power dissipation	730	mW
Operating temperature range	-40 to +85	°C
Storage temperature range	-55 to +125	°C
Lead temperature (60sec)	300	°C

EQUIVALENT SCHEMATIC

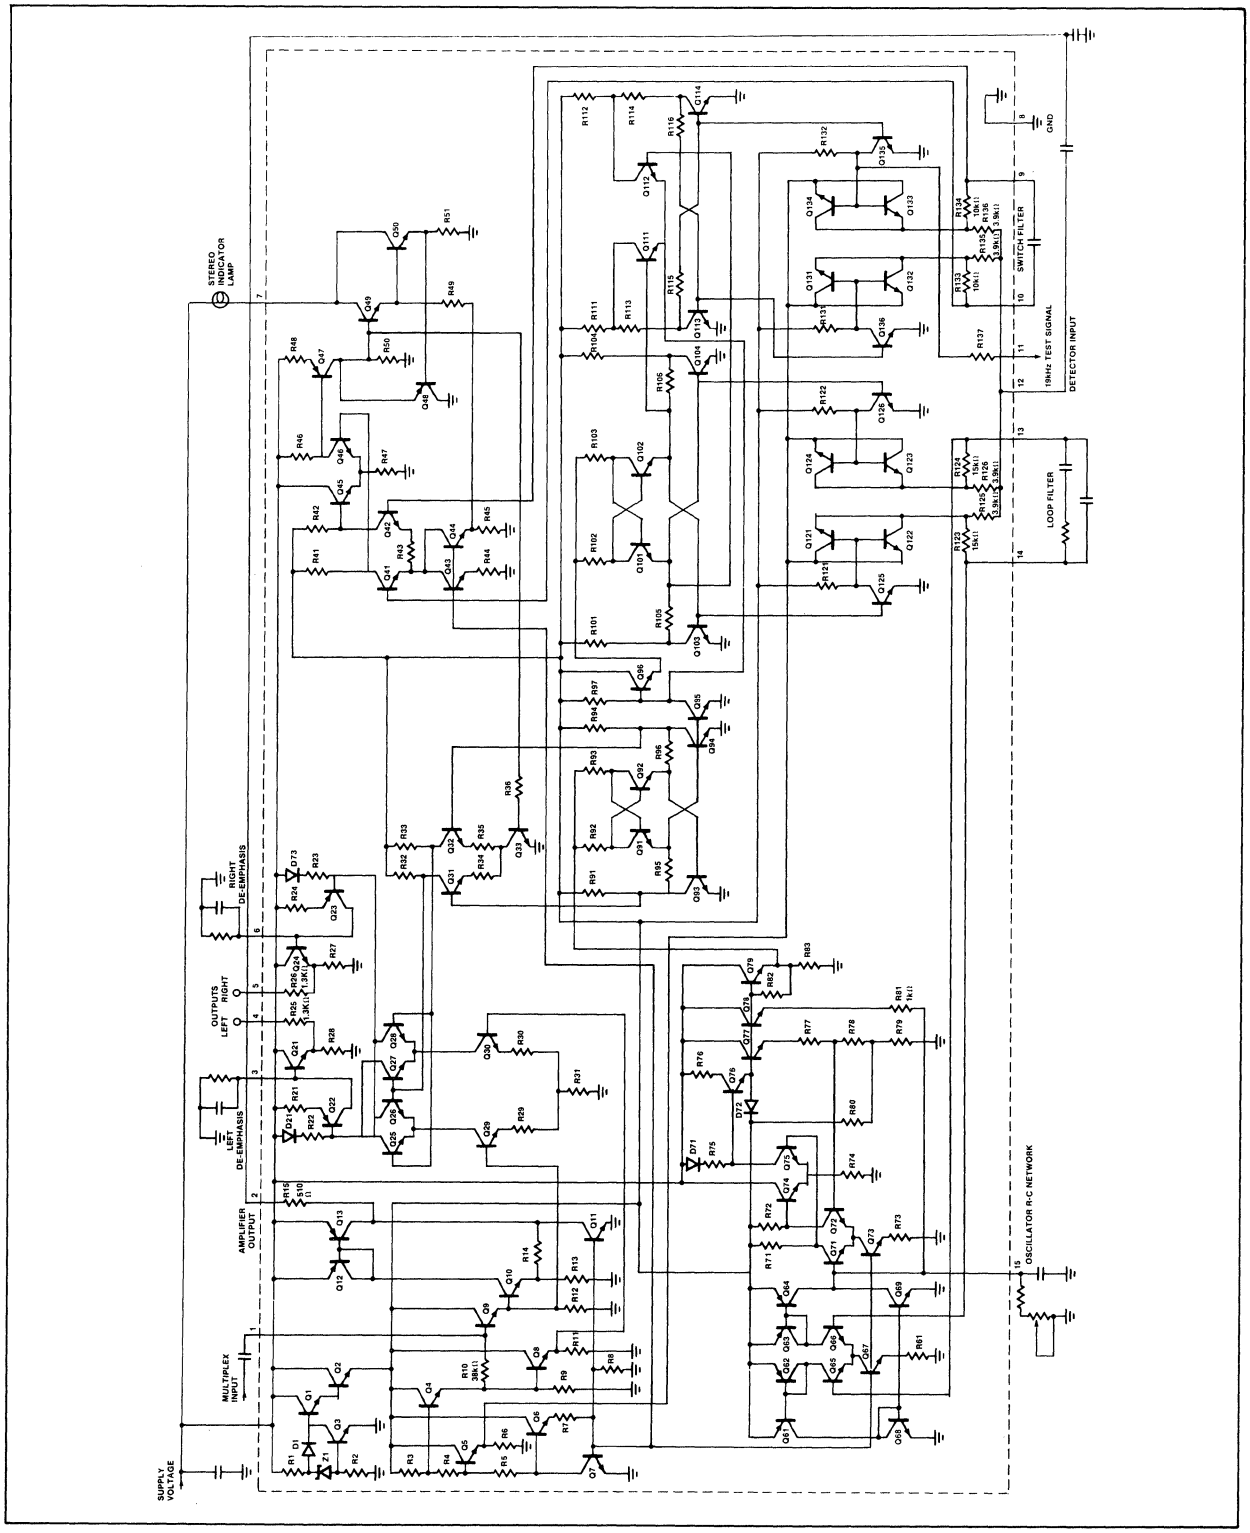

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V+ = +12V, 19kHz pilot level = 30mV$_{RMS}$, multiplex signal (L = R, pilot OFF) = 300mV$_{RMS}$, modulation frequency = 400Hz or 1Hz, test circuit 1, unless otherwise specified.

PARAMETER		TEST CONDITIONS	μA758			UNIT
			Min	Typ	Max	
I_{CC}	Supply current	Lamp OFF		31	38	mA
I_L	Maximum available lamp current		75	150		mA
V_7	Voltage at lamp driver terminal	Lamp = 50mA		1.3	1.8	V
r_i	Input resistance		20	35		kΩ
r_o	Output resistance		0.9	1.3	2.0	kΩ

AC ELECTRICAL CHARACTERISTICS

PARAMETER		TEST CONDITIONS	μA758			UNIT
			Min	Typ	Max	
$\Delta(V_4\&V_5)$	DC voltage shift at either output terminal	Stereo to mono operation		30	150	mV
$P_{S.R.R.}$	Power supply ripple rejection	200Hz, 200mV$_{RMS}$	35			dB
SEP	Channel separation	100Hz		40		dB
		400Hz	30	45		dB
		10kHz		45		dB
BAL.	Channel balance			0.3	1.5	dB
A_V	Voltage gain	1kHz	0.5	0.9	1.4	V/V
	Pilot input level	Lamp turn-on		18	25	mV$_{RMS}$
		Lamp turn-off	2.0	7.0		mV$_{RMS}$
	Pilot input level hysteresis	Lamp turn-off to turn-on	3.0	7.0		dB
	Capture range		2.0	4.0	6.0	%
T.H.D.	Total harmonic distortion	Multiplex level = 600mV$_{RMS}$ pilot OFF		0.4	1.0	%
	19kHz rejection		25	35		dB
	38kHz rejection		25	45		dB
	SCA rejection[1]			70		dB
VCO	Tuning resistance[2]		21.0	23.3	25.5	kΩ
VCO	Frequency drift	0°C ≤ T_A ≤ 25°C		+0.1	±2	%
		25°C ≤ T_A ≤ 70°C		-0.4	±2	%

NOTES

1. Measured with a stereo composite signal consistency of 80% stereo, 10% pilot and 10% SCA as defined in the FCC Rules on Broadcasting.
2. Total resistance from pin 15 to ground, in test circuit, required to set reference frequency at pin 11 to 19kHz ± 10hz.

TYPICAL PERFORMANCE CHARACTERISTICS

CHANNEL SEPARATION vs AUDIO FREQUENCY



HARMONIC DISTORTION vs INPUT LEVEL



OSCILLATOR FREE RUNNING FREQUENCY ERROR vs AMBIENT TEMPERATURE



TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

LAMP TURN ON & TURN OFF SENSITIVITY vs AMBIENT TEMPERATURE



CAPTURE RANGES vs PILOT LEVEL



CHANNEL SEPARATION vs OSCILLATOR FREE RUNNING FREQUENCY ERROR



TEST CIRCUIT AND TYPICAL APPLICATION

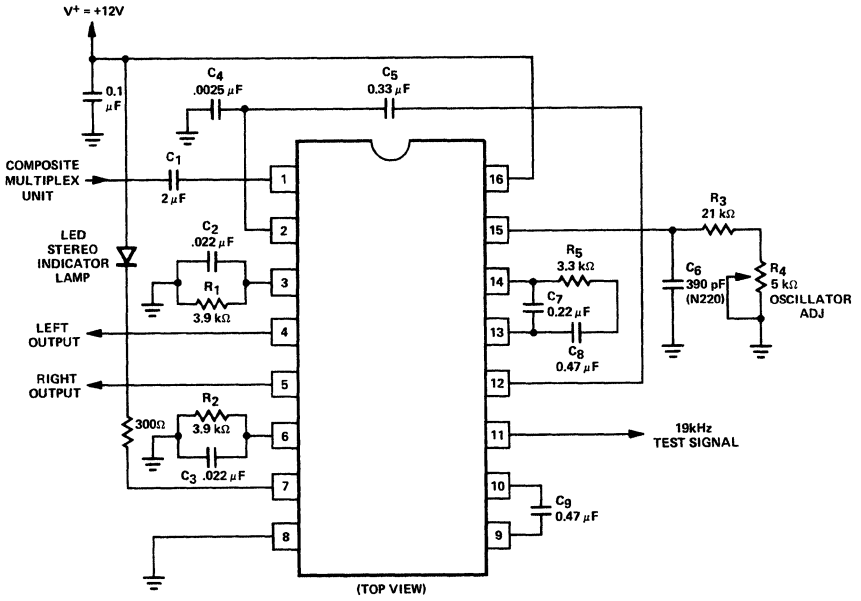

NOTE

Tolerance on resistors is ±5% and tolerance on capacitors is ±20% unless otherwise specified. C_1 tolerance = +100%; -20%, C_6 tolerance = ±1% in test circuit and ±5% in typical applications, R_3 tolerance = ±1%, R_4 tolerance = ±10%, R_1 and R_2 tolerances = ±1% in test circuit and ±5% in typical application.

SECTION 12
TV CIRCUITS

Section 12—TV CIRCUITS

LM1880	Vertical/Horizontal Processor	395
TBA120S	8-Stage Amplifier with Balanced Demodulator	398
TBA1440G/1441G	TV Video Amplifier with Demodulator	401
ULN2211	2-Watt TV/FM Sound Channel	405

LM1880-F

DESCRIPTION

The LM1880 uses compatible Linear/I^2L technology to produce the first T.V. horizontal and vertical processing system which completely eliminates the hold controls. The heart of the system is a precision 32 times horizontal frequency VCO which is designed to use a low-cost ceramic resonator as a tuning element.

The VCO signal is divided down in the horizontal section to produce a pre-driver output which is locked to negative sync by means of an on-chip phases detector. The vertical output ramp is injection-locked by vertical sync subject to a sync window derived from the vertical countdown section. A gate pulse centered on the chroma burst is also provided.

FEATURES

- **No frequency set-up required for horizontal or vertical**
- **Ceramic resonator frequency reference**
- **Accurate horizontal pre-driver duty cycle**
- **Vertical sync window referenced to horizontal**
- **Precise interlaced vertical output**
- **APC loop parameters completely adjustable**
- **Vertical retrace time adjustable**
- **Chroma burst gate output**
- **Internal voltage regulator**

PIN CONFIGURATION

F PACKAGE

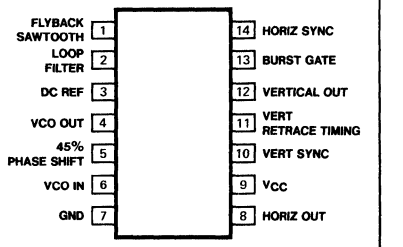

BLOCK DIAGRAM

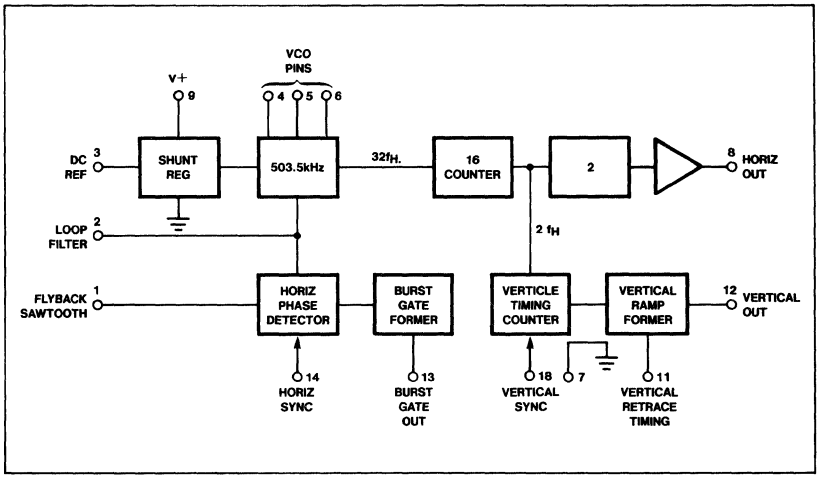

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Sawtooth input voltage (Pin 1)	5	Vp-p
Package dissipation, T_A = 25°C	0.83	W
Above T_A = 25°C, Derate Based on T_J(MAX) = 150°C and θJA = 150° C/W		
Storage temperature range	−55°C to 150	°C
Operating temperature range	0°C to +70	°C
Lead temperature (Soldering, 10 seconds)	300	°C
Supply current (Pin 9)	40	mA
Output voltage (Pins 8, 12, 13)	12	V
Output current		
Pin 8	50	mA
Pin 12	15	mA
Pin 13	10	mA
Sync. input voltage (Pins 10, 14)	5	Vp-p

SCHEMATIC DIAGRAM

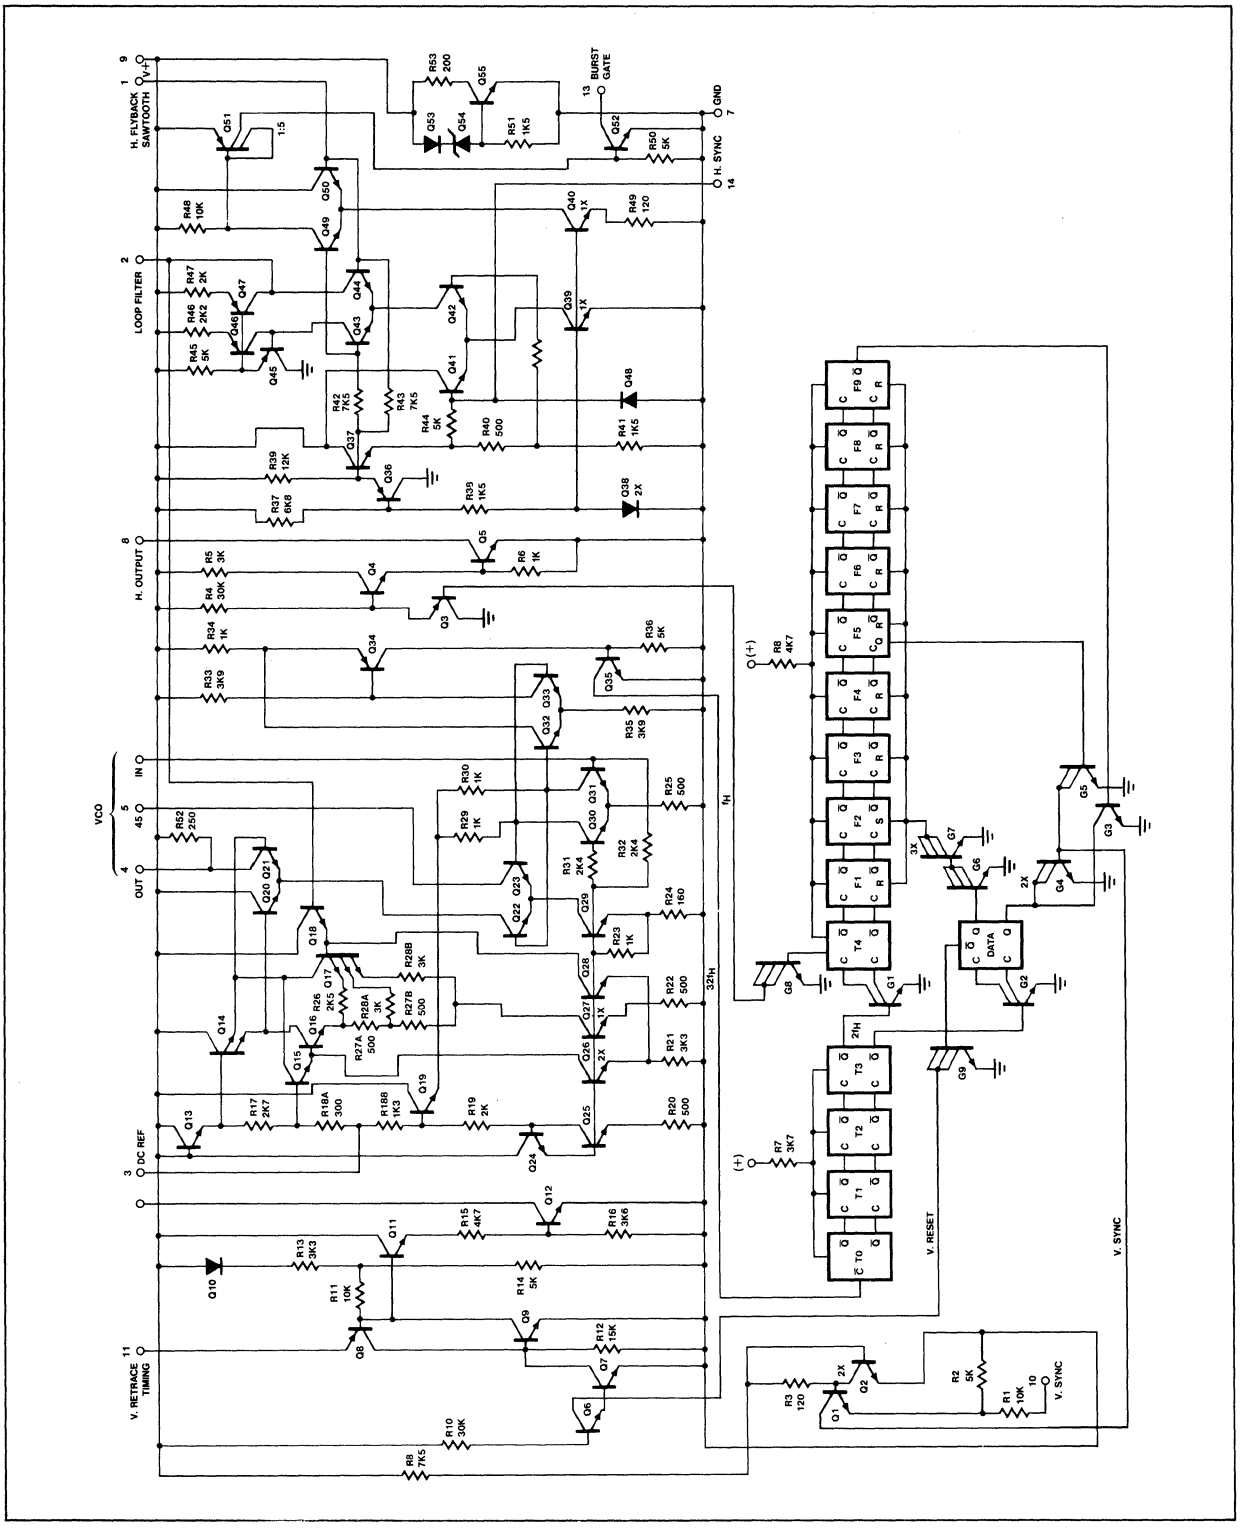

LM1880-F

ELECTRICAL CHARACTERISTICS (Test circuit, all SW normally pos. 1, T_A = 25°C)

PARAMETER	TEST CONDITIONS	LIMITS			UNIT
		Min	Typ	Max	
Regulated voltage (Pin 9)		8.2	8.7	9.2	V
Supply current (Pin 9)	SW 7 Pos. 2	12	18	24	mA
VCO reference voltage (Pin 3)			5.1		V
VCO control current (Pin 2)	V2 = 5V		0.25	1.0	μA
Horizontal phase detector sink current (Pin 2)	SW 1, SW 4 Pos. 2, V1 = 3.9V, V2 =5V	0.3	0.5		mA
Horizontal phase detector source current (Pin 2)	SW 1, SW 4 Pos. 2, V1 = 1.9V, V2 = 5V	0.3	0.5		mA
Horizontal output leakage (Pin 8, OFF Condition)	Change SW 3 to Pos. 2 with Pin 8 High			150	μA
Horizontal output saturation voltage (Pin 8, ON condition)	Change SW 3 to Pos. 2 with Pin 8 Low		0.15	0.4	V
Vertical output saturation voltage (Pin 12)	SW 3, SW 5 Pos. 2		0.25	0.5	V
Burst gate saturation voltage (Pin 13)	SW 1, SW 4 Pos. 2, V1 = 1.9V		0.15	0.4	V
Horizontal oscillator free-running Frequency (Pin 8)[1]	SW 2 Pos. 2	15,550	15,750	15,950	Hz
Horizontal oscillator maximum frequency (Pin 8)	V2 = 7V	16,300			Hz
Horizontal oscillator minimum frequency (Pin 8)	V2 = 3V			15,150	Hz
Vertical minimum lock frequency (Pin 12)	f_H = 15,734 Hz			58.1	Hz
Vertical maximum lock frequency (Pin 12)	SW 6 Pos. 2, f_H = 15,734 Hz	61.7			Hz

NOTE
1. Assumes ceramic resonator f_R = 503.48kHz.

TEST CIRCUIT

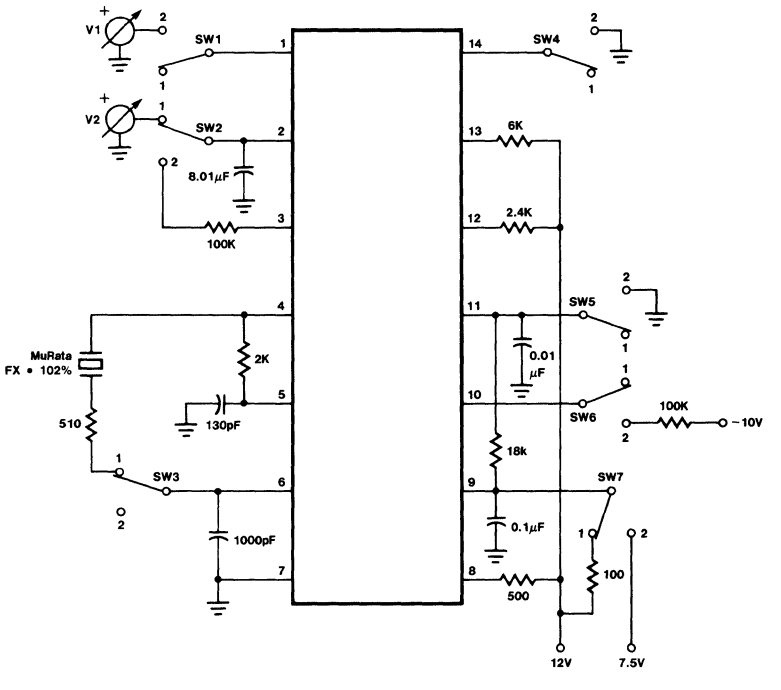

TYPICAL PERFORMANCE CHARACTERISTICS

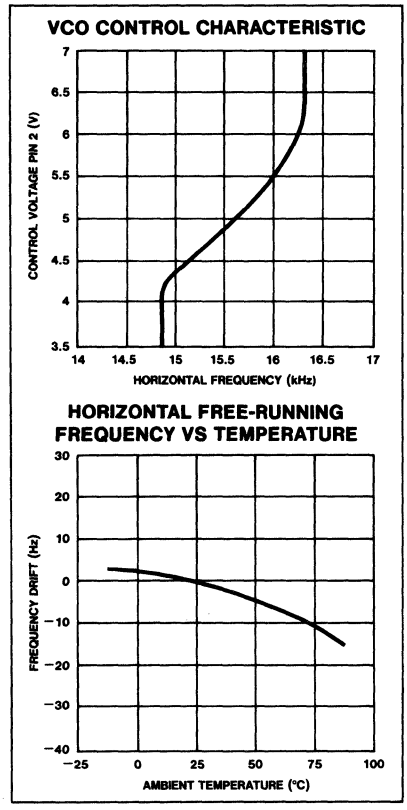

12

TBA120S-N

DESCRIPTION

An eight stage amplifier with balanced demodulator for amplifying, limiting and the demodulation of FM signals, specially designed for the sound-IF in TV and RF-IF amplifier in radios. An electronic Volume Control for the audio outputsignal is also provided.

Groups:

TBA120 S is delivered in groups:
An attenuation of –30dB of the audio output signal requires a resistor from pin 5 to ground typ. value 1.8K to 3.4K.

PIN CONFIGURATION

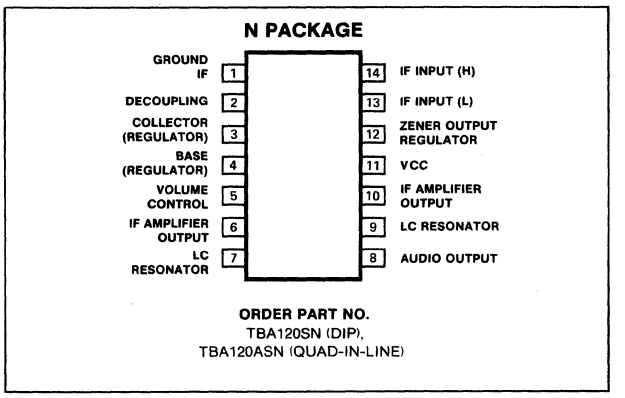

ORDER PART NO.
TBA120SN (DIP),
TBA120ASN (QUAD-IN-LINE)

EQUIVALENT SCHEMATIC

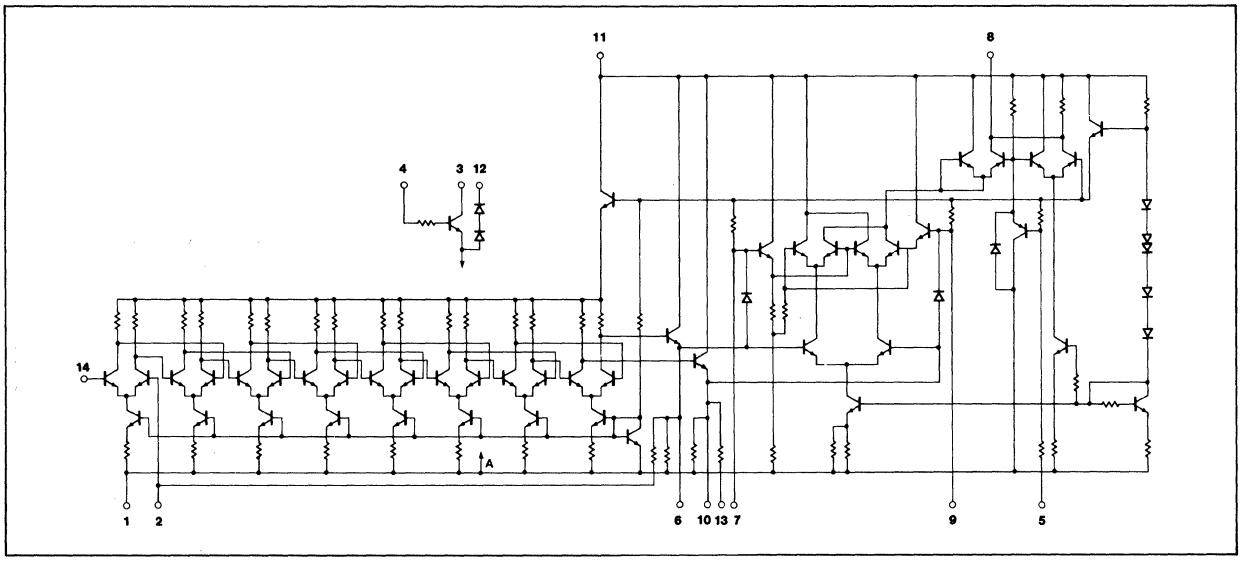

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	18	V
Operating temperature range	-15 to +70	°C
Storage temperature	-40 to +125	°C
Power dissipation	400	mW
max 1 minute	500	mW
Supply current	15	mA
max 1 minute	20	mA
Current 13	1	mA
14	1	mA
Operating supply voltage	6 to 18	V
Frequency range	0 to 12	MHz

DC ELECTRICAL CHARACTERISTICS (V_{CC} = 12V; T_{amb} = 25°C)

PARAMETER		TEST CONDITIONS	TBA120S			UNIT
			Min	Typ	Max	
I_{CC}	Total current requirement	$R_5 = \infty$ $R_5 = 0$		14 16	24 26	mA mA
V_8 V_5	dc-portion of the output signal Voltage	$V_1 = 0$ -1dB down -70dB down		8.6 2.4 1.3		V V V

AC ELECTRICAL CHARACTERISTICS T_A = 25°C, V_{CC} = 12V unless otherwise specified. F_C = 4.5 or 5.5MHz.

PARAMETER		TEST CONDITIONS	TBA120S			UNIT
			Min	Typ	Max	
A_V	IF-voltage gain V_6/V_{14}	f = 5.5MHz		68		dB
V_{IF}	IF-output voltage at limiting; each output			250		mV
V_O	AF-output voltage	f = 5.5MHz; $\Delta f = \pm 40$kHz; V_I = 10mV; f_{mod} = 1kHz; Q = 45; k = 4% f = 5.5MHz; $\Delta f = \pm 40$kHz; V_I = 10mV; f_{mod} = 1kHz; Q = 20; k = 1%	.50	.9 500	1.4	V mV
V_{lim}	Input voltage starting limiting	V_{out} = -3dB		30	70	μV
Z_I R_O	Input impedance Output resistance	f = 5.5MHz Pin 8		40/4.5 2.6		kΩ/pf kΩ
VOL	Range of volume control			70		dB
AMR	AM-rejection	f = 5.5MHz $V_I = 500\mu$V; f_{mod} = 1kHz; MO = 30%	40	48		dB
R_5	Potentiometer resistance	-1dB down -70dB down	1.0	3.7 1.4	4.7	kΩ kΩ
CHARACTERISTICS OF THE AUXILIARY CIRCUIT						
V_{12} R_Z	Z-voltage Z-resistance	I_{12} = 5mA	11.2	12 30	13.2	V Ω

12

TYPICAL PERFORMANCE CHARACTERISTICS

TYPICAL CURVE FROM PRODUCT SELECTION NR3.

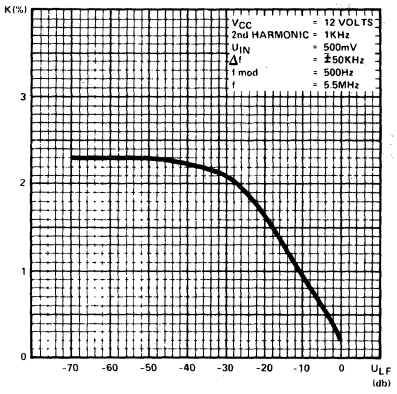

TYPICAL CURVE FROM PRODUCE-REFLECTION NR3.

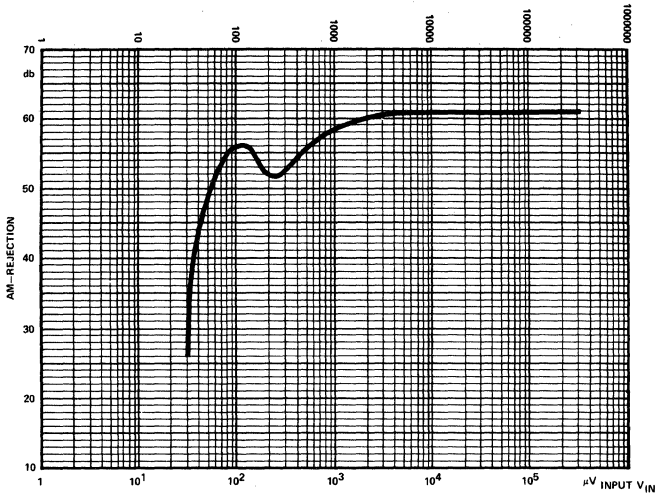

VOLUME CONTROL SIGNETICS TBA120S

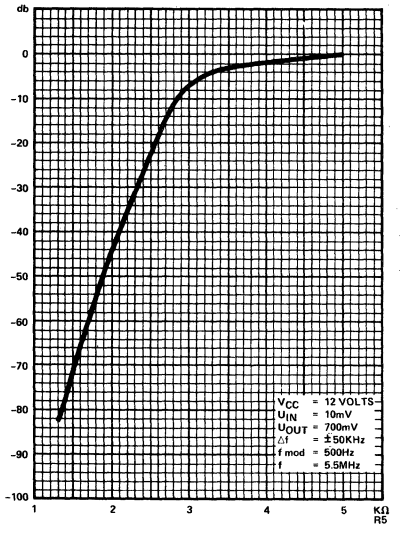

TEST CIRCUIT

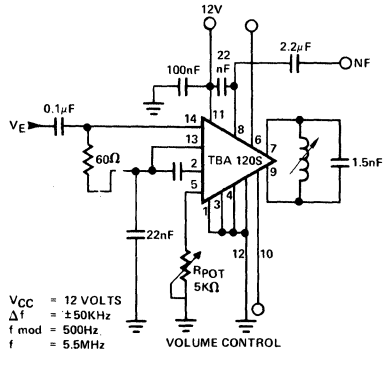

TBA1440G/1441G-N

DESCRIPTION

The TBA1440G (for pnp tuner pre-stages) and TBA 1441G (for npn tuner pre-stages) have been developed from the TBA440P/N. Their improvements are as follows:

- Reduced residual IF at outputs 11 and 12
- Reduced residual IF at pin 13
- Considerably improved intermodulation distance
- Excellent tuning attitude even with low-ohmic tank circuit at demodulator

The IC's contain a high-amplifying controllable video IF amplifier, a controlled demodulator and two low-resistance video outputs with positive- and negative-going signals as well as the complete keyed control and delayed tuner control.

- Large control range with low noise and wide dynamic range
- High sensitivity
- Controlled demodulator, so minimum 1.07MHz disturbances
- Internal temperature stabilization
- The white levels of the video signals at the positive and negative video output are independent of the operating voltage
- The white and black levels can be adjusted separately

PIN CONFIGURATION

N PACKAGE

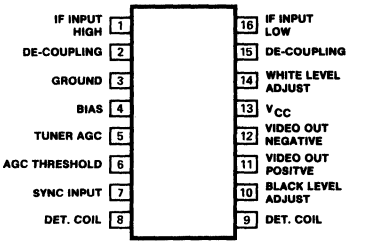

ORDER PART NO.

TBA1440G, TBA1441G

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_{13}	Supply voltage	15*	V
V_4	Voltages	5	V
V_5		20	V
V_{14}		5	V
R_{8-9}	Ohmic resistance between pins 8 and 9	≤20	Ω
R_{THSA}	Thermal resistance (system-air)	100	K/W
T_J	Junction temperature	150	°C
T_S	Storage temperature	−40 to +125	°C
V_{13}	Supply voltage range	10.5 to 15	V
T_A	Ambient temperature in operation	−25 to +60	°C

NOTE
Briefly 16.5V

DC ELECTRICAL CHARACTERISTICS

V_{13} = 12.4, T_A = 25°C; all data with reference to ground, unless otherwise specified.

PARAMETER		TEST CONDITIONS	TBA1440G/1441			UNIT
			Min	Typ	Max	
I_{13}	Current consumption	V_{13} = 15V	34	47	60	mA
V_{11}	DC voltage at output 11	V_{IN} = 0 R_{14-3} = 68k R_{14-3} = 0		4.5 6.4		 V V
V_{12}	DC voltage at output 12	V_{IN} = 0 R_{14-3} = 68K R_{14-3} = 0		 1.9 3.5		 V V
V_6	AGC threshold			2.4		V
V_4	IF control voltage	For max. gain V_{IN} = 0 For min. gain V_{IO} = 0	 2.5		.5	V V
V_7	Sync input			.7	1.2	V
I_{V5}	AGC leakage				.5	mA
ΔV_{11} ΔV_{12}		V_{13}= 10.5 to 15V		100 50		mV/V mV/V

NOTES
1. According to test circuit; V_1 = effective sync pulse level at 60Ω.
2. Test level a_{cc} = −3dB
   a_{cc} = −20dB referring to picture carrier.

12

AC ELECTRICAL CHARACTERISTICS V_{13} = 12.4; fc = 45 MHz; fm = 1kHz; MOD = 78%

PARAMETER	TEST CONDITIONS	TBA1440G/1441G			UNIT
		Min	Typ	Max	
Black level Pin 11	V_{IN} = 80 mv NO. MOD		.7		V
Black level Pin 12			5.8		V
A.G.C. sat. vol. Pin 5	1440G V_{IN} = 80 mv 1441G V_{IN} = 0		1.3	2.2	V
Audio output $P_{11, 12}$	V_{IN} = 80 mV	3.2	3.8	4.5	V_{PR}
Sensitivity	V_{OUT} − 3DB		240	750	μV
Intermodulation (3 MHz)			45		DB

NOTES
1. According to test circuit; V_1 = effective sync pulse level at 60Ω.
2. Test level a_{CC} = −3dB
   a_{CC} = −20dB referring to picture carrier.

TYPICAL PERFORMANCE CHARACTERISTICS

NOISE FIGURE vs ATTENUATION (MEASURED AD VIDEO FREQUENCY) $-V_{fb}$ = 3V, V_{CC} = 15V, f = 36MHz, Δf = 3MHz, R_G = 500Ω

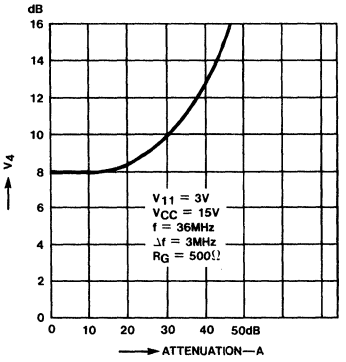

CONTROL VOLTAGE vs ATTENUATION $-V_{fb}$ = 3V, V_{CC} = 15V, f = 36MHz, R_G = 500Ω

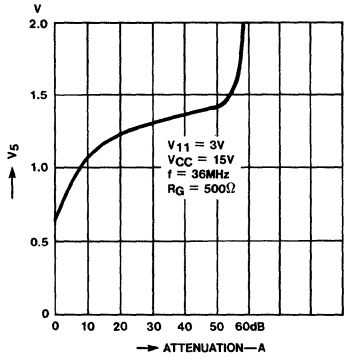

TUNER CONTROL CURRENT vs ATTENUATION R_G = PARAMETER TBA1440G

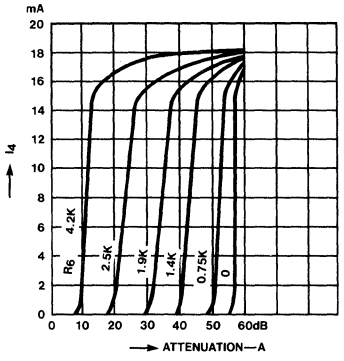

TUNER CONTROL CURRENT vs ATTENUATION R_G = PARAMETER TBA1441

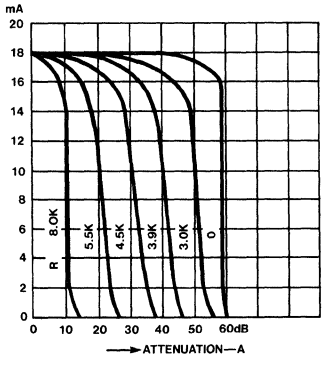

APPLICATION

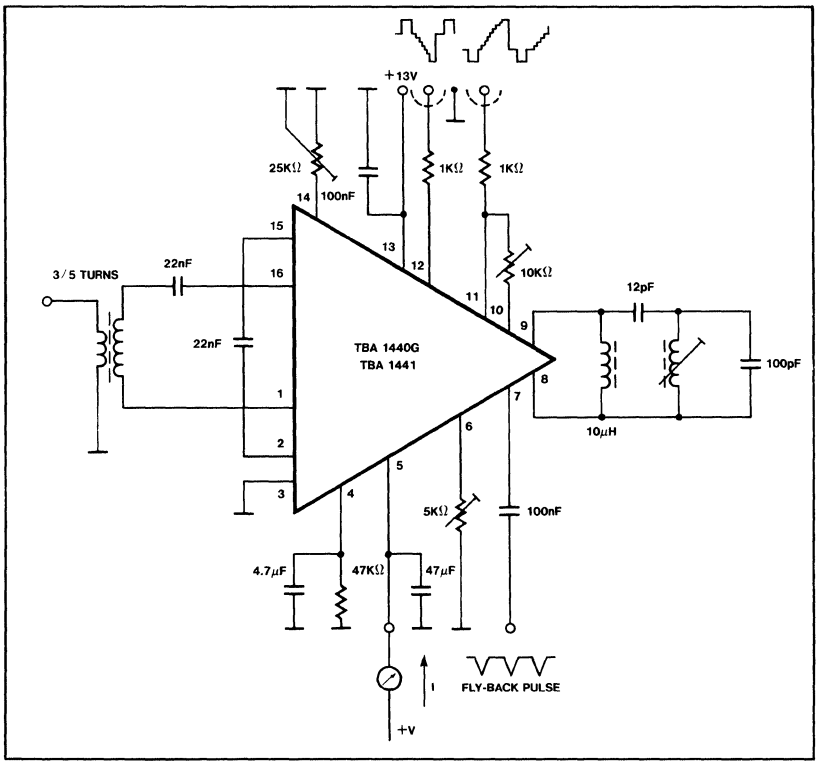

TEST CIRCUIT

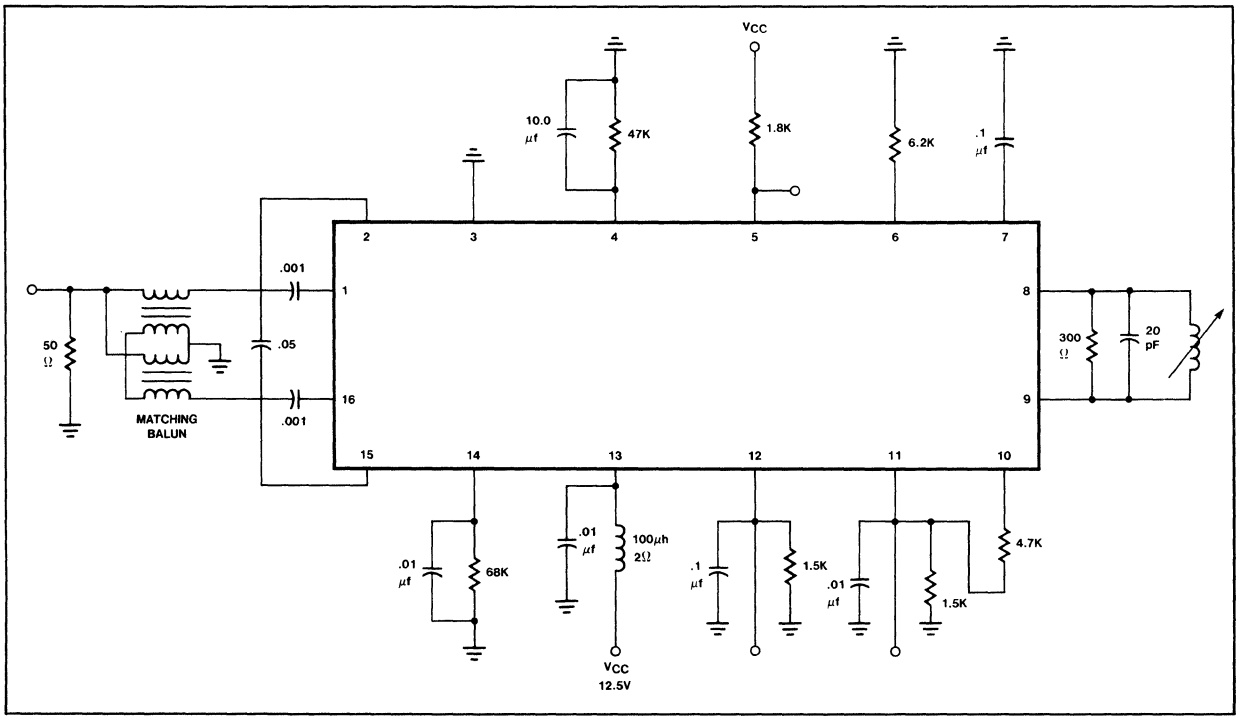

12

EQUIVALENT SCHEMATIC

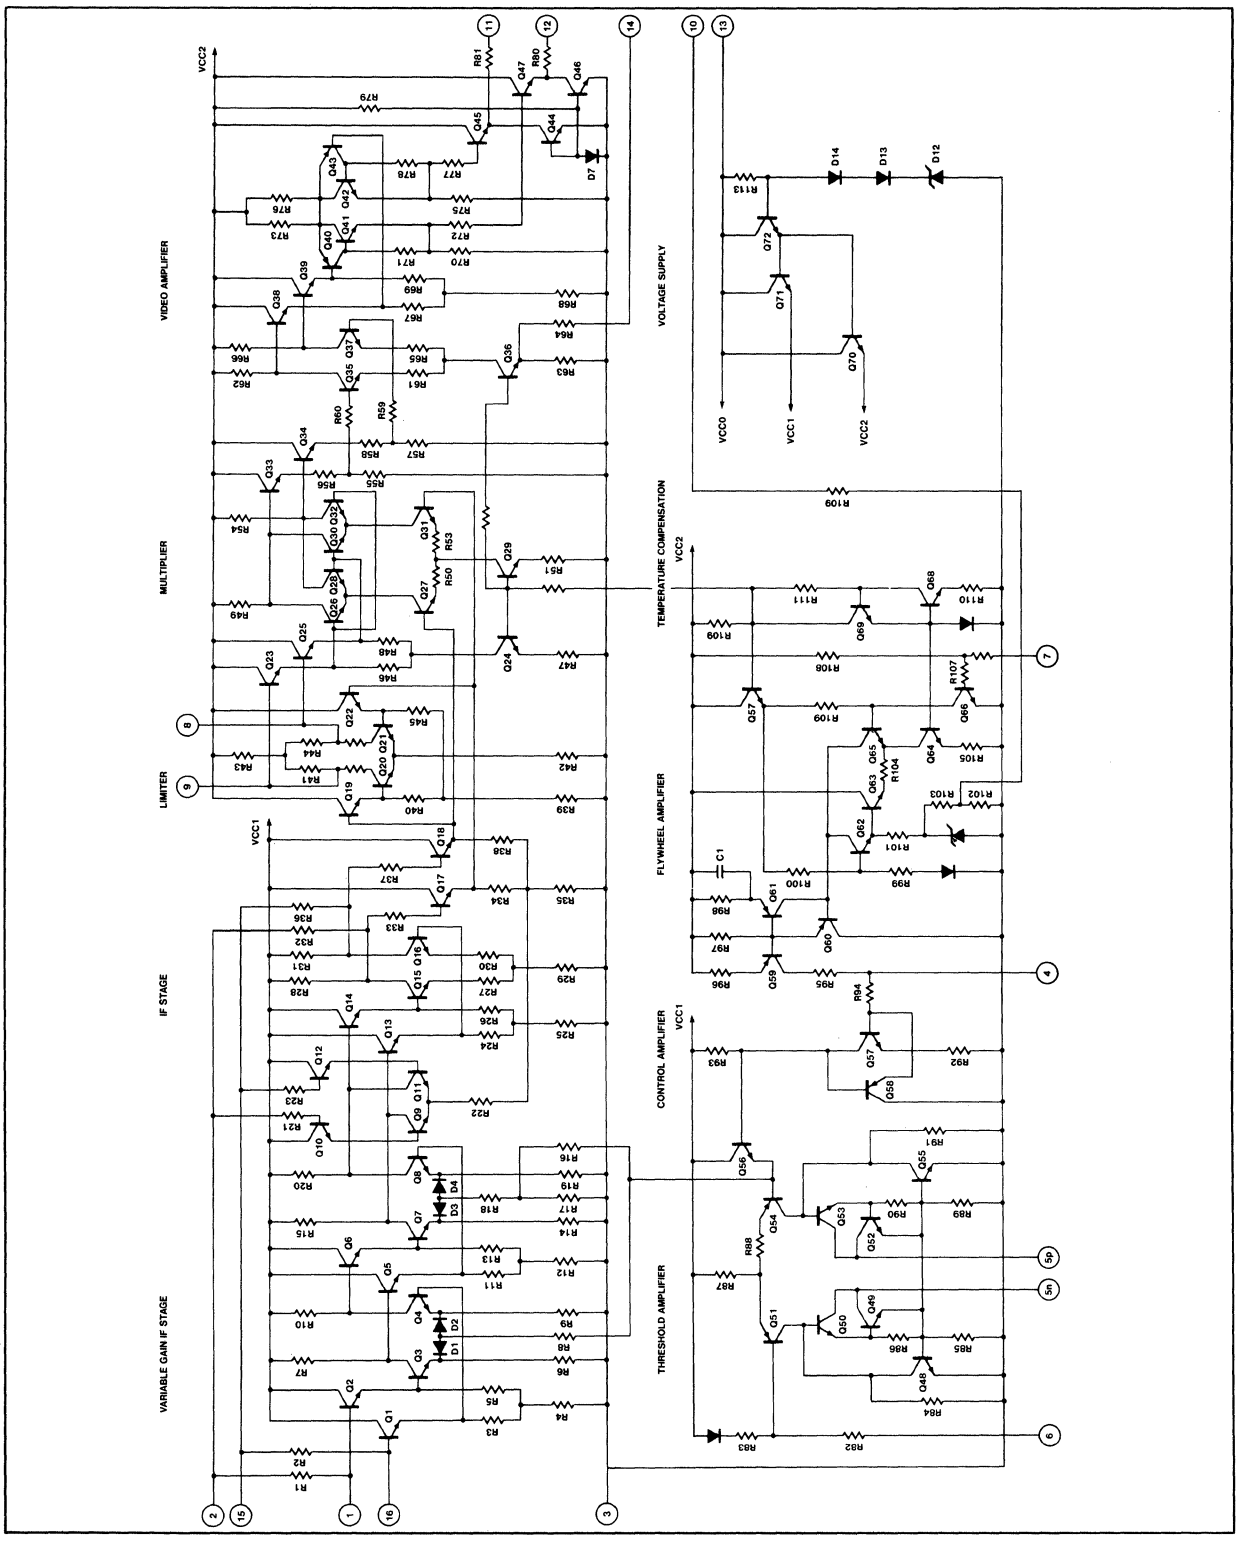

ULN2211-N

DESCRIPTION

The ULN2211 contains a limiting amplifier, an FM quadrature detector, an electronic gain control stage and a 2-watt audio output stage. It can be used to detect and amplify any FM modulated signal having a 0.1-20MHz carrier frequency.

It is especially recommended as a complete TV sound channel requiring few external components and only one tuning adjustment for the 4.5MHz tank circuit. Provision is made for 6dB/octave de-emphasis and tone control.

FEATURES

- **2-watt output**
- **DC volume control attenuation, 70dB typ**
- **Limiter gain of 70dB**
- **Limiting threshold typically less than 200μV**
- **Automatic thermal shutdown**
- **Over-current limiting**
- **20dB ripple rejection**
- **Single supply operation (18-30V)**
- **No crossover distortion**

PIN CONFIGURATION

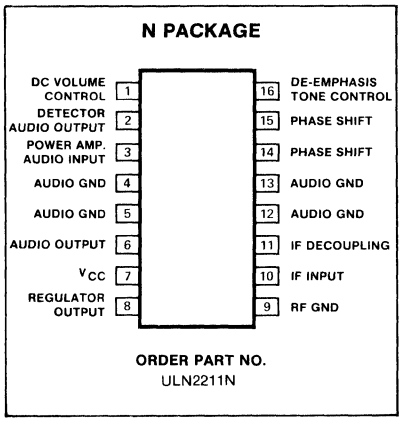

NOTE: Internal power dissipation in watts.

BLOCK DIAGRAM

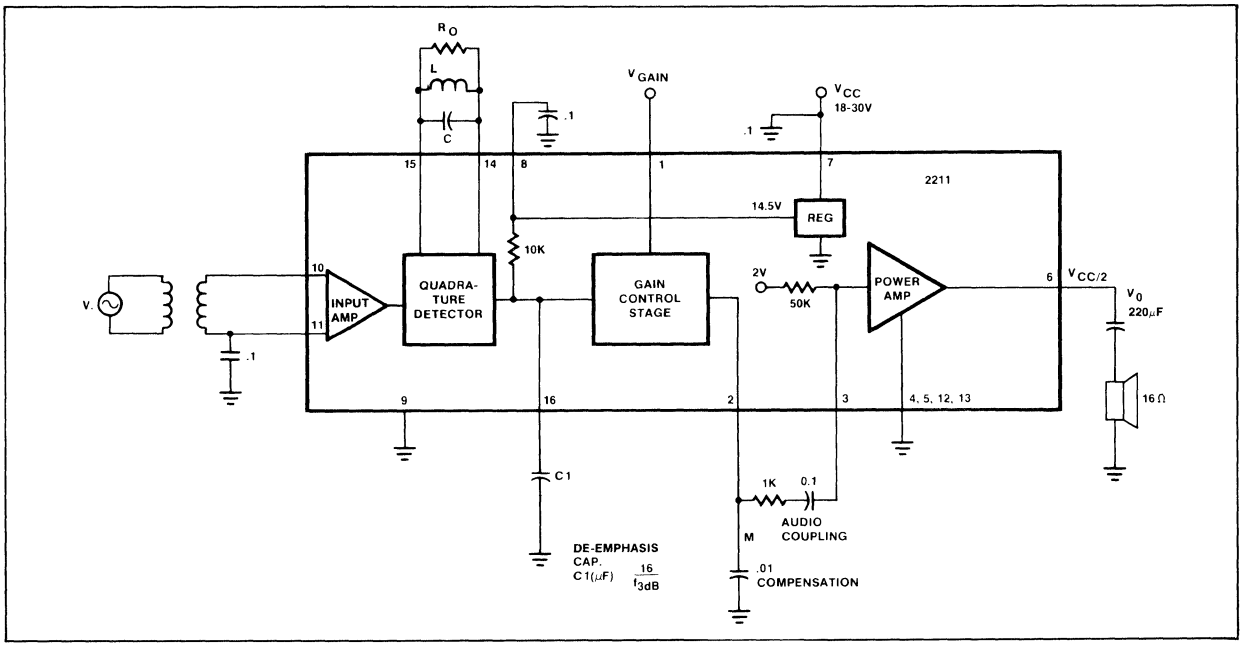

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage, V_{CC}	+30	V
Input voltage (pin 10)	+4.0	Vrms
Power consumption (internal)	See Figure 1	
Operating temperature	-25 to +70	°C
Storage temperature	-65 to +150	°C

12

AC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CC} = +24V; f_o= 4.5MHz, Δf = 25kHz, f_m = 400Hz unless otherwise specified.

PARAMETER		TEST CONDITIONS	ULN2211 Min	ULN2211 Typ	ULN2211 Max	UNIT
V_{TH}	Recovered audio limiting threshold[1]	Adjust V_1 for V_O = 5.6V (P_O = 2W)		150	350	μV
AMR	AM rejection[2]	Adjust V_1 for 2W, V_{IN} = 10mV	30	55		dB
V_O	Recovered AF voltage (pin 16)	V_{IN} = 10mV, f = 25kHz	500	800		mVrms
THD_D	Detector output distortion	V_{IN} = 10mV, f = 25kHz		1.0	2.0	%
THD_O	Output distortion	P_O = 2W, R_L = 16		2	10	%
	Playthrough	V_1 = 0		10	15	mVrms
I_{MAX}	Current limit	R_L = 0		800		mA
V_N	Noise	V_{IN} = 0, V_1 = +8V		15	25	mVrms
A_V	Power AMP voltage gain[3]		25	27	29	dB
V_O/V_{CC}	Output tracking (V_6/V_7)	V_{CC} = 18 to 27V		0.5		V/V
Z_{IN}	Audio amp input impedance	f = 1kHz	40	50	60	kΩ

NOTES

1. Measured with output at -3dB, reference V_{IN} = 10mV, Δf = 25kHz
2. $AMR = 20 \log \frac{V_O \text{ (FM, } \Delta f = 7.5\text{kHz)}}{V_O \text{ (AM, 30\%)}}$
3. Set V_O = 1Vrms. $A_V = 20 \log \frac{1}{(V3\text{rms})}$

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CC} = +24V unless otherwise specified.

PARAMETER		TEST CONDITIONS	ULN2211 Min	ULN2211 Typ	ULN2211 Max	UNIT
I_{CC}	Standby current	V_{IN} = 0	25	45	60	mA
V_6	Terminal voltage		10.5	12.5	14.5	V
V_{10}				1.4		V
V_{11}				1.4		V
V_{14}, V_{15}				4.0		V
V_{16}				8.0		V
V_8			14	14.5	16	V
V_2				10		V
V_3				2.6		V

TYPICAL PERFORMANCE CHARACTERISTICS

GAIN CONTROL CHARACTERISTIC

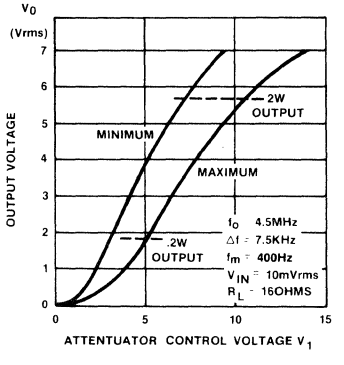

OUTPUT VOLTAGE AND LINEAR RANGE vs Q OF DETECTOR COIL

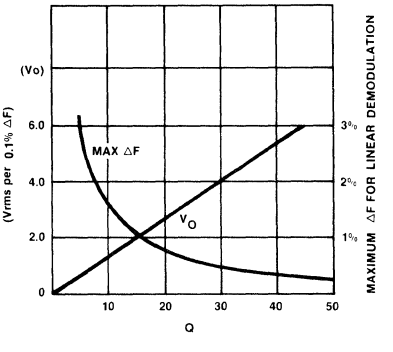

TYPICAL POWER DISSIPATION vs LOAD RESISTANCE AND V_{CC}

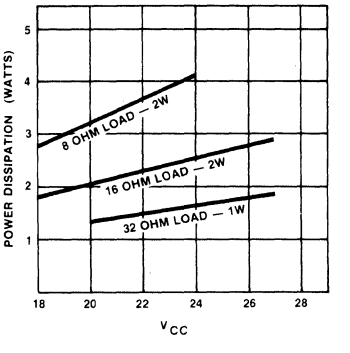

MAXIMUM ALLOWABLE POWER DISSIPATION

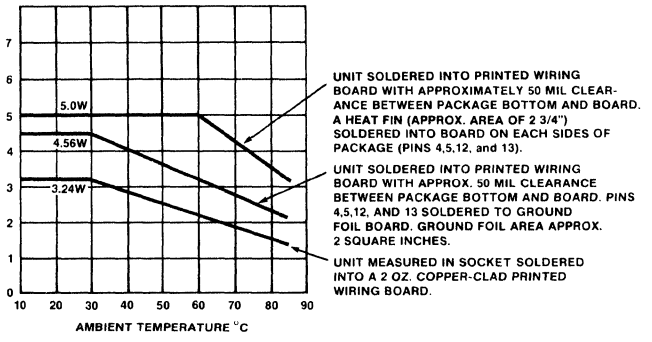

Figure 1

TYPICAL APPLICATION

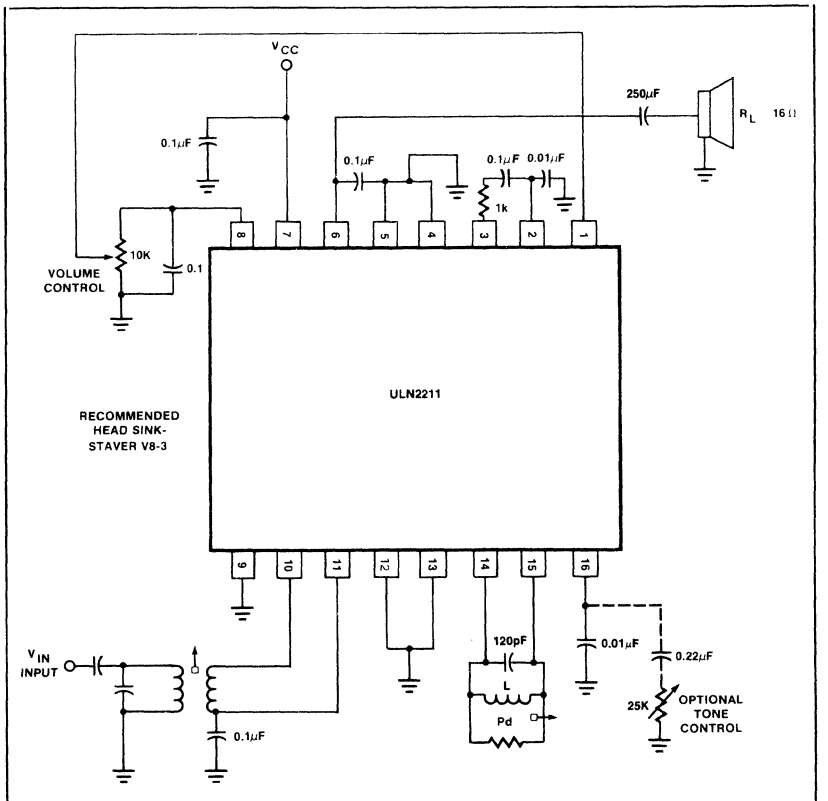

Table 1

f_o	L	R_D
4.5mHz	10-14μH	∞
10./mHz	1-3μH	5K

Figure 2

SECTION 13
AUDIO CIRCUITS

Section 13—AUDIO CIRCUITS

LM387	Dual Low-Noise Preamp	411
NE/SE540	Power Driver	415
NE542	Dual Low Noise Preamp	420
NE545*	Dolby Noise Reduction Processor	
NE570/571/SA571	Compandor	423
NE572	Programmable Analog Compandor	425
NE645B/646B-N	Dolby Noise Reduction Processor	427

NEW PRODUCT

SD5340	4-Input/2-Output Audio Source Selector—Available 2nd Quarter 1981

NOTE
*This data sheet may be obtained by writing Publication Services at Signetics, 811 E. Arques, M/S 027, Sunnyvale, California 94086, or by calling (408) 746-2111.

LM387-N

DESCRIPTION

The LM387 is a dual preamplifier for the amplification of low level signals in applications requiring optimum noise performance. Each of the two amplifiers is completely independent, with an internal power supply decoupler-regulator, providing 110dB supply rejection and 60dB channel separation. Other outstanding features include high gain (104dB), large output voltage swing (V_{CC} - 2V p-p), and wide power bandwidth (75kHz, 20V p-p). The LM387 operates from a single supply across the wide range of 9 to 40V.

The amplifiers are internally compensated for all gains greater than 10. The LM387 is available in an 8 lead dual-in-line package.

FEATURES

- **Low noise—0.8μV total input noise**
- **High gain—104dB open loop**
- **Single supply operation**
- **Wide supply range 9 to 40V**
- **Power supply rejection—110dB**
- **Large output voltage swing (VCC - 2V p-p)**
- **Wide bandwidth 15MHz unity gain**
- **Power bandwidth 75kHz, 20V p-p**
- **Internally compensated**
- **Short circuit protected**

PIN CONFIGURATION

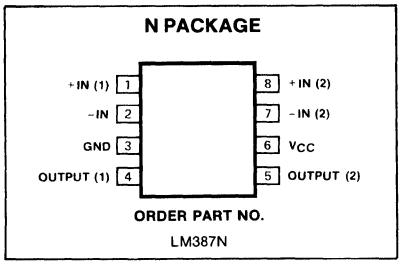

EQUIVALENT CIRCUIT

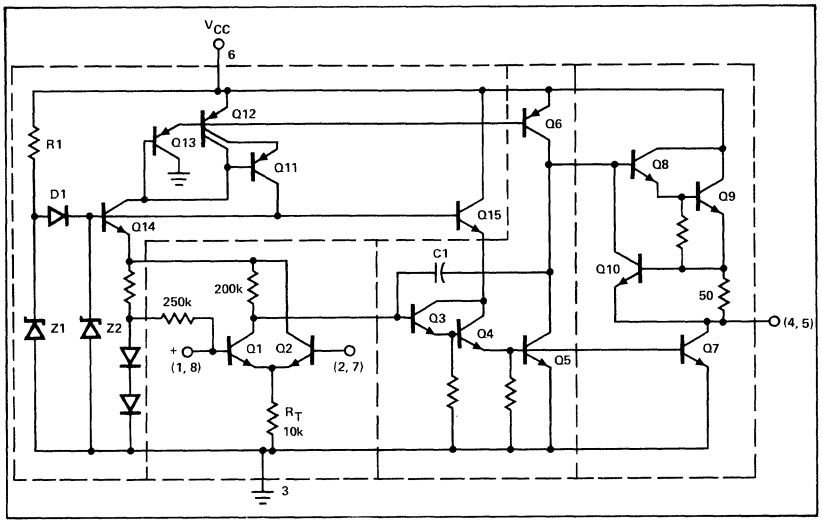

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	+40	V
Power dissipation	500	mW
Operating temperature range	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60sec)	+300	°C

DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{CC} = 14V unless otherwise specified.

PARAMETER	TEST CONDITIONS	LM387			UNIT
		Min	Typ	Max	
Voltage gain	Open loop		160,000		V/V
Supply current	V_{CC} 9 to 40V, $R_L = \infty$		10		mA
Input resistance	Positive input		100		kΩ
	Negative input		200		kΩ
Input current	Negative input		0.5		μA
Output resistance	Open loop		150		Ω
Output current	Source		8		mA
	Sink		2		mA
Output voltage swing	Peak-to-peak		V_{CC}-2		V

AC ELECTRICAL CHARACTERISTICS

$T_A = 25\,°C$, $V_{CC} = 14V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	LM387			UNIT
		Min	Typ	Max	
Small signal bandwidth			15		MHz
Power bandwidth	20V p-p ($V_{CC} = 24V$)		75		kHz
Maximum input voltage	Linear operation			300	μVrms
Supply rejection ratio	f = 1kHz		110		dB
Channel separation	f = 1kHz		60		dB
Total harmonic distortion	75dB gain, f = 1kHz		0.1		%
Total equivalent input noise	$R_S = 600\Omega$, 100-10,000Hz		0.8	1.4	μVrms
Noise figure	50kΩ, 100-10,000Hz		1.0		dB
	10kΩ, 100-10,000Hz		1.6		dB
	5kΩ, 100-10,000Hz		2.8		dB

TYPICAL PERFORMANCE CHARACTERISTICS

LARGE SIGNAL FREQUENCY RESPONSE

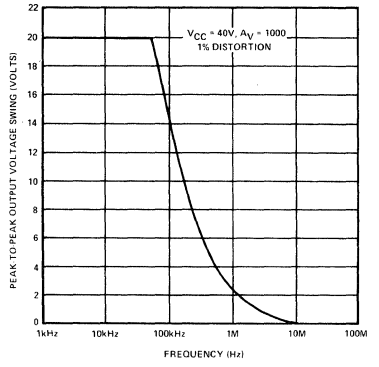

GAIN vs TEMPERATURE

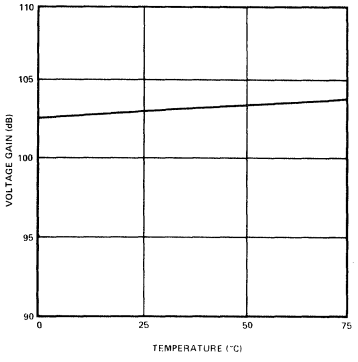

V_{CC} vs I_{CC}

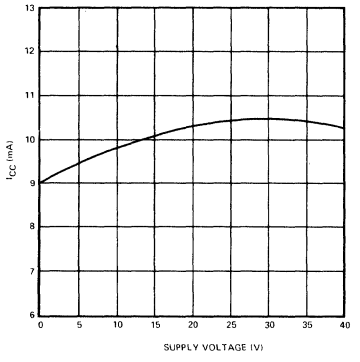

P-P OUTPUT VOLTAGE SWING vs V_{CC}

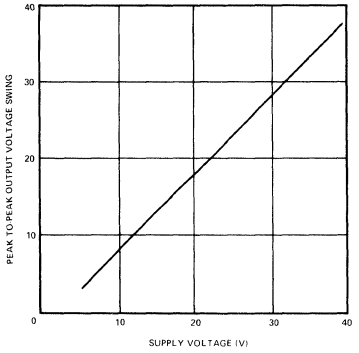

% DISTORTION

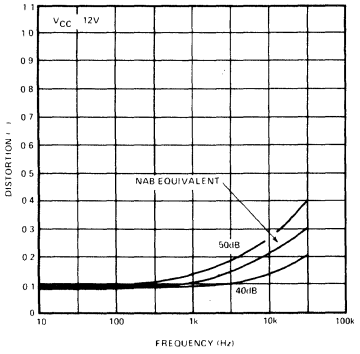

CHANNEL SEPARATION

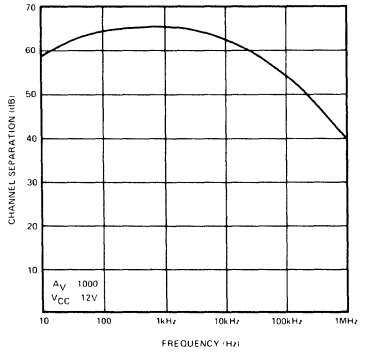

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

PSRR vs FREQUENCY

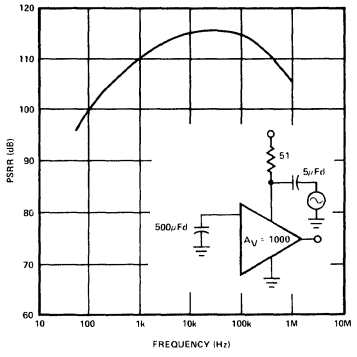

GAIN AND PHASE RESPONSE

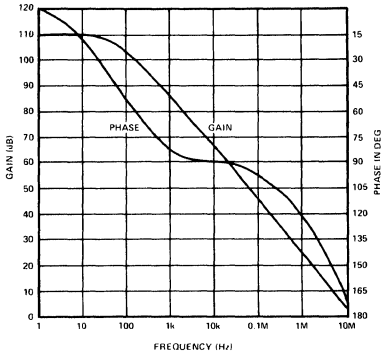

VOLTAGE GAIN vs SUPPLY VOLTAGE

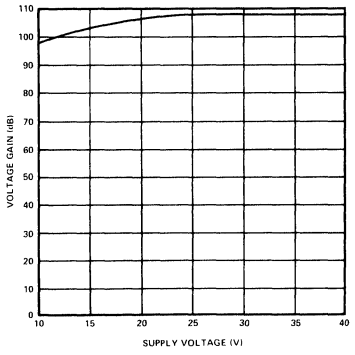

NOISE VOLTAGE vs FREQUENCY

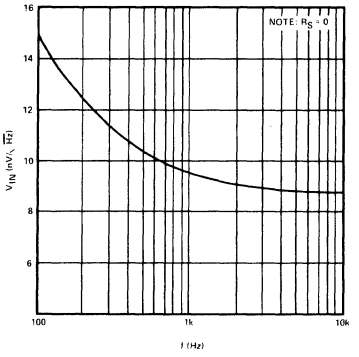

NOISE CURRENT vs FREQUENCY

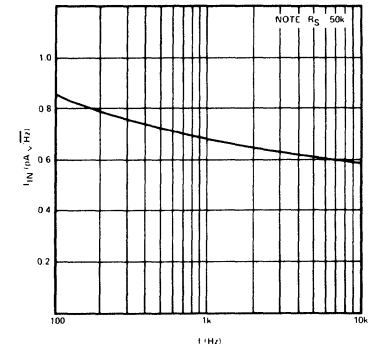

PULSE RESPONSE

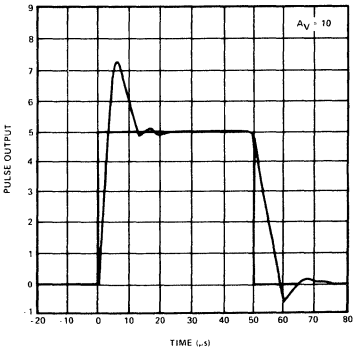

TYPICAL APPLICATIONS

TYPICAL MAGNETIC PHONO PREAMPLIFIER

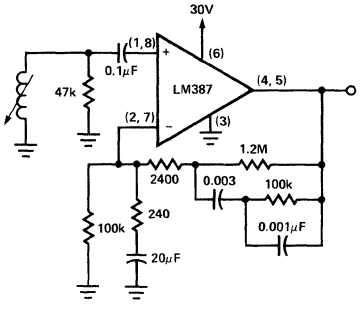

AUDIO MIXER

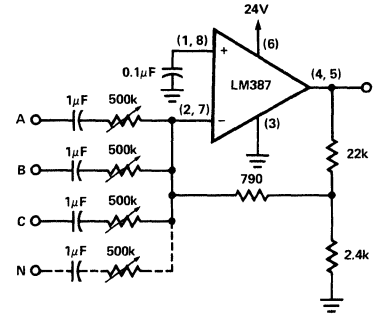

TYPICAL APPLICATIONS (Cont'd)

TWO-POLE FAST TURN-ON NAB TAPE PREAMPLIFIER

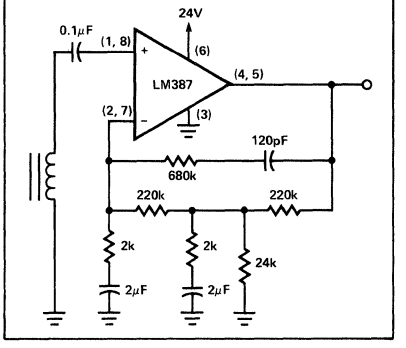

TYPICAL TAPE PLAYBACK AMPLIFIER

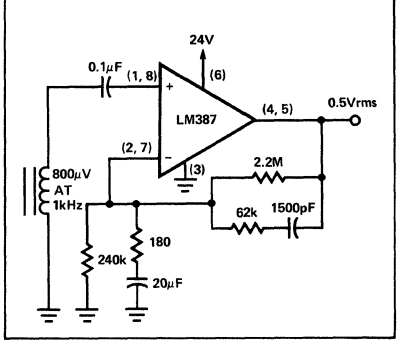

NE/SE540-H

DESCRIPTION

The NE/SE540 is a monolithic, class AB power amplifier designed specifically to drive a pair of complementary output transistors. The device features low standby current yet retains a high output current drive capability with internal current limiting. A wide power bandwidth and excellent linearity make this device ideal for use an audio power amplifier.

FEATURES

- **Internal current limiting**
- **Low standby current**
- **High output current capability**
- **Wide power bandwidth**
- **Low distortion**

PIN CONFIGURATION

H PACKAGE

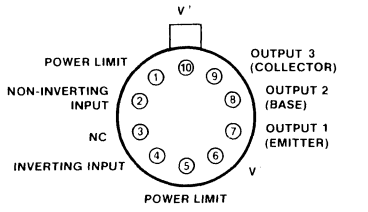

ORDER PART NO.
NE540H, SE540H

EQUIVALENT SCHEMATIC

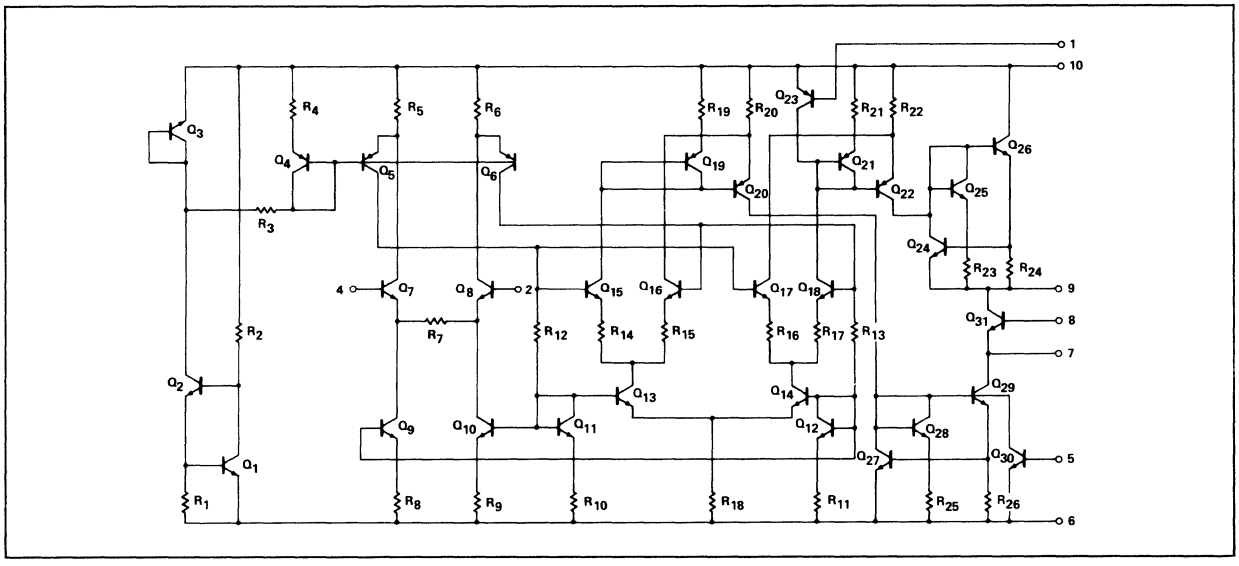

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage		
SE540	±27	V
NE540	±22	V
Operating temperature range		
SE540	-55 to +125	°C
NE540	0 to +70	°C
Storage temperature range	-65 to +150	°C
Output short circuit duration (Not exceeding maximum dissipation.)	Indefinite	

13

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ and $V_{CC} = \pm 20V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE540			NE540			UNIT
		Min	Typ	Max	Min	Typ	Max	
Operating supply voltage		±5		±25	±5		±20	V
Quiescent current			13	20		13	20	mA
Input offset voltage			5	7		7	10	mV
Input offset current			0.3	0.7		0.5	1	μA
Input bias current			1.5	3		2	5	μA
Input impedance			20			20		kΩ
Current gain		80	100		70	90		dB
Gain variation over temperature range	40dB gain		±0.1			±0.1		dB
Power supply rejection ratio	40dB gain	80	90		60	80		dB
Common mode rejection ratio			110			90		dB
Output drive current		±120	±150		±80	±100		mA

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ and $V_{CC} = \pm 20V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE540			NE540			UNIT
		Min	Typ	Max	Min	Typ	Max	
Frequency response	40dB gain ±1dB		500			100		kHz
Distortion	40dB gain, Output 3dB below clipping		0.25	0.5		0.5	1.0	%
	$R_L = 600\Omega$							
	$R_L = 2k\Omega$		0.06			0.06		
Equivalent input noise voltage	$R_S = 600\Omega$ 50Hz to 500kHz		10			10		μV
Slew rate	$V_{CC} = \pm 20V$ $V_{OUT} = \pm 15V$		200			200		V/μs

TYPICAL PERFORMANCE CHARACTERISTICS

CLOSED LOOP FREQUENCY RESPONSE

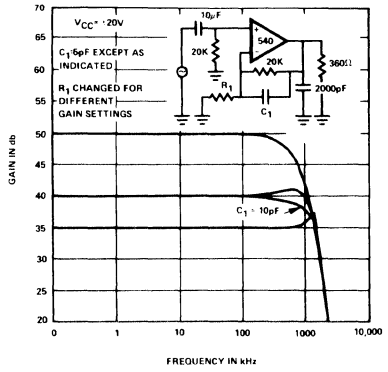

OPEN LOOP GAIN AND FREQUENCY RESPONSE

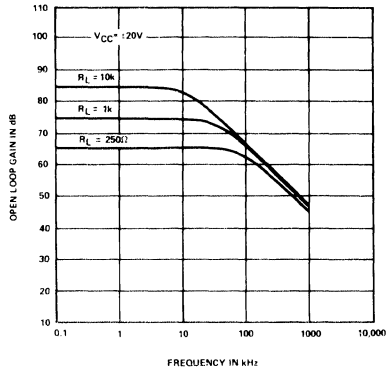

PHASE RESPONSE vs FREQUENCY

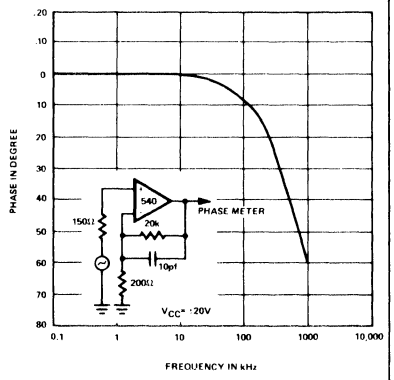

POWER SUPPLY REJECTION vs FREQUENCY

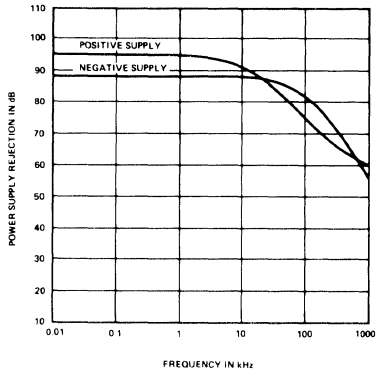

OUTPUT CURRENT vs I_B/V_{BE} OF CURRENT LIMITER

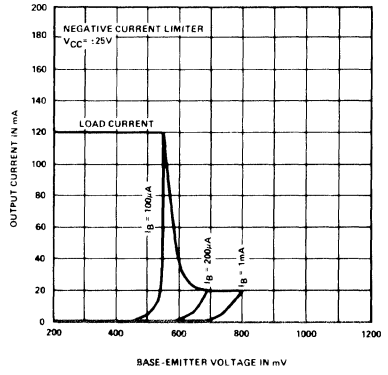

OUTPUT CURRENT vs I_B/V_{BE} OF CURRENT LIMITER

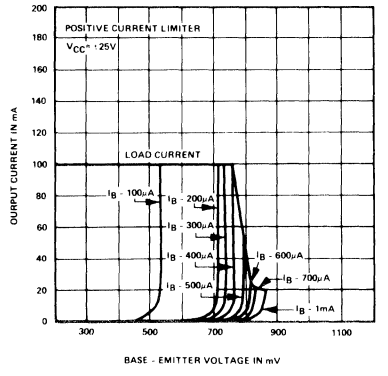

QUIESCENT CURRENT vs SUPPLY VOLTAGE



TOTAL HARMONIC DISTORTION vs OUTPUT



OUTPUT SATURATION VOLTAGE vs LOAD

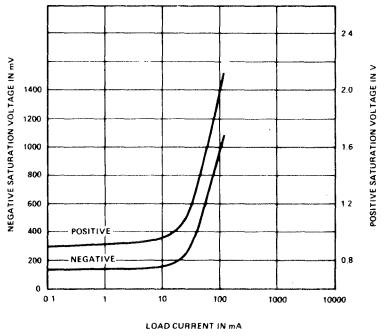

13

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

TOTAL HARMONIC DISTORTION vs FREQUENCY



INTERMODULATION DISTORTION vs LOAD



TOTAL HARMONIC DISTORTION vs LOAD



BIAS CURRENT vs TEMPERATURE

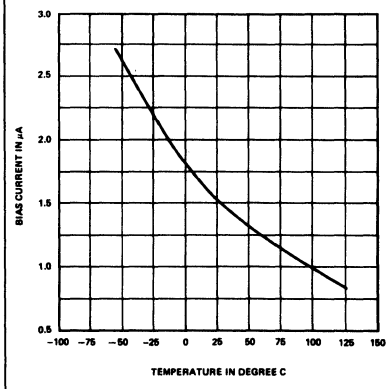

OFFSET CURRENT vs TEMPERATURE

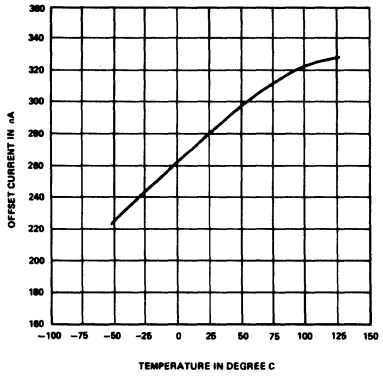

OPEN LOOP GAIN vs TEMPERATURE

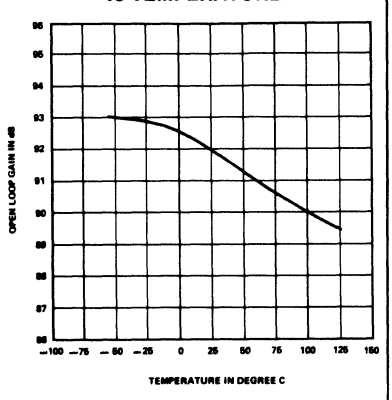

OFFSET VOLTAGE vs TEMPERATURE

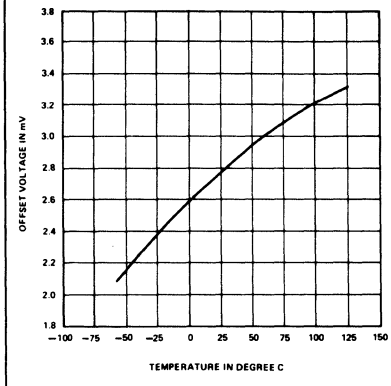

MAXIMUM DISSIPATION vs AMBIENT TEMPERATURE

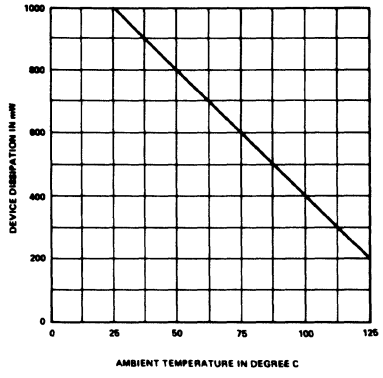

INTERNAL POWER DISSIPATION vs LOAD POWER

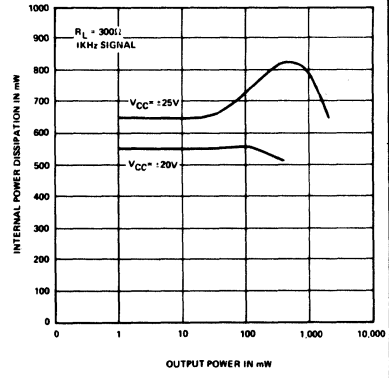

TEST CIRCUITS

OFFSET VOLTAGE MEASUREMENT



OUTPUT BIAS CONTROL

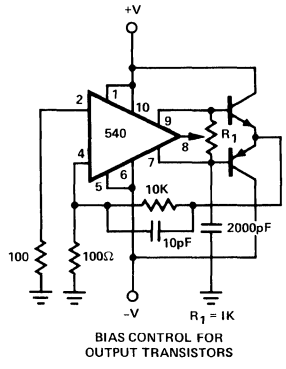

35 WATT AMPLIFIER

P.C. BOARD LAYOUT (Bottom View)

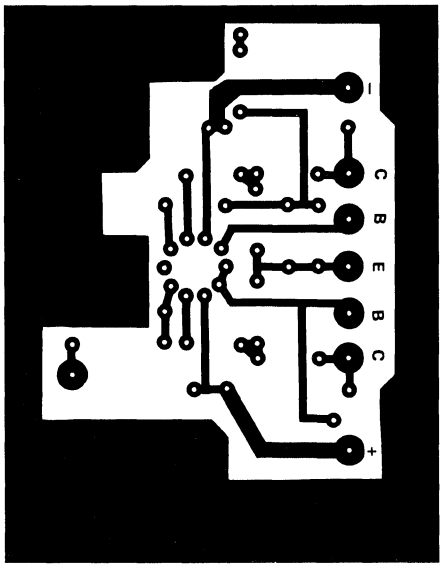

PARTS LAYOUT (Top View)

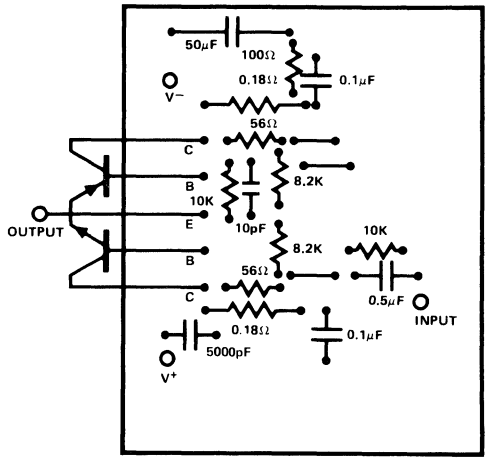

13

NE542-N

DESCRIPTION

The NE542 is a dual preamplifier for the amplification of low level signals in applications requiring optimum noise performance. Each of the two amplifiers is completely independent, with individual internal power supply decoupler-regulator, providing 110dB supply rejection and 70dB channel separation. Other outstanding features include high gain (104dB), large output voltage swing (V_{CC} -2Vp-p), and internal compensation to 10dB. The NE542 operates from a single supply across the wide range of 9 to 24V.

The NE542 is ideal for use in stereo phono, tape, or microphone preamps and other applications requiring low noise amplication of small signals.

FEATURES

- **Low noise—.7μV total input noise**
- **High gain—104dB open loop**
- **Single supply operation**
- **Wide supply range 9 to 24V**
- **Power supply rejection 110dB**
- **Large output voltage swing (V_{CC} -2V p-p)**
- **Wide bandwidth 15MHz unity gain**
- **Power bandwidth 100kHz (15V p-p)**
- **Internally compensated (stable at 10dB)**
- **Short circuit protected**
- **High slew rate 5V/μs**

PIN CONFIGURATION

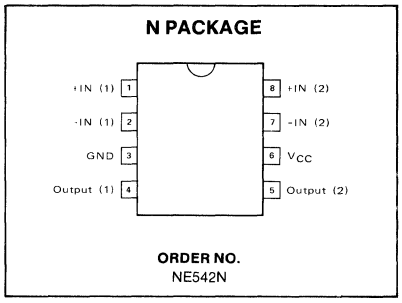

EQUIVALENT CIRCUIT

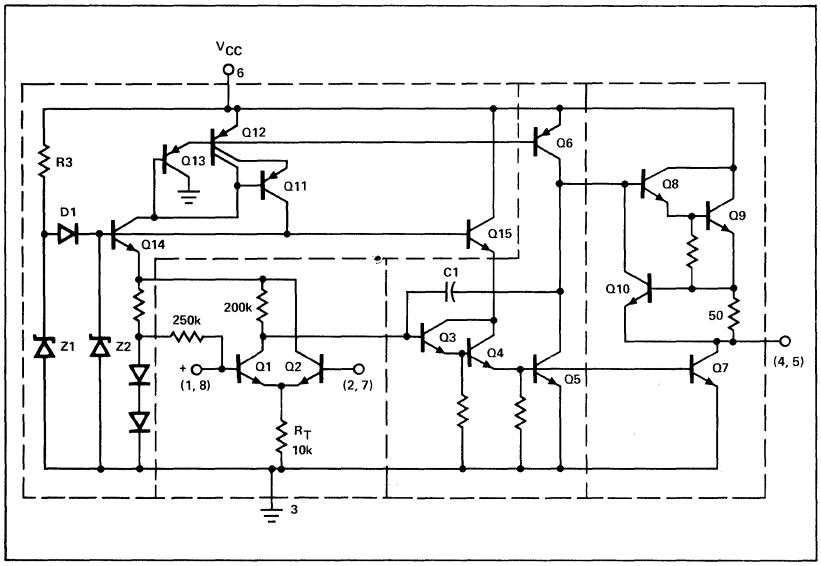

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	+24	V
Power dissipation	500	mW
Operating temperature range	0 to +70	°C
Storage temperature range	-65 to +150	°C
Lead temperature (soldering, 60sec)	+300	°C

DC ELECTRICAL CHARACTERISTICS

$T_A = 25°C$, $V_{CC} = 14V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	NE542			UNIT
		Min	Typ	Max	
Supply voltage		9		24	V
Supply current	V_{CC} = 9 to 18V, $R_L = \infty$		9	15	mA
Input resistance					
Positive input			100		kΩ
Negative input			200		kΩ
Output resistance	Open loop		150		Ω

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = 14V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	NE542			UNIT
		Min	Typ	Max	
Voltage gain	Open loop		160,000		V/V
Input current Negative input			 .5		 μA
Output current	Source Sink (linear operation)	8 2	14 3		mA mA
Output voltage swing Small signal bandwidth Slew rate Power bandwidth	 15V p-p	V_{CC} -2.5	V_{CC} -2 15 5 100		V MHz V/μs kHz
Maximum input voltage	Linear operation			300	mVrms
Supply rejection ratio Channel separation	f = 60, 120Hz f = 1kHz f = 1kHz		100 110 70		dB dB dB
Total harmonic distortion Total equivalent input Noise	75dB gain, f = 1kHz RS = 600Ω, 100 - 10,000Hz		.1 .7	 1.2	% μVrms
Noise figure	RS = 50kΩ, 10 - 10,000Hz RS = 20kΩ, 10 10,000Hz RS = 10kΩ, 10 - 10,000Hz RS = 5kΩ, 10 - 10,000Hz		1.2 1.2 1.5 2.4		dB dB dB dB

TYPICAL PERFORMANCE CHARACTERISTICS

LARGE SIGNAL FREQUENCY RESPONSE

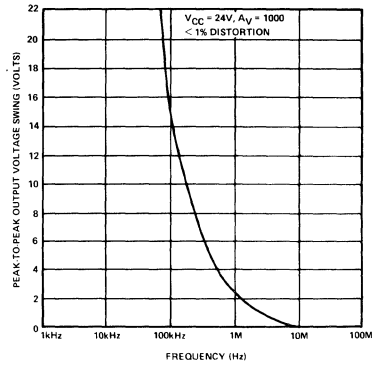

GAIN vs TEMPERATURE

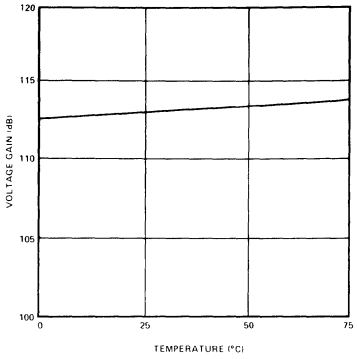

V_{CC} vs I_{CC}

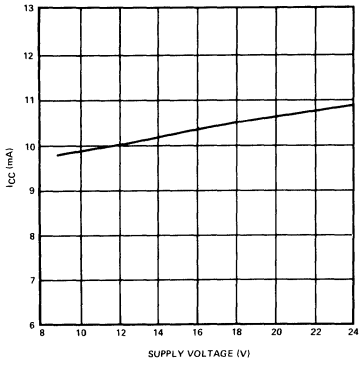

P-P OUTPUT VOLTAGE SWING vs V_{CC}

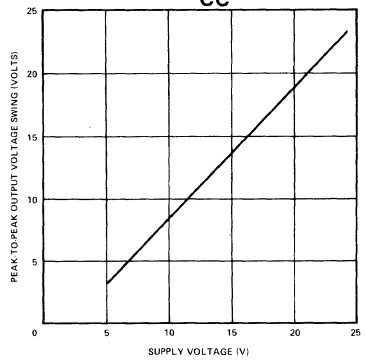

% DISTORTION

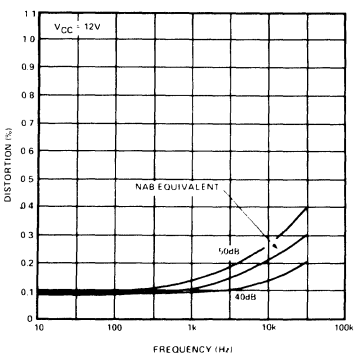

CHANNEL SEPARATION

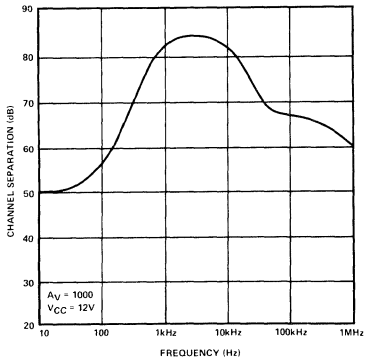

13

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

PSRR vs FREQUENCY

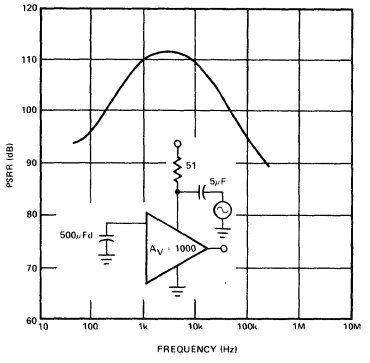

GAIN AND PHASE RESPONSE

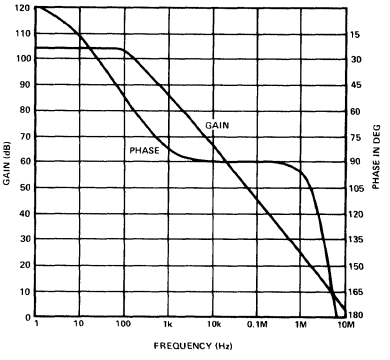

VOLTAGE GAIN vs SUPPLY VOLTAGE

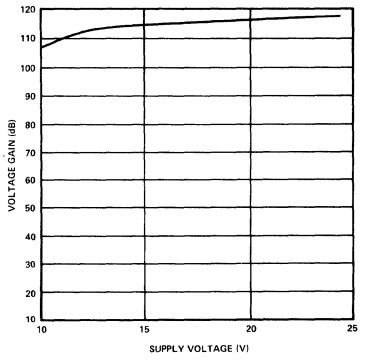

NOISE VOLTAGE vs FREQUENCY

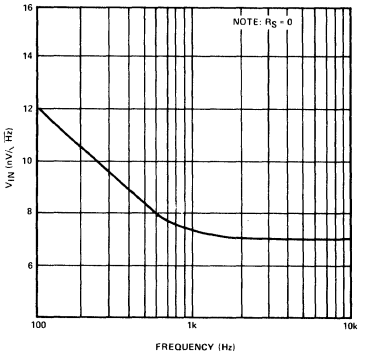

NOISE CURRENT vs FREQUENCY

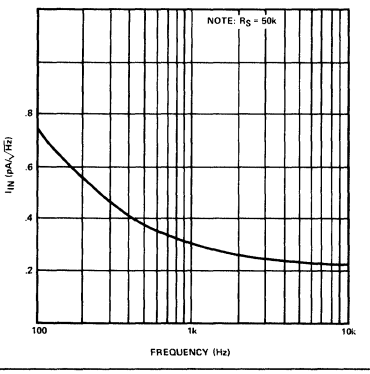

PULSE RESPONSE

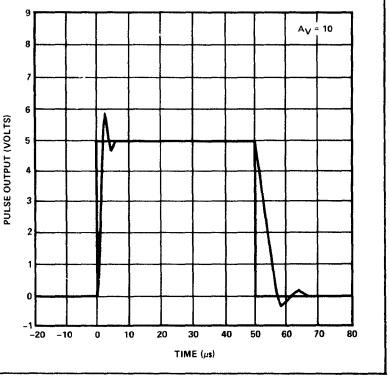

TYPICAL APPLICATIONS

TYPICAL TAPE PLAYBACK AMPLIFIER



AUDIO MIXER



TWO-POLE FAST TURN-ON NAB TAPE PREAMP



R1AA MAGNETIC PHONO PREAMP



NOTE: All resistors values are typical and in ohms.

NE570/571-F,N
SA571-F,N

DESCRIPTION

The NE570/571 is a versatile low cost dual gain control circuit in which either channel may be used as a dynamic range compressor or expandor. Each channel has a full wave rectifier to detect the average value of the signal; a linerarized, temperature compensated variable gain cell; and an operational amplifier.

The NE570/571 is well suited for use in telephone subscriber and trunk carrier systems, communications systems and hi-fi audio systems.

FEATURES

- **Complete compressor and expandor in 1 IC**
- **Temperature compensated**
- **Greater than 110dB dynamic range**
- **Operates down to 6Vdc**
- **System levels adjustable with external components**
- **Distortion may be trimmed out**

APPLICATIONS

- **Telephone trunk compandor—570**
- **Telephone subscriber compandor—571**
- **High level limiter**
- **Low level expandor—noise gate**
- **Dynamic noise reduction systems**
- **Voltage controlled amplifier**
- **Dynamic filters**

PIN CONFIGURATION

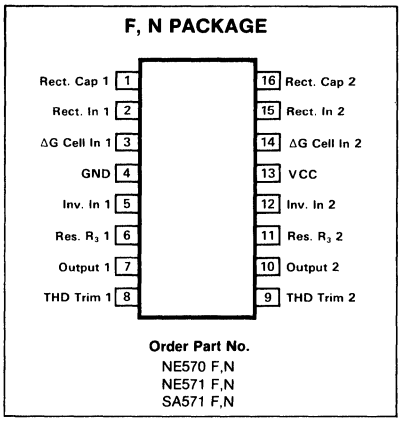

ABSOLUTE MAXIMUM RATINGS

	PARAMETER	RATING	UNIT
	Positive supply		Vdc
	570	24	
	571	18	
T_A	Operating temperature range		
	NE	0 to 70	°C
	SA	-40 to +85	°C
P_D	Power dissipation	400	mW

BLOCK DIAGRAM

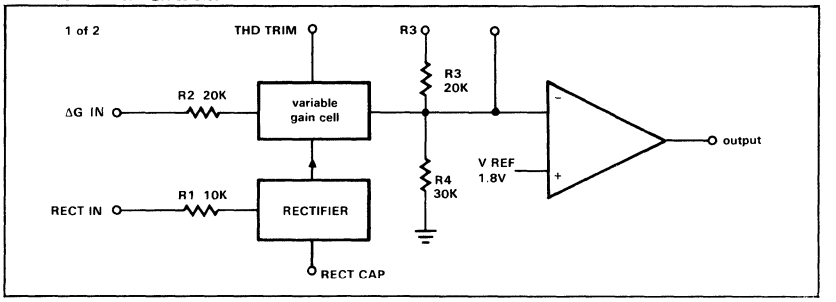

CIRCUIT DESCRIPTION

The NE570/571 compandor building blocks, as shown in the block diagram, are a full wave rectifier, a variable gain cell, an operational amplifier and a bias system. The arrangement of these blocks in the IC result in a circuit which can perform well with few external components, yet can be adapted to many diverse applications.

The full wave rectifier rectifies the input current which flows from the rectifier input, to an internal summing node which is biased at V_{REF}. The rectified current is averaged on an external filter capacitor tied to the C_{RECT} terminal, and the average value of the input current controls the gain of the variable gain cell. The gain will thus be proportional to the average value of the input signal for capacitively coupled voltage inputs as shown in the following equation. Note that for capacitively coupled inputs there is no offset voltage capable of producing a gain error. The only error will come from the bias current of the rectifier (supplied internally) which is less than .1μA.

$$G \propto \frac{|V_{IN} - V_{REF}|_{ave}}{R_1}$$

or

$$G \propto \frac{|V_{IN}|_{ave}}{R_1}$$

The speed with which gain changes to follow changes in input signal levels is determined by the rectifier filter capacitor. A small capacitor will yield rapid response but will not fully filter low frequency signals. Any ripple on the gain control signal will modulate the signal passing through the variable gain cell. In an expandor or compressor application, this would lead to third harmonic distortion, so there is a tradeoff to be made between fast attack and decay times, and distortion. For step changes in amplitude, the change in gain with time is shown by this equation.

$$G(t) = (G_{initial} - G_{final})\ e^{-t/\tau} + G_{final};\ \tau = 10K \times C_{RECT}$$

The variable gain cell is a current in, current out device with the ratio I_{OUT}/I_{IN} controlled by the rectifier. I_{IN} is the current which flows from the ΔG input to an internal summing node biased at V_{REF}. The following equation applies for capacitively coupled inputs. The output current, I_{OUT}, is fed to the summing node of the op amp.

$$I_{IN} = \frac{V_{IN} - V_{REF}}{R_2} = \frac{V_{IN}}{R_2}$$

A compensation scheme built into the ΔG cell compensates for temperature, and cancels out odd harmonic distortion. The only distortion which remains is even harmonics, and they exist only because of internal offset voltages. The THD trim terminal provides a means for nulling the internal offsets for low distortion operation.

The operational amplifier (which is internally compensated) has the non-inverting input tied to V_{REF}, and the inverting input connected to the ΔG cell output as well as brought out externally. A resistor, R_3, is brought out from the summing node and allows compressor or expandor gain to be determined only by internal components.

13

The output stage is capable of ±20mA output current. This allows a +13dBm (3.5V rms) output into a 300Ω load which, with a series resistor and proper transformer, can result in +13dBm with a 600 Ω output impedance.

A band gap reference provides the reference voltage for all summing nodes, a regulated supply voltage for the rectifier and ΔG cell, and a bias current for the ΔG cell. The low tempco of this type of reference provides very stable biasing over a wide temperature range.

The typical performance characteristics illustration shows the basic input-output transfer curve for basic compressor or expandor circuits.

TYPICAL PERFORMANCE CHARACTERISTICS

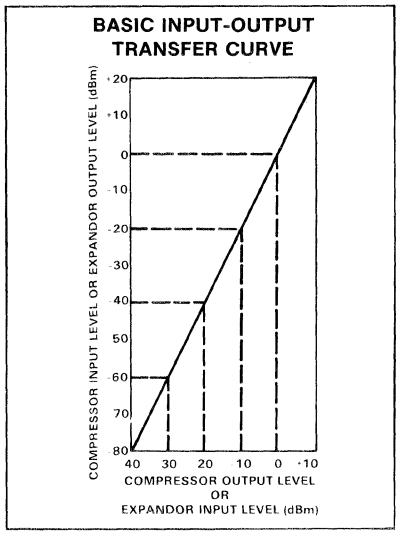

TYPICAL TEST CIRCUIT

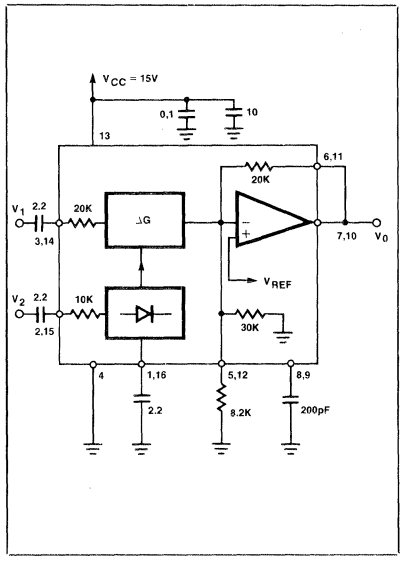

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = 15V$[1]

PARAMETER	TEST CONDITIONS	NE570			NE/SA571[6]			UNIT
		Min	Typ	Max	Min	Typ	Max	
V_{CC} Supply voltage		6		24	6		18	V
I_{CC} Supply current	No signal		3.2	4.0		3.2	4.8	mA
Output current capability		±20						mA
Output slew rate			±.5					V/us
Gain cell distortion[2]	Untrimmed		.3	1.0		.5	2.0	%
	Trimmed		.05			.1		
Resistor tolerance			±5	±15				%
Internal reference voltage		1.7	1.8	1.9	1.65	1.8	1.95	V
Output dc shift[3]	Untrimmed		±20	±50		±30	±100	mV
Expandor output noise	No signal, 20Hz-20kHz		20					μV
			-15					dBRNC
Unity gain level		-1	0	+1	-1.5	0	+1.5	dBm
Gain change[2,4]	-40°C < T < 70°C		±.1			±.1		dB
	0°C < T < 70°C		±.1	±.2		±.1	±.4	
Reference drift[4]	-40°C < T < 70°C		+2, -25	-10, -40		+2, -25	+20, -50	mV
	0°C < T < 70°C		±5	±10		±5	±20	
Resistor drift[4]	-40°C < T < 70°C		+8,-0					%
	0°C < T < 70°C		+1,-0					
Tracking error[5], input V_1 = OdBm	Rectifier input, V_2 = +6dBm		±.2					dB
	-10dBm		+.2	-.2,+.4		+.2	-.2,+.5	
	-20dBm		+.2	-.3,+.6		+.2	-.4,+.7	
	-30dBm		+.2	-.5,+1		+.2	-1,+1.5	
	-40dBm		+.2,-.4			+.2,-.4		

NOTES

1. Except where indicated, the 571 specifications are identical to the 570
2. Measured at OdBm,1kHz
3. Expandor ac input change from no signal to OdBm
4. Relative to value at $T_A = 25°C$
5. Relative to OdBm
6. Electrical characteristics for the SA571 only are specified over -40 to +85°C temperature range.

PRELIMINARY SPECIFICATION NE572-N

DESCRIPTION

The NE572 is a dual channel, high performance gain control circuit in which either channel may be used for dynamic gain compression or expansion. Each channel has a full wave rectifier to detect the average value of input signal; a linearized, temperature compensated variable gain cell and a dynamic time constant buffer. The buffer permits independent control of dynamic attack and recovery time with minimum external components and improved low frequency gain control ripple distortion over previous compandors.

The NE572 is intended for noise reduction in high performance audio systems. It can also be used in a wide range of communication systems and video recording applications.

FEATURES

- **Independent control of attack and recovery time.**
- **Improved low frequency gain control ripple**
- **Complementary gain compression and expansion with external Op Amp**
- **Wide dynamic range—greater than 110dB**
- **Temperature compensated gain control**
- **Low distortion gain cell**
- **Low noise**
- **Wide supply voltage range—down to 6V.**
- **System level adjustable with external components.**

APPLICATIONS

- **Dynamic noise reduction system**
- **Voltage control amplifier**
- **Stereo expandor**
- **Automatic level control**
- **High level limiter**
- **Low level noise gate**
- **State variable filter**

PIN CONFIGURATION

N PACKAGE
(Top view)

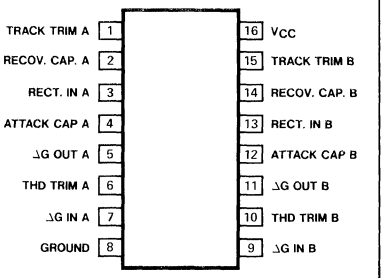

ORDER PART NO.
NE572N

ABSOLUTE MAXIMUM RATINGS

PARAMETER		RATING	UNIT
V_{CC}	Supply voltage	22	VDC
T_A	Operating temperature range	0 to 70	°C
P_D	Power dissipation	500	mW

BLOCK DIAGRAM

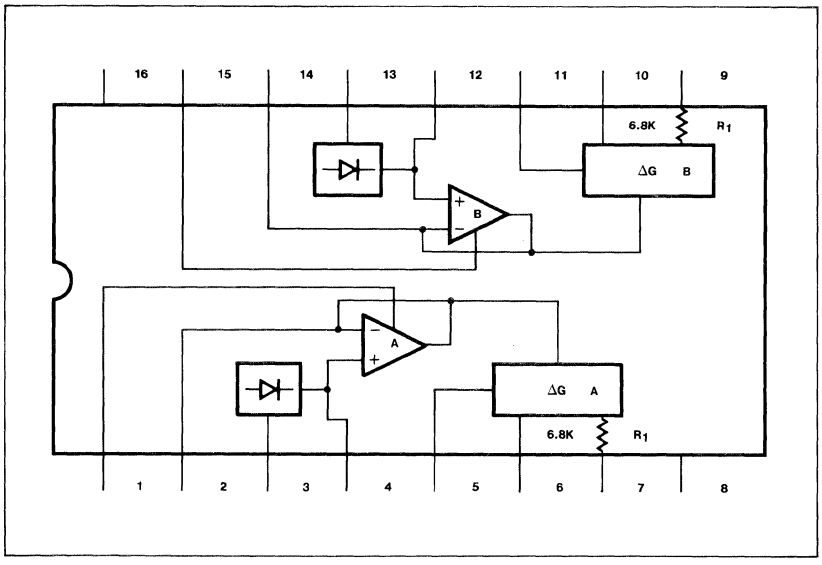

ELECTRICAL CHARACTERISTICS

Standard Test Conditions (unless otherwise noted) V_{CC} = 15V TA = 25°C Expandor mode (see test circuit) Input signals at unity gain level = 100mV RMS at 1KHz, $V_1 = V_2$, R_2 = 3.3K R_3 = 17.3K

PARAMETER		TEST CONDITIONS	LIMITS			UNIT
			Min	Typ	Max	
V_{CC}	Supply voltage		6		22	V_{DC}
I_{CC}	Supply current	No Signal			6	mA
	Internal voltage reference		2.3	2.5	2.7	V_{DC}
THD	(untrimmed)	1kHz C_A = 1.0μF		.2	1.0	%
THD	(trimmed)	1kHz C_R = 10μF		.05		%
THD	(trimmed)	100Hz		.25		%
	No signal output noise	Input to V_1 and V_2 grounded (20-20kHz)		10	25	uV
	DC level shift (untrimmed)	Input change from no signal to 100mV RMS		±20	±50	MV
	Unity gain level		−1	0	+1	dB
	Large signal distortion	$V_1 = V_2$ = 400mV		1.0	3.0	%
	Tracking error measured relative to value at unity gain output	Rectifier input V_2 = +6dB −30dB		±.2 ±.5	 −1.5 +.8	dB
	Channel crosstalk	200mV RMS into channel A, measured output on channel B	60			dB
	Power supply rejection ratio	120Hz		60		dB

TEST CIRCUIT

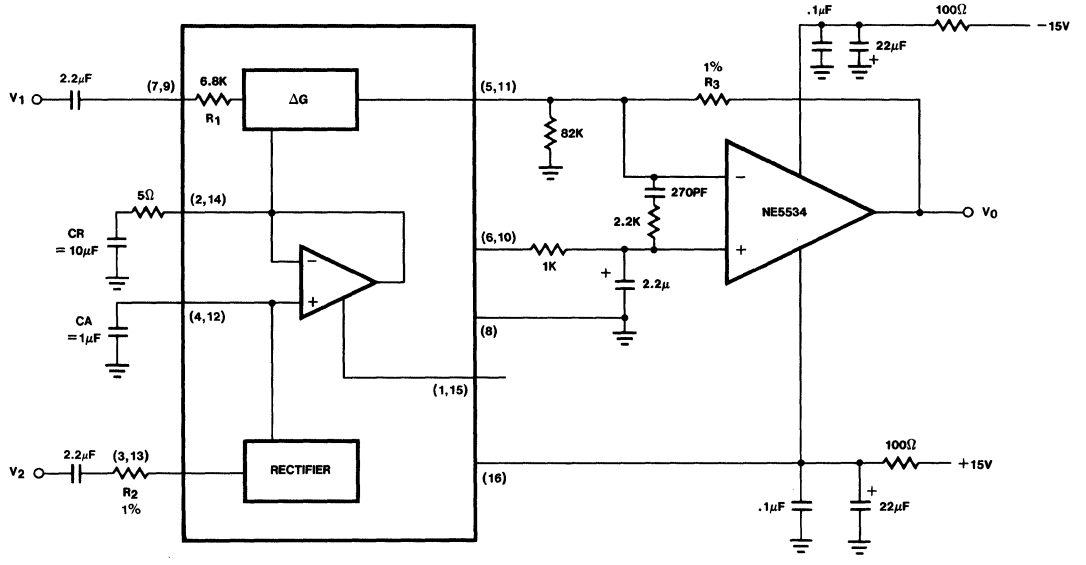

DESCRIPTION

The NE645B/646B is a monolithic audio noise reduction system circuit. This circuit is used to reduce the level of background noise introduced during recording and playback of audio signals on magnetic tape, and to improve the noise level in FM broadcast reception. This circuit is intended for use in a Dolby* B-type noise reduction system and is available only to licensees of Dolby Laboratories Licensing Corporation, San Francisco.

NOTE
*T.M. Dolby Laboratories

PIN CONFIGURATION (Top View)

N PACKAGE

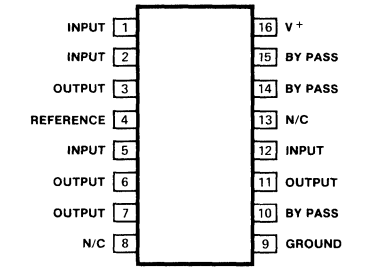

Order Part No. NE645BN/646BN

BLOCK DIAGRAM

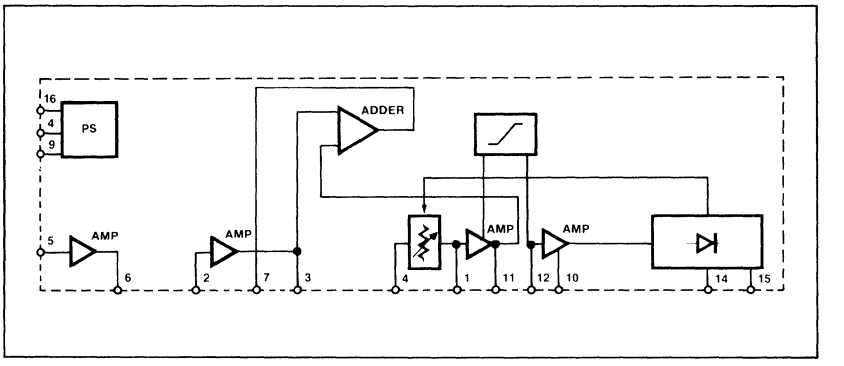

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Supply voltage	24	V
Temperature range		°C
Operating	0 to +70	
Storage	-65 to +150	
Lead temperature (soldering, 60sec)	+300	°C

DC ELECTRICAL CHARACTERISTICS

V_{CC} = 12 volts, f = 20Hz to 20kHz.
All levels referenced to 580mVrms (0dB) at Pin 3, T_A = +25°C unless otherwise noted.

PARAMETER	TEST CONDITIONS	NE645B			NE646B			UNIT
		Min	Typ	Max	Min	Typ	Max	
Supply voltage range		8		20	8		20	V
Supply current			16	24		16	24	mA
Voltage gain (Pins 5-3)	f = 1kHz (Pins 6 & 2 connected)	24.5	26	27.5	24.5	26	27.5	dB
Voltage gain (Pins 3-7)	f = 1kHz, 0dB at pin 3, Noise reduction out	-0.5	0	+0.5	-0.5	0	+0.5	dB
Distortion	f = 20Hz -20kHz 0db		0.05	0.1		0.05	0.2	%
	f = 20Hz -15kHz, +10db		0.15	0.3		0.2	0.5	%
Signal handling	f = 1kHz distortion <0.3%	+10	+14					dB
Signal handling	f = 1kHz distortion < 0.5%				+10	+12		dB
*Signal-to-noise ratio	Record (Pins 6 & 2 connected)	67	72		64	68		dB
	Record (Input on pin 2)	67	72		64	68		dB
	Playback (Pins 6 & 2 connected)	77	82		74	78		dB
	Playback (Input on pin 2)	77	82		74	78		dB
Record mode Frequency response (at pin 7)	f = 1.4kHz							
	Input at pin 5 = 0dB	-1	0	+1	-1.5	0	+1.5	dB
	= -20dB	-16.6	-15.6	-14.6	-17.1	-15.6	-14.1	dB
	= -30dB	-23.5	-22.5	-21.5	-24.0	-22.5	-21.0	dB
	f = 5kHz							
	Input at pin 5 = 0dB	-0.7	+0.3	+1.3	-1.2	+0.3	+1.8	dB
	= -20dB	-17.8	-16.8	-15.8	-18.3	-16.8	-15.3	dB
	= -30dB	-22.8	-21.8	-20.8	-23.8	-21.8	-20.3	dB
	= -40dB	-30.2	-29.7	-28.7	-30.2	-29.7	-28.2	dB
	f = 20kHz							
	Input at pin 5 = 0dB	-0.3	+0.7	+1.7	-0.8	+0.7	+2.2	dB
	= -20dB	-18.3	-17.3	-16.3	-18.8	-17.3	-15.8	dB
	= -30dB	-25.2	-24.2	-23.2	-25.7	-24.2	-22.7	dB
Back-to-back frequency Response	Using typical record Mode response	-1	0	+1	-1.5	0	+1.5	dB
Input resistance	Pin 5	35	50	65	35	50	65	kΩ
	Pin 2	3.1	4.2	5.3	3.1	4.2	5.3	kΩ
Output resistance	Pin 6	1.9	2.4	3.1	1.9	2.4	3.1	kΩ
	Pin 3		80	120		80	120	Ω
	Pin 7		80	120		80	120	Ω

NOTE

* All noise levels are measured CCIR/ARM weighted and 10K source with respect to Dolby level. See Dolby Laboratories bulletin 19.

PERFORMANCE CHARACTERISTICS NE645B

ICC vs SUPPLY VOLTAGE

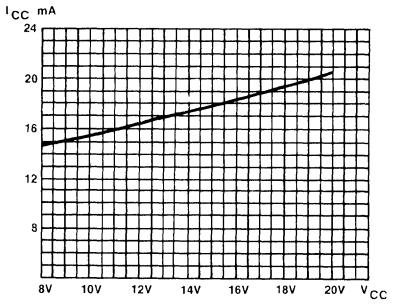

ICC vs VCC

THD vs FREQUENCY RECORD MODE

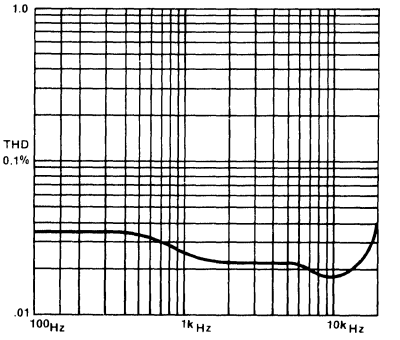

0dB Dolby record
VCC = 12V

THD vs FREQUENCY PLAY MODE

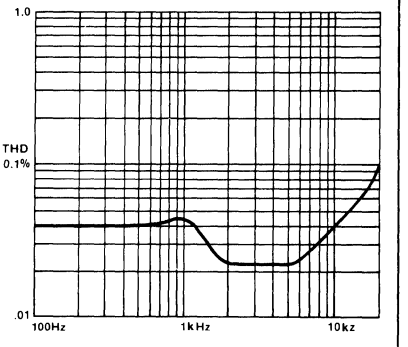

0dB Dolby play
VCC = 12V

THD vs OUTPUTS

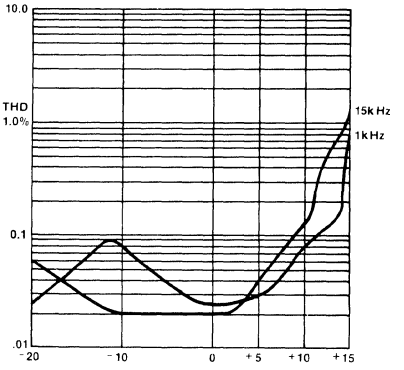

THD vs Output and f_o record
VCC = 12V

MAXIMUM SIG. HANDLING vs SUPPLY VOLTAGE FOR 0.3% THD RECORD

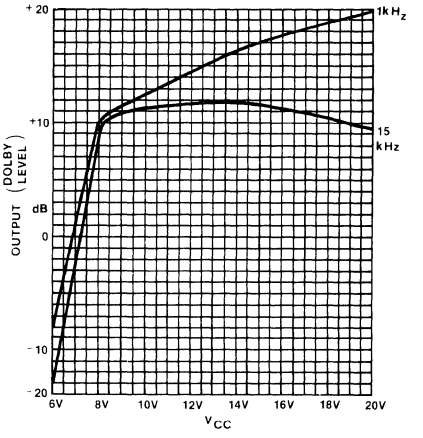

THD vs FREQUENCY

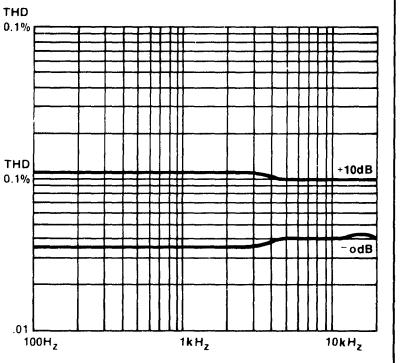

Noise reduction off
VCC = 12V

BACK TO BACK RESPONSE vs TEMP AND FREQUENCY

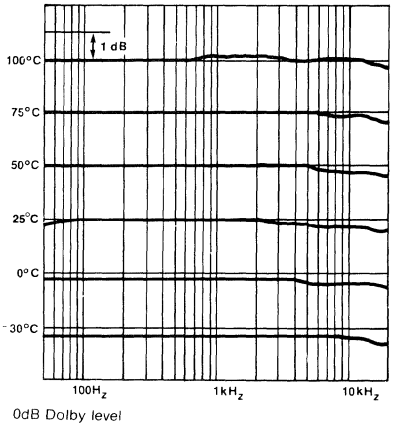

0dB Dolby level
VCC = 12V
Decode = 25°C

BACK TO BACK RESPONSE vs TEMP AND FREQUENCY

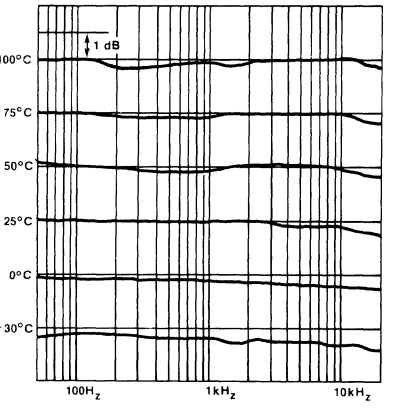

-10dB Dolby level
VCC = 12V
Decode = 25°C

BACK TO BACK RESPONSE vs TEMP AND FREQUENCY

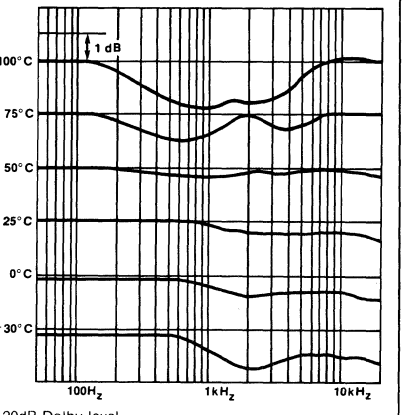

-20dB Dolby level
VCC = 12V
Decode = 25°C

13

PERFORMANCE CHARACTERISTICS NE645B (cont'd)

BACK TO BACK RESPONSE vs TEMP AND FREQUENCY

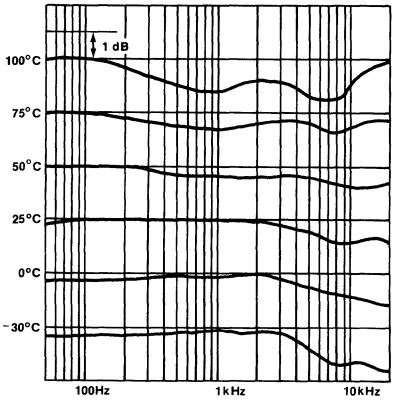

-30dB Dolby level
V_{CC} = 12V
Decode = 25°C

BACK TO BACK RESPONSE vs TEMP AND FREQUENCY

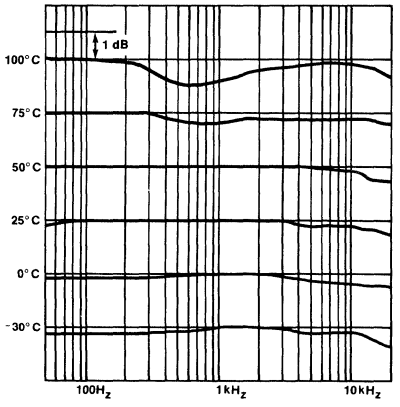

-40dB Dolby level
V_{CC} = 12V
Decode = 25°C

DOLBY B-TYPE ENCODER Output for constant level input (single tone frequency response)

Input level (dB) / Freq. (kHz)	0 (Dolby Level)	-5	-10	-15	-20	-25	-30	-35	-40	-45
0.1	0	0.1	0	0.1	0	0	0	0	0	0.1
0.14	0	0.2	0.2	0.2	0.2	0.2	0.1	0.2	0.1	0.2
0.2	0	0.3	0.4	0.5	0.5	0.6	0.6	0.3	0.5	0.6
0.3	0	0.3	0.6	1.1	1.3	1.3	1.3	1.3	1.3	1.3
0.4					2.0	2.1	2.2	2.3	2.1	2.2
0.5	0	0.3	0.8	1.8	2.6	2.9	2.9	3.0	2.9	3.0
0.6						3.6	3.7	3.8	3.7	3.8
0.7	0	0.4	0.9	2.1	3.5	4.3	4.4	4.5	4.4	4.6
0.8						4.8	5.0	5.3	5.1	5.2
0.9							5.6	5.8	5.6	5.8
1.0	0	0.4	1.0	2.3	4.2	5.7	6.1	6.3	6.2	6.3
1.2							6.9	7.1	7.1	7.1
1.4	0	0.3	0.9	2.3	4.4	6.6	7.5	7.7	7.7	7.7
2.0	0.1	0.4	0.9	2.2	4.3	7.0	8.5	8.9	8.9	8.9
3.0	0.2	0.6	0.9	1.9	3.9	6.6	8.8	9.7	9.7	9.8
5.0	0.3	0.6	1.0	1.7	3.2	5.4	8.2	10.0	10.3	10.4
7.0	0.3	0.6	1.0	1.7	2.8	4.7	7.3	9.7	10.4	10.6
10.0	0.4	0.7	1.1	1.7	2.6	4.2	6.5	9.1	10.4	10.6
14.0	0.5	0.8	1.1	1.8	2.7	4.1	6.1	8.5	10.3	10.6
20.0	0.7	0.7	1.2	1.9	2.7	4.0	5.8	8.0	9.9	10.6

NOTE

The figures given in this table are the average response of many of Dolby Laboratories' professional encoders, and are not intended to be taken as required consumer equipment performance characteristics. Thus, no inference should be drawn on the tolerances which licensees must maintain in consumer B-Type circuitry. The figures can however be used to plot typical characteristics.

APPLICATION INFORMATION

The NE645B/646B is a direct replacement for the NE545B. For a ±1dB back-to-back frequency response, the external compononts should be changed as shown in the test circuit. The critical component is R307 which should be shorted out. All other components, R303, R308, and C308 are now connected to empty pins. D301 will only effect the burst performance. C208 is only necessary in the test circuit in order to eliminate high frequency oscillation. In the actual application the 19kHz filter between pin 6 and 2 will perform the same high frequency roll off. All curcuit parameters are guaranteed at 12V V_{CC}.

TEST CIRCUIT NE645B/646B

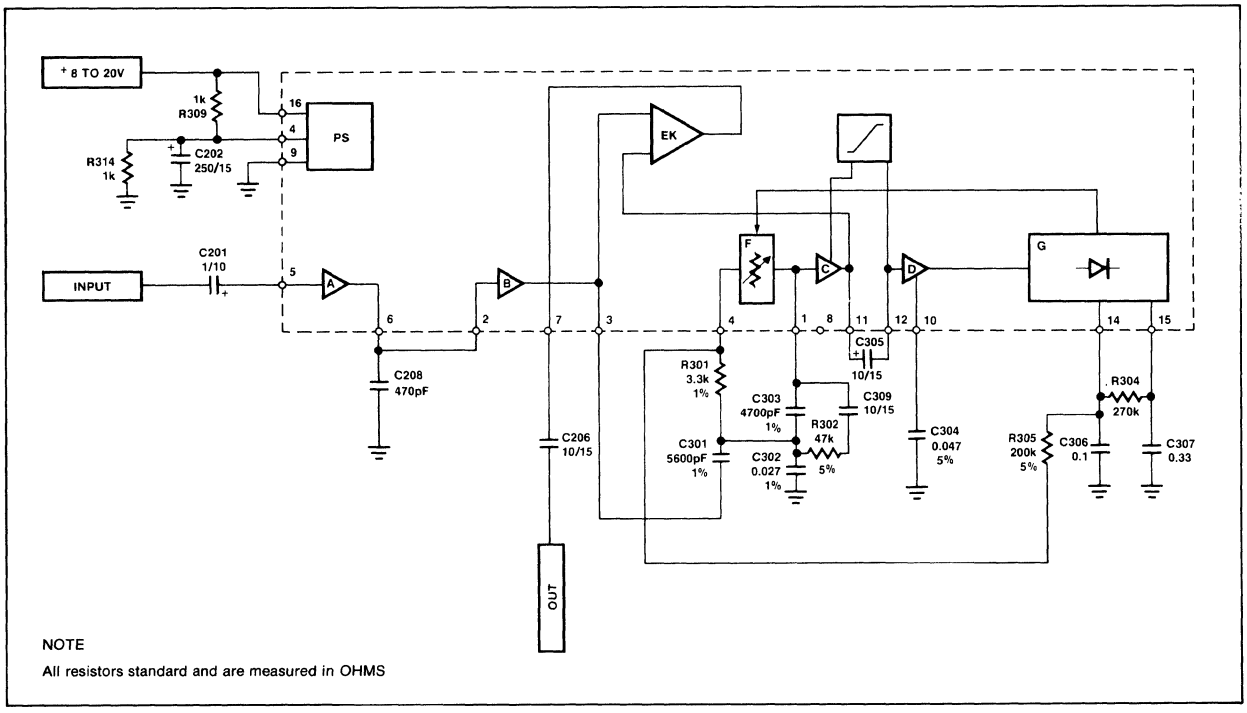

NOTE

All resistors standard and are measured in OHMS

The following components have been eliminated from the NE545B test circuit: (over)

R303, R306, R307, R308, C308, D301

Component changes:

C208 is changed from 200pF to 470pF and is moved from pin 5 to pin 6/2

R305 is changed from 680K to 200K and terminated at pin 4

13

TEST CIRCUIT NE545B

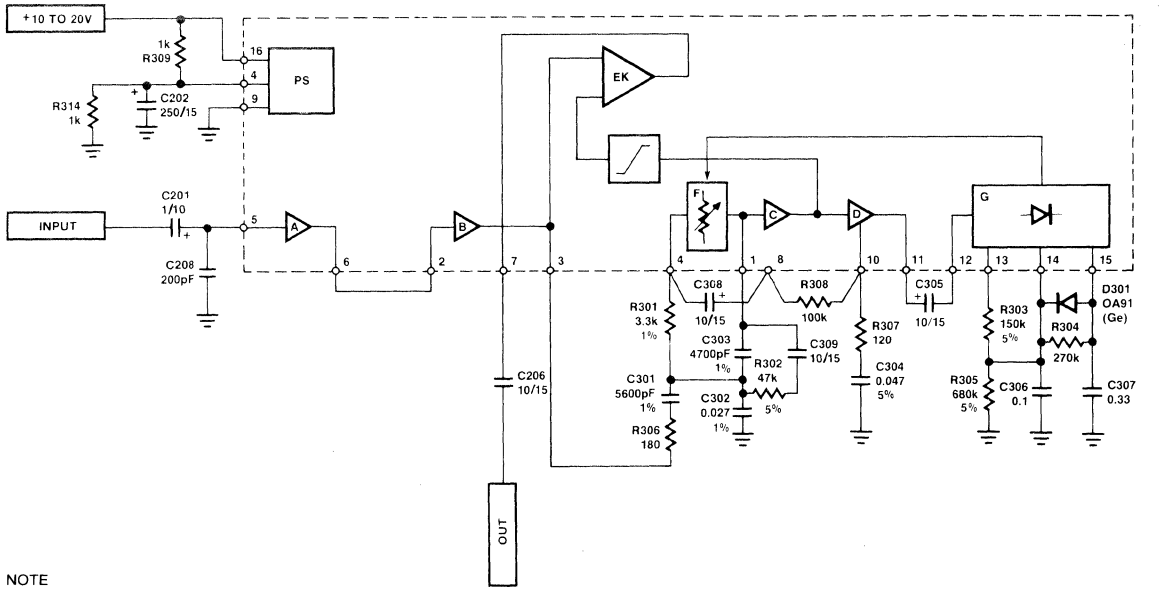

NOTE

All resistors standard and are measured in OHMS.

SECTION 14
PHASE LOCKED LOOPS

Section 14—PHASE LOCKED LOOPS

NE/SE564	Phase Locked Loop	436
NE/SE565	Phase Locked Loop	443
NE/SE566	Function Generator	448
NE/SE567	Tone Decoder/Phase Locked Loop	451

PHASE LOCKED LOOPS DEFINITIONS

T_A
Ambient temperature range. Range of the surrounding environment of the operating device.

T_J
Junction Temperature. The maximum temperature of the device. 150°C is standard for silicon devices.

T_{STG}
Storage temperature range. Temperature range that the device can be stored in a non-operating condition.

T_{SOLD}
Soldering Temperature. The temperature which can be applied to the lead frame of the device for short periods of time (normally specified for a duration of 10 sec).

Truth Tables
0 is logic level low
1 is logic level high
X - don't care condition - has no effect under circuit conditions listed.

Absolute Maximum Rating
Operating safe zones exceeding these limits could cause permanent damage to the device and are not meant to imply that devices can operate at these limits.

Power Dissipation
The power that the device can safely handle at 25°C. The dissipation must be derated as indicated for the individual package type.

Package Type Designation
See full package designations in Appendix.

V_{CC} ($-V_{CC}$)
Supply Voltage. The range of power supply voltage over which the device will operate safely.

FREE-RUNNING FREQUENCY (f_o', ω_o').
Also called the *center frequency*, this is the frequency at which the loop VCO operates when not locked to an input signal. The "prime" superscripts are used to distinguish the free-running frequency from f_o' and ω_o' which are used for the general oscillator frequency. (Many references use f_o' and ω_o' for both the free-running and general oscillator frequency and leave the proper choice for the reader to infer from the context). The appropriate units for f_o' and ω_o' are Hz and radians per second respectively.

LOCK RANGE ($2f_L$, $2\omega_L$).*
The range of frequencies over which the loop will remain in lock. Normally the lock range is centered at the free-running frequency unless there is some nonlinearity in the system which limits the frequency deviation on one side of f_o'. The deviations from f_o' are referred to as the *Tracking Range* or *Hold-in Range.* (See figure 1.6). The tracking range is therefore one-half of the lock range.

CAPTURE RANGE ($2f_C$, $2\omega_C$).**
Although the loop will remain in lock throughout its lock range, it may not be able to acquire lock at the tracking range extremes because of the selectivity afforded by the low-pass filter. The capture range also is centered at f_o' with the equal deviations called the *Lock-in* or *Pull-in Ranges.* The capture range can never exceed the lock range.

LOCK-UP TIME (t_L).***
The transient time required for a free-running loop to lock. This time depends principally upon the bandwidth selectivity designed into the loop with the low-pass filter. The lock-up time is inversely proportional to the selectivity bandwidth. Also, lock-up time exhibits a statistical spreading due to random initial phase relationships between the input and oscillator phases.

PHASE COMPARATOR CONVERSION GAIN (K_d).
The conversion constant relating the phase comparators output voltage to the phase difference between input and VCO signals when the loop is locked. At low input signal levels, K_d is also a function of signal amplitude. K_d has units of volts per radian (V/rad).

VCO CONVERSION GAIN (K_o).
The conversion constant relating the oscillators frequency shift from f_o' to the applied input voltage. K_o has units of radians per second per volt (rad/sec/volt). K_o is a linear function of ω_o' and must be obtained using a formula or graph provided or experimentally measured at the desired ω_o'.

LOOP GAIN (K_v).
The product of K_d, K_o, and the low-pass filters gain at dc. K_d is evaluated at the appropriate input signal level and K_o at the appropriate ω_o'. K_v has units of $(sec)^{-1}$.

CLOSED LOOP GAIN (CLG).
The output signal frequency and phase can be determined from a product of the CLG and the input signal where the CLG is given by

$$CLG = \frac{K_v}{1 + K_v} \qquad \text{(Equation 1.4)}$$

NATURAL FREQUENCY (ω_n).
The characteristic frequency of the loop, determined mathematically by the final pole positions in the complex plane or determined experimentally as the modulation frequency for which an underdamped loop gives the maximum frequency deviation from f_o' and at which the phase error swing is the greatest.

DAMPING FACTOR (ζ).
The standard damping constant of a second order feedback system. For the PLL, ζ refers to the ability of the loop to respond quickly to an input frequency step without excessive overshoot.

LOOP NOISE BANDWIDTH (B_L).
A loop property relating ω_n and τ which describes the effective bandwidth of the received signal. Noise and signal components outside this bandwidth are greatly attenuated.

* Also called Synchronization Range.
** Also called Acquisition Range.
*** Also called Acquisition Time.

NOTE
Refer to Section 10 of the 1979 Analog Applications Manual for an in-depth explanation of Phase Locked Loops and their applications.

NE/SE564-D,F,N

DESCRIPTION

The NE564 is a versatile, high frequency Phase Locked Loop designed for operation up to 50MHz. As shown in the block diagram, the NE564 consists of a VCO, limiter, phase comparator, and post detection processor.

APPLICATIONS

- **High speed modems**
- **FSK receivers and transmitters**
- **Frequency synthesizers**
- **Signal generators**

FEATURES

- **Operation with single 5V supply**
- **TTL compatible inputs and outputs**
- **Operation to 50MHz**
- **External loop gain control**
- **Reduced carrier feedthrough**
- **No elaborate filtering needed in FSK applications**
- **Can be used as a modulator**
- **Variable loop gain (Externally Controlled)**

PIN CONFIGURATION

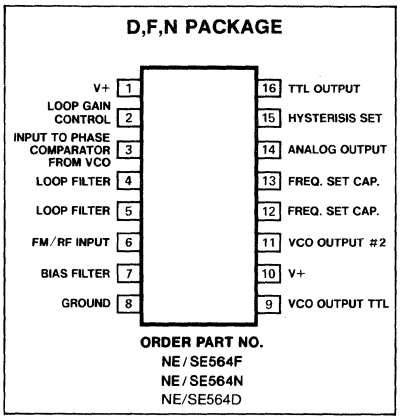

ABSOLUTE MAXIMUM RATINGS

PARAMETER			RATING	UNIT
V+	Supply voltage			V
	Pin 1		14	
	Pin 10		6	
P_D	Power dissipation		400	mW
T_A	Operating temperature	NE	0 to 70	°C
	Operating temperature	SE	−55 to +125	
t_{stg}	Storage temperature		−65 to 150	°C

BLOCK DIAGRAM

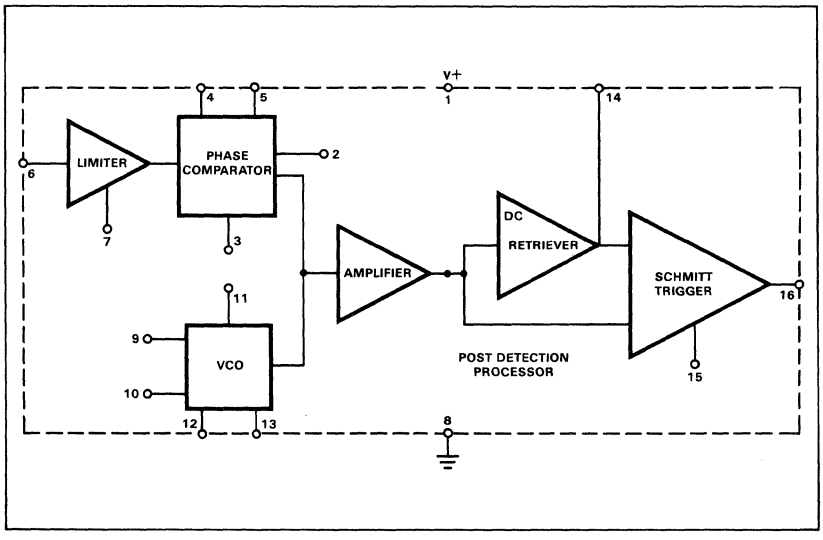

FUNCTIONAL DESCRIPTION

The NE564 is a monolithic phase locked loop with a post detection processor. The use of Schottky clamped transistors and optimized device geometries extends the frequency of operation to greater than 50MHz. In addition to the classical PLL applications, the NE564 can be used as a modulator with a controllable frequency deviation.

The output voltage of the PLL can be written as shown in the following equation:

$$V_O = \frac{(f_{in} - f_o)}{K_{vco}} \qquad \text{Equation 1}$$

K_{VCO} = conversion gain of the VCO (see figure 7)
f_{in} = frequency of the input signal
f_o = free running frequency of the VCO

The process of recovering FSK signals involves the conversion of the PLL output into logic compatible signals. For high data rates, a considerable amount of carrier will be present at the output of the PLL due to the wideband nature of the loop filter. To avoid the use of complicated filters, a comparator with hysterisis or Schmitt trigger is required. With the conversion gain of the VCO fixed, the output voltage as given by Equation 1 varies according to the frequency deviation of f_{in} from f_o. Since this differs from system to system, it is necessary that the hysterisis of the Schmitt trigger be capable of being changed, so that it can be optimized for a particular system. This is

ELECTRICAL CHARACTERISTICS

$V+ = 5V$, $T_A = 25°C$, fo = 5MHz, $I_B = -200\mu A$ unless otherwise specified.
Test Circuit: Figure 1

PARAMETER	TEST CONDITIONS	SE564			NE564			UNIT
		Min	Typ	Max	Min	Typ	Max	
Maximum VCO frequency		50	65		45	60		MHz
Lock range	Input ≥ 200mVrms, $T_A = 25°C$	60	90		60	90		% of fo
	$= 125°C$	30	50					
	$= -55°C$	120	150					
	$= 0°C$				100	120		
	$= 70°C$				50	70		
Capture range	Input ≥ 200mVrms, R2 = 27Ω	25	35		25	35		% of fo
	= 100Ω	35	50		35	50		
VCO frequency drift with temperature	fo = 5MHz, $T_A = -55°C$ to $125°C$		400	1000				PPM/°C
	$= 0°C$ to $70°C$					400	1250	
	fo = 500kHz, $T_A = -55°C$ to $125°C$		250	500				
	$= 0°C$ to $70°C$					400	850	
VCO frequency change with supply voltage	V+ = 4.5V to 5.5V		3	6		3	6	% of fo
Demodulated output voltage	Modulation frequency: 1kHz, fo = 5MHz							
	Input deviation: 10%, $T = 25°C$	120	140		120	140		mVrms
	1%, $T = 25°C$	10	14		10	14		mVrms
	$T = 0°C$				9	13		mVrms
	$= -55°C$	8	12					mVrms
	$= 70°C$				13	15		mVrms
	$= 125°C$	14	16					mVrms
Linearity	Deviation: 1% to 8%		1	3		1	3	%
Signal to noise ratio			40			40		dB
AM rejection			35			35		dB
Supply current	V+ = 5V		35	50		35	50	mA
Leakage current	Pin 9		1	10		1	10	μA
Output current	Pin 9			6			6	mA
Supply voltage	Pin 1	4.5		12	4.5		12	V
	Pin 10	4.5		5.5	4.5		5.5	V

accomplished in the 564 by varying the voltage at pin 15 which results in a change of the hysterisis of the Schmitt trigger.

For FSK signals, an important factor to be considered is the drift in the free running frequency of the VCO itself. If this changes due to temperature, according to Equation 1 it will lead to a change in the dc levels of the PLL output, and consequently to errors in the digital output signal. This is especially true for narrow band signals where the deviation in f_{in} itself may be less than the change in f_o due to temperature. This effect can be eliminated if the dc or average value of the signal is retrieved and used as the reference to the comparator. In this manner, variations in the dc levels of the PLL output do not affect the FSK output.

VCO Section

Due to its inherent high frequency performance, an emitter coupled oscillator is used in the VCO. In the circuit, shown in the equivalent schematic, transistors Q_{21} and Q_{23} with current sources $Q_{25}-Q_{26}$ form the basic oscillator. The free running frequency of the oscillator is shown in the following equation:

$$f_o = \frac{1}{16R_cC_1} \qquad \text{Equation 2}$$

$R_c = R_{19} = R_{20} = 100\Omega$ (INTERNAL)
C_1 = external frequency setting capacitor

Variation of V_d (phase detector output voltage) changes the frequency of the oscillator. As indicated by Equation 2, the frequency of the oscillator has a negative temperature coefficient due to the positive temperature coefficient of the monolithic resistor. To compensate for this, a current I_R with negative temperature coefficient is introduced to achieve a low frequency drift with temperature.

Phase Comparator Section

The phase comparator consists of a double balanced modulator with a limiter amplifier to improve AM rejection. Schottky clamped vertical PNPs are used to obtain TTL level inputs. The loop gain can be varied by changing the current in Q_4 and Q_{15} which effectively changes the gain of the differential amplifiers. This can be accomplished by introducing a current at pin 2.

Post Detection Processor Section

The post detection processor consists of a unity gain transconductance amplifier and comparator. The amplifier can be used as a dc retriever for demodulation of FSK signals, and as a post detection filter for linear FM demodulation. The comparator has adjustable hysterisis so that phase jitter in the output signal can be eliminated.

As shown in the equivalent schematic, the dc retriever is formed by the transductance amplifier $Q_{42}-Q_{43}$ together with an external capacitor which is connected at the am-

plifier output (pin 14). This forms an integrator whose output voltage is shown in the following equation:

$$V_0 = \frac{g_m}{C_2} \int V_{in} dt \qquad \text{Equation 3}$$

g_m = transconductance of the amplifier
C_2 = capacitor at the output (pin 14)
V_{in} = signal voltage at amplifier input

With proper selection of C_2, the integrator time constant can be varied so that the output voltage is the dc or average value of the input signal for use in FSK, or as a post detection filter in linear demodulation.

The comparator with hysterisis is made up of Q_{49}–Q_{50} with positive feedback being provided by Q_{47}–Q_{48}. The hysterisis is varied by changing the current in Q_{52} with a resulting variation in the loop gain of the comparator. This method of hysterisis control, which is a dc control, provides symmetric variation around the nominal value.

Design Formula

The free running frequency of the VCO is shown by the following equation:

$$f_o = \frac{1}{16 R_c C_1} \text{ in Hz} \qquad \text{Equation 4}$$

$R_c = 100\Omega$
C_1 = external cap in farads

The loop filter diagram shown is explained by the following equation:

$$F(s) = \frac{1}{1 + sRC_3} \qquad \text{Equation 5}$$

$R = R_{12} = R_{13} = 1.3k\Omega$ (INTERNAL)

By adding capacitors to pins 4 and 5, two poles are added to the loop transfer function

at $\omega = \frac{1}{RC_3}$.

FM DEMODULATOR

The NE564 can be used as an FM demodulator. The connections for operation at 5V and 12V are shown in figures 2 and 3 respectively. The input signal is ac coupled with the output signal being extracted at pin 14. Loop filtering is provided by the capacitors at pins 4 and 5 with additional filtering being provided by the capacitor at pin 14. Since the conversion gain of the VCO is not very high, to obtain sufficient demodulated output signal the frequency deviation in the input signal should be fairly high (1% or higher).

MODULATION TECHNIQUES

The NE564 phase locked loop can be modulated at either the loop filter ports (pins 4 and 5) or the input port (pin 6) as shown in figure 4. The approximate modulation frequency can be determined from the frequency conversion gain curve shown in figure 5. This curve will be appropriate for signals injected into pins 4 and 5 as shown in figure 4.

EQUIVALENT SCHEMATIC

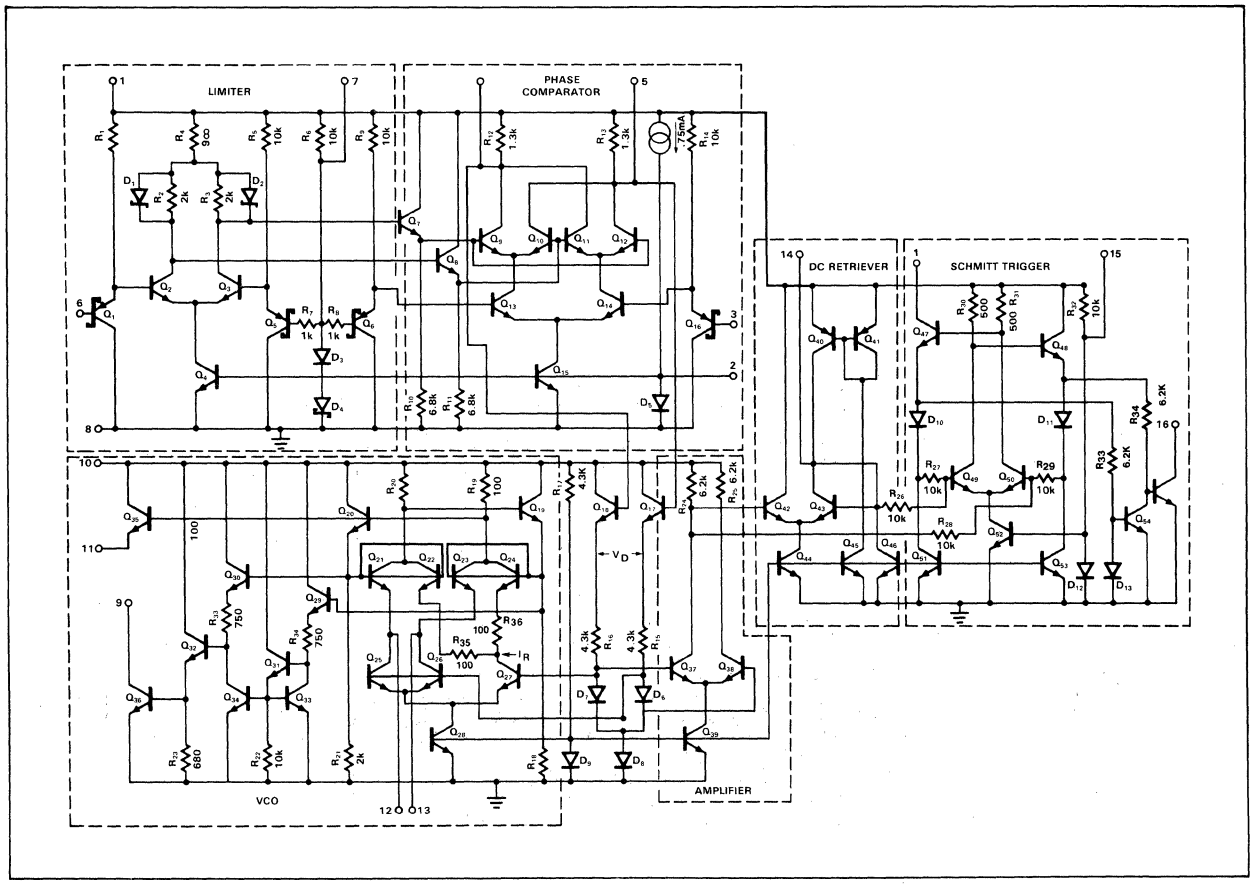

FSK Demodulation

The 564 PLL is particularly attractive for FSK demodulation since it contains an internal voltage comparator and VCO which have TTL compatible inputs and outputs, and it can operate from a single 5 volt power supply. Demodulated dc voltages associated with the mark and space frequencies are recovered with a single external capacitor in a dc retriever without utilizing extensive filtering networks. An internal comparator, acting as a Schmitt trigger with an adjustable hysteresis, shapes the demodulated voltages into compatible TTL output levels. The high frequency design of the 564 enables it to demodulate FSK at high data rates in excess of 1.0M baud.

Figure 6 shows a high-frequency FSK decoder designed for input frequency deviations of ± 1.0MHz centered around a free-running frequency of 10.8MHz. The value of the timing capacitance required was estimated from figure 8 to be approximately 40pF. A trimmer capacitor was added to fine tune f_O' to 10.8MHz.

Figure 9 indicates that the ± 1.0MHz frequency deviations will be within the lock range for input signal levels greater than approximately 50mV with zero pin 2 bias current. While strictly this figure is appropriate only for 5MHz, it can be used as a guide for lock range estimates at other f_O' frequencies.

The hysteresis was adjusted experimentally via the 10kΩ potentiometer and 2kΩ bias arrangement to give the waveshape shown in figure 7 for 20K, 500K, 2M baud rates with square wave FSK modulation. Note the magnitude and phase relationships of the phase comparators output voltages with respect to each other and to the FSK output. The high frequency sum components of the input and VCO frequency also are visible as noise on the phase comparators outputs.

SE/NE 564 TEST CIRCUIT

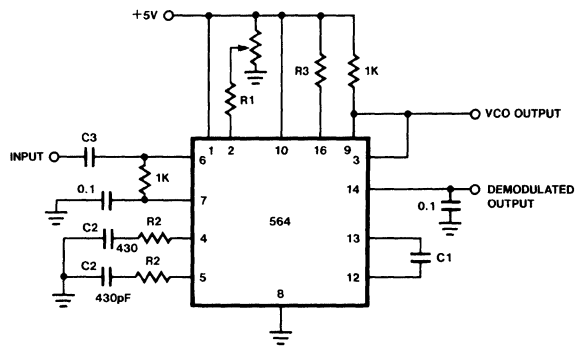

Figure 1

FM DEMODULATOR AT 5V

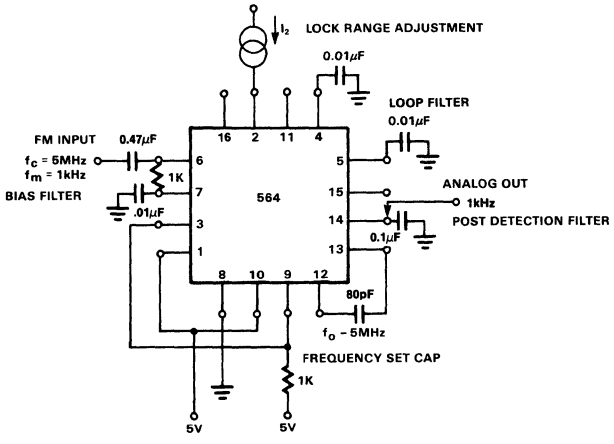

Figure 2

FM DEMODULATOR AT 12V

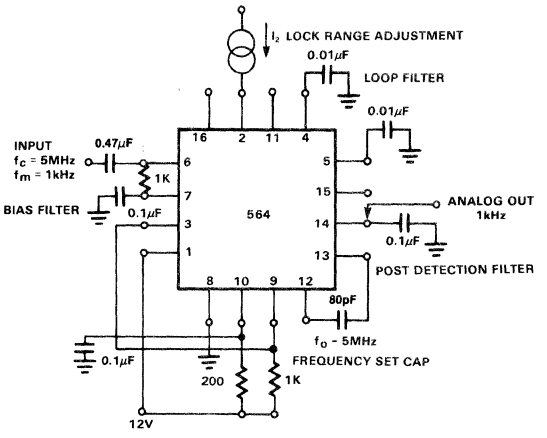

Figure 3

MODULATOR

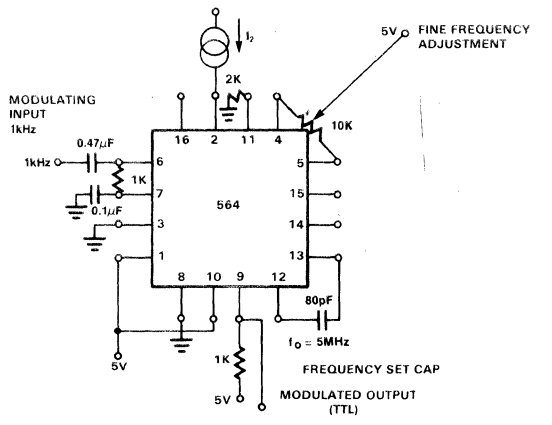

Figure 4

VCO CONVERSION GAIN

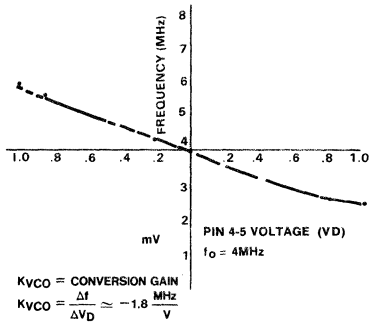

K_{VCO} = CONVERSION GAIN

$$K_{VCO} = \frac{\Delta f}{\Delta V_D} \simeq -1.8 \frac{MHz}{V}$$

FOR K_0 OF PLL MODEL

$$K_0 = \frac{(\Delta f/f_o)}{VOLT} = \frac{-(1.8MHz/4MHz)}{1VOLT}$$

$$= \frac{-0.45 \text{ RADIANS}}{VOLT}$$

$$= -4.5 \times 10^{-4} \text{ RADIANS/mV}$$

Figure 5

10.8MHz FSK DECODER USING THE 564

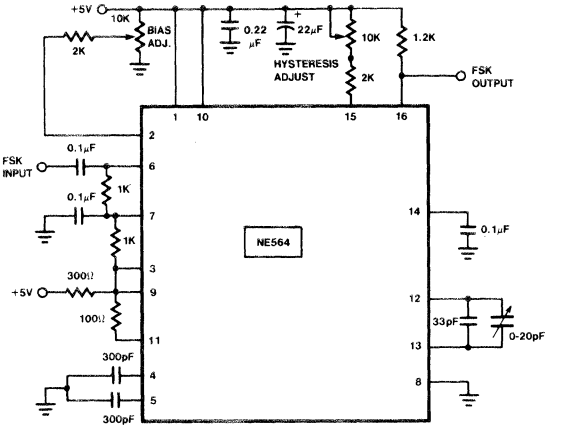

Figure 6

PHASE COMPARATOR (PINS 4 AND 5) AND FSK (PIN 16) OUTPUTS FOR DATA RATES OF

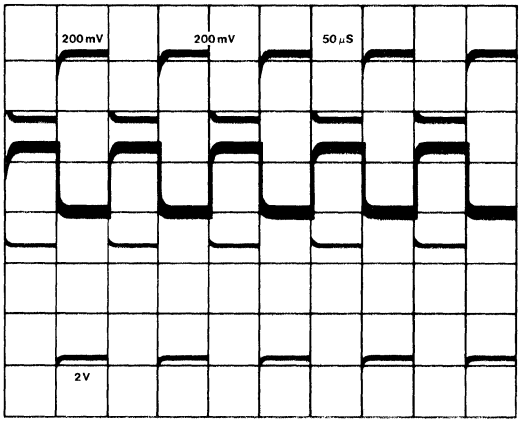

(a) 20K BAUD

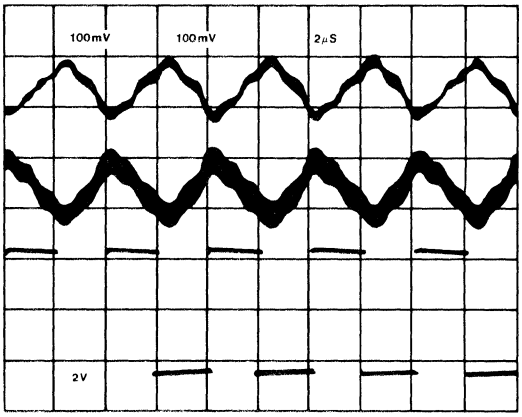

(b) 500K BAUD

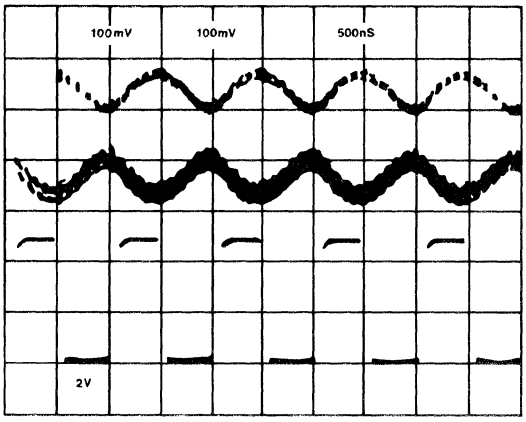

(c) 2.0M BAUD

NOTE
Top trace-pin 4
Center trace-pin 5
Bottom trace-pin 16

Figure 7

TYPICAL PERFORMANCE CHARACTERISTICS

LOCK RANGE vs SIGNAL INPUT

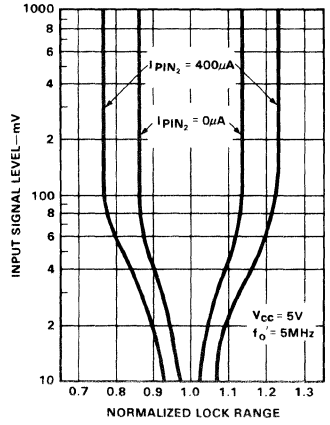

VCO CAPACITOR vs FREQUENCY



Figure 8

14

TYPICAL NORMALIZED VCO FREQUENCY AS A FUNCTION OF PIN 2 BIAS CURRENT

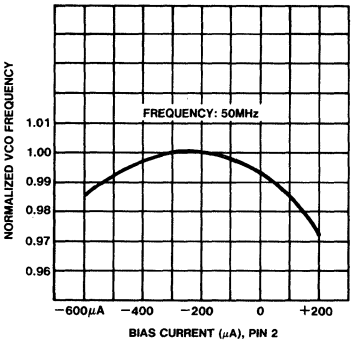

TYPICAL NORMALIZED VCO FREQUENCY AS A FUNCTION OF PIN 2 BIAS CURRENT

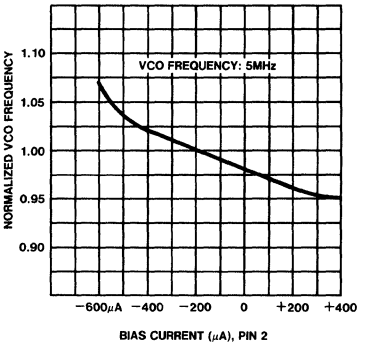

NORMALIZED VCO FREQUENCY AS A FUNCTION OF TEMPERATURE

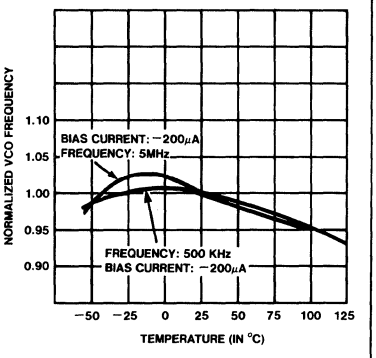

NE/SE565-F,H,N

DESCRIPTION

The SE/NE565 Phase-Locked Loop (PLL) is a self-contained, adaptable filter and demodulator for the frequency range from 0.001Hz to 500kHz. The circuit comprises a voltage-controlled oscillator of exceptional stability and linearity, a phase comparator, an amplifier and a low-pass filter as shown in the block diagram. The center frequency of the PLL is determined by the free-running frequency of the VCO; this frequency can be adjusted externally with a resistor or a capacitor. The low-pass filter, which determines the capture characteristics of the loop, is formed by an internal resistor and an external capacitor.

FEATURES

- **Highly stable center frequency (200ppm/°C typ.)**
- **Wide operating voltage range (±6 to ±12 volts)**
- **Highly linear demodulated output (0.2% typ.)**
- **Center frequency programming by means of a resistor or capacitor, voltage or current**
- **TTL and DTL compatible square-wave output; loop can be opened to insert digital frequency divider**
- **Highly linear triangle wave output**
- **Reference output for connection of comparator in frequency discriminator**
- **Bandwidth adjustable from < ±1% to > ±60%**
- **Frequency adjustable over 10 to 1 range with same capacitor**

APPLICATIONS

- **Frequency shift keying**
- **Modems**
- **Telemetry receivers**
- **Tone decoders**
- **SCA receivers**
- **Wideband FM discriminators**
- **Data synchronizers**
- **Tracking filters**
- **Signal restoration**
- **Frequency multiplication & division**

PIN CONFIGURATIONS

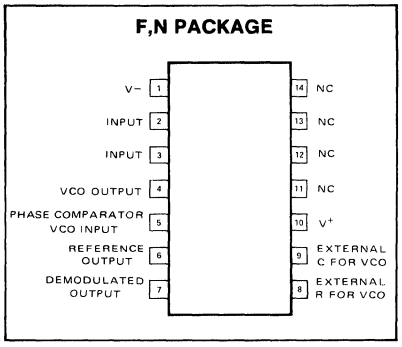

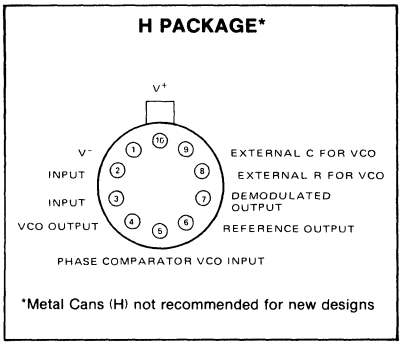

*Metal Cans (H) not recommended for new designs

BLOCK DIAGRAM

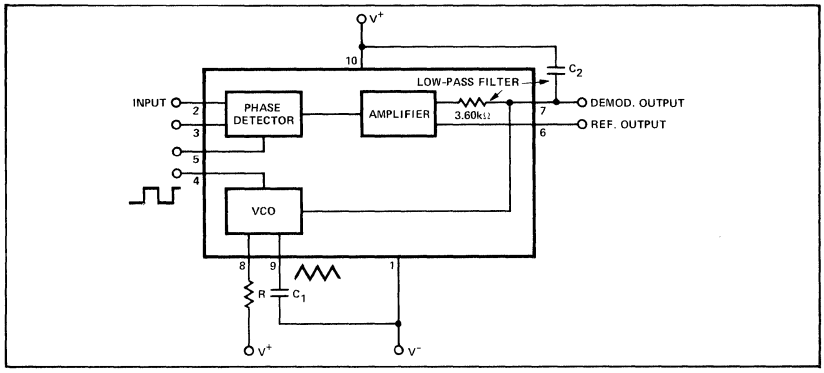

EQUIVALENT SCHEMATIC

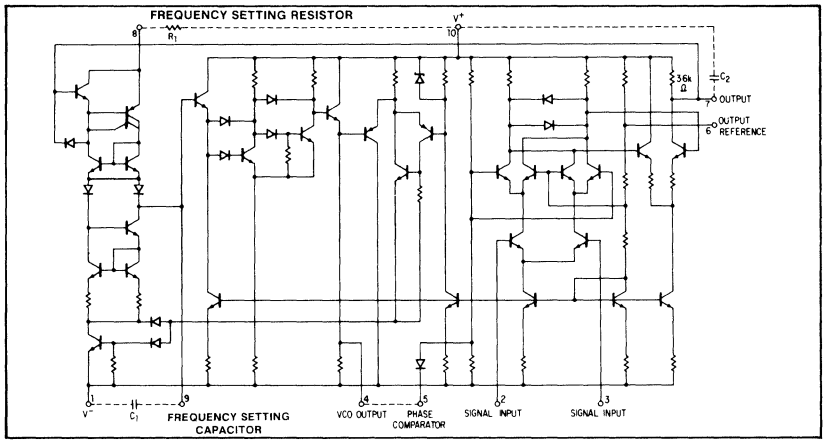

ABSOLUTE MAXIMUM RATINGS $T_A = 25°C$ unless otherwise specified.

PARAMETER	RATING	UNIT
Maximum operating voltage	26	V
Input voltage	3	Vp-p
Storage temperature	-65 to +150	°C
Operating temperature range		
NE565	0 to +70	°C
SE565	-55 to +125	°C
Power dissipation	300	mW

ELECTRICAL CHARACTERISTICS $T_A = 25°C$, $V_{CC} = \pm 6V$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SE565			NE565			UNIT
		Min	Typ	Max	Min	Typ	Max	
SUPPLY REQUIREMENTS								
Supply voltage		12		±12	±6		±12	V
Supply current			8	12.5		8	12.5	mA
INPUT CHARACTERISTICS								
Input impedance[1]		7	10		5	10		kΩ
Input level required for tracking	f_o = 50kHz, ±10% frequency deviation	10	1		10	1		mVrms
VCO CHARACTERISTICS								
Center frequency								
Maximum value	C_1 = 2.7pF	300	500			500		kHz
Distribution[2]	Distribution taken about f_o = 50kHz, R_1 = 5.0kΩ, C_1 = 1200pF	-10	0	+10	-30	0	+30	%
Drift with temperature	f_o = 50kHz		200			300		ppm/°C
Drift with supply voltage	f_o = 50kHz, V_{CC} = ±6 to ±7 volts		0.1	1.0		0.2	1.5	%/V
Triangle wave								
Output voltage level		1.9	0		1.9	0		V
Amplitude			2.4	3		2.4	3	Vp-p
Linearity			0.2			0.5		%
Square wave								
Logical "1" output voltage	f_o = 50kHz	+4.9	+5.2		+4.9	+5.2		V
Logical "0" output voltage	f_o = 50kHz		-0.2	+0.2		-0.2	+0.2	V
Duty cycle	f_o = 50kHz	45	50	55	40	50	60	%
Rise time			20	100		20		ns
Fall time			50	200		50		ns
Output current (sink)		0.6	1		0.6	1		mA
Output current (source)		5	10		5	10		mA
DEMODULATED OUTPUT CHARACTERISTICS								
Output voltage level	Measured at pin 7	4.25	4.5	4.75	4.0	4.5	5.0	V
Maximum voltage swing[3]			2			2		Vp-p
Output voltage swing	±10% frequency deviation	250	300		200	300		mVp-p
Total harmonic distortion			0.2	0.75		0.4	1.5	%
Output impedance[4]			3.6			3.6		kΩ
Offset voltage (V6-V7)			30	100		50	200	mV
Offset voltage vs temperature (drift)			50			100		μV/°C
AM rejection		30	40			40		dB

NOTES

1. Both input terminals (pins 2 and 3) must receive identical dc bias. This bias may range from 0 volts to -4 volts.
2. The external resistance for frequency adjustment (R1) must have a value between 2kΩ and 20kΩ.
3. Output voltage swings negative as input frequency increases.
4. Output not buffered.

TYPICAL PERFORMANCE CHARACTERISTICS

POWER SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



VCO CONVERSION GAIN



LOCK RANGE AS A FUNCTION OF INPUT VOLTAGE



LOCK RANGE AS A FUNCTION OF GAIN SETTING RESISTANCE (PIN 6-7)



CHANGE IN FREE-RNNING VCO FREQUENCY AS A FUNCTION OF TEMPERATURE



VCO OUTPUT WAVEFORM



DESIGN FORMULAS (See Figure 1)

Free-running frequency of VCO: $f_o \simeq \frac{1.2}{4R_1C_1}$ in Hz

Lock-range: $f_L = \pm \frac{8f_o}{V_{CC}}$ in Hz

Capture-range: $f_C \simeq \pm \frac{1}{2\pi} \sqrt{\frac{2\pi f_L}{\tau}}$

where $\tau = (3.6X10^3) \times C_2$

TYPICAL APPLICATIONS

FM Demodulation

The 565 Phase Locked Loop is a general purpose circuit designed for highly linear FM demodulation. During lock, the average dc level of the phase comparator output signal is directly proportional to the frequency of the input signal. As the input frequency shifts, it is this output signal which causes the VCO to shift its frequency to match that of the input. Consequently, the linearity of the phase comparator output with frequency is determined by the voltage-to-frequency transfer function of the VCO.

Because of its unique and highly linear VCO, the 565 PLL can lock to and track an input signal over a very wide bandwidth (typically ±60%) with very high linearity (typically, within 0.5%).

A typical connection diagram is shown in Figure 1. The VCO free-running frequency is given approximately by

$f_o = \frac{1.2}{4R_1C_1}$ and should be adjusted to be at the center of the input signal frequency range. C1 can be any value, but R1 should be within the range of 2000 to 20,000 ohms with an optimum value on the order of 4000 ohms. The source can be direct coupled if the dc resistances seen from pins 2 and 3 are equal and there is no dc voltage difference between the pins. A short between pins 4 and 5 connects the VCO to the phase comparator. Pin 6 provides a dc reference voltage that is close to the dc potential of the demodulated output (pin 7). Thus, if a resistance is connected between pins 6 and 7, the gain of the output stage can be reduced with little change in the dc voltage level at the output. This allows the lock range to be decreased with little change in the free-running frequency. In this manner the lock range can be decreased from ±60% of f_o to approximately ±20% of f_o (at ±6V).

A small capacitor (typically 0.001μF) should be connected between pins 7 and 8 to eliminate possible oscillation in the control current source.

A single-pole loop filter is formed by the capacitor C2, connected between pin 7 and the positive supply, and an internal resistance of approximately 3600 ohms.

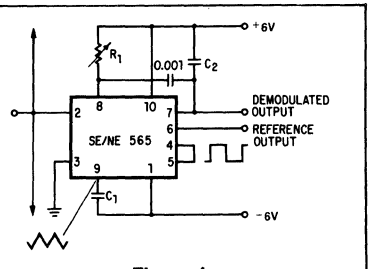

Figure 1

Frequency Shift Keying (FSK)

FSK refers to data transmission by means of a carrier which is shifted between two preset frequencies. This frequency shift is usually accomplished by driving a VCO with the binary data signal so that the two resulting frequencies correspond to the "0" and "1" states (commonly called space and mark) of the binary data signal.

A simple scheme using the 565 to receive FSK signals of 1070Hz and 1270Hz is shown in Figure 2. As the signal appears at the input, the loop locks to the input frequency and tracks it between the two frequencies with a corresponding dc shift at the output.

The loop filter capacitor C2 is chosen smaller than usual to eliminate overshoot on the output pulse, and a three-stage RC ladder filter is used to remove the carrier component from the output. The band edge of the ladder filter is chosen to be approximately half way between the maximum keying rate (in this case 300 baud or 150Hz) and twice the input frequency (approximately 2200Hz). The output signal can now be made logic compatible by connecting a voltage comparator between the output and pin 6 of the loop. The free-running frequency is adjusted with R1 so as to result in a slightly-positive voltage at the output with f_{IN} = 1070Hz.

The input connection is typical for cases where a dc voltage is present at the source and therefore a direct connection is not desirable. Both input terminals are returned to ground with identical resistors (in this case, the values are chosen to effect a 600-ohm input impedance).

Frequency Multiplication

There are two methods by which frequency multiplication can be achieved using the 565:

1. Locking to a harmonic of the input signal.
2. Inclusion of a digital frequency divider or counter in the loop between the VCO and phase comparator.

The first method is the simplest, and can be achieved by setting the free-running frequency of the VCO to a multiple of the input frequency. A limitation of this scheme is that the lock range decreases as successively higher and weaker harmonics are used for locking. If the input frequency is to be constant with little tracking required, the loop can generally be locked to any one of the first 5 harmonics. For higher orders of multiplication, or for cases where a large lock range is desired, the second scheme is more desirable. An example of this might be

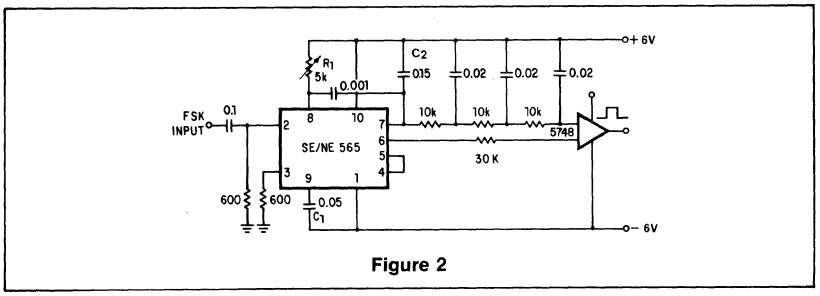

Figure 2

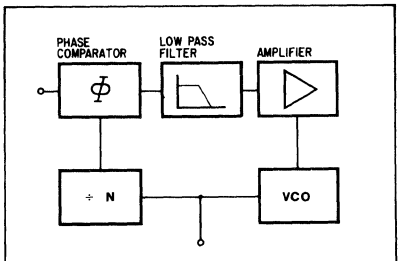

Figure 3

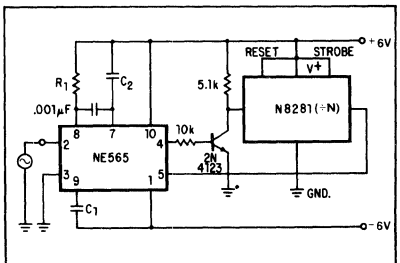

Figure 4

a case where the input signal varies over a wide frequency range and a large multiple of the input frequency is required.

A block diagram of the second scheme is shown in Figure 3. Here the loop is broken between the VCO and the phase comparator, and a frequency divider is inserted. The fundamental of the divided VCO frequency is locked to the input frequency in this case, so that the VCO is actually running at a multiple of the input frequency. The amount of multiplication is determined by the frequency divider. A typical connection scheme is shown in Figure 4. To set up the circuit, the frequency limits of the input signal must be determined. The free-running frequency of the VCO is then adjusted by means of R1 and C1 (as discussed under FM demodulation) so that the output frequency of the divider is midway between the input frequency limits. The filter capacitor, C2, should be large enough to eliminate variations in the demodulated output voltage (at pin 7), in order to stabilize the VCO frequency. The output can now be taken as the VCO squarewave output, and its fundamental will be the desired multiple of the input frequency (f_{IN}) as long as the loop is in lock.

SCA (Background Music) Decoder

Some FM stations are authorized by the FCC to broadcast uninterrupted background music for commerical use. To do this a frequency modulated subcarrier of 67kHz is used. The frequency is chosen so as not to interfere with the normal stereo or monaural program; in addition, the level of the subcarrier is only 10% of the amplitude of the combined signal.

The SCA signal can be filtered out and demodulated with the NE565 Phase Locked Loop without the use of any resonant circuits. A connection diagram is shown in Figure 5. This circuit also serves as an example of operation from a single power supply.

A resistive voltage divider is used to establish a bias voltage for the input (pins 2 and 3). The demodulated (multiplex) FM signal is fed to the input through a two-stage high-pass filter, both to effect capacitive coupling and to attenuate the strong signal of the regular channel. A total signal amplitude, between 80mV and 300mV, is required at the input. Its source should have an impedance of less than 10,000 ohms.

The Phase Locked Loop is tuned to 67kHz with a 5000 ohm potentiometer; only approximate tuning is required, since the loop will seek the signal.

The demodulated output (pin 7) passes through a three-stage low-pass filter to provide de-emphasis and attenuate the high-frequency noise which often accompanies SCA transmission. Note that no capacitor is provided directly at pin 7; thus, the circuit is operating as a first-order loop. The demodulated output signal is in the order of 50mV and the frequency response extends to 7kHz.

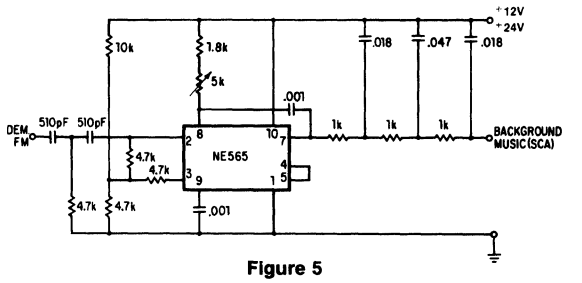
+12V
+24V
10k
1.8k
5k
.001
.018
.047
.018
DEM FM
510pF
510pF
2
8
10
7
NE565
4
5
1
9
3
4.7k
4.7k
4.7k
4.7k
.001
1k
1k
1k
BACKGROUND MUSIC (SCA)

Figure 5

NE/SE566-F,N,H

DESCRIPTION

The NE/SE 566 Function Generator is a voltage controlled oscillator of exceptional linearity with buffered square wave and triangle wave outputs. The frequency of oscillation is determined by an external resistor and capacitor and the voltage applied to the control terminal. The oscillator can be programmed over a ten to one frequency range by proper selection of an external resistance and modulated over a ten to one range by the control voltage, with exceptional linearity.

FEATURES

- **Wide range of operating voltage (up to 24 volts)**
- **High linearity of modulation**
- **Highly stable center frequency (200 ppm/°C typical)**
- **Highly linear triangle wave output**
- **Frequency programming by means of a resistor or capacitor, voltage or current**
- **Frequency adjustable over 10 to 1 range with same capacitor**

APPLICATIONS

- **Tone generators**
- **Frequency shift keying**
- **FM modulators**
- **Clock generators**
- **Signal generators**
- **Function generators**

PIN CONFIGURATIONS

H PACKAGE*



ORDER PART NO.
NE/SE566H

*Metal cans (H) not recommended for new designs

N PACKAGE

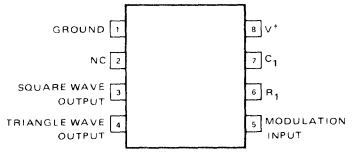

ORDER PART NO.
NE/SE566N

F PACKAGE

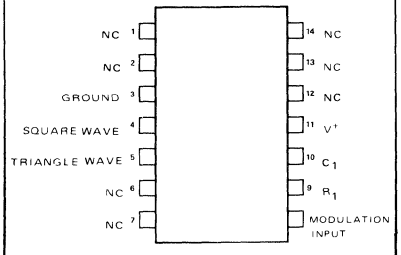

ORDER PART NO.
NE/SE566F

BLOCK DIAGRAM

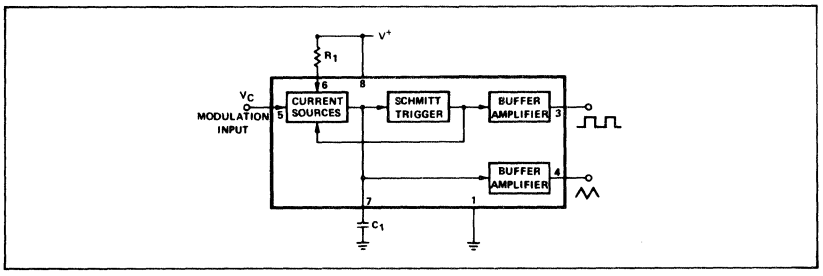

EQUIVALENT SCHEMATIC

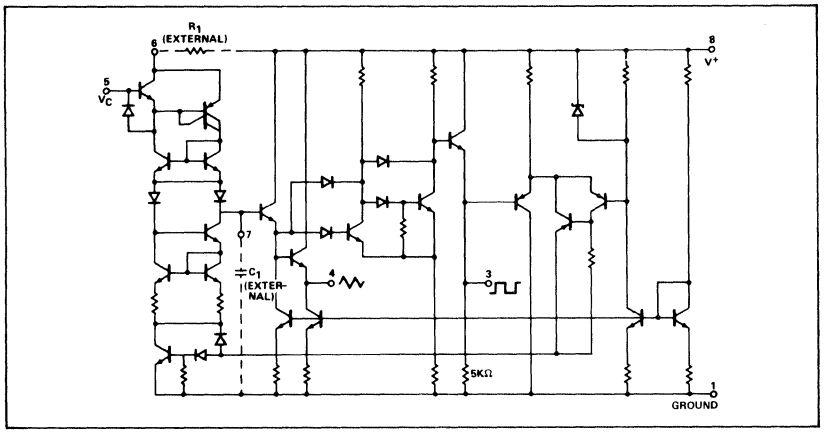

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Maximum operating voltage	26	V
Input voltage	3	V_{P-P}
Storage temperature	-65 to +150	°C
Operating temperature range		
NE566	0 to +70	°C
SE566	-55 to +125	°C
Power dissipation	300	mW

ELECTRICAL CHARACTERISTICS $T_A = 25°C$; $V_{CC} = 12V$ unless otherwise specified.

PARAMETER	SE566			NE566			UNIT
	Min	Typ	Max	Min	Typ	Max	
GENERAL							
Operating temperature range	-55		125	0		70	°C
Operating supply voltage			24			24	V
Operating supply current		7	12.5		7	12.5	mA
VCO[1]							
Maximum operating frequency		1			1		MHz
Frequency drift with temperature		200			300		ppm/°C
Frequency drift with supply voltage		1			2		%/V
Control terminal input impedance[2]		1			1		MΩ
FM distortion (±10% deviation)		0.2	0.75		0.4	1.5	%
Maximum sweep rate		1			1		MHz
Sweep range		10:1			10:1		
OUTPUT							
Triangle wave output							
Impedance		50			50		Ω
Voltage	1.9	2.4		1.9	2.4		Vpp
Linearity		0.2			0.5		%
Square wave input							
Impedance		50			50		Ω
Voltage	5	5.4		5	5.4		Vpp
Duty Cycle	45	50	55	40	50	60	%
Rise time		20			20		ns
Fall Time		50			50		ns

NOTES

1. The external resistance for frequency adjustment (R_1) must have a value between 2kΩ and 20KΩ.
2. The bias voltage (V_C) applied to the control terminal (pin 5) should be in the range $3/4V^+ \leq V_C \leq V^+$.

TYPICAL PERFORMANCE CHARACTERISTICS

NORMALIZED FREQUENCY AS A FUNCTION OF CONTROL VOLTAGE



NORMALIZED FREQUENCY AS A FUNCTION OF RESISTANCE (R1)



CHANGE IN FREQUENCY AS A FUNCTION OF TEMPERATURE



14

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

POWER SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



FREQUENCY AS A FUNCTION OF CAPACITANCE (C1)



VCO OUTPUT WAVEFORMS



OPERATING INSTRUCTIONS

The SE/NE 566 Function Generator is a general purpose voltage controlled oscillator designed for highly linear frequency modulation. The circuit provides simultaneous square wave and triangle wave outputs at frequencies up to 1MHz. A typical connection diagram is shown in Figure 1. The control terminal (pin 5) must be biased externally with a voltage (V_C) in the range

$$3/4\ V^+ \leq V_C \leq V^+$$

where V_{CC} is the total supply voltage. In Figure 1, the control voltage is set by the voltage divider formed with R_2 and R_3. The modulating signal is then ac coupled with the capacitor C_2. The modulating signal can be direct coupled as well, if the appropriate dc bias voltage is applied to the control terminal. The frequency is given approximately by

$$f_O \simeq \frac{2[(V^+) - (V_C)]}{R_1 C_1 V^+}$$

and R_1 should be in the range $2k\Omega < R_1 < 20k\Omega$.

A small capacitor (typically 0.001μf) should be connected between pins 5 and 6 to eliminate possible oscillation in the control current source.

If the VCO is to be used to drive standard logic circuitry, it may be desirable to use a dual supply of ±5 volts as shown in Figure 2. In this case the square wave output has the proper dc levels for logic circuitry. RTL can be driven directly from pin 3. For DTL or T²L gates, which require a current sink of more than 1mA, it is usually necessary to connect a 5kΩ resistor between pin 3 and negative supply. This increases the current sinking capability to 2mA. The third type of interface shown uses a saturated transistor between the 566 and the logic circuitry. This scheme is used primarily for T²L circuitry which requires a fast fall time (<50ns) and a large current sinking capability.



FIGURE 1

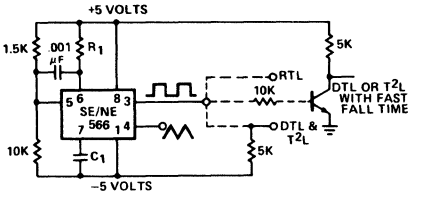

FIGURE 2

NE/SE567-F,N,H

DESCRIPTION

The SE/NE567 tone and frequency decoder is a highly stable phase-locked loop with synchronous AM lock detection and power output circuitry. Its primary function is to drive a load whenever a sustained frequency within its detection band is present at the self-biased input. The bandwidth center frequency, and output delay are independently determined by means of four external components.

FEATURES

- **Wide frequency range (.01Hz to 500kHz)**
- **High stability of center frequency**
- **Independently controllable bandwidth (up to 14 percent)**
- **High out-band signal and noise rejection**
- **Logic-compatible output with 100mA current sinking capability**
- **Inherent immunity to false signals**
- **Frequency adjustment over a 20 to 1 range with an external resistor**
- **Military processing available**

APPLICATIONS

- **Touch Tone® decoding**
- **Carrier current remote controls**
- **Ultrasonic controls (remote TV, etc.)**
- **Communications paging**
- **Frequency monitoring and control**
- **Wireless intercom**
- **Precision oscillator**

PIN CONFIGURATIONS

F PACKAGE



H PACKAGE*

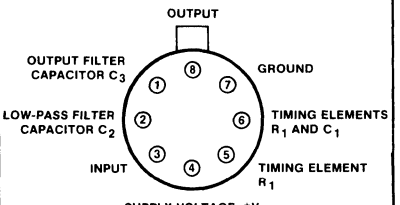

*Metal cans not recommended for new designs

N PACKAGE

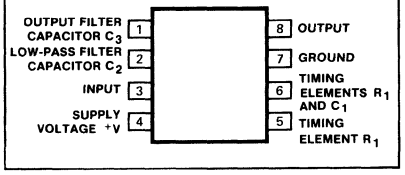

BLOCK DIAGRAM

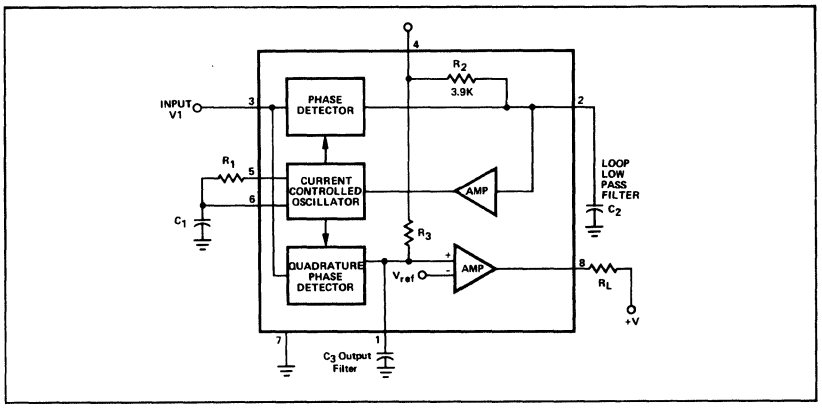

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Operating temperature		
NE567	0 to +70	°C
SE567	-55 to +125	°C
Operating voltage	10	V
Positive voltage at input	0.5 + Vs	V
Negative voltage at input	-10	Vdc
Output voltage (collector of output transistor)	15	Vdc
Storage temperature	-65 to +150	°C
Power dissipation	300	mW

14

EQUIVALENT SCHEMATIC

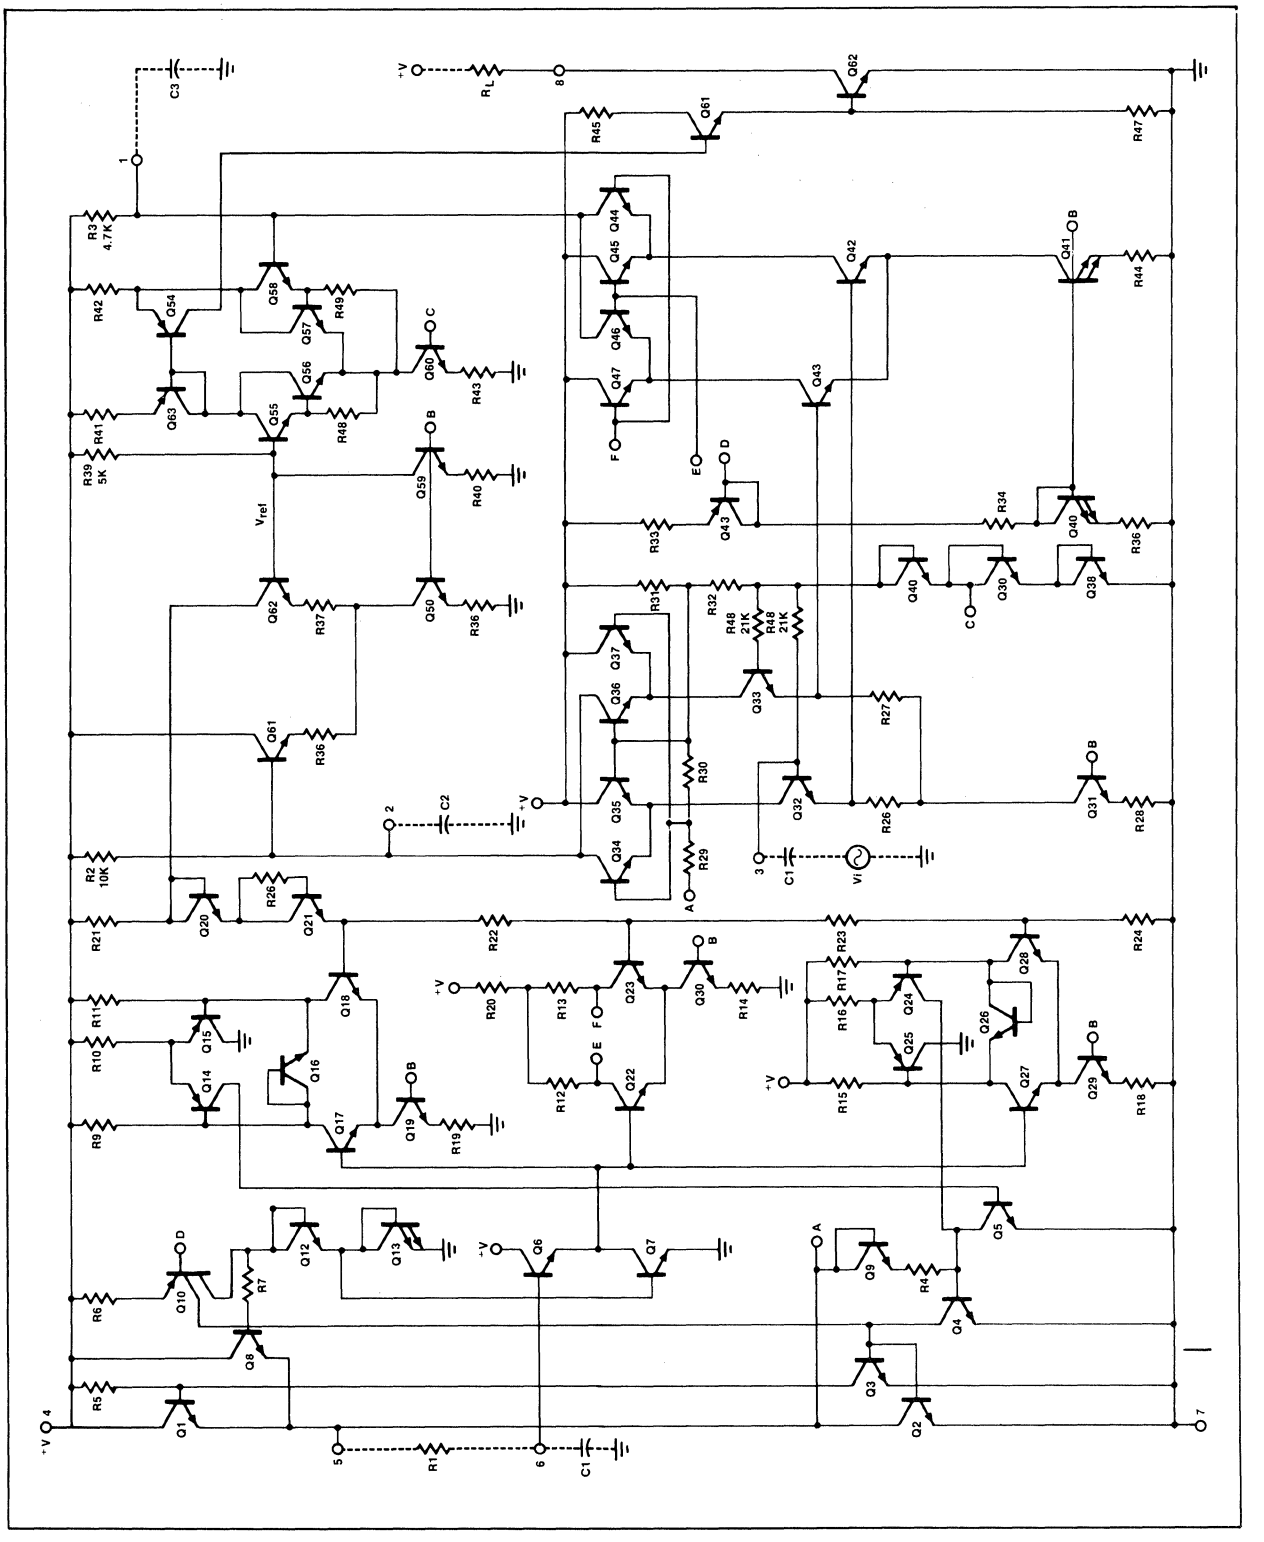

NE/SE567-F,N,H

DC ELECTRICAL CHARACTERISTICS (V+ = 5.0V; T_A = 25°C unless otherwise specified.)

PARAMETER	TEST CONDITIONS	SE567			NE567			UNIT
		Min	Typ	Max	Min	Typ	Max	
CENTER FREQUENCY[1]								
Highest center frequency (f_o)		100	500		100	500		kHz
Center frequency stability[2]	-55 to +125°C		35±140			35±140		ppm/°C
	0 to +70°C		35±60			35±60		ppm/°C
Center frequency shift with supply voltage	f_o = 100kHz		0.5	1		0.7	2	%/V
DETECTION BANDWIDTH								
Largest detection bandwidth	f_o = 100kHz	12	14	16	10	14	18	% of f_o
Largest detection bandwidth skew			2	4		3	6	% of f_o
Largest detection bandwidth—variation with temperature	V_i = 300mVrms		±0.1			±0.1		%/°C
Largest detection bandwidth—variation with supply voltage	V_i = 300mVrms		±2			±2		%/V
INPUT								
Input resistance			20			20		kΩ
Smallest detectable input voltage (V_i)	I_L = 100mA, $f_i = f_o$		20	25		20	25	mVrms
Largest no-output input voltage	I_L = 100mA, $f_i = f_o$	10	15		10	15		mVrms
Greatest simultaneous outband signal to inband signal ratio			+6			+6		dB
Minimum input signal to wideband noise ratio	B_n = 140kHz		-6			-6		dB
OUTPUT								
Fastest on-off cycling rate			f_o/20			f_o/20		
"1" output leakage current			0.01	25		0.01	25	μA
"0" output voltage	I_L = 30mA		0.2	0.4		0.2	0.4	V
	I_L = 100mA		0.6	1.0		0.6	1.0	V
Output fall time[3]	R_L = 50Ω		30			30		ns
Output rise time[3]	R_L = 50Ω		150			150		ns
GENERAL								
Operating voltage range		4.75		9.0	4.75		9.0	V
Supply current quiescent			6	8		7	10	mA
Supply current—activated	R_L = 20kΩ		11	13		12	15	mA
Quiescent power dissipation			30			35		mW

NOTES

1. Frequency determining resistor R_1 should be between 1 and 20kΩ.
2. Applicable over 4.75 to 5.75 volts. See graphs for more detailed information.
3. Pin 8 to Pin 1 feedback R_L network selected to eliminate pulsing during turn-on and turn-off.

TYPICAL PERFORMANCE CHARACTERISTICS

BANDWIDTH vs INPUT SIGNAL AMPLITUDE



LARGEST DETECTION BANDWIDTH vs OPERATING FREQUENCY



DETECTION BANDWIDTH AS A FUNCTION OF C_2 and C_3



14

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

TYPICAL SUPPLY CURRENT vs SUPPLY VOLTAGE



GREATEST NUMBER OF CYCLES BEFORE OUTPUT



TYPICAL OUTPUT VOLTAGE vs TEMPERATURE



TYPICAL FREQUENCY DRIFT WITH TEMPERATURE (MEAN AND S.D.)



TYPICAL FREQUENCY DRIFT WITH TEMPERATURE (MEAN AND S.D.)



TYPICAL FREQUENCY DRIFT WITH TEMPERATURE (MEAN AND S.D.)



CENTER FREQUENCY TEMPERATURE COEFFICIENT (MEAN AND S.D.)



CENTER FREQUENCY SHIFT WITH SUPPLY VOLTAGE CHANGE vs OPERATING FREQUENCY



TYPICAL BANDWIDTH VARIATION WITH TEMPERATURE



DESIGN FORMULAS

$$f_o \simeq \frac{1.1}{R_1 C_1}$$

$$BW \simeq 1070\sqrt{\frac{V_i}{f_o C_2}} \text{ in \% of } f_o,\ V_i \leq 200\text{mVrms}$$

Where

V_i = Input Voltage (Vrms)
C_2 = Low-Pass Filter Capacitor (μF)

PHASE LOCKED LOOP TERMINOLOGY CENTER FREQUENCY (fo)

The free-running frequency of the current controlled oscillator (CCO) in the absence of an input signal.

Detection Bandwidth (BW)

The frequency range, centered about f_o, within which an input signal above the threshold voltage (typically 20mVrms) will cause a logical zero state on the output. The detection bandwidth corresponds to the loop capture range.

Lock Range

The largest frequency range within which an input signal above the threshold voltage will hold a logical zero state on the output.

Detection Band Skew

A measure of how well the detection band is centered about the center frequency, f_o. The skew is defined as $(f_{max} + f_{min} - 2f_o)/2f_o$ where fmax and fmin are the frequencies corresponding to the edges of the detection band. The skew can be reduced to zero if necessary by means of an optional centering adjustment.

OPERATING INSTRUCTIONS

Figure 1 shows a typical connection diagram for the 567. For most applications, the following three-step procedure will be sufficient for choosing the external components R_1, C_1, C_2 and C_3.

1. Select R_1 and C_1 for the desired center frequency. For best temperature stability, R_1 should be between 2K and 20K ohm, and the combined temperature coefficient of the R_1C_1 product should have sufficient stability over the projected temperature range to meet the necessary requirements.

2. Select the low pass capacitor, C_2, by referring to the Bandwidth versus Input Signal Amplitude graph. If the input amplitude variation is known, the appropriate value of f_oC_2 necessary to give the desired bandwidth may be found. Conversely, an area of operation may be selected on this graph and the input level and C_2 may be adjusted accordingly. For example, constant bandwidth operation requires that input amplitude be above 200mVrms. The bandwidth, as noted on the graph, is then controlled solely by the f_oC_2 product (f_o (Hz), C_2 (μ fd)).

3. The value of C_3 is generally non-critical. C_3 sets the band edge of a low pass filter which attenuates frequencies outside the detection band to elminate spurious outputs. If C_3 is too small, frequencies just outside the detection band will switch the output stage on and off at the beat frequency, or the output may pulse on and off during the turn-on transient. If C_3 is too large, turn-on and turn-off of the output stage will be delayed until the voltage on C_3 passes the threshold voltage. (Such delay may be desirable to avoid spurious outputs due to translent frequencies.) A typical minimum value for C_3 is $2C_2$.

TYPICAL RESPONSE

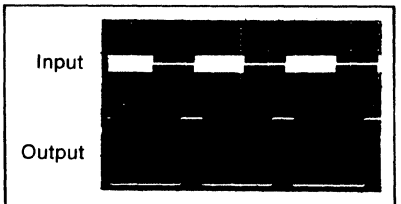

Response to 100mVrms tone burst.
R_L = 100 ohms.

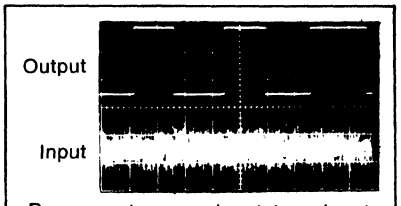

Response to same input tone burst with wideband noise.
$\frac{S}{N}$ = -6db R_L = 100 ohms
Noise Bandwidth = 140Hz

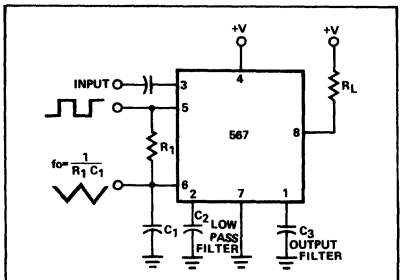

Figure 1

AVAILABLE OUTPUTS (Figure 2)

The primary output is the uncommitted output transistor collector, pin 8. When an in-band input signal is present, this transistor saturates; its collector voltage being less than 1.0 volt (typically 0.6V) at full output current (100mA). The voltage at pin 2 is the phase detector output which is a linear function of frequency over the range of 0.95 to 1.05 f_o with a slope of about 20mV per percent of frequency deviation. The average voltage at pin 1 is, during lock, a function of the inband input amplitude in accordance with the transfer characteristic given. Pin 5 is the controlled oscillator square wave output of magnitude $(+V - 2V_{be}) \approx (+V - 1.4V)$ having a dc average of +V/2. A 1kΩ load may be driven from pin 5. Pin 6 is an exponential triangle of 1 volt peak-to-peak with an average dc level of +V/2. Only high impedance loads may be connected to pin 6 without affecting the CCO duty cycle or temperature stability.

OPERATING PRECAUTIONS

A brief review of the following precautions will help the user achieve the high level of performance of which the 567 is capable.

1. Operation in the high input level mode (above 200mV) will free the user from bandwidth variations due to changes in the in-band signal amplitude. The input stage is now limiting, however, so that out-band signals or high noise levels can cause an apparent bandwidth reduction as the in-band signal is suppressed. Also, the limiting action will create in-band components from sub-harmonic signals, so the 567 becomes sensitive to signals at $f_o/3$, $f_o/5$, etc.

2. The 567 will lock onto signals near $(2n + 1)\ f_o$, and will give an output for signals near $(4n + 1)\ f_o$ where $n = 0, 1, 2$, etc. Thus, signals at $5f_o$ and $9f_o$ can cause an unwanted output. If such signals are anticipated, they should be attenuated before reaching the 567 input.

3. Maximum immunity from noise and out-band signals is afforded in the low input level (below 200mVrms) and reduced bandwidth operating mode. However, decreased loop damping causes the worse-case lock-up time to increase, as shown by the Greatest Number of Cycles Before Output vs Bandwidth graph.

4. Due to the high switching speeds (20ns) associated with 567 operation, care should be taken in lead routing. Lead lengths should be kept to a minimum. The power supply should be adequately bypassed close to the 567 with a 0.01μF or greater capacitor; grounding paths should be carefully chosen to avoid ground loops and

14

unwanted voltage variations. Another factor which must be considered is the effect of load energization on the power supply. For example, an incandescent lamp typically draws 10 times rated current at turn-on. This can cause supply voltage fluctuations which could, for example, shift the detection band of narrow-band systems sufficiently to cause momentary loss of lock. The result is a low-frequency oscillation into and out of lock. Such effects can be prevented by supplying heavy load currents from a separate supply or increasing the supply filter capacitor.

SPEED OF OPERATION

Minimum lock-up time is related to the natural frequency of the loop. The lower it is, the longer becomes the turn-on transient. Thus, maximum operating speed is obtained when C_2 is at a minimum. When the signal is first applied, the phase may be such as to initially drive the controlled oscillator away form the incoming frequency rather than toward it. Under this condition, which is of course unpredictable, the lock-up transient is at its worst and the theoretical minimum lock-up time is not achievable. We must simply wait for the transient to die out.

The following expressions give the values of C_2 and C_3 which allow highest operating speeds for various band center frequencies. The minimum rate at which digital information may be detected without information loss due to the turn-on transient or output chatter is about 10 cycles per bit, corresponding to an information transfer rate of $f_o/10$ baud.

$$C_2 = \frac{130}{f_o}\ \mu F$$

$$C_3 = \frac{260}{f_o}\ \mu F$$

In cases where turn-off time can be sacrificed to achieve fast turn-on, the optional sensitivity adjustment circuit can be used to move the quiescent C_3 voltage lower (closer to the threshold voltage). However, sensitivity to beat frequencies, noise and extraneous signals will be increased.

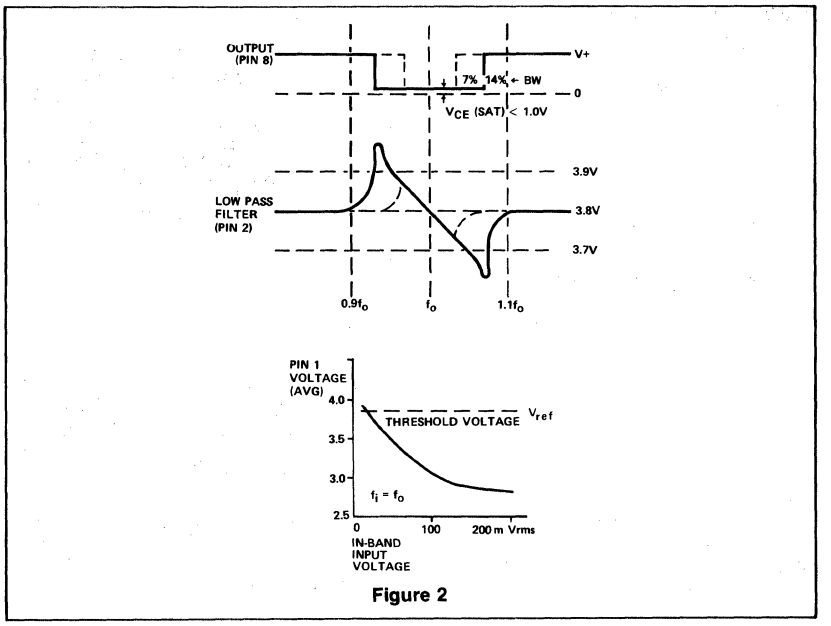

Figure 2

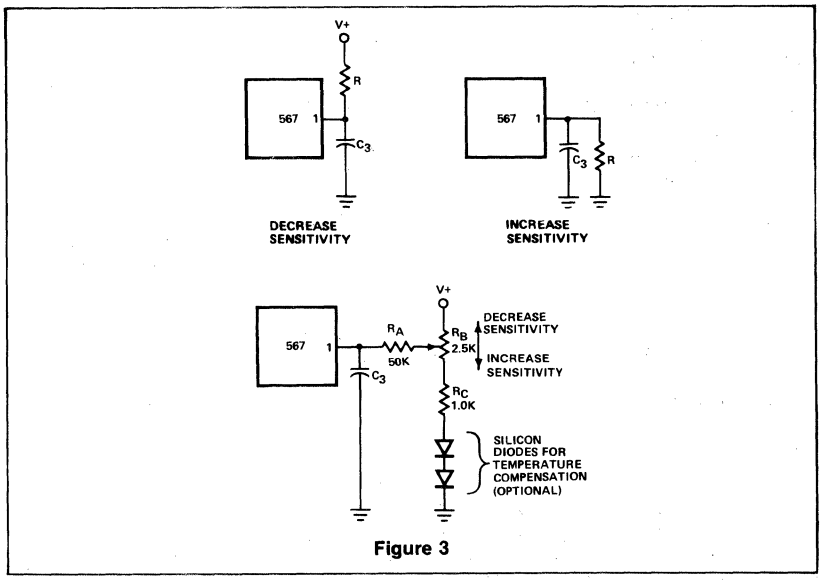

Figure 3

OPTIONAL CONTROLS (Figure 3)

The 567 has been designed so that, for most applications, no external adjustments are required. Certain applications, however, will be greatly facilitated if full advantage is taken of the added control possibilities available through the use of additional external components. In the diagrams given, typical values are suggested where applicable. For best results the resistors used, except where noted, should have the same temperature coefficient. Ideally, silicon diodes would be low-resistivity types, such as forward-biased transistor base-emmiter junctions. However, ordinary low-voltage diodes should be adequate for most applications.

SENSITIVITY ADJUSTMENT

(Figure 3)

When operated as a very narrow band detector (less than 8 percent), both C_2 and C_3 are made quite large in order to improve noise and outband signal rejection. This will inevitably slow the response time. If, however, the output stage is biased closer to the threshold level, the turn-on time can be improved. This is accomplished by drawing additional current to terminal 1. Under this condition, the 567 will also give an output for lower-level signals (10mV or lower).

By adding current to terminal 1, the output stage is biased further away from the threshold voltage. This is most useful when, to obtain maximum operating speed, C_2 and C_3 are made very small. Normally, frequencies just outside the detection band could cause false outputs under this condition. By desensitizing the output stage, the outband beat notes do not feed through to the output stage. Since the input level must be somewhat greater when the output stage is made less sensitive, rejection of third harmonics or in-band harmonics (of lower frequency signals) is also improved.

CHATTER PREVENTION (Figure 4)

Chatter occurs in the output stage when C_3 is relatively small, so that the lock transient and the AC components at the quadrature phase detector (lock detector) output cause the output stage to move through its threshold more than once. Many loads, for example lamps and relays, will not respond to the chatter. However, logic may recognize the chatter as a series of outputs. By feeding the output stage output back to its input (pin 1) the chatter can be eliminated. Three schemes for doing this are given in Figure 4. All operate by feeding the first output step (either on or off) back to the input, pushing the input past the threshold until the transient conditions are over. It is only necessary to assure that the feedback time constant is not so large as to prevent operation at the highest anticipated speed. Although chatter can always be eliminated by making C_3 large, the feedback circuit will enable faster operation of the 567 by allowing C_3 to be kept small. Note that if the feedback time constant is made quite large, a short burst at the input frequency can be stretched into a long output pulse. This may be useful to drive, for example, stepping relays.

DETECTION BAND CENTERING (OR SKEW) ADJUSTMENT

(Figure 5)

When it is desired to alter the location of the detection band (corresponding to the loop capture range) within the lock range, the

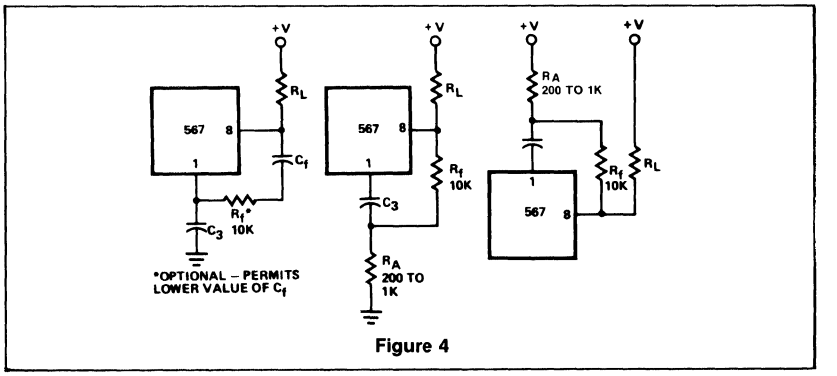

Figure 4

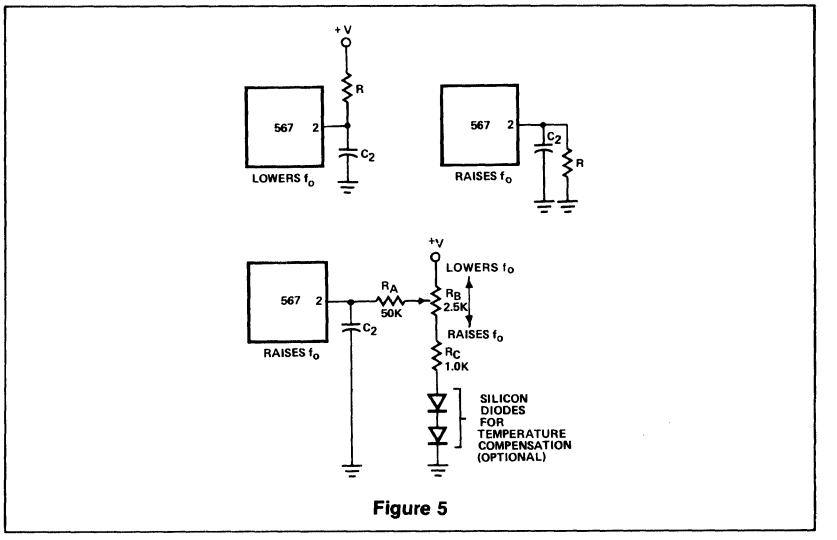

Figure 5

circuits shown above can be used. By moving the detection band to one edge of the range, for example, input signal variations will expand the detection band in only one direction. This may prove useful when a strong but undesirable signal is expected on one side or the other of the center frequency. Since R_B also alters the duty cycle slightly, this method may be used to obtain a precise duty cycle when the 567 is used as an oscillator.

ALTERNATE METHOD OF BANDWIDTH REDUCTION

(Figure 6)

Although a large value of C_2 will reduce the bandwidth, it also reduces the loop damping so as to slow the circuit response time. This may be undesirable. Bandwidth can be reduced by reducing the loop gain. This scheme will improve damping and permit faster operation under narrow-band conditions. Note that the reduced impedance level at terminal 2 will require that a larger value of C_2 be used for a given filter cutoff frequency. If more than three 567s are to be used, the network of R_B and R_C can be eliminated and the R_A resistors connected together. A capacitor between this junction and ground may be required to shunt high frequency components.

OUTPUT LATCHING (Figure 7)

To latch the output on after a signal is received, it is necessary to provide a feedback resistor around the output stage (between pins 8 and 1). Pin 1 is pulled up to unlatch the output stage.

REDUCTION OF C1 VALUE

(Figure 8)

For precision very low-frequency applications, where the value of C_1 becomes large, an overall cost savings may be achieved by inserting a voltage follower between the R_1 C_1 junction and pin 6, so as to allow a higher value of R_1 and a lower value of C_1 for a given frequency.

14

PROGRAMMING

To change the center frequency, the value of R_1 can be changed with a mechanical or solid state switch, or additional C_1 capacitors may be added by grounding them through saturating npn transistors.





NOTE

Adjust control for symmetry of detection band edges about f_o.

Figure 6

TYPICAL APPLICATIONS

TOUCH-TONE® DECODER

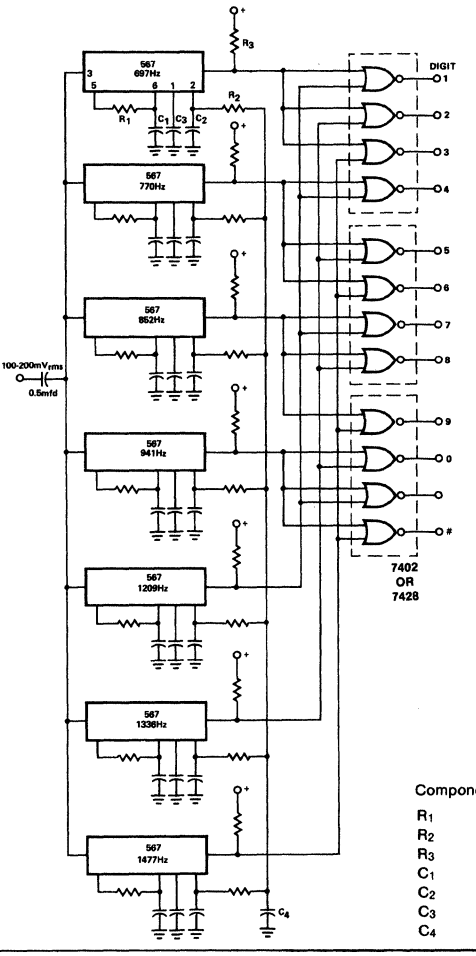

Component values (Typical)

R_1	6.8 to 15K ohm
R_2	4.7K ohm
R_3	20K ohm
C_1	0.10mfd
C_2	1.0mfd 5V
C_3	2.2mfd 6V
C_4	250 μF 6V

OUTPUT LATCHING

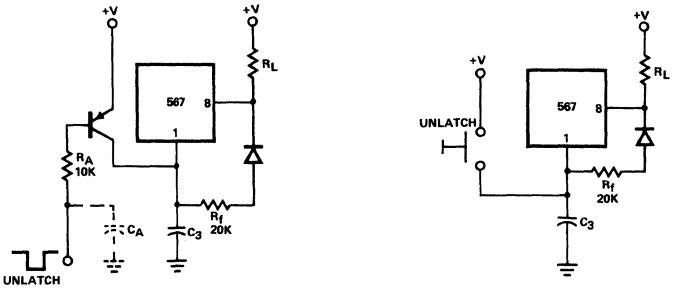

C_A prevents latch-up when power supply is turned on.

Figure 7

PRECISION VLF



Figure 8

TYPICAL APPLICATIONS (Cont'd)

CARRIER-CURRENT REMOTE CONTROL OR INTERCOM

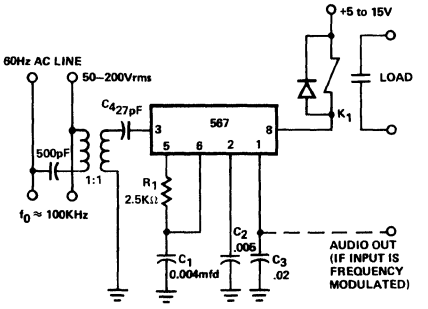

DUAL-TONE DECODER

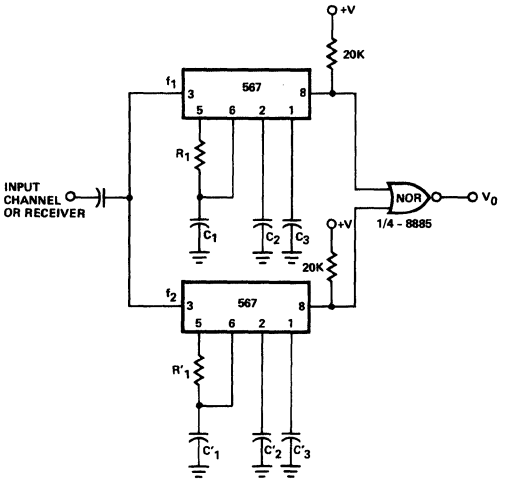

1. Resistor and capacitor values chosen for desired frequencies and bandwidth.
2. If C_3 is made large so as to delay turn-on of the top 567, decoding of sequential (f_1 f_2) tones is possible.

24% BANDWIDTH TONE DECODER

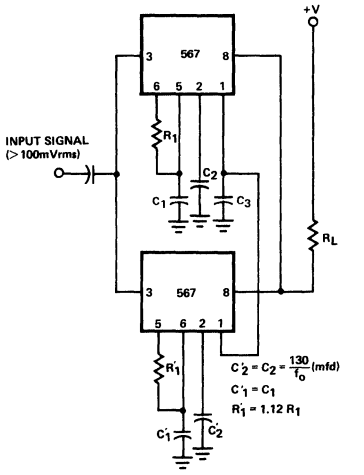

0° to 180° PHASE SHIFTER

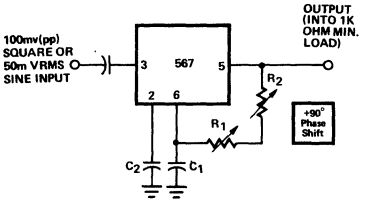

$R_2 \approx R_1/5$

Adjust R_1 so that $\phi = 90°$ with control midway

14

TYPICAL APPLICATIONS (Cont'd)

OSCILLATOR WITH QUADRATURE OUTPUT



OSCILLATOR WITH DOUBLE FREQUENCY OUTPUT



PRECISION OSCILLATOR WITH 20ns SWITCHING



PULSE GENERATOR WITH 25% DUTY CYCLE

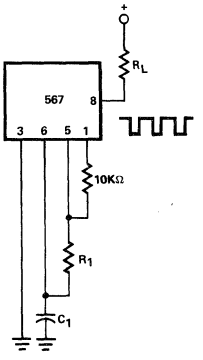

PRECISION OSCILLATOR TO SWITCH 100ma LOADS



PULSE GENERATOR

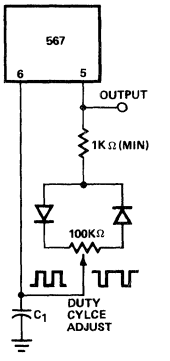

NOTE

Application information available on request.

SECTION 15
D-MOS FETS

Section 15—D-MOS

SD210/211/212/213/214/215	D-MOS FET Switch N-Channel Enhancement	463
SD300/303/304	D-MOS FET Dual Gate N-Channel Enhancement	468
SD305/306	D-MOS FET Dual Gate N-Channel Enhancement	475
SD5000/5001/5002	D-MOS FET Quad Analog Switch Arrays and Multiplexers	484

DESCRIPTION

The Signetics D-MOS SD210, 211, 212, 213, 214 and 215 are silicon, insulated gate, field effect transistors of the N-channel enhancement mode type. They are fabricated by the Signetics double-diffused process which gives high switching speed and low capacitance. A zener diode is connected between the gate and substrate of the SD211, 213 and 215. The diode bypasses any voltage transients which lie outside the range of -0.3V to +30V. Thus, the gate is protected against damage in all normal handling and operating situations. A drain-to-source breakdown of typically 35V makes the SD210 and 211 ideally suited for ±10V switch driver applications. Other characteristics allow them to be used as ±5V switches. The SD214 and 215 are designed to switch signals up to ±10V and the SD212 and 213 are designed to switch signals up to ±5V.

All the devices feature low gate node capacitance, extremely low drain node capacitance and very low feedback capacitance. Low "ON" resistance and hermetically sealed 4-lead TO-72 packages are also featured.

FEATURES

- **Low feedback capacitance: 0.30pF**
- **Low drain node capacitance: 1.3pF**
- **Low gate node capacitance: 2.4pF**
- **Low feedthrough and feedback transients**
- **Ion-implanted for greater reliability**
- **Excellent isolation from input to output: -120dB**
- **35V drain-to-source voltage for SD210/211**
- **Military qualifications pending**

APPLICATIONS

- **Switch driver**
- **Analog switch**
- **Multiplexers**
- **Digital switch**
- **Sample and hold**
- **Choppers**
- **A-TO-D converters**
- **D-TO-A converters**

PIN CONFIGURATION (Top View)

EE PACKAGE



*Diode protection on SD 211/213/215 only.

ORDER PART NO.
SD210EE, SD211EE, SD212EE
SD213EE, SD214EE, SD215EE

CHIP DIAGRAM



PAD NO.	PAD FUNCTION
1	SOURCE
2	DRAIN
3	GATE
4	DIODE

Die size 19X22

For SD211, 213, 215 bond gate and diode to same point.

ABSOLUTE MAXIMUM RATINGS (all devices)

PARAMETER	RATING	UNIT
Drain current (I_D)	50	mA
Ambient temperature range		
Storage	-65 to +175	°C
Operating	-55 to +125	°C
Transistor dissipation (P_T)		
At 25°C case temperature (Derate linearly to +125 °C case temperature at the rate of 8.0mW/ °C.)	1.2	W
At 25° C free-air temperature (Derate linearly to +125 °C free-air temperature at the rate of 2.0mW/°C.)	300	mW

ABSOLUTE MAXIMUM RATINGS T_A = 25° C unless otherwise specified.*

PARAMETER		SD210	SD211	SD212	SD213	SD214	SD215	UNIT
V_{DS}	Drain-to-source	+30	+30	+10	+10	+20	+20	Vdc
V_{SD}	Source-to-drain*	+10	+10	+10	+10	+20	+20	Vdc
V_{DB}	Drain-to-substrate	+30	+30	+15	+15	+25	+25	Vdc
V_{SB}	Source-to-substrate	+15	+15	+15	+15	+25	+25	Vdc
V_{GS}	Gate-to-source	±40	-15 +25	±40	-15 +25	±40	-25 +30	Vdc
V_{GB}	Gate-to-substrate	±40	-0.3 +25	±40	-0.3 +25	±40	-0.3 +30	Vdc
V_{GD}	Gate-to-drain	±40	-30 +25	±40	-15 +25	±40	-25 +30	Vdc

*NOTE

Refer to test conditions specified in Electrical Characteristics Table.

15

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SD210			SD211			SD212			UNIT
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Breakdown voltage											
BV_{DS} Drain-to-source	$V_{GS} = V_{BS} = 0V$, $I_D = 10\mu A$	30	35		30	35					V
	$V_{GS} = V_{BS} = -5V$, $I_S = 10nA$	10	25		10	25		10	25		V
BV_{SD} Source-to-drain	$V_{GD} = V_{BD} = -5V$ $I_D = 10nA$	10			10			10			V
BV_{DB} Drain-to-substrate	$V_{GB} = 0V$, source OPEN $I_D = 10nA$	15			15			15			V
BV_{SB} Source-to-substrate	$V_{GB} = 0V$, drain OPEN $I_S = 10\mu A$	15			15			15			V
Leakage current											
$I_{DS(OFF)}$ Drain-to-source	$V_{GS} = V_{BS} = -5V$ $V_{DS} = +10V$		1	10		1	10		1	10	nA
$I_{SD(OFF)}$ Source-to-drain	$V_{GD} = V_{BD} = -5V$ $V_{SD} = +10V$		1	10		1	10		1	10	nA
I_{GBS} Gate	$V_{DB} = V_{SB} = 0V$										
	$V_{GB} = \pm 40V$			0.1						0.1	nA
	$V_{GB} = +25V$						10				μA
V_T Threshold voltage	$V_{DS} = V_{GS} = V_T$, $I_S = 1\mu A$ $V_{SB} = 0V$	0.5	1.0	2.0	0.5	1.0	2.0	0.1	1.0	2.0	V
$r_{DS(ON)}$ Drain-to-source resistance	$I_D = 1.0mA$, $V_{SB} = 0$										
	$V_{GS} = +5V$		50	70		50	70		50	70	Ω
	$V_{GS} = +10V$		30	45		30	45		30	45	Ω
	$V_{GS} = +15V$		23			23			23		Ω
	$V_{GS} = +20V$		19			19			19		Ω
	$V_{GS} = +25V$		17						17		Ω

DC ELECTRICAL CHARACTERISTICS (Cont'd) T_A = 25 °C unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD213			SD214			SD215			UNIT
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Breakdown voltage												
BV_{DS}	Drain-to-source	$V_{GS} = V_{BS} = -5V$, $I_S = 10nA$	10	25		20	25		20	25		V
BV_{SD}	Source-to-drain	$V_{GD} = V_{BD} = -5V$ $I_D = 10nA$	10			20			20			V
BV_{DB}	Drain-to-substrate	V_{GB} = 0V, source OPEN $I_D = 10nA$	15			25			25			V
BV_{SB}	Source-to-substrate	V_{GB} = 0V, drain OPEN $I_S = 10\mu A$	15			25			25			V
Leakage current												
$I_{DS}(OFF)$	Drain-to-source	$V_{GS} = V_{BS} = -5V$										
		$V_{DS} = +10V$		1	10							nA
		$V_{DS} = +20V$					1	10		1	10	nA
$I_{SD}(OFF)$	Source-to-drain	$V_{GD} = V_{BD} = -5V$										
		$V_{SD} = +10V$		1	10							nA
		$V_{SD} = +20V$					1	10		1	10	nA
I_{GBS}	Gate	$V_{DB} = V_{SB} = 0V$										
		$V_{GB} = \pm 40V$						0.1				nA
		$V_{GB} = +25V$			10							μA
		$V_{GB} = +30V$									10	μA
V_T	Threshold voltage	$V_{DS} = V_{GS} = V_T$, $I_S = 1\mu A$ V_{SB} = 0V	0.1	1.0	2.0	0.1	1.0	2.0	0.1	1.0	2.0	V
$r_{DS}(ON)$	Drain-to-source resistance	$I_D = 1.0mA$, V_{SB} = 0										
		$V_{GS} = +5V$		50	70		50	70		50	70	Ω
		$V_{GS} = +10V$		30	45		30	45		30	45	Ω
		$V_{GS} = +15V$		23			23			23		Ω
		$V_{GS} = +20V$		19			19			19		Ω
		$V_{GS} = +25V$					17			17		Ω

AC ELECTRICAL CHARACTERISTICS T_A = 25 °C unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD210			SD211			SD212			UNIT
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
gfs	Forward transconductance	$V_{DS} = 10V$, V_{SB} = 0V $I_D = 20mA$, f = 1kHz	10	15		10	15		10	15		mmhos
Small Signal Capacitances (See capacitance model)		$V_{DS} = 10V$, f = 1MHz $V_{GS} = V_{BS} = -15V$										
$C_{(GS+GD+GB)}$	Gate node			2.4	3.5		2.4	3.5		2.4	3.5	pF
$C_{(GD+DB)}$	Drain node			1.3	1.5		1.3	1.5		1.3	1.5	pF
$C_{(GS+SB)}$	Source node			3.5	4.0		3.5	4.0		3.5	4.0	pF
C_{DG}	Reverse transfer			0.3	0.5		0.3	0.5		0.3	0.5	pF

AC ELECTRICAL CHARACTERISTICS (Cont'd) T_A = 25 °C unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD213			SD214			SD215			UNIT
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
gfs	Forward transconductance	$V_{DS} = 10V$, V_{SB} = 0V $I_D = 20mA$, f = 1kHz	10	15		10	15		10	15		mmhos
Small Signal Capacitances (See capacitance model)		$V_{DS} = 10V$, f = 1MHz $V_{GS} = V_{BS} = -15V$										
$C_{(GS+GD+GB)}$	Gate node			2.4	3.5		2.4	3.5		2.4	3.5	pF
$C_{(GD+DB)}$	Drain node			1.3	1.5		1.3	1.5		1.3	1.5	pF
$C_{(GS+SB)}$	Source node			3.5	4.0		3.5	4.0		3.5	4.0	pF
C_{DG}	Reverse transfer			0.3	0.5		0.3	0.5		0.3	0.5	pF

15

TYPICAL PERFORMANCE CHARACTERISTICS

DRAIN CURRENT vs DRAIN-TO-SOURCE VOLTAGE



DRAIN CURRENT vs GATE-TO-SOURCE VOLTAGE



DRAIN-TO-SOURCE RESISTANCE vs TEMPERATURE

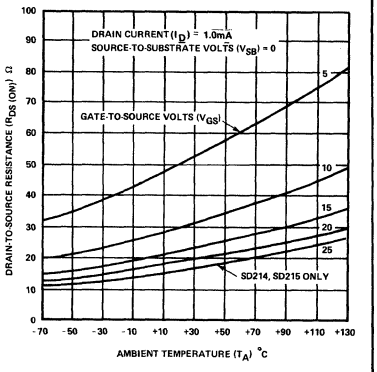

1kHz FORWARD TRANSCONDUCTANCE vs DRAIN CURRENT



THRESHOLD VOLTAGE vs SOURCE-TO-SUBSTRATE VOLTAGE

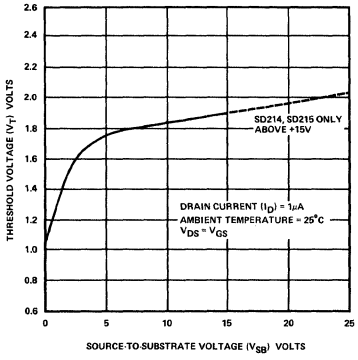

THRESHOLD VOLTAGE vs TEMPERATURE

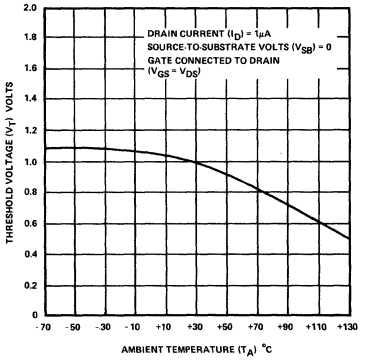

DRAIN-TO-SOURCE RESISTANCE vs GATE-TO-SOURCE VOLTAGE

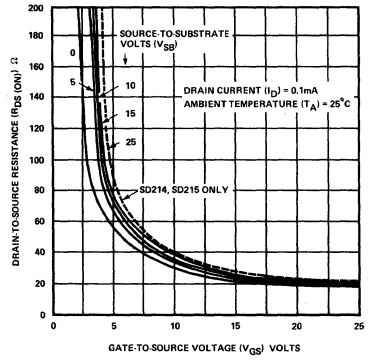

DRAIN CURRENT vs GATE-TO-SOURCE VOLTAGE

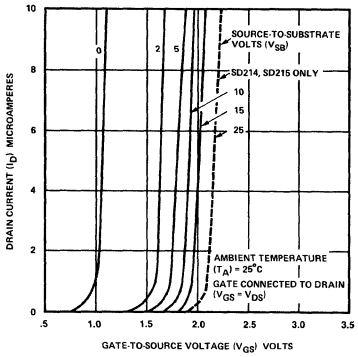

DISTORTION vs GATE-TO-SOURCE VOLTAGE

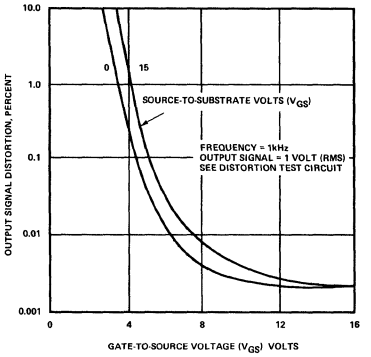

TYPICAL APPLICATION

D-MOS DRIVER/SWITCH

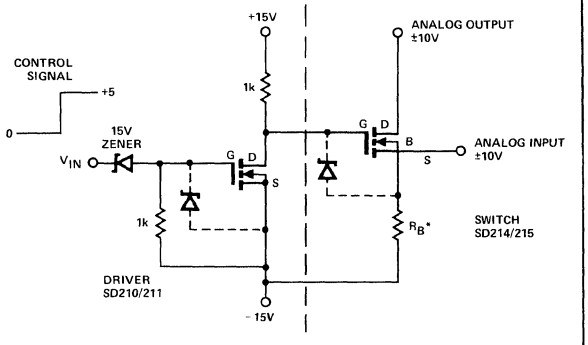

R_B*Optional current limiting resistor

NOTE
*All resistors standard and are measured in ohms.

TYPICAL SWITCHING WAVEFORM

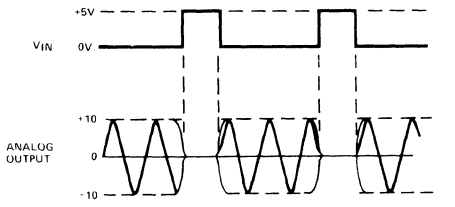

TEST CIRCUITS

SWITCHING

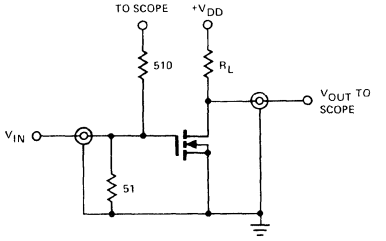

Input pulse: t_d, t_r < 1ns,
Pulse width = 100ns,
Rep rate = 1MHz

SAMPLING SCOPE

t_r < 360ps
R_{IN} = 1MΩ
C_{IN} = 2.0pF

TYPICAL SWITCHING WAVEFORM

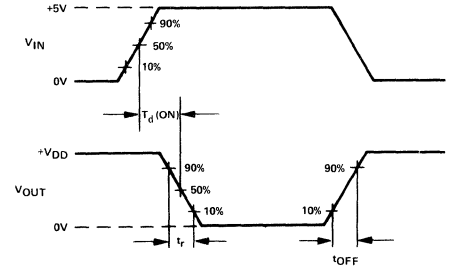

SWITCHING CHARACTERISTICS

		$t_{d(ON)}$ (ns)		t_r(ns)		t_{OFF}(ns)	
V_{DD}	R_L	Typ	Max	Typ	Max	Typ	Max
5	680	0.6	1.0	0.7	1.0	9.0	*
10	680	0.7		0.8		9.0	*
15	1k	0.9		1.0		14.0	*

*t_{OFF} is dependent on R_L and C_L and does not depend on the device characteristics.

DISTORTION



NOTE: All resistors standard and are measured in ohms.

CAPACITANCE MODEL



15

SD300/303-EC
SD304-EE

DESCRIPTION

The Signetics D-MOS SD300/303/304 are silicon, dual-insulated-gate, field effect transistor of the N-channel enhancement mode type. It is fabricated by the Signetics double-diffused process which gives superior high frequency performance. Zener diodes are connected between the two gates and the substrate. These diodes bypass any voltage transients which lie outside the range of −0.3V to +25.0V. Thus, the gates are protected against damage in all normal handling and operating situations.

The device characteristics make it ideally suited for a variety of high frequency amplifier and mixer applications. The presence of two gates plus the incorporation of the drift region in the structure has made the feedback capacity (Crss) low. A wide AGC capability plus a significant reduction in cross-modulation distortion is now available because of the inherent linearity of these devices. The SD300/303/304 are hermetically sealed in a modified 4-lead TO-72 package.

GENERAL FEATURES

- **Lower cross-modulation and wider dynamic range than bipolar or single gate FETs**
- **Reverse AGC capability**
- **Linear mixing capability**
- **Diode protected gates**
- **High forward transconductance: 10mmhos**
- **ION-implanted**
- **Positive bias only**

PIN CONFIGURATIONS (Top View)

EC, EE PACKAGE

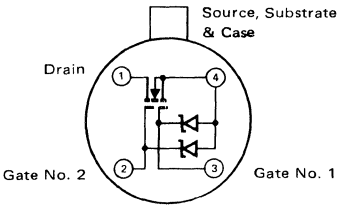

ORDER PART NO.
SD300EC SD303EC SD304EE

CHIP DIAGRAM



PAD NO.	PAD FUNCTION
1	DRAIN
2	GATE NO. 2
3	GATE NO. 1
4	SOURCE

Die Size 20X20

FEATURES (Typical Values)

PARAMETER	SD300	SD303	SD304	UNIT
High gain through UHF range	13	14		dB at 1GHz
High gain through VHF range			16	dB at 500MHz
Low noise through UHF range	8	5.5		dB at 1GHz
Low noise through VHF range			5	dB at 500MHz
Low input capacitance	2.0	3.0	2.5	pF
Low feedback capacitance	0.02	0.02	0.03	pF
Low outut capacitance	1.0	0.6	1.0	pF

ABSOLUTE MAXIMUM RATINGS $T_A = 25°C$ unless otherwise specified.

	PARAMETER	RATING	UNIT
V_{DS}	Drain-to-source		
	SD300/304	+25	V
	SD303	+20	V
V_{G1B}	DC gate no. 1-to-substrate voltage	-0.3, +10	V
V_{G2B}	DC gate no. 2-to-substrate voltage	-0.3, +15	V
I_D	Drain current	50	mA
T_A	Ambient temperature range		
	Storage	-65 to +175	°C
	Operating	-55 to +125	°C
P_T	Transistor dissipation		
	At +25°C case temperature (Derate linearly to +125°C case temperature at the rate of 8.0mW/°C.)	1.2	W
	At +25°C free-air temperature (Derate linearly to +125°C free-air temperature at the rate of 2.0mW/°C.)	300	mW

DUAL GATE CASCODE BIAS SCHEME



$+V_{DS}$ = 0 → +20 volts
$+V_{G1S}$ = 0 → +4 volts
$+V_{G2S}$ = 0 → +10 volts
$+I_{DS}$ = 0 → +20mA

SD300/303-EC
SD304-EE

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD300			SD303			UNIT
			Min	Typ	Max	Min	Typ	Max	
BV_{DS}	Drain-to-source Breakdown voltage	$V_{G1S} = V_{G2S} = 0V$, $I_D = 5\mu A$	25	30		20	25		V
I_{G1SS}	Gate 1 Leakage current	$V_{G1S} = +5V$, $V_{G2S} = V_{DS} = 0V$		0.001	0.1		0.001	0.1	μA
I_{G2SS}	Gate 2 Leakage current	$V_{G2S} = +10V$ $V_{G1S} = V_{DS} = 0V$		0.001	0.1		0.001	0.1	μA
$I_{D(OFF)}$	Drain-to-source Leakage current	$V_{DS} = +15V$, $V_{G1S} = V_{G2S} = 0V$		0.001	0.1		0.001	0.1	μA
I_{DSS}	Zero bias Drain current	$V_{DS} = +15V$ $V_{G1S} = V_{G2S} = 0V$		0.001	0.1		0.001	0.1	μA
V_{T1}	Gate 1 Threshold voltage	$V_{DS} = V_{G1S} = V_{T1}$ $V_{G2S} = +10V$, $I_D = 1\mu A$	0.1	1.0	2.0	0.1	0.5	1.5	V
V_{T2}	Gate 2 Threshold voltage	$V_{DS} = V_{G2S} = V_{T2}$, $V_{G1S} = +4V$, $I_D = 1\mu A$	0.1	1.0	2.0	0.1	0.5	1.5	V
$r_{DS}(ON)$	Drain-to-source On resistance	$V_{G1S} = +5V$, $V_{G2S} = +10V$, $I_D = 1.0mA$		90	130		65	80	Ω

DC ELECTRICAL CHARACTERISTICS (Cont'd) $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD304			UNIT
			Min	Typ	Max	
BV_{DS}	Drain-to-source Breakdown voltage	$V_{G1S} = V_{G2S} = 0V$, $I_D = 5\mu A$	25	30		V
I_{G1SS}	Gate 1 Leakage current	$V_{G1S} = +5V$, $V_{G2S} = V_{DC} = 0V$		0.001	0.1	μA
I_{G2SS}	Gate 2 Leakage current	$V_{G2S} = +10V$ $V_{G1S} = V_{DS} = 0V$		0.001	0.1	μA
$I_{D(OFF)}$	Drain-to-source Leakage current	$V_{DS} = +15V$, $V_{G1S} = V_{G2S} = 0V$		0.001	0.1	μA
I_{DSS}	Zero bias Drain current	$V_{DS} = +15V$ $v_{G1S} = V_{G2S} = 0V$		0.001	0.1	μA
V_{T1}	Gate 1 Threshold voltage	$V_{DS} = V_{G1S} = V_{T1}$ $V_{G2S} = +10V$, $I_D = 1\mu A$	0.1	1.0	2.0	V
V_{T2}	Gate 2 Threshold voltage	$V_{DS} = V_{G2S} = T_{T2}$, $V_{G1S} = +4V$, $I_D = 1\mu A$	0.1	1.0	2.0	V
$r_{DS}(ON)$	Drain-to-source On resistance	$V_{G1S} = +5V$, $V_{G2S} = +10V$, $I_D = 1.0mA$		90	130	Ω

15

SD300/303-EC
SD304-EE

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER	TEST CONDITIONS	SD300			SD303			SD304			UNIT
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Small signal short circuit Capacitances	f = 1MHz, Gate 2 AC grounded										
C_{iss} Input	V_{DS} = +15V, V_{G1S} ≅ 3.5V, V_{G2S} = +10V, I_D = 18mA		2.0	2.5					2.5	3.0	pF
	V_{DS} = +15V, V_{G1S} ≅ +2.5V, V_{G2S} = +10V, I_D = 18mA					3.0	3.5				pF
C_{oss} Output	V_{DS} = +15V, V_{G1S} = 0V V_{G2S} = +10V		1.0	1.2		0.6			1.0	1.2	pF
C_{rss} Reverse transfer	V_{DS} = +15V V_{G1S} = 0V, V_{G2S} = +10V		0.02			0.02			0.03		pF
gfs Forward transconductance	V_{DS} = +15V, V_{G1S} ≅ +3.5V V_{G2S} = +10V, I_D = 18mA, f = 1kHz	8.0	10.0					8.0	10.0		mmhos
	V_{DS} = +15V, V_{G1S} ≅ +2.5V, V_{G2S} = +10V, I_D = 18mA				13.0	15.0					mmhos
Gps Power gain	V_{DS} = +15V, V_{G1S} ≅ +3.5V, V_{G2S} = +10V, I_D = 18mA f = 1GHz	9.0	13.0*								dB
	f = 500MHz							13.0	16.0		dB
	f = 200MHz	22.0	24.0								dB
	V_{DS} = +15V, V_{G1S} ≅ +2.5V, V_{G2S} = +10V, I_D = 18mA f = 1GHz				10.0	14.0*					dB
NF Noise figure	V_{DS} = +15V, V_{G1S} ≅ +3.5V, V_{G2S} = +10V, I_D = 18mA f = 1GHz		8.0*	9.0							dB
	f = 500MHz								5.0	6.0	dB
	f = 200MHz		3.0	4.0							
	V_{DS} = +15V, V_{G1S} ≅ +2.5V, V_{G2S} = +10V, I_D = 18mA, f = 1GHz					5.5*	7.0				dB
E_{int} Interfering signal level at gate for 1% cross-modulation distortion. Peak voltage referenced to 300Ω system.	V_{DS} = +15V, V_{G2S} = +10V, I_D = 18mA, Desired signal f = 500MHz, Undersired signal f = 501MHz			200					200		mV
	V_{DS} = +15V, V_{G2S} = +10V, I_D = 18mA, Wanted Signal f = 1GHz, Interfering signal f = 0.995GHz					150					mV
AGC (V_{G2S}) Range of automatic Gain control	V_{DS} = +15V, V_{G1S} ≅ +3.5V, f = 500MHz		40						40		dB
	V_{DS} = +15V, V_{G1S} ≅ +2.5V, f = 500MHz					40					dB

*NOTE

Measured in amplifier test fixture.

SD300/303-EC
SD304-EE

SD300 TYPICAL PERFORMANCE CHARACTERISTICS

SD300 "S" PARAMETERS

AMBIENT TEMP. (TA) = +25°C
DRAIN MILLIAMPERES (ID) = 18

DRAIN-TO-SOURCE VOLTS (VDS) = +15
GATE NO. 1-TO-SOURCE VOLTS (VG1S) ≃ +3.5
GATE NO. 2-TO-SOURCE VOLTS (VG2S) = +10

S_{11}

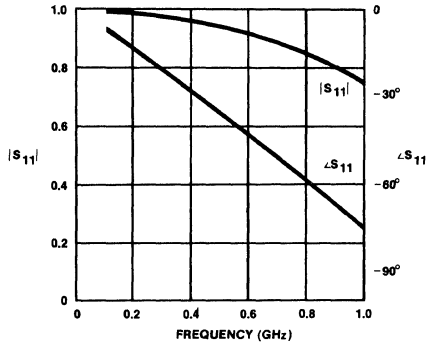

S_{12}

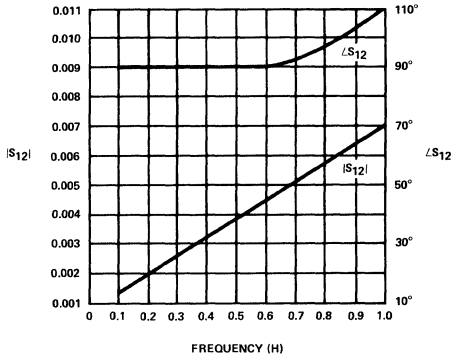

S_{21}

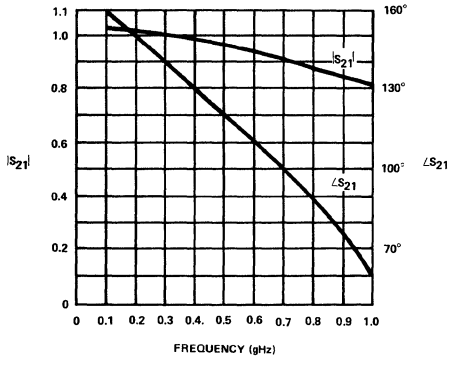

S_{22}

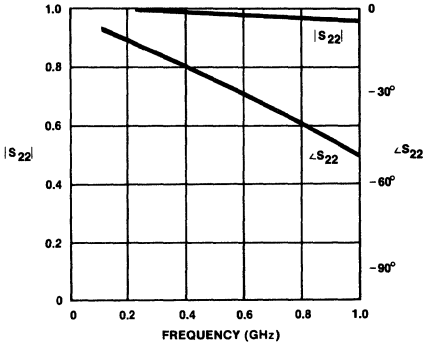

POWER GAIN vs FREQUENCY

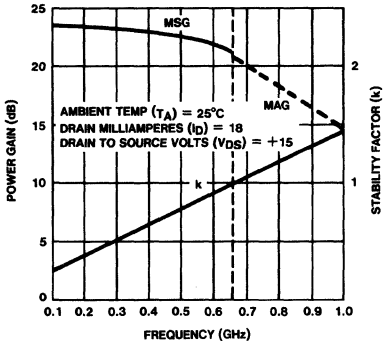

NOISE FIGURE AND AVAILABLE GAIN vs DRAIN CURRENT

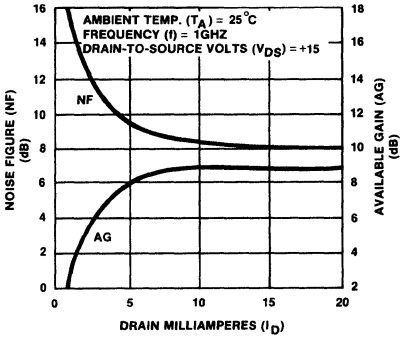

15

SD300/303-EC
SD304-EE

SD303 TYPICAL PERFORMANCE CHARACTERISTICS

DRAIN CURRENT vs DRAIN-TO-SOURCE VOLTAGE

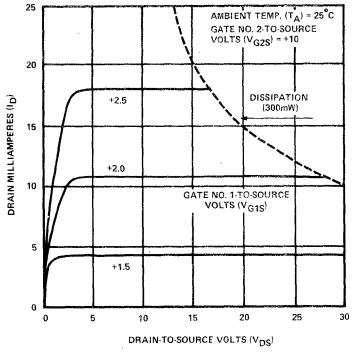

DRAIN CURRENT vs GATE NO. 1-TO-SOURCE VOLTAGE

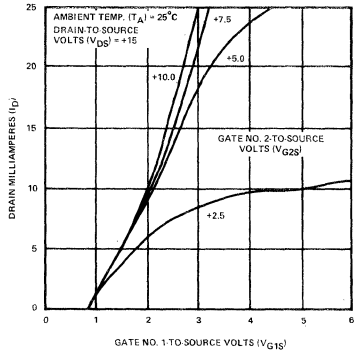

DRAIN CURRENT vs GATE NO. 2-TO-SOURCE VOLTAGE

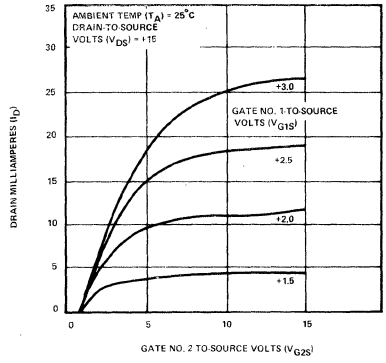

1kHz FORWARD TRANSCONDUCTANCE vs DRAIN CURRENT

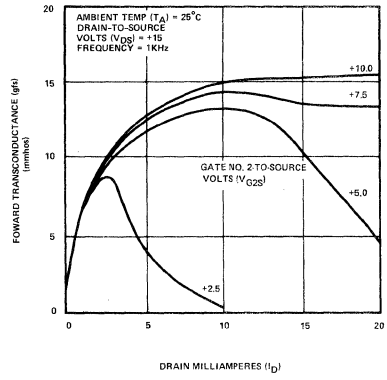

POWER GAIN vs FREQUENCY

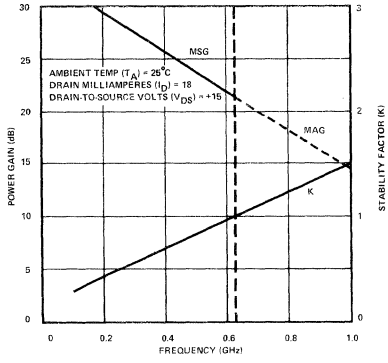

POWER GAIN vs DRAIN CURRENT

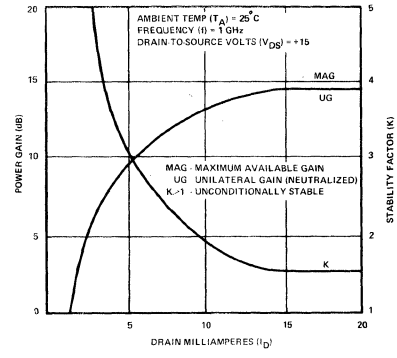

SD303 "S" PARAMETERS

AMBIENT TEMP. (T_A) = +25° C
DRAIN MILLIAMPERES (I_D) = 18

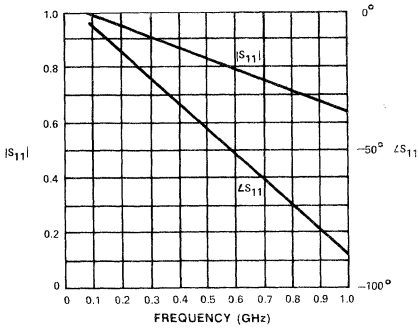

DRAIN-TO-SOURCE VOLTS (V_{DS}) = +15
GATE NO. 1-TO-SOURCE VOLTS (V_{G1S}) ≃ +2.5
GATE NO. 2-TO-SOURCE VOLTS (V_{G2S}) = +10

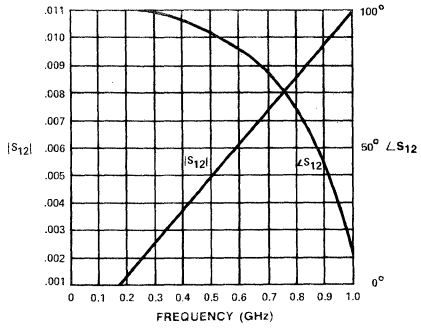

SD300/303-EC
SD304-EE

SD300/SE304 TYPICAL PERFORMANCE CHARACTERISTICS(Cont'd)

NOISE FIGURE AND AVAILABLE GAIN vs FREQUENCY
SD300

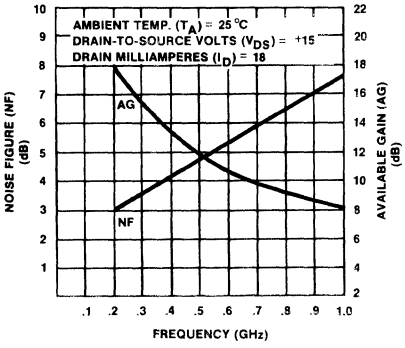

POWER GAIN vs DRAIN CURRENT
SD300

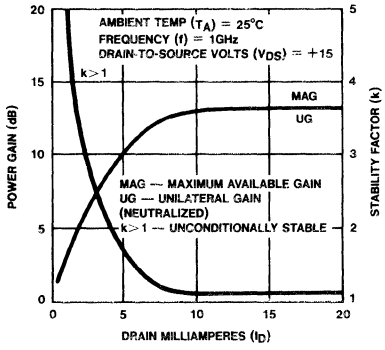

POWER GAIN vs DRAIN CURRENT
SD304

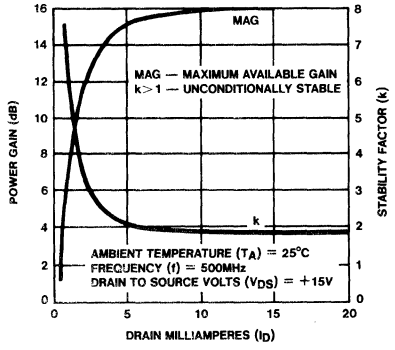

POWER GAIN vs FREQUENCY
SD304

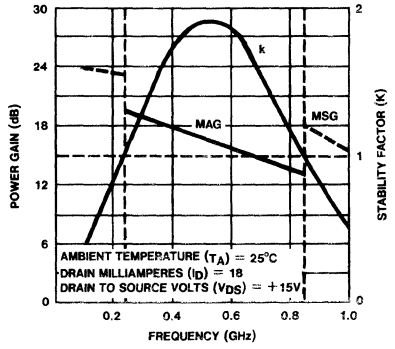

DRAIN CURRENT vs DRAIN-TO-SOURCE VOLTAGE
SD300/SE304

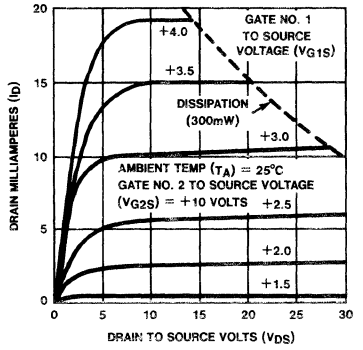

1kHz FORWARD TRANSCONDUCTANCE vs DRAIN CURRENT
SD300/SD304

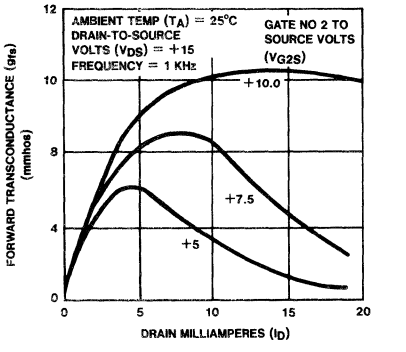

DRAIN CURRENT vs GATE NO. 1-TO-SOURCE VOLTAGE
SD300/SD304

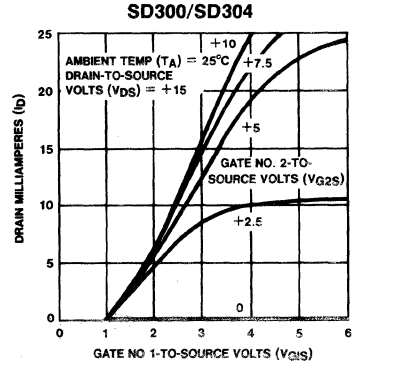

DRAIN CURRENT vs GATE NO. 2-TO-SOURCE VOLTAGE
SD300/SD304

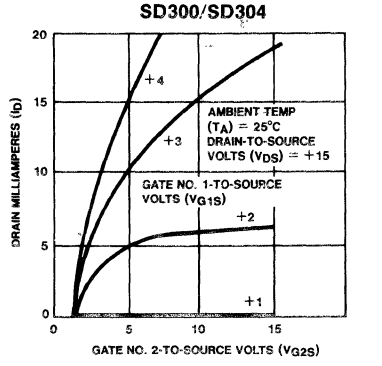

AUTOMATIC GAIN CONTROL RANGE AT 50MHz
SD300/SD304

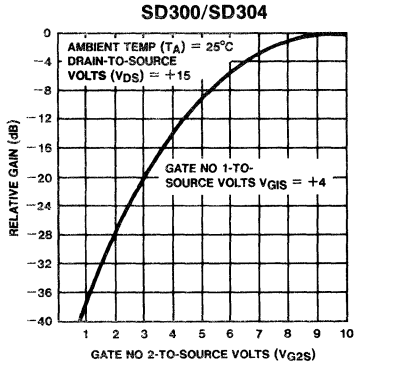

15

SD303 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

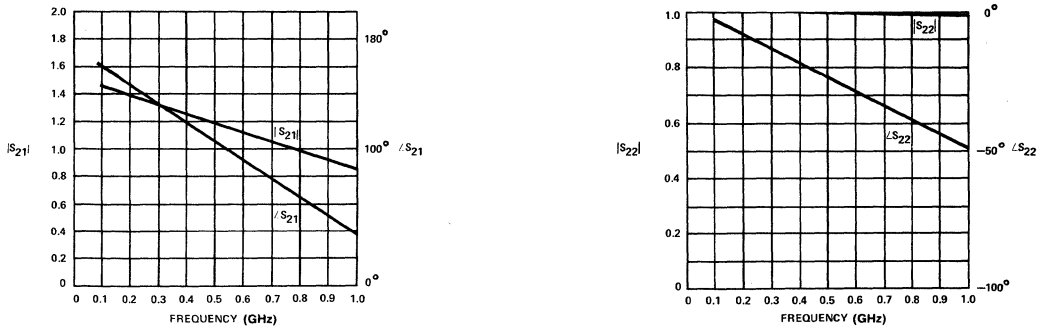

1GHz TEST FIXTURE (used with SD300, SD303)

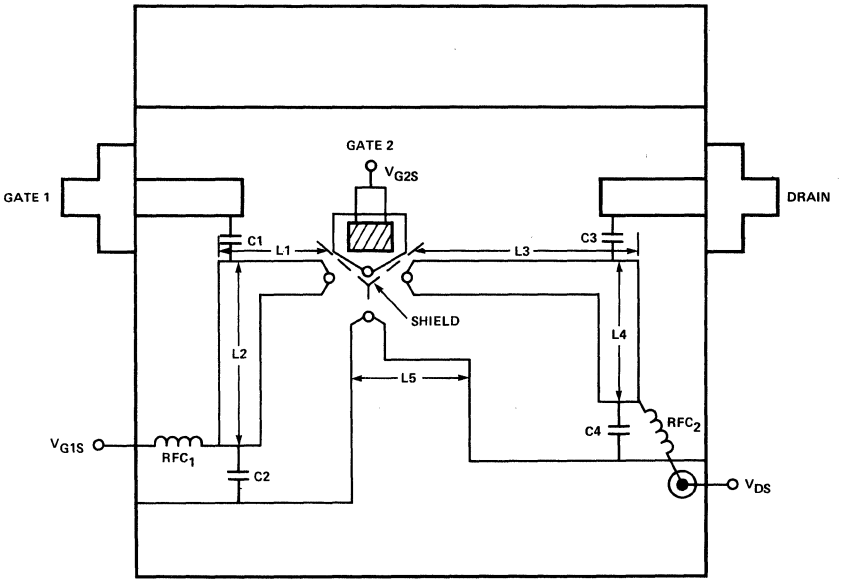

Dielectric is 1/16" Teflon-Fiberglass (3M-K6098-11).
All microstrip width = 0.175 inch.

L_1 = 0.42 inch	C_1 = 0.8-10pF Johanson 5201
L_2 = 1.68 inches	$C_2 = C_4$ 1.20pF Johanson 5501
L_3 = 0.64 inch	C_3 = 0.4-6.0pF Johanson 4642
L_4 = 1.52 inches	RFC_1 = 0.22μH
L_5 = 0.30 inch	RFC_2 = 18μH

NOTE Shield and all passive components on ground plane side of amplifier.
1000pF bypasses are:
Drain: Cory FT4-01-2
Gate 2: American technical Ceramics ATC100B (Chip capacitor)

Launchers are OSM248-2

SD305/306-EE

DESCRIPTION

The Signetics D-MOS SD305 and 306 are silicon, dual-insulated gate, field-effect transistors of the N-channel enhancement mode type. Zener diodes are connected between the two gates and the substrate. These diodes bypass any voltage transients which lie outside the range of -0.3V to +20.0V. Thus, the gates are protected against damage in all normal handling and operating situations. The characteristics of the devices make them ideally suited for a variety of VHF amplifier and mixer applications. The presence of two gates plus the incorporation of the drift region in the structure has made the feedback capacity (C_{G1D}) typically less than 0.03pF. A wide AGC capability plus significant reduction in cross modulation distortion is now available because of the inherent linearity of the devices. The SD305 and SD306 are hermetically sealed in a 4-lead TO-72 package.

GENERAL FEATURES

- **Positive bias only**
- **Low gate voltages**
- **Enhancement mode operation**
- **Wide AGC range: -50dB at 200MHz**
- **Zener diode gate protection**
- **ION implanted for greater reliability**

FEATURES—SD305 (VHF TV and FM Mixer)

- **High conversion gain: 17dB at 200MHz with $V_{G1S} = V_{G2S}$ for biasing simplicity**
- **Excellent isolation from Gate No. 1 (RF) to Gate No. 2 (LO): -20dB at 200MHz**
- **Low input capacitance: 4.0pF**
- **Low feedback capacitance: 0.03pF**
- **Excellent cross modulation performance and low noise operation**
- **High transconductance: 27mmhos**

FEATURES—SD306 (VHF TV and FM RF Amplifier)

- **High power gain without neutralization: 20dB at 200MHz**
- **Low noise figure: 1.5dB at 200MHz**
- **Low input and output capacitance: 3.3pF and 1.0pF constant with AGC**
- **Low feedback capacitance: 0.03pF**
- **Superior cross modulation performance**
- **High transconductance: 15mmhos**

ABSOLUTE MAXIMUM RATINGS

T_A = 25°C unless otherwise specified.

PARAMETER		RATING	UNIT
V_{DS}	Drain-to-source voltage	+20	V
V_{G1B}	Gate no. 1—to-substrate voltage	-0.3 to +20	Vdc
V_{G2B}	Gate no. 1—to-substrate voltage	-0.3 to +20	Vdc
I_D	Drain current		
	SD305	150	mA
	SD306	50	mA
T_A	Ambient temperature range		
	Storage	-65 to +175	°C
	Operating	-55 to +125	°C
P_T	Transistor dissipation		
	At 25°C case temperature (Derate linearly to 125°C case temperature at the rate of 8.0mW/°C)	1.2	W
	At 25°C free-air temperature (Derate linearly to 125°C free-air temperature at the rate of 2.0mW/°C)	300	mW

PIN CONFIGURATION

DE PACKAGE
(Top View)

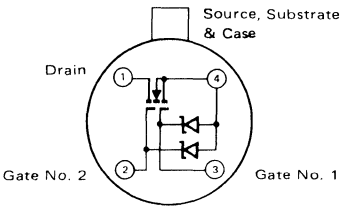

ORDER PART NO.
SD305EE and SD306EE

CHIP DIAGRAMS

SD305



PAD NO.	PAD FUNCTION
1	GATE NO. 1
2	SOURCE
3	GATE NO. 2
4	SOURCE
5	DRAIN

Die Size 24 X 24

NOTE
Pads 2 and 4 must both be utilized for source connection

SD306



PAD NO.	PAD FUNCTION
1	DRAIN
2	GATE NO. 2
3	GATE NO. 1
4	SOURCE

Die Size 20 X 20

15

DC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD305			SD306			UNIT
			Min	Typ	Max	Min	Typ	Max	
OFF Characteristics									
BV_{DS}	Drain-to-source Breakdown voltage	$V_{G1S} = V_{G2S} = 0V$, $I_D = 5\mu A$	20	30		20	25		V
I_D (OFF)	Drain-to-source Leakage current	$V_{DS} = +15V$ $V_{G1S} = V_{G2S} = 0V$		0.001	1.0		0.001	1.0	μA
I_{DSS}	Zero bias drain current	$V_{DS} = +15V$ $V_{G1S} = V_{G2S} = 0V$		0.001	1.0		0.001	1.0	μA
I_{G1SS}	Gate no. 1 leakage current	$V_{G1S} = +5V$ $V_{G2S} = V_{DS} = 0V$		0.001	0.1		0.001	0.1	μA
I_{G2SS}	Gate no. 2 leakage current	$V_{G2S} = +10V$ $V_{G1S} = V_{DS} = 0V$		0.001	0.1		0.001	0.1	μA
ON Characteristics									
V_{T1}	Gate 1 threshold voltage	$V_{DS} = V_{G1S} = V_{T1}$, $V_{G2S} = +10V$, $I_D = 1\mu A$	0.1	1.0	2.0	0.1	0.5	1.5	V
V_{T2}	Gate 2 threshold voltage	$V_{DS} = V_{G2S} = V_{T2}$, $V_{G1S} = +5V$, $I_D = 1\mu A$	0.1	1.0	2.0	0.1	0.5	1.5	V
r_{DS}(ON)	Drain-to-source on resistance	$V_{G1S} = +5V$, $V_{G2S} = +10V$, $I_D = 1.0mA$		30	60		65	100	Ω

AC ELECTRICAL CHARACTERISTICS $T_A = 25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD305			SD306			UNIT
			Min	Typ	Max	Min	Typ	Max	
Small signal characteristics									
gfs	Forward transconductance	$V_{DS} = +15V$, $V_{G2S} = +10V$, f = 1kHz							
		$I_D = 50mA$	24	27					mmhos
		$I_D = 18mA$				13	15		mmhos
gfs (CONV)	Conversion transconductance	$V_{DS} = +15V$, $V_{G1S} = V_{G2S}$, $I_D = 8mA$, f = 1kHz, E_{LO}(RMS) = 750mV		10					mmhos
Capacitances		f = 1MHz, gate 2 AC grounded							
C_{G1S}	Input	$V_{DS} = +15V$, $V_{G2S} = +10V$							
		$I_D = 50mA$		4.0	5.0				pF
		$I_D = 18mA$					3.3	3.6	pF
		$V_{DS} = +15V$, $V_{G1S} = V_{G2S}$, $I_D = 8mA$		4.0	5.0				pF
C_{DS}	Output	$V_{DS} = +15V$, $V_{G1S} = 0V$, $V_{G2S} = +10V$		1.3	1.7		1.0	1.3	pF
C_{G1D}	Reverse transfer	$V_{DS} = +15V$ $V_{G1S} = 0V$, $V_{G2S} = +10V$		0.03			0.03		pF
	Input admittance	f = 200MHz, $V_{DS} = +15V$	$V_{G1S} = V_{G2S}$, $I_D = 8mA$			$V_{G2S} = +10V$, $I_D = 18mA$			
	$Re(Y_{11})$			1.05			1.11		mmhos
	$Im(Y_{11})$			6.66			4.76		mmhos
	Output admittance	f = 200MHz, $V_{DS} = +15V$							
	$Re(Y_{22})$			0.73			1.05		mmhos
	$Im(Y_{22})$			2.09			1.54		mmhos
	Forward transmittance	f = 200MHz, $V_{DS} = +15V$							
	$Re(Y_{21})$			4.69			13.23		mmhos
	$Im(Y_{21})$			-3.01			-5.62		mmhos
	Reverse transmittance	f = 200MHz, $V_{DS} = +15V$							
	$Re(Y_{12})$			0.04			0.01		mmhos
	$Im(Y_{12})$			-0.03			-0.04		mmhos
G_{ps}	Power gain[2]	$V_{DS} = +15V$, $V_{G2S} = +10V$ $I_D = 18mA$, f = 200MHz				17	20		dB

AC ELECTRICAL CHARACTERISTICS (Cont'd) T_A = 25°C unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD305			SD306			UNIT
			Min	Typ	Max	Min	Typ	Max	
G_{ps}(CONV)	Conversion power gain[1]	V_{DS} = +15V, V_{G1S} = V_{G2S}, I_D = 8mA, f_{rf} = 200MHz, f_{LO} = 245MHz	14	17					dB
NF	Noise figure	V_{DS} = +15V, V_{G2S} = +10V, I_D = 18mA, f = 200MHz					1.5	2.5	dB
AGC_{VG2S}	Range of automatic gain control	V_{DS} = +15V, V_{G1S} ≅ +2.5V, V_{G2S} = +10V→0V, f = 200MHz					50		dB
E_{INT}	Interfering signal level at gate 1 for 1% cross modulation distortion, peak voltage referenced to 50Ω system[3]	V_{DS} = 15V, V_{G2S} = +8V, I_D = 15mA Wanted signal f = 200MHz interfering signal f = 196MHz					480		mV

NOTES

1. Measured in mixer test fixture.
2. Measured in amplifier test fixture.
3. Measured as shown in block diagram.

SD305 TYPICAL PERFORMANCE CHARACTERISTICS

DRAIN CURRENT vs GATE NO. 1-TO-SOURCE VOLTAGE

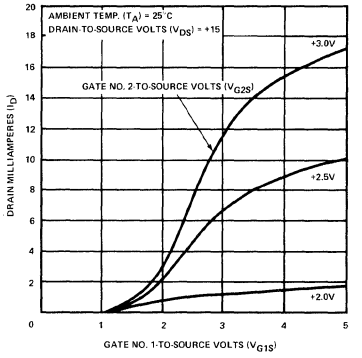

DRAIN CURRENT vs GATE NO. 2-TO-SOURCE VOLTAGE

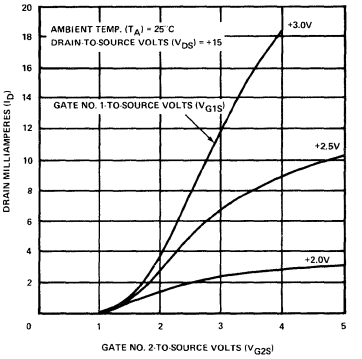

GATE NO. 1 FORWARD TRANSCONDUCTANCE vs GATE NO. 2-TO-SOURCE VOLTAGE

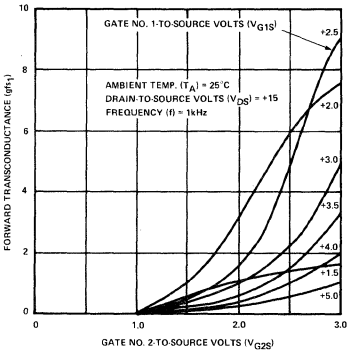

GATE NO. 2 FORWARD TRANSCONDUCTANCE vs GATE NO. 1-TO-SOURCE VOLTAGE

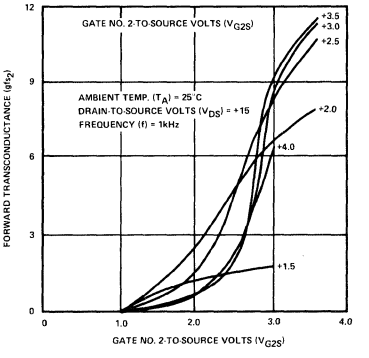

SD305 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

"S" PARAMETERS

AMBIENT TEMP. (T_A) = +25°C
DRAIN-TO-SOURCE VOLTS (V_{DS}) = +15
DRAIN MILLIAMPERES (ID) = 8
GATE NO. 1-TO-SOURCE VOLTS (V_{G1S}) =
GATE NO. 2-TO-SOURCE VOLTS (V_{G2S})

S_{11}

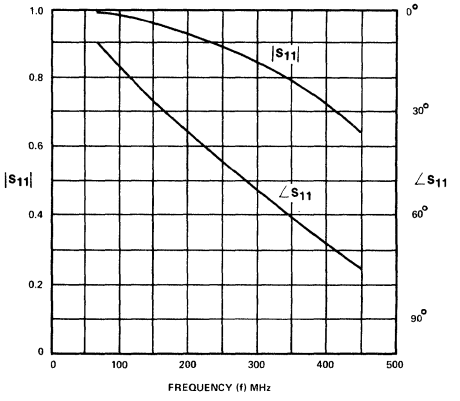

S_{12}

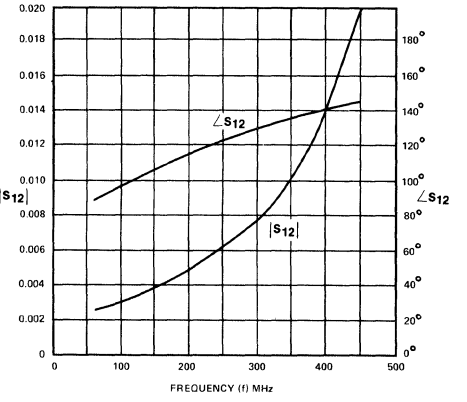

S_{21}

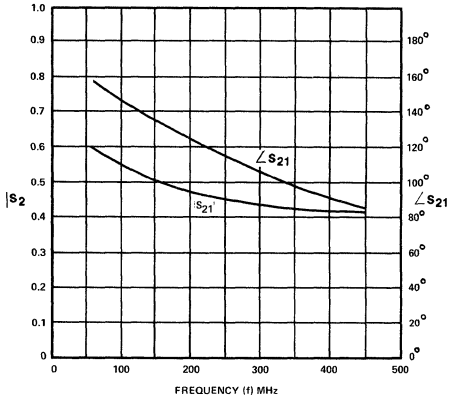

S_{22}

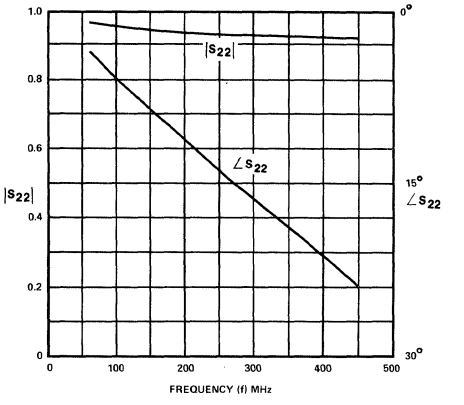

CONVERSION GAIN vs DRAIN CURRENT

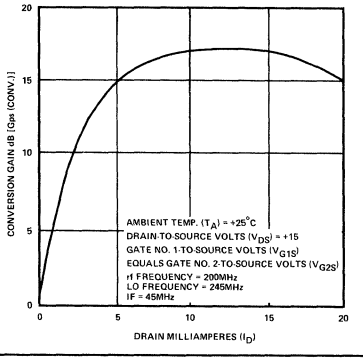

DRAIN CURRENT vs DRAIN-TO-SOURCE VOLTAGE

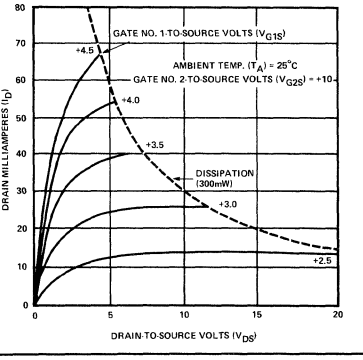

SD305 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

DRAIN CURRENT vs GATE NO. 1-TO-SOURCE VOLTAGE

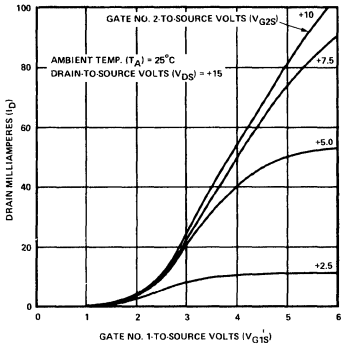

GATE NO. 1 FORWARD TRANSCONDUCTANCE vs DRAIN CURRENT

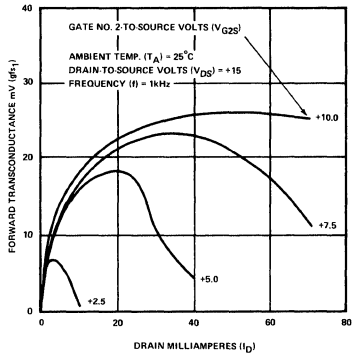

POWER GAIN vs FREQUENCY

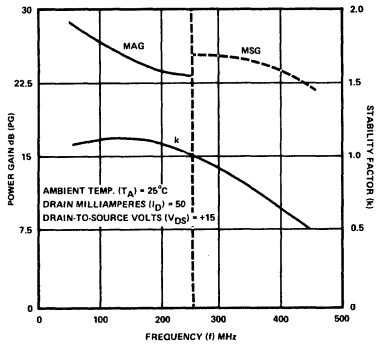

POWER GAIN vs DRAIN CURRENT

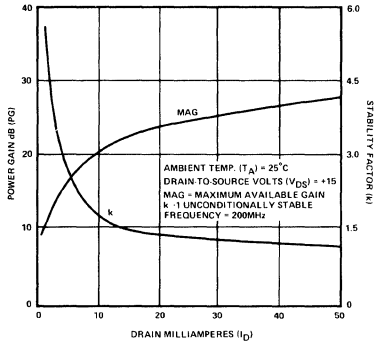

AUTOMATIC GAIN CONTROL vs S_{11} AND S_{22}

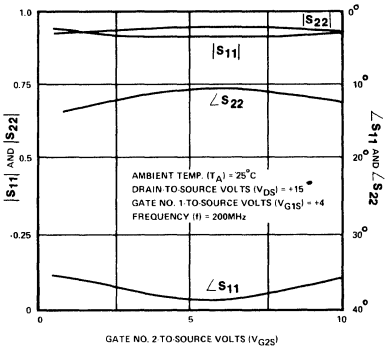

AUTOMATIC GAIN CONTROL RANGE

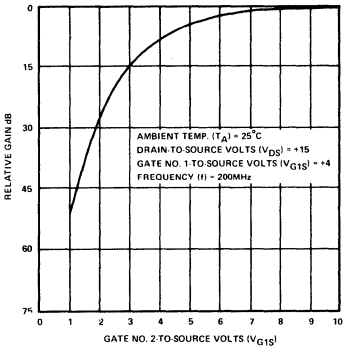

"S" PARAMETERS

AMBIENT TEMP. (T_A) = +25° C
DRAIN-TO-SOURCE VOLTS (V_{DS}) = +15

DRAIN MILLIAMPERES (I_D) = 50
GATE NO. 1-TO-SOURCE VOLTS (V_{G1S}) ≃ +3.5
GATE NO. 2-TO-SOURCE VOLTS (V_{G2S}) = +10

S_{11}

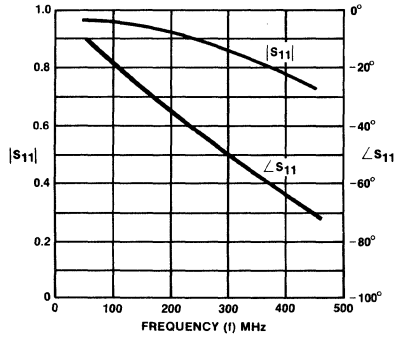

S_{12}

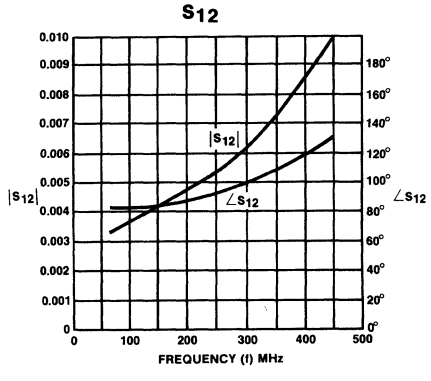

SD305 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

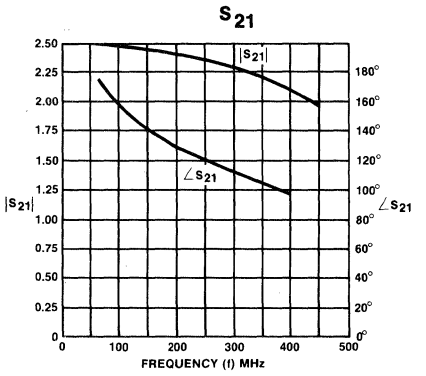

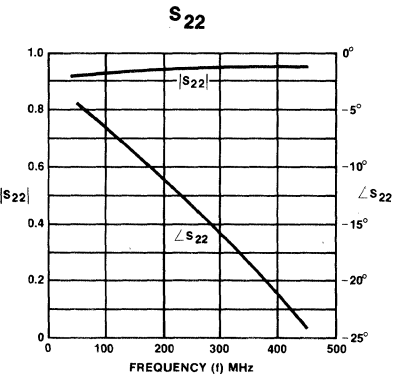

SD306 TYPICAL PERFORMANCE CHARACTERISTICS

DRAIN CURRENT vs DRAIN-TO-SOURCE VOLTAGE

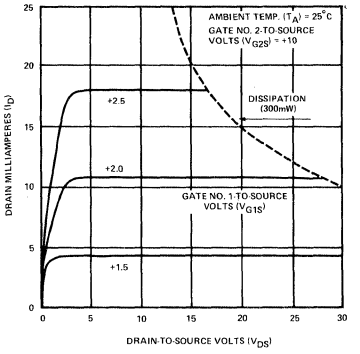

DRAIN CURRENT vs GATE NO. 1-TO-SOURCE VOLTAGE

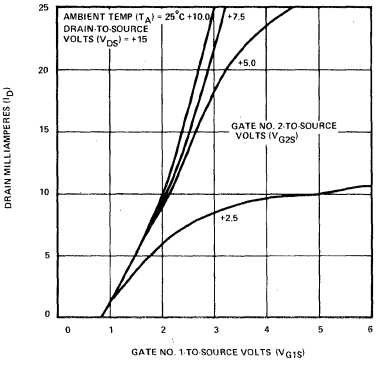

DRAIN CURRENT vs GATE NO. 2-TO-SOURCE VOLTAGE

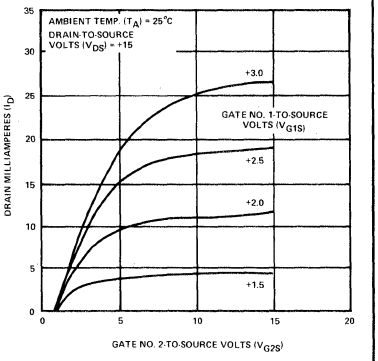

1kHz FORWARD TRANSCONDUCTANCE vs DRAIN CURRENT

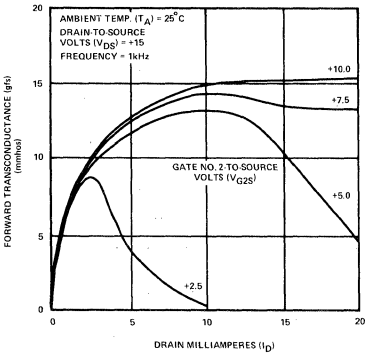

POWER GAIN vs FREQUENCY

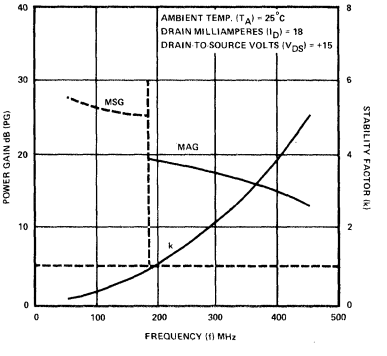

POWER GAIN vs DRAIN CURRENT

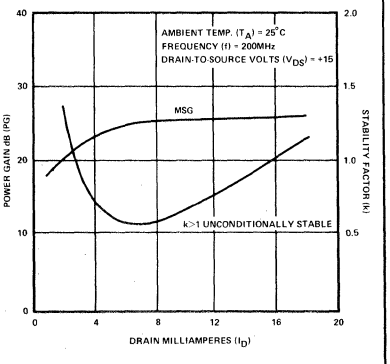

SD306 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

NOISE FIGURE AND AVAILABLE GAIN vs DRAIN CURRENT

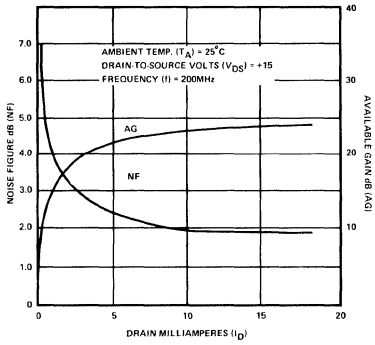

AUTOMATIC GAIN CONTROL RANGE AT 200MHz

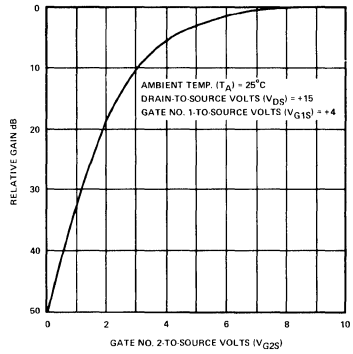

S_{11} AND S_{22} vs AUTOMATIC GAIN CONTROL

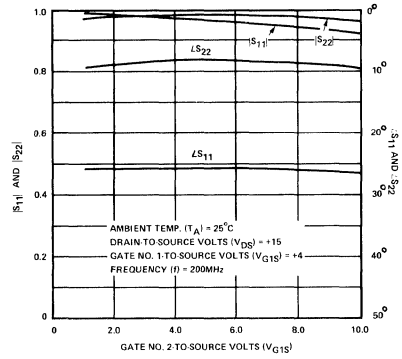

INTERFERING SIGNAL LEVEL vs GATE NO. 2-TO-SOURCE VOLTS

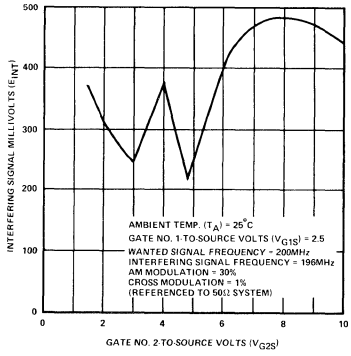

"S" PARAMETERS

AMBIENT TEMP. (T_A) = +25° C
DRAIN-TO-SOURCE VOLTS (V_{DS}) = 15
DRAIN MILLIAMPERES (I_D) = 8
GATE NO. 1-TO-SOURCE VOLTS (V_{G1S}) ≃ +2.5
GATE NO. 2-TO-SOURCE VOLTS (V_{G2S}) = +10

S_{11}

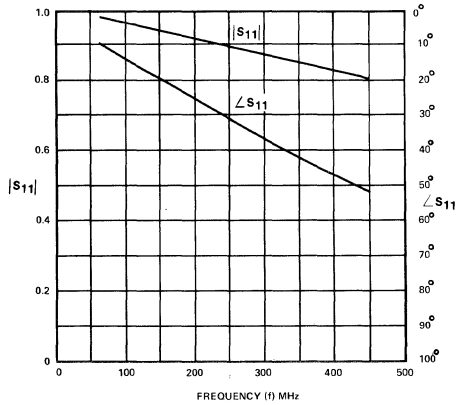

S_{12}

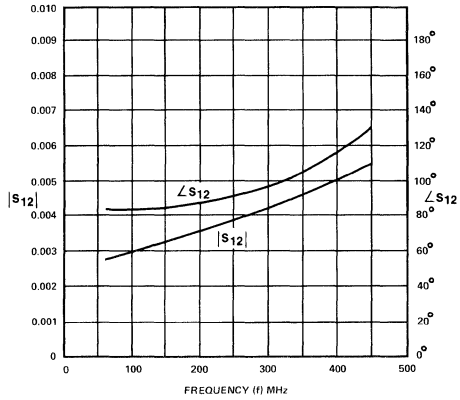

15

SD306 TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

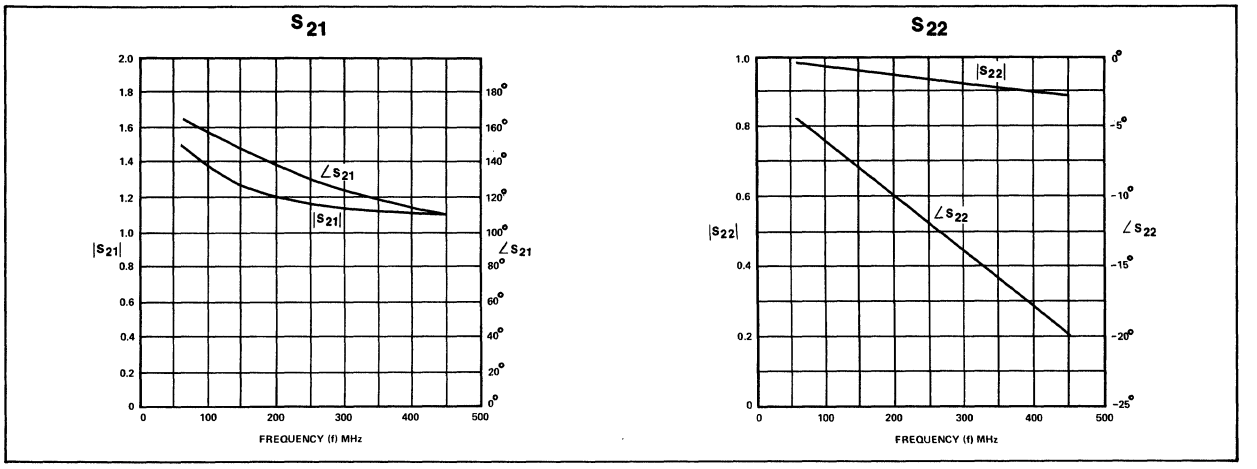

TEST CIRCUITS

SD305
200MHz/45MHz MIXER

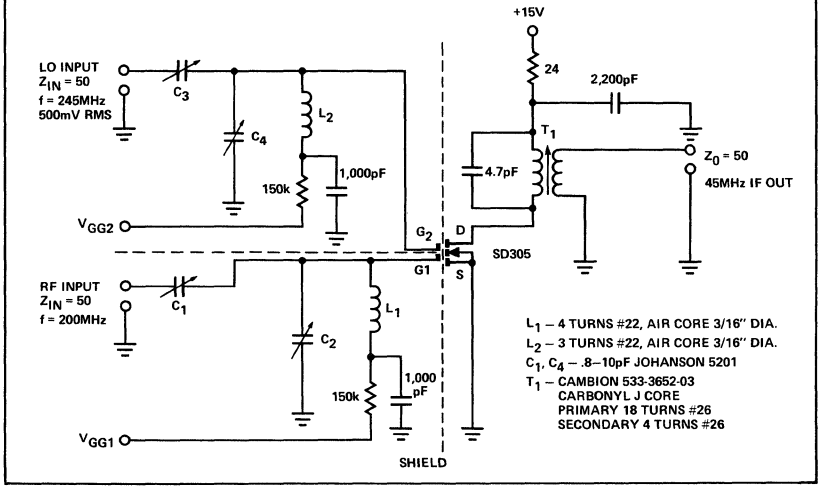

SD306
POWER GAIN, NOISE FIGURE 200MHz TEST AMPLIFIER;

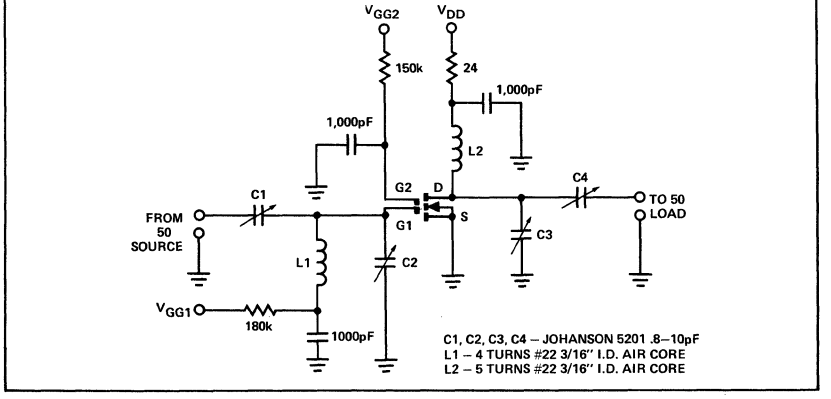

TEST CIRCUITS (Cont'd)

SD306
CROSS MODULATION

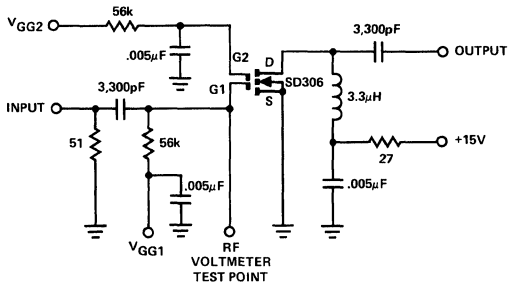

BLOCK DIAGRAM OF CROSS MODULATION TEST

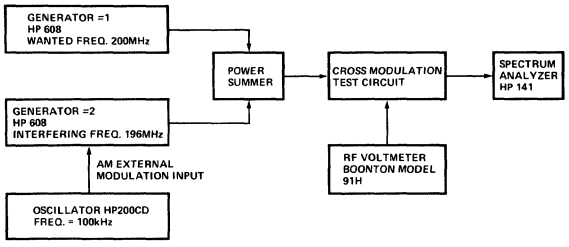

SD306
TEST PROCEDURE FOR CROSS MODULATION DISTORTION MEASUREMENTS

1. Modulation on Generator #2 is set at 100kHz, 30% AM modulation (sidebands down 15.6dB) with an output signal frequency equal to 196MHz.
2. Generator #2 is set at approximately -15dbm, 200MHz.
3. While observing the test circuit output spectrum, adjust the signal level of the interfering frequency so that the sidebands on the desired frequency are 46dB down from the carrier. This corresponds to 1% cross modulation.
4. Turn off Generator #1 and turn off the modulation on Generator #2.
5. Using the RF voltmeter, measure the amplitude of the interfering signal at the test point.

15

DESCRIPTION

The Signetics D-MOS SD5000 series are monolithic arrays of silicon, insulated-gate, field-effect transistors using the N-channel enhancement mode technology.

This family of devices is designed to handle a wide variety of analog switching and driver applications. They are capable of high speed operation where excellent transient response, and wide voltage range are required. The SD5000 quad switch array quad multiplexer can handle high voltage analog signals (±10V). The SD5002 is designed for ±7.5V analog signals using ±15V power supplies. The SD5001 is designed for lower voltage applications.

FEATURES

- **Low input capacitance: 2.4pF**
- **Low feedback capacitance: 0.3pF**
- **Low output capacitance: 1.3pF**
- **±10V analog signal range**
- **Low propagation delay time: 600ps**
- **Low on resistance: 30Ω**
- **Low feedthrough and feedback transients**
- **Ion implanted for greater reliability**
- **High channel-to-channel isolation: 107dB**
- **Transient protection for gates**
- **Military qualifications pending**

APPLICATIONS

- **SD5000 applications**
  - **Analog switching (up to very high frequencies)**
  - **Audio routing**
  - **Choppers**
  - **Crosspoint switches**
  - **Sample and hold**

PIN CONFIGURATIONS

N PACKAGE

(Top View)



ORDER PART NO.

SD5000N SD5001N SD5002N

CHIP DIAGRAM

SD5000, 5001, 5002
SWITCH ARRAYS

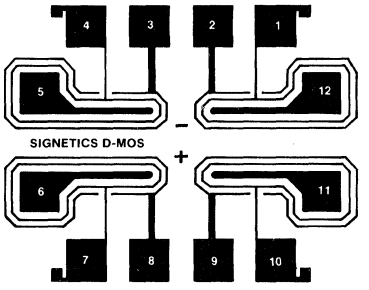

PAD NO.	PAD FUNCTION
1	Gate No. 1
2	Source No. 1
3	Source No. 2
4	Gate No. 2
5	Drain No. 2
6	Drain No. 3
7	Gate No. 3
8	Source No. 3
9	Source No. 4
10	Gate No. 4
11	Drain No. 4
12	Drain No. 1

Die Size 40X32

FUNCTIONAL AND SCHEMATIC DIAGRAM

SD5000, 5001, 5002

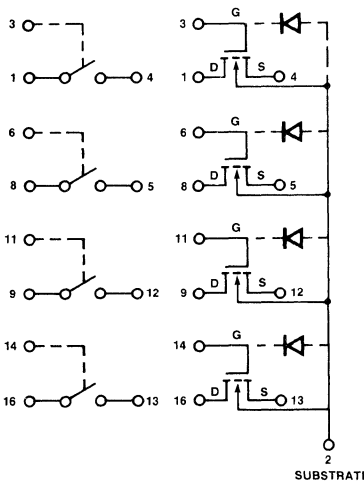

ABSOLUTE MAXIMUM RATINGS $T_A = 25°C$ unless otherwise specified.

PARAMETER		SD5000	SD5001	SD5002	UNIT
V_{DS}	Drain-to-source	+20	+10	+15	Vdc
V_{SD}	Source-to-drain[1]	+20	+10	+15	Vdc
V_{DB}	Drain-to-substrate	+25	+15	+22.5	Vdc
V_{SB}	Source-to-substrate	+25	+15	+22.5	Vdc
V_{GS}	Gate-to-source	+30 -25	+25 -15	+30 -22.5	Vdc
V_{GB}	Gate-to-substrate	+30 -0.3	+25 -0.3	+30 -0.3	Vdc
V_{GD}	Gate-to-drain	+30 -25	+25 -15	+30 -22.5	Vdc
I_D	Drain current	50	50	50	mA
Ambient temperature range					
	Storage		-55 to +150		°C
	Operating		0 to +85		°C
Power Dissipation					
	Total package dissipation[2]		640		mW
	Individual transistor dissipation		300		mW

NOTES
1. Refer to test conditions specified in Electrical Characteristics Table.
2. Derated 5mW per degree centigrade.

DC ELECTRICAL CHARACTERISTICS $T_A = +25°C$ unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD5000			SD5001			UNIT
			Min	Typ	Max	Min	Typ	Max	
BREAKDOWN VOLTAGE									
BV_{DS}	Drain-to-source	$V_{GS} = V_{BS} = -5V$, $I_S = 10nA$	20	25		10	25		V
BV_{SD}	Source-to-drain	$V_{GD} = V_{BD} = -5V$, $I_D = 10nA$	20			10			V
BV_{DB}	Drain-to-substrate	$V_{GB} = 0V$, source Open $I_D = 10nA$	25			15			V
BV_{SB}	Source-to-substrate	$V_{GB} = 0V$, drain Open $I_S = 10\mu A$	25			15			V
LEAKAGE CURRENT									
$I_{DS(OFF)}$	Drain-to-source	$V_{GS} = V_{BS} = -5V$							
		$V_{DS} = +20V$		1	10				nA
		$V_{DS} = +10V$					1	10	nA
$I_{SD(OFF)}$	Source-to-drain	$V_{GD} = V_{BD} = -5V$							
		$V_{SD} = +20V$		1	10				nA
		$V_{SD} = +10V$					1	10	nA
I_{GBS}	Gate	$V_{DB} = V_{SB} = 0V$							
		$V_{GB} = 30V$			1				μA
		$V_{GB} = 25V$						1	μA
V_T	Threshold voltage	$V_{DS} = V_{GS} = V_T$, $I_S = 1\mu A$ $V_{SB} = 0V$	0.1	1.0	2.0	0.1	1.0	2.0	V
$r_{DS(ON)}$	Drain-to-source-resistance	$I_D = 1.0mA$, $V_{SB} = 0$							
		$V_{GS} = +5V$		50	70		50	70	Ω
		$V_{GS} = +10V$		30			30		Ω
		$V_{GS} = +15V$		23			23		Ω
		$V_{GS} = +20V$		19			19		Ω

15

DC ELECTRICAL CHARACTERISTICS (Cont'd) T_A = +25°C unless otherwise specified.

PARAMETER		TEST CONDITIONS	SD5002			UNIT
			Min	Typ	Max	
BREAKDOWN VOLTAGE						
BV_{DS}	Drain-to-source	$V_{GS} = V_{BS} = -5V$, $I_S = 10nA$	15	25		V
		$V_{GS} = V_{BS} = 0V$, $I_S = 1\mu A$				V
BV_{SD}	Source-to-drain	$V_{GD} = V_{BD} = -5V$, $I_D = 10nA$	15			V
BV_{DB}	Drain-to-substrate	$V_{GB} = 0V$, source Open				
		$I_D = 10nA$	22.5			V
		$I_D = 1\mu A$				V
BV_{SB}	Source-to-substrate	$V_{GB} = 0V$, drain Open				
		$I_S = 10\mu A$	22.5			V
LEAKAGE CURRENT						
$I_{DS(OFF)}$	Drain-to-source	$V_{GS} = V_{BS} = -5V$				
		$V_{DS} = +15V$		1	10	nA
		$V_{GS} = V_{BS} = 0V$, $V_{DS} = +10V$				nA
$I_{SD(OFF)}$	Source-to-drain	$V_{GD} = V_{BD} = -5V$				
		$V_{SD} = +15V$		1	10	nA
I_{GBS}	Gate	$V_{DB} = V_{SB} = 0V$				
		$V_{GB} = 30V$			1	μA
		$V_{GB} = 25V$				μA
V_T	Threshold voltage	$V_{DS} = V_{GS} = V_T$, $I_S = 1\mu A$	0.1	1.0	2.0	V
		$V_{SB} = 0V$				
$r_{DS(ON)}$	Drain-to-source-resistance	$I_D = 1.0mA$, $V_{SB} = 0$				
		$V_{GS} = +5V$		50	70	Ω
		$V_{GS} = +10V$		30		Ω
		$V_{GS} = +15V$		23		Ω
		$V_{GS} = +20V$		19		Ω

AC ELECTRICAL CHARACTERISTICS

PARAMETER		TEST CONDITIONS	SD5000			SD5001			UNIT
			Min	Typ	Max	Min	Typ	Max	
gfs	Forward transconductance	$V_{DS} = 10V$, $V_{SB} = 0V$ $I_D = 20mA$, f = 1kHz	10	15		10	15		mmhos
	Small signal capacitances	$V_{DS} = 10V$, f = 1MHz $V_{GS} = V_{BS} = -15V$							
$C_{(GS+GD+GB)}$	Gate node	See capacitance model		2.4	3.5		2.4	3.5	pF
$C_{(GD+DB)}$	Drain node	in Figure 1		1.3	1.5		1.3	1.5	pF
$C_{(GS+SB)}$	Source node			3.5	4.0		3.5	4.0	pF
C_{DG}	Reverse transfer			0.3	0.5		0.3	0.5	pF
C_T	Cross talk	See test circuits no. 1 and 2, f = 3kHz		-107			-107		dB

AC ELECTRICAL CHARACTERISTICS (Cont'd)

PARAMETER		TEST CONDITIONS	SD5002			UNIT
			Min	Typ	Max	
gfs	Forward transconductance	V_{DS} = 10V, V_{SB} = 0V I_D = 20mA, f = 1kHz	10	15		mmhos
	Small signal capacitances	V_{DS} = 10V, f = 1MHz V_{GS} = V_{BS} = -15V				
$C_{(GS+GD+GB)}$	Gate node	See capacitance model in Figure 1		2.4	3.5	pF
$C_{(GD+DB)}$	Drain node			1.3	1.5	pF
$C_{(GS+SB)}$	Source node			3.5	4.0	pF
C_{DG}	Reverse transfer			0.3	0.5	pF
C_T	Cross talk	See test circuits no. 1 and 2, f = 3kHz		-107		dB

THEORY OF OPERATION

The SD5000 series consists of four SPST switches with analog signal capability of up to ±10 volts for the SD5000 and ±7.5 volts for the SD5002. Each switch of the array is a D-MOS N-channel field-effect transistor of the enhancement-mode type; that is, the device is normally off when gate-to-source voltage (V_{GS}) is zero volts. When V_{GS} exceeds the threshold voltage, V_T, the FET switch starts to turn ON with V_{GS} in excess of +10 volts, a low resistance path (typically 30Ω) exists between input and output of the switch. Figure 1 shows the normal mode of operation of a single switch of the array for ±5 volt analog signal processing. Note that the source is recommended for the input since feedback or reverse transfer capacitance is lower when drain is used as the output. When analog signals are routed from one point to another the important factors are **isolation, crosstalk between switches, feedthrough and feedback transients, insertion loss and speed of operation.** The SD5000 series offers superior performance in all these areas (Figure 1).

Isolation. ON resistance is typically 30Ω and OFF resistance is typically 10^{10}Ω, which results in an OFF to ON resistance ratio in excess of 10^9. Isolation from output to input from 3kHz analog signals is typically -107dB.

Feedback and feedthrough transients. These are kept to a minimum because of the very low feedback and feedthrough capacitances. This means that "glitchless" or "clean" signals appear at the output.

Insertion loss. This depends upon the source and load impedances involved. As an example, for 600Ω source impedance the insertion loss for voice signals (1V RMS at 3kHz) is less than 0.3dB. This indicates that the SD5000 series would make good telephone cross-point switches.

Speed. Because of the low ON resistance and low input capacitance, the SD5000 switches turn ON at sub-nanosecond speeds. They are also capable of handling very high frequency analog signals and still maintain excellent isolation (20-30dB at 1GHz).

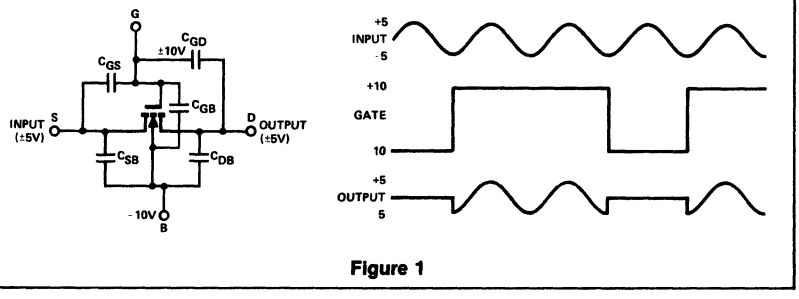

Figure 1

TYPICAL PERFORMANCE CHARACTERISTICS

MAXIMUM POWER DISSIPATION vs TEMPERATURE

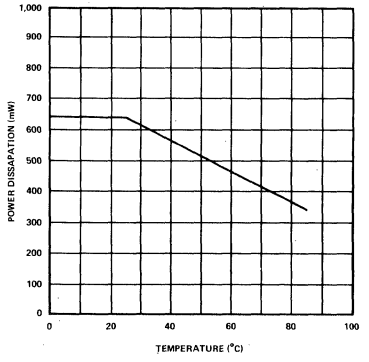

DRAIN-TO-SOURCE RESISTANCE vs SOURCE-TO-SUBSTRATE AND GATE-TO-SOURCE VOLTAGE

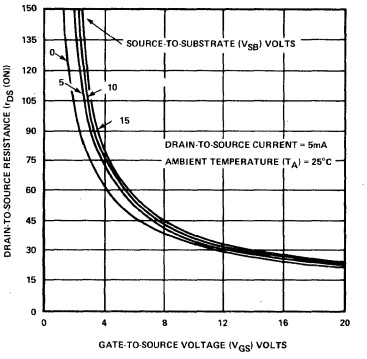

DRAIN-TO-SOURCE RESISTANCE vs TEMPERATURE

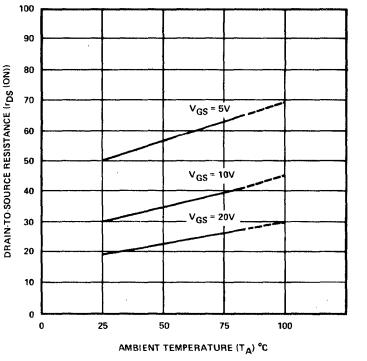

SOURCE-TO-DRAIN LEAKAGE CURRENT vs TEMPERATURE

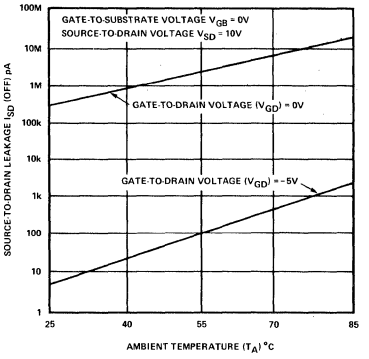

DRAIN-TO-SOURCE LEAKAGE CURRENT vs TEMPERATURE

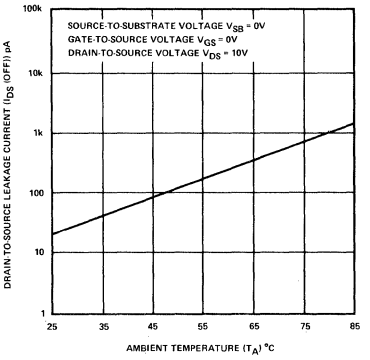

SOURCE-TO-SUBSTRATE LEAKAGE CURRENT vs TEMPERATURE

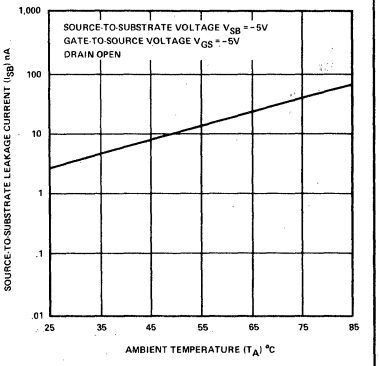

CROSSTALK vs FREQUENCY

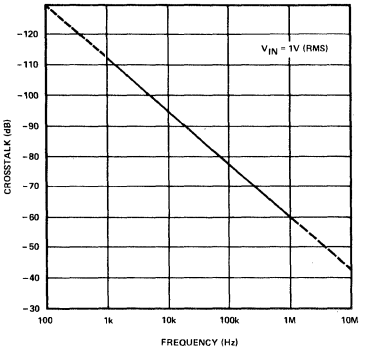

GATE LEAKAGE CURRENT vs TEMPERATURE

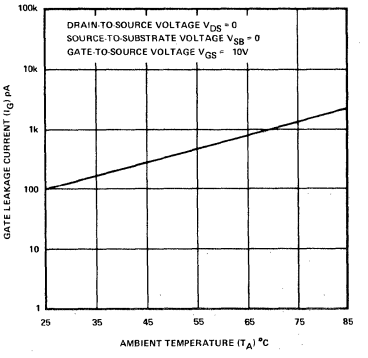

TEST CIRCUIT

CROSSTALK MEASUREMENT

Quad Switch
SD5000/SD5001/SD5002

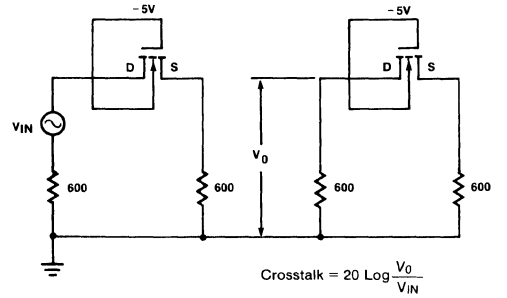

$$\text{Crosstalk} = 20 \text{ Log} \frac{V_0}{V_{IN}}$$

Where V_{IN} = 1V RMS at 3kHz

SWITCHING TEST CIRCUIT

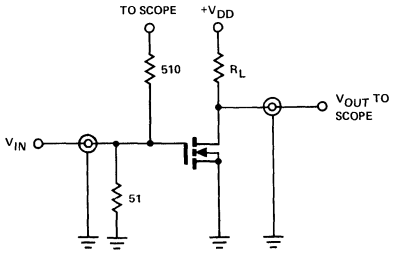

Input Pulse	Sampling Scope
t_r, t_F < 1ns	t_r < 350ps
Pulse Width = 100ns	R_{IN} = 1MΩ
Rep Rate = 1MHz	C_{IN} = 2.0pF

SWITCHING WAVEFORMS

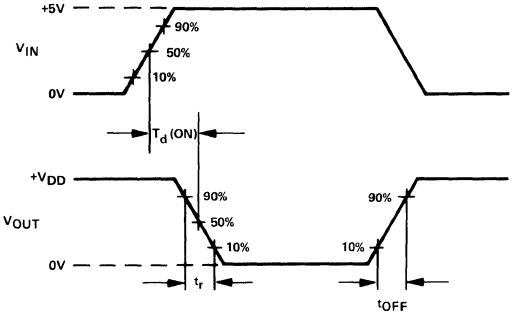

SWITCHING CHARACTERISTICS

		t_d (ON) (ns)		t_r (ns)		t_{OFF} (ns)*	
V_{DD}	R_L	TYP	MAX	TYP	MAX	TYP	MAX
5	680	0.6	1.0	0.7	1.0	9.0	
10	680	0.7		0.8		9.0	
15	1k	0.9		1.0		14.0	

*t_{OFF} is dependent on R_L and C_L and does not depend on the device characteristics.

15

SECTION 16
INDUSTRIAL CONTROLLERS

NE5522 Universal Analog Controller 493

NE5522-N

DESCRIPTION

The Signetics NE5522 may be used in a wide range of industrial applications where closed loop control of machine speed and acceleration is required. Uses such as conveyer systems, web infeed for plastic film or paper sheet, wire reel take-up and many other process motion control areas, which involve the predetermined ramp up and final speed setting under closed-loop control, can be handled by the Universal Controller.

Inputs to the device are descrete voltage level commands which tell the controller what function is desired such as "Set Memory", 'Memory Erase', 'Positive Ramp', 'Compare to Memory', etc. The closed loop control function is accomplished by an A-C tachometer frequency representative of the speed of the system being fed into the NE5522 where it is compared with an internal reference voltage after being processed by the F/V converter. An error signal is then generated which governs the corrective response of the output. The output function consists of three buffered open collector transistor ports which provide gating and on-off commands to peripheral circuitry. An analog error output is also available for interface with linear control systems.

Basically the NE5522 consists of a frequency to voltage converter, an internal reference oscillator, D to A converter, an I^2L logic encoder-decoder and 256 bit F/V D.C. level data storage.

The nominal supply voltage is +8.2V with a range of 7.4 to 9 volts allowed. Current drain is nominally 20mA for an 8.2V supply.

A typical operation sequence might be to bring a motor up to speed using the program accel mode. This would be accomplished by setting pin 3 (Command Input) to $\simeq .55V_{CC}$. A ramp function determined by R20-C11 (pins 14, 15) then automatically programs the error system to drive up at a fixed rate. Once the desired speed is reached a voltage of $.75V_{CC}$ is momentarily impressed on the command input and the motor speed will then be controlled to stay at that level previously programmed in memory. Note that a voltage level of $1.1V_{CC}$ must be applied momentarily to the command input (pin 3) upon initial turn-on in order to enable the device.

FEATURES

- Adjustable system gain
- Adjustable frequency sensitivity
- Adjustable ramp rate
- Voltage programmable command modes
  1. On
  2. Positive ramp and hold
  3. Compare to set memory
  4. Memory erase
  5. Set memory
  6. Off

APPLICATIONS

- Conveyer Controller
- Web infeed controller
- AC or dc motor speed control
- Actuator control loop
- Engine speed control
- Process control
- Magnetics tape transport control
- Mag/floppy disc controller

PIN CONFIGURATION

N PACKAGE

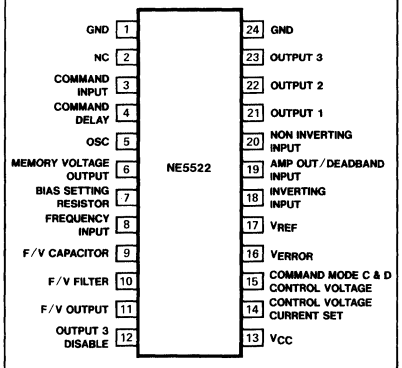

ORDER PART NO.
NE5522N

TRUTH TABLE

PIN 3 COMMAND INPUT VOLTAGE	MODE	FUNCTION
Greater than 1.1 V_{CC}	ON	ON
.900 V_{CC} to V_{CC}	A	Set memory after command C or D.
.725 V_{CC} to .8 V_{CC}	B	Compare to set memory.
.482 V_{CC} to .599 V_{CC}	C	Positive ramp.
.148 V_{CC} to .272 V_{CC}	D	Memory erase.
Less than .094 V_{CC}	OFF	OFF

TRUTH TABLE

COMMAND MODE INPUT SEQUENCE	OUTPUT 1	OUTPUT 2	OUTPUT 3	V_6 (MEMORY)
OFF	L	L	H	<1V
ON/C	H	H	L	<1V
ON/C/A ($V_S \ll V_M$)	H	H	L	$V_{F/V}$
ON/C/A ($V_S \gg V_M$)	L	L	L	$V_{F/V}$
ON/C/A/D	L	L	H	<1V
ON/C/A/D/A ($V_S \ll V_M$)	H	H	L	$V_{F/V}$
($V_S \gg V_M$)	L	L	L	$V_{F/V}$
ON/D/A/disable	L	L	H	$V_{F/V}$
ON/C/A/DIS/B ($V_S \ll V_M$)	H	H	L	$V_{F/V}$
($V_S \gg V_M$)	L	L	L	$V_{F/V}$

NOTES
V_S = F/V Output
V_M = Memory Voltage
Disable = Pin 12, Output 3
Command Delay Equations: t_d (All except command B) = 45K (C_4), $t_{d(B)}$ = 305K (C_4), $C_4 > .05\mu$

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNIT
Operating temperature	0 to +70	°C
Storage temperature	−65 to +150	°C
Supply voltage	9	V

16

BLOCK DIAGRAM

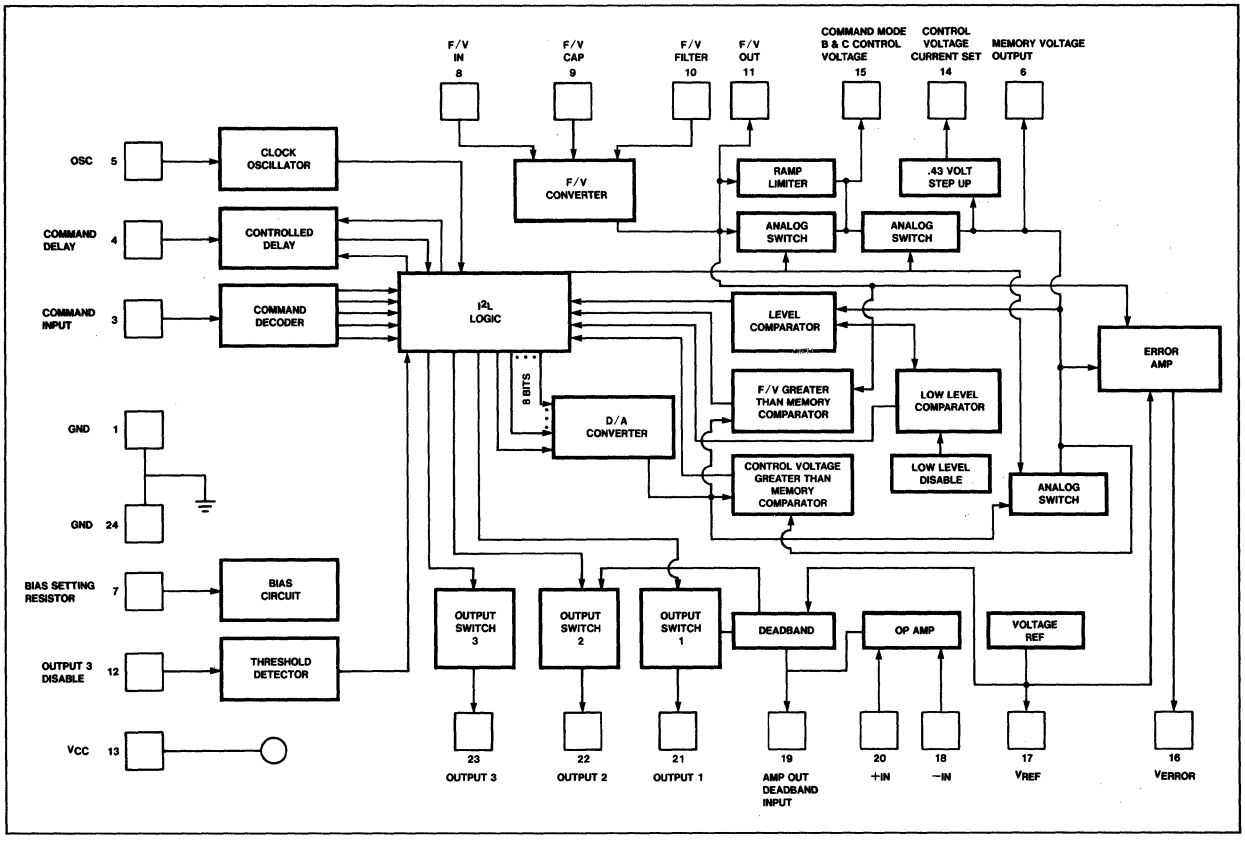

FUNCTIONAL DESCRIPTION

(1) Input Power (V_{CC})—A regulated power source of 8.2 volts ± 10% must be applied between pin 13 and ground. Pins 1 and 24 are the IC ground pins. Pin 2 should be connected to ground also. Standby current drain is typically 20mA. A resistor of 43kΩ ± 5% must be connected between pin 7 and ground to establish the internal current sources.

(2) Frequency-to-Voltage Converter—The F/V input signal for this device is applied to pin 8. It may be in the form of any periodic wave with approximately 50% duty cycle at the zero crossings. Peak amplitudes greater than ±2 volts should be current limited by a resistor in series with pin 8. Maximum currents should not exceed 1mA. This input is internally amplified and limited at the zero crossings (refer to typical test circuit).

A capacitor, C_6, must be applied from pin 9 to ground. A capacitor, C_7, and resistor, R_{18}, must be applied in parallel between pin 10 and ground. A voltage will then appear on pin 11 with a d-c level, V_S, proportional to the input frequency, and a sawtooth ripple frequency equal to twice the input frequency, f_S. V_S and the peak-to-peak ripple amplitude, V_r, are given approximately by the following equations:

$$V_S = (4 \text{ volts})\,(R_{18})\,(C_6)\,(f_S)$$

$$V_r = (2 \text{ volts})\left(\frac{C_6}{C_7}\right) 1 - \left[(80k\Omega)\,C_6\,f_S\right]$$

The maximum linear value of V_S is typically (V_{CC} − 1.0 volt). The maximum input frequency for linear output is given by:

$$f_{S\,max} = \frac{1}{(80k\Omega)C_6},$$

assuming symmetrical zero crossings in the input wave. A resistor of no less than 10kΩ from pin 11 to ground is allowable to maintain bias on the NPN emitter follower output stage.

The pin 11 voltage is applied internally to the positive input of the servo error amp.

(3) Input Command Signal (V_C)—The analog voltage applied to pin 3, V_C, determines the operating mode. This input signal should be current limited and well filtered to avoid noise pulses triggering spurious operating conditions.

a) Turn-on:—When power is first applied the part normally comes up in the Off state. If V_C is raised above V_{CC} so that the input current exceeds 100μa (in the current limited mode), the internal logic circuitry will go into the standby mode and be ready to receive other input commands.

b) Standby—To maintain the part in the standby or control mode, V_C should be maintained in the voltage range for mode A as indicated in the table.

c) Positive Ramp, Set—The voltage that appears on pin 6, V_m, is the internally generated servo drive voltage. This voltage is internally connected to the negative input of the servo error amp.

When V_C is in mode C as indicated in the table, the voltage V_m will increase at a rate given by (0.43 volts)/R_8C_1, where R_8 is the resistor between pins 14 and 15, and C_1 is the capacitor between pin 15 and ground. The capacitor must have a leakage at 8 volts of much less than 0.43v/R_8 under all

conditions to minimize the variability of this rate. Rates as low as 50mv/sec are practical.

When V_C is restored from mode C to mode A, the value of the pin 11 voltage, V_S, is stored in the internal memory, and this voltage then appears on pin 6 as the servo drive voltage, V_m.

The mechanism by which the value of V_S is stored is as follows. A digital counter whose output is applied to a DAC is turned on. When the DAC output reaches the level of V_S, the counter is stopped, and the DAC output appears on pin 6. The frequency that the counter counts is generated by an internal oscillator connected to a capacitor on pin 5. The oscillator frequency is inversely proportional to capacitor size, and .001μf produces about 75 kHz. This frequency determines the time that it takes for the DAC output to reach the V_S level and set. Since the maximum count is 256, a frequency of 75kHz (period = 13.3μs) provides a maximum set time of 3.4ms. Frequencies higher than 100kHz are not recommended.

d) Disable, Return to Memory—For normal servo and logic operation the voltage on the Disable input, pin 12, must be less than $V_{CC}/2$. If this voltage is raised above $V_{CC}/2$, the device reverts to the standby mode, except that the internal memory voltage, V_m, remains set at its current level. If the input command voltage, V_C, is then reduced momentarily to mode B, as given in the table, the servo drive voltage, V_m, on pin 6 will start at the current value of V_S and increase at the positive ramp rate described earlier until it reaches the level stored in memory. It will then remain at this value. A Disable-Return sequence when V_S is greater than the memory level will restore V_m to the memory level.

e) Memory Erase, Set—If the value of V_C is reduced to mode D given in the table, the part will revert to the standby mode and memory is erased. If V_C then returns to mode A, the memory and the servo drive voltage, V_m, will be set at the current value of V_S in the same manner as described earlier for the Positive Ramp, Set function.

f) Off—If the value of V_C is reduced to the Off level as given in the table, the device reverts to the inactive state until turned on again as described earlier.

g) Low Level Lockout—The device will revert to the standby condition whenever the value of the F/V output voltage, V_S, drops below the LLLO voltage, which is approximately 1.5 volts. However, the internal memory voltage is maintained. A Disable-Return sequence after V_S again rises above the LLLO voltage, will return the voltage V_m to the memory level in the manner described earlier.

h) Command-Delay—When the command voltage, V_C, changes from the standby level as described above, the logic will not see the change for a period of time given in all but one case by the following equation:

$$t_d = \frac{V_{CC}\, C_3}{(182\mu a)},$$

where C_3 is a capacitor that must be inserted between pin 4 and ground. C_3 = .68μf produces a delay of t_d = 30ms with nominal V_{CC}. The exception to this formula is the delay for the Return to Memory function. This delay is given by:

$$t_{dr} = \frac{V_{CC}\, C_3}{27\ \mu a},$$

so that a typical delay with C_3 = .68μf is 200ms. These delays are designed to eliminate switch bounce problems, as well as other noise that might appear on the input command signal. In a relatively noise free environment, C_3 may be small, reducing the delay times.

(4) Error Amplifier—This amplifier has a gain of aproximately unity. The differential inputs are connected as described above, so that the output, which appears on pin 16, is approximately $V_S - V_m$. The current drawn from pin 16 should be less than ±50μa. The maximum linear voltage swing is about ±0.5 volts. The output is referenced to a level roughly equal $V_{CC}/2$, which is typically equal to the reference level on pin 17. Output currents from pin 17 should also be limited to ±50μa maximum.

(5) Operational Amplifier—The non-inverting input of this amplifier is pin 20, the inverting input is pin 18, and the output is pin 19. The output is internally connected to the input of the deadband circuit. The output impedance at pin 19 is high, typically 600K, so that for loads on pin 19 of 100K or less, this becomes a transconductance amplifier. The amplifier input impedance is greater than one megohm, and the input bias current is typically less than 1μa. Low frequency open circuit output gain is typically 150, with a bandwidth of about 10kHz.

(6) Deadband Circuit—The input of this circuit comes from the Op Amp output, as described above. It is a differential amplifier with the second input internally connected to a voltage approximately equal to $V_{CC}/2$. The input on pin 19 can be forced to any desired level between zero and V_{CC} by external circuitry, if desired, without damaging the part. The maximum drive current required to do this is typcially ±100μa.

The circuit deadband is typically ±0.6 volts relative to $V_{CC}/2$. The circuit outputs appear on pins 21 and 22. These outputs are activated by the logic circuitry when it is in one of the control modes. If the pin 19 voltage is above the upper deadband level in the active mode, both outputs will be high. If the pin 19 voltage is between the two deadband levels, pin 21 will be high, and pin 22 low. If the pin 19 voltage is below the lower deadband voltage, both outputs will be low.

When deactivated by the logic, both outputs are low. The signal output on pin 23 indicates the logic state and is low when the pin 21 and 22 outputs are active. The pin 21, 22, and 23 outputs are essentially open collector outputs for voltages below 5 volts, with a current sinking capability typically better than 20ma.

(7) Motor Speed Control—In a typical speed control application an a-c tach signal is fed to the F/V input, pin 8, producing a d-c tach signal on pin 11 (V_S). This is compared to the servo drive voltage, V_m, on pin 6 in the error amplifier. The servo loop gain is established using the op amp with the negative input, pin 18, connected thru a suitable resistor (typically greater than 10kΩ) to the error amp output, pin 16. A feedback resistor between pins 19 and 18 sets the op amp gain. An acceleration feedback signal from the servo is also applied thru a suitable impedance to the negative input, pin 18. The sawtooth ripple from the F/V is amplified by the op amp sufficiently so that it sweeps thru one or both of the deadband circuit thresholds, producing pulse width modulated outputs on pin 21 and 22, the pulse widths increasing as the d-c level at pin 19 increases. The frequency of the pulse width modulation is, of course, the frequency of the ripple, which is twice the input tach frequency.

The pin 21 and 22 outputs are typically applied to some type of "bang-bang" type servo control in such a way that acceleration occurs when both outputs are high and deceleration occurs when both outputs are low.

DC MOTOR SPEED CONTROL APPLICATION

This circuit was developed to independently control the speed of two or more model trains running on the same pair of tracks. Each train is equipped with a receiver tuned to a different carrier frequency. The carrier frequency is modulated at the transmitter by a variable audio frequency which carries the speed and direction information. The train which is tuned to the carrier frequency being

TYPICAL TEST CIRCUIT

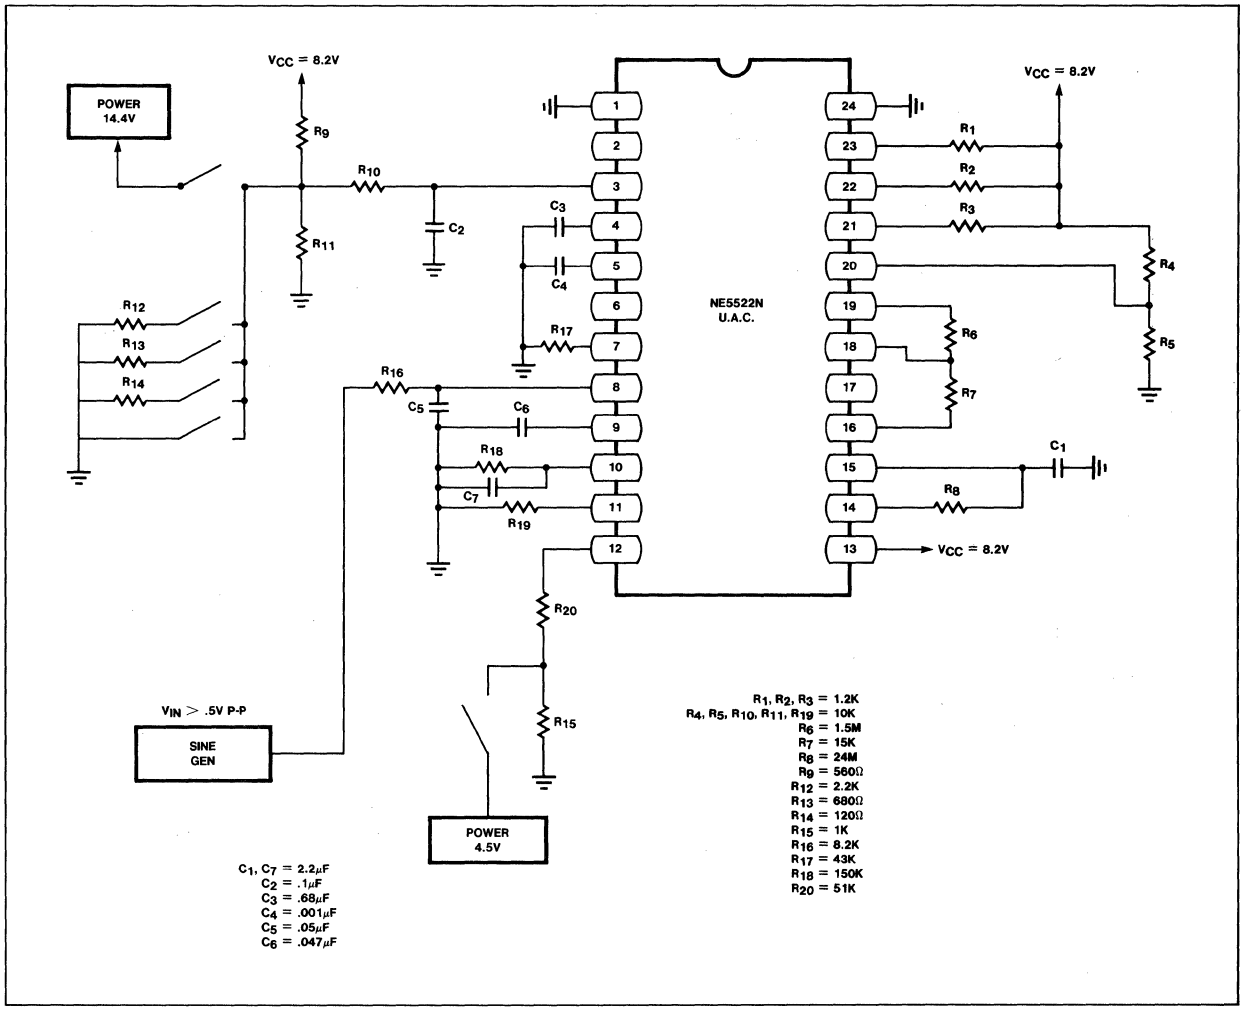

TYPICAL PERFORMANCE CHARACTERISTICS

TYPICAL TRANSISTOR CHARACTERISTICS PINS 21, 22, 23

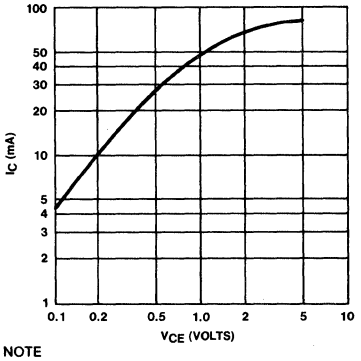

NOTE
Observe max. dissipation

CLOCK OSCILLATOR FREQUENCY VS PIN 5 CAPACITOR

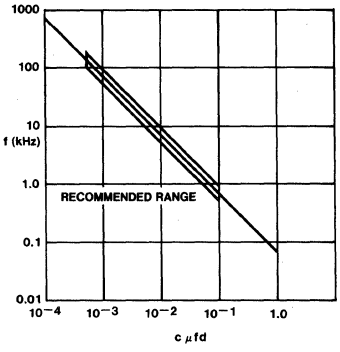

transmitted will receive this signal and provide an enable command to the receiver circuit. The modulating audio frequency signal is demodulated and decoded. Train speed (motor voltage) adjusts to the decoded information. When the carrier frequency is removed the receiver stores the last decoded signal and the train (motor) maintains the set speed until it is again addressed using its carrier frequency and the speed can be adjusted.

THEORY OF OPERATION

(A) Transmitter—The transmitter's carrier frequency was selected to be in the 100 to 500kHz range and the modulating frequency in the 1 to 4kHz range. A simple oscillator/modulator was built using an NE556N dual timer.

The two required frequencies are generated by connecting each timer in the astable

mode. These circuits generated square waves whose frequency is adjusted by changing the variable resistors (figure 2) R_A and R_B respectively. The oscillation frequency is approximately equal to 0.72 divided by the RC product of the charging and discharging path. For the low frequency oscillator: fm = .72/(5K + R_A)(.02μ) and for the high frequency oscillator: fc = .72/(3K + R_B)(500p). This gives a carrier frequency which can be adjusted between 110 and 480kHz. Each carrier frequency is adjusted to its receiver frequency which is set by a fixed resistor. This was done to eliminate any adjustments at the receiver. The low frequency is variable between 1 and 3kHz. Modulation of the high frequency by the low is accomplished by connecting the low frequency output to the control voltage input of the high frequency oscillator thru a resistor whose value sets the amount of modulation.

The modulated signal is connected to the train track thru an isolation transformer. A variable resistor Rc is connected in series with the output to adjust the output signal.

(B) Receiver—The receiver is broken down into 5 sections for easier analysis (see figure 1);
(1) Receiver/Demodulator
(2) Frequency Converter/Memory
(3) Decoder
(4) Motor Driver
(5) Power Circuits

(1) Receiver/Demodulator (R/D)—An NE567N Phase Locked Loop is used to perform this function. The lock frequency is set by the resistor R whose value is 1.1 X 10^9 divided by the desired carrier frequency. Two signals from the R/D circuit are used to drive the next circuit block; a logic low level on pin 8 when the tuned carrier frequency is detected and the demodulated low frequency appearing on pin 1.

(2) Frequency Converter/Memory—An NE5522N Universal Analog Controller (UAC) is used for this function. The low frequency signal from the R/D circuit is amplified and applied to the f to V converter of the UAC. A d.c. voltage proportional to the input frequency is generated. The conversion factor is set by the capacitor on pin 9 and the resistor on pin 10; its value is: $V_{dc}/f = 4 R_{10}C_9$. Thus for the circuit values shown, V_{dc}/f = 1.72mV/Hz; at 1kHz, 1.72V, at 2kHz 3.44V and 3kHz 5.16V.

When the enable signal is removed (carrier frequency turned off) the converted D.C. voltage is stored and is continuously available on pin 6 of the UAC.

(3) Decoder—An NE324N quad op amp is used to decode the d.c. level from the UAC. One amplifier is connected to give an output which is proportional to the d.c. level. Its output goes to zero at about 3.65V. Another amplifier is connected so that its output is inversely proportional to the d.c. level below 3.25 volts. A deadband is set so that both amplifier outputs are at zero between 3.25 and 3.65V. A transfer characteristic of these two amplifiers is shown in figure 3.

The remaining two amplifiers are used as comparators, each going high when the amplifier driving it goes positive. Thus when the UAC pin 6 voltage is greater than 3.65V, amplifier (4) and comparator (2) have positive output voltages and when this voltage is less than 3.25V amplifier (3) and comparator (1) have positive output voltages.

(4) Motor Driver—The motor driver consists of four NPN transistors connected in an H bridge configuration. The bases of the upper transistors are driven by the decoder amplifier output voltages which are proportional to the UAC voltage as previously described. The bases of the lower transistors are driven by the decoder comparators and are either on or off depending on the UAC voltage above the deadband, inversely proportional to the UAC voltage below the deadband, and zero in the deadband. A system transfer function is shown in figure 4.

(5) Power Circuits—The power supply for the IC's and the transistor drivers is supplied from a bridge rectifier. The transistor bridge and motor are supplied with rectified unfiltered 60Hz. A filtered, regulated 8 volt d.c. supply is used for the IC's.

CARRIER CURRENT
MULTICHANNEL PROGRAMABLE
D.C. MOTOR SPEED AND DIRECTION CONTROL

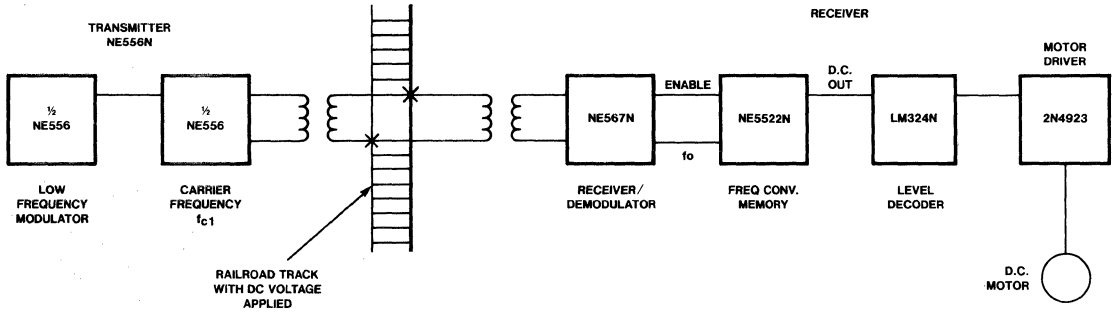

Figure 1

APPLICATION—REMOTE DC MOTOR SPEED CONTROL—MODEL TRAIN

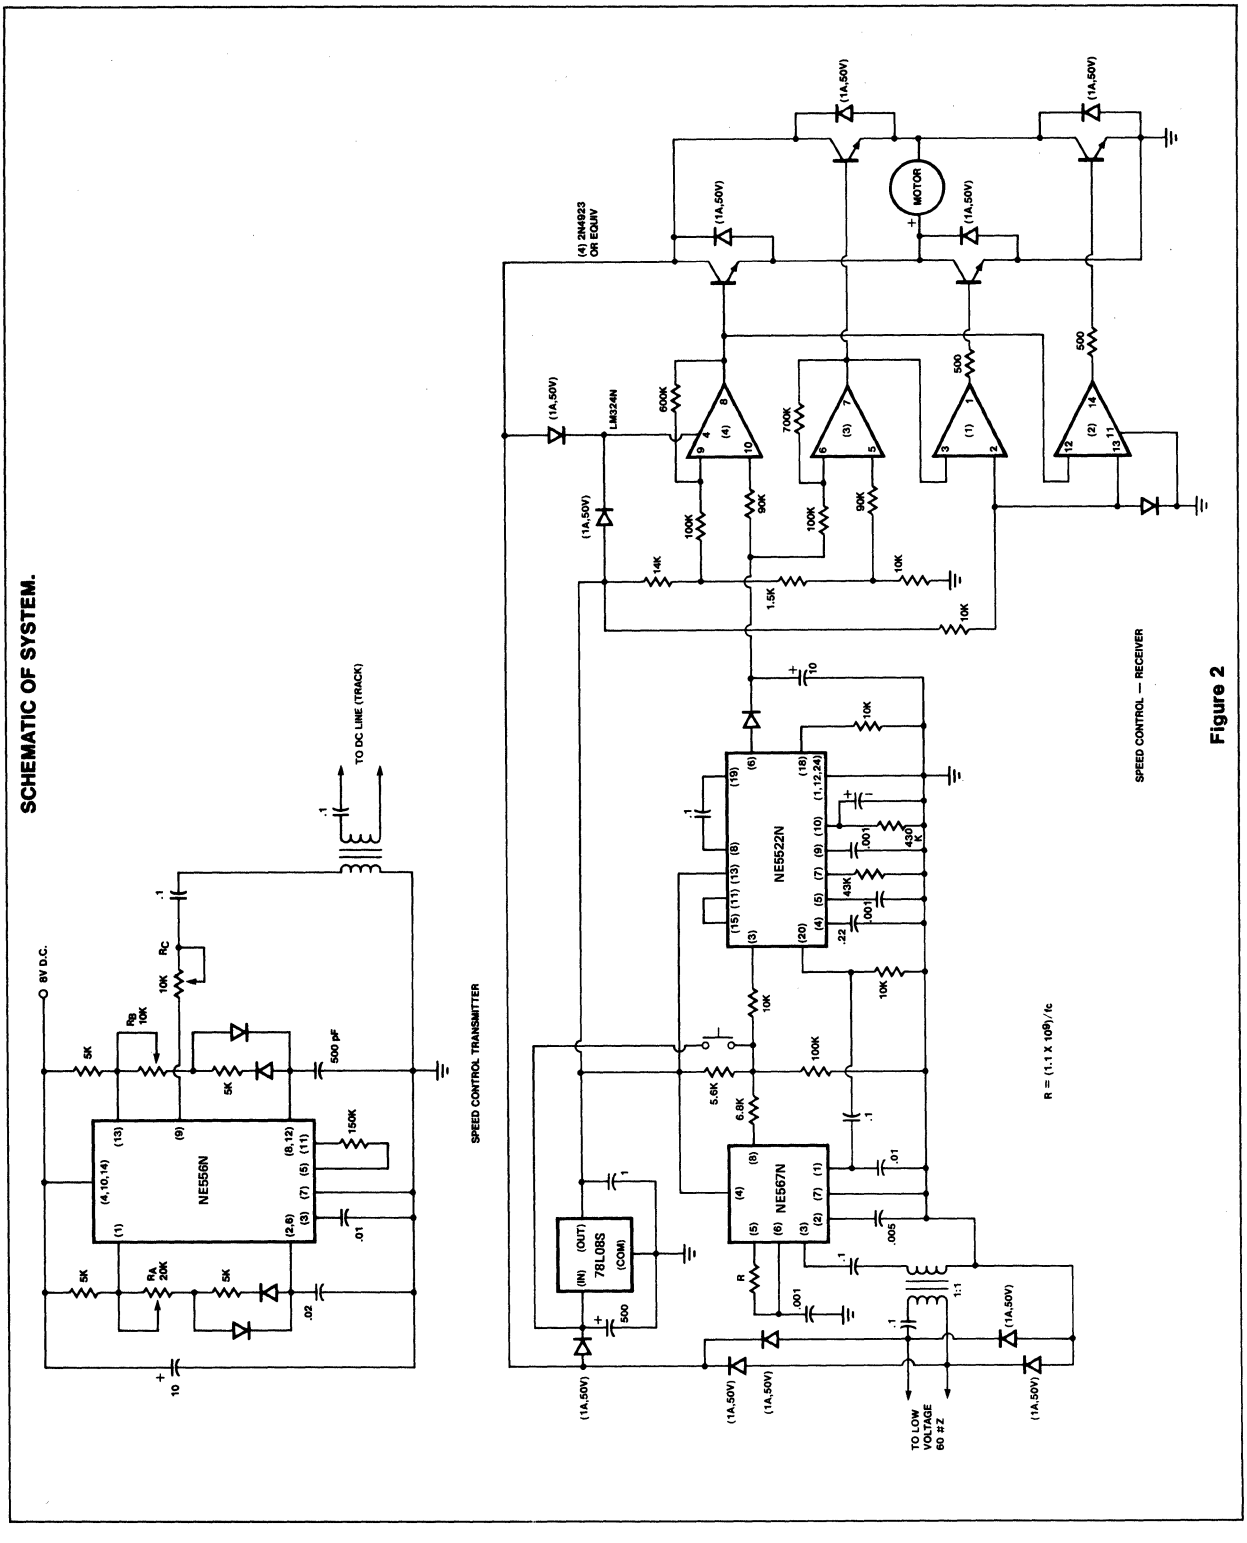

Figure 2

DECODER AMPLIFIER CHARACTERISTIC

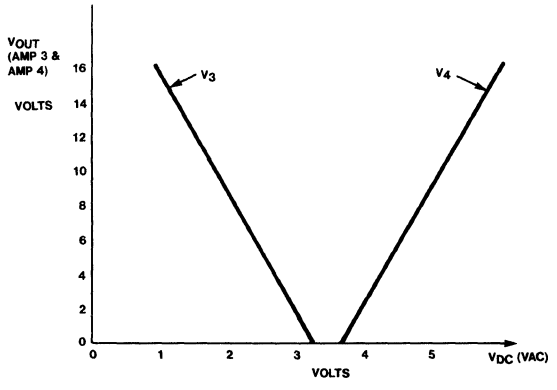

Figure 3

SYSTEM TRANSFER FUNCTION

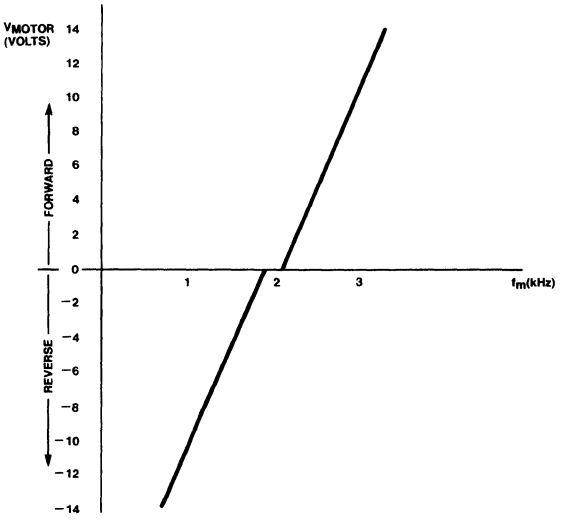

Figure 4

SECTION 17
APPENDICES

MILITARY

MILITARY PRODUCTS/ PROCESS LEVELS

The Signetics MIL 38510/883 Program is organized to provide a broad selection of processing options, structured around the most commonly requested customer flows. The program is designed to provide our customers:

- Fully compliant 883 flows on all products.
- Standard processing flows to help minimize the need for custom specs.
- Cost savings realized by using standard processing flows in lieu of custom flows.
- Better delivery lead times by minimizing spec negotiation time, plus allows customer to buy product off-the-shelf or in various stages of production rather than waiting for devices started specifically to custom specs.

The following explains the different processing options available to you. Special device marking clearly distinguishes the type of screening performed. Refer to Tables 2, 3, 4 and 5.

JAN CASE OUTLINE AND LEAD FINISH	SIGNETICS MILITARY PACKAGE TYPES						
	CAN		DUAL-IN-LINE				
	8-PIN	10-PIN	8-PIN	14-PIN	16-PIN	18-PIN	24-PIN
PB	—	—	FE	—	—	—	—
CB	—	—	—	F	—	—	—
EB	—	—	—	—	F	—	—
JB	—	—	—	—	—	—	F
DB	—	—	—	W	—	—	—
FB	—	—	—	—	W	—	—
ZC	—	—	—	—	—	—	Q
GC	H	—	—	—	—	—	—
IC	—	H	—	—	—	—	—
VB	—	—	—	—	—	I	—

All products listed are also available in Die form.

Table 1 MILITARY PACKAGE AVAILABILITY

	JB	RB	RC
	Jan Qualified	883B	883C
54	X	X	X
54LS	X	X	X
54S	X	X	X
82	X	X	X
8T	—	X	X
93XX	X	X	X
96XX	—	X	X
Analog	X	X	X
Bipolar Memory	X	X	X
Microprocessor	—	X	X

Table 2 MILITARY SUMMARY

JAN QUALIFIED (JB)

JAN Qualified product is designed to give you the optimum in quality and reliability. The JAN processing level is offered as the result of the government's product standardization programs, and is monitored by the Defense Electronic Supply Center (DESC), through the use of industry-wide procedures and specifications.

JAN Qualified products are manufactured, processed and tested in a government certified facility to Mil-M 38510, and appropriate device slash sheet specifications. Design documentation, lot sampling plans, electrical test data and qualification data for each specific part type has been approved by the Defense Electronic Supply Center (DESC) and products appear on the DESC Qualified Products List (QPL-38510).

Group B testing, per Mil-Std-883 Method 5005, is performed on each six weeks of production on each slash sheet for each package type. Group C, per Mil-Std-883 Method 5005, is performed every ninety days for each microcircuit group. Group D testing, per Mil-Std-883 Method 5005, is performed every six months for each package type.

In addition to the common specs used throughout the industry for processing and testing, JAN Qualified products also possess a requirement for a standard marking used throughout the IC industry.

MIL-STD-883, LEVEL B

Processing to this option is ideal when no JAN slash sheets are released on devices required. Product is processed to Mil-Std-883 Method 5004, and is 100% electrically tested to industry data sheets. Devices are selectively available as custom processed parts with electricals screened to the JAN Slash Sheets.

MIL-STD-883, LEVEL C

If you need a Military temp, range device, but do not require burn in screening performed, our 883C product is ideal. 883C parts are the standard full Mil-Temperature range product to the Signetics data sheet parameters and screened to MIL-STD-883, Class C.

MILITARY GENERIC DATA

Signetics has a new program for those customers who require quality conformance data on their products. This program allows our customers to obtain reliability information without the necessity or running Groups B, C and D inspections for their particular purchase order. It provides for the customer something that has not been readily available before in the semiconductor industry in that all Military Generic Data is controlled and audited by both Government Inspection in the case of JAN data and Signetics Quality Assurance.

Signetics Military Generic Data is compiled by the Military Products Division based on data from 1) JAN quality conformance lots, and 2) Data generated by quality conformance lots run for other reliability programs. Refer to Table 4.

A Military Generic family is defined as consisting of die function and package type families.

Military Generic Data

- Allows our customers to qualify Signetics products based on existing quality conformance data performed at Signetics.
- Allows our customers to reduce costs and improve deliveries.
- Provides assurance that all Signetics die function families and packages meet Mil-M-38510 and customer reliability requirements.
- Provides an attributes summary to the customer backed by lot identity and traceability.

PROCESS LEVEL AND MARKETING	PRE-CAP VISUAL	BURN IN	FUNCTIONAL TEST	DC/AC @25°C	DC/AC @TEMP	QPL	OFFSHORE
JB JM38510XXXXX	2010, Cond. B	Yes	100%	100%	100%	Yes	No
RB SXXXX883B	2010, Cond.B	Yes	100%	100%	100%	No	Yes
RC SXXXX883C	2010, Cond. B	No	100%	100% dc Sample ac	Sample dc only	No	Yes

Table 3 MILITARY PRODUCTS PROCESSING MATRIX

QUALIFIED SUB-GROUPS	QUALIFIES	OPTION 1	OPTION 2
A*	Electrical Test		
B	Package—Same package construction and lead finish.	Data selected from devices manufactured within 6 weeks of the manufacturing period on the same production line through final seal.	Data selected from devices manufactured within 24 weeks of manufacturing period.
C	Die/Process—Devices representing the same process families.	Data selected from representative devices from the same microcircuit group and sealed within 12 weeks of the manufacturing period.	Data selected from the representative devices from the same microcircuit group and sealed within 48 weeks of the manufacturing period.
D	Package—Same package construction and lead finish.	Data selected from the devices representing the same package construction and lead finish manufactured within the 24 weeks of manufacturing period. If specific data not available, Option 2 will be supplied	Data selected from the devices representing the same package construction and lead finish manufactured within the 52 weeks of manufacturing period.

NOTE*
Group A is performed on each lot or sublot of Signetics devices.

Table 4 DEFINITION AND QUALIFYING MANUFACTURING PERIODS FOR GENERIC DATA

DESCRIPTION OF REQUIREMENTS AND SCREENS	MIL-M-38510 AND MIL-STD-883 REQUIREMENTS, METHDS AND TEST CONDITIONS	REQUIREMENT	PROCESSING LEVELS			
			CLASS S	JAN QUALIFIED (JB)	883B (RB)	883C (RC)
General Mil-M-38510 1. Pre-Certification A. Product Assurance Program Plan B. Manufacturer's Certification	The Manufacturer shall establish and implement a Products Assurance Program Plan and provide for a manufacturer survey by the qualifying activity, Para. 3.4.1.1	—	X	X	N/A	N/A
2. Certification	Received after manufacturer has completed a successful survey, Para. 3.4.1.2	—	X	X	N/A	N/A
3. Device Qualification	Device qualification shall consist of subjecting the desired device to groups A, B, C & D of method 5005 to tightened LTPD, Para. 3.4.1.2	—	X	X	N/A	N/A
4. Traceability	Traceability maintained back to a production lot Para. 3.4.6	—	X	X	X	X
5. Country of Origin	Devices must be manufactured, assembled, and tested within the U.S. or its territories, Para. 3.2.1	—	X	X	N/A	N/A
Screening Per Method 5004 of Mil-Std-883						
6. Internal Visual (Precap)	2010, Cond. A or B	100%	XA	XB	XB	XB
7. Stabilization Bake	1008, Cond. C Min; (24 Hrs @ 150°C)	100%	X	X	X	X
8. Temperature Cycling* *For Class B and C devices thermal shock may be substituted, 1011, Cond. A; (15 cycles, 0° to +100°C)	1010, Cond. C; (10 cycles, −65°C to +150°C)	100%	X	X	X	X
9. Constant Acceleration	2001, Cond. E; (30kg in YI Plane)	100%	X	X	X	X
10. Visual Inspection	There is no test method for this screen; it is intended only for the removal of "Catastrophic Failures" defined as "Missing Leads, Broken Packages or Lids Off."	100%	X	X	X	X
11. Seal (Hermeticity)	1014					
A. Fine	Cond. A or B (5.0 X 10^{-8}CC/Sec)	100%	X	X	X	X
B. Gross	Cond. C2 Min.	100%	X	X	X	X
12. Interim Electricals (Pre Burn-In)	Per applicable device specification	100% Optional	100% Read & Record	Slash Sheet	Data Sheet	N/A
13. Burn-In	1015, Cond. as specified (160 hrs. Min. at 125°C)	100%	100% 240 hrs.	X	X	N/A
14. Final Electricals	Per applicable Device Specification	100%	100% Read & Record	Slash Sheet	Data Sheet	Data Sheet
A. Static Tests @ 25°C	Sub Group 1		X	X	X	X
B. Static Tests @ +125°C	Sub Group 2		X	X	X	N/A
C. Static Tests @ −55°C	Sub Group 3		X	X	X	N/A

Table 5 REQUIREMENTS AND SCREENING FLOWS FOR STANDARD PRODUCTS

DESCRIPTION OF REQUIREMENTS AND SCREENS	MIL-M-38510 AND MIL-STD-883 REQUIREMENTS, METHODS AND TEST CONDITIONS	REQUIREMENT	PROCESSING LEVELS			
			CLASS S	JAN QUALIFIED (JB)	883B (RB)	883C (RC)
D. Dynamic Test @25°C	Sub Group 4 (for Linear Product Mainly)		X	X	X	X
E. Functional Test @25°C	Sub Group 7		X	X	X	X
F. Switching Test @25°C	Sub Group 9		X	X	X	N/A
15. Percent Defective allowable (PDA)	A PDA of 10% is a normal requirement applied against the static tests @25°C (A-1). This is controlled by the slash sheets for JB products. For RB 10% is standard	10%	10% 3% Funct"l	X	X	N/A
16. Marking	Fungus Inhibiting Paint	100%	As Req'd	JM38510/ XXXX Slash Sheet #	S X X X X 883B	SXXXX 883C
17. X-Ray	2012		100%	N/A	N/A	N/A
18. External Visual	2009	100%	X	X	X	X
Quality Conformance Inspection per Method 5005 of Mil-Std 883						
19. Group A	Electrical Tests-Final Electricals (#14 above) repeated on a sample basis. (Sub Groups 1 thru 12 as specified.)	Each Lot	X	X	X	X
20. Group B	Package functional and constructional related test I.E. package dimensions, resistance to solvents, internal visual & mechanical, bond strength & solderability.	Every 6 week per pkg. group	X	X	Generic Data Available	
21. Group C	Die related tests I.E. 1,000 hr. operating life, temperature cycling, & constand acceleration.	Every 3 months per μcircuit type	X	X	Generic Data Available	
22. Group D	Package related tests I.E. physical dimensions, lead fatigue, thermal shock, temperature cycle, moisture resistance, mechanical shock, vibration variable frequency constant acceleration, & salt atmosphere.	Every 6 months per package type	X	X	Generic Data Available	

Table 5 REQUIREMENTS AND SCREENING FLOWS FOR STANDARD PRODUCTS (Cont'd)

LINEAR DEVICES

DEVICE	DESCRIPTION	PACKAGE*	
		DIP	CAN
	OPERATIONAL AMPLIFIERS		
LF155	JFET Op Amp		H
LF156	JFET Op Amp		H
LH2101A	Dual Op Amp	F	
LM101/A	Hi Perf Op Amp	F	H
LM124	Quad Op Amp	F	
LM158	Dual Op Amp		H
MC1556	Hi Perf Op Amp	F	H
MC1558	Dual Op Amp	F	H
SE530	Hi Slew Op Amp	F	H
SE532	Dual Op Amp		H
SE5512	Dual Op Amp	FE	H
SE5532	Dual Op Amp	F,FE	H
SE5532A	Dual Op Amp	FE	
SE5534	Lo Noise Op Amp	F,FE	H
SE5534A	Lo Noise Op Amp	FE	H
SE5537	Sample and Hold Amp	FE	H
SE5539	High Freq Op Amp	F	—
μA747	Dual Op Amp	F	H
	COMPARATORS		
SE521	Dual Differential Comparator	F	
SE522	Dual Differential Comparator	F	
SE527	Voltage Comparator	F	H
SE529	Voltage Comparator	F	H
LH2111	Dual Voltage Comparator	F	
LM111	Voltage Comparator	F	H
LM139/A	Quad Voltage Comparator	F	
LM193/A	Dual Voltage Comparator		H
	DIFFERENTIAL AMPLIFIERS		
SE510	Dual Differential Amplifier	F	
SE511	Dual Differential Amplifier	F	
μA733	Video Amplifier	F	H
	PHASE LOCKED LOOPS		
SE567	Tone Decoder PLL	F	H
SE564	Phase Locked Loop	F	H
	TIMERS		
SE555	Timer	F,FE	H
SE556-1	Dual Timer	F	
SE558	Quad Timer	F	

DEVICE	DESCRIPTION	PACKAGE*	
		DIP/CAN	CAN
	VOLTAGE REGULATORS		
SE5553	Dual Track Reg	F	H
SE5554	Dual Track Reg	F	H
μA723	Adj Volt Reg	F	H

DEVICE	DESCRIPTION	PACKAGE	
		DIP	CAN
	D to A CONVERTERS		
DAC-08	8-Bit Mult DAC	F,Q	H
MC1508-8	8-Bit Mult DAC	F	—
SE5008	8-Bit Mult DAC	F	—
SE5009	8-Bit Mult DAC	F	—
SE5018	8-Bit μP-Comp DAC	F	—
SE5019	8-Bit μP-Comp DAC	F	—
SE5118	8-Bit μP-Comp DAC	F	—
SE5119	8-Bit μP-Comp DAC	F	—

DEVICE	DESCRIPTION	PACKAGE	
		DIP	CAN
	DUAL LINE RECEIVERS		
DS7820/A	Dual Line Receiver	F	—
DS7830/A	Dual Diff Line Driver	F	—

DEVICE	DESCRIPTION	PACKAGE	
		DIP	CAN
	MOS FET SWITCH		
SD210	Switch N-Channel Enhance	EE	—
SD211	Switch N-Channel Enhance	EE	—
SD5002	Quad Analog Switch	I	

DEVICE	DESCRIPTION	PACKAGE	
		DIP	CAN
	SMPS CONTROL CIRCUITS		
SE5560	SMPS Controller	F	—
SG1524	Reg Pulse Width Mod	F	—

JAN M – 38510			
DEVICE	SLASH SHEET	PKG	QUAL STATUS
SE555	10903BCB	F	QPL 1
SE555	10903BPB	FE	QPL 1
SE555	10901BGC	H	QPL 1
SE556-1	10902BCB	F	QPL 1
LH2101A	10105BEB	F	QPL 1
LM101A	10103BCB	F	QPL 1
LM101A	10103BPB	FE	QPL 1
LM101AH	10103BGC	H	QPL 1
μA741	10101BGC	H	QPL 1
μA747	10101BGC	H	QPL 1
LM124	11005BCB	F	1980
DAC-08	11301BCB	F	1980
DAC-08A	11302BCB	F	1980
SE5537			1980
SG1524			1980

NOTES
F = Cerdip
H = TO-5

LINEAR INDUSTRY CROSS REFERENCE

FAIRCHILD	SIGNETICS
μA111	LM111
μA139	LM139
μA733	μA733
μAF155/156	LF155/156
μA101	LM101
μA101A	LM101A
MC1556	MC1556
μA1558	MC1558
μA747	μA747
MC1555	SE555
μA556	SE556
μA109	LM109
μA79XX	79XX(7)
μA723	μA723

MOTOROLA	SIGNETICS
MLM111	LM111
MC1733	μA733
LF155/56	LF155/156
MLM101	LM101
MLM101A	LM101A
MC1558	MC1558
MC1747	μA747
MC3556	SE556
MLM109	LM109
MC78XX	78XX(7)
MC79XX	79XX(7)
MC1723	μA723
MC1508	MC1508-8

NATIONAL	SIGNETICS
LM161	SE527
LH2111	LH2111
LM111	LM111
LM119	LM119
LM139	LM139
LM193	LM193/193A
LM733	μA733
LF155/56	LF155/156
LH2101A	LH2101A
LH2108A	LH2108A
LM101A	LM101
LM101	LM101A
LM124	LM124
LM158	LM158
LM1558	MC1558
LM1581	SE532
LM747	μA747
LM567	SE567
DM7820	DM7820
DM7830	DM7830
LM555	SE555
LM109	LM109
LM723	μA723

PMI	SIGNETICS
SSS1508	MC1508-8
DAC-08	SE5008

RAYTHEON	SIGNETICS
LM111	LM111
LM139	LM139
RM733	μA733
LF155/56/57	LF155/156
LM101	LM101
LM101A	LM101A
LM124	LM124
RM1556	MC1556
RM1558	MC1558
RM747	μA747
RM555	SE555
LM109	LM109
RM723	μA723

T.I.	SIGNETICS
LM111	LM111
SN52733	μA733
LF155/56	LF155/156
SN52101A	LM101A
SN55182	DM7820
SN55183	DM7830
SN52555	SE555
SE556	SE556
LM109	LM109
μA79XX	μA79XX(7)
SN52723	μA723

PACKAGES

INTRODUCTION

The following information applies to all packages unless otherwise specified on individual package outline drawings.

General

1. Dimensions shown are metric units (millimeters), except those in parentheses which are English units (inches).
2. Lead spacing shall be measured within this zone.
   a. Shoulder and lead tip dimensions are to centerline of leads.
3. Tolerances non-cumulative
4. Thermal resistance values are determined by utilizing the linear temperature dependence of the forward voltage drop across the substrate diode in a digital device to monitor the junction temperature rise during known power application across V_{CC} and ground. The values are based upon 120 mils square die for plastic packages and a 90 mils square die in the smallest available cavity for hermetic packages. All units were solder mounted to P.C. boards, with standard stand-off, for measurement.

Plastic Only

5. Lead material: Alloy 42 (Nickel/Iron Alloy) Olin 194 (Copper Alloy) or equivalents, solder dipped.
6. Body material: Plastic (Epoxy)
7. Round hole in top corner denotes lead No. 1.
8. Body dimensions do not include molding flash.
9. SO Packages-microminature packages.
   a. Lead material: Alloy-42.
   b. Body material: Plastic (Epoxy).

Hermetic Only

10. Lead material
    a. ASTM alloy F-15 (KOVAR) or equivalent—gold plated, tin plated, or solder dipped.
    b. ASTM alloy F-30 (Alloy 42) or equivalent—tin plated, gold plated or solder dipped.
    c. ASTM alloy F-15 (KOVAR) or equivalent—gold plated.
11. Body Material
    a. Eyelet, ASTM alloy F-15 or equivalent—gold or tin plated, glass body.
    b. Ceramic with glass seal at leads.
    c. BeO ceramic with glass seal at leads.
    d. Ceramic with ASTM alloy F-30 or equivalent.
12. Lid Material
    a. Nickel or tin plated nickel, weld seal.
    b. Ceramic, glass seal.
    c. ASTM alloy F-15 or equivalent, gold plated, alloy seal.
    d. BeO Ceramic with glass seal.
13. Signetics symbol, angle cut, or lead tab denotes Lead No. 1.
14. Recommended minimum offset before lead bend.
15. Maximum glass climb .010 inches.
16. Maximum glass climb or lid skew is .010 inches.
17. Typical four places.
18. Dimension also applies to seating plane.

PLASTIC PACKAGES

NO. OF LEADS	PACKAGE CODE	Θ_{ja}/Θ_{jc}(°C/W)	DESCRIPTION[1]
Standard Dual-In-Line			
8	NE	162/65	
14	NH	150/65	TO-116/MO-001
16	NJ	137/53	MO-001
18	NK	135/53	
20	NL	135/53	
22	NM	120/53	
24	NN	116/53	MO-015
24	NNE NNF	120/60	Slim Line
28	NQ	116/53	MO-015
40	NW	110/50	MO-015
Power Dual-In-Line			
14	NHA[2]	95/33	Butterfly
16	NJA[2]	95/33	Butterfly
18	NKA[2]	90/26	Butterfly
20	NLA[2]	90/26	Butterfly
24	NNA[2]	60/23	Heatsink
28	NQA[2]	56/21	Heatsink
SO Packages			
8	DE	110	SO-8
14	DH	100	SO-14
16	DJ	100	SO-16

NOTES
1. Dual-in-Line packages unless otherwise described.
2. Package outline is the same as corresponding standard Dual-in-Line package with identical number of leads.

HERMETIC PACKAGES

NO. OF LEADS	PACKAGE CODE	Θ_{ja}/Θ_{jc}(°C/W)	DESCRIPTION[1]
Metal Headers			
3	HBA	100/20	TO-5 Header
4	EC	100/20	TO-46 Header
4	EE	150/25	TO-72 Header
8	HEA/HEB	150/25	TO-5 Header
10	HFB/HFA	150/25	TO-5/TO-100 Header, Short Can
10	HFD/HFC	150/25	TO-5/TO-100 Header, Tall Can
Flat Packs			
10	QF	230/55	Flat Ceramic
10	WF	240/50	Flat Ceramic
14	QHA	185/45	Flat Ceramic Laminate
14	WH	205/50	Flat Ceramic
16	QJA	170/45	Flat Ceramic Laminate
16	RJA	133/30	Flat Ceramic, BeO
16	WJ	200/50	Flat Ceramic
18	RKA	107/22	Flat Ceramic, BeO
24	QNA	155/44	Flat Ceramic Laminate
24	RNA	107/22	Flat Ceramic, BeO
24	WN	155/40	Flat Ceramic
28	RQA	107/22	Flat Ceramic, BeO
40	RWA	95/20	Flat Ceramic, BeO
Cerdip Family			
8	FE	110/30	Dual-in-Line Ceramic
14	FH	110/30	Dual-in-Line Ceramic
16	FJ	100/30	Dual-in-Line Ceramic
18	FK	93/27	Dual-in-Line Ceramic
20	FL	90/25	Dual-in-Line Ceramic
22	FM	75/27	Dual-in-Line Ceramic
24	FN	60/26	Dual-in-Line Ceramic
28	FQ	57/27	Dual-in-Line Ceramic
Laminated Ceramic, Side Brazed Lead			
8	IEA	100/30	Dip Laminate
14	IHA	95/25	Dip Laminate
16	IJA	90/25	Dip Laminate
18	IKA/IKB	88/25	Dip Laminate
22	IMA	80/25	Dip Laminate
24	INC/INH	65/25	Dip Laminate
28	IQA	60/25	Dip Laminate
28	GQ*	90/35	Chip Carrier
40	IWA	55/25	Dip Laminate
44	GX*	75/30	Chip Carrier
48	JY*	55/25	Dual-in-Line Ceramic
50	IZA	42/20	Dip Laminate

*Contact factory for Package drawings.

PLASTIC: Standard and Power Dual-In-Line

NE Package

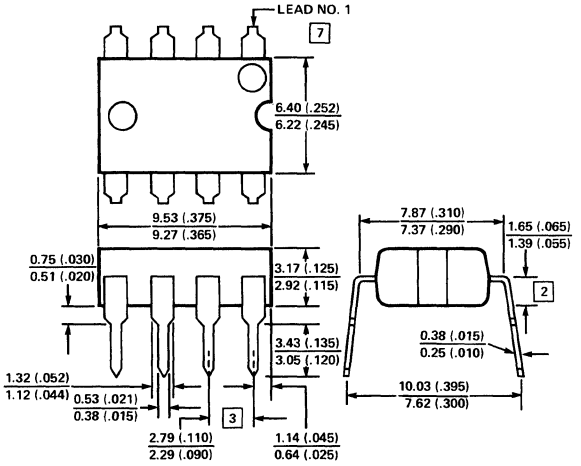

NH Package

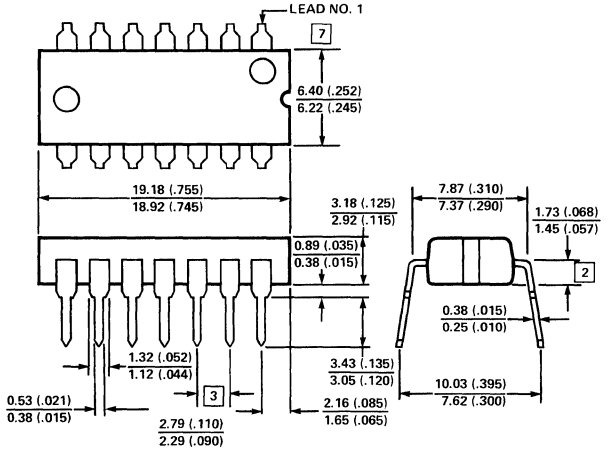

NJ Package

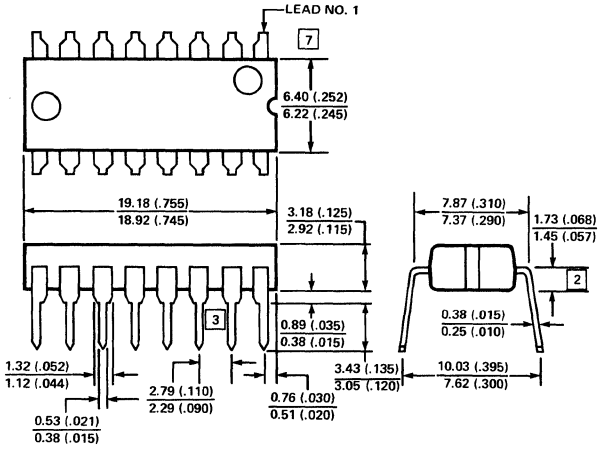

NK Package

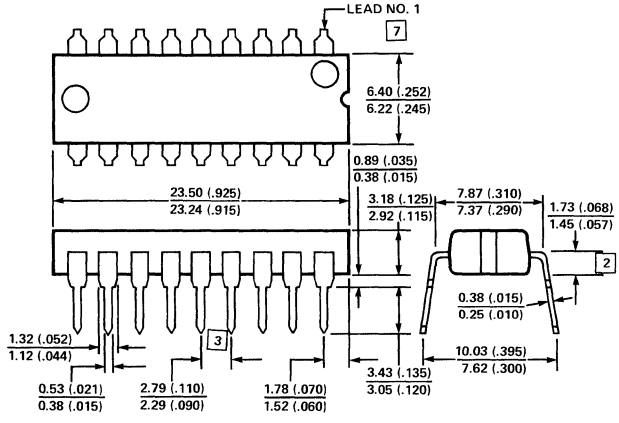

PLASTIC: Standard and Power Dual-In-Line (cont'd.)

NL Package

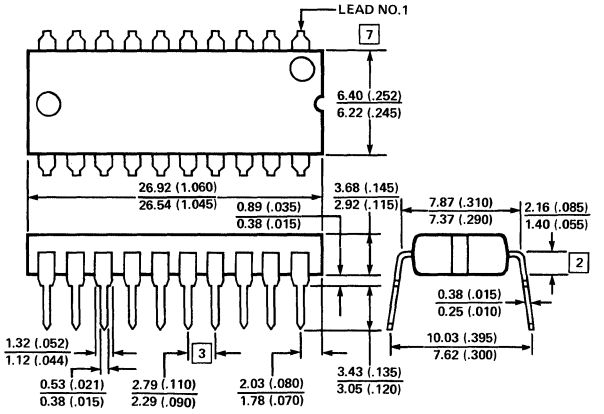

NM Package

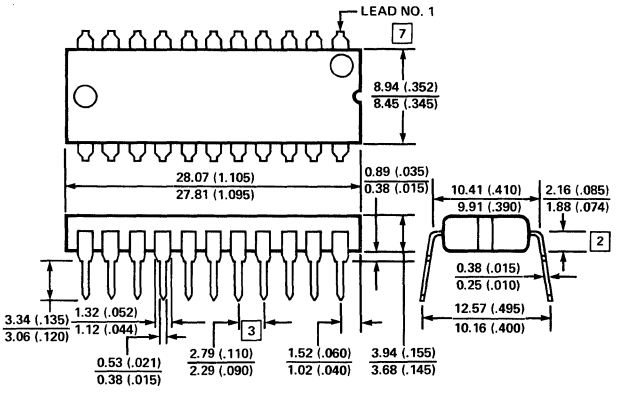

NN Package

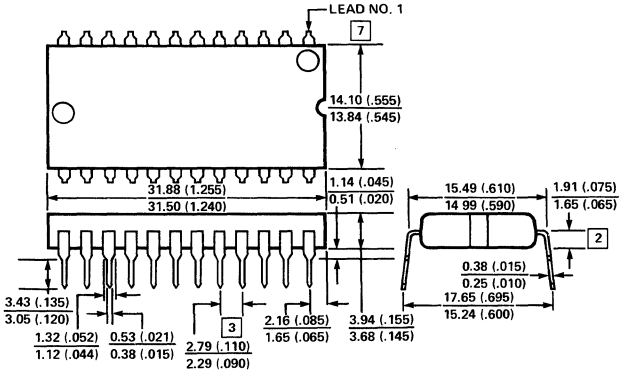

PLASTIC: Standard and Power Dual-In-Line (cont'd.)

NNE/NNF Package

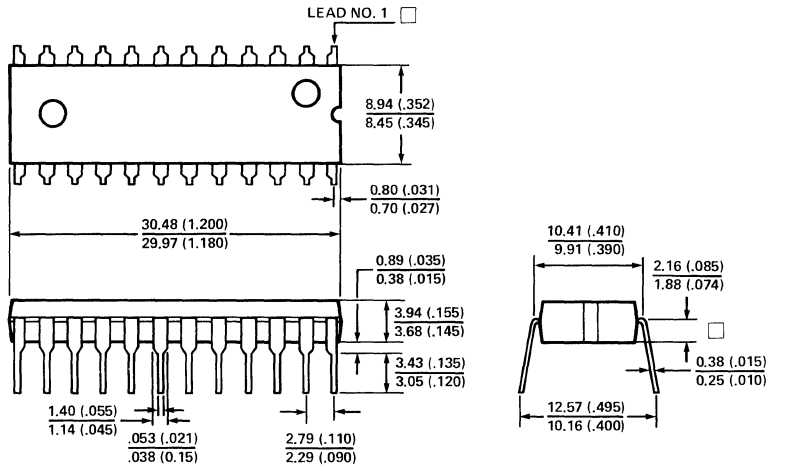

NQ Package

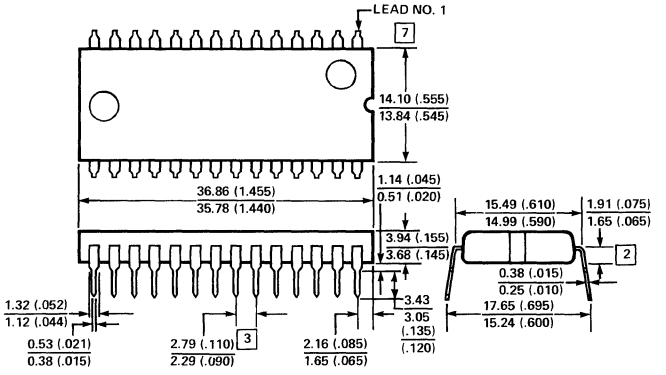

NW Package

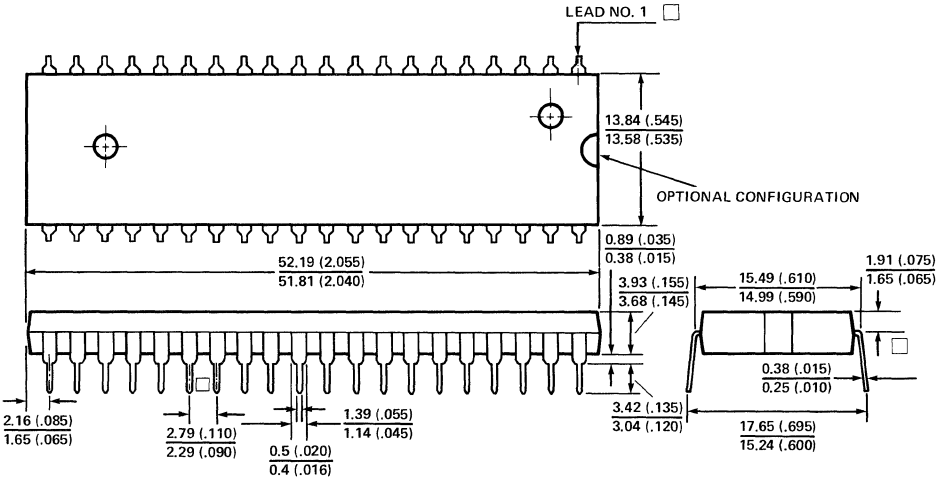

PLASTIC: SO Packages

DE Package

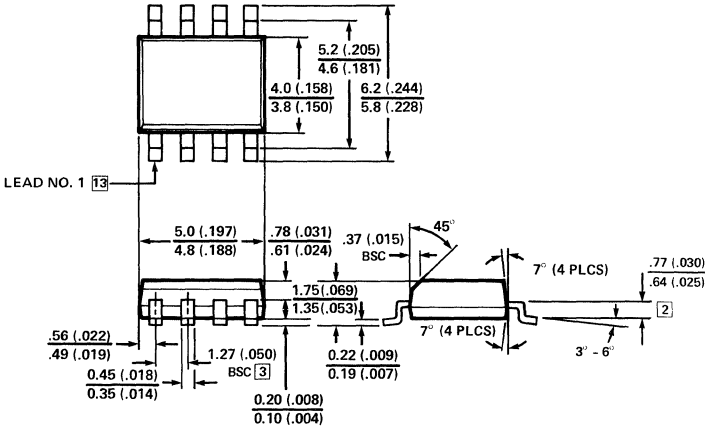

DH Package

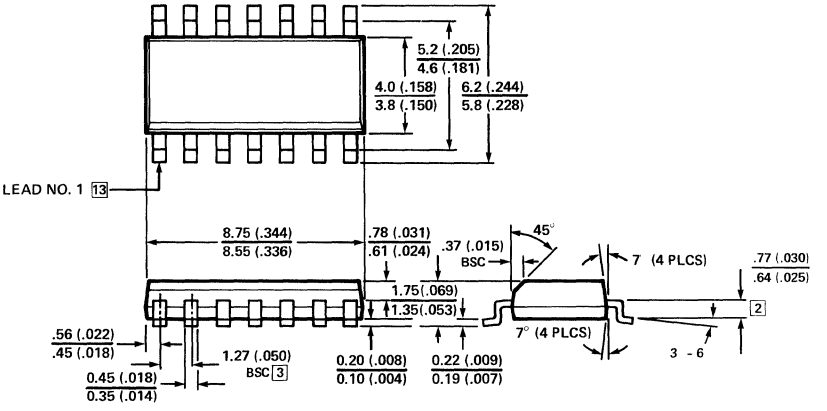

DJ Package

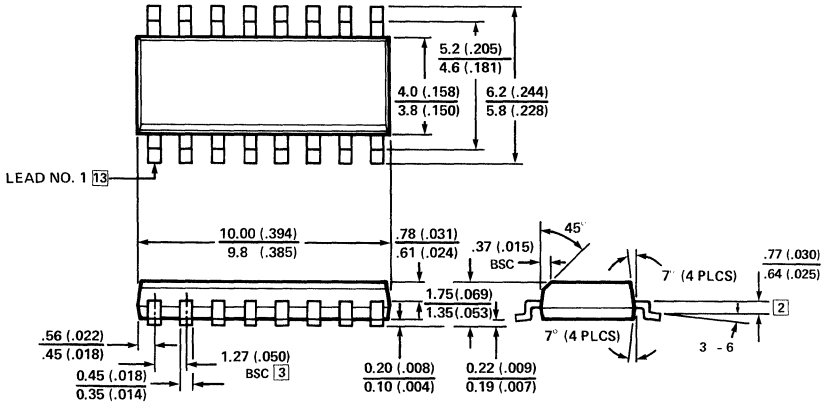

HERMETIC: Metal Headers

HBA Package

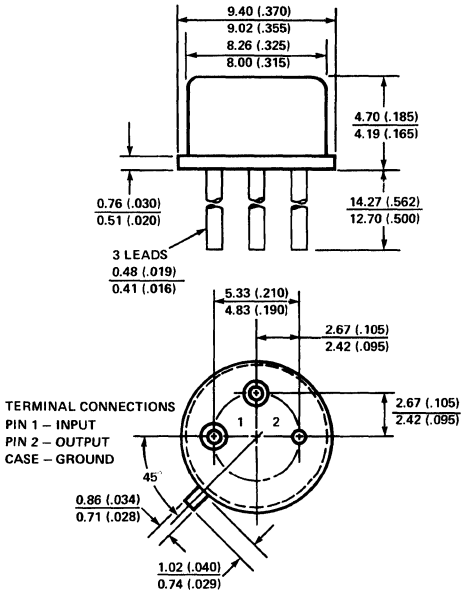

CONSTRUCTION NOTES: 10a, 11a, 12a

EC Package

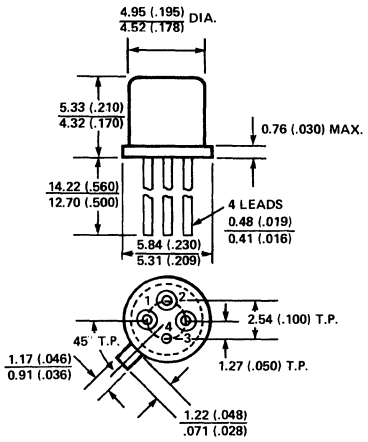

CONSTRUCTION NOTES: 10a, 11a, 12a

EE Package

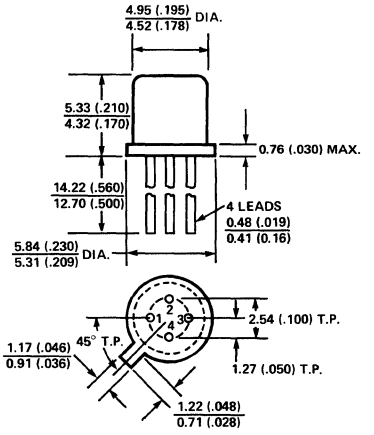

CONSTRUCTION NOTES: 10a, 11a, 12a

HEA/HEB Package

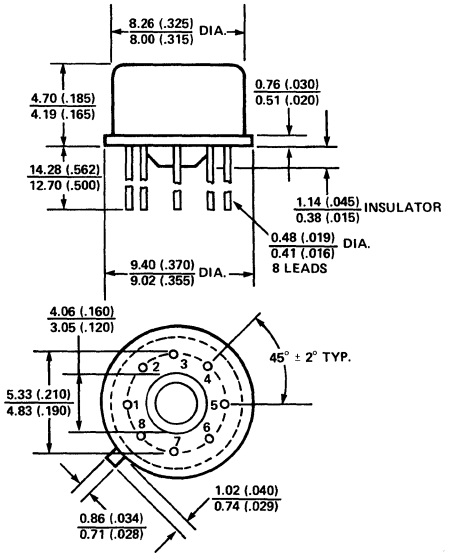

CONSTRUCTION NOTES: 10a, 11a, 12a

HERMETIC: Metal Headers (cont'd.)

HFB/HFA Package

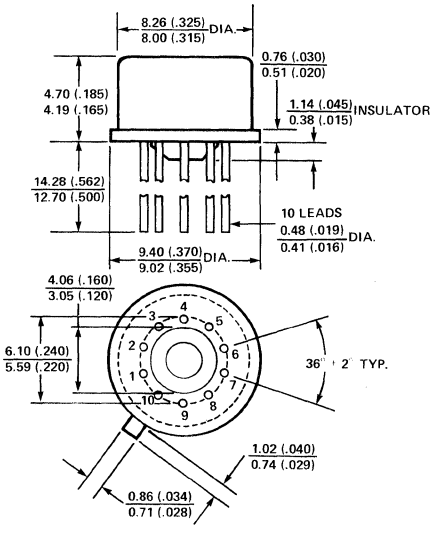

CONSTRUCTION NOTES: 10a, 11a, 12a

HFD/HFC Package

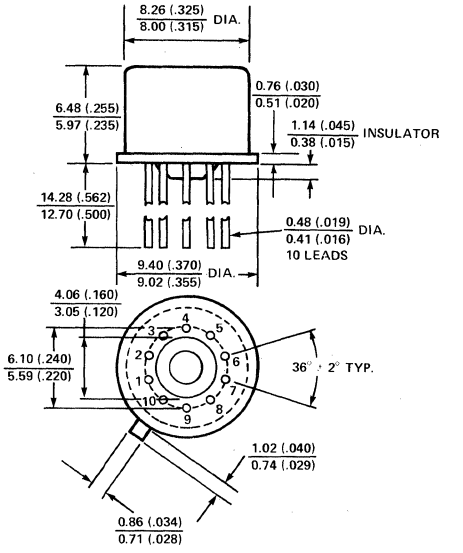

CONSTRUCTION NOTES: 10a, 11a, 12a

HERMETIC: Flat Packs

QF Package

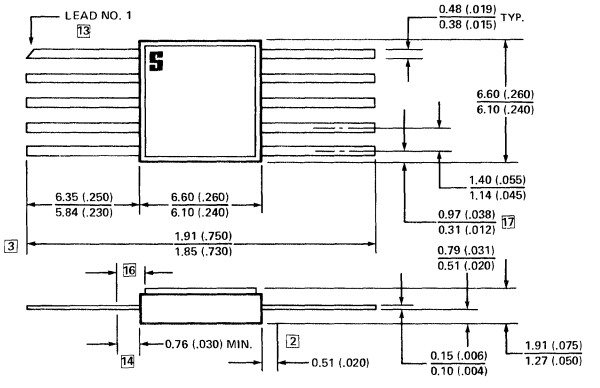

CONSTRUCTION NOTES: 10c, 11d, 12b

WF Package

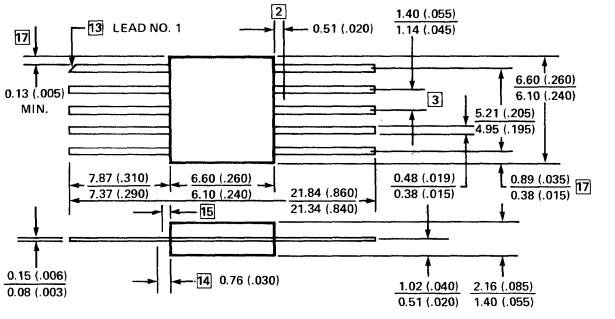

CONSTRUCTION NOTES: 10b, 11b, 12b

HERMETIC: Flat Packs (cont'd.)

QHA Package

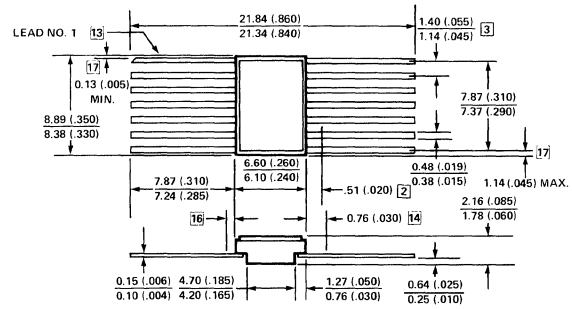

CONSTRUCTION NOTES: 10c, 11d, 12b

WH Package

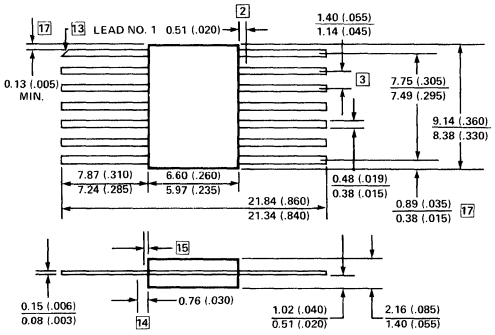

CONSTRUCTION NOTES: 10b, 11b, 12b

QJA Package

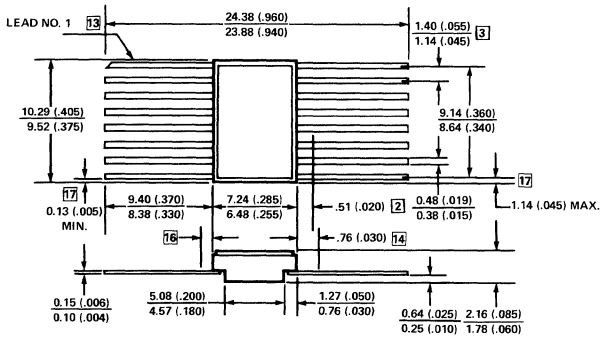

CONSTRUCTION NOTES: 10c, 11d, 12b

RJA Package

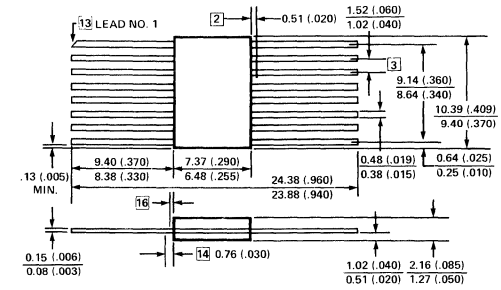

RJA CONSTRUCTION NOTES: 10b, 11c, 12b

HERMETIC: Flat Packs (cont'd.)

WJ Package

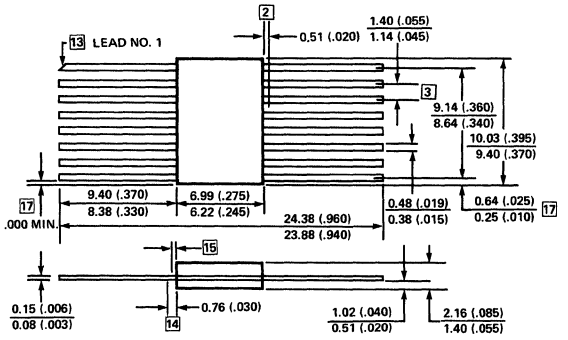

CONSTRUCTION NOTES: 10b, 11b, 12b

RKA Package

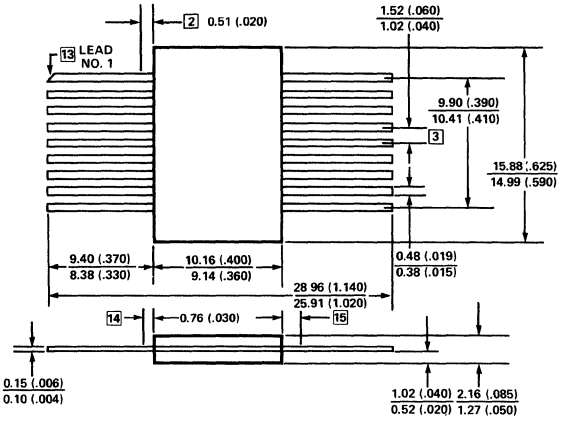

CONSTRUCTION NOTES: 10b, 11c, 12d

QNA Package

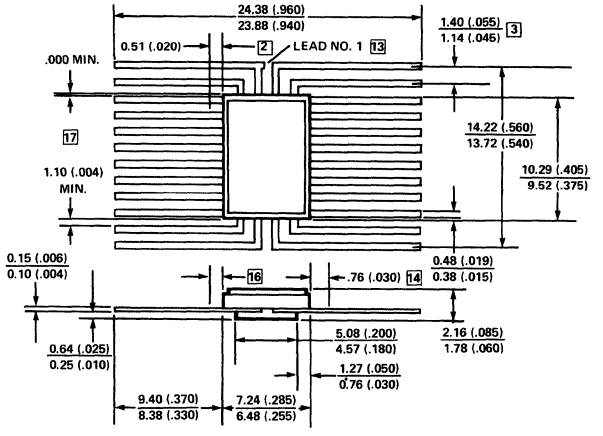

CONSTRUCTION NOTES: 10c, 11d, 12b

RNA Package

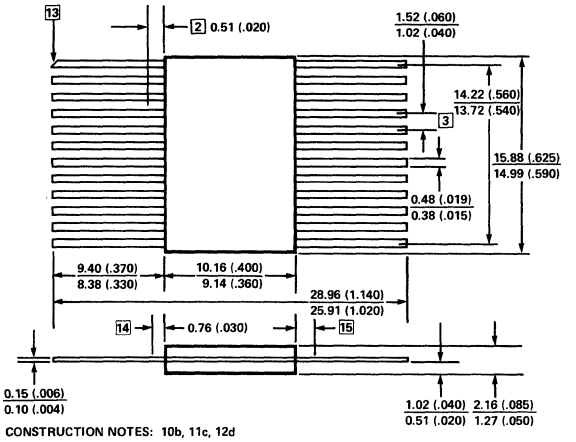

CONSTRUCTION NOTES: 10b, 11c, 12d

HERMETIC: Flat Packs (cont'd.)

WN Package

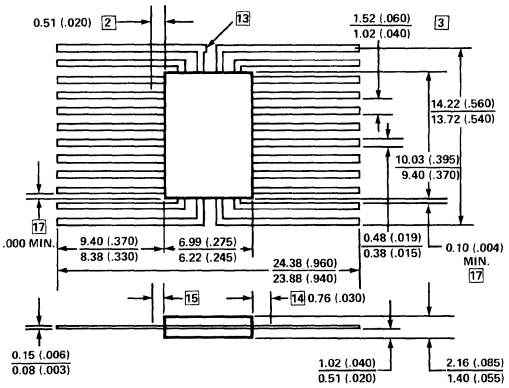

CONSTRUCTION NOTES: 10b, 11b, 12b

RQA Package

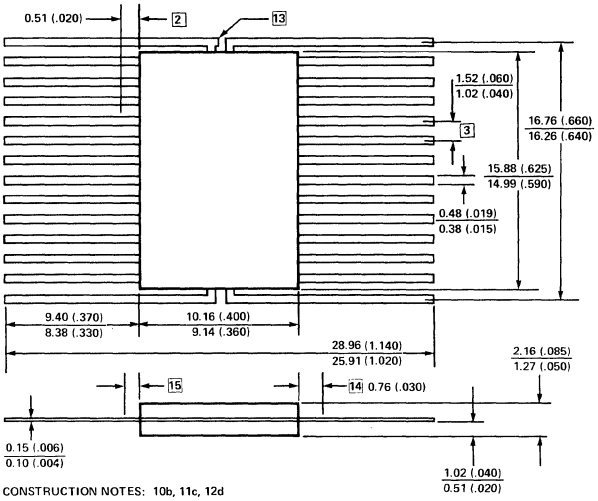

CONSTRUCTION NOTES: 10b, 11c, 12d

RWA Package

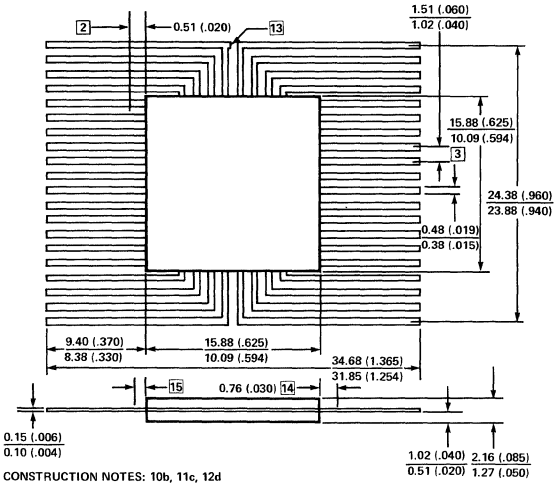

CONSTRUCTION NOTES: 10b, 11c, 12d

HERMETIC: Cerdip Family

FE Package

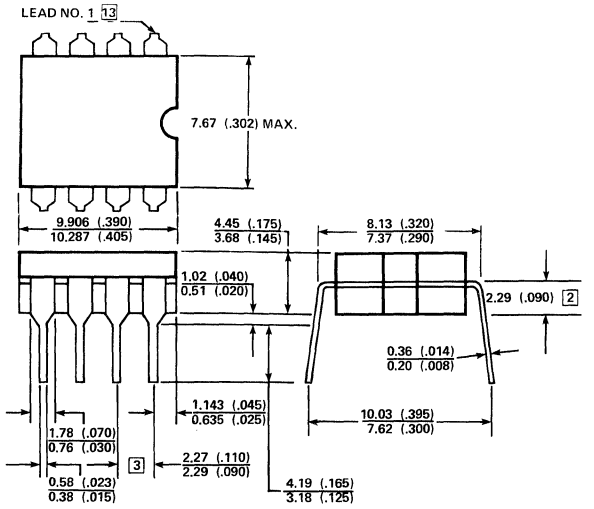

CONSTRUCTION NOTES: 10b, 11b, 12b

FH Package

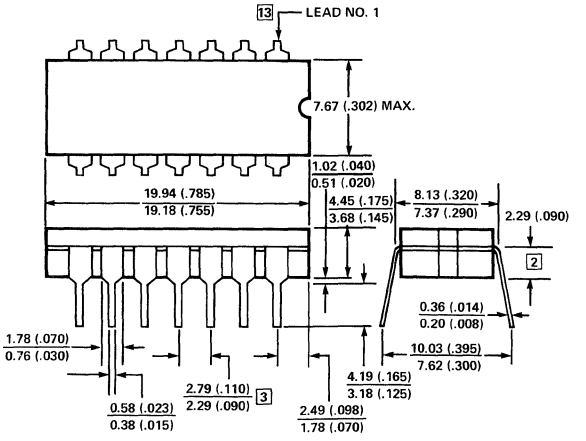

CONSTRUCTION NOTES: 10b, 11b, 12b

FJ Package

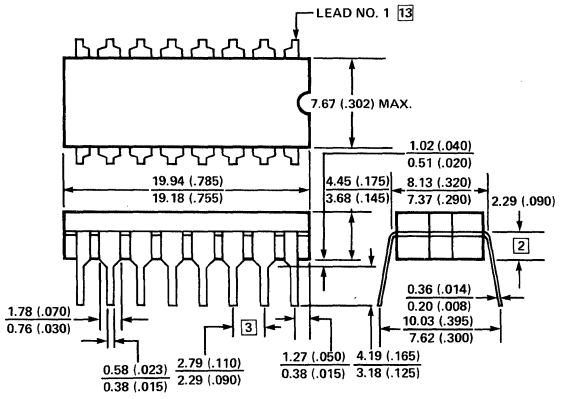

CONSTRUCTION NOTES: 10b, 11b, 12b

FK Package

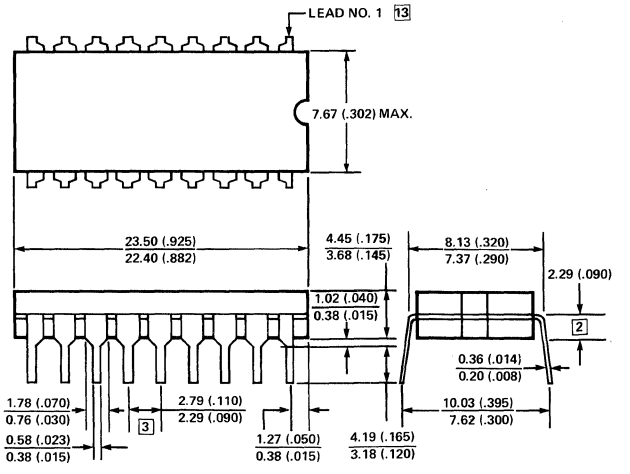

CONSTRUCTION NOTES: 10b, 11b, 12b

HERMETIC: Cerdip Family (cont'd.)

FL Package

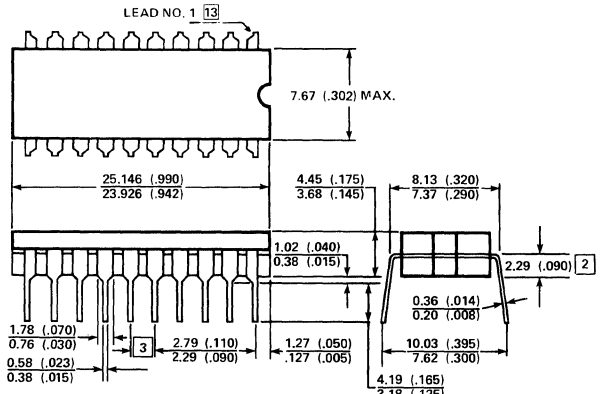

CONSTRUCTION NOTES: 10b, 11b, 12b

FM Package

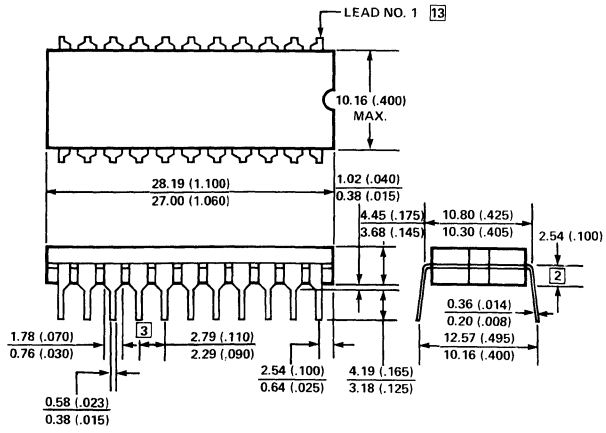

CONSTRUCTION NOTES: 10b, 11b, 12b

FN Package

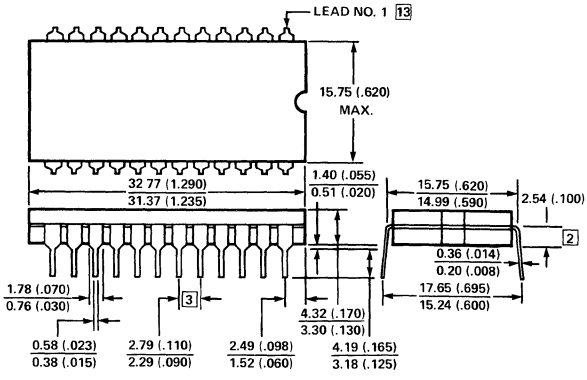

CONSTRUCTION NOTES: 10b, 11b, 12b

FQ Package

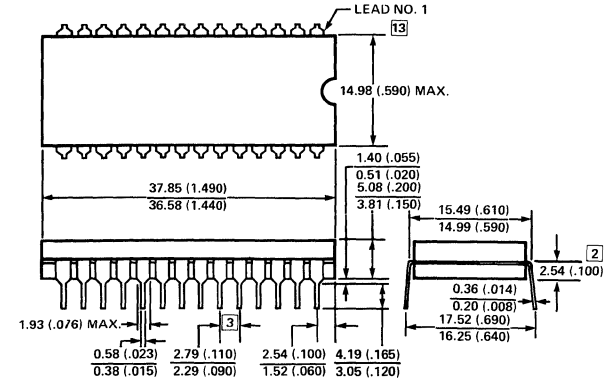

CONSTRUCTION NOTES: 10b, 11b, 12b

HERMETIC: Laminated Ceramic, Side Brazed Lead

IEA Package

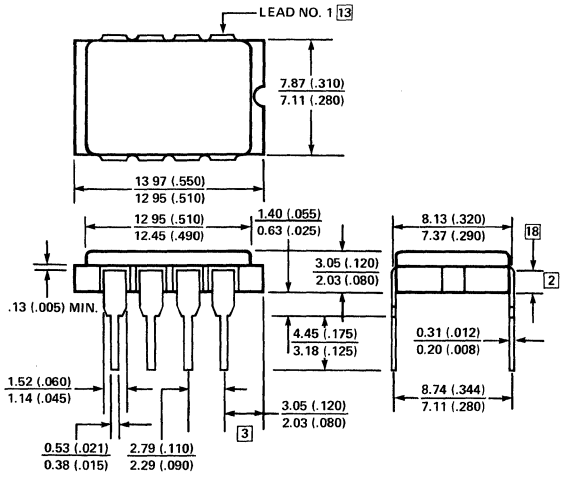

CONSTRUCTION NOTES: 10b, 11d, 12b

IHA Package

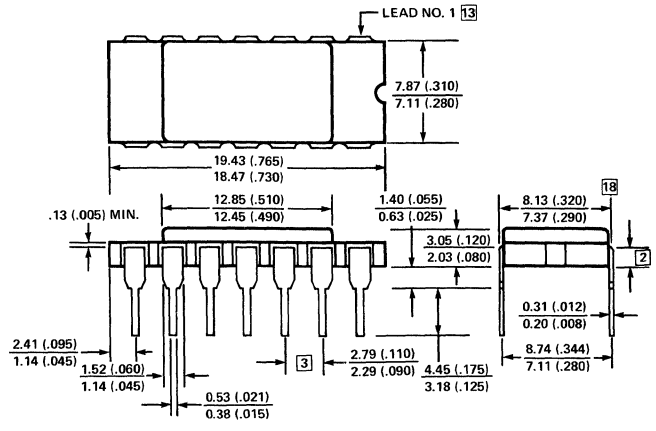

CONSTRUCTION NOTES: 10b, 11d, 12b

IJA Package

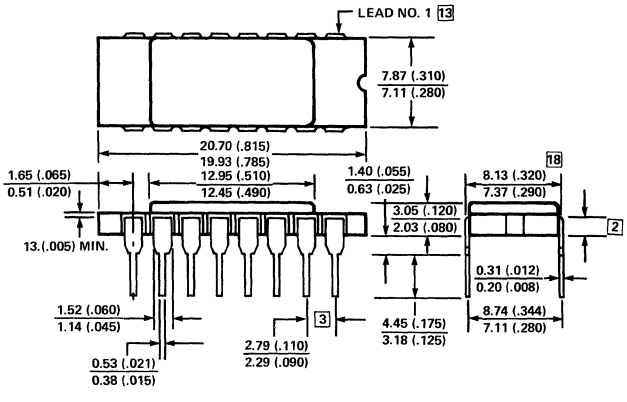

CONSTRUCTION NOTES: 10b, 11d, 12b

HERMETIC: Laminated Ceramic, Side Brazed Lead (cont'd.)

IKA/IKB Package

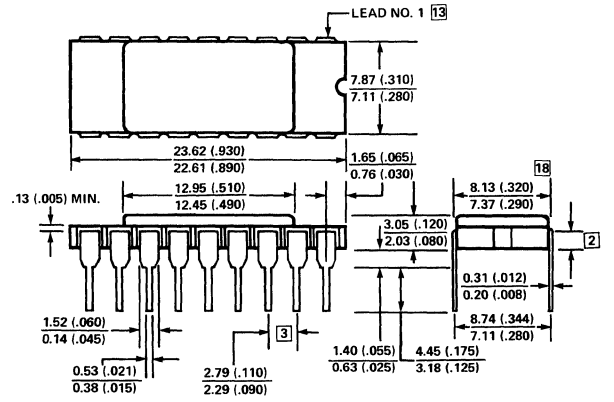

CONSTRUCTION NOTES: 10b, 11d, 12b OR 12c

IMA Package

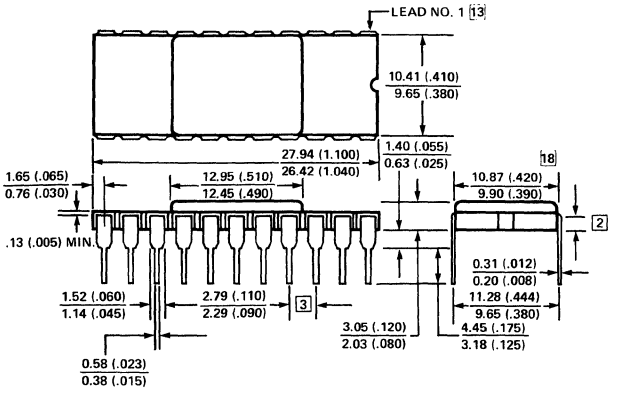

CONSTRUCTION NOTES: 10b, 11d, 12b

INC/INH Package

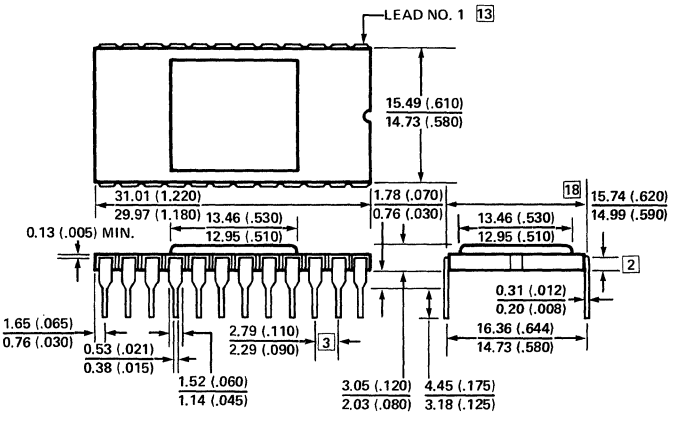

CONSTRUCTION NOTES: 10b, 11b, 12b

HERMETIC: Laminated Ceramic, Side Brazed Lead (cont'd.)

IQA Package

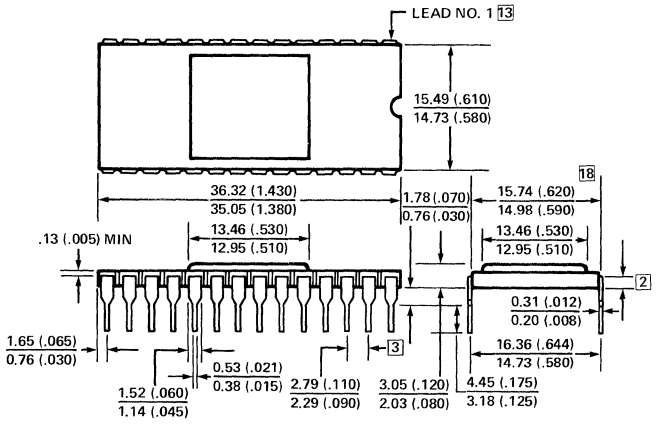

CONSTRUCTION NOTES: 10b, 11b, 12b

IWA Package

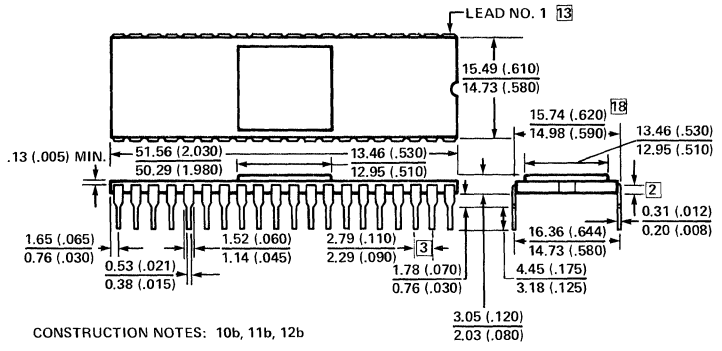

CONSTRUCTION NOTES: 10b, 11b, 12b

IZA Package

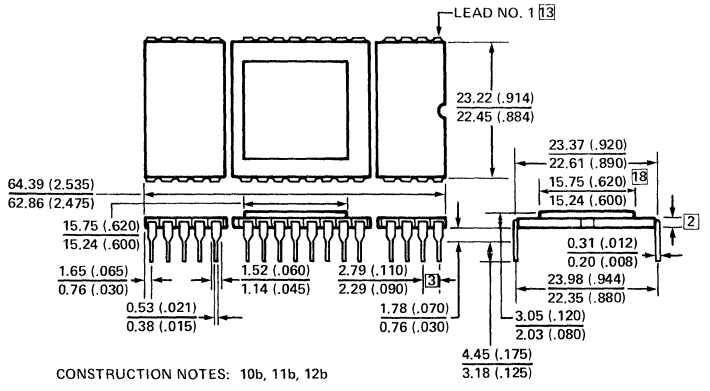

CONSTRUCTION NOTES: 10b, 11b, 12b

WHAT IS A MINIATURE IC PACKAGE?

In order to overcome the physical size constraint sometimes encountered with standard plastic dual-in-line packages, N.V. Philips of Eindhoven, the Netherlands, with which Signetics is affiliated, developed the SO package (SO = small outline). The true advantage of this miniature package is that it is possible to seal standard integrated circuit die inside of a dual-in-line package with significantly reduced outside dimensions.

This has advantages not only in the assembly of PC boards, but it also allows hybrid manufacturers to purchase fully DC- and AC-tested circuits for assembly onto substrates. Presently, with chip and wire assembly techniques, it is only possible to purchase DC-tested, unpackaged integrated circuits.

A BRIEF HISTORY

Early in the 1960's, hybrid circuit manufacturers began using unpackaged chips. Problems swiftly arose. Handling was difficult, mounting was messy, bonding was a hand operation, and AC- and DC-testing was almost impossible until the circuit was completed.

In 1967, Philips introduced the first miniature packages for discrete components in the form of SOT-23 devices. These brought outstanding improvements in manufacturing yields with significant cost reductions to hybrid circuits.

In 1971, Philips commenced a similar development of a miniature package for integrated circuits for use in the Swiss watch industry.

PRINCIPAL APPLICATIONS

The SO package is not only of interest for the hybrid manufacturer, but also for any equipment manufacturer when size, volume, and weight are critical. Miniaturization on a new scale now becomes possible. In many applications, the small size of the new SO packages opens up new possibilities for equipment manufacturers.

CURRENT USES OF THE NEW SO PACKAGES

- **Portable communications equipment (e.g. paging equipment)**
- **Automobile instrumentation**
- **Portable instruments**
- **Television cameras**
- **Photographic cameras**
- **Telephone transmission equipment**
- **Model control**

TYPES OF CIRCUITS CURRENTLY AVAILABLE

TYPE	PACKAGE	FUNCTION
LM301AD	SO-8	High performance op amp
LM311D	SO-8	Single general purpose comparator
LM319D	S0-14	Dual voltage comparator
LM324D	SO-14	Quad op amp
LM339D	SO-14	Quad voltage comparator
LM358D	SO-8	Dual op amp
LM13600D/AD	SO-8	Dual operational transconductance amplifier
MC1458D	SO-8	Dual op amp
NE532D	SO-8	Dual op amp
NE544D	SO-14	Servo amplifier
NE555D	SO-8	Timer
NE556D	SO-14	Dual timer
NE564D	SO-16	Phase locked loop
NE592D	SO-14	Video amplifier
NE5512	SO-8	Dual high performance op amp
NE5517D/AD	SO-16	Dual operational transconductance amplifier
NE5534D	SO-8	Low noise op amp
NE5539D	SO-14	Ultra high frequency op amp
NE5044D	SO-16	Seven channel R.C. encoder
NE5045D	SO-16	Seven channel R.C. decoder
μA723CD	SO-14	Precision voltage regulator
μA741CD	SO-8	General purpose op amp
μA747CD	SO-14	Dual general purpose op amp
μA748CD	SO-8	General purpose op amp

PLANS FOR NEW TYPES

Our analog product range will be extended to include devices in the new SO packaging. We are considering the full line of analog products.

POWER DISSIPATION

Considering their size, the SO packages exhibit excellent properties of power dissipation. When mounted on a ceramic substrate, the heat dissipated can be readily conducted away from the source. The thin size and short connections give a thermal resistance between junction and solder pads or heatsink about the same as for a normal DIP package mounted on a printed circuit board. The thermal resistance of the SO-8 package is about 110°C/W, while that of the SO-14 and SO-16 is about 100°C/W, or lower. Thermal resistance does, however, depend on chip size. The graph shows typical values of thermal resistance between the junction and heatsink or ambient for SO packages.

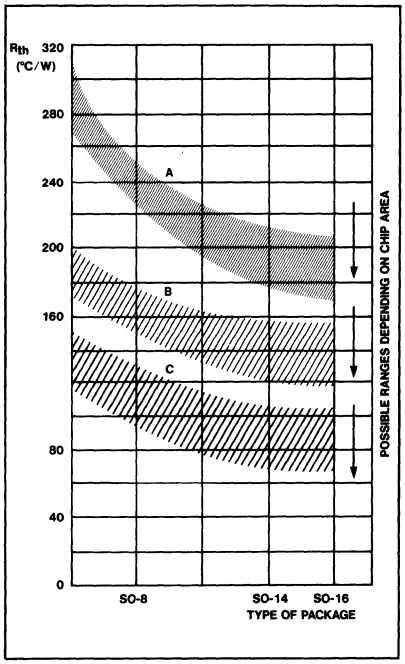

Curve A represents the thermal resistance when mounted on ceramic against a heatsink (.984 x .511 x .023 inches); curve B is when mounted on ceramic in free air; curve C is when mounted on a printed circuit board in free air.

RELIABILITY ENGINEERING QUALIFICATION REPORT ON THE "SO" PACKAGE
A Miniature Molded Epoxy Package

K. M. Self & P. J. Naumchik
Signetics Reliability Engineering

ABSTRACT
This report summarizes the Reliability Engineering activities undertaken to evaluate and qualify a miniature molded epoxy package configuration identified as the "SO." The evaluation demonstrated that the stress performance of the "SO" Package is equivalent to the larger standard molded epoxy dual-in-line package in all aspects, and mounted, the package thermal resistance characteristics are exceptional considering the reduced size and mass of the package.

BACKGROUND/ADVANTAGES
The "SO" Package was developed by N.V. Philips in 1967 for applications in hybrid structures and later for watch modules.

The reduced size of this package (refer to Figure 1) offers significant packing density improvements which up to now have been restricted to users of higher cost hermetic flat packages. For hybrid systems with limited size constraints, the "SO" offers an ease-of-use and testability advantage over conventional chip and wire hybrid approaches.

EVALUATION PROGRAM
Our evaluation/qualification program included three Analog products; LM311 voltage comparator, μA747 dual op amp, and NE532 dual op amp.

These devices encompass three wafer fabrication processes and both 8-Pin and 14-Pin package configurations.

All products were assembled on Alloy 42 lead frames, die attached utilizing conventional gold-silicon eutectic and molded in our standard Morton 410B epoxy Novalac compound. The devices were subjected to a series of accelerated stresses and tested to conventional data sheet parameters. Variables data was taken and drift analysis was performed.

The stress conditions employed were as follows:

- High Temperature Bias Life
  T_A = 125°C V_{CC} = ±15V
- High Temperature Storage Life
  T_A = 150°C
- Temperature/Humidity Bias Life
  T_A = 85°C RH = 85% V_{CC} = ±15V
- Temperature/Humidity/Pressure (Pressure Cooker) T_A = 121°C 15 PSIG 100% Sat. Steam
- Thermal Shock (Liquid to Liquid) −65°C to 150°C

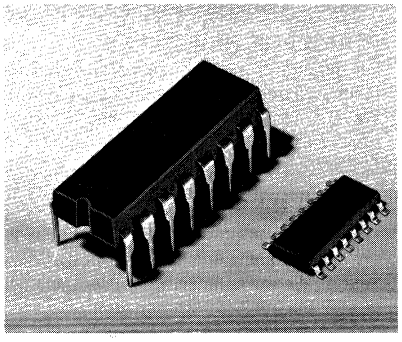

Figure 1

PROGRAM RESULTS
The details of all the stress results are included in Table I. The size of the "SO" Package tends to suggest that the structure may be less rugged than its molded dual-in-line counter part. The test results demonstrate how misleading a factor size can be. In all stresses the "SO" devices performed as well as standard dual-in-line product. Requirements for qualification were met or exceeded on all three products evaluated.

THERMAL RESISTANCE
Thermal resistance measurements were made with devices mounted on a 2CM x 1CM (13/16" x 3/8") ceramic substrate. The results were as follows:
8-Pin "SO" θ_{JA} = 110°C/W
14-Pin "SO" θ_{JA} = 100°C/W
16-Pin "SO" θ_{JA} = 100°C/W

CONCLUSIONS
The "SO" Package constructed with Alloy-42 lead frame, Au-Si eutectic die attach, and molded in 410B epoxy Novalac provides an integrated circuit with a reliable barrier to hostile external environmental conditions and stresses. It is qualified for use with any Signetics Bipolar Analog or Bipolar Logic device which can tolerate the physical limitations of die attach pad size and can operate reliably within the thermal resistance limitations of the package.

RELIABILITY EVALUATION RESULTS

RELIABILITY ENGINEERING PROJECT ID	SIGNETICS PRODUCT TYPE	STRESS	STRESS CONDITIONS	STRESS DURATION	CUMULATIVE RESULT	ANALYSIS
790707	LM311 (14 Lead "SO")	HTOL	125°C	2,000 Hours	1/49	1 @ 168 Hours: Ball bond to trace short.
		HTSL	150°C	2,000 Hours	0/50	
		Bias/Temperature/Humidity	85°C @ 85% RH V_{CC} = 5.5V	2,000 Hours	2/50	2 @ 2000 Hours: Internal metal corrosion.
		Pressure Pot	121°C 15PSIG	432 Hours	2/51	1 @ 192 Hours: Output leakage = 68nA 1 @ 432 Hours: Output Leakage = 100nA Both internal metal corrosion.
		Thermal Shock	−65°C TO +150°C	1,000 ~	0/45	
790708	μA747 (14 Lead "SO")	HTOL	125°C ± 15V	2,000 Hours	2/50	1 @ 168 Hours: V_{OS} = 10mV. V_{OS} = 7.4mV @ 2K Hours 1 @ 1500 Hours V_{OS} = −80mV, I_B = 8μA Suspect static damage.
		HTSL	150°C	2,000 Hours	0/50	
		Bias/Temperature/Humidity	85°C @ 85% RH V_{CC} = 5.5V	2,000 Hours	1/50	V_{OS} reject @ 500 Hours (−80mV) suspect static damage
		Pressure Pot	121°C 15PSIG	312 Hours	3/50	Three V_{OS} rejects @ 312 Hours (~ 8mV)
		Thermal Shock	−65°C TO +150°C	1,000 ~	1/48	V_{OS} reject @ 700 ~ (−170 mV, I_{B-} = 14μA) Suspect static damage
795003	NE532 (8 Lead "SO")	HTOL	150°C	2,000 Hours	0/45	To 500 Hours, 0/18 from 500 to 2000 Hours (due to capacity limitations).
		HTSL	150°C	2,000 Hours	0/46	
		Bias/Temperature/Humidity	85°C @ 85% RH	2,000 Hours	2/49	1 @ 1500, 1 @ 2000—Both output sink current failures due to corrosion.
		Pressure Pot	121°C 15PSIG	456 Hours	1/43	Output sink current @ 288 hours.
		Thermal Shock	−65°C TO +150°C	1,000 ~	1/45	V_{OS} reject @ 200 ~ (15mV)

ALPHANUMERIC INDEX

CA3081/3082	Seven Transistor Array	233
CA3089	FM-IF System	359
DS7820/8820	Dual Line Receiver	243
DS7820A/8820A	Dual Line Receiver	245
DS7830/8830	Dual Differential Line Driver	249
LF355/356	High Performance JFET Input Operational Amplifiers	28
LF398	Monolithic Sample and Hold Circuits	303
LM111/211/311	Voltage Comparator	191
LM119/219/319	Dual Voltage Comparator	194
LM124/224/324	General Purpose Single Supply Operational Amplifier	37
LM139/239/339	Quad Voltage Comparator	199
LM158/258/358	Dual Operational Amplifier Single or Dual Power Supply Operation	67
LM193/A/293/A/393/A	Low Power Dual Voltage Comparator	204
LM301A	High Performance Amplifier	41
LM387	Dual Low-Noise Preamp	411
LM1880	Vertical/Horizontal Processor	395
LM2901	Quad Voltage Comparator	199
LM2903	Low Power Dual Voltage Comparator	204
LM13600/13600A	Dual Operational Transconductance Amplifier	45
MC1456/1556	High Performance Operational Amplifier	48
MC1458/1558	General Purpose Operational Amplifier	51
MC1488	Quad Line Driver	251
MC1489/1489A	Quad Line Receivers	254
MC1496/1596	Balanced Modulator-Demodulator	364
MC1508-8/1408-8/1408-7	8-Bit Multiplying D/A Converter	307
MC3302	Quad Voltage Comparator	199
NE542	Dual Low Noise Preamp	420
NE544/644	Servo Amplifier	367
NE545*	Dolby Noise Reduction Processor	
NE570/571/SA571	Compandor	423
NE572	Programmable Analog Compandor	425
NE582	HEX Universal Driver	273
NE587	LED Decoder/Driver	275
NE589	LED Decoder/Driver	284
NE590/591	Addressable Peripheral Drivers	225
NE645B/646B-N	Dolby Noise Reduction Processor	427
NE5007/5008/SE5008	8-Bit High Speed Multiplying D/A Converter	313
NE5020	10-Bit Microprocessor-Compatible D/A Converter	343
NE5044	Programmable Seven Channel RC Encoder	373
NE5045	Seven Channel RC Decoder	376
NE5046	2-Channel RC Decoder	379
NE5517/5517A	Dual Operational Transconductance Amplifier	92
NE5522	Universal Analog Controller	493
NE/SE521	High Speed Dual Differential Comparator/Sense Amp	207
NE/SE522	High Speed Dual Differential Comparator/Sense Amp	211
NE/SE527	Voltage Comparator	215
NE/SE529	Voltage Comparator	219
NE/SE530	High Slew Rate Operational Amplifier	56
NE/SE531	High Slew Rate Operational Amplifier	61
NE/SE/SA532	Dual Operational Amplifier Single or Dual Power Supply Operation	67
NE/SE535	Single or Dual High Slew Rate Operational Amplifier	71
NE/SE538	Dual High Slew Rate Operational Amplifier	76
NE/SE540	Power Driver	415
NE/SE555/SE555C	Timer	177
NE/SA/SE556	Dual Timer	180

NE/SA/SE556-1/SE556-1C	Dual Timer	183
NE/SA/SE558	Quad Timer	186
NE/SE564	Phase Locked Loop	436
NE/SE565	Phase Locked Loop	443
NE/SE566	Function Generator	448
NE/SE567	Tone Decoder/Phase Locked Loop	451
NE/SE592	Video Amplifier	137
NE/SA594	Vacuum Fluorescent Display Driver	293
NE/SE5009	8-Bit High Speed Multiplying D/A Converter	318
NE/SE5018	8-Bit Microprocessor-Compatible D/A Converter	325
NE/SE5019	8-Bit Microprocessor-Compatible D/A Converter	330
NE/SE5118	8-Bit Microprocessor-Compatible D/A Converter-Current Output	335
NE/SE5119	8-Bit Microprocessor-Compatible D/A Converter-Current Output	339
NE/SE5512	Dual High Performance Operational Amplifier	81
NE/SE5514	Quad High Performance Operational Amplifier	87
NE/SE5530	High Slew Rate Operational Amplifier	56
NE/SE5535	Single or Dual High Slew Rate Operational Amplifier	71
NE/SE5538	Dual High Slew Rate Operational Amplifier	76
NE/SE5532/5532A	Internally Compensated Dual Low Noise Operational Amplifier	98
NE/SE5533/5533A	Single and Dual Low Noise Operational Amplifier	104
NE/SE5534/5534A	Single and Dual Low Noise Operational Amplifier	104
NE/SE5537	Sample and Hold Amplifier	351
NE/SE5539	Ultra High Frequency Operational Amplifier	109
NE/SE5553/5554	Dual Polarity Regulator	153
NE/SE5560	Switched-Mode Power Supply Control Circuit	157
SD210/211/212/213/214/215	D-MOS FET Switch N-Channel Enhancement	463
SD300/303/304	D-MOS FET Dual Gate N-Channel Enhancement	468
SD305/306	D-MOS FET Dual Gate N-Channel Enhancement	475
SD5000/5001/5002	D-MOS FET Quad Analog Switch Arrays and Multiplexers	484
SG1524/2524/3524	Regulating Pulse Width Modulator	161
TBA120S	8-Stage Amplifier with Balanced Demodulator	398
TBA1440G/1441G	TV Video Amplifier with Demodulator	401
TCA440	AM Receiver Circuit	381
ULN2001/2003/2004	High Voltage/High Current Darlington Transistor Arrays	236
ULN2211	2-Watt TV/FM Sound Channel	405
μA723/723C/SA723C	Precision Voltage Regulator	169
μA733/733C	Differential Video Amplifier	143
μA741/741C/SA741C	General Purpose Operational Amplifier	119
μA747/747C/SA747C	Dual Operational Amplifier	124
μA748/748C	General Purpose Operational Amplifier	130
μA758	FM Stereo Multiplex Decoder, Phase Locked Loop	388
75S107	High Speed Dual Line Receiver	256
75S108	High Speed Dual Line Receiver	259
75S207	High Speed Dual Sense Amplifier for MOS Memories	263
75S208	High Speed Dual Sense Amplifier for MOS Memories	266

Note

*This data sheet may be obtained by writing Publication Services at Signetics, 811 E. Argues, M/6027, Sunnyvale, California 94086, or by calling (408) 746-2111.

SALES OFFICES

SIGNETICS

HEADQUARTERS

811 East Arques Avenue
P.O. Box 409
Sunnyvale, California 94086
Phone: (408) 739-7700

ALABAMA
Huntsville
Phone: (205) 837-5150

ARIZONA
Phoenix
Phone: (602) 265-4444

CALIFORNIA
Canoga Park
Phone: (213) 340-1431
Cupertino
Phone: (408) 725-8100
Inglewood
Phone: (213) 670-1101
Irvine
Phone: (714) 833-8980
(213) 588-3281
San Diego
Phone: (714) 560-0242

COLORADO
Aurora
Phone: (303) 751-5011

CONNECTICUT
Danbury
Call: Kanan, Danbury
Phone: (203) 743-1812

DELAWARE
Call: Micro-Comp, Baltimore
Phone: (301) 247-0400

FLORIDA
Lighthouse Point
Phone: (305) 782-8225

GEORGIA
Atlanta
Phone: (404) 396-1410

ILLINOIS
Schaumburg
Phone: (312) 843-7805

INDIANA
Kokomo
Phone: (317) 455-0299

KANSAS
Overland Park
Phone: (913) 492-3398

MASSACHUSETTS
Bedford
Phone: (617) 275-8900

MINNESOTA
Edina
Phone: (612) 835-7455

NEW JERSEY
Cherry Hill
Phone: (609) 665-5071
Piscataway
Phone: (201) 981-0126

NEW YORK
Melville
Phone: (516) 752-0130
Wappingers Falls
Phone: (914) 297-4074

NORTH CAROLINA
Cary
Phone: (919) 469-3365

OHIO
Worthington
Phone: (614) 888-7143

TEXAS
Austin
Phone: (512) 458-2591
Dallas
Phone: (214) 661-1296

UTAH
Bountiful
Phone: (801) 298-2624

CANADA
SIGNETICS CANADA, LTD.
Etobicoke, Ontario
Phone: (416) 626-6676
SIGNETICS CANADA, LTD./LTEE.
Pointe-Claire, Quebec
Phone: (514) 697-3385

REPRESENTATIVES

ALABAMA
Huntsville
Electronic Sales, Inc.
Phone: (205) 533-1735

CALIFORNIA
Los Gatos
Sierra Technology
Phone: (408) 354-9986
San Diego
Mesa Engineering
Phone: (714) 278-8021

CONNECTICUT
Danbury
Kanan Associates
Phone: (203) 743-1812

FLORIDA
Altamonte Springs
Semtronic Associates
Phone: (305) 831-8233
Clearwater
Semtronic Associates
Phone: (813) 461-4675

ILLINOIS
Elk Grove Village
Micro-Tex, Inc.
Phone: (312) 640-9633

INDIANA
Fort Wayne
Insul-Reps, Inc.
Phone: (219) 482-1596
Indianapolis
Insul-Reps, Inc.
Phone: (317) 259-4431

IOWA
Cedar Rapids
Comstrand Inc.
Phone: (319) 377-1575

KANSAS
Shawnee Mission
B. C. Electronic Sales
Phone: (913) 888-6680
Wichita
B. C. Electronic Sales
Phone: (316) 684-0051

MARYLAND
Baltimore
Micro-Comp, Inc.
Phone: (301) 247-0400

MASSACHUSETTS
Reading
Kanan Associates
Phone: (617) 944-8484

MICHIGAN
Bloomfield Hills
Enco Marketing
Phone: (313) 642-0203

MINNESOTA
Edina
Mel Foster Technical Sales
Phone: (612) 835-2252

MISSOURI
St. Louis
B. C. Electronic Sales
Phone: (314) 731-1255

NEVADA
Sierra Technology
Phone: (408) 354-9986

NEW YORK
Ithaca
Bob Dean, Inc.
Phone: (607) 272-2187

OHIO
Cleveland
Norm Case Associates
Phone: (216) 333-4120
Dayton
Norm Case Associates
Phone: (800) 362-6631

OKLAHOMA
Tulsa
Cunningham Co.
Phone: (918) 492-0390

OREGON
Hillsboro
Western Technical Sales
Phone: (503) 640-4621

TEXAS
Austin
Cunningham Co.
Phone: (512) 459-8947
Dallas
Cunningham Co.
Phone: (214) 233-4303
Houston
Cunningham Co.
Phone: (713) 461-4197

VIRGINIA
Lynchburg
Micro-Comp, Inc.
Phone: (804) 237-6221

WASHINGTON
Bellevue
Western Technical Sales
Phone: (206) 641-3900

WASHINGTON, D.C.
Call: Micro-Comp, Baltimore
Phone: (301) 247-0400

WISCONSIN
Waukesha
Micro-Tex, Inc.
Phone: (414) 542-5352

DISTRIBUTORS

ALABAMA
Huntsville
Hamilton/Avnet Electronics
Phone: (205) 837-7210
Pioneer Electronics
Phone: (205) 837-9300

ARIZONA
Phoenix
Hamilton/Avnet Electronics
Phone: (602) 894-9600
Wyle Distribution Group
Phone: (602) 249-2232

CALIFORNIA
Costa Mesa
Avnet Electronics
Phone: (714) 754-6111
Hamilton Electro Sales
Phone: (714) 641-4100
Culver City
Hamilton/Avnet Electronics
Phone: (213) 558-2121
Hamilton/Avnet Electronics
Military
Phone: (213) 558-2901
El Segundo
Wyle Distribution Group
Phone: (213) 322-8100
Irvine
Schweber Electronics
Phone: (714) 556-3880
Wyle Distribution Group
Phone: (714) 641-1600
San Diego
Hamilton/Avnet Electronics
Phone: (714) 571-7510
Wyle Distribution Group
Phone: (714) 565-9171
San Jose
Anthem Electronics Inc.
Phone: (408) 946-8000
Santa Clara
Schweber Electronics
Phone: (408) 496-0200
Wyle Distribution Group
Phone: (408) 727-2500
Sunnyvale
Arrow Electronics
Phone: (408) 739-3011
Hamilton/Avnet Electronics
Phone: (408) 743-3355

CANADA
Calgary, Alberta
Cam Gard Supply Ltd.
Phone: (403) 287-0520
Downsview, Ontario
Cesco Electronics
Phone: (416) 661-0220
Mississauga, Ontario
Hamilton/Avnet Electronics
Phone: (416) 677-7432
Zentronics
Phone: (416) 676-9000
Montreal, Quebec
Cesco Electronics
Phone: (514) 735-5511
Zentronics
Phone: (514) 735-5361

Ottawa, Ontario
Cesco Electronics
Phone: (613) 729-5118
Hamilton/Avnet Electronics
Phone: (613) 226-1700
Zentronics Ltd.
Phone: (613) 238-6411

Quebec City
Cesco Electronics
Phone: (418) 524-4641

Vancouver, B.C.
Cam Gard Supply Ltd.
Phone: (604) 291-1441

Ville St. Laurent, Quebec
Hamilton/Avnet Electronics
Phone: (514) 331-6443

Winnipeg, Manitoba
Cam Gard Supply Ltd.
Phone: (204) 786-8481

COLORADO

Denver
Arrow Electronics
Phone: (303) 758-2100
Wyle Distribution Group
Phone: (303) 457-9953

Inglewood
Hamilton/Avnet Electronics
Phone: (303) 740-1000

CONNECTICUT

Danbury
Hamilton/Avnet Electronics
Phone: (203) 797-2800
Schweber Electronics
Phone: (203) 792-3500

Wallingford
Arrow Electronics
Phone: (203) 265-7741

FLORIDA

Ft. Lauderdale
Arrow Electronics
Phone: (305) 776-7790
Hamilton/Avnet Electronics
Phone: (305) 971-2900

Hollywood
Schweber Electronics
Phone: (305) 927-0511

Palm Bay
Arrow Electronics
Phone: (305) 725-1480

St. Petersburg
Hamilton/Avnet Electronics
Phone: (813) 576-3930

GEORGIA

Atlanta
Schweber Electronics
Phone: (404) 449-9170

Norcross
Arrow Electronics
Phone: (404) 449-8252
Hamilton/Avnet Electronics
Phone: (404) 448-0800

ILLINOIS

Chicago
Bell Industries
Phone: (312) 982-9210

Elk Grove
Schweber Electronics
Phone: (312) 364-3750

Schaumburg
Arrow Electronics
Phone: (312) 893-9420

Schiller Park
Hamilton/Avnet Electronics
Phone: (312) 671-4787

INDIANA

Indianapolis
Pioneer Electronics
Phone: (317) 849-7300
Arrow Electronics
Phone: (317) 243-9353
Hamilton/Avnet Electronics
Phone: (317) 844-9333

KANSAS

Overland Park
Hamilton/Avnet Electronics
Phone: (913) 888-1051

MARYLAND

Baltimore
Arrow Electronics
Phone: (301) 247-5200

Gaithersburg
Pioneer Washington Electronics
Phone: (301) 948-0710
Schweber Electronics
Phone: (301) 840-5900

Hanover
Hamilton/Avnet Electronics
Phone: (301) 796-5000

MASSACHUSETTS

Bedford
Schweber Electronics
Phone: (617) 275-5100

Burlington
Lionex Corp.
Phone: (617) 272-9400

Woburn
Arrow Electronics
Phone: (617) 933-8130
Hamilton/Avnet Electronics
Phone: (617) 273-7500

MICHIGAN

Ann Arbor
Arrow Electronics
Phone: (313) 971-8220

Livonia
Hamilton/Avnet Electronics
Phone: (313) 522-4700
Pioneer Electronics
Phone: (313) 525-1800
Schweber Electronics
Phone: (313) 525-8100

MINNESOTA

Eden Prairie
Schweber Electronics
Phone: (612) 941-5280

Edina
Arrow Electronics
Phone: (612) 830-1800
Hamilton/Avnet Electronics
Phone: (612) 941-3801

MISSOURI

Earth City
Hamilton/Avnet Electronics
Phone: (314) 344-1200

NEW HAMPSHIRE

Manchester
Arrow Electronics
Phone: (603) 668-6968

NEW JERSEY

Cherry Hill
Hamilton/Avnet Electronics
Phone: (609) 424-0100

Fairfield
Hamilton/Avnet Electronics
Phone: (201) 575-3390
Schweber Electronics
Phone: (201) 227-7880

Moorestown
Arrow Electronics
Phone: (609) 235-1900

Saddlebrook
Arrow Electronics
Phone: (201) 797-5800

NEW MEXICO

Albuquerque
Hamilton/Avnet Electronics
Phone: (505) 765-1500

NEW YORK

Buffalo
Summit Distributors
Phone: (716) 887-2837

East Syracuse
Arrow Electronics
Phone: (315) 652-1000
Hamilton/Avnet Electronics
Phone: (315) 437-2642

Farmingdale, L.I.
Arrow Electronics
Phone: (516) 694-6800

Liverpool
Arrow Electronics
Phone: (315) 652-1000

Melville
Hamilton/Avnet Electronics
Phone: (516) 545-6012

Rochester
Arrow Electronics
Phone: (716) 275-0300
Hamilton/Avnet Electronics
Phone: (716) 475-9130
Schweber Electronics
Phone: (716) 424-2222

Westbury, L.I.
Schweber Electronics
Phone: (516) 334-7474

NORTH CAROLINA

Greensboro
Pioneer Electronics
Phone: (919) 273-4441

Raleigh
Hamilton/Avnet Electronics
Phone: (919) 829-8030

Winston-Salem
Arrow Electronics
Phone: (919) 725-8711

OHIO

Beechwood
Schweber Electronics
Phone: (216) 464-2970

Cincinnati
Arrow Electronics
Phone: (513) 761-5432

Cleveland
Hamilton/Avnet Electronics
Phone: (216) 831-3500
Pioneer Standard Electronics
Phone: (216) 587-3600

Centerville
Arrow Electronics
Phone: (513) 435-5563

Dayton
Hamilton/Avnet Electronics
Phone: (513) 433-0610
Pioneer Standard Electronics
Phone: (513) 236-9900

Reading
Arrow Electronics
Phone: (513) 761-5432

Solon
Arrow Electronics
Phone: (216) 248-3990

OREGON

Lake Oswego
Hamilton/Avnet Electronics
Phone: (503) 635-8831

PENNSYLVANIA

Horsham
Schweber Electronics
Phone: (215) 441-0600

Pittsburgh
Arrow Electronics
Phone: (412) 351-4000
Pioneer/Pittsburgh
Phone: (412) 782-2300

TEXAS

Austin
Hamilton/Avnet Electronics
Phone: (512) 837-8911
Quality Components
Phone: (512) 835-0220

Dallas
Hamilton/Avnet Electronics
Phone: (214) 661-8661
Quality Components
Phone: (214) 387-4949
Schweber Electronics
Phone: (214) 661-5010

Houston
Hamilton/Avnet Electronics
Phone: (713) 780-1771
Quality Components
Phone: (713) 772-7100
Schweber Electronics
Phone: (713) 784-3600

UTAH

Salt Lake City
Hamilton/Avnet Electronics
Phone: (801) 972-4300

WASHINGTON

Bellevue
Hamilton/Avnet Electronics
Phone: (206) 453-5844
Wyle Distribution Group
Phone: (206) 453-8300

Tukwila/Seattle
Arrow Electronics
Phone: (206) 575-0907

WISCONSIN

Oak Creek
Arrow Electronics
Phone: (414) 764-6600

New Berlin
Hamilton/Avnet Electronics
Phone: (414) 784-4510

FOR SIGNETICS PRODUCTS WORLDWIDE:

ARGENTINA
Fapesa I.y.C.
Buenos-Aires
Phone: 652-7438/7478

AUSTRALIA
Philips Industries-ELCOMA
Lane-Cove, N.S.W.
Phone: (02) 427-0888

Queensland
Brisbane
(07) 277-3332

South Australia
Adelaide
(08) 45-0211

Victoria
Melbourne
(03) 699-0300

Western Australia
Perth
(09) 277-4199

AUSTRIA
Osterrichische Philips
Wien
Phone: 93 26 22

BELGIUM
M.B.L.E.
Brussels
Phone: 523 00 00

BRAZIL
Ibrape Electronica Ltda.
Sao Paulo
Phone: (011) 211-2600

CHILE
Philips Chilena S.A.
Santiago
Phone: 39-4001

COLOMBIA
Sadape S.A.
Bogota
Phone: 600600

DENMARK
Miniwatt A/S
Kobenhavn
Phone: (01) 69 16 22

FINLAND
Oy Philips Ab
Helsinki
Phone: 1 72 71

FRANCE
R.T.C.
Paris
Phone: 355-44-99

GERMANY
Valvo
Hamburg
Phone: (040) 3296-1

GREECE
Philips S.A. Hellenique
Athens
Phone: 915 311

HONG KONG
Philips Hong Kong, Ltd.
Hong Kong
Phone: 12-245121

INDIA
Peico Electronics & Elect. Ltd.
Elcoma Div.
Bombay
Phone: 295-144

INDONESIA
P.T. Philips-Ralin Electronics
Jakarta
Phone: 581058

ISRAEL
Rapac Electronics, Ltd.
Tel Aviv
Phone: 477115-6-7

ITALY
Philips S.p.A.
Milano
Phone: 2-6994

JAPAN
Signetics Japan, Ltd.
Tokyo
Phone: (03) 230-1521

KOREA
Philips Elect Korea Ltd.
Seoul
Phone: 44-4202

MEXICO
Electronica S.A. de C.V.
Mexico D.F.
Phone: 533-1180

NETHERLANDS
Philips Nederland B.V.
Eindhoven
Phone: (040) 79 33 33

NEW ZEALAND
Philips Electrical Ind. ELCOMA
Auckland
Phone: 867119

NORWAY
Electronica A.S.
Oslo
Phone: (02) 15 05 90

PERU
Cadesa
Lima
Phone: 628599

PHILIPPINES
Philips Industrial Dev., Inc.
Makata-Rizal
Phone: 868951-9

PORTUGAL
Philips Portuguesa SARL
Lisbon
Phone: 68 31 21

SINGAPORE/MALAYSIA
Philips Singapore Pte., Ltd.
Singapore
Phone: 538811

SOUTH AFRICA
E.D.A.C. (PTY), Ltd.
Johannesburg
Phone: 24-6701-3

SPAIN
Copresa S.A.
Barcelona
Phone: 329 63 12

SWEDEN
Elcoma A.B.
Stockholm
Phone: 08/67 97 80

SWITZERLAND
Philips A.G.
Zurich
Phone: 01/44 22 11

TAIWAN
Philips Taiwan, Ltd.
Taipei
Phone: (02) 563-1717

THAILAND
Saeng Thong Radio, Ltd.
Bangkok
Phone: 34985/36980

UNITED KINGDOM
Mullard, Ltd.
London
Phone: 01-580-6633

UNITED STATES
Signetics International Corp.
Sunnyvale, California
Phone: (408) 739-7700

URUGUAY
Luzilectron SA
Montevideo
Phone: 943 21

VENEZUELA
Industrias Venezolanas Philips S.A.
Caracas
Phone: 239-8180

SIGNETICS
LINEAR TECHNOLOGY
FAMILY TREE

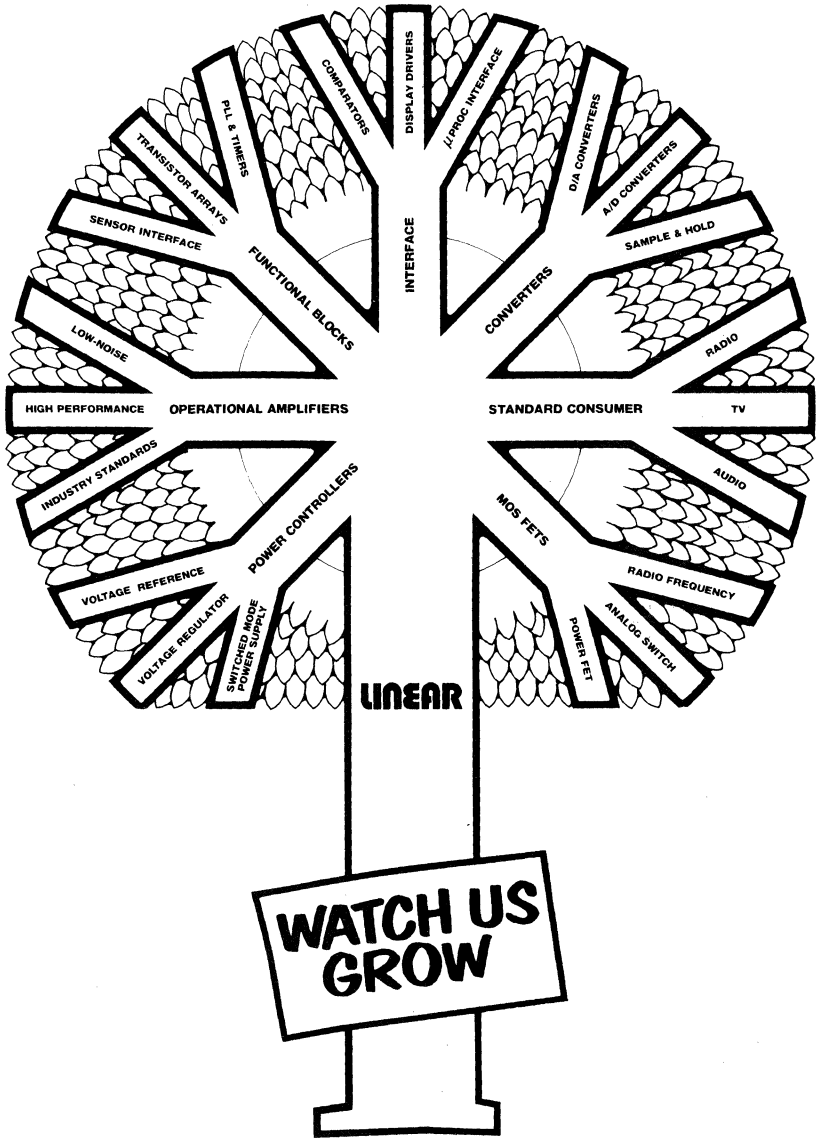

signetics

a subsidiary of **U.S. Philips Corporation**

Signetics Corporation
811 East Arques Avenue
P.O. Box 409
Sunnyvale, California 94086
Telephone 408/739-7700

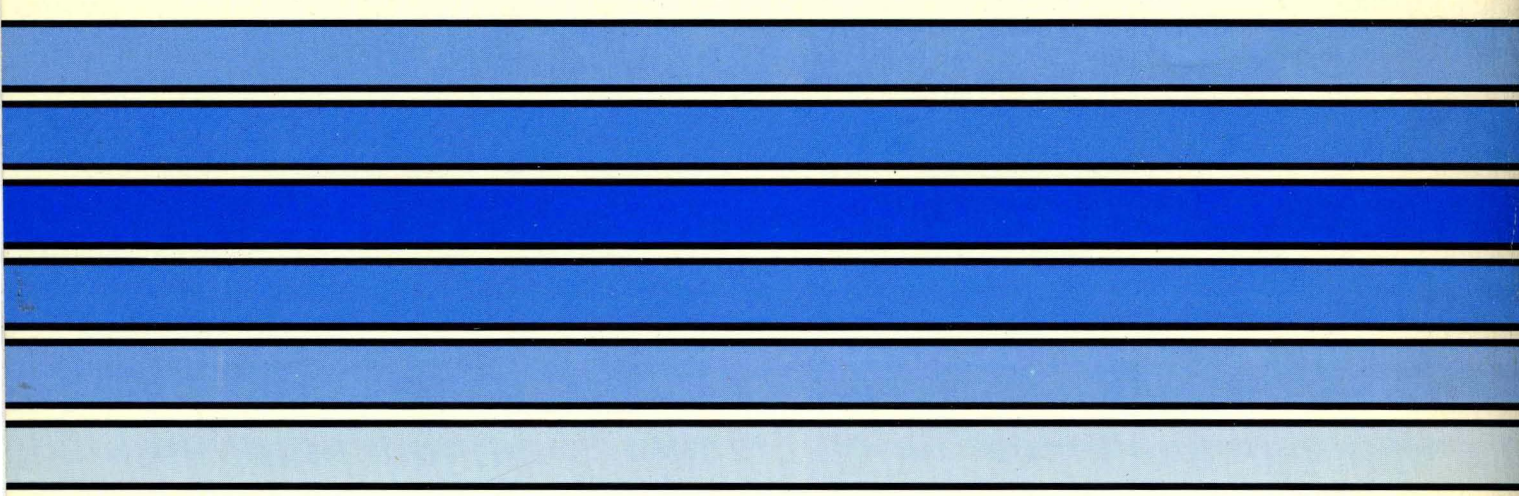

400020A

© Copyright 1980 Signetics Corporation
Printed in USA 2M1180