



ION Meter and EEM screen cap, page DE13-6



CM3000 and Advanced Reports Screen, page DE13-9



Sepam Series 80, page DE13-22

Description	Page
PowerLogic® Energy and Power Management Systems	
Introduction	13-2, 13-3
PowerLogic ION Enterprise Operations Software Overview	13-4
PowerLogic ION Enterprise Software Ordering Information	13-5
PowerLogic ION Power & Energy Meter Selection	13-5
PowerLogic ION Power and Energy Meters	13-6
ION8600	13-6
ION7550/7650	13-6
ION7350/7330/7300	13-7
ION6200	13-7
PowerLogic System Manager Software Operations Overview	
SMS Ordering Information	13-8
PowerLogic Circuit Monitor and Power Meter Selection	13-8
PowerLogic Metering	13-9
Series 800 Power Meter	13-9
Series 3000 Circuit Monitor	13-9
Series 4000 Circuit Monitor	13-10
PowerLogic Submetering	
Energy Meter	13-12
Enercept® Meter	13-12
Split Core Current Transformers	13-12
Branch Current Monitor	13-13
Multi-Circuit Meter	13-13
Submeter Display	13-13
PowerLogic ION EEM Enterprise Energy Management Software	13-14
PowerLogic Solutions for Utilities	13-15
PowerLogic Energy Profiler Online	13-16
Web-Enabled Network Components	
Ethernet Gateways	13-17
Web Page Generator	13-17
Engineering Services	
Consulting & Analysis	13-18
Energy Action	13-19
Power System Automation	13-19
System Integration	13-19
Factory Assembled Enclosures	13-20
Technical Support	13-21
Power Management University	13-21

Sepam Digital Protective Relays

Series 80, 40 & 20 Features	13-22
Series 80, 40 & 20 Applications	13-23
Series 80, 40 & 20 Pricing and Accessories	13-24
Selection Example	13-25

Power Monitoring & Control

PowerLogic®

Icebergs. Typically, we think of them as huge peaks rising above the water. In reality, the majority of an iceberg is actually under the water, out of view. Utility savings at most facilities can be thought of in much the same way.

Think of your utility bills as being the peak, easy to see every month. By simply installing a PowerLogic energy and power management system, you can realize a 2–4% savings—but that's just the "tip of the iceberg" in terms of your potential savings.

The majority of savings, using a PowerLogic system, can be derived by looking beyond a utility bill—or *below the surface*. An additional 2–5% can be saved through better equipment utilization and avoiding unnecessary capital purchases.

Another 10% can be found in power system reliability. PowerLogic systems give you the power to achieve this kind of savings, resulting in a quick return on your investment.



POWER MONITORING
AND CONTROL
DE13

Reduce Utility Costs	Optimize Equipment Utilization	Improve Reliability
Meter Application <ul style="list-style-type: none"> Auto meter reading and energy monitoring Revenue Metering WAGES pulses Tenant Sub-metering Cost Allocation & Utility Billing <ul style="list-style-type: none"> Interval Benchmarking & Profiling Allocate Energy Costs Total Load Aggregation Utility Bill Reconciliation Utility Reduction Implementation & Services <ul style="list-style-type: none"> Total Energy Control Services Power Factor Correction Lighting Control Load Shedding/Sequencing Peak Shaving/Generator Control 	Facility Planning <ul style="list-style-type: none"> Identify Equipment Capacity Determine Transformer Stress Maximize Equipment Life Improve Efficiency <ul style="list-style-type: none"> Balance Circuit Loading Improve Power Factor Balance Generator Efficiency & Usage Optimize Chiller & Mechanical Improve Maintenance Practices <ul style="list-style-type: none"> Equipment Monitoring: transformers, MCCs, switchgear, switchboards, circuit breaker status, protective equipment, capacitors, generators, panelboards, PDU, UPS, utility meter pulses 	System Monitoring & Analysis <ul style="list-style-type: none"> Transient Voltage Disturbances Power Quality & Harmonics Power System Automation <ul style="list-style-type: none"> Auto Throw Over (ATO) Systems Load preservation Preventative Maintenance <ul style="list-style-type: none"> Emergency Power Supply System Documentation Remote Alarm Notification Advanced Diagnostics <ul style="list-style-type: none"> Sequence of Events GPS Time Stamping Root Cause Analysis Power System Engineering & Consulting <ul style="list-style-type: none"> Safety & Code Compliance Electrical Distribution System Assessment System Studies

At Schneider Electric, we pride ourselves on reliable products, innovative systems, expert engineering services, and our ability to provide single-source energy and power management solutions. It's not just a concept to us, it's a legacy and a promise—for companies that seek an edge in productivity. That's why leaders turn to Schneider Electric.

The New PowerLogic System

As the key component of Schneider Electric's smart energy efficiency offering, the Schneider Electric PowerLogic system now consists of the most complete energy and power management portfolio available.

Backed by experienced power system experts, and offering the most comprehensive range of technical support and engineering services, we are ready to handle your energy efficiency and reliability challenges. Our recent acquisition of Power Measurement has both doubled our resources and increased the breadth of needs that can be solved by leading-edge Schneider Electric PowerLogic solutions. Our total solution approach includes a range of products from simply configurable to highly flexible with ION® technology options for building and customizing solutions for your business.

The PowerLogic system acts like a layer of energy and power intelligence across all of your power equipment and piped utility assets, helping you meter and monitor all types of energy and, in turn, reduce energy costs, optimize equipment utilization and improve system reliability performance.

A tightly integrated network of software and meters can span a single facility or an entire multi-site enterprise. The system monitors key points from the circuit breaker and equipment throughout the power delivery chain, 24 hours a day, from generators and substations to service entrances, mains, feeders and individual branch circuits.

At the administrative level, PowerLogic acts as a web portal, delivering timely, relevant information to anyone that needs it, anywhere they are. Advanced analytic tools enable effective decisions, while coordinated control capabilities help you act on them. Together, this represents a fast and quantifiable return on investment.



Schneider Electric

The PowerLogic Advantage

Schneider Electric has decades of experience in delivering energy and power management solutions to thousands of customers, including most of the Fortune 500. We are a complete single-source provider that can fully integrate energy and power management with power distribution and automation solutions.

- PowerLogic is innovative technology featuring enterprise-level features such as energy modeling, web-enabled communications and the world's most advanced line of energy and power quality instrumentation.
- PowerLogic supports industry standards, including accuracy certifications, power quality compliance standards, and measurement and verification protocols.
- PowerLogic is scalable; take advantage of modular applications and hardware to add or upgrade components easily and affordably.
- PowerLogic fits perfectly with other business, automation, metering or billing systems.
- PowerLogic represents a low cost of installation and ownership; systems are cost-effective, feature-rich, easy to use, and supported by extensive services that ensure you get the most from your solution.

Reduce Energy Costs

Optimize Equipment

Improve System Reliability

Your **ROI** Solution Partner



Power Monitoring & Control

PowerLogic® PowerLogic ION Enterprise® Operations Software




PowerLogic ION Enterprise Operations Software is an all-in-one package for operational power system monitoring, analysis and control that helps you reduce energy-related costs. It offers control capabilities, comprehensive power quality and reliability analysis and helps reduce energy related costs. The software is a suite of applications that allows you to collect, process, analyze, store, and share data across your entire enterprise. PowerLogic ION Enterprise software is designed to give you the information and analysis tools you need to make sound decisions. Its cutting-edge flexibility and compatibility allow you to extend your energy management system at your own pace, adding newer components as they become available, without interrupting or impacting existing functions. PowerLogic ION Enterprise collects data through serial, wireless, modem or Ethernet links and can manage a single site or, through the Internet, connect a global network of devices.


Interface to existing software systems and integrate third-party equipment, leveraging support for a variety of industry-standard protocols. ION Enterprise also enables you to access information from any desktop, locally or around the world, in the format you need. Control of your system is always within easy reach. Thanks to patented ION technology, you get out-of-the box usability, plus you can quickly add or rearrange functions with drag-and-drop icons and a few clicks of a mouse.

PowerLogic ION Enterprise Operations Software is ideal for energy suppliers and energy consumers and provides powerful tools for:

- Power quality and reliability analysis
- Load studies and circuit optimization
- Demand and power factor control
- Equipment monitoring and control
- Preventative maintenance
- Cost allocation and billing

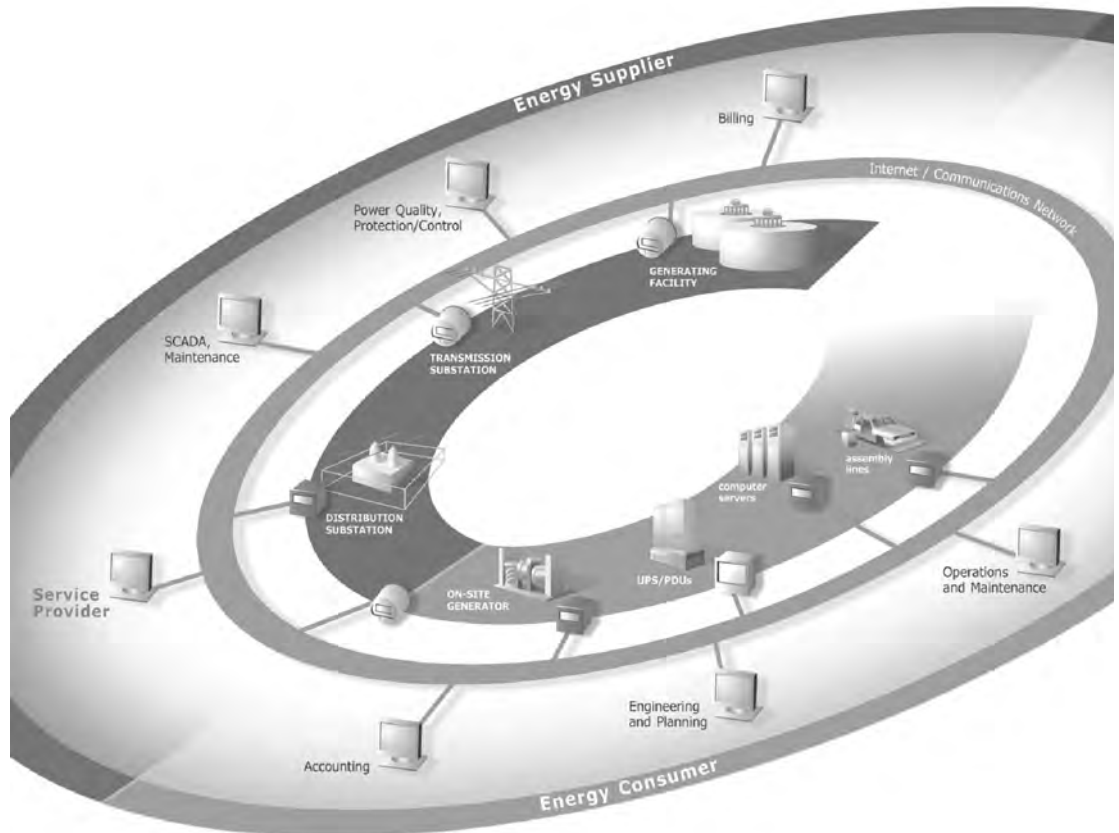


POWER MONITORING
AND CONTROL
DE13



Respond to notifications, click an indicator to retrieve the time, location, and nature of the event. Click again to study tolerance curves, waveforms, or a report.



Control loads, generation, and power quality mitigation equipment. Optimize switching with the latest status and base loading data.

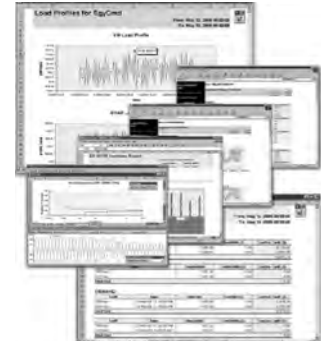

Allocate costs, consolidate billing or negotiate contract volume pricing. Assure compliance with PQ standards and verify operational progress.

PowerLogic ION Enterprise® Software Ordering Information/Meter Selection

PowerLogic ION Enterprise Software Ordering Information

Description	Catalogue No.	Price
Core Software Products▲		
ION Enterprise Base software ION Enterprise Device license (For 100+ devices, please call the factory for volume pricing) ION Enterprise Client license OPC Server support for ION Enterprise SQL Server 2005 bundle option (CD and 1-CPU license) SQL Server 2005 additional CPU license	IONE56BASE IONE56DL IONE56CL IONEOPCV1 IONESQL2005 IONESQL2005CPU	
Upgrades from PowerLogic ION Enterprise 5.5		
ION Enterprise Base Upgrade ION Enterprise Device upgrade ION Enterprise Client license upgrade	IONE56UPGRADE IONE56DLUPG IONE56CLUPG	
Related Items		
ION Enterprise Replacement CD ION Enterprise 5.5 Software Documentation Binder ION Enterprise 5.5 Administrator Guide ION Enterprise 5.5 Client User Guide	IONE56REPCD DOC-BINDERIE5 DOC-UGUIDE204 DOC-UGUIDE205	

▲ Every new system must be ordered with 1 IONE55-Base software and a minimum of 5 IONE55-DL device licenses.

PowerLogic ION Power and Energy Meter Selection

Features■	ION8600			ION7650	ION7550	ION7350	ION7330	ION7300	ION6200
	A	B	C						
Inputs, outputs and control power									
3-phase / single-phase	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•
Digital in and out / analog in and out	16 / 4	16 / 4	16 / 4	20 / 8	20 / 8	8 / 8	8 / 8	4 / 8	2 /
Power supply options	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC
Power and energy measurements									
V, I, F, PF	•	•	•	•	•	•		•	
Power, demand	•	•	•	•	•	•	•	•	•
Energy / time-of-use (energy per shift)	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/
ANSI energy accuracy class (% of reading)	0.2	0.2	0.2	0.5	0.5	0.5	0.5		
Measurement Canada Approval	•			•	•	•	•		
Loss compensation	•	•	•	•	•				
Power quality analysis									
Compliance monitoring (e.g. EN50160)	•			•					
Flicker measurement	•			•					
Transient disturbance capture	•			•					
Sag and swell monitoring	•	•	•	•	•	•			
Harmonics measurement	63 rd	63 rd	31st	63 rd	63 rd	31st	15th	15th	THD
Uptime (number of 9's) calculation	•	•	•	•	•	•	•	•	
Waveform capture	•			•	•	•			
Data and event logging									
Trend / snapshot	•/•	•/•	•/•	•/•	•/•	•	•		
Min/max	•	•	•	•	•	•	•		
Events	•	•	•	•	•	•	•		
Timestamp resolution (seconds)	0.001	0.001	0.001	0.001	0.001	0.001	0.001		
GPS sync	•	•	•	•	•				
Setpoints, alarms and control									
Annunciation / call out on alarm	•/•	•/•	•/•	•/•	•/•	•/•	•		
Trigger logging	•	•	•	•	•	•	•		
Trigger relay or digital output control	•	•	•	•	•	•	•		
Special features									
Custom programming: arithmetic, boolean, object-oriented	•	•	•	•	•	•	•		
Downloadable firmware	•	•	•	•	•	•	•	•	•
Communications									
Ethernet port / web / email	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/	•/ /
Telephone modem port	•	•	•	•	•	•	•		
Infrared port	•	•	•	•	•	•	•	•	
RS485 / RS232 ports	•/•	•/•	•/•	•/•	•/•	•/	•/	•/	•/
Modbus / DNP / MV-90 protocols	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/ /	•/ /

■ Specifications represent maximum capabilities with all options installed. Some options are not available concurrently. This is not a complete feature list, please refer to detailed product specifications.

Power Monitoring & Control

PowerLogic® ION8600/7550/7650 Power and Energy Meters

ION8600/7550/7650 Power and Energy Meters

The web-enabled PowerLogic ION8600 is used to monitor electric distribution networks, service entrances and substations. It enables businesses to manage complex energy supply contracts that include power quality guarantees. Low-range current accuracy makes it ideal for independent power producers and cogeneration applications that require the accurate bi-directional measurement of energy. It is well suited to load curtailment, equipment monitoring and control and energy pulsing and totalization applications. Integrate it with PowerLogic ION EEM enterprise energy management software, PowerLogic ION Enterprise operations software or other energy management and SCADA systems.

PowerLogic ION8600 Power and Energy Meter Features



Feature set C includes:

- 9S, 39S, 35S, 36S, 76S socket and switchboard cases
- True RMS 3-phase voltage, current, power and meets stringent ANSI revenue metering standards including ANSI C12.20 0.2 and Class 2, 10, & 20
- Power quality: sag/swell, individual, even, odd, total harmonics to the 31st and symmetrical components
- 2MB log/event memory, min/max for any parameter, historical logs up to 32 channels, timestamp resolution to 0.001 seconds and GPS time synchronization
- Transformer/line loss compensation and instrument transformer correction
- Communications: Fiber, Ethernet, Serial, Modem, Internet and Ethernet to serial gateway and ION, DNP 3.0, Modbus RTU, Modbus TCP and MV-90 protocols
- Dial-out capability when memory is near full
- Multi-user, multi-level security with control and customized access to sensitive data for up to 16 users
- Data push capability through SMTP (email)
- 65 setpoints — math, logic, trig, log, linearization formulas

- Password protection and anti-tamper seal protection
- Built-in I/O: 4 KYZ digital outs and 3 form A digital ins, an optional external I/O expander provides additional I/O

Feature set B adds the following to feature set C:

- Harmonics - individual, total even, total odd up to the 63rd
- 4MB standard memory
- Historical logs up to 320 channels
- Modbus RTU Master on serial ports
- Cycle setpoint minimum response time

Feature set A adds the following to feature sets C and B:

- Waveform capture up to 256 samples/cycle, PQ compliance monitoring, flicker to EN50160, IEC 6100-4-7/4-15 (also configurable to IEEE 519-1992, IEEE159, SEMI) CBEMA/ITIC
- Transient detection to 65µs at 60Hz;
- Harmonics: magnitude, phase and inter-harmonics to the 40th
- 10MB standard memory
- Max 96 cycles of waveform logs and 800 channels of historical logs

Note: Please refer to powerlogic.com for the most complete and up-to-date list of feature availability. Some features are optional.

Typical PowerLogic ION8600 Power and Energy Meter Ordering Configurations

Description	Catalogue No.	Price
ION8600, feature set A, 9S socket base, 5A nominal current inputs, auxiliary power pigtail: 65-120Vac/80-160Vdc, 60 Hz, communications card with: 10baseT Ethernet — RS-232/485 — Optical, RS-485	P8600A0C0H6E0A0A	
ION8600, feature set B, 9S socket base, 5A nominal current inputs, auxiliary power pigtail: 65-120Vac/80-160Vdc, 60 Hz, communications card with: 10baseT Ethernet — Optical, RS-485	P8600B0C0H6E0A0A	
ION8600, feature set B, 9S socket base, 5A nominal current inputs, auxiliary power pigtail: 65-120Vdc/80-160Vac, 60 Hz, communications card with: RS-232/485, RS-485, Optical port, standard I/O	P8600C0C0H6A0A0A	

PowerLogic ION7550 and ION7650 Power and Energy Meters

Used at key distribution points and sensitive loads, the web-enabled PowerLogic ION7550 and PowerLogic ION7650 meters combine a wealth of advanced features from power quality analysis capabilities, revenue accuracy and multiple communications options, through web compatibility, and control capabilities. Both are compatible with PowerLogic ION EEM enterprise energy management software, PowerLogic ION Enterprise operations software can be integrated with other energy management or building control systems through multiple communication channels and protocols.

The meters are ideal for compliance monitoring, disturbance analysis, cost allocation and billing, demand and power factor control and equipment monitoring and control. The meters have a high visibility, adjustable front panel display that can depict TOU, harmonics, event logs, phasers, and instantaneous power parameters. They meet stringent ANSI C12.20 0.2, Class 10 & 20 revenue metering standards.

PowerLogic ION7550 and ION7650 Power and Energy Meter Features



The PowerLogic ION7550 includes:

- 3.5" x 4.5" (87 x 112 mm) backlit LCD display
- True RMS 3-phase voltage, current, and power that meets stringent ANSI C12.20 0.2, Class 2, 10, & 20
- Power quality: sag/swell, harmonics - individual, even, odd, total to the 63rd, waveform capture at 256 samples/cycle
- 5MB log/event memory (10MB optional), waveform logging up to 96 cycles, up to 800 channels historical, min/max, timestamp resolution to 0.001 seconds, GPS time synchronization and historical trends through front panel
- Communications: fiber, Ethernet, serial, internal modem, optical port, and a gateway functionality, ION, DNP 3.0, Modbus RTU - master & slave, Modbus TCP and MV-90
- Dial-out capability when memory is near full
- Data push capability through SMTP (email)

- Multi-user, multi-level security with control and customized access to sensitive data for up to 16 users
- 65 configurable _ cycle setpoints for single, multi-condition and dial out on alarm and math, logic, trig, log, linearization formulas
- Password protection and anti-tamper seal protection enhance meter security
- Extensive standard I/O includes: 8 digital inputs, 4 digital outputs and 3 onboard relays

The ION7650 has all the features of the ION7550 and adds:

- Waveform capture up to 1024 samples/cycle
- Transient detection to 17µs at 60Hz
- Harmonics: magnitude, phase and inter-harmonics to the 40th
- Flicker to EN50160 and IEC 6100-4-7/4-15 (also configurable for IEEE 519-1992, IEEE159, SEMI), plus CBEMA/ITIC
- Symmetrical components

Note: Please refer to powerlogic.com for the most complete and up-to-date list of feature availability. Some features are optional.

Typical PowerLogic ION7550/7650 Power and Energy Meter Ordering Configurations

Description	Catalogue No.	Price
Typical PowerLogic ION7550 Power and Energy Meter Ordering Configurations		
Integrated display, with 512 samples/cycle, 5 MB logging memory, 5A inputs, standard power supply, standard comms. (1 RS232/RS485 port, 1 RS485, 1 Type 2 optical port) plus Ethernet, standard I/O	P7550A0C0B6E0A0A	
Integrated display, with 512 samples/cycle, 5 MB logging memory, 5A inputs, standard power supply, standard comms. (1 RS232/RS485 port, 1 RS485, 1 Type 2 optical port), standard I/O	P7550A0C0B6A0A0A	
Typical PowerLogic ION7650 Power and Energy Meter Ordering Configurations		
Integrated display, with 1024 samples/cycle, 10 MB logging memory, 5A inputs, standard power supply, standard comms. (1 RS232/RS485 port, 1 RS485, 1 Type 2 optical port) plus Ethernet, standard I/O, EN50160 compliance monitoring	P7650B1C0B6E0A0E	
Integrated display, with 512 samples/cycle, 5 MB logging memory, 5A inputs, standard power supply, standard comms. (1 RS232/RS485 port, 1 RS485, 1 Type 2 optical port) plus Ethernet, standard I/O	P7650A0C0B6E0A0A	

ION7350/7330/7300/6200 Power and Energy Meters



Used in diverse applications such as feeder monitoring and sub-metering, the PowerLogic ION7300 series meters are also suitable for high-accuracy power and energy metering, bill verification, cost allocation and billing, demand and power factor control, load studies, circuit optimization, equipment monitoring and control and preventative maintenance. They are ideal replacements for analog meters, with a multitude of power and energy measurements, analog and digital I/O, communication ports and industry-standard protocols. The ION7330 meter adds on-board data storage, emails of logged data and an optional modem. The ION7350 meter is further augmented by more sophisticated power quality analysis, alarms and a call-back-on-alarm feature. They are compatible with PowerLogic ION EEM enterprise energy management software, PowerLogic ION Enterprise operations software or can be integrated with other energy management or building control systems through multiple communication channels and protocols.

PowerLogic ION7350, ION7330 and ION7300 Power and Energy Meter Features

The PowerLogic ION7300 includes:

- Multiple form factors: transducer integrated and remote display models, GE S1 or ABB FT21 switchboard forms
- True RMS 3-phase voltage, current, and power that meets stringent ANSI C12.16, Class 10
- Power quality: harmonics - individual, even, odd, total to the 15th, maximum 32 samples/cycle
- Communications: 1 RS-485 port, 1 optional Ethernet port, 1 ANSI Type 2 infrared optical port, 1 PROFIBUS DP port (ION7300 only), onboard web server
- Supported protocols include: ION, Modbus RTU slave on serial, modem, I/R ports, Modbus TCP through Ethernet
- Extensive standard I/O includes: 4 analog inputs, 4 analog outputs, 4 digital relay outputs
- Minimum/maximum recording

The ION7330 adds the following features:

Time of use - multi-year scheduling, hourly activity profiles

- 4 digital inputs for status monitoring and pulse counting
- Communications: a second RS-485 port, internal modem, DNP 3.0 through serial, modem and I/R ports, EtherGate and ModemGate, data/alarms via e-mail and MV-90 on serial and Ethernet ports
- 12, one second setpoints for single, multi-condition alarms, plus math, logic, trig, log, and linearization formulas
- Non-volatile onboard memory capacity of 300kb, min/max logging, min/max logging, up to 32 channels of historical logs, timestamp resolution to 0.001 seconds

The ION7350 includes the following additional features:

- Power Quality: sag/swell, individual, even, odd, total harmonics up to 31st, maximum 64 samples/cycle
- Up to 96 channels of logs and up to 48 cycles of waveform logs
- Alarm notifications via e-mail

Typical PowerLogic ION7350/7330/7300 Power and Energy Ordering Configurations

Description	Catalogue No.	Price
Typical PowerLogic ION7350 Power and Energy Meter Ordering Configurations		
Integrated display with optical port, 5A inputs, standard power supply, standard comms, (two RS-485 ports) plus 10BaseT Ethernet	P7350A0B0B0E0A0A	
Integrated display with optical port, 5A inputs, standard power supply, standard comms, (two RS-485 ports)	P7350A0B0B0A0A0A	
Typical PowerLogic ION7330 Power and Energy Meter Ordering Configurations		
Integrated display with optical port, 5A inputs, standard power supply, standard comms, (two RS-485 ports) plus 10BaseT Ethernet	P7330A0B0B0E0A0A	
Integrated display with optical port, 5A inputs, standard power supply, standard comms, (two RS-485 ports)	P7330A0B0B0A0A0A	
Typical PowerLogic ION7300 Power and Energy Meter Ordering Configurations		
Integrated display with optical port, 5A inputs, standard power supply, standard comms, (one RS-485 port)	P7300A0B0B0A0A0A	



The modular PowerLogic ION6200 is a low-cost, ultra-compact meter that offers outstanding versatility and functionality. It is simple to use, and has a big, bright LED display. It offers four-quadrant power, demand, energy, power factor and frequency measurements, and is available in a variety of flexible configurations. It is available as a low-cost base model to which enhanced functionality can be added over the long term. The PowerLogic ION6200 is ideal for customers who need revenue-accurate and/or certified measurements and want easy integration with power distribution assemblies and building automation systems. A Megawatt version is available for applications requiring readings in megawatts and kilovolts. It is well suited for sub-metering, energy cost tracking load profiling, and substation panel metering and is an ideal replacement for analog meters. It can be used for stand-alone metering in custom panels, switchboards, switchgear, gensets, motor control centers and UPS systems.

The meter consists of a base unit with options card and a power supply pack, with a remote display being optional.

PowerLogic ION6200 Power and Energy Meter Features

- Only two inches deep, and fits a standard ANSI four-inch switchboard cutout, or as a TRAN model with no display and can be fastened to a flat surface with a 4" (10cm) ANSI bolt pattern or mounted to a DIN rail. A remote display module (RMD) can be ordered for the TRAN and mounted through an ANSI 4" (10cm) and DIN 96 cutout.
- LED display with twelve 3/4" (19mm) high digits that display all basic power parameters
- Pulse Outputs: optional kWh, kVARh and/or kVAh pulsing
- Via two Form A outputs
- Communications: optional RS-485 port with Modbus RTU and ION compatible
- 64 samples per cycle true RMS
- 3-phase voltage and current inputs

The standard ION6200 is available with the following parameters:

Voltage L-N average and per phase, Voltage L-L average and per phase, Current average and per phase

Option EP#1, includes the standard measurements and provides the following additional parameters:

I4, kW/mW total, kWh/mWh total, kW/mW peak, Current demand average and per phase, Current peak demand average and per phase, Power factor total

Optional Enhanced Package, includes the standard measurements and provides the following additional parameters:

kW/mW per phase, kVAR/mVAR total and per phase, kVA/mVA total and per phase, kWh/mWh and del/rec per phase, kVARh/mVARh total and del/rec per phase, kVAh/mVAh total and per phase, kW/mW demand, kVAR/mVAR demand and peak, kVA/mVA demand and peak, Power Factor per phase, Voltage THD per phase, Current THD per phase

Please refer to powerlogic.com for the most complete and up-to-date list of feature availability. Some features are optional.

Typical PowerLogic ION6200 Power and Energy Meter Ordering Configurations

Description	Catalogue No.	Price
Integrated display, 10A inputs, standard 100-240 Vac power supply, RS485 port (Modbus RTU), Enhanced Package #2	P6200A0A0B0A0A0R	
TRAN Model, with remote display, 10A inputs, standard 100-240 Vac power supply, RS485 port (Modbus RTU), Enhanced Package #2	P6200R1A0B0A0A0R	
TRAN Model, (no display), 10A inputs, standard 100-240 Vac power supply, RS485 port (Modbus RTU), Enhanced Package #2	P6200T1A0B0A0A0R	

Power Monitoring & Control

PowerLogic® SMS Ordering Information/Meter Selection

PowerLogic System Manager Software Ordering Information

Description	Catalogue No.	Price
Core Software Products		
System Mgr. Device Limited (1 web-enabled client, 16 devices, up to 32 devices with SMSDL32U, Interactive Graphics)	SMSDL	
System Mgr. Standard Ed. (1 web-enabled client, MSDE or SQL Personal Edition with Interactive Graphics)	SMSSE	
System Mgr. Professional Edition (10 web-enabled clients, SQL Server, Advanced Reports, Interactive Graphics)	SMSPE	
Add On Modules		
SMS OPC Server Application	SMSOPC	
SQL Server 2005 End User License	SMSLIC	
Active Pager Module - Paging applications with conditional alarms assigned by shift	9789PAGE	
WAGES Module - Monitoring electrical and piped utilities available with engineered project	Available as Engineered Project	
SER Module - Sequence of Events software interface for GPS time synch available with engineered project	9789SER	
EPSS Test Report Module available with engineered project	9789EPSSTRPT	
Extension Products		
Enables Standalones (DL & SE) with Remote Web clients (5 pk licenses)	SMSWebXTR	
Extends SMSDL to 32 device limit	SMSDL32U	
Converts SMSDL to SMSSE	SMSDL2SE	

PowerLogic Circuit Monitor and Power Meter Selection

Features▲	CM4000T	CM4250	CM3350	CM3250	PM870	PM850	PM820	PM810
Inputs, outputs and control power								
3-phase / single-phase	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Digital in and out / analog in and out	24 / 4	24 / 4	9 / 0	9 / 0	18 / 8	18 / 8	18 / 8	18 / 8
Power supply options	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC
Power and energy measurements								
V, I, F, PF	•	•	•	•	•	•	•	•
Power, demand	•	•	•	•	•	•	•	•
Energy / energy per shift (time-of-use)	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Energy accuracy (%)	0.2	0.2	0.5	0.5	0.5	0.5	0.5	0.5
Standards compliance to ANSI / IEC	• / •	• / •	• / •	• / •	• / •	• / •	• / •	• / •
Power quality analysis								
Compliance monitoring (e.g. EN50160)	•	•	•	•	•	•		
Flicker measurement	•							
High-speed transient disturbance capture (200 ns)	•							
Transient disturbance capture	•	•	•		•			
Disturbance direction detection	•	•	•					
Sag/swell monitoring	•	•	•		•			
Harmonics measurement	•	•	•	•	•	•	•	•
Uptime (number of 9's) calculation	•	•	•	•				
Waveform capture	•	•	•	•	•	•		
Waveshape alarm	•	•						
Data and event logging								
Trend / billing	• /	• /	• /	• /	• / •	• / •	/ •	
Minimum and maximum	•	•	•	•	•	•	•	•
Events / maintenance	• / •	• / •	• /	• / •	• /	• /	• /	
Timestamp resolution (seconds)	0.001	0.001	0.001	0.001	1	1	1	1
GPS sync	•	•	•	•				
Setpoints, alarms and control								
Annunciation / call out on alarm	• / •	• / •	• / •	• / •	• /	• /	• /	• /
Trigger logging	•	•	•	•	•	•	•	•
Trigger relay or digital output control	•	•	•	•	•	•	•	•
Special features								
Custom programming: arithmetic, boolean	•	•						
Downloadable firmware	•	•	•	•	•	•	•	•
Communications								
Ethernet port / web / email	• / • / •	• / • / •	• / • / •	• / • / •				
Infrared port	•	•	•	•				
RS485 / RS232 ports	• / •	• / •	• /	• /	• / •	• / •	• / •	• /
Modbus protocol	•	•	•	•	•	•	•	•

▲ Specifications represent maximum capabilities with all options installed. Some options are not available concurrently. This is not a complete feature list. Please refer to detailed product specifications.



Series 800 Power Meter

PowerLogic Series 800 Power Meters

The PowerLogic PM800 series Power Meter is a high-performance power-monitoring unit able to provide advanced power measurement capabilities in a compact 96x96 mm unit. Its large, easy to read display allows you to monitor all three phases and neutral simultaneously. With its easy to use intuitive interface and self guiding menus, the large anti-glare and back lit display makes this meter the easiest yet to navigate and use. The modular design allows for flexibility with an easy upgrade path to grow the meter's capabilities with the addition of Communication and I/O Modules.

- Monitor current, voltage, power and energy simultaneously
- Trending/Forecasting Curves functionality (PM850/870)
- 128 samples/cycle-zero blind metering
- Waveform capture (PM850), configurable waveform capture (PM870)
- Onboard logging (80k in PM820, 800k in PM850/PM870)
- Detection of voltage sags and swells
- Individual harmonic measurements on current and voltage
- Available with 2 standard Digital I/O
- Field installable Digital and Analog I/O
- THD measurement
- Meets IEC 60687 and ANSI C12.20 Class 0.5S accuracy
- Programmable (logic and mathematical functions)
- Optional field installable ethernet communications card with standard and custom web pages

Transparent
Ready™

Web-enabled Power & Control

PM8ECC Ethernet
Communications Card

Description	Catalogue No.	Price
Series 800 Power Meters		
PM810 Power Meter with integrated display, MD, Alarming	PM810	
PM820 Power Meter with integrated display, THD, Alarming, 80kb Logging	PM820	
PM850 Power Meter with integrated display, THD, Alarming, 800kb Logging, Waveform Capture	PM850	
PM820 Meter unit only without display	PM820U	
PM850 Meter unit only without display	PM850U	
PM870 Power Meter with integrated display, THD, Alarming, 800 kb Logging, configurable Waveform Capture, Sag/Swell Detection	PM870	
PM870 Meter unit only without display	PM870U	
Series 800 Power Meter Accessories		
PM800 Display for integrated meter unit	PM8D	
Module, 2 digital outputs, 2 digital inputs	PM8M22	
PM800 Module, 2 digital outputs (relays), 6 digital inputs	PM8M26	
PM800 Module, 2 digital out, 2 digital in, 2 analog out, 2 analog in	PM8M2222	
PM800 Mounting adapter for CM2000	PM8MA	
PM8ECC Ethernet Communications Card; 10/100mb ethernet port and 1 RS-485 masterport	PM8ECC	

PowerLogic Series 3000 Circuit Monitor

The PowerLogic Series 3000 Circuit Monitor is designed for industrial, commercial and OEM users and is the ideal monitoring device for electrical mains, branch feeders, as well as OEM applications, such as computer power. It provides instant access to real time web pages without installing or learning special software.

CM3000 can serve up instantaneous readings, energy usage cost, power quality and disturbance analysis or even customized web pages. Web-access summary data transparently from other devices connected downstream.

- Comes with 8Mb of standard memory allowing for more data logging than any other meter in its class
- 128 samples/cycle allow for zero blind metering
- Sag/Swell disturbance monitoring(CM3350)
- 100 ms Event recording(CM3350)
- Harmonic Powerflows to the 40th harmonic
- Sequence of events recording using GPS synchronization
- Built-in Trending and Forecasting functionality allows you to forecast energy usage up to 4 days in advance
- Custom web pages with optional Ethernet Communications Card
- Field installable Digital I/O card
- Meets IEC 60687 and ANSI C12.20 Class 0.5S accuracy

Transparent
Ready™

Web-enabled Power & Control



Series 3000 Power Meter

Description	Catalogue No.	Price
Series 3000 Circuit Monitors		
Instrumentation, On-board Data Logging Waveform Capture, Disturbance Waveform Capture, Configurable I/O, 0.15% Accuracy	CM3250	
Same as CM3250 plus Sag/Swell Disturbance Detection and 100 ms RMS Event Recording	CM3350	

NOTE: See page DE13-10 for Series 3000 Accessories.



CM4000T with VFD Display



PCM4000

Transparent
Ready™
Web-enabled Power & Control



ECC21



IOC44 I/O Card

PowerLogic Series 4000 Circuit Monitor

The award winning, Web-enabled PowerLogic Series 4000 Circuit Monitor (CM4250) is the most advanced permanently mounted circuit monitor in the industry today. Designed for critical power and large energy users who cannot afford to be shut down, the CM4250 provides the ability to monitor, troubleshoot and preempt power quality problems. Transients (disturbances lasting less than one cycle) are particularly difficult to detect, due to their short duration. The CM4000T detects and captures oscillatory and impulsive transients (up to 10,000V peak, line-to-line at 5 MHz per channel) as short as one microsecond in duration. The CM4000T automatically performs a high-speed transient waveform capture and a longer disturbance capture to show the conditions surrounding an event. The CM4000T maintains a complete historical record of the number of transients per phase, along with the magnitude, duration and time of occurrence of each. It also performs a stress calculation to determine the circuits that have received the greatest stress from transient overvoltages.

- Waveform capture with up to 512 samples/cycle
- Built-in Trending and Forecasting functionality allows you to forecast energy usage up to 4 days in advance
- Sag/Swell disturbance monitoring
- Two option card slots for field installable cards
- Optional field installable Ethernet communications card with standard and custom web pages
- Alarm Setpoint Learning feature allowing optimum threshold setting (patent pending)
- Multiple alarms including standard, digital, Boolean, high-speed, and disturbance alarms
- Waveshape alarm monitoring
- High speed transient voltage detection at 5 MHz per channel with field installable CVMT current/voltage module
- True RMS Metering through the 255th harmonic
- Also available in a rugged sealed case as a Portable Circuit Monitor
- Extended waveform capture (up to 110 seconds)
- Field installable Digital/Analog I/O cards and flexible I/O extender modules
- Harmonic powerflows up to the 40th harmonic
- Standard KYZ pulse output
- Standard 16 MB of non-volatile memory (field upgradeable to 32 MB)
- Integrated power quality standards including EN50160, IEC 61000-4-15 (Flicker)
- Sequence of events recording using GPS synchronization technology
- Oscillatory transient detection and recording
- Extended range current/voltage module (CVMXR) for higher inrush currents available, field installable
- UL Listed, CSA Approved, CE Marking, NOM Approved, FCC compliant

PowerLogic Series 4000 Circuit Monitor Optional Displays

- High visibility remote VF (vacuum fluorescence) display with I/R communications port
- Displays metering data, min/max values, alarms, inputs
- Remote LC (liquid crystal) display with backlighting also available
- Optional user configurable display screens


Series 4000 Circuit Monitors

Description	Catalogue No.	Price
Series 4000 Circuit Monitors		
Instrumentation, On-board Data Logging, Waveform Capture, Disturbance Recording, Configurable I/O, 0.04% Accuracy	CM4250	
Same as CM4000, Current Overrange of 100A up to 1 Second, 40A Continuous	CM4250XR	
Same as CM4000 plus Impulsive Transient Detection and Flicker (IEC 61000-4-15)	CM4000T	
Portable CM4000 Base Unit, Detachable Vacuum Fluorescent Display, Ride-through Module, Cable Set and Carrying Bag	PCM4000	
Portable CM4000 plus Impulsive Transient Detection and Flicker (IEC 61000-4-15)	PCM4000T	
Series 4000 Circuit Monitor Accessories		
Field installable I/O card with 3 relay outputs, 1 pulse output (KYZ) and 4 status inputs	IOC44♦	
I/O Extender module with 4 DC status inputs, 2 DC digital outputs, 1 analog input and 1 analog output	IOX2411	
I/O Extender module with 4 status inputs and 4 analog inputs (4-20 mA)	IOX0404	
I/O Extender module with 8 status inputs	IOX08	
I/O Extender module with no pre-installed I/O ▲	IOX	
Ethernet Communications Card; 100 MB Fiber or 10/100 MB UTP Ethernet port and 1 RS-485 master port	ECC21♦	
Current/Voltage module	CVM	
Current/Voltage module with extended current range■	CVMXR	
Current/Voltage module with high speed transient detection■	CVMT	
4-line x 20 - character liquid crystal display with backlighting	CMDLC♦	
4-line x 20 - character vacuum fluorescent display with I/R port and proximity sensor	CMDVF♦	
I/R communications interface for the vacuum fluorescent display	OCIVF♦	
4 foot display cable	CAB4♦	
12 foot display cable	CAB12♦	
30 foot display cable	CAB30♦	
Portable Circuit Monitor 5A CT 150/300/600A Range (Order 3 for complete set)	PLESNS36005	
Portable Circuit Monitor 5A CT 500/1000/1500A Range (Order 3 for complete set)	PLESH163155	
Portable Circuit Monitor 5A CT 1000/2000/3000A Range (Order 3 for complete set)	PLESHP32335	
PowerLogic Satellite Time System, Circuit Monitor and SEPAM GPS Time Synchronization, 100 microsecond accuracy	STS3000	
Satellite Time Reference Module	STRM	
Smart Antenna Module	SAM	
Smart Antenna Module Interface Cable - 200 FT	SAIF200	
Power Supply, 24DC/50W, DIN-mountable	PS080	

- ▲ Contact your nearest Schneider Electric sales office for additional I/O options.
- CM4000 is field upgradeable to provide additional features of specified module.
- ♦ Also available for CM3000.

Submetering


From the
Global Leader
In Power Distribution

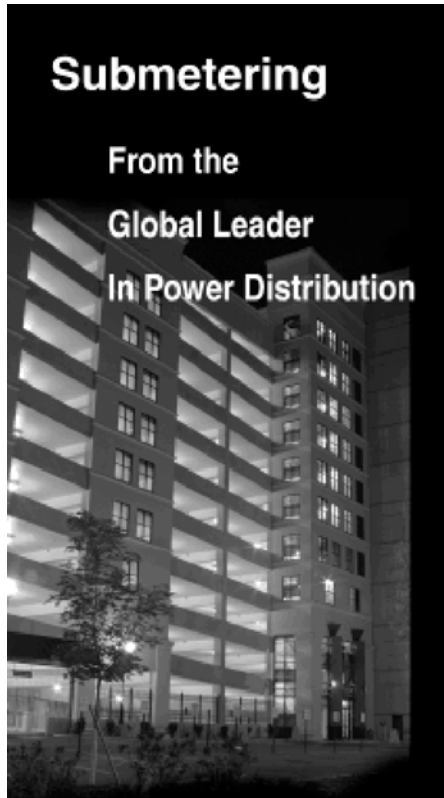

PowerLogic Submetering

In today's increasingly competitive commercial property market, attracting and retaining high-quality, long-term tenants by offering exceptional value is the primary goal. Balancing these premium services and reliable infrastructure vs. the financial exposure to volatile utility costs is the challenge.

Minimizing energy costs requires information on how energy usage translates into money spent. PowerLogic energy sub-metering systems are specifically engineered to address the measurement, verification and billing needs of multi-tenant properties.

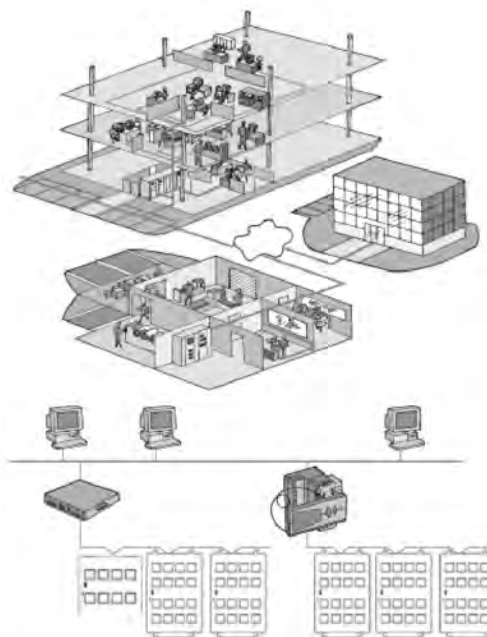

- Residential high-rise and low-rise
- Campuses
- Shopping centers
- Malls / food courts
- Offices
- Commercial buildings

PowerLogic energy management and metering systems are ideal for multi-tenant buildings providing:

- Metering & Verification tools to assure compliance to Energy Policy Act 2005

- Integrated approach from simple energy allocation requirements to high-end power quality

- Monitor energy usage and efficiency to accurately recover the costs while providing tenants with energy and a reliable infrastructure

Schneider Electric, a trusted equipment supplier for over 100 years, can be your single source for all your energy management needs — reliable metering systems, services, installation, operational costs, training and maintenance agreements.

Power Monitoring & Control

PowerLogic® Submetering



Energy Meter

PowerLogic Energy Meter

The Energy Meter is ideal for stand-alone and systems-based submetering applications. It is easy to install and provides exceptional metering accuracy. Available in Basic and Extended Range models. The Basic model is designed for metering of 120/240 and 208Y/120 volt services. The Extended Range model will meter 120/240 volt up to 480 volt Wye connected services. Extended Range meters come with pulse output and phase loss output not available on the Basic unit. Optional Modbus® RS-485 serial communications are provided with the Energy Meter Comms Board, EMCB. Optional kW demand is also provided by the EMCB.

Meter up to 3 individual services with one Energy Meter. The Energy Meter will allow the addition of up to 3 sets of parallel CTs for metering multiple electric loads. Additional sets of CTs can be ordered separately. Please refer to the multiple CT application notes in the Energy Meter instruction bulletin for the proper installation procedures.

Energy Meter

Basic 120/240 Volt, 208 Volt Wye

Catalogue No.	Description	Price
EMB1010	Basic 100A, .518"x1.28" ID, 1 CT	
EMB1021	Basic 200A, 0.75" x 1.10" ID, 1 CT	
EMB1032	Basic 300A, .90"x1.90" ID, 1 CT	
EMB2010	Basic 100A, .518"x1.28" ID, 2 CTs	
EMB2021	Basic 200A, 0.75" x 1.10" ID, 2 CTs	
EMB2032	Basic 300A, .90"x1.90" ID, 2 CTs	
EMB2043	Basic 400A, 2.45"x2.89" ID, 2 CTs	
EMB2083	Basic 800A, 2.45"x2.89" ID, 2 CTs	
EMB3010	Basic 100A, .518"x1.28" ID, 3 CTs	
EMB3021	Basic 200A, 0.75" x 1.10" ID, 3 CTs	
EMB3032	Basic 300A, .90"x1.90" ID, 3 CTs	
EMB3043	Basic 400A, 2.45"x2.89" ID, 3 CTs	
EMB3083	Basic 800A, 2.45"x2.89" ID, 3 CTs	
EMB3084	Basic 800A, 2.45"x5.50" ID, 3 CTs	
EMB3164	Basic 1600A, 2.45"x5.50" ID, 3 CTs	

Additional CT Sets

Catalogue No.	Description	Price
EMCT010	100 A, .518" x 1.28" ID, 1 CT	
EMCT021	200 A, 0.75" x 1.10" ID, 1 CT	
EMCT032	300 A, .90" x 1.90" ID, 1 CT	
EMCT043	400 A, 2.45" x 2.89" ID, 1 CT	
EMCT083	800 A, 2.45" x 2.89" ID, 1 CT	
EMCT084	800 A, 2.45" x 5.50" ID, 1 CT	
EMCT164	1600 A, 2.45" x 5.50" ID, 1 CT	

Note: CT quantity and amperage must match meter model. Total of combined loads must not exceed rating of meter. All additional CTs shipped with 6 ft. white and black color-coded wire leads.

PowerLogic Enercept® Meter

The Enercept Meter is the ideal solution for submetering electric loads where space is at a premium. The compact design consists of three interconnected split-core CTs with the metering and communication electronics built into the CT housing. Simply snap on the CTs, connect the voltage inputs, the communication lines, and installation is complete. Both versions can be connected to either three-phase or single-phase circuits.

Enercept meters employ the Modbus® RTU 2-wire communication protocol, and can utilize the same communication network and PowerLogic System Manager™ software as other PowerLogic devices. Data from the Enercept meters can be presented in tabular or graphical format, used for alarming and historical logging and trending, and to produce reports.

Optional Enercept Display Interface acts as a stand-alone operator interface supporting up to 32 meters (63 with a repeater). In addition, the EDI can act as a network adapter allowing Enercept meters to be incorporated into a 4-wire network. The Enercept Network Adapter (ENA) is designed to act as a network adapter, allowing the Enercept meters to be integrated into a PowerLogic 4-wire network. The ENA converts the signals from the 4-wire network to the 2-wire network, as well as changing the parity between the two networks.

Enercept Meter

Catalogue No.	Description	Price
3020B012■	Basic 100A, 1.25" x 1.51" ID	
3020B032■	Basic 300A, 1.25" x 1.51" ID	
3020B043■	Basic 400A, 2.45" x 2.89" ID	
3020B083■	Basic 800A, 2.45" x 2.89" ID	
3020B084■	Basic 800A, 2.45" x 5.50" ID	
3020B164■	Basic 1600A, 2.45" x 5.50" ID	
3020B244■	Basic 2400A, 2.45" x 5.50" ID	
3020E012	Enhanced 100A, 1.25" x 1.51" ID	
3020E032	Enhanced 300A, 1.25" x 1.51" ID	
3020E043	Enhanced 400A, 2.45" x 2.89" ID	
3020E083	Enhanced 800A, 2.45" x 2.89" ID	
3020E084	Enhanced 800A, 2.45" x 5.50" ID	
3020E164	Enhanced 1600A, 2.45" x 5.50" ID	
3020E244	Enhanced 2400A, 2.45" x 5.50" ID	

PowerLogic Split Core Current Transformers-Instrument Grade 5 Amp Split-Core Current Transformers

The 3090 SCCT series of split-core current transformers provide secondary amperage proportional to the primary (sensed) current. For use with Circuit Monitors, Power Meters, data loggers, chart recorders and other instruments the 3090 SCCT series provides a cost-effective means to transform electrical service amperages to a 0-5A level compatible with monitoring equipment.

Catalogue No.	Description	Price
3090SCCT022	Split Core CT - 200A (sz.2): 1.25" x 1.51"	
3090SCCT032	Split Core CT - 300A (sz.2): 1.25" x 1.51"	
3090SCCT043	Split Core CT - 400A (sz.3): 2.45" x 2.89"	
3090SCCT063	Split Core CT - 600A (sz.3): 2.45" x 2.89"	
3090SCCT083	Split Core CT - 800A (sz.3): 2.45" x 2.89"	
3090SCCT124	Split Core CT - 1200A (sz.4): 2.45" x 5.50"	
3090SCCT164	Split Core CT - 1600A (sz.4): 2.45" x 5.50"	
3090SCCT204■	Split Core CT - 2000A (sz.4): 2.45" x 5.50"	

■ See Handout / Instruction Bulletin for derating properties

Extended Range 120-480 Volt Wye

Catalogue No.	Description	Price
EME1010	Extended Range 100A, .518"x1.28" ID, 1 CT	
EME1021	Extended Range 200A, 0.75" x 1.10" ID, 1 CT	
EME1032	Extended Range 300A, .90"x1.90" ID, 1 CT	
EME2010	Extended Range 100A, .518"x1.28" ID, 2 CTs	
EME2021	Extended Range 200A, 0.75" x 1.10" ID, 2 CTs	
EME2032	Extended Range 300A, .90"x1.90" ID, 2 CTs	
EME2043	Extended Range 400A, 2.45"x2.89" ID, 2 CTs	
EME2083	Extended Range 800A, 2.45"x2.89" ID, 2 CTs	
EME3010	Extended Range 100A, .518"x1.28" ID, 3 CTs	
EME3021	Extended Range 200A, 0.75" x 1.10" ID, 3 CTs	
EME3032	Extended Range 300A, .90"x1.90" ID, 3 CTs	
EME3043	Extended Range 400A, 2.45"x2.89" ID, 3 CTs	
EME3083	Extended Range 800A, 2.45"x2.89" ID, 3 CTs	
EME3084	Extended Range 800A, 2.45"x5.50" ID, 3 CTs	
EME3164	Extended Range 1600A, 2.45"x5.50" ID, 3 CTs	

Energy Meter Accessories

Catalogue No.	Description	Price
EMCB	Energy Meter Communication Board▲	
EMFP1	Energy Meter Fuse Pack, Set of 1	
EMFP2	Energy Meter Fuse Pack, Set of 2	
EMFP3	Energy Meter Fuse Pack, Set of 3	
EMBOND	Energy Meter Bonding Kit	

▲ Energy Meter communication board (EMCB) can be used with all models of the Energy Meter. Order one EMCB for each Energy Meter where either kW demand and/or communication is specified.

Accessories

Catalogue No.	Description	Price
ENA485	Enercept Network Adapter	
EDI32	Enercept Display Interface	
2W485C	2-Wire 232-485 Conv	
EMBK-3	Enercept Mounting Brackets (Set of 3)	
PS24	24Vdc Power Supply (for use with EDI or ENA)	

Enercept Metering Quantities



Basic■	Enhanced*
kWh, energy usage kW, real power	kWh, kW per phase and total, min kW, max kW, kWd, kVAR, kVA, PF per phase and total voltage- V, L-L, L-N per phase and avg. Current - A, per phase and average



SA Split-Core Current
Transformers



BCM42

Typical BCMSC
panelboard installation3-phase, 4-wire
(with neutral current wiring)

PowerLogic Branch Current Monitor

The branch current monitoring system provides a cost-effective solution for electrical load management making it ideally suited for applications where load capacity requirements are dynamic, such as power distribution units (PDUs) for the data center industry or in any location where monitoring individual electrical loads is critical.

The Branch Current Monitor reports the current level of each of the breakers of a panelboard to provide timely circuit loading information. In addition, as the circuit load approaches one of two user set levels, an alarm can be generated back to the monitoring software such as PowerLogic System Manager Software.

Four models of the Branch Current Monitor are available. The BCM42 consists of rail mounted solid-core CTs intended for mounting inside new panelboards or complete panel retrofits. The BCM42SR is designed to fit into a column width panel design. The BCMSC model is made up of split-core CTs that are an ideal solution for retrofit applications in existing panelboards. The BCMSC __ H is a 100 Amp version of the split core design.

- Up to 32 BCMs can be daisy chained on one Modbus RS485 string for easy networking capability.
- One BCM42 provides current levels on each circuit of a 42 circuit NQOD panelboard.
- Split-core CTs are perfect for quick installation on critical load applications that can't be powered down.
- Provides Modbus registers for current limit alarms to help prevent overload breaker trips.
- Integrates to an optional network display for local indication.

Catalogue No.	Description	Price
BCM42	Branch Circuit Monitor 42 circuits, 3/4" center line CT spacing, 10-50 Amp range, configurable	
BCM42C1	Branch Circuit Monitor 42 circuits, 1" center line CT spacing, 10-50 Amp range, configurable	
BCM42SR	Branch Circuit Monitor, single row, 3/4" on center CTs	
BCM42SRC1	Branch Circuit Monitor, single row, 1" on center CTs	
BCM42SR12	Branch Circuit Monitor, split core, 12 CTs	
BCM42SR18	Branch Circuit Monitor, split core, 18 CTs	
BCM42SR24	Branch Circuit Monitor, split core, 24 CTs	
BCM42SR30	Branch Circuit Monitor, split core, 30 CTs	
BCM42SR42	Branch Circuit Monitor, split core, 42 CTs	
BCM42SR12H	Branch Circuit Monitor, 100A split core, 12 CTs	
BCM42SR24H	Branch Circuit Monitor, 100A split core, 24 CTs	
BCM42SR42H	Branch Circuit Monitor, 100 split core, 42 CTs	

Note: CT hole size accommodates up to #6 THHN insulated conductors

PowerLogic Multi-Circuit Meter

The MCM8364 is an OEM style multi-circuit meter based on the same functionality as the PowerLogic Enclosed Multi-Circuit Meter. Designed for OEM style placement in electrical distribution equipment the MCM8364 is configurable to meter 1 or 3 phases of up to eight individual loads, six loads if neutral monitoring is required. The MCM will monitor up to 10,000 amps per service using standard 5 Amp CTs. All of the metered circuits must share a common voltage source. The MCM8364 is a great solution for monitoring critical power distribution equipment and provides 24 different electrical metering quantities plus an additional nine Modbus register alarms.

With one RS-485 connection, the multi-circuit meter provides Modbus RTU communications output that communicates to each individual metered circuit. Up to 30 multi-circuit meters can be addressed on the same Modbus network. The multi-circuit meter can provide warnings to the central monitoring computer via its Modbus output using the MNode software provided or can be integrated into PowerLogic SMS software. The MCM also works with the submeter display as shown below.

Electrical Data:

Energy Consumption (kWhr), Real Power (kW), Reactive Power (kVAR), Apparent Power (kVA), Power Factor Total, Voltage, L-L, avg. of 3 phases, Voltage, L-N, avg. of 3 phases, Current, average of 3 phases, Real Power (kW) phase A, B, & C, Power Factor, phase A, B, & C, Line to Line Voltage, phase A-B, B-C, A-C, Line to Neutral Voltage, phase A-N, B-N, C-N, Current, phase A, B, & C, Frequency (measured from phase A) (Hz).

Modbus Alarms:

Over Voltage, Under Voltage, Over Current, Under Current, Over kVA, Under kVA, Phase Loss A, Phase Loss B, Phase Loss C

Catalogue No.	Description	Price
MCM8364	Multi-Circuit Meter 8364	



Submeter Display


PowerLogic Submeter Display

The PowerLogic Submeter Display (SMD) is a comprehensive electrical submetering display that provides a view of electrical parameters from multiple metering products with one networked LCD. In addition to viewing system data on the display itself, you can also view data on a remote PC via a network connection. Touch pad buttons provide a convenient way to view downstream devices on the power-monitoring network. The display is RS-485 Modbus RTU compatible. It has additional RS-485 and RS-232 Modbus ports for networking to additional displays or to a master PC. The submeter display is compatible with the following metering devices: BCM, MCM, & Enercept® meters.

Catalogue No.	Description	Price
SMD	Submeter display mounted in enclosure	
SMD OEM	OEM style submeter display, no enclosure	

Power Monitoring & Control

PowerLogic® ION EEM Enterprise Energy Management Software




Personalized dashboards help management and operations personnel monitor all aspects of energy use and respond to opportunities or threats.



Produce aggregate billing, load profile, cost allocation, power quality, forecasting or budget reports to help inform stakeholders and track results against goals.



Use advanced billing functions to support energy procurement and manage load or generation assets in response to curtailment or pricing signals.

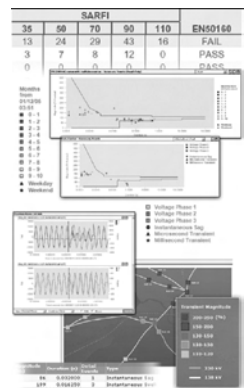

Monitor power quality risk factors, benchmark performance, determine impacts, validate contract compliance, isolate problem sources, and confirm your return-on-investment.

PowerLogic ION EEM is a complete enterprise energy management solution that unites business and energy strategies across your entire enterprise by unifying and extending the benefits of your existing energy-related data resources. Stakeholders from management to operations will be empowered by actionable energy intelligence to reveal opportunities, isolate problems and drive cost and risk reduction strategies.

PowerLogic ION EEM automatically acquires data from power monitoring and control systems, building and process automation systems, utility information systems, weather services, spot-market energy pricing feeds, and enterprise business applications, cleanses and warehouses it. Personalized, browser-based dashboards and innovative visualization and modeling tools then make the information available to whomever needs it, so you can accurately monitor, validate, predict and control energy-related expenses.


From operational cost reductions to procurement support through cost allocation, benchmarking and budgeting, key performance indicators and advanced analytics, PowerLogic ION EEM helps you manage energy in financial terms. It also helps you gain unique insight into the impacts of power quality on your business and all energy assets. From the service entrance to the boardroom, PowerLogic ION EEM software allows energy to be managed as a variable cost.

Key features

- True enterprise-level software architecture: data quality assurance, data warehouse, web framework
- Web portal: personalized dashboards, key performance indicators, charts, trends, real-time conditions
- Reporting: rich and customized content, support for complex data and graphics, scheduled distribution
- Trending: advanced visualization, dimensional analysis, prediction, statistical rollups
- Modeling: regression analysis, normalization, correlation, integration of all relevant drivers and contextual data
- Billing: built-in rate engine and rate wizard
- Power quality analysis: wide-area event monitoring, classification, filtering, correlation
- Alarms and events: triggering on complex conditions, notification, logging
- Integration: meters and other devices, weather and pricing feeds, other enterprise applications (e.g. BAC, ERP)

Typical applications

- Manage all utilities (electricity, gas, water, etc.) and emissions through a single, unified interface
- Benchmark facility performance across an entire enterprise to identify energy inefficiencies
- Measure and verify savings from energy conservation projects or performance contracts
- Reduce operational costs, improve processes, and prolong asset life
- Meet corporate environmental stewardship goals or mandated impact targets
- Manage demand control schemes, load shedding, peak shaving, base loading or on-site generation
- Enable participation in real-time pricing and load curtailment programs
- Optimize procurement by forecasting and budgeting for energy needs and comparing utility rates
- Identify utility billing errors and validate contract compliance
- Allocate and recover utilities costs from tenants, departments, processes, etc.
- Maximize the use of existing infrastructure capacity and avoid overbuilding
- Identify and reduce risks to uptime

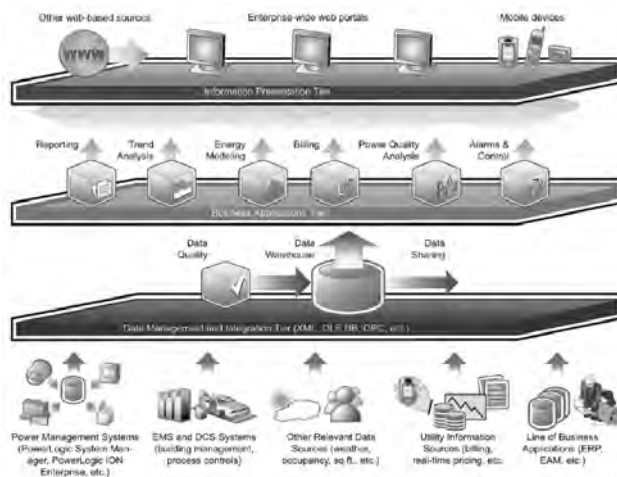

Data presentation tier

Web portal delivers enterprise-wide access through personalized dashboards, reports, detailed analytics, and integration of views from third-party systems. Information and alerts via cell phone, PDA, pager and more.


Business applications tier

Standard and optional modules tailor functionality to specific needs. Advanced analytics and reporting on every driver and relationship affecting energy cost and reliability.


Data management tier

Integration of data from many sources: power monitoring and control systems (PowerLogic or third party), utility metering systems (water, air, gas etc.), Internet weather, real-time energy pricing feeds, manual input, energy assets (power distribution and reliability equipment, generators), line-of-business systems (BAC, DCS, ERP, EAM, accounting). Data quality module assures complete and reliable data from all inputs.

For price and ordering information, contact your local PowerLogic Sales Specialist or PowerLogic Inside Sales at 1-866-466-7627.

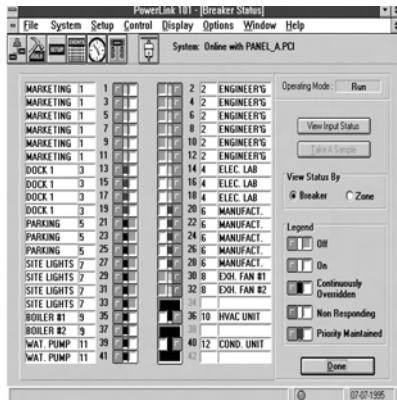


With the flexibility of ION technology, multiple form factors, extensive I/O, and an unmatched feature set, the PowerLogic ION8600 is a powerful device in substation automation, SCADA, and billing applications.

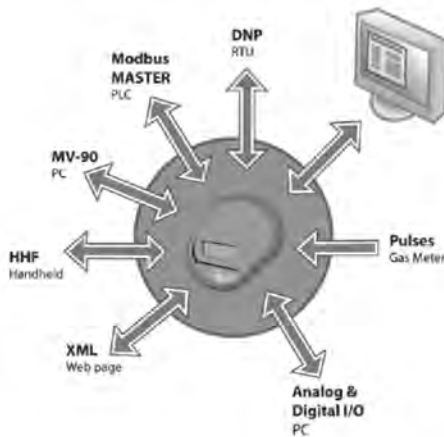

Multi-port, (serial, optical, internal modem, Ethernet) plus multi-protocol communications (Modbus RTU, Master, Slave, DNP 3.0, Modbus TCP) and a unique gateway capability provide industry leading integration capability

Analyze data from across your grid and immediately and share it with utility personnel, grid operators, or energy consumers.

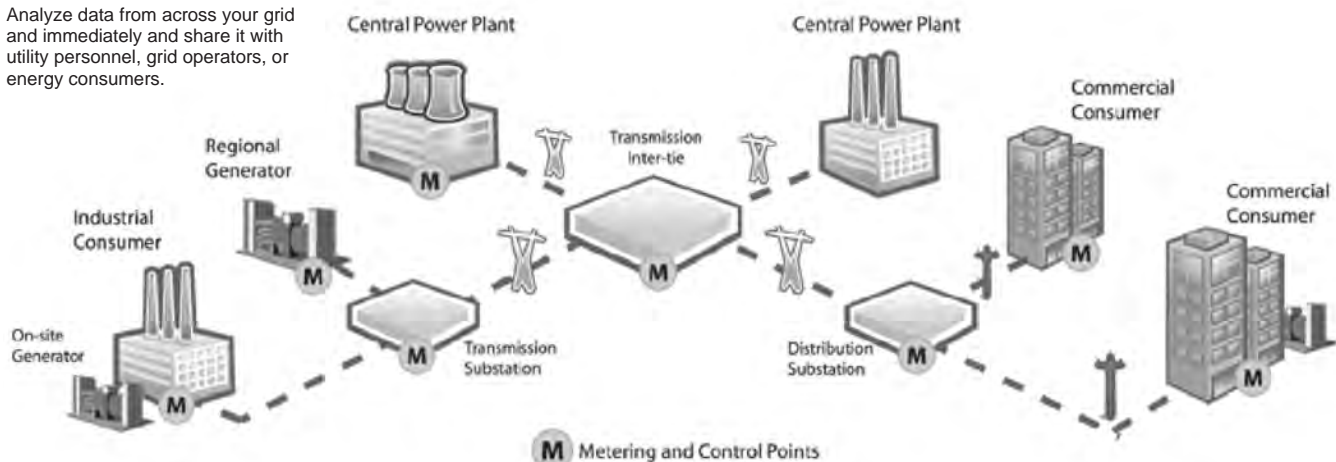

PowerLogic Solutions for Utilities

Schneider Electric PowerLogic delivers complete, cutting-edge web-enabled solutions for many of the utility industry's most demanding metering, billing and information management challenges. For many years, regulated utilities, ESCOs and deregulated energy providers have utilized our proven, scalable meters and software to obtain the accurate, real-time information they need to meet their organization's business goals.

Cost-effective PowerLogic systems enable energy providers to:


- Maximize competitiveness, increase reliability, streamline operations, and improve service
- Manage wholesale energy transactions across wide geographical areas
- Provide value-added services that enhance customer relationships
- Improve revenue metering, billing accuracy and ensure and report on regulatory compliance
- Provide key personnel with energy information to make analytical and strategic business decisions, optimize distribution assets, and profit from free market opportunities

PowerLogic's advanced revenue meters are high quality, flexible and scalable devices that offer a combination of capabilities unmatched in the industry. Whether integrated with third-party systems or combined with compatible PowerLogic software, Schneider Electric can help utilities address:

- **Transmission grid and revenue metering**
PowerLogic provides high-accuracy meter information for grid-wide billing applications and offers MV-90 support and integration into SCADA.
- **Substation monitoring**
A PowerLogic solution provides the tools to protect valuable equipment from faults, disturbances, and overloading.
- **Power quality analysis**
Waveform recording, transient detection, sag/swell, symmetrical components and many more additional capabilities are available when combined with PowerLogic ION Enterprise software.
- **Service entrance metering**
The PowerLogic ION8600 billing meter can be used to manage electricity contracts for energy suppliers and consumers, plus web reporting, sub-metering services, load management and much more.
- **Demand response and load curtailment**
PowerLogic meters and software can also be used as part of a demand response/load curtailment system.

Schneider Electric PowerLogic utility solutions resist obsolescence and are engineered to provide fast payback and easy scalability so you can add metering points and communications channels as your organization evolves.

PowerLogic®
PowerLogic Energy Profiler Online




For the utility, EPO provides an intuitive, easy-to-maintain tool for better understanding customer usage patterns and meeting customers' growing need for information. It also provides a convenient platform from which to administer real-time pricing (RTP) or load curtailment programs. EPO's instinctive online functionality gives first-time users an extremely short learning curve, while its powerful configuration options address the needs of more sophisticated users. The service is available to users at their convenience, 24/7, and regular updates ensure that customers get the most current information.

Applications:

- Data access and analysis
- Automated reporting
- Estimated bills and rate comparisons
- Demand response and curtailment programs
- RTP programs
- Alarming
- Administration tool
- Energy load analysis
- Energy budgeting and bill forecasting
- Demand response and load curtailment program management
- Real-time pricing program management
- EPO's Real-Time Pricing module lets users see interval data for accounts with future


Comparison statistics display



Transparent Ready™ Web-enabled Power & Control



EGX100 Ethernet Gateway

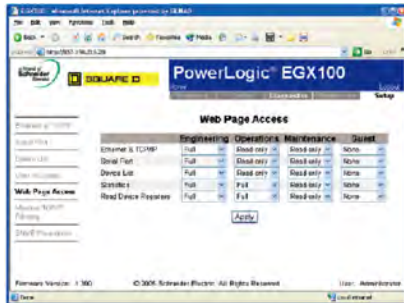


EGX100 lets the Administrator assign access to setup pages by user groups



Built-in tabs provide easy DIN rail mounting solution.



EGX400 Ethernet Gateway offers you a "window" into your power equipment

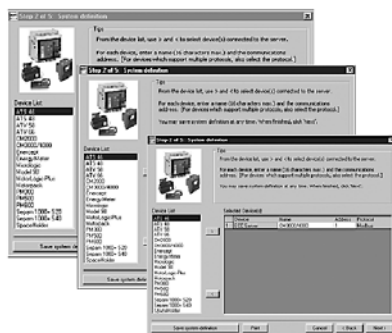

Communications for high-speed access to critical information

From a single building to a multi-site enterprise, PowerLogic Web-Enabled Network Components provide fast, reliable serial line to Ethernet connectivity in the most demanding applications:

- Energy management
- Power distribution
- Building automation
- Factory automation

PowerLogic Ethernet Gateways are available in two models—EGX100 and EGX400—providing direct connection to Ethernet-Modbus®/TCP networks to make energy and power monitoring information available over local and wide area networks.

- The EGX100 provides low-cost, reliable, Ethernet to serial-line connectivity in a compact, DIN-rail mounted package. Enabled by Power over Ethernet (PoE IEEE 802.3af), the EGX100 simplifies installation by eliminating the need for power supplies plus provides a Web-based interface for configuration and diagnostics.
- The EGX400 has two serial ports providing Ethernet access to 64 serial devices (more with repeaters) and includes the ability to e-mail historical data plus provide browser-based access to real-time and historical interval data logging/trending information allowing electrical distribution systems to be better managed by utilizing Ethernet and Internet technologies.

Advantages

- Easy to setup—No special software required. Configuration via Microsoft Internet Explorer or Hyperterminal.
- Easy to troubleshoot—Detailed diagnostics for communication ports through a Web interface.
- Easy to maintain—Field upgradable firmware lets you add new features while reducing costly downtime.
- Secure—Customizable, password-protected access to configuration.
- Cost-effective, high-speed communications—Use existing LAN infrastructure to reduce communications wiring and network management costs.
- Open platform provides broad connectivity—Modbus TCP/IP over Ethernet allows transparent access via intranet/internet. Each gateway supports up to 32 Modbus or PowerLogic protocol devices.
- Subnet initiated communications—The gateway supports a slave mode for connecting a serial-line based system to Ethernet. For example, a building management system with a Modbus serial interface can route to 16 remote Modbus TCP/IP interfaces supporting up to 128 serial-line devices.
- Extended temperature range—-25 to 70°C enables operation in harsh environments.

Type	EGX100	EGX400
	Price	
Control Power		
24Vdc Power Supply	x	x
Power Over Ethernet	x	
Protocols		
Ethernet: HTTP, FTP, Modbus TCP/IP, SMTP, SNMP (MIB2), SNTP, TCP, UDP, ICMP, ARP		
Serial: Modbus RTU, Modbus ASCII (EGX100 only), JBUS, PowerLogic (SY/MAX)		
Ports		
Serial: RS485		1
Serial: RS232/485 configurable	1	1
Ethernet UTP (10/100)	1	1
Fiber (100Mb)		1
Integral web server		
Web page generation tool	x	x
Maintenance/diagnostics	x	x
Gateway administration setup	x	x
Comprehensive meter reading		x
Interval logging/trends		32 devices
User defined custom pages		x
Historical Data Logging		
Interval data		x
File transfer on scheduled basis		email
Export to Excel via web query		x
Manual FTP		x

PowerLogic Web Page Generator

The PowerLogic Web Page Generator (WPG) creates and downloads application specific web pages to PowerLogic Ethernet gateways (EGX100 / EGX400, ECC21) with minimal user intervention. The user simply identifies the serial devices connected to the Ethernet gateway in this wizard-based software utility. The utility takes care of the rest. This utility is available for download from www.powerlogic.com.

Power Monitoring & Control

Schneider Electric Services and Projects Engineering Services



Consulting & Analysis

Power System Engineering

Schneider Electric Services and Projects Power Systems Engineering team offers a wide range of engineering services to improve the safety, efficiency and reliability of your power distribution system. The team is comprised of registered, professional engineers, safety trained and equipped, to perform a variety of engineering functions, such as power system design, testing, troubleshooting, and analysis.

Arc Flash Analysis

Schneider Electric Services and Projects offers on-site services to perform arc flash analysis for a facility, complex, office, or campus. An Arc flash analysis is used to determine ...

- Flash Protection Boundary
- Incident Energy Value
- Hazard/Risk Category
- Appropriate Personal Protective Equipment (PPE)
- Low cost arc flash reduction methods

Features of Schneider Electric Services and Projects arc flash analysis offerings include...

- Time current coordination analysis showing both existing and recommended over-current device settings
- Short-circuit study to ensure adequacy of equipment
- Onsite verification and documentation of equipment
- Arc flash labels (populated with the results of the arc flash analysis)
- Arc flash label affixation
- NFPA 70E—Safe Workplace Practices Training provided by OSHA authorized outreach instructors
- Recommendations and solutions to reduce potential arc flash hazards

Power System Studies

The Schneider Electric Services and Projects Power System Engineering Team provides expertise for a variety of electrical power system studies. Some of the more common system studies include...

- Short-circuit analysis
- Time-current coordination
- Motor starting/voltage drop
- Motor starting/torque-speed
- Arc flash analysis
- Safe motor re-energization
- Harmonic analysis
- Transient analysis
- Power factor correction analysis
- Other system specific analysis

Power System Assessment

Schneider Electric Services and Projects offers engineering services to address a variety of power system needs ...

- Basic codes and standards compliance
- Protective coordination assessment
- Maintenance program review
- Recommendations for power system optimization
- Power quality troubleshooting and analysis
- Power factor and harmonics analysis
- Electrical safety hazards
- Short-circuit withstand overview
- Single-line documentation of power system
- Power monitoring recommendations
- Loading measurements

Power Quality Studies

Schneider Electric Services and Projects offers onsite power quality engineering studies and solutions to eliminate process disruptions, power system shutdowns, and equipment damage due to electrical power system disturbances. A power quality study is used to..

- Determine compliance with the IEEE 519-Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems guidelines
- Identify most cost-effective solution to power quality problems
- Solve process disruptions due to power disturbances
- Reduce economic effects of poor power quality
- Identify disturbances originating on electric utility system and improvements to reduce the number and severity

Load Studies

Schneider Electric Services and Projects offers onsite services to perform loading studies for your electrical distribution system. Load studies are used to...

- Evaluate power management and loading levels of electrical circuits
- Determine adequacy of circuit to serve sensitive loads
- Record power measurements on key circuits, including loading, power factor, voltage and current parameters


Power System Design


Schneider Electric Services and Projects offers engineering services to address a variety of power system needs ...

- New equipment installation
- Existing equipment modification
- Ground Fault Schemes for multiple source distribution systems
- High Resistance Grounding (HRG) Conversion
- Automatic Transfer Control Schemes & Generator Operations

Schneider Electric Services and Projects professional engineers - safety trained and equipped - will listen to your concerns and goals, define the problem or enhancement, and engineer the solution that best satisfies your needs.

For additional information on power system engineering services and pricing, contact your nearest Schneider Electric Services and Projects representatives.




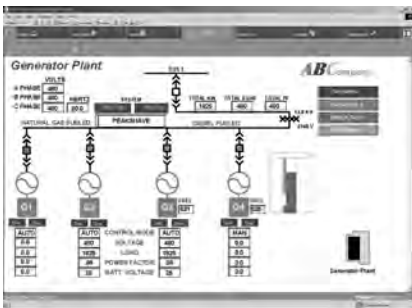

PowerLogic Engineers provide graphic solutions for realtime monitoring of power systems.



PowerLogic Engineers specialize in the



PowerLogic Engineers design power control systems that meet your operational requirements.

Energy Action

With a comprehensive energy strategy, escalating energy prices don't have to be a roadblock to industrial growth. As part of Schneider Electric's power application engineering portfolio that targets improving energy efficiency, Energy Action is a consultative service consisting of our Professional Engineers who work with you to ensure the success of your energy strategy. With the development of an Energy Action Plan tailored for your site, we evaluate energy opportunities for system optimization in the following areas:

- Lighting
- Motor Application
- Process Cooling
- Alternative Fuels
- Power Generation
- Chilled Water
- Refrigeration
- Demand Control
- Ventilation
- Air Handling
- Compressed Air
- Heat Recovery Application
- Process Heating

We're confident that together, we will reduce the total cost of energy at your facility. Take the logical next step in energy efficiency with the most trusted name in the power industry for over 100 years.

Power System Automation

Avoid high energy cost associated with peak demands

- Reduce loading requirements to match generator supply
- Shed non-essential loads while maintaining critical processes and lighting requirements
- Retrofit existing generator equipment for peak shaving
- Generate revenue possibilities, export power to the utility during peak periods
- Verify generator performance and ATS status
- Record Sequence of Events to 1 ms for root cause analysis
- Automate existing equipment to seek the utility source, control breakers, and keep the electrical system operational

Utility Cost Reduction	Power System Reliability
LOAD CONTROL SYSTEMS Load shedding and sequencing	EMERGENCY POWER SUPPLY SYSTEMS (EPSS) Automatic Generator testing and report generation
GENERATOR CONTROL Peak shaving Import/export	ATO (Automatic Throw Over) SYSTEMS Utility to Utility
<ul style="list-style-type: none"> • Load following (utility base loading) • Generator base loading 	<ul style="list-style-type: none"> • Main-Tie-Main • Main-Main • Open and closed transition Utility to Generator <ul style="list-style-type: none"> • Basic ATS control with breakers • Momentary Closed Transition • Extended Closed Transition (ramped load control) • Maintained Parallel Operation (Import/Export Control)
ENERGY BILLING & COST ALLOCATION	LOAD PRESERVATION SYSTEMS High speed load shed Pre-armed load shed schemes
LIGHTING CONTROLS	SEQUENCE OF EVENTS RECORDING (SER) GPS Time synchronization of events

For additional information, contact your nearest Schneider Electric Services and Projects.

System Integration

Power Management Services provides a complete range of design and operational services including specifying, developing, installing, commissioning, supporting and training users of power monitoring and control systems and remote power switching systems. Engineers maintain expertise in many areas such as communications, personal computers, protective relaying, automatic control systems and programmable controllers.

- System Design and Bill of Material Recommendations
- Power Monitoring and Control
- WAGES (Water, Air, Gas, Electric, Steam)
- Enterprise web-based monitoring
- Specification development, drawings, documentation
- Enclosure panel design and build
- Metering Connection Verification/Testing
- Power distribution automation
- On-Site Installation Assistance, Component Configuration & Startup
- Turn-key project management
- Third Party Device and communication interfaces
- Configured Workstations, User Software Interfaces
- Interactive Graphic Design to mimic facility layout, one-lines, equipment status
- Custom Software, Reports & Applications – Billing and Paging

For additional information, contact your nearest Schneider Electric Services and Projects.

Enclosures



Factory Assembled Enclosures

PMO Engineering Services provides a variety of factory assembled enclosures designed for a wide range of power monitoring and control applications. Professional workmanship and layout offer speed and flexibility during installation. Factory tested, pre-wired enclosures with well marked terminals help avoid wiring errors and needless troubleshooting during installation.

- Assemblies include meters & devices wired to terminal blocks, disconnects and shorting blocks
- Tailored to any system voltage :
 - 120/208V, 277/480V & 347/600V Wye
 - 240V, 480V & 600V Delta
 - Utilization of PT's required for higher voltage levels
- Wall mountable and easy to install using concealed holes in the back of the enclosure.
- Complete with necessary documentation and mounting hardware for quick and easy installation
- Carbon steel construction, with industry standard ANSI 61 gray powder coat finish
- Equipped with concealed hinged door, and universal pad-lockable latch.
- Custom engraved nameplates available for all units.

Industrial Enclosure Types 12, & 4, UL & CUL 508A Listed

Available Meter Types	Digital Inputs	Digital Outputs	Analog Inputs	Analog Outputs
PM 820, 850 & 870	Up to 11 / Meter	Up to 7 / Meter	Up to 2 / Meter	Up to 2 / Meter
CM 3250 & 3350	Up to 4 / Meter	Up to 5 / Meter	N/A	N/A
CM 4250 & 4000T	Up to 8 / Meter	Up to 7 / Meter	Up to 1 / Meter	Up to 1 / Meter
ION 6200	N/A	Up to 2 / Meter	N/A	N/A
ION 7300, 7330 & 7350	Up to 4 / Meter	Up to 4 / Meter	Up to 4 / Meter	Up to 4 / Meter
ION 7550 & 7650	Up to 16 / Meter	Up to 7 / Meter	Up to 4 / Meter	Up to 4 / Meter

- Supports Single or Multiple Voltage Sources for Indoor (Type 12) & Outdoor (Type 4) applications
- Available with 1 - 4 meters per panel. Serial & Ethernet Communications are options for all units
- EGX & ION RTU Communication Enclosures with 1-4 devices per panel also available

Commercial Enclosure Type 1, UL & CUL 508A Listed

- Available for the following meter types: PM210, PM710, PM820, and ION6200
- Supports Single Voltage Source only for Indoor (Type 1) applications.
- Available with 1 - 12 meters per panel. Serial Communications are standard for all units.
- No Digital or Analog I/O is available for this option.

Industrial/Utility Socket Enclosure Type 3R, UL & CUL 508A Listed

- Available for ION8600 only, with up to 3 Digital Inputs and 4 Digital Outputs
- Supports Single Voltage Source only for Indoor & Outdoor (Type 3R) applications.
- Units are Ring Type with removable cover.
- Available with 1 meter per panel. Serial & Ethernet Communications options available.
- Supports Form 9S, 35S, 36S, 39S and 76S configurations.
- Options available for remote mounted CTs
- Options available for integrated, bar type CTs
- Optional Test Switch.

Additional engineered to order products are available for a wide variety of custom applications.

- Touch Screen, PC & Server Cabinets
- Generator Control Panels
- PLC Controls & I/O Status Panels
- Retrofit Mechanical Meter Draw Out Cradles with PM and ION Digital Meters
- Communication & Gateway Panels
- Switchgear Automatic Transfer Control Panels
- Water, Air, Gas & Steam (WAGES) Panels

For additional information and pricing please contact your local PowerLogic sales specialist or PowerLogic Inside Sales Support at 1-866-466-7627. Enclosure pricing and literature available for download on our website at www.powerlogic.com/products/enclosures.

To better serve you please have the following information on hand when calling.

- Enclosure type (Indoor or Outdoor) and Environment details (Corrosive or Non-Corrosive)
- Power System Voltage Level and Type (Wye, Delta, or Single Phase)
- Meter Type and Quantity or Device Type and Quantity per enclosure
- Digital & Analog Input and Output requirements
- Ethernet and Serial Communication Requirements

Technical Support



There are several ways to receive top quality support on PowerLogic and ION® products:

Priority Support: Excellent Service, Free Software Upgrades, Training Discounts & More!

- Latest PowerLogic and ION software upgrades to ensure up-to-date systems
- Direct access to expertise for quick issue resolution
- More efficient PowerLogic and ION system utilization
- Higher reliability
- Improved productivity and personal efficiency on the job

Premium Support: Priority + Proactive System Checks + Sr. Technician Assigned to your site

Choose Premium Support when you need to . . .

- Enhance your PowerLogic or ION system's operation with single-sourced pro-active problem identification, solutions recommendations and change management skills
- Partner with technical experts who help coordinate support, provide hands-on assistance, and share knowledge and know-how with you
- Obtain personalized services tailored to your business environment and objectives
- Take advantage of remote software upgrade capabilities
- Anticipate and communicate necessary change



Power Management University

Our training centers offer a variety of training courses designed to improve your total energy management skills. Our instructor led courses are 70% hands-on, with each student having their own lab workstation. We have two main training centers located in Nashville, TN and Victoria, BC and offer training at a variety of Schneider Electric sites across the US and Canada. For more information about how and where we can meet your training needs please call 1-866-466-7627 Ext. 7595.

Course	Course No.
PowerLogic Systems	
Correspondence Courses	
PowerLogic Fundamentals	3000PLUC120CR
PowerLogic System Installation & Troubleshooting	3000PLUC100CR
Core Classes	
Comprehensive PowerLogic Systems	3000PLUC200
Comprehensive PowerLogic Systems Bundle (Includes 3000PLUC120CR)	3000PLUC205
PowerLogic System Installation & Troubleshooting	3000PLUC100
SMS Administrator	3000PLUC300
Target Application Courses	
Critical Power and Power Quality	3000PLUC140
Energy Management with Advanced Reporting	3000PLUC230
Regional SMS Overview	3000PLUC190
Regional SMS Overview Bundle (Includes 3000PLUC120CR)	3000PLUC195
Customer Site Training	3000PLUCSite
System Manager Customer Site Training	3000PLUCSITE
ION Systems	
Core Classes	
ION Enterprise Fundamentals	3000PMUFUND
ION Enterprise Programmer	3000PMUPROG
ION Enterprise Administrator	3000PMUADMIN
ION Enterprise Overview	3000PMUCION
ION Program Overview	3000PMUCPROG
Customer Site Training	3000PMUSITE
ION Enterprise Refresher	3000PMUREFRESH
ION Enterprise Customer Site Training	3000PMUSITE

Power Monitoring & Control

Sepam Series Digital Protective Relay



Series 80
Advanced Display
(A Suffix)



Series 40 or 20
Advanced Display
(A Suffix)



Series 80 Pro
Display
(P Suffix)

80, 40, and 20 Series

The Sepam family of digital protection units, Series 20, 40 and 80, is the newest generation of Sepam relay, a time tested product with a 20-year worldwide history. Modular relay design allows quick and easy future upgrades to communications, digital I/O, analog output or temperature acquisition. The 64x128 bit, graphic LCD display and keypad permit basic relay setting of Series 20 and 40 without a PC. Comprehensive self-testing provides assurance of readiness to protect. The Sepam family also has exceptional withstand to environmental electromagnetic disturbances. An optional 128 x 240 LCD display can show one-line or electrical vectors.

Quick Select Guide

		Feeder or main (Substation)	Transformer	Motor	Generator	Bus	Capacitor Bank
Criteria	Selection						
Network structure	Radial (51, 51N, 46)	S23	T23	M20	G40	B80	C86
	Long feeders (67N)	S41		M41			
	Closed loop (67N, 67)	S42					
	Parallel mains [transf] [sources] (67N, 67)	S42	T42		G82		
	Sync-check required (25)(67N, 67)	S82	T82		G82	B80	
Grounding system	Solid or low/high impedance (51N)	S23	T23	M20	G40		
	Ungrounded or compensated (67N/NC)	S41	T42	M41	G82		
Protection	Basic Feeder [Transf][Motor]	S23	T23	M20	G40		
	Voltage/frequency (27/59/81)	S40	T40	M41	G40	B21	
	ROCOF (81R)	S84				B22	
	Advanced Fdr/Main[Transf][Motor][Gen]	S41	T82	M81	G82	B83	
	Thermal overload (49)-cable	S81					
	Thermal O/L (49)-capacitor bank						C86
	Differential (87T)		T87				
	Machine differential (87M)			M87	G87		
	Machine-transformer unit differential			M88	G88		
	I	S23	T23	M20			
Metering	V, f					B21	
	I, V, f, P, E	S40	T40	M41	G40	B80	
	I, V, V, f, P, E					B83	
	I, I, V, F, P, E		T87	M87	G87		
	THD-I, THD-V	S80	T81	M81	G82	B80	
Temperature	< 8 RTDs (< 16) or 2 types of RTDs		T23	M20	G40		
	> 8 RTDs (< 16) or 2 types of RTDs		T40	M41	G40		
I/Os	< 10 I / 8 O	S23	T23	M20	G40	B21	
	> 10 I / 8 O and < 42 I / 23 O	S80	T81	M81	G82	B80	
Program logic customization	Control matrix	S23	T23	M20	G40	B21	
	Logic equation editor	S40	T40	M41	G40	B80	
	Ladder-logic software	S80	T81	M81	G82	B80	
Modbus communication	1 Modbus port	S23	T23	M20	G40	B21	
	2 Modbus ports	S80	T81	M81	G82	B80	

Note: Units in table depict least complex device types compliant with criterion.

Sepam Series 80 Relay Features

- Standard footprint for enhanced protection of Mains/Feeders, Transformer, Motor, Generator, Capacitor, Bus Applications
- Differential protection of transformer or machine transformer units
- Differential protection of motors and generators
- Protection for mains and ties and important feeders including pre-programmed transfer schemes
- Increased metering capabilities I, V, E, P, PF, THD, vector diagram
- Expanded logic equation capabilities (an option for Logipam PLC ladder logic)
- Setting software with graphical assistance, opt mimic-based display
- Battery backup for historical and fault waveform data retention, wide range DC control power
- Two rear communication interfaces
- Includes all Series 20 and Series 40 features

Sepam Series 40 Relay Features

- Compact standard footprint (< 4"deep) for enhanced protection of Mains/Feeders, Transformer, Motor, Generator Applications
- Directional overcurrent protection for dual mains and ties and closed loop feeders
- Current and voltage inputs I, V, E, P, PF
- Setting software with Boolean logic equation assistance
- CT/VT and Trip Circuit supervision
- Sixteen seconds of fault recording, last 5 trip reports, and last 200 time-tagged alarms
- Rear communication port for interface to optional Modbus® communications modules
- Includes all Series 20 features

Sepam Series 20 Relay Features

- Backlit LCD graphic bitmap display
- Compact standard footprint (< 4"deep) for basic protection of Mains/Feeders, Transformer, Motor, Bus (Voltage) Applications
- 16 inverse time overcurrent characteristic curves
- Setting software with offline file creation and download to relay
- Two 86 cycle records of fault recording, last trip fault values, and last 64 time-tagged alarms retained
- Provides trip diagnostic information for analysis of faults
- Self-test diagnostic ensures correct operation of relay and integrity of protection
- Wide range of control power inputs
- Display operation minimal training required for operation.
- Application specific design for Main/Feeder, Transformer, Motor, Bus (Voltage) zones
- Zone selective interlocking (ZSI) improved protection coordination
- Rear communication port for interface to optional Modbus communications modules, plus dual port module, opt protocols DNP3 and IEC60870-5-103, and also F/O
- Modular architecture
- Breaker diagnostics

Series 80 Applications

Protection	Application ANSI Code	S80	S81	S82	S84	T81	T82	T87	M81	M87	M88	G82	G87	G88	B80	B83	C86
Phase overcurrent▲	50/51	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Ground fault / Sensitive ground fault▲	50N/51N 50G/51G	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
Breaker failure	50BF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Negative sequence / unbalance	46	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Thermal overload for cables	49RMS		2	2	2												
Thermal overload for machines▲	49RMS					2	2	2	2	2	2	2	2	2			
Thermal overload for capacitors	49RMS																2
Capacitor bank unbalance	51C																8
Restricted ground fault	64REF					2	2	2				2		2			
Two-winding transformer differential	87T							1			1			1			
Machine differential	87M								1				1				
Directional phase overcurrent▲	67			2	2		2	2				2	2	2			
Directional ground fault▲	67N/67NC		2	2	2	2	2	2	2	2	2	2	2	2			
Directional active overpower	32P		2	2	2	2	2	2	2	2	2	2	2	2			
Directional reactive overpower	32Q								1	1	1	1	1	1			
Directional active underpower	37P				2							2					
Phase undercurrent	37								1	1	1						
Excessive starting time, locked rotor	48/51LR								1	1	1						
Starts per hour	66								1	1	1						
Field loss (underimpedance)	40								1	1	1	1	1	1			
Pole slip	78PS								1	1	1	1	1	1			
Overspeed (2 set points)■	12								▼	▼	▼	▼	▼	▼			
Underspeed (2 set points)■	14								▼	▼	▼	▼	▼	▼			
Voltage-restrained overcurrent	50V/51V											2	2	2			
Underimpedance	21B											1	1	1			
Inadvertent energization	50/27											1	1	1			
Third harmonic undervoltage/100% stator ground fault	27TN/64G2/64G											2	2	2			
Overfluxing (V / Hz)	24							2				2	2	2			
Positive sequence undervoltage	27D	2	2	2	4	2	2	2	2	2	2	2	2	2	4	4	4
Remanent undervoltage	27R	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Undervoltage (L-L or L-N)	27	4	4	4	2	4	4	4	4	4	4	4	4	4	2	2	2
Overvoltage (L-L or L-N)	59	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Neutral voltage displacement	59N	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Negative sequence overvoltage	47	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Overfrequency	81H	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Underfrequency	81L	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Rate of change of frequency	81R				2												
Recloser (4 cycles)■	79	▼	▼	▼	▼												
Thermostat / Buchholz■	26/63					▼	▼	▼	▼		▼	▼		▼			
Temperature monitoring (16 RTDs)◆	38/49T					▼	▼	▼	▼	▼	▼	▼	▼	▼			▼
Synchronism-check★	25	▼	▼	▼	▼	▼	▼	▼				▼	▼	▼	▼	▼	

Series 40/20 Applications

Protection	Application ANSI Code	S23	S40	S41	S42	T23	T40	T42	M20	M41	G40	B21	B22
Phase overcurrent▲	50/51	4	4	4	4	4	4	4	4	4	4		
Voltage-restrained overcurrent	50V/51V										1		
Ground fault / Sensitive ground fault▲	50N/51N 50G/51G	4	4	4	4	4	4	4	4	4	4		
Breaker failure	50BF	1	1	1	1	1	1	1	1	1	1		
Negative sequence / unbalance	46	1	2	2	2	1	2	2	1	2	2		
Directional phase overcurrent▲	67				2			2					
Directional ground fault▲	67N/67NC				2			2					
Directional active overpower	32P			1	1					1	1		
Directional reactive overpower	32Q/40									1	1		
Thermal overload▲	49RMS					2	2	2	2	2	2		
Phase undercurrent	37								1	1			
Excessive starting time, locked rotor	48/51LR/14								1	1			
Starts per hour	66								1	1			
Positive sequence undervoltage	27D/47											2	2
Positive sequence undervoltage	27D									2			
Remanent undervoltage	27R									1		1	1
Phase-to-phase undervoltage	27											2	2
Phase-to-neutral undervoltage	27S											1	1
Undervoltage◆	27/27S		2	2	2		2	2		2	2		
Overvoltage◆	59		2	2	2		2	2		2	2	2	2
Neutral voltage displacement	59N		2	2	2		2	2		2	2	2	2
Negative sequence overvoltage	47		1	1	1		1	1		1	1		
Overfrequency	81H		2	2	2		2	2		2	2	1	1
Underfrequency	81L		4	4	4		4	4		4	4	2	2
Rate of change of frequency	81R												1
Recloser (4 cycles)	79	▼	▼	▼	▼								
Temperature monitoring (8 or 16 RTDs)	38/49T					▼	▼	▼	▼	▼	▼		
Thermostat / Buchholz	26/63					▼	▼	▼					

Note: Numerals in table indicate number of protection setpoints

- ▲ Protection functions with 2 groups of settings
- Requires MES120 I/O module
- ◆ Requires MET1482 RTD Input module
- ★ Requires MCS025 synch check module
- ▼ Option

Power Monitoring & Control

Sepam Series Pricing and Accessories

List Price by Catalogue Number

Model	Application	Catalogue No.	Price	Model	Application	Catalogue No.	Price
Series 80	S80 - Substation/feeder [current & voltage]	SQ1S80A▲		Series 40	S40 - Substation/feeder [current & voltage]	SQ1S40A	
	S81 - Substation/feeder [directional grd O/C]	SQ1S81A			S41 - Substation/feeder [directional grd O/C]	SQ1S41A	
	S82 - Substation/feeder [directional ph & grd O/C]	SQ1S82A			S42 - Substation/feeder [directional ph & grd O/C]	SQ1S42A	
	S84 - Substation/main [separation/ load shed]	SQ1S84A			T40 - Transformer [current & voltage]	SQ1T40A	
	T81 - Transformer [current & voltage]	SQ1T81A			T42 - Transformer [Dir. Ph & Grd O/C]	SQ1T42A	
	T82 - Transformer [Dir. Ph & Grd O/C]	SQ1T82A			M41 - Motor [Dir. Grd O/C]	SQ1M41A	
	T87 - Transformer [Diff.-2 wdg]	SQ1T87A			G40 - Generator [Dir. Real & Reac Power, Volt-Restr O/C]	SQ1G40A	
	M81 - Motor [Dir. Grd O/C]	SQ1M81A		Series 20	S23 - Substation/feeder [breaker failure]	SQ1S23A	
	M87 - Motor [Mach. Diff.]	SQ1M87A			T23 - Transformer [breaker failure]	SQ1T23A	
	M88 - Motor [Transf. Diff.]	SQ1M88A			M20 - Motor	SQ1M20A	
	G82 - Generator [Dir. Watt & Var, Volt-Restr O/C]	SQ1G82A			B21 - Bus (Voltage/Freq)	SQ1B21A	
	G87 - Generator [Mach diff]	SQ1G87A			B22 - Loss of Mains (Voltage/Freq/ROCOF)	SQ1B22A	
	G88 - Generator [Transf diff]	SQ1G88A					
	B80 - Bus [Main+1ph volt]	SQ1B80A					
	B83 - Bus [Tie +3ph volt]	SQ1B83A					
	C86 - Capacitor [4 step 2xWye banks]	SQ1C86A					

▲ Replace "A" suffix with "P" to select the "Pro" version mimic display.


Series 80+40+20 Accessory List

Accessory Type	Series 80	Series 40/20	Catalogue No.	Description	Price
Digital I/O Module	x		MES120	14 inputs + 6 outputs / 24-250Vdc	
	x		MES120G	14 inputs + 6 outputs / 220-250Vdc/hi p.u.	
	x		MES120H	14 inputs + 6 outputs / 110-125 Vdc/hi p.u.	
		x	MES114	10 Input / 4 output module	
		x	MES114E	10 inputs + 4 outputs 110/125V	
		x	MES114F	10 inputs + 4 outputs 220/250V	
Communication I/F ■ Module	x	x	ACE959	RS485 4-wire Interface Module (requires ext. 24VDC control pwr)	
	x	x	ACE9492	RS485 2-wire Interface Module (requires ext. 24VDC control pwr)	
	x	x	ACE937	Fiber optic Interface Module	
	x	x	ACE969TP	(2)RS485 2wire I/F	
	x	x	ACE969FO	(1) RS485 2wire + (1) F/O I/F	
Analog I/O module	x		MCS025	Synch check module (includes cable CCA785)	
	x	x	MET1482	8 temperature sensor input module	
	x	x	MSA141	Analog output module	
	x	x	DSM303	Remote advanced MMI (requires cable CCA77x see below)	
	x		SFT080	Logipam plc logic software	
	x		AMT840	Assembly plate for surface mounting of MCS module	
Analog I/O Cables	x	x	CCA770	2ft cable from remote display to base unit	
	x	x	CCA772	2m cable from remote display to base unit	
	x	x	CCA774	4m cable from remote display to base unit	
Ground Sensor CTs (mV out)	x	x	CSH30	Interposing window CT for Residual current input	
	x	x	CSH120	Ground Sensor CT - 120 mm window	
	x	x	CSH200	Ground Sensor CT - 200 mm window	
	x	x	ACE990	Aux. CT for Ground Sensor CT Ratio Adjustment (for retrofit)	
Configure software ♦	x	x	SFT2841KIT	Setting/operating software kit (including SFT2826 osc s/w+CCA783 cable)	
Selected spares★	x	x	2640KIT	Terminal blocks for MES modules	
	x	x	CCA634	1 or 5 A CT Current Connector	
	x	x	CCT640	Voltage Connector	
	x	x	CCA612	Cable for communication module to relay connection	
	x	x	CCA783	Cable for pc to relay connection	
	x		CCA785	MCS025 cable	
		x	CCA670	LPCT Current Connector	
	x		CCA671	LPCT Current Connector	

■ Includes CCA612 cable to relay rear port

♦ One s/w kit required per Series 80 order and recommended per Series 40/20 order


★ To be ordered as spare or replacement

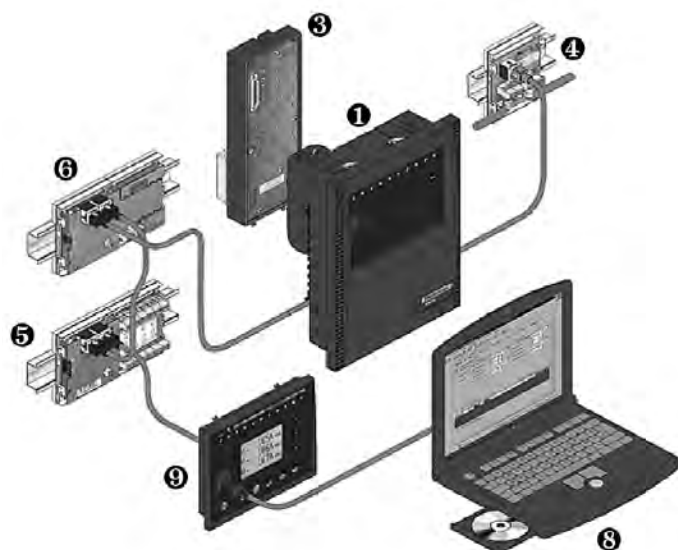

Series 20 and Series 40

- ❶ Base Unit ▼
- ❷ Parameter and protection settings saved on removable memory cartridge (Series 80 only)
- ❸ 42 logic inputs and 23 relay outputs, with 3 optional modules. (Series 80): 10 logic inputs and 8 relay outputs with optional module (Series 20/40)
- ❹ Connection to communication networks
- ❺ Temperature sensors
- ❻ Low-level analog output
- ❼ Synchro-check module (Series 80 only)
- ❽ Software tools
- ❾ Remote display ▼

▼ Remote Display for use with "Basic" Base Units
-- contact local sales office

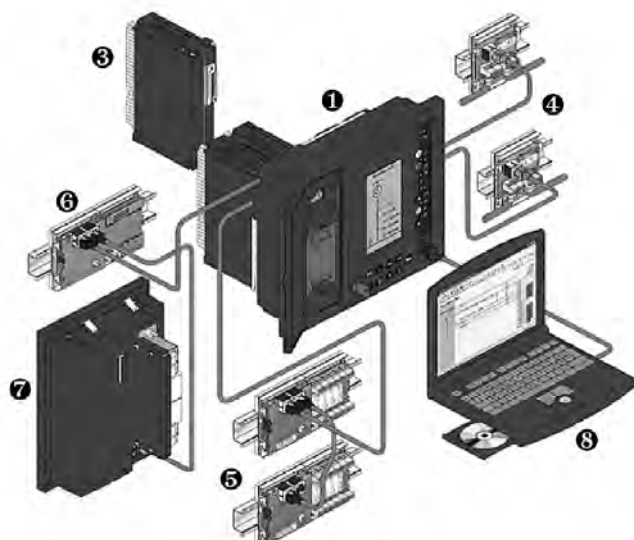

Series 80

Selection Example

Follow these steps:			Example:			
Selection Sequence	Type Part	QTY	Catalogue No.	Description	Price	
[1] Select from Table 4.35 per system, features Table 4.32 & 4.33/4.34	Relay unit	1	SP1T87A	T87- Transformer (Diff.-2 wdg)		
[2] Spare by application	Memory module	0	MMS020xxx	Spare memory module		
[3] Select from Table 4.36 (as required)	Digital I/O	1	MES120	14 inputs + 6 outputs / 24-250Vdc		
[4] Select from Table 4.36 (as required)	Communication module	1	ACE959	RS485 4-wire Interface Module I		
[5] Select from Table 4.36 (as required)	RTD Input	1	MET1482	8 temperature sensor input module		
[6] Select from Table 4.36 (as required)	Analog output	0	MSA141	Analog output module (1 channel)		
[7] Select from Table 4.36 (as required)	Sync check (25) module	1	MCS025	Synch check module (includes cable CCA785)		
[8] Select from Table 4.36 (as required)	Config S/W	1	SFT2841KIT	Setting / operating software kit		
[9] Select from Table 4.36 (as required)	Cable for RTD I/F Module	1	CCA772	2m cable from remote display to base unit		

This page is left intentionally blank.