



# XTRFY MZ1 QUICK-START GUIDE

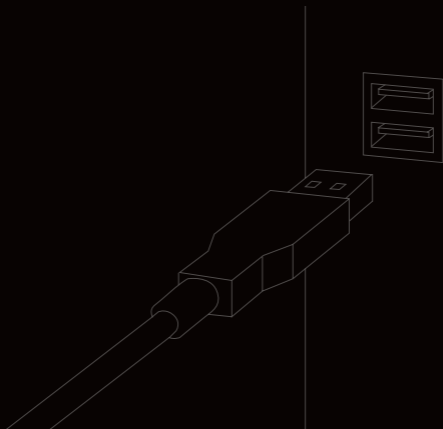


## CPI


- 400
- 800
- 1200
- 1600
- 3200
- 4000
- 7200
- 16000

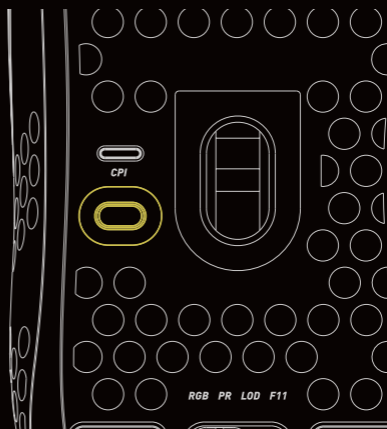


RGB PR LOD F11

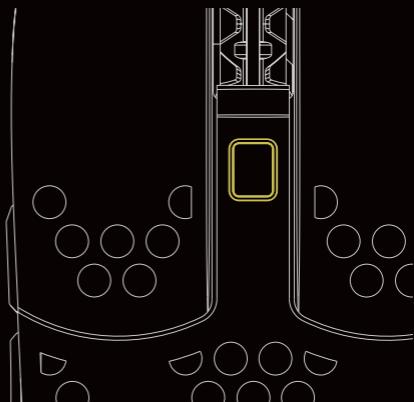


RGB PR LOD F11

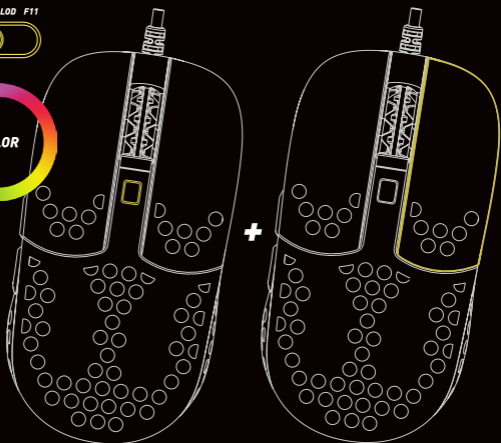


RGB PR LOD F11

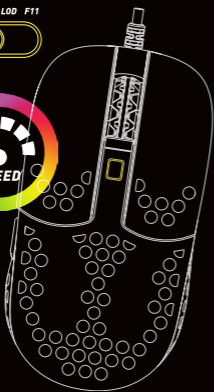


+

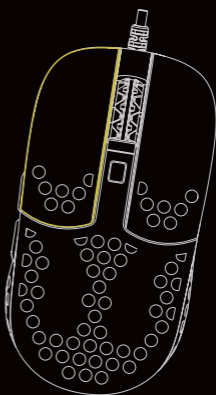

RGB PR LOD F11

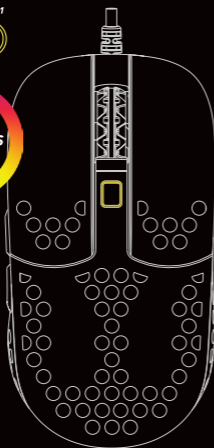

+

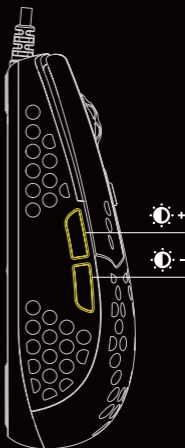


RGB PR LOD F11



### POLLING RATE

- 125 HZ
- 500 HZ
- 1000 HZ




RGB PR LOD F11



### LIFT-OFF DISTANCE

- 1 MM
- 2.5 MM



RGB PR LOD F11



### DEBOUNCE

- 2 MS
  - 4 MS
  - 8 MS
  - 12 MS
- ⌚ 3 s

= F11

