WHERE PERFORMANCE MEETS VALUE



### Engineered with You in Mind

#### **Built to Perform**

FallTech Fall Protection products are engineered to perform and keep workers safe when working in tough, challenging conditions. Whether on a construction site, chemical facility, refinery, rod busting or any other job, FallTech's Anchors, Bodywear, Connectors, Self-Retracting Devices, Tripods and products offer superior durability and protection to keep workers safe.

#### The FallTech Advantage

You can work in confidence knowing your fall protection is engineered to the highest standards of safety and reliability and comply with all applicable ANSI Standards and OSHA Regulations.

#### **FallTech Testing Lab Accreditation**

FallTech's internal testing lab has met the stringent requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89) and has demonstrated compliance with ISO/IEC Standard 17025:2005.




#### Perform with Confidence

Different jobs have varying fall protection requirements; at the core, every worker requires safety. The Journeyman *FLEX* family of harnesses offers numerous bodywear options for whatever job situation you or your team need to tackle.

Journeyman *FLEX* harnesses deliver comfort, durability and value. Built for the toughest of work environments, the *FLEX* line offers the largest variety of fall protection for construction and general industry. Whatever the application, Journeyman *FLEX* has you and your team covered with options in both steel and aluminum hardware.



### Journeyman FLEX...Comfort is all in the Padding

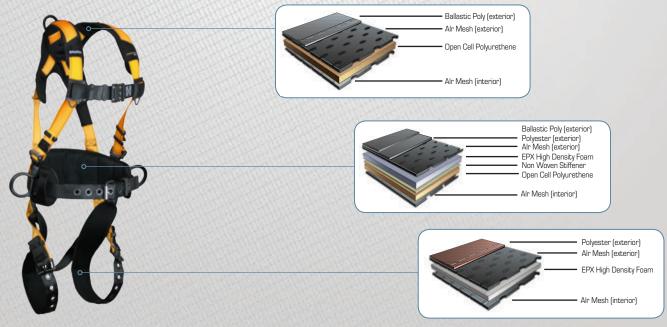

### Premium Hardware, Everyday Value



- Lightweight anonized aluminum D-rings, torso and belt adjusters to reduce weight and fatigue throughout the day.
- 2 Tighter web construction offers added strength and longer life while maintaining pliability for ease of movement.
- 3 Strategically positioned Hip D-rings for optimized Work Positioning.
- Re-engineered padding on the Shoulders, Waist and Legs for added all day comfort.
- Ergonomic waist pad with integrated reinforcement elements provides rigid support.
- 6 ANSI Z359.11 compliant lanyard parking elements capture lanyard legs when not in use to reduce trip hazards.
- Extreme duty removable work belt designed to remain in position supporting up to three loaded tool bags.
- Quick Connect buckles on the chest and legs feature a visual indicator that displays green when properly fastened.
- Integrated dorsal strap keepers minimize downward sliding of the dorsal D-ring when SRD's are attached.
- FallTech exclusive CamLock torso adjusters allows simple, quick one-handed adjustment.
- Optional Suspension Trauma Relief System (# 5040) provides self-rescue support.











#### Journeyman FLEX Aluminum Harnesses

The Journeyman *FLEX* Aluminum Harness continues the tradition of uncompromising performance you've come to rely on every day. New design elements have been engineered into the harness for added comfort reducing fatigue to the user. With its reduced weight and added comfort, the Journeyman *FLEX* Aluminum harness offers unmatched durability, reliability and value.

- · Construction Belted, Non-Belted, Retrieval and Climbing configurations available.
- ANSI Z359.11-2014.
- OSHA 1910.269 & 1926







7021BFD

#### Standard Non-Belted

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7021B	U, XL, 2X	D	ТВ	QC	ACL	FA
7021BFD	S, M, L, XL	D, S	ТВ	QC	ACL	FA, C
7021BQC	U, XL, 2X	D	QC	QC	ACL	FA
7023B	U, XL	D, H	ТВ	QC	ACL	FA, WP
7023BQC	U, XL	D, H	QC	QC	ACL	FA, WP
7027B	U, XL	D, Sh	ТВ	QC	ACL	FA, R

Sizes	U = UniFit (S,M,L) XS = XSmall XL = XLarge 2X = 2XLarge 3X = 3XLarge X/2X = XLarge/2XLarge 2X/3X = Dual-size 2XLarge/3XLarge 3/4X = Dual-size 3XLarge/4XLarge
Connecting Element	D = Dorsal H = Hip S = Sternal Sh = Shoulder
Chest/Legs/Torso	MB = Mating Buckle TB = Tongue Buckle QC = Quick Connect SFR = Steel Friction Roller ACL = Alum Cam Lock
Applications	FA = Fall Arrest WP = Work Positioning C = Climbing R = Retrieval Rs = Restraint







7029B

Construction	D 1. 1
Longthuction	ROITOG

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7035B	S, M, L, 2X, 3X	D, H	ТВ	QC	ACL	FA, WP
7035QC	S, M, L, XL	D, H	QC	QC	ACL	FA, WP

C.	-		-	
UI	o°	55	<b>□</b> • \	ver

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7029B	U, XL	D, H, S	ТВ	QC	ACL	FA, WP, C

Sizes	U = UniFit (S,M,L) XS = XSmall XL = XLarge 2X = 2XLarge 3X = 3XLarge X/2X = XLarge/2XLarge 2X/3X = Dual-size 2XLarge/3XLarge 3/4X = Dual-size 3XLarge/4XLarge
Connecting Element	D = Dorsal H = Hip S = Sternal Sh = Shoulder Sd = Saddle/Seat W = Waist/Rear DL = Dorsal Web Loop
Chest/Legs/Torso	MB = Mating Buckle TB = Tongue Buckle QC = Quick Connect SFR = Steel Friction Roller ACL = Alum Cam Lock
Applications	FA = Fall Arrest WP = Work Positioning C = Climbing R = Retrieval Rs = Restraint



### Time Tested Performance



- Tighter web construction offers added strength and longer life while maintaining pliability for ease of movement.
- Durable alloy steel hardware.
- 3 Low-profile spring-tension torso adjusters for solid performance..
- 4 Strategically positioned Hip D-rings for optimized Work Positioning.
- Re-engineered padding on the Shoulders, Waist and Legs for added all day comfort.
- 6 Ergonomic waist pad with integrated reinforcement elements provides rigid support.
- ANSI Z359.11 compliant lanyard parking elements capture lanyard legs when not in use to reduce trip hazards.
- 8 Extreme duty removable work belt designed to remain in position supporting up to three loaded tool bags.
- Optional: Quick Connect buckles on the chest and legs feature a visual indicator that displays green when properly fastened.
- Integrated dorsal strap keepers minimize downward sliding of the dorsal D-ring when SRD's are attached.
- Optional Suspension Trauma Relief System (PN 5040) provides self-rescue support, enhances blood circulation and allows leg movement until rescue arrives.







#### Journeyman FLEX Steel Harnesses

The Journeyman FLEX Steel Harness has a longstanding tradition of being the working man's harness. New design elements have been incorporated into this jobsite workhorse for improved comfort, durability and reliability. The Journeyman FLEX Steel continues the tradition of keeping your team safe.

- · Construction Belted, Non-Belted, Retrieval and Climbing configurations available.
- ANSI Z359.11-2014.
- OSHA 1910.269 & 1926







7021QCFD

#### Standard Non-Belted

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7021	XS, U, XL, 2X, 3X, 4X	D	ТВ	QC	SFR	FA
7021FD	S, M, L, XL	D, S	ТВ	MB	SFR	FA, C
7021QC	U, XL, 2X/3X	D	QC	QC	SFR	FA
7021QCFD	S, M, L, XL, 2X	D, S	QC	QC	SFR	FA, C
7023	U, XL, 2X, 3X, 4X	D, H	ТВ	МВ	SFR	FA, WP
7023QC	UniFit	D, H	QC	QC	SFR	FA, WP

Sizes	U = UniFit (S,M,L) XS = XSmall XL = XLarge 2X = 2XLarge 3X = 3XLarge X/2X = XLarge/2XLarge 2X/3X = Dual-size 2XLarge/3XLarge 3/4X = Dual-size 3XLarge/4XLarge
Connecting Element	D = Dorsal H = Hip S = Sternal Sh = Shoulder Sd = Saddle/Seat W = Waist/Rear DL = Dorsal Web Loop
Chest/Legs/Torso	MB = Mating Buckle TB = Tongue Buckle QC = Quick Connect LQC = Locking QC SFR = Steel Friction Roller
Applications	FA = Fall Arrest WP = Work Positioning C = Climbing R = Retrieval Rs = Restraint







	7035QCFI
	, 000001

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7034	S, M, L, XL, 2X, 3X	D, H, Sh	ТВ	MB	SFR	FA, WP, R
7034QC	S, M, L, XL	D, H, Sh	QC	QC	SFR	FA, WP, R
7035	XS, S, M, L, XL, 2X, 3X, 4X	D, H	ТВ	МВ	SFR	FA, WP
7035QC	S, M, L, XL, 2X, 3/4X	D, H	QC	QC	SFR	FA, WP
7035FD	S, M, L, XL	D, H, S	ТВ	МВ	SFR	FA, WP, C
7035QCFD	S, M, L, XL	D, H, S	QC	QC	SFR	FA, WP, C

Sizes	U = UniFit (S,M,L) XS = XSmall XL = XLarge 2X = 2XLarge 3X = 3XLarge X/2X = XLarge/2XLarge 2X/3X = Dual-size 2XLarge/3XLarge 3/4X = Dual-size 3XLarge/4XLarge		
Connecting Element	D = Dorsal H = Hip S = Sternal Sh = Shoulder Sd = Saddle/Seat W = Waist/Rear DL = Dorsal Web Loop		
Chest/Legs/Torso	MB = Mating Buckle TB = Tongue Buckle QC = Quick Connect LQC = Locking QC SFR = Steel Friction Roller		
Applications	FA = Fall Arrest WP = Work Positioning C = Climbing R = Retrieval Rs = Restraint		







7	$\mathbf{c}$	$\mathbf{a}$	7
_		_	

7028

7029QC

etrieval						
Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7027	U, XL, 2X, 3X	D, Sh	ТВ	MB	SFR	FA, R
7027QC	UniFit	D, Sh	QC	QC	SFR	FA, R

Part #	Sizes	Connecting Elements	Leg Closures	Chest Closure	Torso Adjustment	Applications
7028	U, X/2X	D, S	ТВ	МВ	SFR	FA, C
7028QC	U, X/2X	D, S	QC	QC	SFR	FA, C
7029	XS, U, XL, 2X, 3X	D, H, S	ТВ	MB	SFR	FA, WP, C
7029QC	U, X/2X	D, H, S	QC	QC	SFR	FA, WP, C

Sizes	U = UniFit (S,M,L) XS = XSmall XL = XLarge 2X = 2XLarge 3X = 3XLarge X/2X = XLarge/2XLarge 2X/3X = Dual-size 2XLarge/3XLarge 3/4X = Dual-size 3XLarge/4XLarge
Connecting Element	D = Dorsal H = Hip S = Sternal Sh = Shoulder Sd = Saddle/Seat W = Waist/Rear DL = Dorsal Web Loop
Chest/Legs/Torso	MB = Mating Buckle TB = Tongue Buckle QC = Quick Connect LQC = Locking QC SFR = Steel Friction Roller
Applications	FA = Fall Arrest WP = Work Positioning C = Climbing R = Retrieval Rs = Restraint



### FallTech®

Discover the full selection of Fall Protection products at www.FallTech.com



www.falltech.com

1306 S. Alameda St. Compton, CA 90221-4803 © 2017

800.719.4619

323.752.5613











Warning: All Fall Protection equipment should only be used after reading and understanding the manufacturer's instructions and proper training on the product. Failure to receive proper training and follow the manufacturer's instructions could result in serious injury or death. #MBFLEXREVA