

2020

2020

AIR CONDITIONERS



LG Electronics

<http://www.lg.com>  
<http://partner.lge.com>

Copyright © 2020 LG Electronics. All rights reserved.

Distributed by




LG HVAC  
SOLUTION

# AIR CONDITIONERS



# EUROPE SALES INFRASTRUCTURE

-  Europe B2B Regional Head Office
-  National Sales Office
-  Air Conditioning Academy
-  European Distribution Center
-  Europe Energy Lab
-  Production Site

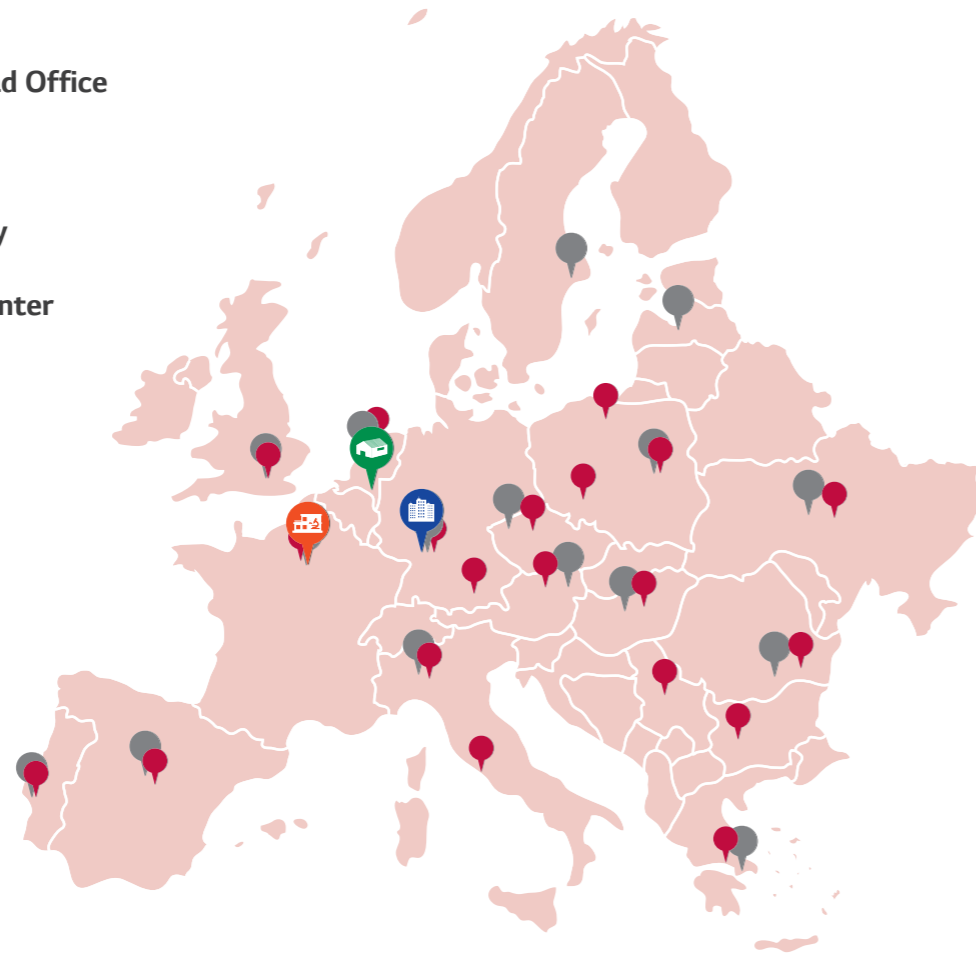

# GLOBAL PRODUCTION SITE



## LG Energy Labs in Europe

LG Energy Labs are driven to fulfill the commitment of meeting all the requirements regarding energy efficiency and environmental demands. Each LG Energy Lab is an innovative site dedicated to provide essential commercial and residential products in heating, ventilation and the latest energy efficient air conditioning solutions. Additionally, as a showcase, the LG Energy Lab is equipped with complete monitoring and control systems. The performance of all products are tracked and analyzed by a team of Research and Development engineers based in France, Finland and Korea, ensuring maximum efficiency and reliability during the complete products' lifecycle.



## European Air Conditioning Distribution Center

LG's European Air Conditioning Distribution Center is centralised in Oosterhout, the Netherlands. Supplying and delivering products to 15 countries in Europe, this Distribution hub has contributed to quick and seamless delivery, direct shipping for smaller orders and bespoke delivery to air conditioners. The hub tries to manage inventory efficiency by complying with the LG EU's established inventory pool.

# TOTAL HVAC SOLUTION PROVIDER

Since manufacturing Korea's first air conditioner exclusively designed for residential use in 1968, LG has been a pioneer of air conditioning innovation. Encouraged by LG's technological leadership in the residential air conditioning sector since the late 1990s, LG moved into the commercial air conditioning sector.


LG has established itself as an exemplary HVAC and energy solutions provider, investing in new technologies, with the addition of chiller, VRF systems and building management systems (BMS) to its comprehensive product portfolio. Alongside its wide range of innovative solutions, the LG promise is to deliver unparalleled customer service.

and training programs that offer excellent hands-on experience. Additionally, LG provides advanced and highly sophisticated tools for HVAC system engineers and installers, including its time saving LG Air Conditioner Technical Solution (LATS) software. LATS allows LG to support clients with draft energy estimation and energy modeling, model selection and design, lifecycle cost analysis and more to ensure a seamless process from planning to execution. LG also operates several state-of-the-art R&D facilities all across the planet.

LG produces expert air conditioning professionals at its academic centers, of which there are nearly 80 worldwide. These academic centers provide workshops

# Made Better with LG ThinQ™

With most people living lives that are more hectic than ever before, we see the enormous potential benefits new technologies will bring to the home. LG ThinQ links smart products together so that they can work in unison to make your home smarter and more connected. New levels of control and convenience simplify everyday life and free up time so that you can stay focused on what matters. Furthermore, transformative features and services with artificial intelligence will take home evolution one step further. LG ThinQ will provide more personalized and optimized solutions by learning your needs and preferences through its wide range of products. Get more done while doing less. LG ThinQ's Personalized Solution, Proactive Advice, Maximum Efficiency and Intuitive Control deliver an elevated, more intelligent lifestyle. LG ensures its intelligent offerings, AI-powered products and services unlock new roles for homes that can play an important role for truly smart living. Think Wise. Be Free.

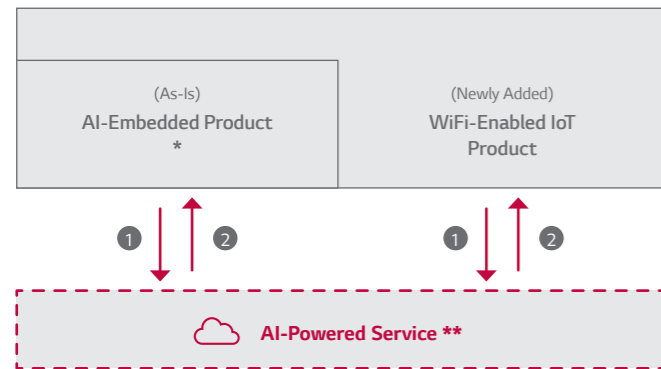

- ① Understanding users via data collection
- ② Providing tips & solutions through AI data analytics

\* Previous LG ThinQ products-Requirement: evolving products with vocal/visual/product intelligence  
 \*\* Examples of AI-Powered Service: -Usage guide/tips, Predictive maintenance, Auto/semi-auto setting (TBD)

## Consumer Benefits



### Intuitive Control

LG ThinQ adds convenience to your daily life by simplifying daily tasks. The LG ThinQ experience is reliable, flexible and effortless from setup to control -and beyond. LG ThinQ products can be controlled from anywhere and at any time with simple voice-commands and a tap of the innovative ThinQ smartphone application. Meaning anywhere can be your home.



### Maximum Efficiency

LG ThinQ minimizes energy consumption and can even track your energy usage and expenditure. Beyond mechanical advancements, LG ThinQ provides unrivaled energy efficiency by utilizing a combination of analytics, sensors and usage data.



### Personalized Solution

LG ThinQ provides tailored recommendations and optimal settings, with your needs and preferences taken into account. Thanks to the power of AI, the same products can offer different experiences depending on your unique tastes and specific situations.

“  
**LG ThinQ :**  
**A Brand for Products and**  
**Services Incorporating**  
**Advanced AI Technologies**  
 ”





134 - 249

## COMMERCIAL

SINGLE SPLIT

138

# INDEX

008 - 133

## RESIDENTIAL

WALL MOUNTED

016

MULTI SPLIT

072



# RESIDENTIAL

WALL MOUNTED

MULTI SPLIT



Anytime, Anywhere!

# DUAL COOL ThinQ™


with Voice Control



OK Google, turn on the air conditioner.



Sure, turning on

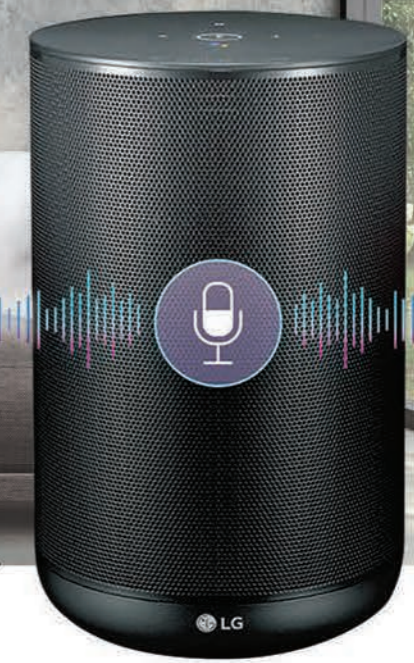

## Key Feature

### Enhance your daily life with LG ThinQ

**Cool home when you arrive**  
"It would be wonderful if my place is already cool when I arrive."

**Check electricity bills throughout the month**  
"How much have I been using the AC lately?"

**Switch off AC after you've left**  
"Oh no! Did I remember to turn off the AC?"

**No need to search for the remote control your AC with your phone**  
"Where's the remote control? I don't want to move a inch from my bed!"


**LG ThinQ™**

#### Voice control for a better life

- **Very intuitive** : It has never been that simple to control a device.
- **Accessible to everyone** : Young to elder people. Increase your comfort by asking so.
- **Time saving** : Don't look for the remote control anymore, just say it with your voice instead.

### Simple voice control, time saving & accessible to everyone

No need to wander around searching for your AC's remote control. LG DUALCOOL LG ThinQ models are also compatible with AI speakers such as LG ThinQ with Google Assistant, Alexa, Google Home and more. From now on, don't bother pressing any buttons. Use your voice instead.

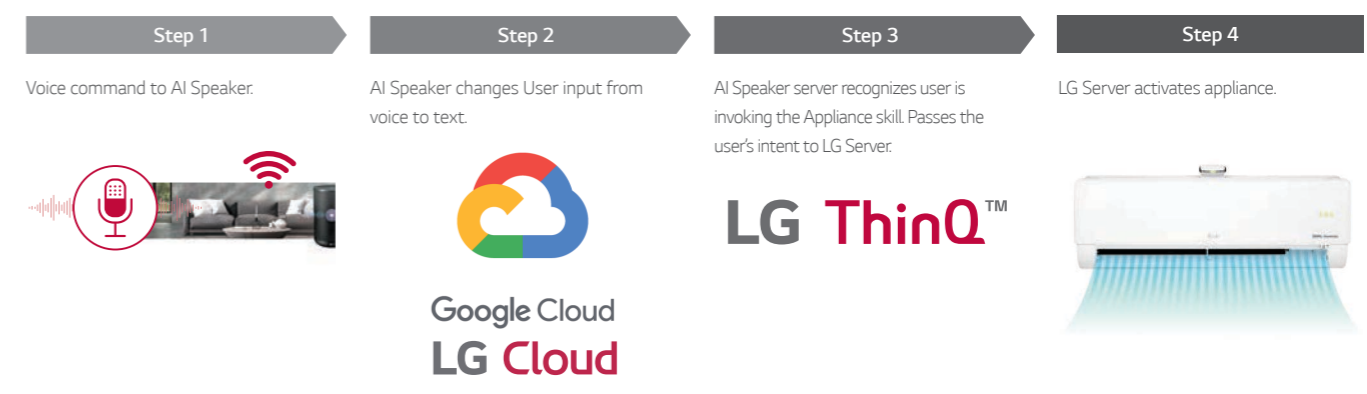


※ LG SmartThinQ is now renamed to LG ThinQ  
 ※ Smart features and voice assistant product may vary by country and model. Check with your local retailer or LG for service availability.

Don't Worry!  
Now, breathe healthily



# DUALCOOL PURE

with Air Purification

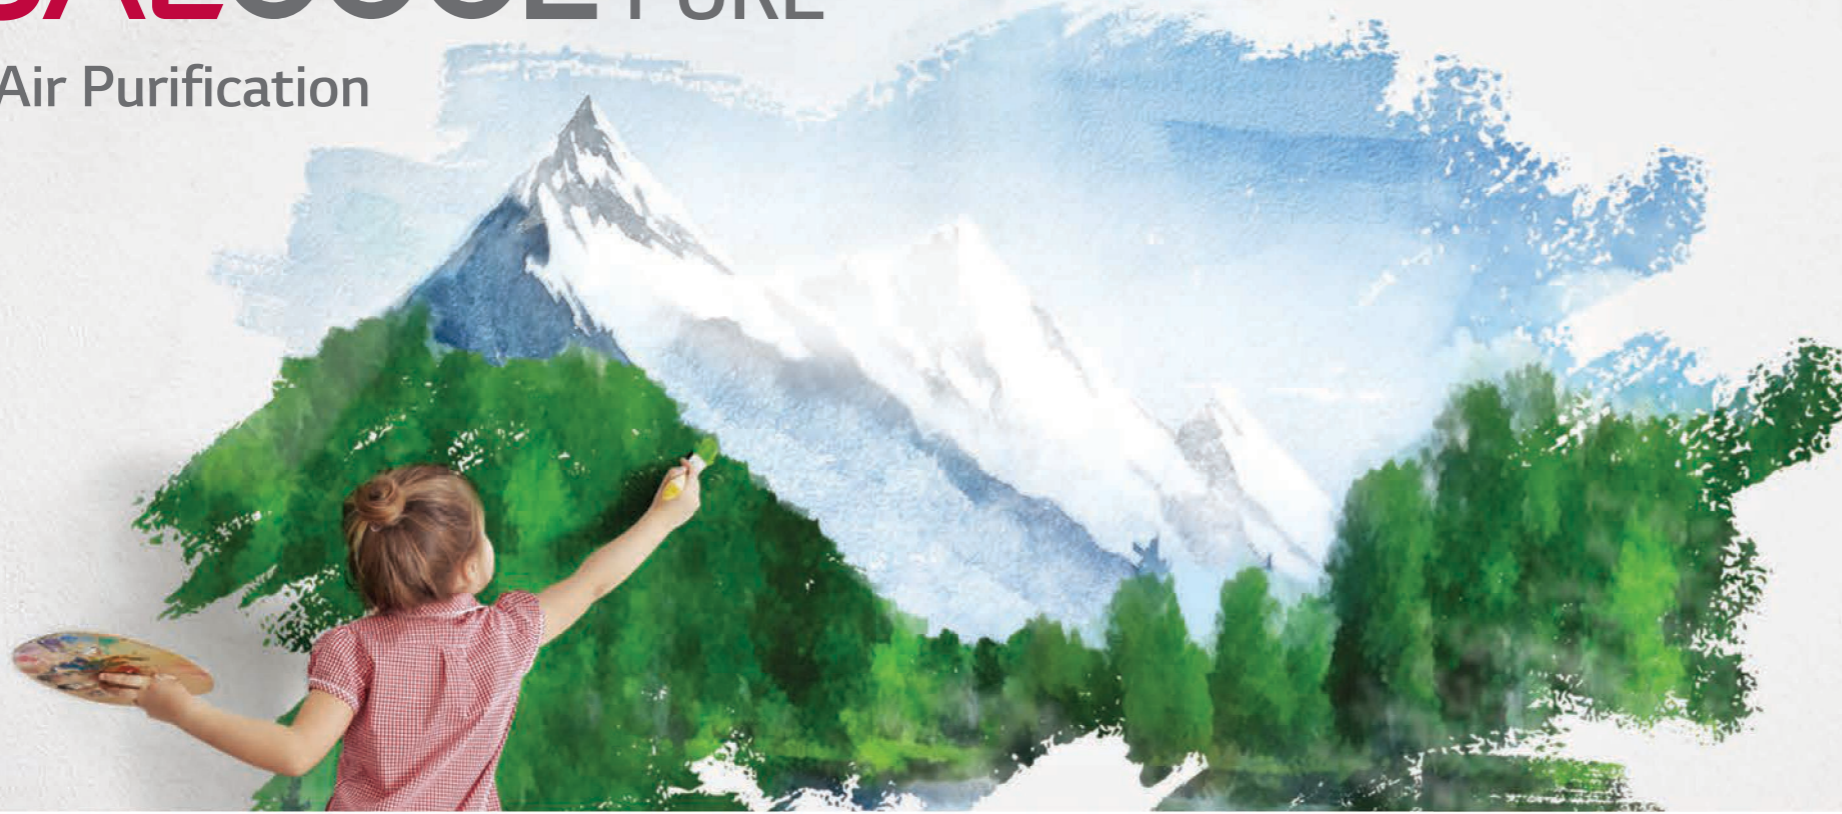

Cooling + Heating + Air purification



Comfort 365 days

Removes Ultrafine dust with




Ion Diffuser &  
Micro Dust filtering system

Real-time control & monitoring with



LG ThinQ APP

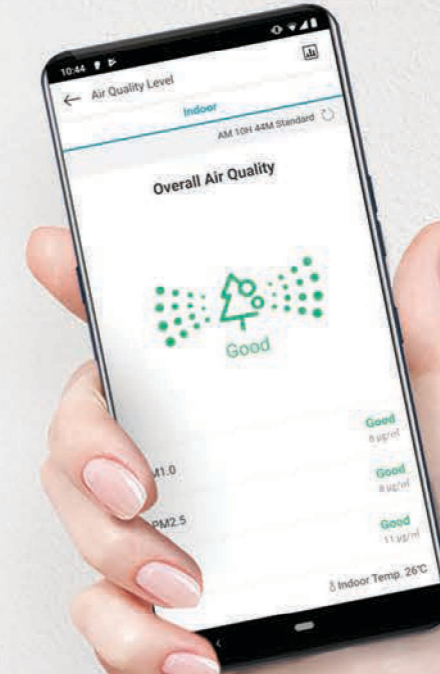

## Key Feature

### Air conditioner and air purifier in one

PM1.0 sensor is automatically activated and filtration system uses 5 million ions to capture and remove microscopic dust particles.



※ Formerly branded LG SmartThinQ is now LG ThinQ  
※ Smart features and voice assistant product may vary by country and model Check with your local retailer or LG for service availability.


### Four seasons of breeze

Enjoy comfort in all four seasons with cooling, heating, and air purification.




### 4-Way Swing (Indirect Air Flow)

Cool air reaches out to the entire room regardless of where the air conditioner is installed.

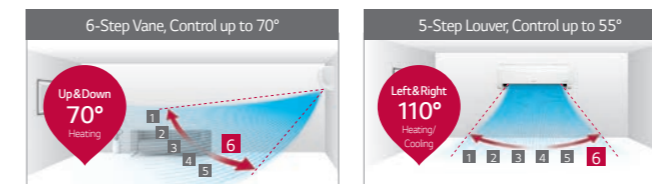

### Conveniently manage air quality with the LG ThinQ app

Let's check now! History of your air quality by LG ThinQ.

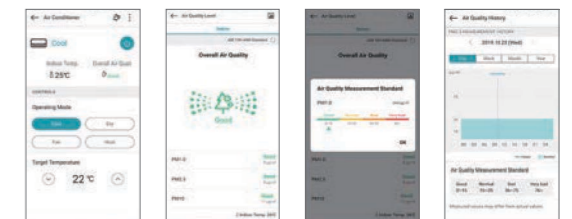

### 10-Year Inverter Compressor Warranty









With confidence in product quality and a desire to enhance the lives of customers, LG provides a 10-year warranty on the Residential Air Conditioners' Inverter Compressor.



# LINE-UP

## INDOOR UNIT

○ Single Split Only ○● Compatible ● Multi Split Only









MODEL	KBTU	5	7	9	12	15	18	24
	KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0
Gallery	 <b>NEW</b>			○	○			
				A09FTNSF	A12FTNSF			
ARTCOOL Mirror			●	○●	○●		○●	○●
			AM07BPNSJ	AC09BQNSJ	AC12BQNSJ		AC18BQNSK	AC24BQNSK
Silver				○●	○●		○●	
				AC09SQNSJ	AC12SQNSJ		AC18SQNSK	
Athena Extreme	 <b>NEW</b>			○	○			
				F09MTNSM	F12MTNSM			
Pure (with Air Purification)	 <b>NEW</b>			○●	○●			
				AP09RTNSJ	AP12RTNSJ			
DUALCOOL Deluxe			●	○●	○●		○●	○●
			DM07RPNSJ	DC09RQNSJ	DC12RQNSJ		DC18RQNSK	DC24RQNSK
Sirius		●	●	○●	○●	●	○●	○●
		PM05SPNSJ	PM07SPNSJ	PC09SQNSJ	PC12SQNSJ	PM15SPNSJ	PC18SQNSK	PC24SQNSK
Standard				○	○		○	○
				S09EQNSJ	S12EQNSJ		S18EQNSK	S24EQNSK

※ Refer to multi split line up for 5, 7, 15KBTU indoor unit connection.

# LINE-UP

## OUTDOOR UNIT

○ Single Split Only ○● Compatible ● Multi Split Only

MODEL	KBTU	9	12	14	16	18	21	24	27	30
	KW	2.6	3.5	4.1	4.7	5.3	6.2	7.0	7.9	8.8
Gallery		○	○							
		A09FTUL2	A12FTUL2							
ARTCOOL Mirror		○	○			○		○		
		AC09BQUA3	AC12BQUA3			AC18BQU2		AC24BQU24		
Silver		○	○			○				
		AC09BQUA3	AC12BQUA3			AC18BQU2				
Athena Extreme		○	○							
		F09MTU24	F12MTU24							
Pure (with Air Purification)		○	○							
		AP09RTUA3	AP12RTUA3							
DUALCOOL Deluxe		○	○			○		○		
		DC09RQU2	DC12RQU2			DC18RQU2		DC24RQU24		
Sirius		○	○			○		○		
		PC09SQUA3	PC12SQUA3			PC18SQU2		PC24SQU24		
Standard		○	○			○		○		
		S09EQUA3	S12EQUA3			S18EQU2		S24EQU24		



---

# WALL MOUNTED

ARTCOOL | Athena Extreme | DUALCOOL PURE (with Air Purification) | Deluxe | Sirius | Standard



# ARTCOOL SERIES

---



## ARTCOOL Gallery DUAL Inverter

The design of LG air conditioners is fashionably elegant in such a way that it reigns supreme compared to others. Customise your space.



## ARTCOOL Silver DUAL Inverter



## ARTCOOL Mirror DUAL Inverter

In addition to modern lines and classic style, LG ARTCOOL offers the most outstanding air conditioning solution in a complete and attractive package.

# DUALCOOL SERIES



## ATHENA EXTREME DUAL Inverter

LG Athena Extreme offers one of the most comprehensive air conditioning solutions by providing supreme energy efficiency and a tranquil environment.



## DUALCOOL PURE (with Air Purification)

Enjoy a comfortable home throughout all four seasons with cooling, heating and air purification.



## DELUXE DUAL Inverter

LG Deluxe's minimalist design combines with advanced technology to go above and beyond the essential elements of an air conditioner.



## SIRIUS DUAL Inverter







The LG Sirius boasts compact size, powerful cooling performance and convenient, sleek design.



## STANDARD DUAL Inverter

LG Standard features all the sophistication of a modern residential air conditioner integrated with LG's advanced technology.

# FEATURE OVERVIEW

	INVERTER COMPRESSOR 10 YEAR WARRANTY	Cooling Heating	CORE TECH		SMART		ENERGY EFFICIENCY	
			Dual Inverter Compressor	Voice Control	Embedded Wi-Fi	Smart Diagnosis	Active Energy Control	Energy Display
GALLERY	 NEW	9k 12k	●	●	●	●	●	●
ARTCOOL	Mirror	9k 12k 18k 24k	●	●	●	●	●	●
		Only for Multi 7K <sup>(4)</sup>	●	●	●			
SILVER		9k 12k 18k	●	●	●	●	●	●
ATHENA EXTREME	 NEW	9k 12k	●	●	●	●	●	●
PURE (with Air Purification)	 NEW	9k 12k	●	●	●	●	●	●
DUALCOOL	Deluxe	9k 12k 18k 24k	●	●	●	●	●	●
		Only for Multi 7K <sup>(4)</sup>	●	●	●			
SIRIUS		9k 12k 18k 24k	●	●	●	●	●	●
		Only for Multi 5k 7K 15K <sup>(4)</sup>	●	●	●			
STANDARD		9k 12k 18k 24k	●			●	●	●

Feature may vary for each model.  
 1. When connected to Multi Outdoor unit, Silent Mode 3dB is working by simply setting the dip switch on the PCB of the outdoor unit.  
 2. When combines with 40kBtu, Cooling A+, Heating A  
 3. Wi-Fi Ready : can be connected by using Wi-Fi controller (PWFMD200)  
 4. Please refer to the specifications of Multi outdoor units.

# FEATURE OVERVIEW

COMFORT			HEALTHCARE		DURABILITY	FAST COOLING & HEATING			MULTI	
Comfort Air (Indirect Cooling/Heating)	Low Noise 19dB	Silent Mode 3dB	PM 1.0 SENSOR	Plasmaster Ionizer PLUS	Gold Fin™	Auto Cleaning	Jet Cool	4 Way Swing	Fast Heating	Compatible
●	●	●			●	●	●	3 way	●	
●	●	●		●	●	●	●	●	●	●
●	●	●		●	●	●	●	●	●	●
●	●	●		●	●	●	●	●	●	●
●	●	●	●		●	●	●	●	●	●
●	●	●		●	●	●	●	●	●	●
●	●	●		●	●	●	●	●	●	●
●	●	●		●	●	●	●	●	●	●
●	●	●		●	●	●	●	(18/24k Only)	●	●

# UNIQUE FEATURES

## Smart

Enjoy anytime, anywhere access to your air conditioner with LG's ThinQ technology.

## Energy Efficiency

LG's revolutionary inverter technology provides world-class energy efficiency by minimising energy consumption.

## Perfect healthcare

The PM 1.0 auto sensor combined with advanced filtration technologies protect users from harmful substances such as micro-dust, viruses, allergens, and odors.

## Fast Cooling & Heating

Regardless of the outdoor temperature, LG air conditioners distribute cold or hot air fast, reaching every corner of even your largest rooms with powerful cooling or heating.

## Extreme Durability


In any environmental conditions, LG's air conditioners can bring customers peace of mind through product durability.

## Comfort

LG air conditioners provide a comfortable indoor environment with low noise levels and optimized vane adjustment capability that ensures even air flow.

## Quick & Easy Installation

Installation has never been easier as with the delicately designed installation elements of LG air conditioners

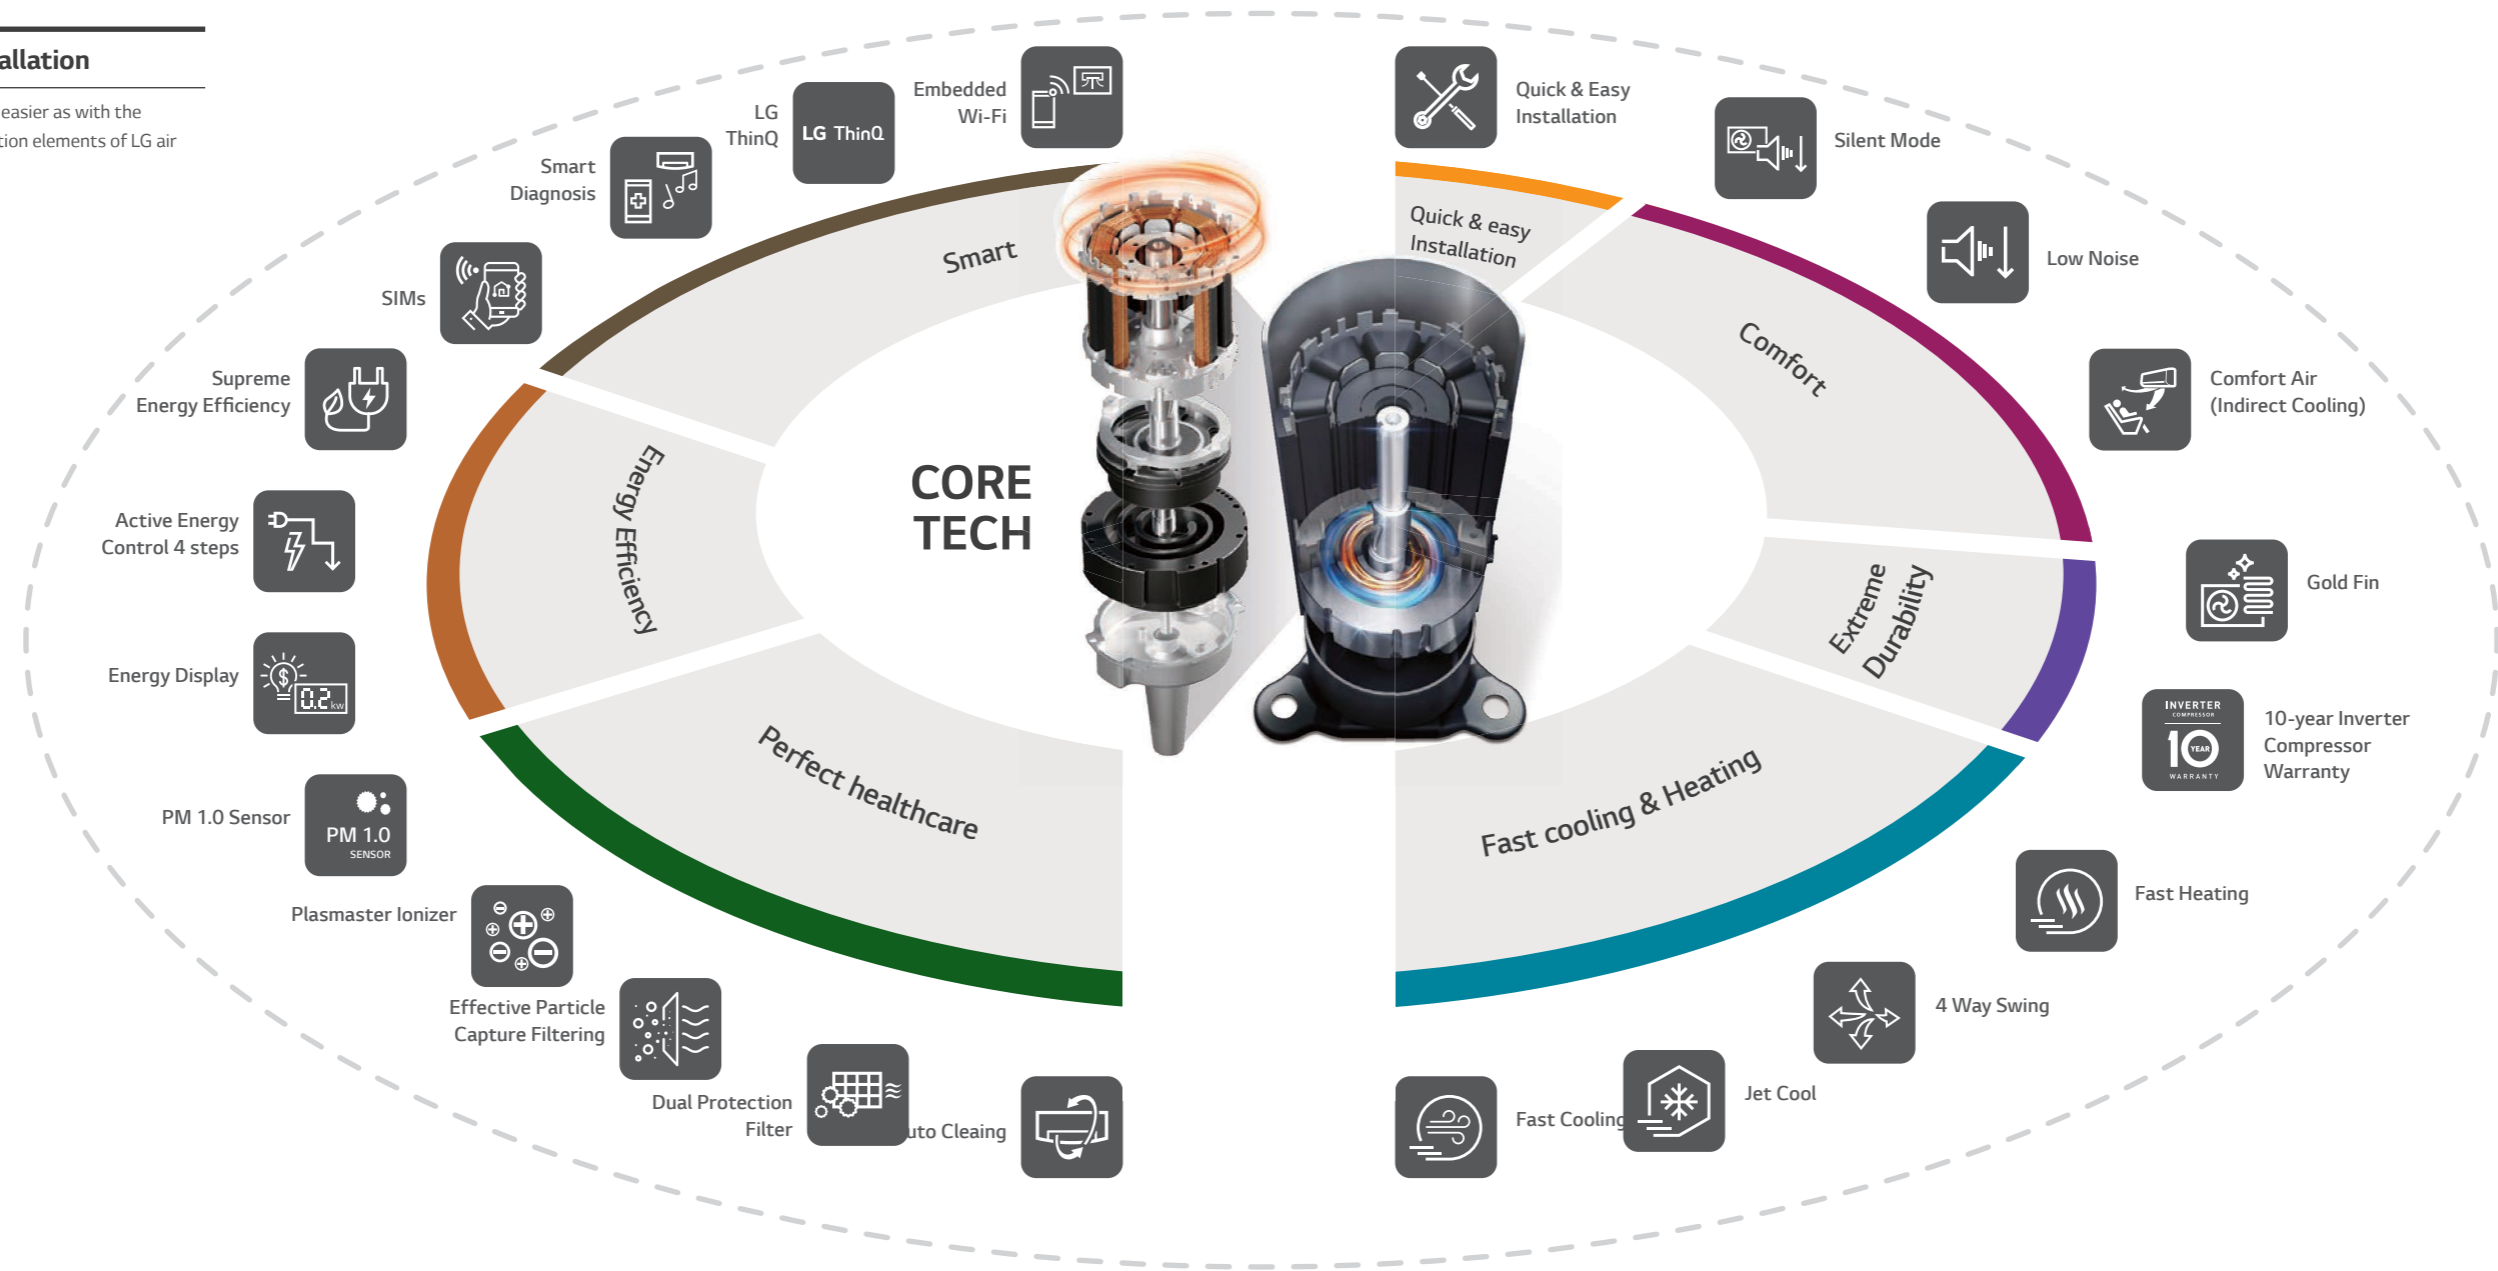

# CORE TECH



## Dual Inverter Compressor

### • What is the Dual Inverter Compressor?


A compressor is the heart of an air conditioner, and monitoring whether it works properly, effectively, or noisily that can cause stress as well as cost more money. LG's Dual Inverter Compressor provides an effective solution, resulting in an air conditioner that cools faster, lasts longer, and operates quieter than conventional models.



### • How it Works

#### Varied-Speed Dual Rotary

A compressor motor with a wider rotational frequency that is energy efficient and has a higher volumetric quick cooling capacity than any conventional compressors.

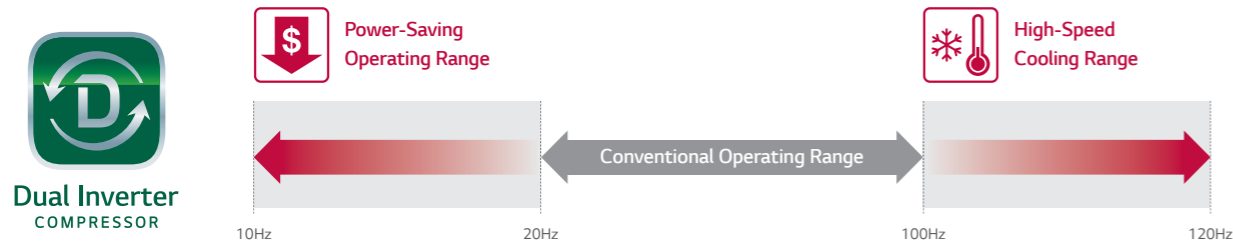

### • Product Reliability Improvement

The Dual Inverter Compressor reduces the vibration and with it the sound pressure levels. The reduction in vibration reduces the possibility of fractures occurring in the surrounding pipework.

# CORE TECH



## R32 Refrigerant

- R32 is more environmental friendly compared to former refrigerant

### • Pain Point

Due to accelerated global warming and the destruction of the ozone layer, various international conventions and meetings are held to enhance restrictions to the use of refrigerant or enforce the use of eco-conscious refrigerants. In order to reduce environmental destruction, refrigerant R32 is internationally acclaimed for being Eco-friendly. This low volume refrigerant is as efficient as any conventional refrigerant but boasts a 68% reduced global warming potential.



### • How it Works

Utilising a small amount of the R32 refrigerant also qualifies it to be a highly green efficient system.


#### Alleviate Global Warming & Ozone Layer Destruction

R32 efficiently works even in small volume compared to existing R410A refrigerant, which decreases potential hazard of global warming.

#### High Compressibility

R32's high compressibility rate gives more powerful cooling performance and efficiency compared to existing refrigerant R22 and R410A.

	R410A	R32
Composition	Blend of R32 50% + R125 50%	Pure R32 (No blend)
GWP (Global Warming Potential)	2087.5	675

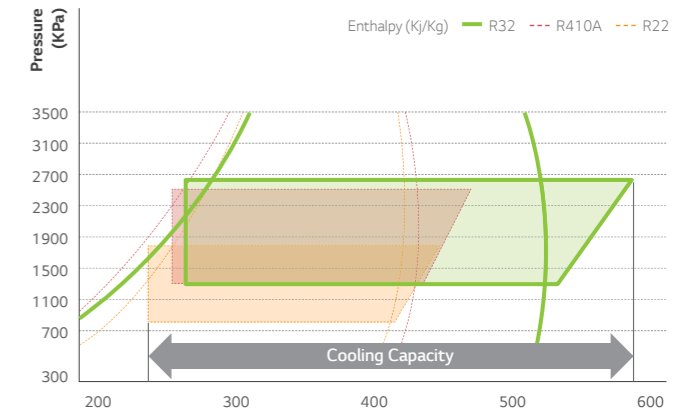

### • Benefit

Eco-conscious refrigerants reduce environmental pollution.

# SMART



## Embedded Wi-Fi

Control your air conditioners by using Android or iOS based smartphones. This advanced technology provides you many benefits.

### • LG ThinQ



Download the LG ThinQ app from Google or Apple app stores.



### • How it Works

#### Embedded Wi-Fi modem

Enable "LG ThinQ" on your air conditioner.




By using the embedded Wi-Fi modem, get ready for innovation without boundaries.



#### Easy Registration and Log-in

Follow the interactive set-up LG Account steps that will activate smart ThinQ's impressive features.

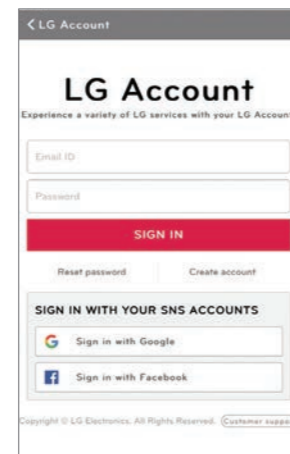

#### Wi-Fi Connectivity

Each individual member of your family can customise the air conditioner temperature and fan speed accordingly and then save the settings in their app to run it later. These settings can be saved for each air conditioner too.

#### Multiple Devices



\* Can be controlled by multiple users, but not simultaneously

#### Multi-Control




# SMART

### • Benefit

#### Simple operation for various functions



On/Off, Current Temp







Mode, Set Temp



Vane Control



#### Straight-forward management

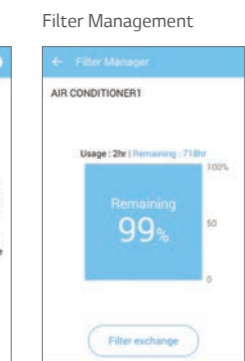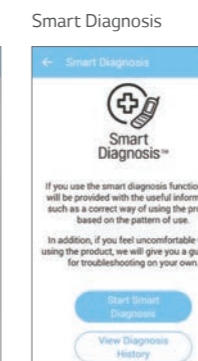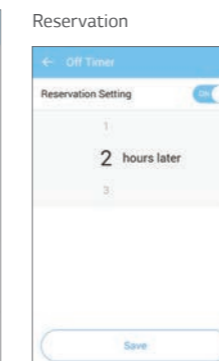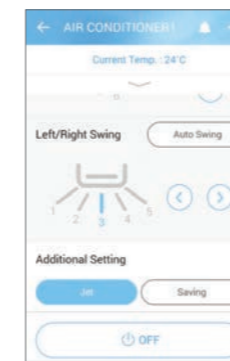

#### Integrated Home Appliances Control

Monitor and control your LG appliances from one place.



#### Access your air conditioner anytime and from anywhere

with a Wi-Fi equipped device and LG's exclusive control app, ThinQ.



# SMART

## Smart Diagnosis

Smart Diagnosis allows you to check setup, installation, troubleshooting and other information conveniently from your smartphone.

- \* Specifications may vary for each model.
- \* When connected to Multi ODU, Smart Diagnosis function may not be supported.


### What is Smart Diagnosis?

Smart Diagnosis allows users to conveniently check setup, installation, troubleshooting and other information directly from a smartphone.

- \* Builds upon widespread smartphone use and offers greater USP diversification
- \* Perfect for consumers who are unable to view information about their air conditioner via a display or remote control.

### • How it works

By using "LG ThinQ" App and clicking "Start Smart Diagnosis", monitor and check diagnosis results conveniently via Wi-Fi.

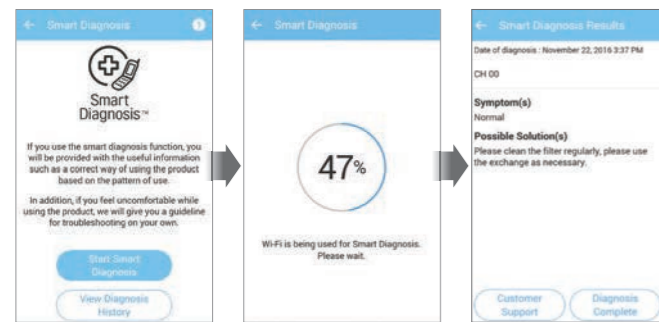

\* When the model doesn't provide embedded Wi-Fi, diagnose by buzzer sound with the same app and remote controller.



# SMART


### • Benefit

Easily comprehensible error messages make detecting a solution and contacting the service center simple and convenient

#### For consumer



#### For Installer and SVC

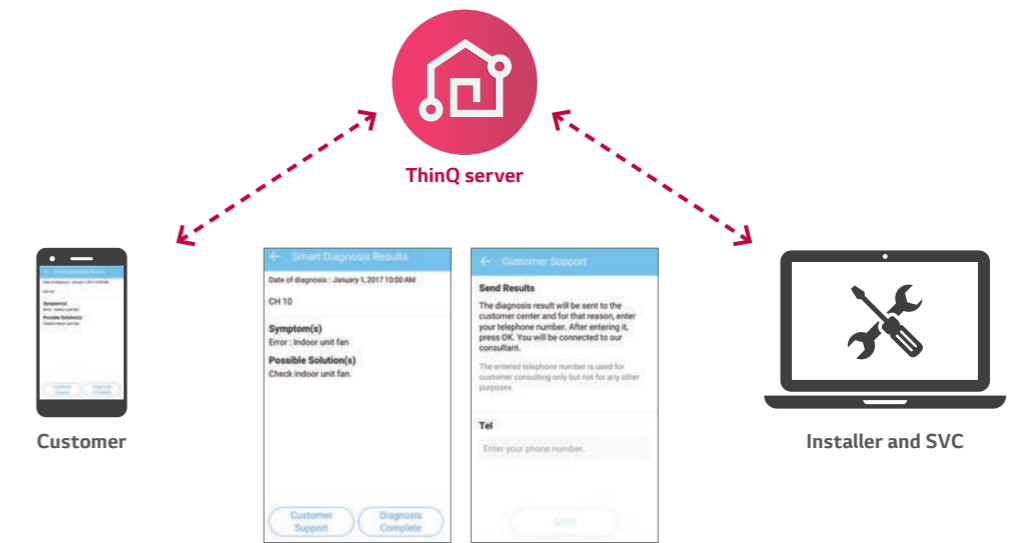

- Easily check operational status of a product without a display or one that provides limited information
- Save energy by monitoring key operational information and power consumption
- Using the Maintenance Guide helps to improve device performance and increase product life-span.

- Understand the product better by easily confirming operational status and information
- Intuitively diagnose problems by comparing current and past usage data
- Maintain installation capabilities and reduce installation errors by quickly confirming device operational status




# SMART

## SIMs

By connecting SIMs chip, you can check the status of your air conditioner and diagnose problems from your smartphone.

\* Specifications may vary for each model.  
\* When connected to Multi ODU, SIMs function may not be supported.

### • What is the LG SIMs?

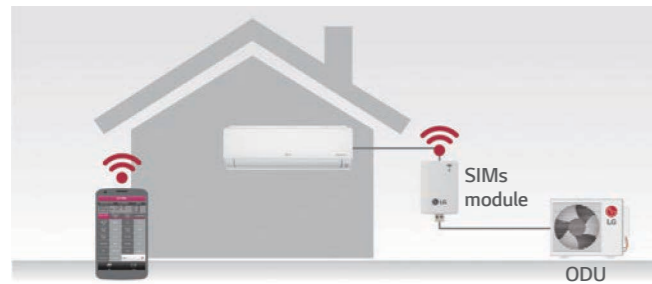

Monitor the status of your air conditioner and accurately diagnose problems by connecting it to a smartphone via a SIMs chip.

\* SIMs : Smart Inverter Monitoring System

### • How It Works

- SIMS App**
1. Use a SIMs chip to connect a smartphone to an air conditioner.
  2. Monitor and diagnose problems in real time using the SIMs app.

### • Benefit

**Easy Monitoring**  
Diagnose problems anytime, anywhere with a SIMs chip.

**Easy Diagnosis & Quick Response**  
Easily monitor IDU/ODU and diagnose problems.  
Save and review diagnostic data.

<p><b>Main</b> Current outdoor temperature Indoor temperature Inverter Comp frequency Operating opening Error code / Frequency limits Indoor. Outdoor fan speed</p>	<p><b>Indoor Unit</b> Indoor Unit Capacity / Operation Mode THM mode / REM mode FAN operating condition / EEV opening Room Temperature / Suction Temperature Intermediate Temperature Exit Temperature</p>
<p><b>Outdoor Unit</b> Frequency / Fan RPM DC Link / Input Current Input Voltage EEV operation mode Restart timer Compressor mode / EEV opening</p>	<p><b>Chart</b> Room Temperature Heat exchanger pipe temperature Compressor discharge temperature Frequency / Outdoor temperature Compressor suction temperature Electric current / Voltage</p>

**Certificate**  
 US Radio Standard   
 Canada Radio Standard   
 Australia Radio Standard   
 Europe Radio Standard

\* Smartphone Requirements (iOS : 6.1 or later, Android : 2.3 or later)

# SMART

## Low Refrigerant Detection

Early notification of low refrigerant protects your air conditioner from a risk of damage.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.  
\* When connected to Multi ODU, Low Refrigerant Detection function may not be supported.

### • How It Works

#### Early Detection of Low Refrigerant Levels


The Air Conditioner is automatically shut down when low refrigerant level is detected.

#### 3 Checkpoints for Low Refrigerant Level :

- 1) The heat exchanger temperature is comparatively cool
- 2) The outdoor unit is working properly
- 3) The energy consumption is working under a standard pattern

If any of the above conditions are not met, for a maximum of 4 times, after 15 minutes of Air Conditioner operation, a Low Refrigerant level is detected and the Air Conditioner is shut down.


#### Capacity and Effectiveness of the Refrigerant Levels

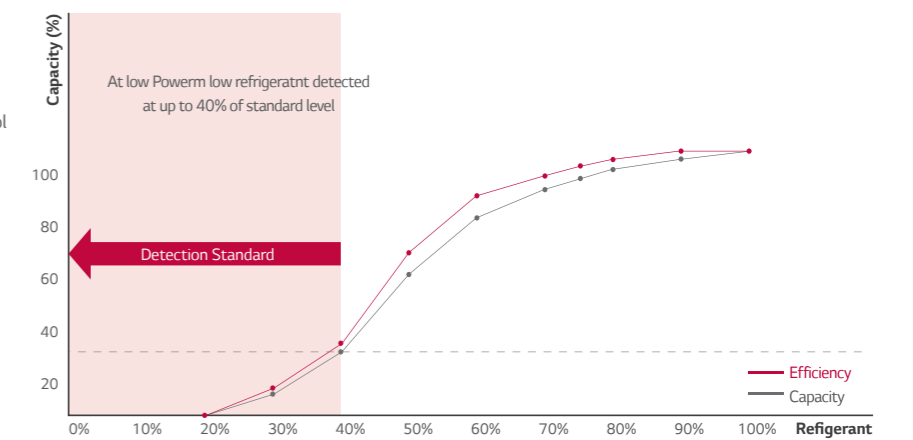

\* This function only works under the following conditions:  
- Indoor/Outdoor temperature is up to 20 degrees Celsius  
- Cooling and dehumidification mode

### • Benefit

#### Longer Lifespan for Air Conditioner

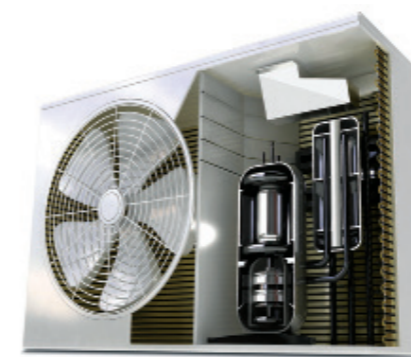

Notify You of Low Refrigerant Levels

When Low Refrigerant Level is detected, it alternately shows CH and 36 on the display.

\* Some models show CH and 38 alternately on the display.

# ENERGY EFFICIENCY



## Supreme Energy Efficiency


LG's revolutionary Inverter technology boasts powerful yet quiet performance while minimising energy consumption. With world-class energy efficiency, enjoy comfort as well as energy savings.

\* Based on H09AL Model  
\* Specifications may vary for each model.

### • High Efficient Compressor and Reversing Valve


#### Rotary Compressor and Motor Efficiency

The number of suction connections has been reduced from two to one to increase the efficiency of the refrigerant compression during low speed conditions. The DC motor in LG air conditioners remains unsurpassable incomparable to in the world's top class efficiencies.

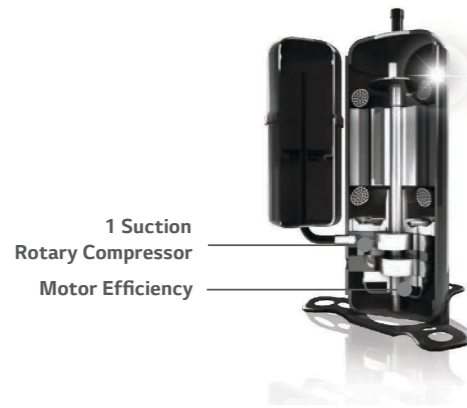


#### Bi-Stable Reversing Valve

The Input power of 4-way valve has been reduced to 0W by using a Bi-Stable type.

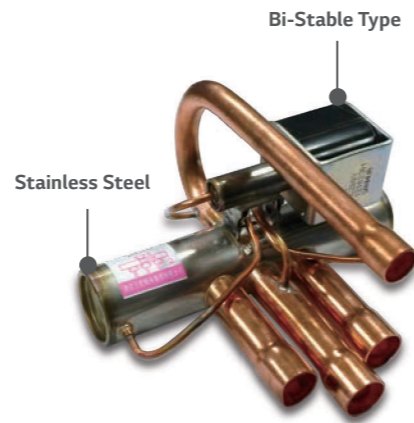


### • Improved Inverter Drive Efficiency

Used to optimise the time of current flow by controlling the number of converter switching according to energy consumption status. Displays comparatively higher performance and advanced energy efficiency than conventional Inverter air conditioner by reducing power loss with an advanced material component called SiC.

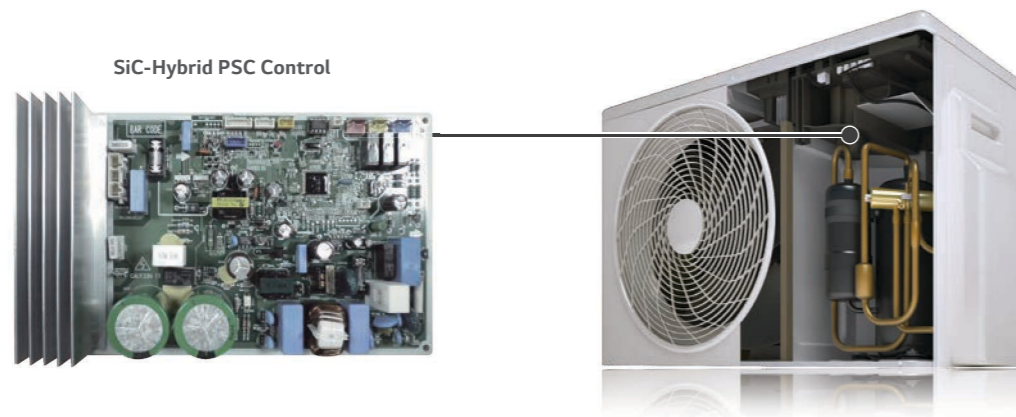

# ENERGY EFFICIENCY




## Active Energy Control 4 - Step

LG's Active Energy Control adjusts the energy consumption level and cooling capacity by controlling maximum frequency of the compressor motor.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.  
\* When connected to Multi ODU, Active Energy Control function may not be supported.

### • Concept & Benefit

Cooling a home can come at a high cost particularly during the hot summer months. Avoid those costs and save energy by taking advantage of LG's 4-Step Energy Control System.

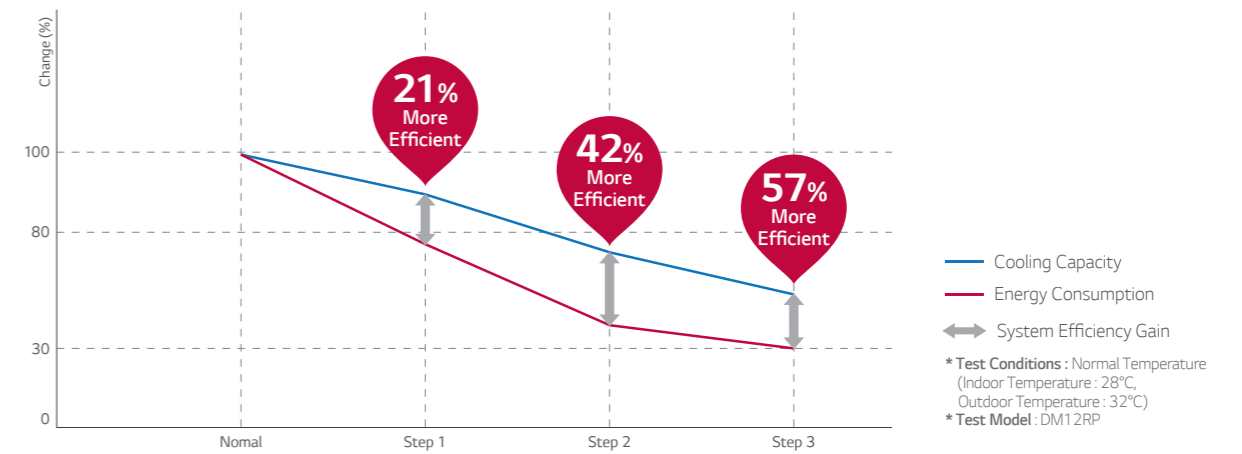

### • How It Works

<p><b>Normal.</b> 100% energy usage</p> <p>Many people and high-activity level</p>	<p><b>Step 1.</b> 80% energy usage</p> <p>Few people and moderate-activity levels.</p> <p>1 Clicks</p>
<p><b>Step 2.</b> 60% energy usage</p> <p>Fewer people and low-activity levels.</p> <p>2 Clicks</p>	<p><b>Step 3.</b> 40% energy usage</p> <p>Fewest people with no activity.</p> <p>3 Clicks</p>

# ENERGY EFFICIENCY



## Energy Display

LG's Energy Display panel monitors the amount of energy levels used. Reduce energy consumption while enjoying a comfortable indoor environment by checking your energy level directly on the AC panel.

\* Specifications may vary for each model.  
\* When connected to Multi ODU, Energy Display function may not be supported.

### • How it Works

#### Magic Display & Remote Control

With the push of a button on the remote control, indoor unit's LCD display shows the current and total energy use, thus making the users aware of reducing energy consumption.



### • Benefit

#### Nomal Mode

Current Setting Temp



#### Electric Power

Displays Current Energy Use



# PERFECT HEALTHCARE



## Plasmaster™ Ionizer<sup>PLUS</sup>


The powerful Plasmaster Ionizer protects you from bad odors and Escherichia coli and Staphylococcus in the surface with over 3 million ions to sterilize to make a safer, and cleaner environment.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.

### • How It Works

#### Sterilization and Deodorization (Utilizes Over 3 Million Ions)


Plasmaster Ionizer+ reduces E.coli and Staphylococcus in the surface with over 3 million ions.

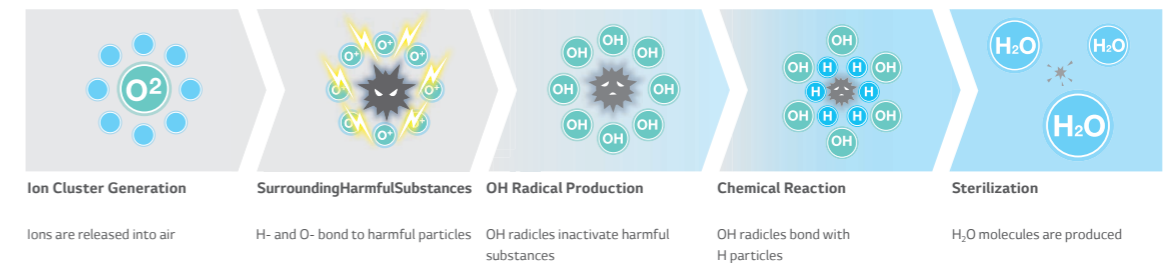

### • Test Result


#### Sterilization Performance Evaluations

Sterilize Bacteria E.coli over 99.9% in 30 min.

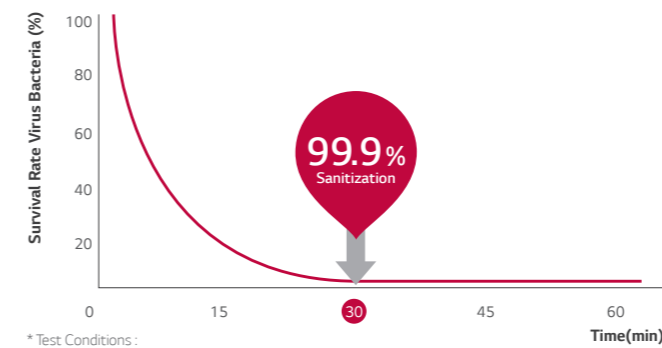

\* Test Conditions :  
Space : 52m<sup>3</sup> Chamber (measuring with the specimen in the center of test chamber)  
Temperature & Humidity : Normal  
Bacteria : E coil colon bacillus  
Tested by Intertek


Sterilize staphylococcus over 99.6% in 60 min.

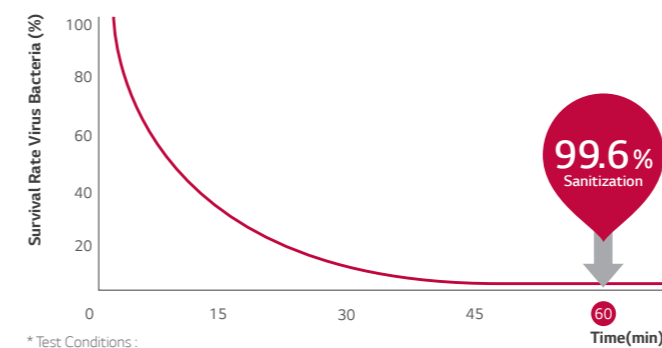

\* Test Conditions :  
Space : 52m<sup>3</sup> Chamber (measuring with the specimen in the center of test chamber)  
Temperature & Humidity : Normal  
Bacteria : Staphylococcus Aureus  
Tested by Intertek

#### 2.1 odor strength decrease in 60 minutes

An odor of measured as 2 European odor units (ouE/m<sup>3</sup>) or less indicates that the level of odor falls within permissible limits.

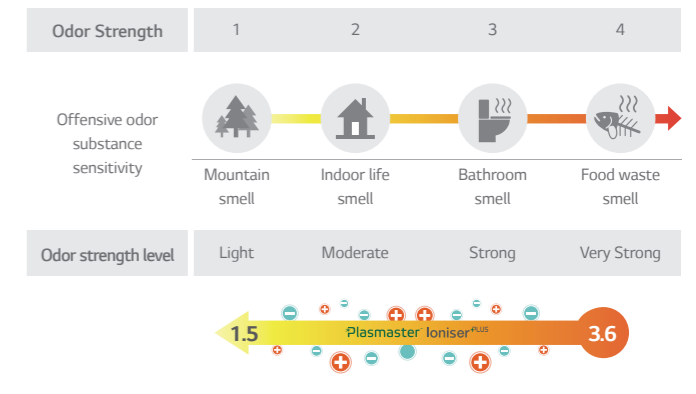

Odor strength reduce 3.6 → 1.5 / The Odor floating in the room as well as curtain and clothes.

\* Test conditions :  
Space : 8m<sup>3</sup> Chamber  
Temperature & Humidity : Normal  
Tested by Intertek

# PERFECT HEALTHCARE



## PM 1.0 Auto Senser


As AC turns on, PM 1.0 sensor automatically operates to capture and remove microscopic dust particles including ultra fine dust.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.



- AQI(Air Quality Index) is displayed in unit of 1 within 8-999  $\mu\text{g}/\text{m}^3$ .
- AQI(Air Quality Index) may continuously change according to changes in the indoor environment.
- Overall cleanliness color is displayed based on the highest contamination level among fine dust(PM10), ultra fine dust(PM2.5), and super ultrafine dust (PM1.0).
- Overall cleanliness color is displayed in 4 levels according to the indoor contamination level.
- If dust concentration is high, the difference between the displayed dust concentration and the actual dust concentration may increase.

• During the operation, if you press PM SENSOR button, you can check the indoor cleanliness in each level.

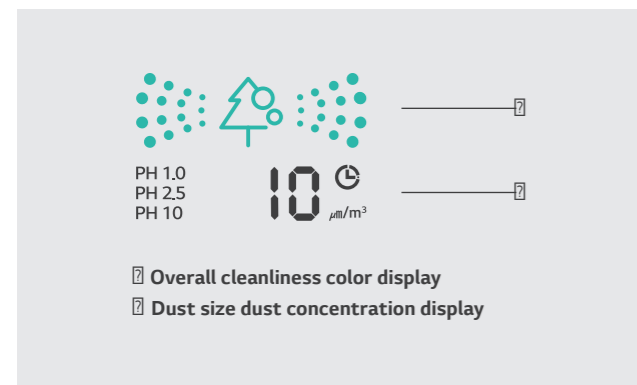

Color	Level	Display standard ( $\mu\text{g}/\text{m}^3$ )		
		Super ultra fine dust (PM 1.0)	Ultra fine dust (PM 2.5)	Fine dust (PM 10)
Green	Good	12 or less	12 or less	54 or less
Yellow	Normal	13 - 35	13 - 35	55 - 154
Orange	Bad	36 - 55	36 - 55	155 - 254
Red	Very Bad	56 or more	56 or more	255 or more

**Guide to dust particles' size**

- Fine dust : Dust with particle size of  $10\mu\text{m}$  or less (Generated from workplace combustion, vehicle exhaust, etc.)
- Ultra fine dust : Dust with particle size of  $2.5\mu\text{m}$  or less (Composed of ion component, carbon compound, and metal compound)
- Super Ultrafine dust\* : Dust with particle size of  $1.0\mu\text{m}$  or less (Cigarette smoke, etc.)

AQI(Air Quality Index) evaluation is carried out with LG standard test dust.

\* Minimum capturing size of particle :  $0.02\mu\text{m}$   
 ※ PM : Particulate matter is the sum of all solid and liquid particles suspended in air many of which are hazardous.  
 This complex mixture includes both organic and inorganic particles, such as dust, pollen, soot, smoke, and liquid droplets.

# PERFECT HEALTHCARE




## Dual Protection Filter

The Dual Protection Filter collects dust.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.

### • What is the Dual Protection Filter?

The Dual Protection Filter, designed to capture dust particles over  $10\mu$  in size, first line of defense against finer particles.

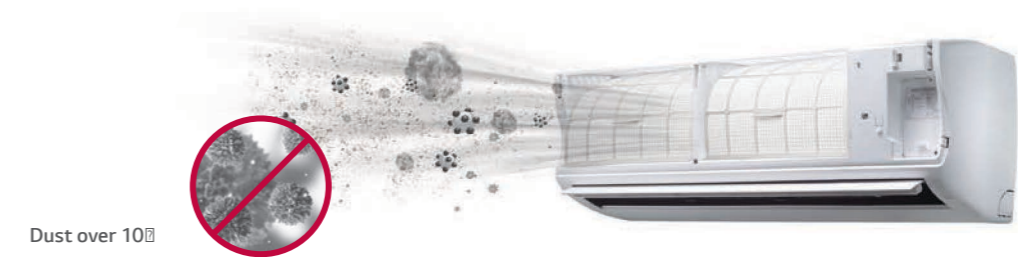

### • Additional Benefit

**Easy to Open**

Easily detachable full surface cover helps clean the air conditioner flawlessly.

**Easy to Clean**

The filter is designed for easy handling and quick cleaning, which lengthens its lifespan.



# PERFECT HEALTHCARE



## Auto Cleaning

The interior of the air conditioner is maintained clean by drying off the heat exchanger, then sterilizing the interior once more.

\* Specifications may vary for each model.

### • Pain Point

The main cause of odor within air conditioners is mold and bacteria growing on the heat exchanger. These germs can spread when the heat exchanger is wet.




### • How It Works

#### Cleans Filter with Regular Air Flow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger, providing an enhancing environment.



By dehumidifying, (some models are by dehumidifying and ionizing), the auto cleaning function prevents potentially harmful substances from forming on the surface of the heat exchanger.



The indoor environment remains odorless with the advanced deodorizing function.




By preventing polluting of the heat exchanger caused by various germs and bacteria, the performance and life span of the air conditioner do not wither away even after a period of 10 years.

### • Benefit

#### Removes Harmful Particles


Auto Cleaning provides clean air by preventing bacteria, mold and odors that can otherwise accumulate in an indoor unit.

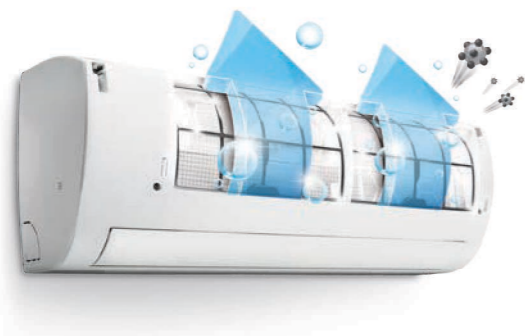

Bacteria Prevention



Odor Elimination



Mold Elimination

# FAST COOLING & HEATING



## Fast Cooling

The cool airflow reaches all the corners of the room, keeping the space cool and comfortable.


\* Specifications may vary for each model.

\* Depending on the experimental conditions.

### • How It Works

#### Bigger Skew Fan


A 25% larger skew fan emanates highly powerful blasts of air.

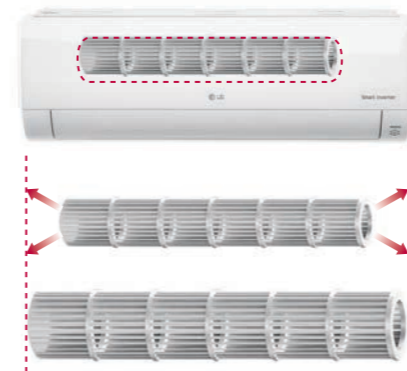

25% Larger (Fan Size)


#### Cooling Outlet

A larger, optimally designed cooling outlet emanates to large areas and cools spaces faster.

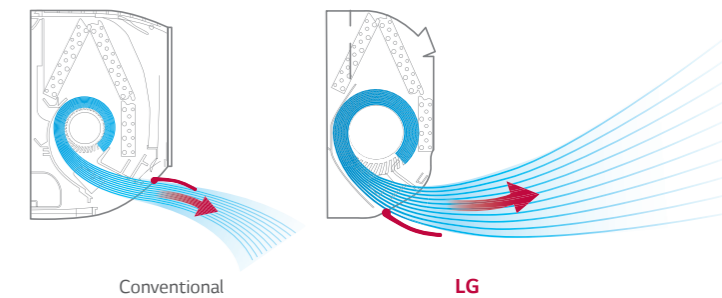


### • Test Result

#### Test Result

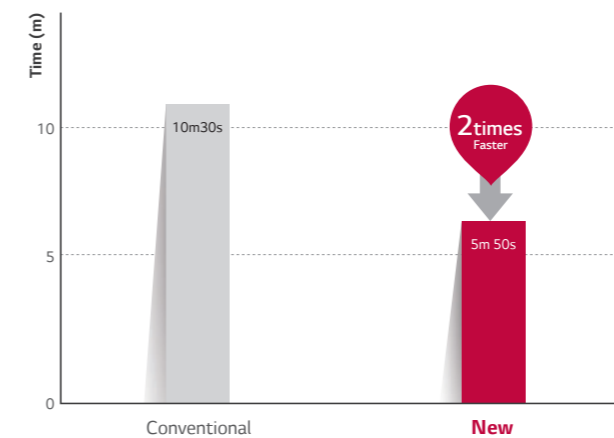

\* Test Conditions : Indoor temperature 33°C, Outdoor temperature 35°C, Relative humidity 60%, Setting temperature 24°C

#### Changes in Temperature Over 30 Minutes

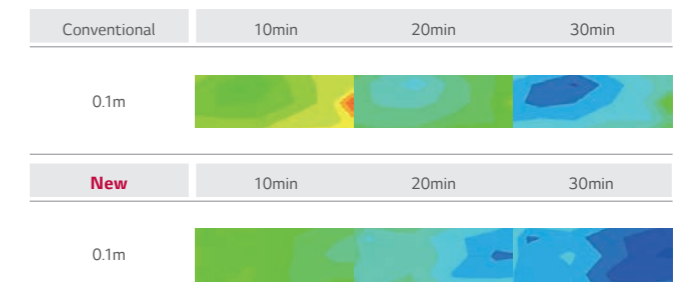

\* Test Conditions : Outdoor temperature : 35°C, Indoor temperature : 33°C, Humidity : 60%, Remote control : 24°C High

# FAST COOLING & HEATING



## Jet Cool


LG air conditioners provide optimized high-speed airflow, which can cool rooms faster while delivering cool air evenly in every direction.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.

### • How It Works


#### One Click "Jet Mode"

Reduces the temperature of outflowing air to 18°C for 30 minutes with just one click.

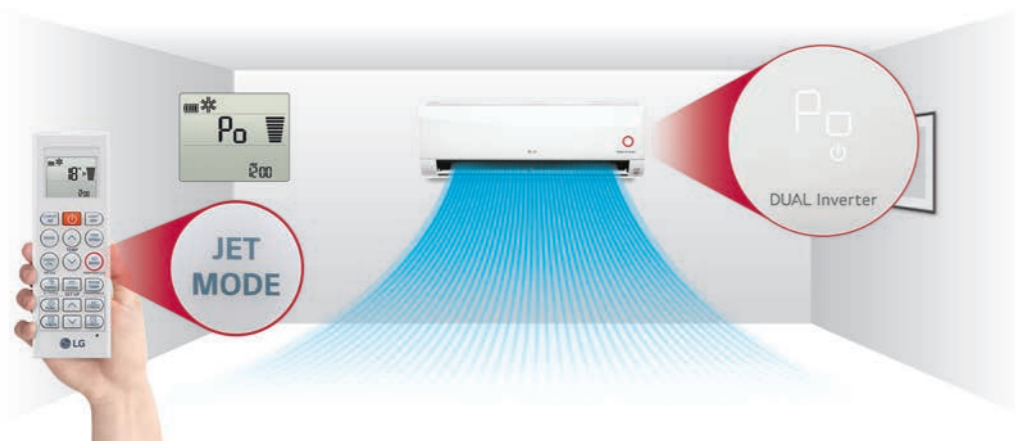

### • More Powerful Performance

By reducing the second vortex, which decreases airflow within the air outlet, and enlarging the fan size, the amount of airflow is increased to 13.0 CMM.

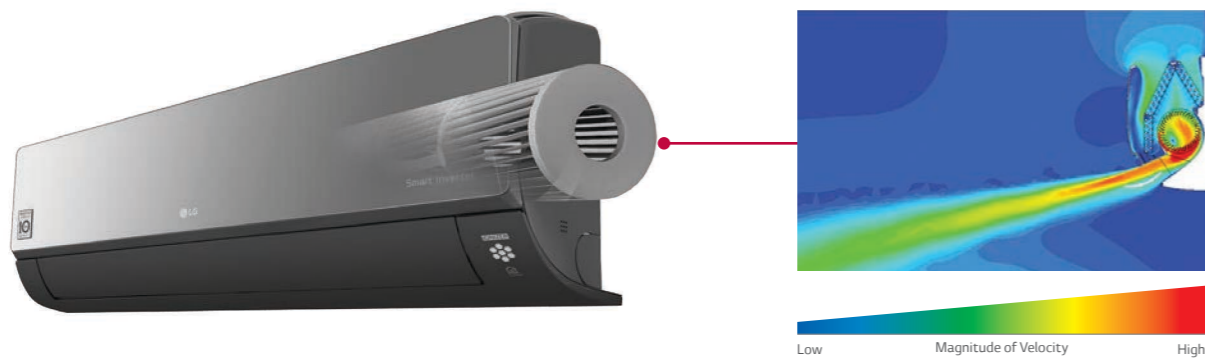

# FAST COOLING & HEATING



## 4-Way Swing


Cool air reaches out to the entire room regardless of where the air conditioner is installed

\* Specifications may vary for each model.

### • How It Works

#### 6-Step Vane, Control up to 70°

The vertical vane, which moves up and down, has 6 different settings including full-auto swing.

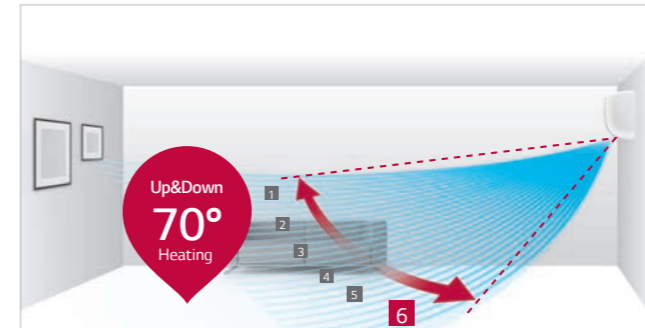

\* Angle can be different from each model and working mode.

#### 5-Step Louver, Control up to 55°


The louver, which sways left and right, has 5 different settings including full auto-swing.




### • Easy and Simple Control

Airflow direction can be changed by LG ThinQ Wi-Fi app.

#### Up/Down Swing

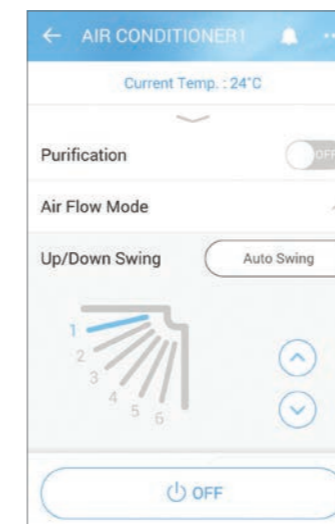

#### Left/Right Swing

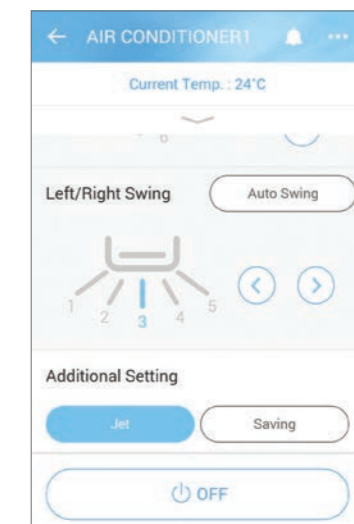

# FAST COOLING & HEATING



## Fast Heating


LG Residential Air Conditioners satisfy your heating needs while consuming less energy, by heating a wider space in a shorter period of time to create a warm and comfortable living environment.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.

### • How It Works


#### 4 way Auto Swing (Easy Airflow Control)

4 Way Auto Swing adjusts airflow based on the surrounding environment, allowing for optimal distribution of warm air to living areas and enabling quick heating.

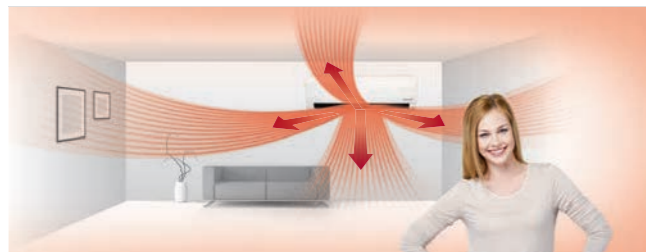


#### Vertical Airflow

When heating, the vane sends heated air downwards to maintain a pleasant and balanced room temperature.

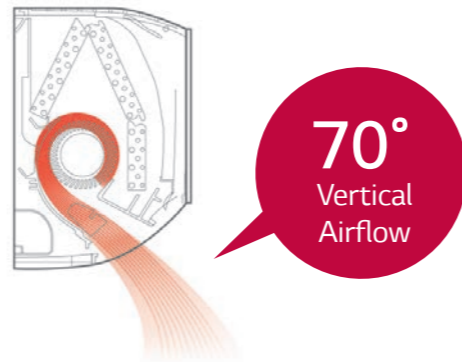


### • Benefit & Test Result

#### 22% Quick Heating

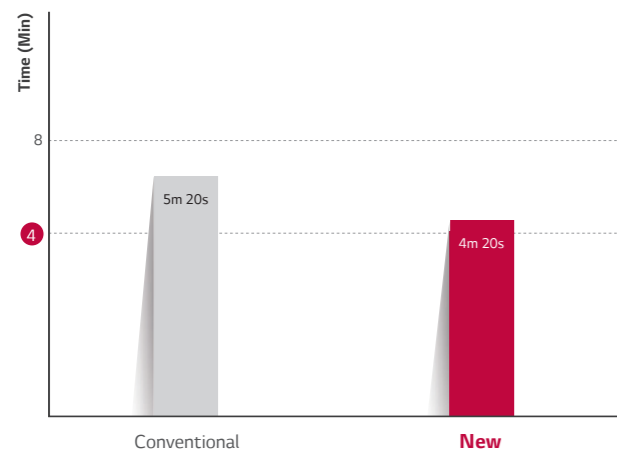

\* Test Conditions :  
Outdoor temperature : 7°C, Indoor temperature : 12°C,  
Humidity : 87%, Remote control : 30°C Power

#### Changes in Temperature Over 20 Minutes

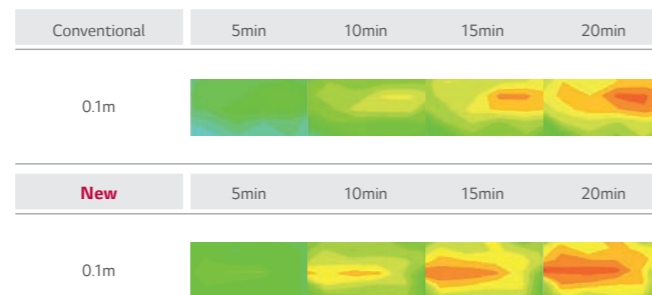

\* Test Conditions :  
Outdoor temperature : 7°C, Indoor temperature : 12°C,  
Humidity : 87%, Remote control : 30°C Power

# EXTREME DURABILITY




## 10-Year Inverter Compressor Warranty

With confidence in product quality and a desire to enhance the lives of customers, LG provides a 10-year warranty on the Residential Air Conditioners' Inverter Compressor.

\* Specifications may vary for each model.

### • What is the 10 Year Warranty?

With the 10-year warranty on the compressor, users can be assured of the functionality of our product for a longer period of time.

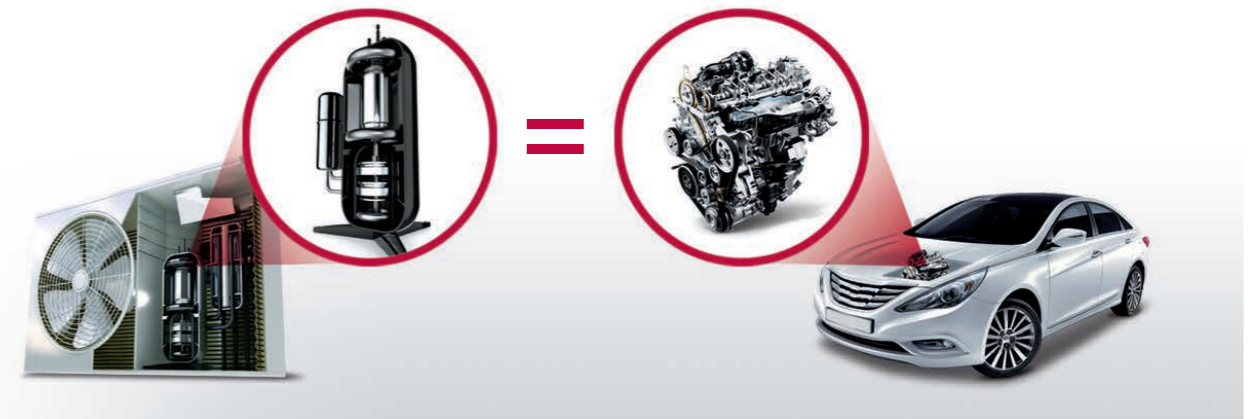

### • Benefit & Verification

#### Reliable Air Conditioner


Product safety is emphasized by offering a 10-year warranty on the compressor to reassure customers about product durability.



#### Verification

TUV Rheinland, Long Term Accelerated-reliability Test & High Marginal Test

\* Long Term Accelerated-Reliability Test  
LG's unique testing method with reinforced operating condition for a product life assurance to test and determine the product life cycle in a short period of time by accelerating the life cycle.  
\* High Marginal Test  
Test method to secure durability in various adverse conditions that may occur in the field by performing comp reliability test against higher pressure and temperature than the designed range of pressure and temperature which the comp operates in.  
\* Verification obtained from TUV Rheinland for 10-year product life cycle

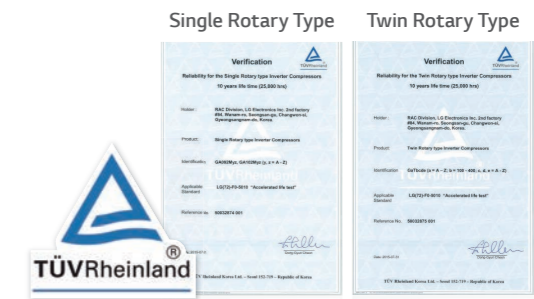

# EXTREME DURABILITY



## Gold Fin™


The Gold Fin™ coating protects the surface of the heat exchanger from unnecessary wear and corrosion.

\* Specifications may vary for each model.  
\* Depending on the experimental conditions.

### • How It Works

#### Corrosion-resistant protective layer

The gold-colored special coating on the fin of the heat exchanger prevents corrosion, extending the life of the unit.

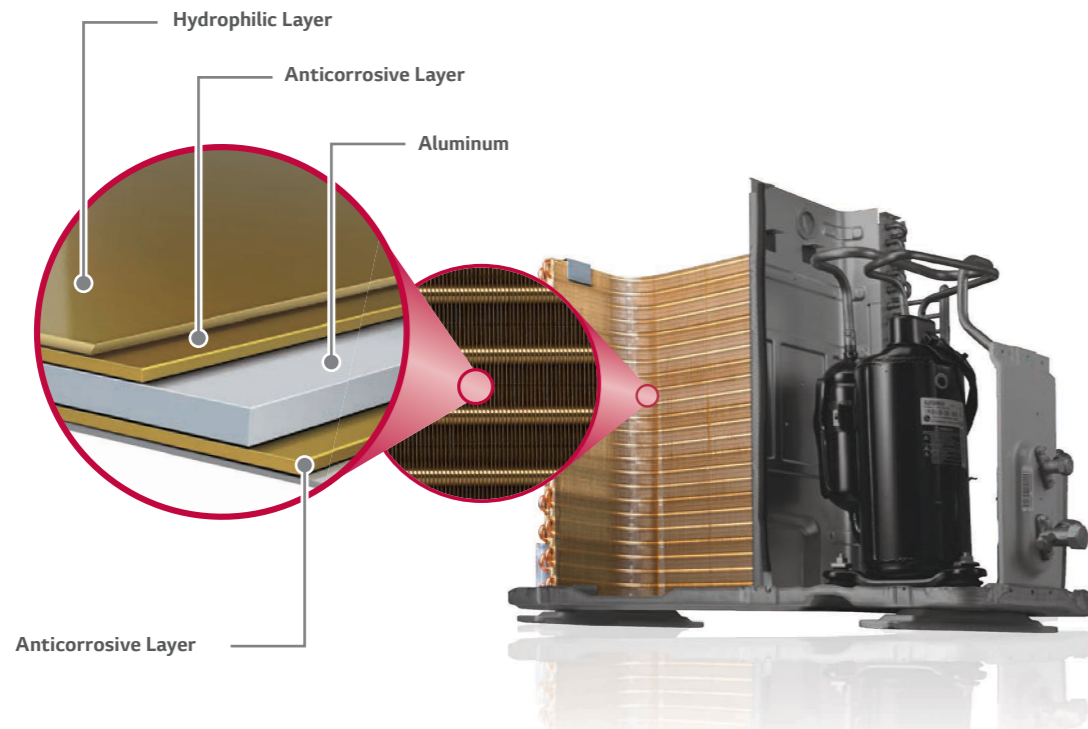

### • Test Result

#### Conventional Fin



#### Gold Fin™



\* Test result 360 hrs. after being exposed to sodium chloride

# COMFORT



## Comfort Air (Indirect Cooling)

LG provides pure hygienic and temperature regulated atmosphere surrounding your living space. An automatic vane angle adjustment sets perfect vane angle and air volume.

\* Specifications may vary for each model.

### • Concept

Comfort Air changes the air flow angle to ensure that air is directed away from occupants to promote more comfortable environments optimized for sleeping and more.


### • How It Works

#### Control Panel



#### Comfort Vane


This option conveniently sets an AC's louvers to a preset position so that outflowing air is directed away from a room's occupants.

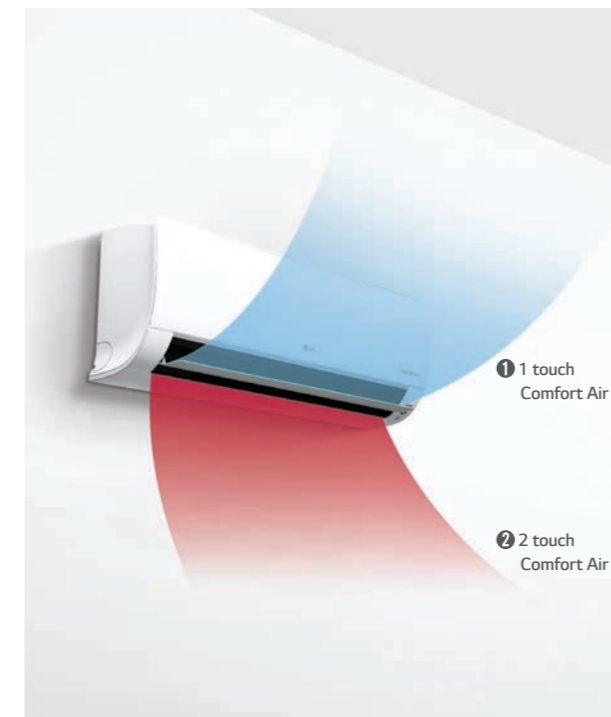

#### Scene 1: Inclines to a maximum 80° angle.

Sets vane angle to highest position : Optimized for gentle airflow cooling.

#### Indoor Unit Display




#### Remote Controller Display



#### Scene 2: Declines to a maximum 10° angle.

Sets vane angle to lowest position : Optimized for gentle airflow heating.

#### Indoor Unit Display



#### Remote Controller Display





# COMFORT



## Low Noise

LG Air Conditioners operate at 19dB low noise level, moreover provide healthy soft air by just 1 touch.

\* Specifications may vary for each model.

### • How It Works

#### LG's Unique Skew Fan


By minimizing the surface pressure of the fan blade when in contact with the air, the noise produced by the air conditioning unit is reduced to a remarkably low level.



15% Tilted Stabilizer

#### BLDC Fan Motor

With strong torque and powerful ND magnetism as well as precise speed control of 13 different steps for smooth operation, the BLDC motor provides substantial air volume and high static pressure, while keeping electrical and mechanical noise lower, and making high-speed operation available.

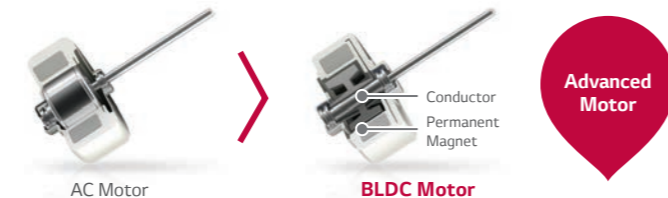


Advanced Motor

- Low Efficiency.
- Heat Problem during overhauling.
- Difficult precise speed control.


#### ALVC (Active Low Vibration Control)

A speed-error component estimates the load to compensate for imbalances, which are the primary causes of vibration and noise, enabling the rotation of the motor without vibration at low Hz levels.

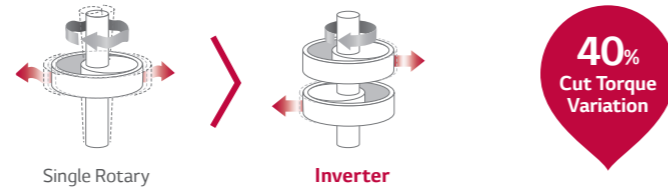

40% Cut Torque Variation

### • Benefit

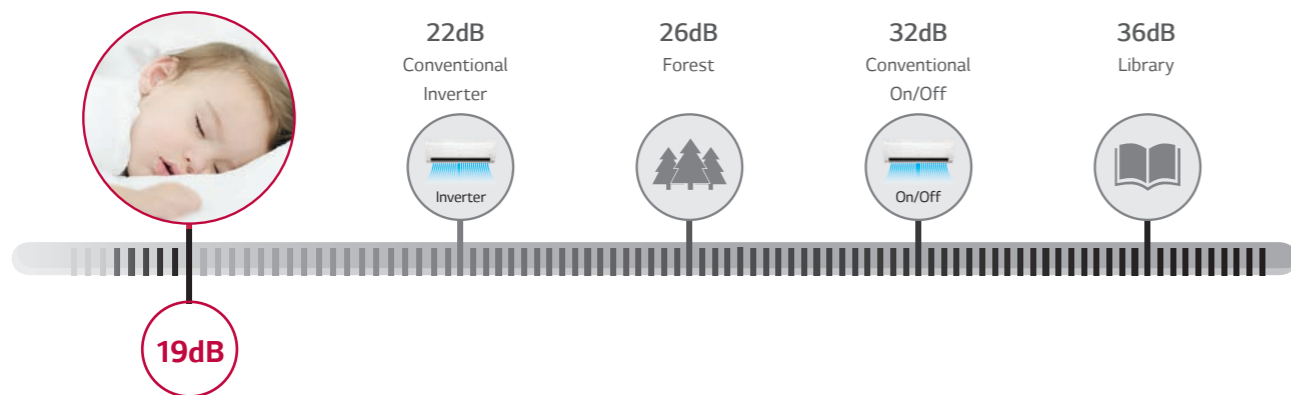

# COMFORT



## Silent Mode

Silent mode ensures a tranquil and serene experience for the user by reducing noise disturbances while you are resting.

\* Specifications may vary for each model.


\* Depending on the experimental conditions.

\* When connected to Multi Outdoor unit, Silent Mode is working by simply setting the dip switch on the PCB of the outdoor unit.

### • How It Works

In Silent Mode, the overall sound level of the outdoor unit drops by up to 3dB and the sound level of the indoor unit also decreases.

#### Press the Silent Button

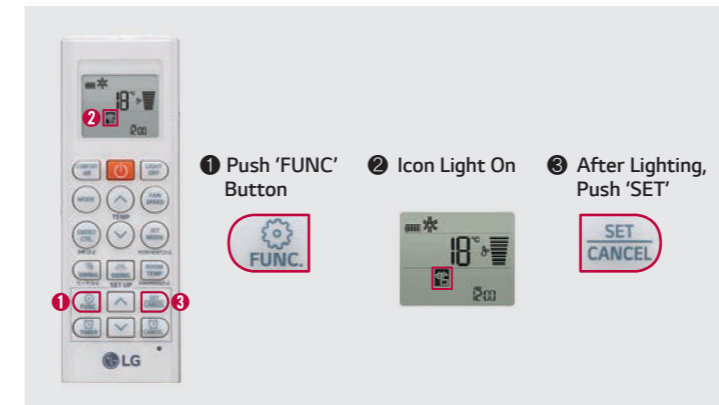


#### Controls the Outdoor Compressor



### • Test Result

#### Noise Comparison Graph

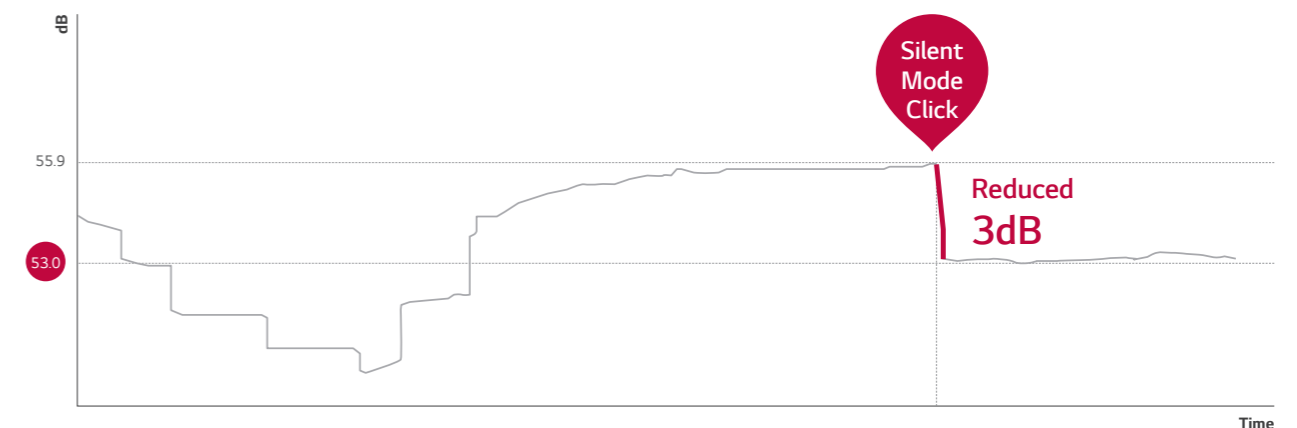

\* Test Conditions  
 Spec : Selecting Silent Mode reduces the noise of an outdoor fan unit by 3dB  
 Assessment : 36.2 dB emitted from center/side of unit at a distance of 1m.

# COMFORT



## Quick & Easy Installation

LG air conditioner is designed for an easy and efficient installation, making possible to install several units in a short period of time


\* Specifications may vary for each model.

### • Concept

By reducing the manpower and time required for installation, it is now possible to install more units in less time.

### • How It Works

#### One Simple Packing Box

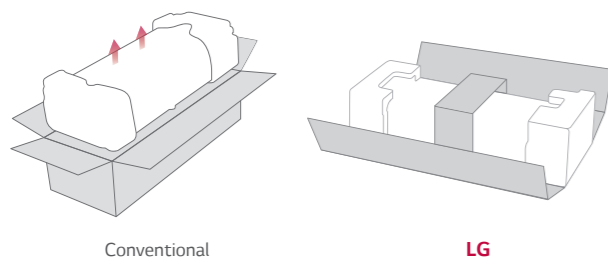

Conventional

LG


#### Installation Plate Improvement

LG's installation plate is larger and customized to reduce installation time.




#### Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

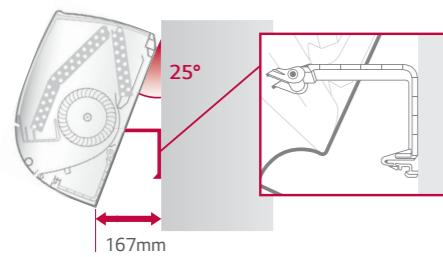

#### Wider Tubing Space

The space provided for tubing facilitates the whole installation process and hides the unorganized parts, making it appear clean and tidy.

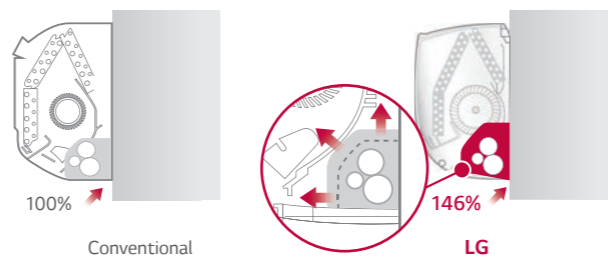

100%


Conventional

146%

LG


#### Detachable Bottom Cover

The air conditioner's bottom cover is detachable for easier installation and access.



#### Quick button for running test

The test button is conveniently located and easy to find.

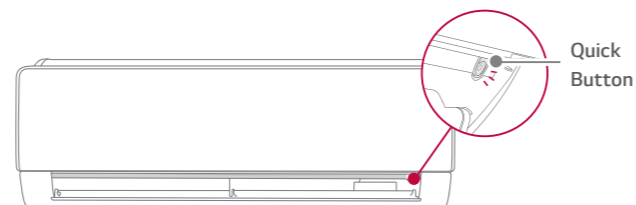

Quick Button


# ARTCOOL GALLERY



NEW



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

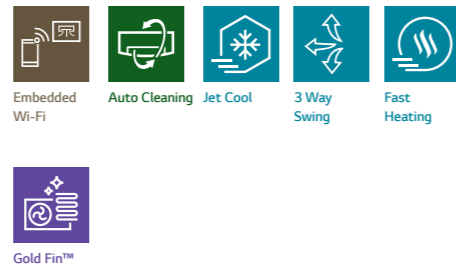

## • Single Combination

UNIT				9K				12K			
INDOOR				A09FT NSF				A12FT NSF			
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700			890 / 3500 / 4040				
	Heating	Min / Rated / Max	W	890 / 3300 / 4100			890 / 4000 / 5100				
	Heating -7°C	Rated	W	3200			3500				
Power Input	Cooling	Rated	W	658			1050				
	Heating	Rated	W	831			1108				
EER			W / W	3.8			3.33				
S.E.E.R.				6.8			6.6				
P design C			kW	2.5			3.5				
COP			W / W	3.97			3.61				
S.C.O.P. (Average / Warmer)				4.0 / 4.6			4.0 / 4.6				
P design H (Average / Warmer)			kW	2.7 / 1.5			2.7 / 1.5				
Energy Label (A+++ to D Scale)	Cooling			A++			A++				
	Heating (Average / Warmer)			A+ / A++			A+ / A++				
Annual Energy Consumption	Cooling		kWh	129			186				
	Heating (Average / Warmer)		kWh	945 / 457			945 / 457				
Sound Pressure	Cooling	S / L / M / H	dB(A)	27 / 35 / 39 / 45			27 / 35 / 39 / 45				
	Heating	L / M / H	dB(A)	35 / 39 / 45			35 / 39 / 45				
Sound Power	Cooling	Power	dB(A)	60			60				
		S / L / M / H	m <sup>2</sup> / min	- / 6.0 / 7.6 / 9.0			- / 6.0 / 7.6 / 9.0				
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	10.0			10.0				
	Heating	L / M / H	m <sup>3</sup> / min	6.1 / 7.8 / 9.3			6.1 / 7.8 / 9.3				
Dehumidification Rate			l/h	1.1			1.3				
		Rated	A	3.2			4.9				
Running Current	Cooling	Max	A	6.0			6.0				
	Heating	Rated	A	4.1			5.1				
		Max	A	7.0			7.0				
Starting Current	Cooling / Heating	Rated	A	3.2 / 4.1			4.9 / 5.1				
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50			1 / 220 - 240 / 50				
Circuit Breaker			A	15			15				
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0			3 x 1.0				
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0 (Including Earth)			4 x 1.0 (Including Earth)				
Dimension			mm	600 x 600 x 146			600 x 600 x 146				
Net Weight			kg	14.4			14.4				
Fan Motor Output			W	16.7			16.7				
OUTDOOR				A09FT UL2				A12FT UL2			
Operation Range	Cooling	Min/Max	°CDB	-10 / 48			-10 / 48				
	Heating	Min/Max	°CDB	-10 / 24			-10 / 24				
Sound Pressure	Cooling	High	dB(A)	51			51				
	Heating	High	dB(A)	51			51				
Sound Power	Cooling	High	dB(A)	65			65				
		High	dB(A)	35			35				
Air Flow Rate		Min / Max	m <sup>3</sup> / min	3 / 20			3 / 20				
		Max	m	10			10				
Piping	Length(Odu / ldu)		m	6.35 (1/4)			6.35 (1/4)				
	Elevation(Odu / ldu)		mm (inch)	9.52 (3/8)			9.52 (3/8)				
Piping Connection	Liquid	OD (Outside)	mm (inch)	21.5 (27/32)			21.5 (27/32)				
	Gas	OD (Outside)	mm (inch)	R32			R32				
Drain Hose Size			mm (inch)	0.800			0.800				
			kg	0.540			0.540				
Refrigerant	Charge at 7.5m		g/m	20			20				
	Additional charge		g/m	675			675				
Fan Motor Output			W	43			43				
	Compressor Type			Twin Rotary			Twin Rotary				
Net Weight			kg	34.4			34.4				
Dimension			mm	770 x 545 x 288			770 x 545 x 288				

\* This product contains Fluorinated greenhouse gases (R32).

\*\* S : Sleep / L : Low / M : Medium / H : High

\*\*\* GWP : Global warming potential


\*\*\*\* t-CO<sub>2</sub>eq : F-gas(kg)\*GWP/1000

\*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# ARTCOOL MIRROR



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

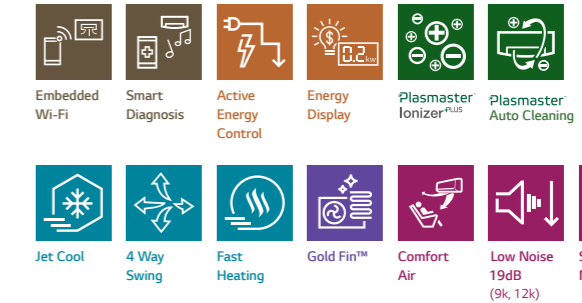

## • Single Combination

UNIT				9K				12K				18K				24K			
INDOOR				AC09BQ NSJ				AC12BQ NSJ				AC18BQ NSK				AC24BQ NSK			
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700			890 / 3500 / 4040			900 / 5000 / 5500			900 / 6600 / 7420						
	Heating	Min / Rated / Max	W	890 / 3300 / 4100			890 / 4000 / 5100			900 / 5800 / 6400			900 / 7500 / 8640						
	Heating -7°C	Rated	W	2600			3000			4200			6000						
Power Input	Cooling	Rated	W	656			1080			1562			2164						
	Heating	Rated	W	800			1050			1611			2238						
EER			W / W	3.81			3.24			3.20			3.05						
S.E.E.R.				7.0			6.6			7.0			6.9						
P design C			kW	2.5			3.5			5.0			6.6						
COP			W / W	4.13			3.81			3.60			3.35						
S.C.O.P. (Average / Warmer)				4.0 / 4.9			4.0 / 4.9			4.3 / 5.3			4.3 / 5.3						
P design H (Average / Warmer)			kW	2.5 / 1.3			2.5 / 1.3			3.9 / 2.1			5.0 / 2.7						
Energy Label (A+++ to D Scale)	Cooling			A++			A++			A++			A++						
	Heating (Average / Warmer)			A+ / A++			A+ / A++			A+ / A++			A+ / A++						
Annual Energy Consumption	Cooling		kWh	125			186			250			335						
	Heating (Average / Warmer)		kWh	875 / 371			875 / 371			1270 / 555			1628 / 713						
Sound Pressure	Cooling	S / L / M / H	dB(A)	19 / 27 / 35 / 41			19 / 27 / 35 / 41			31 / 34 / 39 / 44			31 / 34 / 42 / 47						
	Heating	L / M / H	dB(A)	27 / 35 / 41			27 / 35 / 41			34 / 39 / 44			34 / 42 / 47						
Sound Power	Cooling	Power	dB(A)	59			59			60			65						
		S / L / M / H	m <sup>2</sup> / min	30 / 42 / 75 / 100			30 / 42 / 75 / 100			80 / 105 / 130 / 145			80 / 105 / 131 / 161						
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	12.5			12.5			15.5			20.0						
	Heating	L / M / H	m <sup>3</sup> / min	5.6 / 7.2 / 10.0			5.6 / 7.2 / 10.0			11.0 / 13.5 / 16.0			10.5 / 13.1 / 16.1						
Dehumidification Rate			l/h	1.1			1.3			1.8			2.5						
		Rated	A	3.3			4.7			6.9			9.8						
Running Current	Cooling	Max	A	6.0			6.0			9.0			14.0						
	Heating	Rated	A	4.0			4.7			7.1			10.4						
		Max	A	7.0			7.0			9.5			14.0						
Starting Current	Cooling / Heating	Rated	A	3.3 / 4.0			4.7 / 4.7			6.9 / 7.1			9.8 / 10.4						
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50			1 / 220 - 240 / 50			1 / 220 - 240 / 50			1 / 220 - 240 / 50						
Circuit Breaker			A	15			15			20			25						
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0			3 x 1.0			3 x 1.5			3 x 2.5						
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0			4 x 1.0			4 x 1.0			4 x 1.0						
Dimension			mm	837 x 308 x 192			837 x 308 x 192			998 x 345 x 212			998 x 345 x 212						
Net Weight			kg	9.9			9.9			12.8			13.5						
Fan Motor Output			W	30			30			30			60						
OUTDOOR				AC09BQ UA3				AC12BQ UA3				AC18BQ UL2				AC24BQ U24			
Operation Range	Cooling	Min/Max	°CDB	-10 / 48			-10 / 48			-15 / 48			-15 / 48						
	Heating	Min/Max	°CDB	-10 / 24			-10 / 24			-10 / 24			-10 / 24						
Sound Pressure	Cooling	High	dB(A)	48			48			53			54						
	Heating	High	dB(A)	50			50			55			57						
Sound Power	Cooling	High	dB(A)	65			65			65			70						
		High	dB(A)	27			27			35			50						
Air Flow Rate		Min / Max	m <sup>3</sup> / min	3 / 15			3 / 15			3 / 20			3 / 30						
		Max	m	7			7			10			15						
Piping	Length(Odu / ldu)		mm (inch)	6.35 (1/4)			6.35 (1/4)			6.35 (1/4)			6.35 (1/4)						
	Elevation(Odu / ldu)		mm (inch)	9.52 (3/8)			9.52 (3/8)			12.7 (1/2)			15.88 (5/8)						
Piping Connection	Liquid	OD (Outside)	mm (inch)	21.5 (0.85)			21.5 (0.85)			21.5 (0.85)			21.5 (0.85)						
	Gas	OD (Outside)	mm (inch)	R32			R32			R32			R32						
Drain Hose Size			mm (inch)	0.700			0.700			1.000			1.100						
			kg	0.473			0.473			0.675			0.743						
Refrigerant	Charge at 7.5m		g/m	20			20			20			20						
	Additional charge		g/m	675			675			675			675						
Fan Motor Output			W	43			43			43			85						
	Compressor Type			Twin Rotary			Twin Rotary			Twin Rotary			Twin Rotary						
Net Weight			kg	26.0			26.0			35.2			46.4						
Dimension			mm	717 x 495 x 230			717 x 495 x 230			770 x 545 x 288			870 x 650 x 330						

\* This product contains Fluorinated greenhouse gases (R32).

\*\* S : Sleep / L : Low / M : Medium / H : High

\*\*\* GWP : Global warming potential

\*\*\*\* t-CO<sub>2</sub>eq : F-gas(kg)\*GWP/1000

\*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# ARTCOOL SILVER



**Dual Inverter COMPRESSOR**  
**EUROVENT CERTIFIED PERFORMANCE**  
 LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Embedded Wi-Fi

Smart Diagnosis

Active Energy Control

Energy Display

Plasmaster Ionizer<sup>PLUS</sup>

Plasmaster Auto Cleaning

Jet Cool

4 Way Swing

Fast Heating

Gold Fin™

Comfort Air

Low Noise 19dB (9k, 12k)

Silence Mode

Quick & Easy Installation

## • Single Combination

UNIT				9K	12K	18K
INDOOR				AC09SQ NSJ	AC12SQ NSJ	AC18SQ NSK
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700	890 / 3500 / 4040	900 / 5000 / 5500
	Heating	Min / Rated / Max	W	890 / 3300 / 4100	890 / 4000 / 5100	900 / 5800 / 6400
	Heating -7°C	Rated	W	2600	3000	4200
Power Input	Cooling	Rated	W	656	1080	1562
	Heating	Rated	W	800	1050	1611
EER			W / W	3.81	3.24	3.20
S.E.E.R.				7.0	6.6	7.0
P design C			kW	2.5	3.5	5.0
COP			W / W	4.13	3.81	3.60
S.C.O.P. (Average / Warmer)				4.0 / 4.9	4.0 / 4.9	4.3 / 5.3
P design H (Average / Warmer)			kW	2.5 / 1.3	2.5 / 1.3	3.9 / 2.1
Energy Label (A+++ to D Scale)	Cooling			A++	A++	A++
	Heating (Average / Warmer)			A+ / A++	A+ / A++	A+ / A++
Annual Energy Consumption	Cooling		kWh	125	186	250
	Heating (Average / Warmer)		kWh	875 / 386	875 / 386	1270 / 555
Sound Pressure	Cooling	S / L / M / H	dBA	19 / 27 / 35 / 41	19 / 27 / 35 / 41	31 / 34 / 39 / 44
	Heating	L / M / H	dBA	27 / 35 / 41	27 / 35 / 41	34 / 39 / 44
Sound Power	Cooling	Power	dBA	59	59	60
		S / L / M / H	m <sup>2</sup> / min	3.0 / 4.2 / 7.5 / 10.0	3.0 / 4.2 / 7.5 / 10.0	8.0 / 10.5 / 13.0 / 14.5
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	12.5	12.5	15.5
	Heating	L / M / H	m <sup>3</sup> / min	5.6 / 7.2 / 10.0	5.6 / 7.2 / 10.0	11.0 / 13.5 / 16.0
Dehumidification Rate			l/h	1.1	1.3	1.8
	Cooling	Rated	A	3.3	4.7	6.9
Running Current		Max	A	6.0	6.0	9.0
	Heating	Rated	A	4.0	4.7	7.1
		Max	A	7.0	7.0	9.5
Starting Current	Cooling / Heating	Rated	A	3.3 / 4.0	4.7 / 4.7	6.9 / 7.1
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50	1 / 220 - 240 / 50	1 / 220 - 240 / 50
Circuit Breaker			A	15	15	20
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0	3 x 1.0	3 x 1.5
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Dimension			mm	837 x 308 x 192	837 x 308 x 192	998 x 345 x 212
Net Weight			kg	9.9	9.9	12.8
Fan Motor Output			W	30	30	30
OUTDOOR				AC09BQ UA3	AC12BQ UA3	AC18BQ UL2
Operation Range	Cooling	Min/Max	*CDB	-10 / 48	-10 / 48	-15 / 48
	Heating	Min/Max	*CDB	-10 / 24	-10 / 24	-10 / 24
Sound Pressure	Cooling	High	dBA	48	48	53
	Heating	High	dBA	50	50	55
Sound Power	Cooling	High	dBA	65	65	65
		High	m <sup>2</sup> / min	27	27	35
Air Flow Rate		Min / Max	m	3 / 15	3 / 15	3 / 20
		Max	m	7	7	10
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)	9.52 (3/8)	12.7 (1/2)
Drain Hose Size		OD (Outside)	mm (inch)	21.5 (0.85)	21.5 (0.85)	21.5 (0.85)
Refrigerant	Type			R32	R32	R32
	Charge at 7.5m		kg	0.700	0.700	1.000
	t-CO <sub>2</sub> eq			0.473	0.473	0.675
	Additional charge		g/m	20	20	20
	GWP			675	675	675
Fan Motor Output			W	43	43	43
Compressor Type				Twin Rotary	Twin Rotary	Twin Rotary
Net Weight			kg	26.0	26.0	35.2
Dimension			mm	717 x 495 x 230	717 x 495 x 230	770 x 545 x 288

\* This product contains Fluorinated greenhouse gases (R32).  
 \*\* S: Sleep / L: Low / M: Medium / H: High  
 \*\*\* GWP: Global warming potential  
 \*\*\*\* t-CO<sub>2</sub>eq: F-gas(kg)\*GWP/1000  
 \*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# ATHENA EXTREME



NEW



**Dual Inverter COMPRESSOR**  
**EUROVENT CERTIFIED PERFORMANCE**  
 LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Embedded Wi-Fi

Smart Diagnosis

Active Energy Control

Energy Display

Plasmaster Ionizer<sup>PLUS</sup>

Dual Protection Filter

Plasmaster Auto Cleaning

Jet Cool

4 Way Swing

Fast Heating

Gold Fin™

Low Noise 19dB

Silence Mode

Quick & Easy Installation

## • Single Combination

UNIT				9K	12K
INDOOR				F09MT NSM	F12MT NSM
Capacity	Cooling	Min / Rated / Max	W	300 / 2500 / 4000	300 / 3500 / 4250
	Heating	Min / Rated / Max	W	300 / 3200 / 6900	300 / 4000 / 7320
	Heating -7°C	Rated	W	4300	4700
Power Input	Cooling	Rated	W	490	833
	Heating	Rated	W	593	785
EER			W / W	5.1	4.2
S.E.E.R.				9.4	9.1
P design C			kW	2.5	3.5
COP			W / W	5.4	5.1
S.C.O.P. (Average / Warmer)				5.1 / -	5.1 / -
P design H (Average / Warmer)			kW	3.7 / -	3.8 / -
Energy Label (A+++ to D Scale)	Cooling			A+++	A+++
	Heating (Average / Warmer)			A+++ / -	A+++ / -
Annual Energy Consumption	Cooling		kWh	93	135
	Heating (Average / Warmer)		kWh	1016 / -	1043 / -
Sound Pressure	Cooling	S / L / M / H	dBA	19 / 27 / 35 / 40	19 / 27 / 35 / 40
	Heating	L / M / H	dBA	27 / 35 / 40	27 / 35 / 40
Sound Power	Cooling	Power	dBA	60	60
		S / L / M / H	m <sup>2</sup> / min	6.6 / 8.7 / 11.1 / 12.4	6.6 / 8.7 / 11.1 / 12.4
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	15.5	15.5
	Heating	L / M / H	m <sup>3</sup> / min	8.7 / 11.1 / 14.3	8.7 / 11.1 / 14.3
Dehumidification Rate			l/h	1.7	1.7
	Cooling	Rated	A	3.8	6.1
Running Current		Max	A	8.1	8.1
	Heating	Rated	A	4.6	5.8
		Max	A	8.8	8.8
Starting Current	Cooling / Heating	Rated	A	3.8 / 4.6	6.1 / 5.8
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50	1 / 220 - 240 / 50
Circuit Breaker			A	15	15
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0	3 x 1.0
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Dimension			mm	875 x 295 x 235	875 x 295 x 235
Net Weight			kg	11.0	11.0
Fan Motor Output			W	30	30
OUTDOOR				F09MT U24	F12MT U24
Operation Range	Cooling	Min/Max	*CDB	-10 / 48	-10 / 48
	Heating	Min/Max	*CDB	-25 / 24	-25 / 24
Sound Pressure	Cooling	High	dBA	48	48
	Heating	High	dBA	50	50
Sound Power	Cooling	High	dBA	65	65
		High	m <sup>2</sup> / min	49	49
Air Flow Rate		Min / Max	m	3 / 20	3 / 20
		Max	m	10	10
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)	6.35 (1/4)
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)	9.52 (3/8)
Drain Hose Size		OD (Outside)	mm (inch)	21.5 (27/32)	21.5 (27/32)
Refrigerant	Type			R32	R32
	Charge at 7.5m		kg	1.000	1.000
	t-CO <sub>2</sub> eq			0.675	0.675
	Additional charge		g/m	20	20
	GWP			675	675
Fan Motor Output			W	85	85
Compressor Type				Twin Rotary	Twin Rotary
Net Weight			kg	43	43
Dimension			mm	870 x 650 x 330	870 x 650 x 330

\* This product contains Fluorinated greenhouse gases (R32).  
 \*\* S: Sleep / L: Low / M: Medium / H: High  
 \*\*\* GWP: Global warming potential  
 \*\*\*\* t-CO<sub>2</sub>eq: F-gas(kg)\*GWP/1000  
 \*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# DUALCOOL PURE (With Air Purification)



NEW



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Embedded Wi-Fi

Active Energy Control

Energy Display

Auto Cleaning

Ultra Dust Sensing (PM 1.0)

Silence Mode

Jet Cool

4 Way Swing

Fast Heating

Gold Fin™

Comfort Air

Quick & Easy Installation

## • Single Combination

UNIT				9K				12K			
INDOOR				AP09RT NSJ				AP12RT NSJ			
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700			890 / 3500 / 4000				
	Heating	Min / Rated / Max	W	890 / 3300 / 4100			890 / 4000 / 4700				
Power Input	Cooling	Rated	W	2600			3000				
	Heating	Rated	W	710			1160				
EER			W/W	850			1130				
S.E.E.R.			W/W	3.52			3.02				
P design C			kW	6.6			6.2				
COP			W/W	2.5			3.5				
S.C.O.P. (Average / Warmer)			kW	3.88			3.54				
P design H (Average / Warmer)			kW	4.0 / 5.0			4.0 / 5.0				
Energy Label (A+++ to D Scale)	Cooling			A+			A+				
Annual Energy Consumption	Cooling		kWh	1.33			1.98				
	Heating (Average / Warmer)		kWh	875 / 393			875 / 393				
Sound Pressure	Cooling	S / L / M / H	dBA	21 / 27 / 35 / 42			21 / 27 / 35 / 42				
	Heating	L / M / H	dBA	30 / 35 / 41			30 / 35 / 41				
Sound Power	Cooling	Power	dBA	59			59				
	Heating	S / L / M / H	m <sup>3</sup> /min	3.0 / 4.2 / 6.6 / 10.0			3.0 / 4.2 / 6.6 / 10.0				
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> /min	11.0			11.0				
	Heating	L / M / H	m <sup>3</sup> /min	4.2 / 6.6 / 10.0			4.2 / 6.6 / 10.0				
Dehumidification Rate	Cooling	Rated	l/h	1.1			1.3				
	Heating	Max	A	3.5			5.2				
Running Current	Cooling	Max	A	6.0			6.2				
	Heating	Max	A	4.0			5.1				
Starting Current	Cooling / Heating	Rated	A	7.0			7.0				
Power Supply			ØV/Hz	3.5 / 4.0			5.2 / 5.1				
Circuit Breaker			A	1 / 220-240 / 50			1 / 220-240 / 50				
Power Supply Cable			N x mm <sup>2</sup>	15			15				
Power & Transmission Cable			N x mm <sup>2</sup>	3 x 1.0			3 x 1.0				
Dimension			mm	4 x 1.0			4 x 1.0				
Net Weight			kg	857 x 348 x 189			857 x 348 x 189				
Fan Motor Output			W	9.5			9.5				
OUTDOOR				APO9RT UA3				AP12RT UA3			
Operation Range	Cooling	Min/Max	°CDB	-10 / 48			-10 / 48				
	Heating	Min/Max	°CDB	-10 / 24			-10 / 24				
Sound Pressure	Cooling	High	dBA	48			48				
	Heating	High	dBA	50			50				
Sound Power	Cooling	High	dBA	65			65				
	Heating	High	dBA	27			27				
Air Flow Rate	Length(Odu/Idu)	Min/Max	m	3 / 15			3 / 15				
	Elevation(Odu/Idu)	Max	m	7			7				
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)			6.35 (1/4)				
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)			9.52 (3/8)				
Drain Hose Size			mm (inch)	21.5 (0.85)			21.5 (0.85)				
Refrigerant	Type			R32			R32				
	Charge at 7.5m		kg	0.700			0.700				
Additional charge	t-CO <sub>2</sub> eq		g/m	0.473			0.473				
	GWP			20			20				
Fan Motor Output			W	675			675				
Compressor Type				43			43				
Net Weight			kg	Twin Rotary			Twin Rotary				
Dimension			mm	26			26				
				717 x 495 x 230			717 x 495 x 230				

\* This product contains Fluorinated greenhouse gases (R32).

\*\* S: Sleep / L: Low / M: Medium / H: High

\*\*\* GWP: Global warming potential

\*\*\*\* t-CO<sub>2</sub>eq: F-gas(kg)\*GWP/1000

\*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# DELUXE



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Embedded Wi-Fi

Smart Diagnosis

Active Energy Control

Energy Display

Plasmaster Ionizer PLUS

Plasmaster Auto Cleaning

Jet Cool

4 Way Swing

Fast Heating

Gold Fin™

Comfort Air

Low Noise 19dB (9k, 12k)

Silence Mode

Quick & Easy Installation

## • Single Combination

UNIT				9K				12K				18K				24K			
INDOOR				DC09RQ NSJ				DC12RQ NSJ				DC18RQ NSK				DC24RQ NSK			
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700			890 / 3500 / 4040			900 / 5000 / 5500			900 / 6600 / 7420						
	Heating	Min / Rated / Max	W	890 / 3200 / 5000			890 / 4000 / 6000			900 / 5800 / 6400			900 / 7500 / 8640						
Power Input	Cooling	Rated	W	3200			3500			4200			6000						
	Heating	Rated	W	572			933			1562			2164						
EER			W/W	711			976			1611			2238						
S.E.E.R.			W/W	4.37			3.75			3.20			3.05						
P design C			kW	7.9			7.6			7.0			6.9						
COP			W/W	2.5			3.5			5.0			6.6						
S.C.O.P. (Average / Warmer)			kW	4.5			4.1			3.60			3.35						
P design H (Average / Warmer)			kW	4.6 / 5.4			4.6 / 5.4			4.3 / 5.3			4.3 / 5.3						
Energy Label (A+++ to D Scale)	Cooling			2.8 / 1.5			2.9 / 1.5			3.9 / 2.1			5.0 / 2.7						
Annual Energy Consumption	Cooling		kWh	A+			A+			A+			A+						
	Heating (Average / Warmer)		kWh	A++ / A+++			A++ / A+++			A+ / A+++			A+ / A+++						
Sound Pressure	Cooling	S / L / M / H	dBA	111			161			250			335						
	Heating	L / M / H	dBA	852 / 389			883 / 389			1270 / 555			1628 / 713						
Sound Power	Cooling	Power	dBA	19 / 27 / 37 / 42			19 / 27 / 37 / 42			31 / 34 / 39 / 44			31 / 34 / 42 / 47						
	Heating	S / L / M / H	m <sup>3</sup> /min	27 / 37 / 42			27 / 37 / 42			34 / 39 / 44			34 / 42 / 47						
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> /min	60			60			60			65						
	Heating	L / M / H	m <sup>3</sup> /min	3.5 / 5.5 / 9.0 / 11.0			3.5 / 5.5 / 9.0 / 11.0			8.0 / 10.5 / 13.0 / 14.5			8.0 / 10.5 / 13.1 / 16.1						
Dehumidification Rate	Cooling	Rated	l/h	130			130			155			200						
	Heating	Max	A	6.5 / 9.0 / 11.0			6.5 / 9.0 / 11.0			11.0 / 13.5 / 16.0			10.5 / 13.1 / 16.1						
Running Current	Cooling	Max	A	1.1			1.3			1.8			2.5						
	Heating	Max	A	2.5			4.0			6.9			9.8						
Starting Current	Cooling / Heating	Rated	A	6.0			6.0			9.0			14.0						
Power Supply			ØV/Hz	3.2			4.3			7.1			10.4						
Circuit Breaker			A	7.0			7.0			9.5			14.0						
Power Supply Cable			N x mm <sup>2</sup>	2.5 / 3.2			4.0 / 4.3			6.9 / 7.1			9.8 / 10.4						
Power & Transmission Cable			N x mm <sup>2</sup>	1 / 220 - 240 / 50			1 / 220 - 240 / 50			1 / 220 - 240 / 50			1 / 220 - 240 / 50						
Dimension			mm	15			15			20			25						
Net Weight			kg	3 x 1.0			3 x 1.0			3 x 1.5			3 x 2.5						
Fan Motor Output			W	4 x 1.0			4 x 1.0			4 x 1.0			4 x 1.0						
OUTDOOR				DC09RQ UL2				DC12RQ UL2				DC18RQ UL2				DC24RQ U24			
Operation Range	Cooling	Min/Max	°CDB	-15 / 48			-15 / 48			-15 / 48			-15 / 48						
	Heating	Min/Max	°CDB	-15 / 24			-15 / 24			-15 / 24			-10 / 24						
Sound Pressure	Cooling	High	dBA	49			49			53			54						
	Heating	High	dBA	51			51			55			57						
Sound Power	Cooling	High	dBA	65			65			65			70						
	Heating	High	dBA	35			35			35			50						
Air Flow Rate	Length(Odu/Idu)	Min/Max	m	3 / 20			3 / 20			3 / 20			3 / 30						
	Elevation(Odu/Idu)	Max	m	10			10			10			15						
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)			6.35 (1/4)			6.35 (1/4)			6.35 (1/4)						
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)			9.52 (3/8)			12.7 (1/2)			15.88 (5/8)						
Drain Hose Size			mm (inch)	21.5 (0.85)			21.5 (0.85)			21.5 (0.85)			21.5 (0.85)						
Refrigerant	Type			R32			R32			R32			R32						
	Charge at 7.5m		kg	0.800			0.800			1.000			1.100						
Additional charge	t-CO <sub>2</sub> eq		g/m	0.540			0.540			0.675			0.743						
	GWP			20			20			20			20						
Fan Motor Output			W	675			675			675			675						
Compressor Type				43			43			43			85						
Net Weight			kg	Twin Rotary			Twin Rotary			Twin Rotary			Twin Rotary						
Dimension			mm	34.1			34.1			34.4			46.0						
				770 x 545 x 288			770 x 545 x 288			770 x 545 x 288			870 x 650 x 330						

\* This product contains Fluorinated greenhouse gases (R32).

\*\* S: Sleep / L: Low / M: Medium / H: High

\*\*\* GWP: Global warming potential

\*\*\*\* t-CO<sub>2</sub>eq: F-gas(kg)\*GWP/1000

\*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# SIRIUS



**Dual Inverter COMPRESSOR**  
**EUROVENT CERTIFIED PERFORMANCE**  
 LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Embedded Wi-Fi

Smart Diagnosis

Active Energy Control

Energy Display

Auto Cleaning

Jet Cool

4 Way Swing

Fast Heating

Gold Fin™

Comfort Air

Low Noise 19dB (9k, 12k)

Silence Mode

Quick & Easy Installation

## • Single Combination

UNIT				9K	12K	18K	24K
INDOOR				PC09SQ NSJ	PC12SQ NSJ	PC18SQ NSK	PC24SQ NSK
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700	890 / 3500 / 4040	900 / 5000 / 5500	900 / 6600 / 7420
	Heating	Min / Rated / Max	W	890 / 3300 / 4100	890 / 4000 / 5100	900 / 5800 / 6400	900 / 7500 / 8640
	Heating -7°C	Rated	W	2600	3000	4200	6000
Power Input	Cooling	Rated	W	656	1080	1562	2164
	Heating	Rated	W	800	1050	1611	2238
EER			W / W	3.81	3.24	3.20	3.05
S.E.E.R.				7.0	6.6	7.0	6.9
P design C			kW	2.5	3.5	5.0	6.6
COP			W / W	4.13	3.81	3.60	3.35
S.C.O.P. (Average / Warmer)				4.0 / 4.9	4.0 / 4.9	4.3 / 5.3	4.3 / 5.3
P design H (Average / Warmer)			kW	2.5 / 1.3	2.5 / 1.3	3.9 / 2.1	5.0 / 2.7
Energy Label (A+++ to D Scale)	Cooling			A++	A++	A++	A++
	Heating (Average / Warmer)			A+ / A++	A+ / A++	A+ / A+++	A+ / A+++
Annual Energy Consumption	Cooling		kWh	125	186	250	335
	Heating (Average / Warmer)		kWh	875 / 371	875 / 371	1270 / 555	1628 / 713
Sound Pressure	Cooling	S / L / M / H	dB(A)	19 / 27 / 35 / 41	19 / 27 / 35 / 41	31 / 34 / 39 / 44	31 / 34 / 42 / 47
	Heating	L / M / H	dB(A)	27 / 35 / 41	27 / 35 / 41	34 / 39 / 44	34 / 42 / 47
Sound Power	Cooling	Power	dB(A)	59	59	60	65
		S / L / M / H	m <sup>3</sup> / min	3.0 / 4.2 / 7.5 / 10.0	3.0 / 4.2 / 7.5 / 10.0	8.0 / 10.5 / 13.0 / 14.5	8.0 / 10.5 / 13.1 / 16.1
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	12.5	12.5	15.5	20.0
	Heating	L / M / H	m <sup>3</sup> / min	5.6 / 7.2 / 10.0	5.6 / 7.2 / 10.0	11.0 / 13.5 / 16.0	10.5 / 13.1 / 16.1
Dehumidification Rate			l/h	1.1	1.3	1.8	2.5
	Cooling	Rated	A	3.3	4.7	6.9	9.8
Running Current		Max	A	6.0	6.0	9.0	14.0
	Heating	Rated	A	4.0	4.7	7.1	10.4
		Max	A	7.0	7.0	9.5	14.0
Starting Current	Cooling / Heating	Rated	A	3.3 / 4.0	4.7 / 4.7	6.9 / 7.1	9.8 / 10.4
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50	1 / 220 - 240 / 50	1 / 220 - 240 / 50	1 / 220 - 240 / 50
Circuit Breaker			A	15	15	20	25
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0	3 x 1.0	3 x 1.5	3 x 2.5
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Dimension			mm	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
Net Weight			kg	8.7	8.7	11.9	12.7
Fan Motor Output			W	30	30	30	60
OUTDOOR				PC09SQ UA3	PC12SQ UA3	PC18SQ UL2	PC24SQ U24
Operation Range	Cooling	Min/Max	°CDB	-10 / 48	-10 / 48	-15 / 48	-15 / 48
	Heating	Min/Max	°CDB	-10 / 24	-10 / 24	-10 / 24	-10 / 24
Sound Pressure	Cooling	High	dB(A)	48	48	53	54
	Heating	High	dB(A)	50	50	55	57
Sound Power	Cooling	High	dB(A)	65	65	65	70
	Heating	High	dB(A)	65	65	65	70
Air Flow Rate		Min / Max	m <sup>3</sup> / min	3 / 15	3 / 15	3 / 20	3 / 30
		Max	m	7	7	10	15
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)	9.52 (3/8)	12.7 (1/2)	15.88 (5/8)
Drain Hose Size		OD (Outside)	mm (inch)	21.5 (0.85)	21.5 (0.85)	21.5 (0.85)	21.5 (0.85)
	Type			R32	R32	R32	R32
Refrigerant	Charge at 7.5m		kg	0.700	0.700	1.000	1.100
	t-CO <sub>2</sub> eq			0.473	0.473	0.675	0.743
	Additional charge		g/m	20	20	20	20
Fan Motor Output			W	43	43	43	85
	Compressor Type			Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Net Weight			kg	25.1	25.1	34.4	46.0
Dimension			mm	717 x 495 x 230	717 x 495 x 230	770 x 545 x 288	870 x 650 x 330

\* This product contains Fluorinated greenhouse gases (R32).  
 \*\* S : Sleep / L : Low / M : Medium / H : High  
 \*\*\* GWP : Global warming potential  
 \*\*\*\* t-CO<sub>2</sub>eq : F-gas(kg)\*GWP/1000  
 \*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# STANDARD



**Dual Inverter COMPRESSOR**  
**EUROVENT CERTIFIED PERFORMANCE**  
 LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification: [www.eurovent-certification.com](http://www.eurovent-certification.com)

Smart Diagnosis

Active Energy Control

Energy Display

Auto Cleaning

Jet Cool

2 Way Swing (9k, 12k)

4 Way Swing (18k, 24k)

Fast Heating

Gold Fin™

Comfort Air

Low Noise 19dB (9k, 12k)

Silence Mode

Quick & Easy Installation


## • Single Combination

UNIT				9K	12K	18K	24K
INDOOR				S09EQ NSJ	S12EQ NSJ	S18EQ NSK	S24EQ NSK
Capacity	Cooling	Min / Rated / Max	W	890 / 2500 / 3700	890 / 3500 / 4040	900 / 5000 / 5500	900 / 6600 / 7420
	Heating	Min / Rated / Max	W	890 / 3300 / 4100	890 / 4000 / 5100	900 / 5800 / 6400	900 / 7500 / 8640
	Heating -7°C	Rated	W	2600	3000	4200	6000
Power Input	Cooling	Rated	W	656	1080	1562	2164
	Heating	Rated	W	800	1050	1611	2238
EER			W / W	3.81	3.24	3.20	3.05
S.E.E.R.				7.0	6.6	7.0	6.9
P design C			kW	2.5	3.5	5.0	6.6
COP			W / W	4.13	3.81	3.60	3.35
S.C.O.P. (Average / Warmer)				4.0 / 4.9	4.0 / 4.9	4.3 / 5.3	4.3 / 5.3
P design H (Average / Warmer)			kW	2.5 / 1.3	2.5 / 1.3	3.9 / 2.1	5.0 / 2.7
Energy Label (A+++ to D Scale)	Cooling			A++	A++	A++	A++
	Heating (Average / Warmer)			A+ / A++	A+ / A++	A+ / A+++	A+ / A+++
Annual Energy Consumption	Cooling		kWh	125	186	250	335
	Heating (Average / Warmer)		kWh	875 / 371	875 / 371	1270 / 555	1628 / 713
Sound Pressure	Cooling	S / L / M / H	dB(A)	19 / 27 / 35 / 41	19 / 27 / 35 / 41	31 / 34 / 39 / 44	31 / 34 / 42 / 47
	Heating	L / M / H	dB(A)	27 / 35 / 41	27 / 35 / 41	34 / 39 / 44	34 / 42 / 47
Sound Power	Cooling	Power	dB(A)	59	59	60	65
		S / L / M / H	m <sup>3</sup> / min	3.0 / 4.2 / 7.5 / 10.0	3.0 / 4.2 / 7.5 / 10.0	8.0 / 10.5 / 13.0 / 14.5	8.0 / 10.5 / 13.1 / 16.1
Air Flow Rate	Cooling	Max (Power)	m <sup>3</sup> / min	12.5	12.5	15.5	20.0
	Heating	L / M / H	m <sup>3</sup> / min	5.6 / 7.2 / 10.0	5.6 / 7.2 / 10.0	11.0 / 13.5 / 16.0	10.5 / 13.1 / 16.1
Dehumidification Rate			l/h	1.1	1.3	1.8	2.5
	Cooling	Rated	A	3.3	4.7	6.9	9.8
Running Current		Max	A	6.0	6.0	9.0	14.0
	Heating	Rated	A	4.0	4.7	7.1	10.4
		Max	A	7.0	7.0	9.5	14.0
Starting Current	Cooling / Heating	Rated	A	3.3 / 4.0	4.7 / 4.7	6.9 / 7.1	9.8 / 10.4
Power Supply			Ø / V / Hz	1 / 220 - 240 / 50	1 / 220 - 240 / 50	1 / 220 - 240 / 50	1 / 220 - 240 / 50
Circuit Breaker			A	15	15	20	25
Power Supply Cable			N x mm <sup>2</sup>	3 x 1.0	3 x 1.0	3 x 1.5	3 x 2.5
Power & Transmission Cable			N x mm <sup>2</sup>	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Dimension			mm	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
Net Weight			kg	8.7	8.7	11.9	12.7
Fan Motor Output			W	30	30	30	60
OUTDOOR				S09EQ UA3	S12EQ UA3	S18EQ UL2	S24EQ U24
Operation Range	Cooling	Min/Max	°CDB	-10 / 48	-10 / 48	-15 / 48	-15 / 48
	Heating	Min/Max	°CDB	-10 / 24	-10 / 24	-10 / 24	-10 / 24
Sound Pressure	Cooling	High	dB(A)	48	48	53	54
	Heating	High	dB(A)	50	50	55	57
Sound Power	Cooling	High	dB(A)	65	65	65	70
	Heating	High	dB(A)	65	65	65	70
Air Flow Rate		Min / Max	m <sup>3</sup> / min	3 / 15	3 / 15	3 / 20	3 / 30
		Max	m	7	7	10	15
Piping Connection	Liquid	OD (Outside)	mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas	OD (Outside)	mm (inch)	9.52 (3/8)	9.52 (3/8)	12.7 (1/2)	15.88 (5/8)
Drain Hose Size		OD (Outside)	mm (inch)	21.5 (0.85)	21.5 (0.85)	21.5 (0.85)	21.5 (0.85)
	Type			R32	R32	R32	R32
Refrigerant	Charge at 7.5m		kg	0.700	0.700	1.000	1.100
	t-CO <sub>2</sub> eq			0.473	0.473	0.675	0.743
	Additional charge		g/m	20	20	20	20
Fan Motor Output			W	43	43	43	85
	Compressor Type			Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Net Weight			kg	25.1	25.1	34.4	46.0
Dimension			mm	717 x 495 x 230	717 x 495 x 230	770 x 545 x 288	870 x 650 x 330


\* This product contains Fluorinated greenhouse gases (R32).  
 \*\* S : Sleep / L : Low / M : Medium / H : High  
 \*\*\* GWP : Global warming potential  
 \*\*\*\* t-CO<sub>2</sub>eq : F-gas(kg)\*GWP/1000  
 \*\*\*\*\* Specification, design and feature are subject to change without prior notice.

# INDOOR UNIT

F09MT.NSM / F12MT.NSM

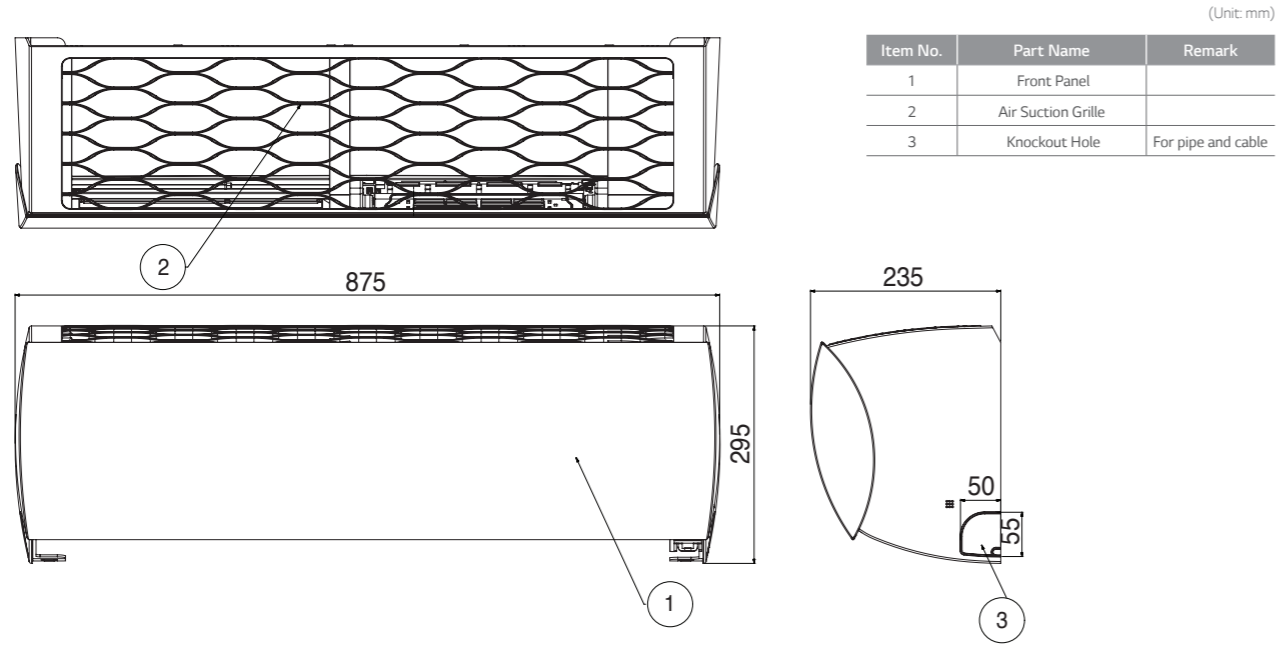


A09FT.NSF / A12FT.NSF

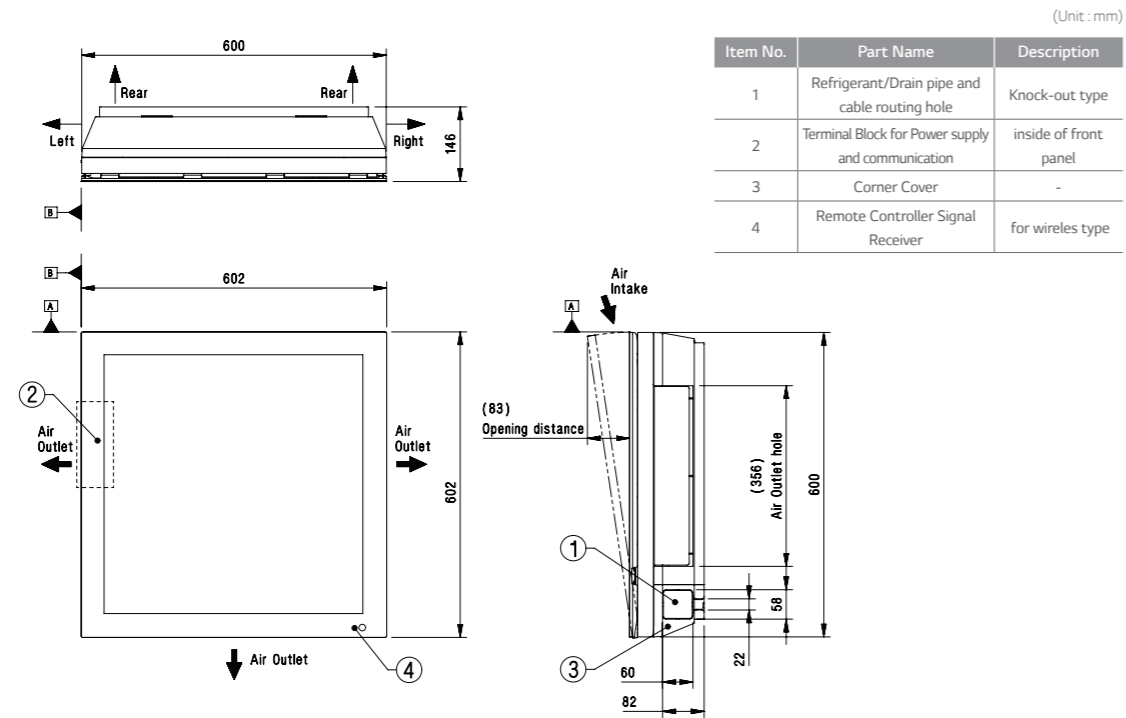


# INDOOR UNIT

AC09BQ.NSJ / AC12BQ.NSJ / AC09SQ.NSJ / AC12SQ.NSJ

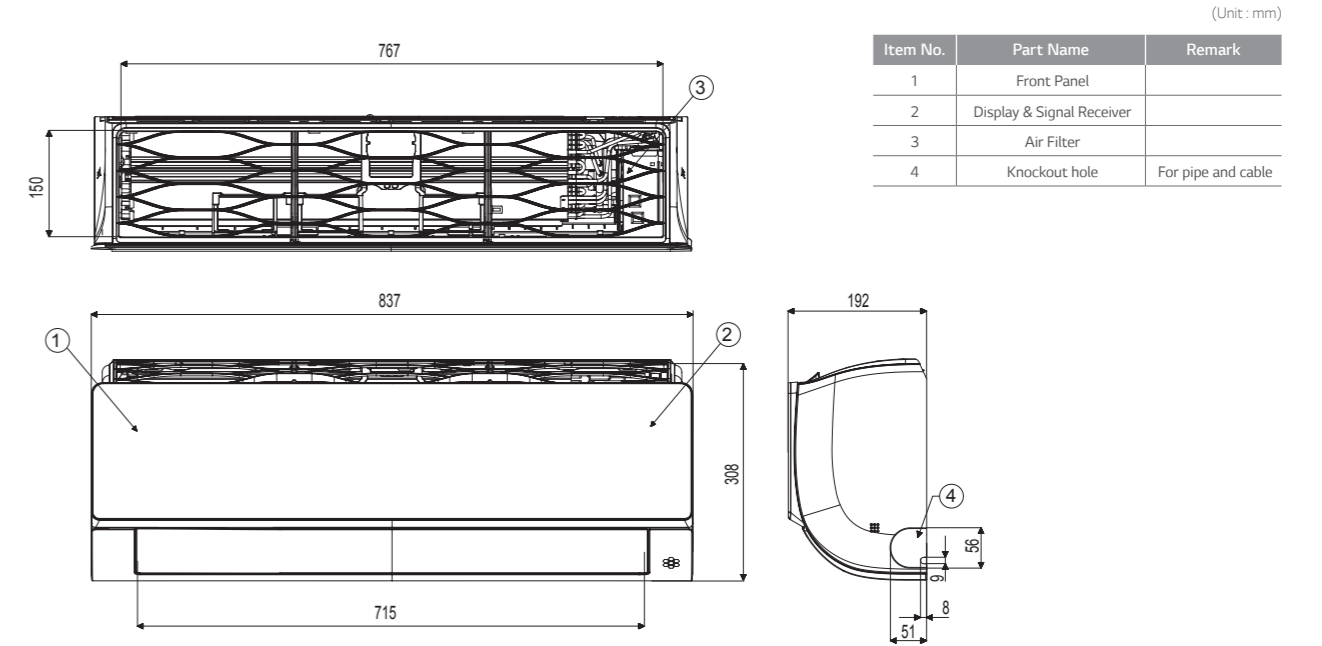


AC18BQ.NSK / AC24BQ.NSK / AC18SQ.NSK

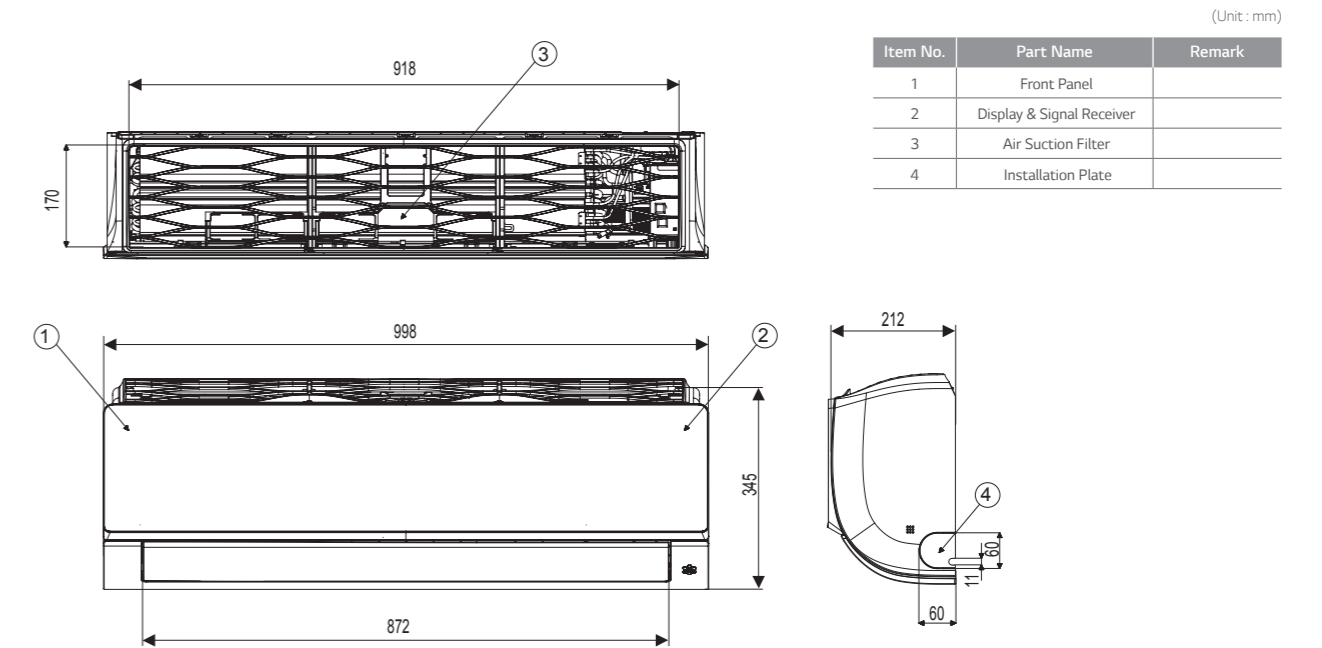

# INDOOR UNIT

DC09RQ.NSJ / DC12RQ.NSJ / PC09SQ.NSJ  
/ PC12SQ.NSJ / S09EQ.NSJ / S12EQ.NSJ

(Unit : mm)

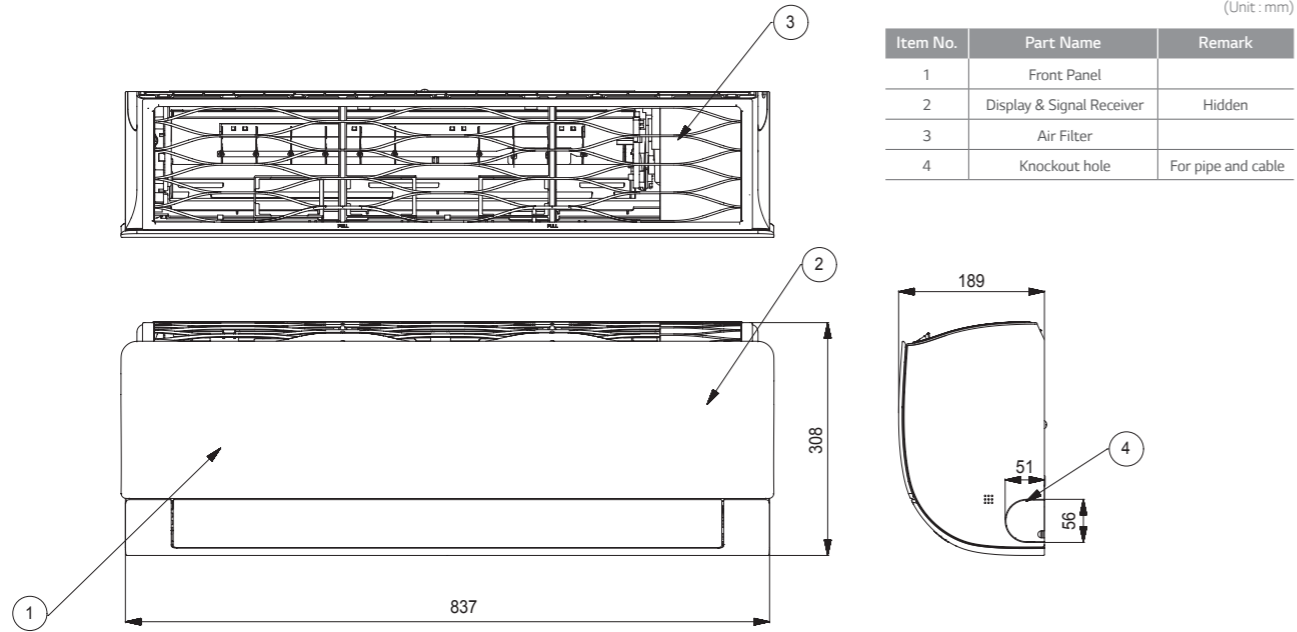


Item No.	Part Name	Remark
1	Front Panel	
2	Display & Signal Receiver	Hidden
3	Air Filter	
4	Knockout hole	For pipe and cable

# INDOOR UNIT

AP09RT.NSJ / AP12RT.NSJ


(Unit : mm)

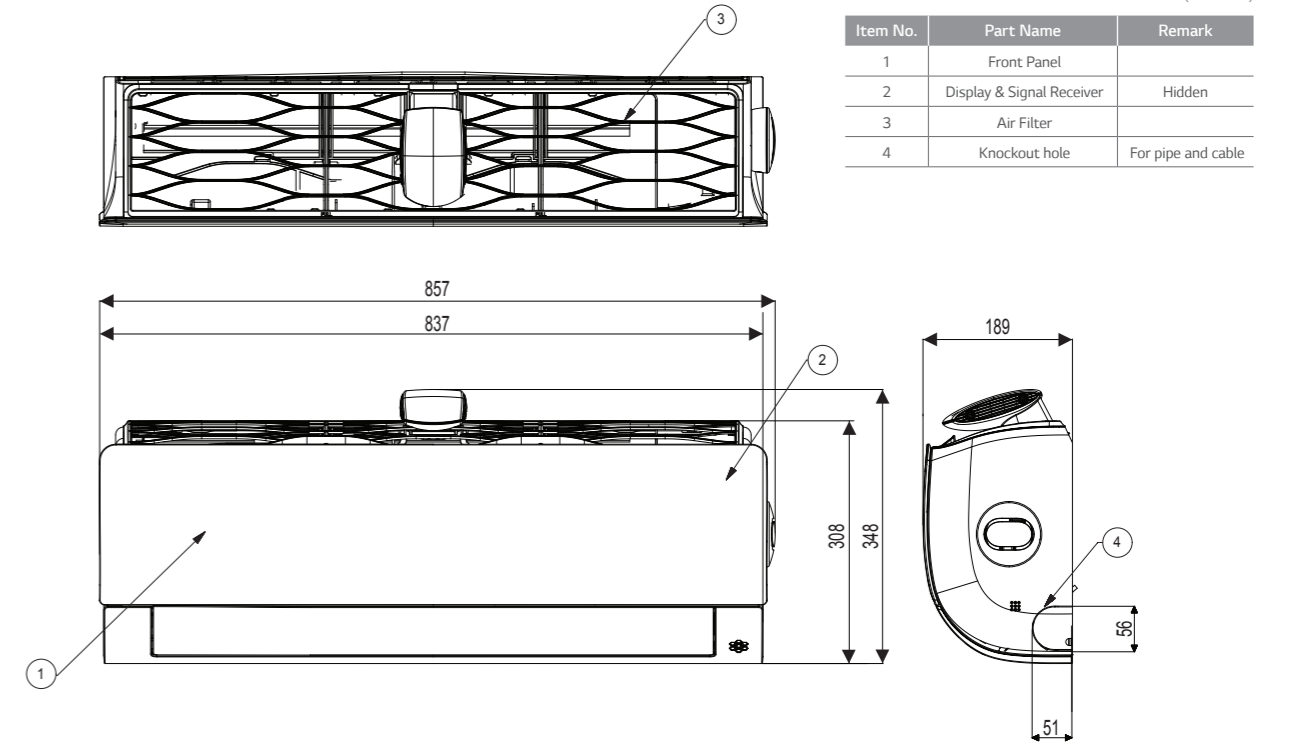

Item No.	Part Name	Remark
1	Front Panel	
2	Display & Signal Receiver	Hidden
3	Air Filter	
4	Knockout hole	For pipe and cable

DC18RQ.NSK / DC24RQ.NSK / PC18SQ.NSK / PC24SQ.NSK / S18EQ.NSK / S24EQ.NSK

(Unit : mm)

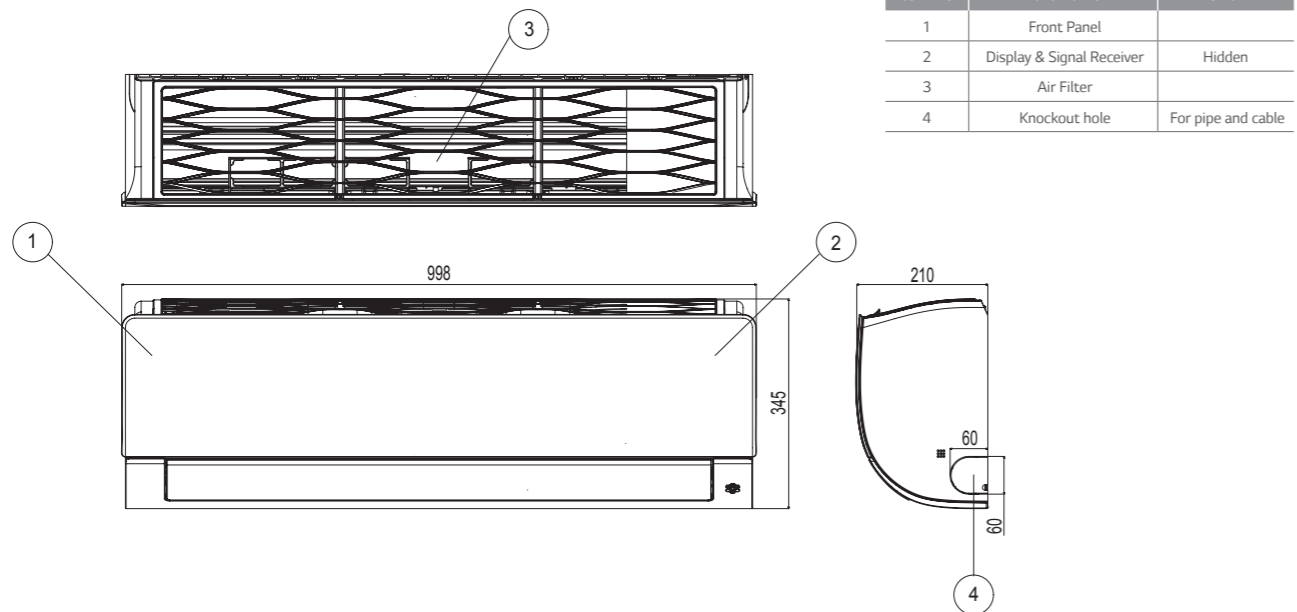


Item No.	Part Name	Remark
1	Front Panel	
2	Display & Signal Receiver	Hidden
3	Air Filter	
4	Knockout hole	For pipe and cable





# OUTDOOR UNIT

AC09BQ.UA3 / AC12BQ.UA3 / AC09SQ.UA3 / AC12SQ.UA3 /  
PC09SQ.UA3 / PC12SQ.UA3 / S09EQ.UA3 / S12EQ.UA3 / AP09RT.UA3 / AP12RT.UA3

(Unit: mm)

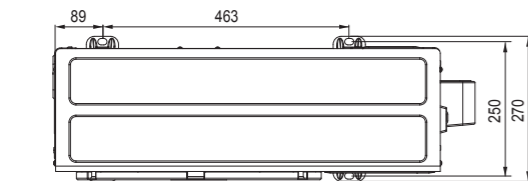


Item No.	Part Name
1	Air Outlet
2	Control Box
3	Power and Communication Cable Hole
4	Service Valve Cover
5	Gas Pipe Connection
6	Liquid Pipe Connection

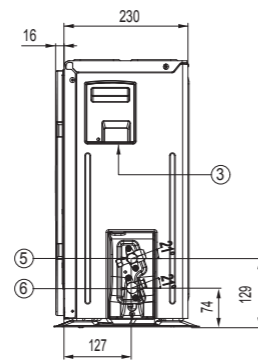
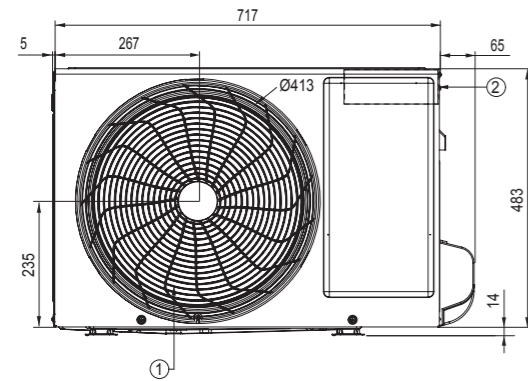


A09FT.UL2 / A12FT.UL2 / DC09RQ.UL2 / DC12RQ.UL2 / AC18BQ.UL2 / AC18SQ.UL2  
/ DC18RQ.UL2 / PC18SQ.UL2 / S18EQ.UL2

(Unit: mm)

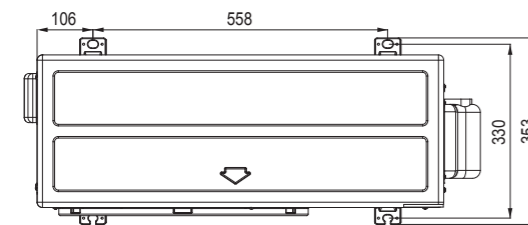


Item No.	Part Name
1	Air Outlet
2	Control Box
3	Power and Communication Cable Hole
4	Service Valve Cover
5	Gas Pipe Connection
6	Liquid Pipe Connection

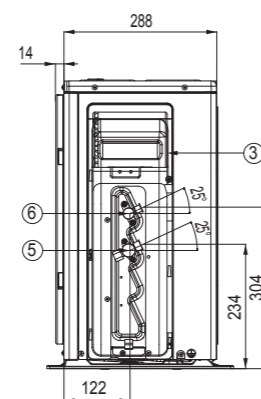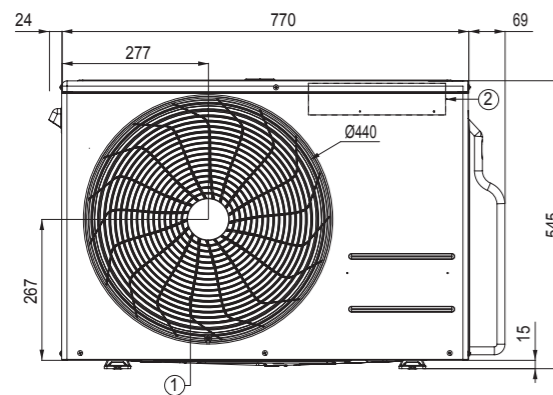



# OUTDOOR UNIT

F09MT.U24 / F12MT.U24 / AC24BQ.U24 / DC24RQ.U24 / PC24SQ.U24 / S24EQ.U24

(Unit: mm)

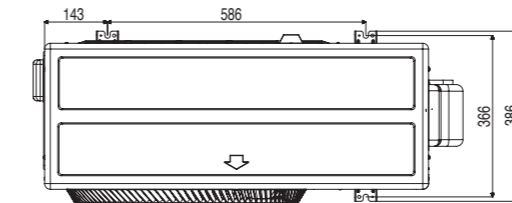

Item No.	Part Name
1	Air Outlet
2	Control Box
3	Power and Communication Cable Hole
4	Service Valve Cover
5	Gas Pipe Connection
6	Liquid Pipe Connection

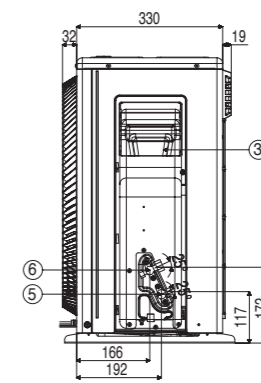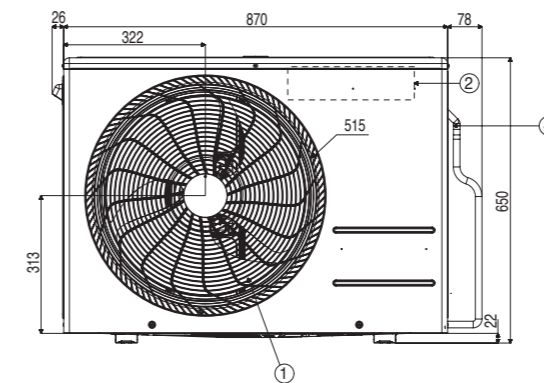

# ACCESSORIES

	ARTCOOL GALLERY	ARTCOOL	ATHENA EXTREME	PURE / DELUXE	SIRIUS	STANDARD
Wired Remote Controller	5k				Y	
	7k		Y		Y	-
	9k	-	Y	Y	Y	-
	12k	-	Y	Y	Y	-
	15k					Y
	18k		Y		Y	Y
PI 485	5k				-	
	7k		-		Y*	-
	9k	Y	-	-	Y*	-
	12k	Y	-	-	Y*	-
	15k					-
	18k		-		Y*	-
Dry Contact	5k				Y	
	7k		Y		Y	-
	9k	Y	Y	Y	Y	-
	12k	Y	Y	Y	Y	-
	15k					Y
	18k		Y		Y	Y
24k		Y		Y	Y	

\* Y: Available  
 \* When connected to Multi 14k & 16k Outdoor units, this may not be supported.


## Standard Wired Remote Control



MODEL NAME	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On/Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	
Auto Swing / Vane Control	-	-
Reservation	Simple / Sleep / On, Off / Weekly / Holiday	
Time Display	-	-
Electrical Failure Compensation	-	-
Child Lock	-	-
Operation Status LED	-	-
Indoor Temperature Display	-	-
Wireless Remote Controller Receiver	-	-
Size (WxHxD, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	-	-
Display AirQuality Status	-	-

\* Refer to each model PDB for applicable models.

## PI 485



PMNFP14A1

Power : Single phase AC 220V 50/60Hz  
 Max. no of the indoor units that can be connected: 64 UNITS  
 Model applied : RAC / Multi / Single / Therma V  
 \* Refer to each product PDB for applicable models

# ACCESSORIES

## Dry Contact



\* Refer to each product PDB for applicable models

MODEL	PDRYCB000	PDRYCB400	PDRYCB300	PDRYCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12 V from indoor unit PDB
Voltage / Non Voltage Input		•	•	
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	•
Fan Speed Setting		•	•	•
Thermo Off		•	•	
Energy Saving		•		
Temperature Setting		•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

## Remote Control



Prestige  
 Artcool  
 Deluxe, Deluxe2,  
 Standard Plus  
 Standard, Standard2, Standard3

BUTTON	DISPLAYSCREEN	DESCRIPTION
	-	To turn On / Off the air conditioner.
	88°	To adjust the desired room temperature in cooling, heating or auto changeover mode.
COMFORT AIR	-	To adjust the air flow to deflect wind.
LIGHT OFF	-	To set the brightness of the display on the indoor unit.
MODE		To select the cooling mode.
		To select the heating mode.
		To select the dehumidification mode.
		To select the fan mode.
FAN SPEED		To select the auto changeover / auto operation mode.
		To adjust the fan speed.
ENERGY CTRL.	-	To bring the effect of the power saving.
JET MODE		To change room temperature quickly.
		To adjust the air flow direction vertically or horizontally.
ROOM TEMP		To display the room temperature.
°C ↔ °F[5sec]		To change unit between °C and °F.
SET/ CANCEL	-	To set / cancel the functions and timer.
	-	To adjust time.
	-	To turn on / off air conditioner automatically.
	-	To cancel the timer settings.

# MULTI SPLIT



# LINE - UP

## R32 INDOOR / OUTDOOR UNIT

○ Single Only ○● Compatible ● Multi Only

KBTU/H		5	7	9	12	15	18	24
KW		1.5	2.1	2.6	3.5	4.2	5.3	7.0
Wall Mounted Unit	ARTCOOL Gallery			●	●			
	ARTCOOL Mirror		●	○●	○●		○●	○●
	ARTCOOL Silver			○●	○●		○●	
	Pure (with Air Purification)			●●	●●			
	Deluxe		●	○●	○●		○●	○●
	Sirius	●	●	○●	○●	●	○●	○●
		●	●	○●	○●	●	○●	○●
Ceiling Mounted Cassette	1 Way Cassette			●	●			
	4 Way Cassette	●	●	○●	○●		○●	○●
Ceiling Concealed Duct	Mid / High Static Pressure						○●	○●
	Low Static Pressure			○●	○●		○●	○●

KBTU/H	14	16	18	21	24	27	30
KW	4.1	4.7	5.3	6.2	7.0	7.9	8.8
Multi							

## R410A INDOOR / OUTDOOR UNIT

KBTU/H		5	7	9	12	15	18	24
KW		1.5	2.1	2.6	3.5	4.2	5.3	7.0
Ceiling & Floor Convertible				●	●			
Console				●	●		●	

KBTU/H	40	48	56
KW	11.7	14.1	16.4
Multi Piping			
Multi Distribution Box			

# FEATURE OVERVIEW

Refrigerant	R32							R410A			
	MULTI PIPING							DB BOX TYPE			
Type	14	16	18	21	24	27	30	40	40	48	56
kBtu/h											
kW											

BLDC Comp. & Fan Motor	●	●	●	●	●	●	●	●	●	●	●
Eurovent Certification	●	●	●	●	●	●	●	●	●	●	●
Variable Voltage Control			●	●	●	●	●	●	●	●	●
Wide Louver Plus Fin	●	●	●	●	●	●	●	●	●	●	●
Optimized Heat Exchanger Path	●	●	●	●	●	●	●	●	●	●	●
Power Saving Start up			●	●	●	●	●	●	●	●	●
Peak Current Control	●	●	●	●	●	●	●	●	●	●	●
Standby Mode	●	●	●	●	●	●	●	●	●	●	●
Mode Lock	●	●	●	●	●	●	●	●	●	●	●
R1 Compressor								●	●	●	●
Twin Rotary Compressor	●	●	●	●	●	●	●				
Smart Sensor Pressure Control			●	●	●	●	●	●	●	●	●
Black Fin Heat Exchanger	●	●	●	●	●	●	●	●	●	●	●
Fast Cooling & Heating			●	●	●	●	●	●	●	●	●
Night Silent Operation	●	●	●	●	●	●	●	●	●	●	●
Wiring Error Check	●	●	●	●	●	●	●	●	●	●	●
LG MV	●	●	●	●	●	●	●	●	●	●	●
PI-485 Connection			●	●	●	●	●	●	●	●	●
Forced Cooling Operation	●	●	●	●	●	●	●	●	●	●	●

## KEY FEATURES

### PERFECT SOLUTION FOR MULTIPLE ROOMS



**Energy Efficiency | Extreme Durability | Comfort and Convenience**

LG's Multi Split system provides powerful, efficient cooling and heating with two, three, four, or up to nine indoor units operating from a single outdoor unit.

LG's advanced inverter technology offers powerful performance while consuming less energy and floor space than that of individual single split systems.



# ENERGY EFFICIENCY

## ENERGY EFFICIENCY A+++ / A+

The advanced technologies of LG achieve the lowest energy consumption, especially SEER value regarding ErP regulation.

World Class High Efficiency

SEER 8.5

### SEER / SCOP class (ErP regulation)

kW	4.1	4.7	5.3	6.2	7.0	7.9	8.8
SEER	8.5	7.8	8.5	8.5	8.0	8.0	8.2
	A+++	A++	A+++	A+++	A++	A++	A+
SCOP	4.2	4.2	4.4	4.4	4.4	4.2	4.2
	A+	A+	A+	A+	A+	A+	A+


- BLDC Inverter Twin Rotary Compressor
- Enhanced Heat Exchanger
- Smart Load Control
- Peak current control




## Powerful Brushless Direct Current Motor (BLDC) Compressor

LG air conditioners are equipped with a BLDC Inverter Twin Rotary Compressor that uses a neodymium magnetic core. The compressor has high efficiency and superior reliability, because it is excellent in controlling the operating speed depending on the load. With improved efficiency as compared to standard AC inverter products, this compressor is optimized for outdoor load changes and seasonal efficiency.

### • Operation Range

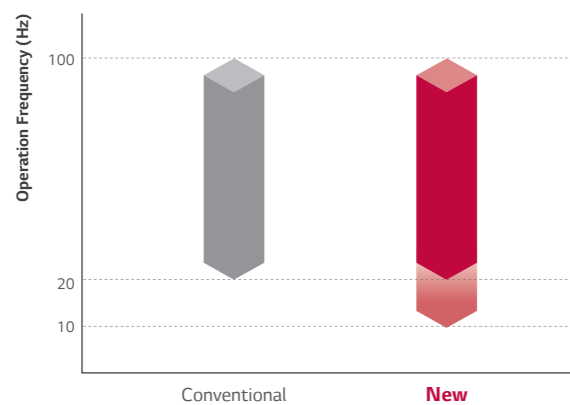

### • Motor Efficiency

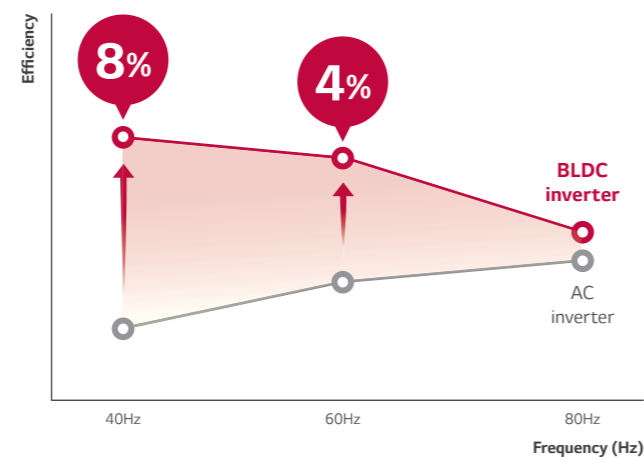



# ENERGY EFFICIENCY

## Enhanced Heat Exchange

Wide Louver Plus fin technology increases 11% of full load heating performance and 6% of COP compared to conventional fin. It can slow down frosting of heat exchanger and postpone the start of defrosting operation.

### • Heating Operation at Defrost Condition

It can slow down frosting of heat exchanger and postpone the start of defrosting operation

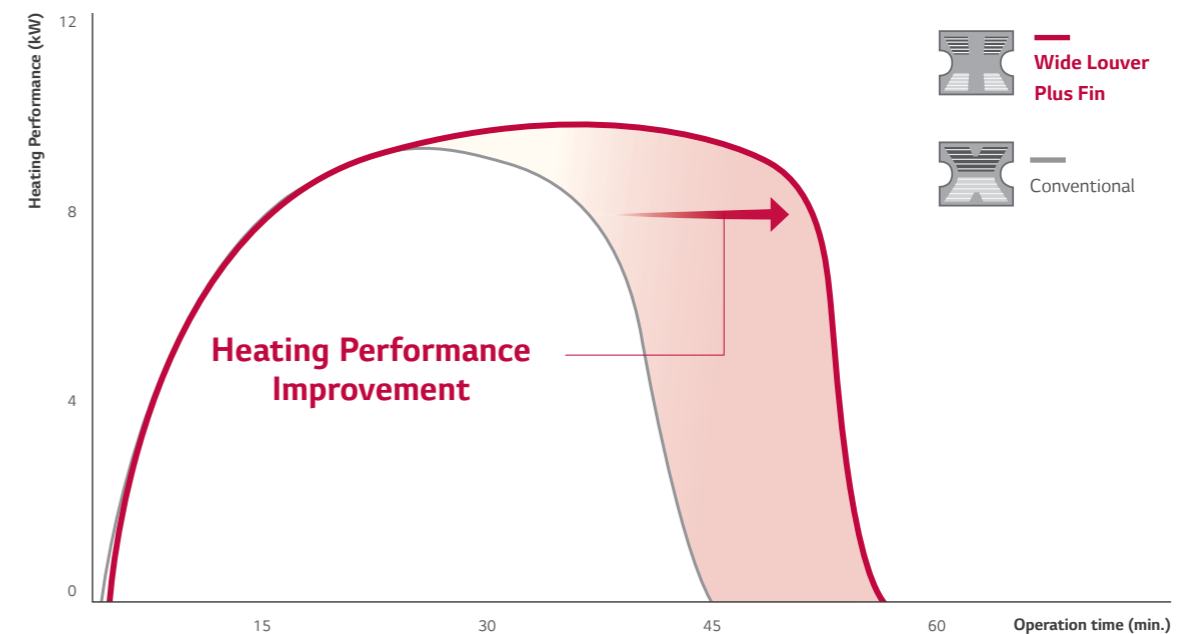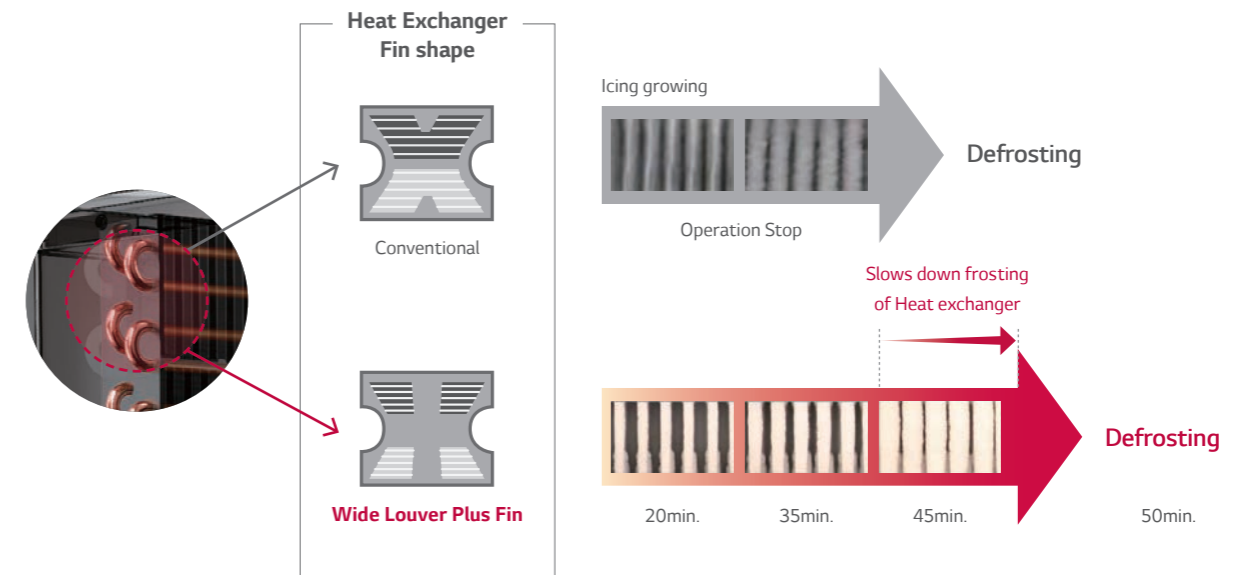


\* LG Internal test data

# ENERGY EFFICIENCY


## Power Saving Start Up

LG commercial air conditioners will automatically alter the temperature of discharge air by controlling their refrigerant temperature based on the difference between the indoor temperature and the target indoor temperature. During cooling operation, evaporating temperature will increase if the temperature difference reduces. This allows for enhanced comfort and reduced energy consumption.

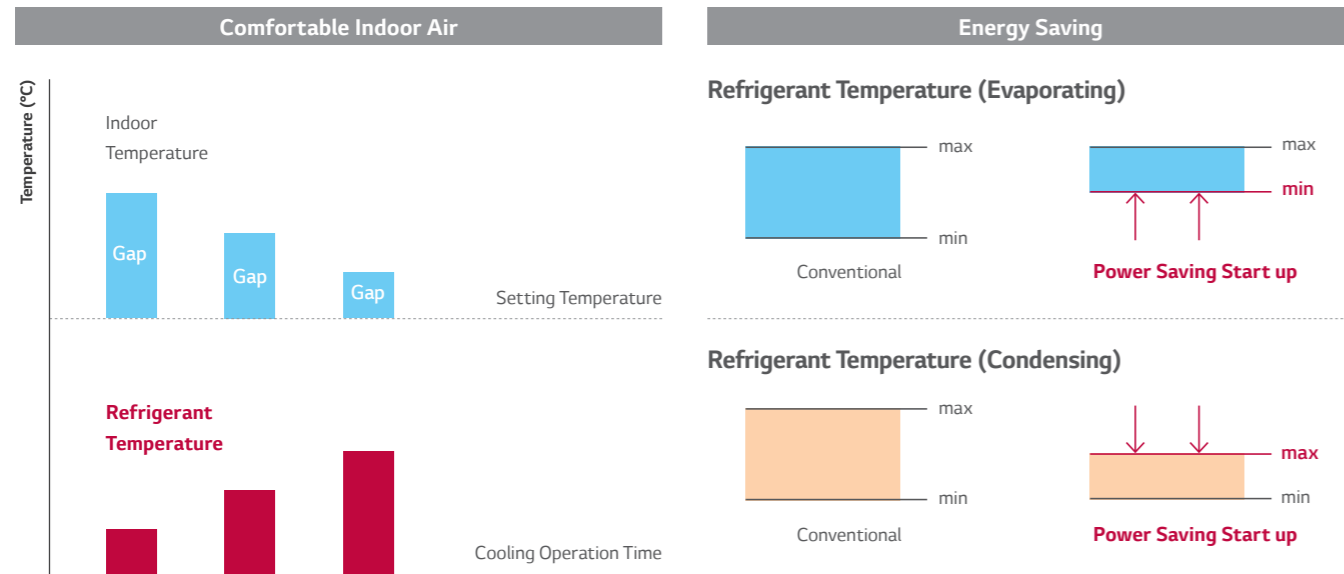

## Mode Lock

Set the operation mode to either cooling-only or heating-only; either by adjusting the wired remote controller or setting the DIP switch to avoid combined use of cooling and heating. (Some models need wired remote controller for mode lock function according to feature overview table)

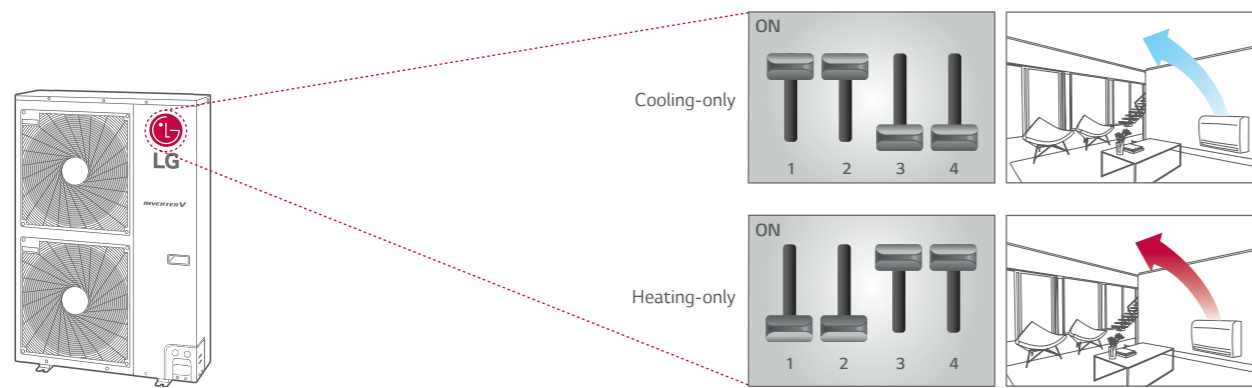

# ENERGY EFFICIENCY


## Peak Current Control

The peak current control function keeps the air conditioner from running at the maximum level while maintaining current system setting, in order to reduce energy consumption. This function allows for reduced energy costs during the peak energy use periods when energy fees are higher.

### • How to set dip switch

#### STEP 1



Max power consumption : 1.9 kW

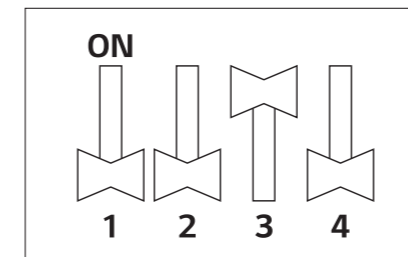

\* Full Load consumption : 2.5kW  
 \* 7.0kW model  
 \* LG Internal test result

#### STEP 2

Max power consumption : 1.7 kW

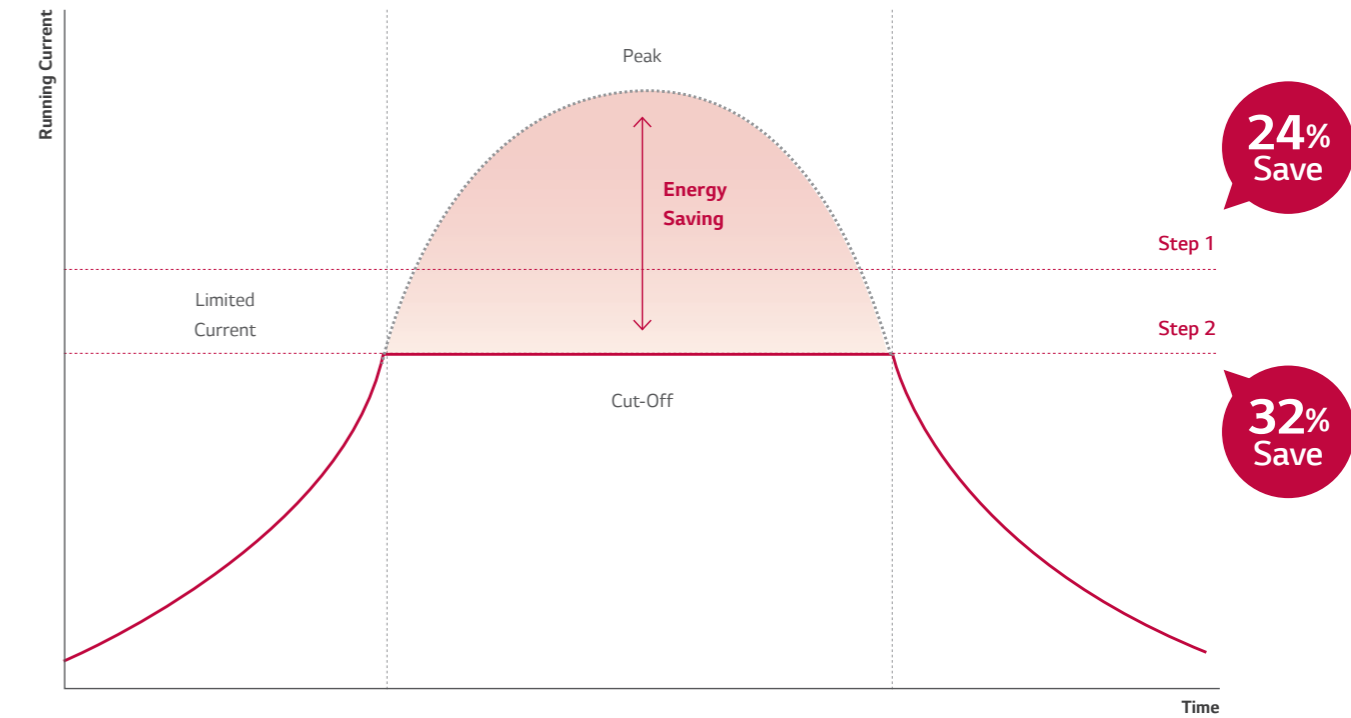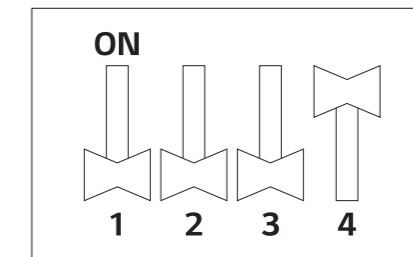

\* When using Peak current control, the cooling capacity may not be sufficient.  
 \* 7.0kW model  
 \* LG Internal test result

# EXTREME DURABILITY

Product durability is attested by a 10-year compressor warranty.



**INVERTER COMPRESSOR**

**10 YEAR WARRANTY**

## Product Safety & Durability Reassured

- Improved BLDC Inverter Twin Rotary compressor
- Smart Sensor
- Black Fin Heat Exchanger

## Improved BLDC Inverter Twin Rotary Compressor


Parts of BLDC Inverter Twin Rotary Compressor have been improved to allow a longer life span.

### Flow Optimization

Reduced oil inflow by increasing the length of oil discharge pipe, leading to a sufficient oil quantity inside compressor hence preventing compressor abrasion.

### Concentrated Winding Motor

- Oil path area is improved by over 50% by increasing the extra stator cavity.
- Due to this, caloric value of motor is reduced, improving the cooling function of stator coil.

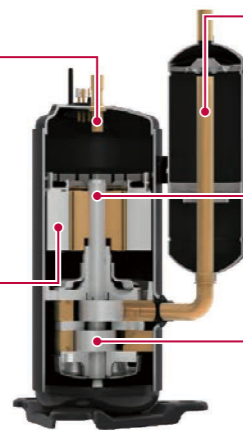

**Twin Rotary Inverter Compressor**

### Suction Optimization

Reduced suction loss and improving oil collection through the optimization of suction path.

### Surface Coating

Shaft coating and polishing has been improved.

### Twin Rotary Rotor


- Upper and lower part rotor offset imbalance in shaft rotor rotation.
- Max Torque has been decreased by 45% compared to single rotor.
- Vibration and noise is also reduced.

# EXTREME DURABILITY


## Pressure Control Technology by Smart Sensor

Quicker and more reliable operation made possible by pressure control technology.

### • Field Failure Rate of Outdoor Unit

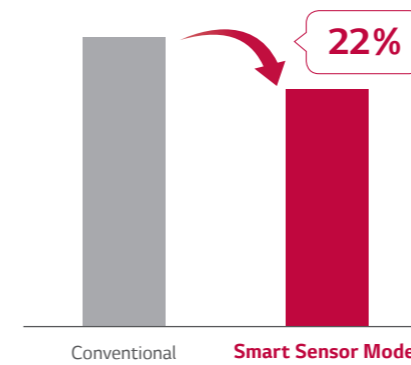


\* LG Internal result  
\* FFR Period : 2 years before / after applying pressure sensor

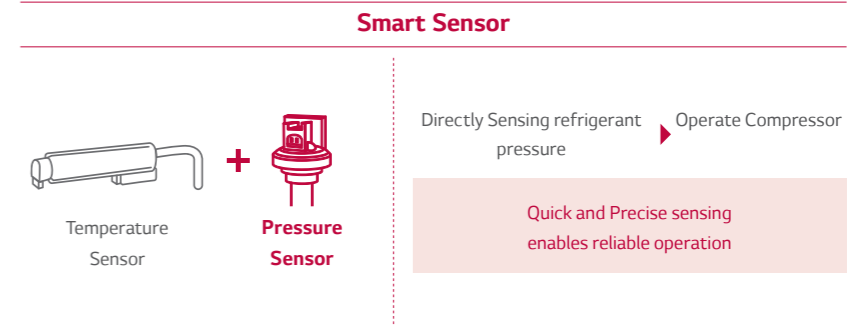

## Black Fin Heat Exchanger

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution including fumes from factories. Moreover, the hydrophilic film keeps water from accumulating on the heat exchanger's fin, minimizing moisture buildup and eventually making it even more corrosion resistant.

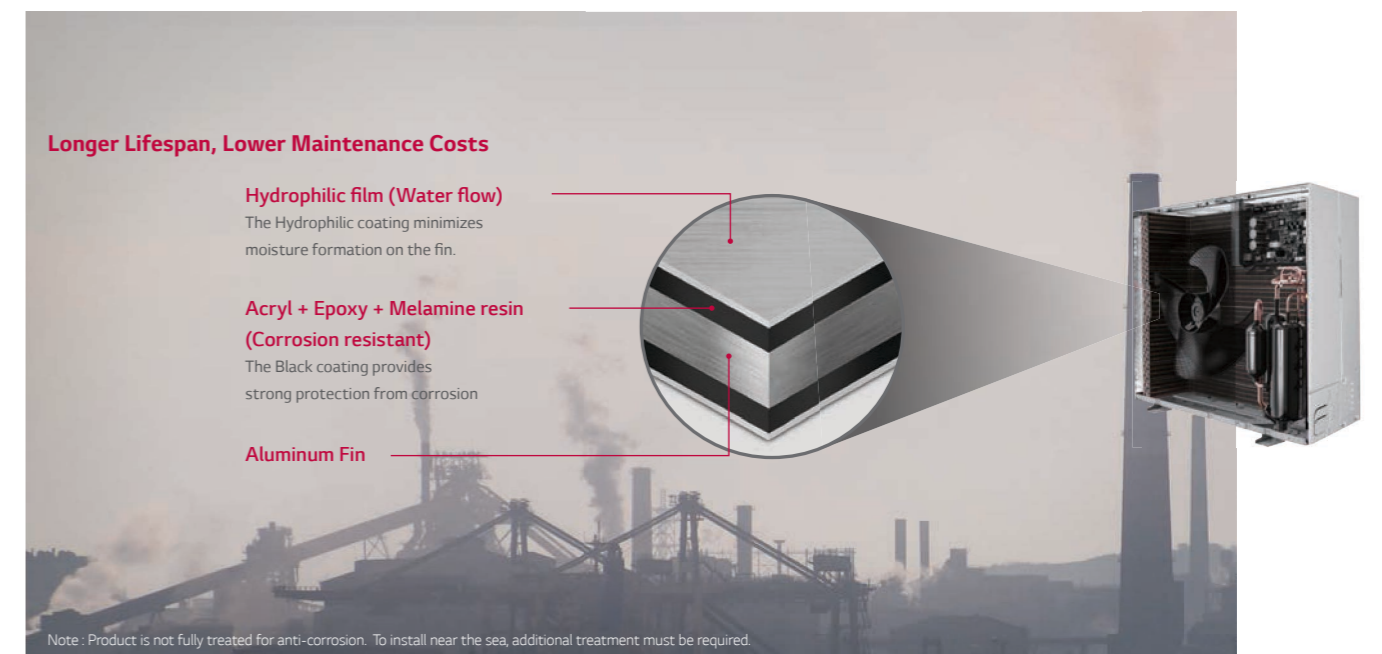

### Longer Lifespan, Lower Maintenance Costs

#### Hydrophilic film (Water flow)

The Hydrophilic coating minimizes moisture formation on the fin.

#### Acryl + Epoxy + Melamine resin (Corrosion resistant)

The Black coating provides strong protection from corrosion

#### Aluminum Fin

Note : Product is not fully treated for anti-corrosion. To install near the sea, additional treatment must be required.



# EXTREME DURABILITY

## R1 Compressor

**Shaft-through Structure & Support both ends of shaft**

- Solid compressor operation assuring higher durability

**Extended Operation Range (max 150Hz)**

- Higher Heating Performance

**Centrifugal oil return & Oil separating guide for oil discharge reduction**

- Higher Energy Efficiency (\*SEER 20%  $\square$ )

**Bottom Compression & Simple Structure**

- Lower Noise & Vibration (\*\*max 4dB(A)  $\square$ )
- Less Weight (\*\*20%  $\square$ )
- Superior Reliability

R1 Compressor™

\* LG Internal test result, Based on single split 10 kW Cassette  
 \*\* LG Internal test result, Based on conventional compressor (Rotary type GPT442M)  
 ※ R1 Compressor application  
 Model : 40-56k (7 models)


# EXTREME DURABILITY

## Revolutionary Scroll Compressor

Revolutionary Scroll Compressor is applied for high-efficiency and reliability. This type of compressor is more advanced compared to the conventional one. especially tilting motion of scroll has been improved. Further, the operation range is improved compared to the conventional type.


- Scroll compressor with simple structure
- High efficiency (low load at low speed / total efficiency)
- Low noise (high speed possible)
- Improved Tilting Motion of scroll
- 20% weight reduction (vs. conventional compressor)

※ Applied Model : 40-56k (7 models)

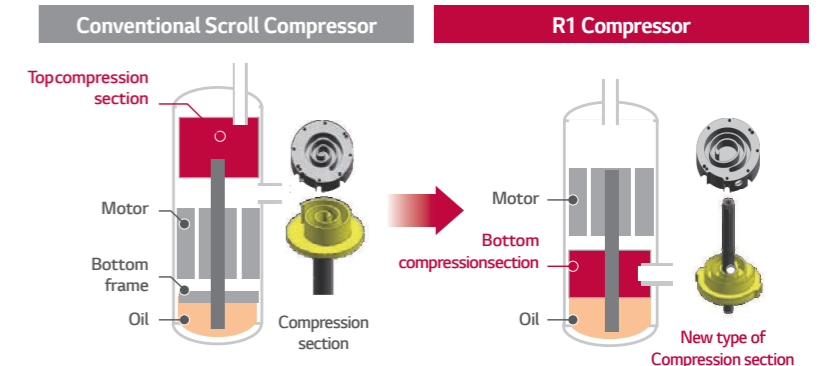


### • Seasonal energy efficiency

SEER 20%, SCOP 13% improvement (vs. rotary)  
 ※ Multi 40k

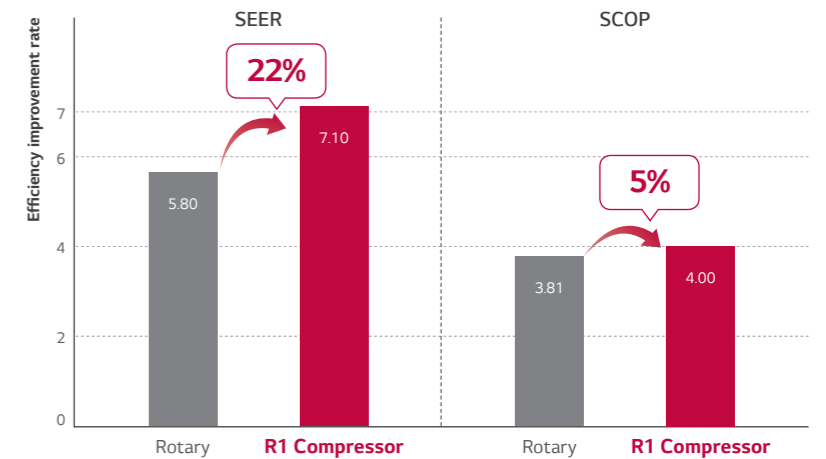

### • Wide Operation Range

- Optimized for various cooling & heat load operation
- World best compressor speed (up to 150 Hz)
- Optimized for even low load operation (down to 10 Hz)  
 (Efficiency increases / Improved comfort)

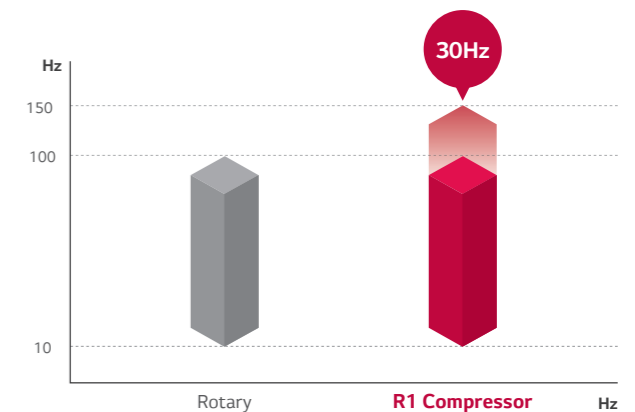

## COMFORT AND CONVENIENCE

LG air conditioners are designed to provide users with maximum levels of comfort and professionals with easy, efficient installation capabilities.




- Fast cooling and heating
- Night Silent operation
- Easy installation and maintenance

## Fast Cooling & Heating


Pressure control takes less time to reach the desired temperature up to 30% in cooling and 44% in heating with high level of accuracy and stability.

### • Cooling

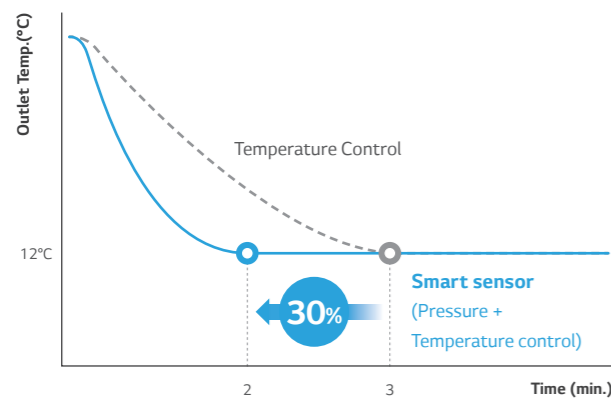

\* LG Internal test result


### • Heating

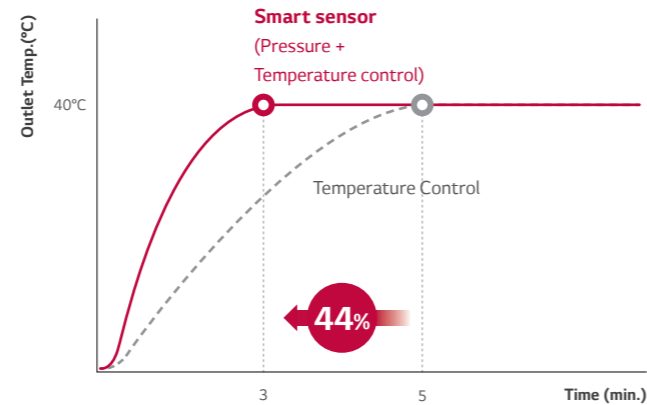

## COMFORT AND CONVENIENCE

### Night Silent Operation


Night Silent Operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit.

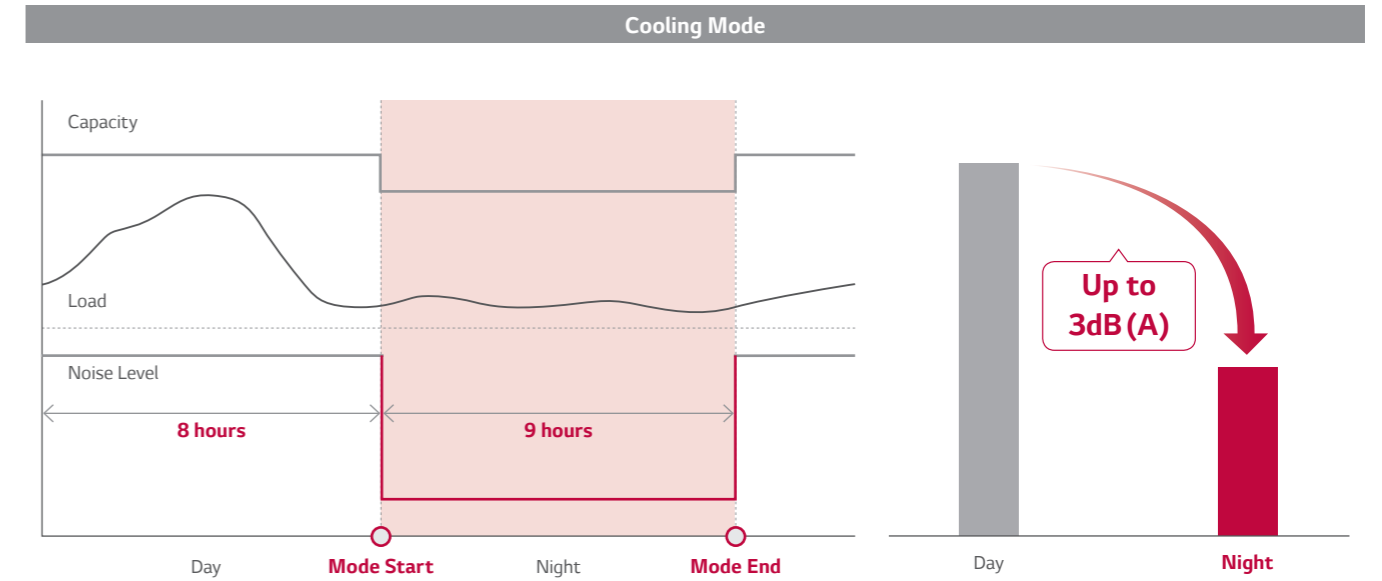

\* This function is only available for Cooling Mode.  
\* If you want to stop the Night Quiet Mode, Change the Dip Switch.

## Wiring Error Check


Installers can check whether the transmission cable has been connected correctly by using the wiring error check function. The wiring error check function can reduce the time taken to check for transmission cable errors.

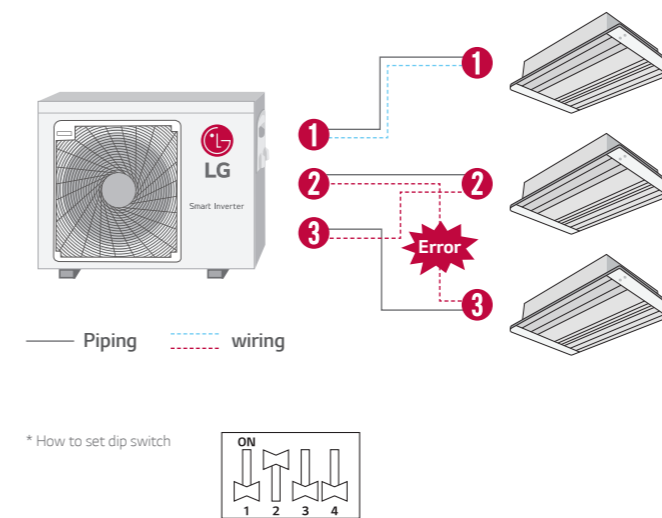

### • LED Result

- If the wiring is correct, the Green LED will light up.
- If the wiring is wrong, display as below
  - Red LED : Piping Number
  - Green LED : Wiring Number (Room)



Ex) If the Red LED blinks twice and the Green LED blinks 3 times, 2nd pipe is connected to 3rd room

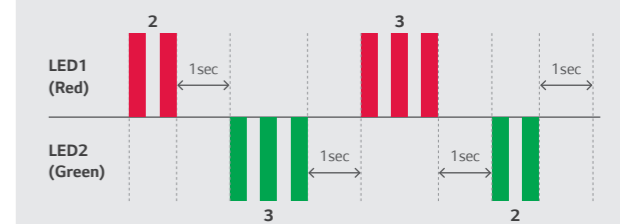

# QUIET OPERATION

## Advanced Grille & Fan



The improved grille shape design on the outdoor unit helps to distribute air more efficiently which improves heat exchange and reduces the noise level. The new axial Fan has a thick front edge and a smooth rear edge, thus providing not only high efficiency, low noise, wide fan, but also improving the air flow rate.

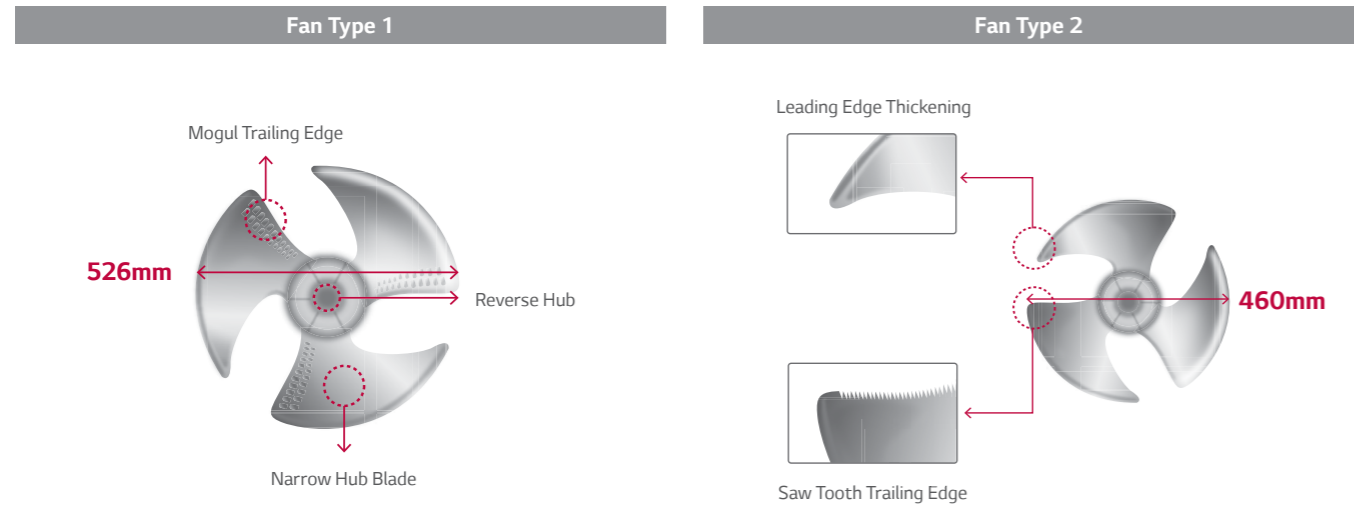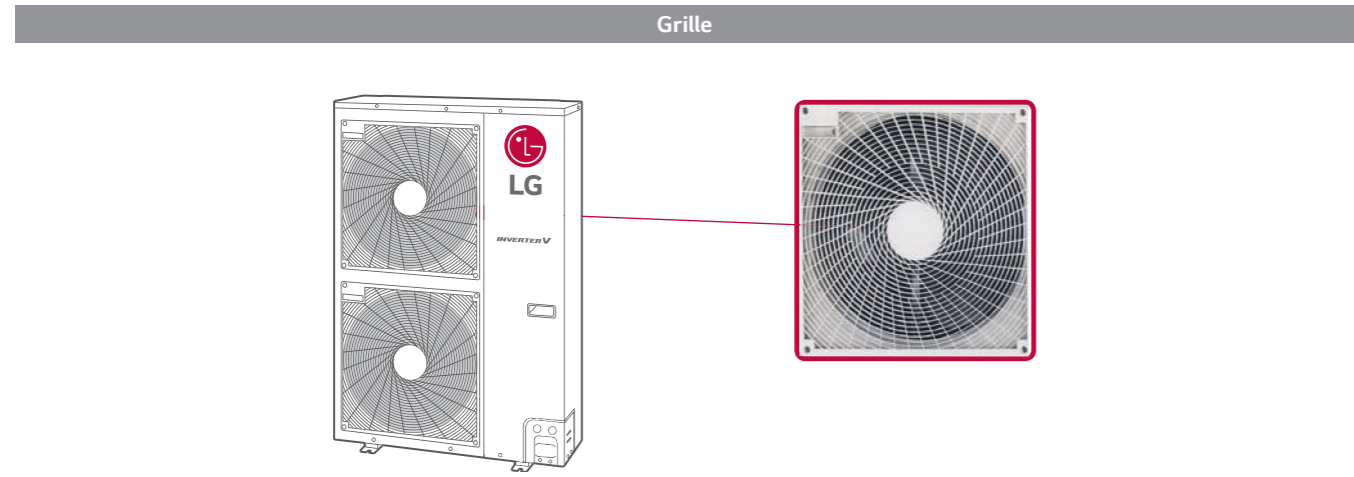

# COMFORT AND CONVENIENCE


## LG MV (Monitoring View)

LG MV helps engineers to inspect and monitor air conditioning units easily.

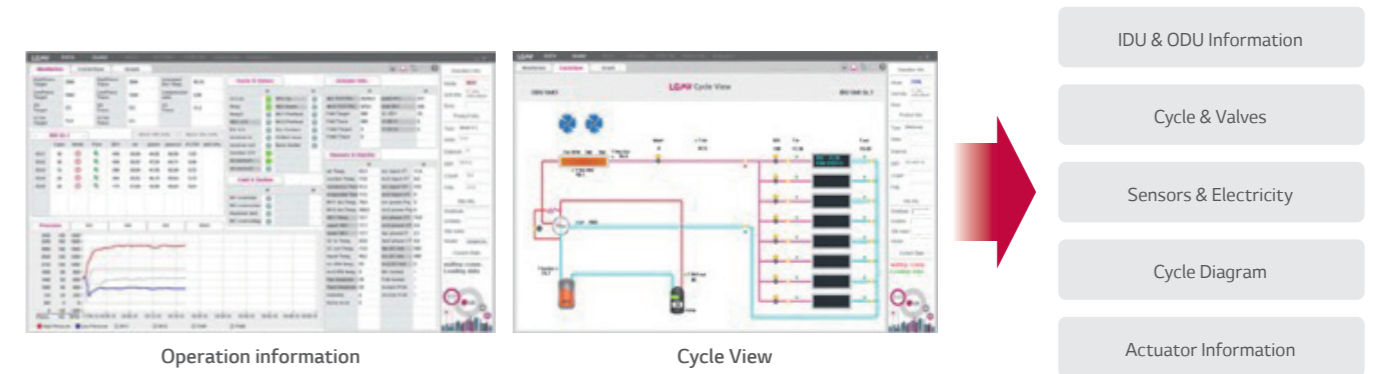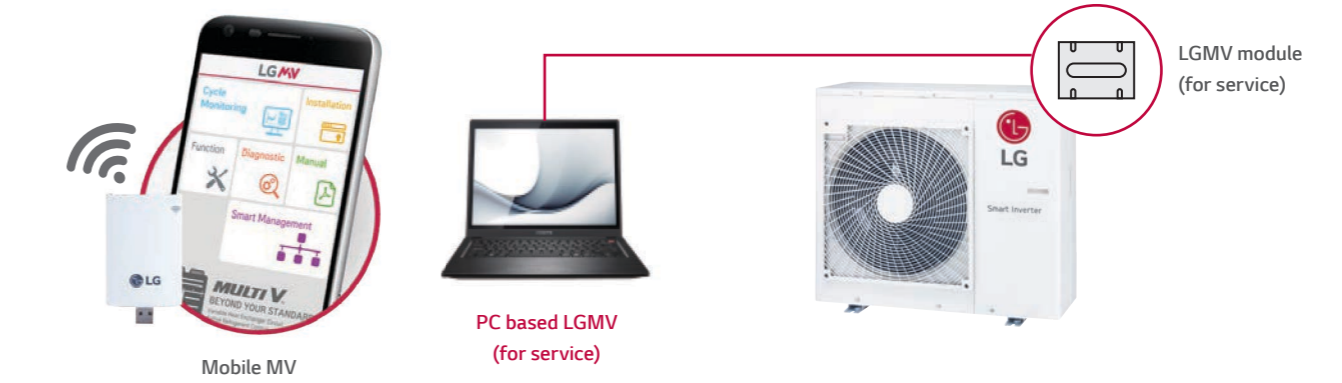

## Forced Cooling Operation

The forced cooling operation allows refrigerant to be recharged or pumped down, regardless of the indoor temperature. More importantly this function can be used when indoor units are being moved or repaired.

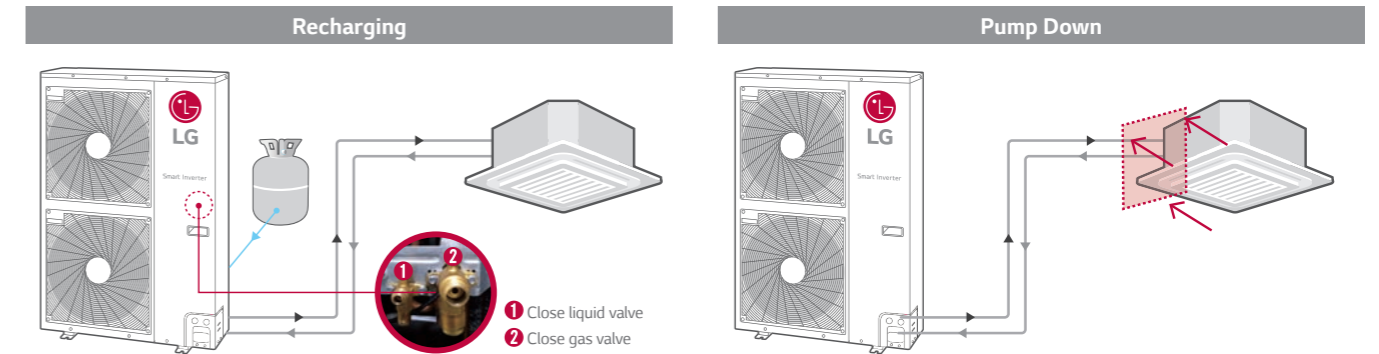

# R32 MULTI SPLIT



R32 MULTI SPLIT

## OUTDOOR UNITS



RESIDENTIAL




MULTI SPLIT

MU2R15  
MU2R17

(Unit: mm)



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: [www.eurovent-certification.com](http://www.eurovent-certification.com)



OUTDOOR UNIT				MU2R15.ULO	MU2R17.ULO
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	0.9 / 4.1 / 4.7	0.9 / 4.7 / 5.4
	Heating	Min / Nom / Max	kW	1.0 / 4.7 / 5.4	1.0 / 5.3 / 5.7
Low Temperature Capacity	Heating -7°C	Max	kW	3.3	3.7
Power Input *	Cooling	Min / Nom / Max	kW	0.2 / 1.0 / 1.4	0.2 / 1.3 / 1.7
	Heating	Min / Nom / Max	kW	0.2 / 1.1 / 1.4	0.2 / 1.3 / 1.6
Running Current	Cooling	Min / Nom / Max	A	1.1 / 4.6 / 6.4	1.1 / 5.6 / 7.9
	Heating	Min / Nom / Max	A	1.1 / 4.9 / 6.6	1.1 / 5.5 / 7.6
EER				4.14	3.75
COP				4.38	4.22
SEER				8.50	7.80
SCOP				4.20	4.20
Pdesign (@-10°C)			kW	4.10	4.10
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)			A+++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating			169 / 1,367	210 / 1,367
Airflow Rate	Nom		m <sup>3</sup> /min	28.2	28.2
Sound Pressure	Cooling	Nom	dB(A)	48	48
	Heating	Nom	dB(A)	51	51
Sound Power	Cooling	Max	dB(A)	61	63
Dimensions	W x H x D		mm	770 x 545 x 288	770 x 545 x 288
Net Weight			Kg	36	36
Refrigerant	Type			R32	R32
	Charge		Kg	1.1	1.1
	Additional Charge		g/m	20	20
	GWP			675	675
	t-CO <sub>2</sub> eq			0.74	0.74
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-10 / 48	-10 / 48
	Heating	Min / Max	°C WB	-18 / 18	-18 / 18
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50
Power Supply Cable			No. x mm <sup>2</sup>	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm <sup>2</sup>	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	15
Piping Length Total			m	30	30
Piping Length per Branch		Max	m	20	20
	IDU - ODU	Max	m	15	15
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5
Piping Connection	Liquid		mm(inch) x No.	Ø6.35 (1/4) x 2	Ø6.35 (1/4) x 2
	Gas		mm(inch) x No.	Ø9.52 (3/8) x 2	Ø9.52 (3/8) x 2

Notes:

1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \*: See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected


5. Minimum combination ratio should be more than 40%.

6. This product contains fluorinated greenhouse gases (R32)

# OUTDOOR UNITS



MU3R19  
MU3R21  
MU4R25

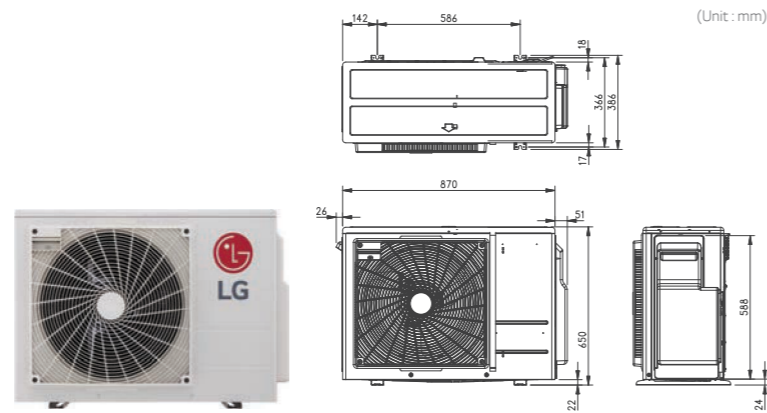

OUTDOOR UNIT				MU3R19.U21	MU3R21.U21	MU4R25.U21	
Compressor	Type	Twin Rotary			Twin Rotary	Twin Rotary	
	Capacity *	Min / Nom / Max	kW	1.1 / 5.3 / 6.3	1.1 / 6.2 / 7.3	1.1 / 7.0 / 8.5	
Low Temperature Capacity	Heating -7°C	Max	kW	5.2	5.5	5.9	
	Power Input *	Min / Nom / Max	kW	0.3 / 1.1 / 2.0	0.3 / 1.4 / 2.5	0.3 / 1.8 / 2.8	
Running Current	Heating	Min / Nom / Max	kW	0.3 / 1.3 / 2.0	0.3 / 1.5 / 2.4	0.3 / 1.8 / 2.9	
	Cooling	Min / Nom / Max	A	1.3 / 5.0 / 9.2	1.3 / 6.5 / 11.1	1.3 / 8.0 / 12.6	
EER	Heating	Min / Nom / Max	A	1.3 / 5.7 / 9.2	1.3 / 6.9 / 10.8	1.3 / 8.3 / 12.9	
	Cooling	Min / Nom / Max	kW	4.75	4.28	4.00	
COP				5.00	4.60	4.40	
SEER				8.50	8.50	8.00	
SCOP				4.40	4.40	4.40	
Pdesign (@-10°C)				5.20	5.20	5.40	
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)			A+++ / A+	A+++ / A+	A++ / A+	
Annual Energy Consumption	Cooling / Heating			217 / 1,655	253 / 1,655	308 / 1,718	
Airflow Rate	Nom	m <sup>3</sup> /min		50	50	50	
Sound Pressure	Cooling	Nom	dB(A)	48	49	50	
	Heating	Nom	dB(A)	53	54	54	
Sound Power	Cooling	Max	dB(A)	63	64	66	
Dimensions	W x H x D			870 x 650 x 330	870 x 650 x 330	870 x 650 x 330	
Net Weight				46	46	46.2	
Refrigerant	Type	R32			R32	R32	
	Charge	Kg			1.4	1.4	1.4
	Additional Charge	g/m			20	20	20
	GWP				675	675	675
	t-CO <sub>2</sub> eq				0.945	0.945	0.945
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-10 ~ 48	-10 ~ 48	-10 ~ 48	
	Heating	Min / Max	°C WB	-18 ~ 18	-18 ~ 18	-18 ~ 18	
Power Supply	V, Ø, Hz			1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Supply Cable	No. x mm <sup>2</sup>			3C x 2.5	3C x 2.5	3C x 2.5	
Transmission Cable	No. x mm <sup>2</sup>			4C x 0.75	4C x 0.75	4C x 0.75	
Circuit Breaker	A			20	20	20	
Piping Length Total	m			50	50	70	
Piping Length per Branch	Max	m		25	25	25	
	IDU - ODU	Max	m	15	15	15	
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5	7.5	
	Liquid	mm(inch) x No.		Ø 6.35 (1/4) x 3	Ø 6.35 (1/4) x 3	Ø 6.35 (1/4) x 4	
Piping Connection	Gas	mm(inch) x No.		Ø 9.52 (3/8) x 3	Ø 9.52 (3/8) x 3	Ø 9.52 (3/8) x 4	

※ This Product is available from Apr.2020

Notes:

1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \* : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected

5. Minimum combination ratio should be more than 40%.

6. This product contains fluorinated greenhouse gases (R32)

# OUTDOOR UNITS




MU4R27  
MU5R30



LG participates in the ECP programme for EUROVENT AC program.

Check ongoing validity of certification

: [www.eurovent-certification.com](http://www.eurovent-certification.com)

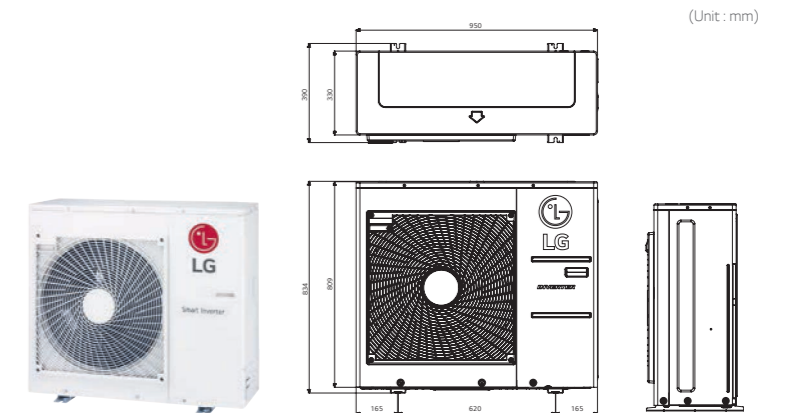

OUTDOOR UNIT				MU4R27.U40	MU5R30.U40	
Compressor	Type	Twin Rotary			Twin Rotary	
	Capacity *	Min / Nom / Max	kW	1.3 / 7.9 / 9.5	1.3 / 8.8 / 10.6	
Low Temperature Capacity	Heating -7°C	Max	kW	1.5 / 9.1 / 10.6	1.5 / 10.1 / 12.1	
	Power Input *	Min / Nom / Max	kW	0.4 / 1.8 / 2.9	0.4 / 2.0 / 3.4	
Running Current	Heating	Min / Nom / Max	kW	0.6 / 2.1 / 3.4	0.6 / 2.2 / 3.6	
	Cooling	Min / Nom / Max	A	1.9 / 8.1 / 13.1	1.9 / 9.1 / 15.2	
EER	Heating	Min / Nom / Max	A	2.8 / 9.4 / 15.3	2.8 / 9.7 / 16.3	
	Cooling	Min / Nom / Max	kW	4.39	4.40	
COP				4.39	4.70	
SEER				8.00	8.20	
SCOP				4.20	4.20	
Pdesign (@-10°C)				7.00	7.40	
Seasonal Energy Label	Cooling / Heating (A+++ to D Scale)			A++ / A+	A++ / A+	
Annual Energy Consumption	Cooling / Heating			346 / 2,333	376 / 2,467	
Airflow Rate	Nom	m <sup>3</sup> /min		60	60	
Sound Pressure	Cooling	Nom	dB(A)	50	50	
	Heating	Nom	dB(A)	54	54	
Sound Power	Cooling	Max	dB(A)	65	66	
Dimensions	W x H x D			950 x 834 x 330	950 x 834 x 330	
Net Weight				61	61	
Refrigerant	Type	R32			R32	
	Charge	Kg			2.3	2.6
	Additional Charge	g/m			20	20
	GWP				675	675
	t-CO <sub>2</sub> eq				1.55	1.76
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-10 / 48	-10 / 48	
	Heating	Min / Max	°C WB	-18 / 18	-18 / 18	
Power Supply	V, Ø, Hz			220-240, 1, 50	220-240, 1, 50	
Power Supply Cable	No. x mm <sup>2</sup>			3C x 2.5	3C x 2.5	
Transmission Cable	No. x mm <sup>2</sup>			4C x 0.75	4C x 0.75	
Circuit Breaker	A			25	25	
Piping Length Total	m			70	75	
Piping Length per Branch	Max	m		25	25	
	IDU - ODU	Max	m	15	15	
Piping Elevation Difference	IDU - IDU	Max	m	7.5	7.5	
	Liquid	mm(inch) x No.		Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 5	
Piping Connection	Gas	mm(inch) x No.		Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5	

Notes:

1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \* : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected

5. Minimum combination ratio should be more than 40%.

6. This product contains fluorinated greenhouse gases (R32)

## WALL MOUNTED UNITS



KBTU/H	5	7	9	12	15	18	24
KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Wall Mounted Unit	5	7	9	12	15	18	24
Gallery			MA09R.NF1	MA12R.NF1			
Mirror		AM07BP.NSJ	AC09BQ.NSJ	AC12BQ.NSJ		AC18BQ.NSK	AC24BQ.NSK

## ARTCOOL Gallery

				MA09R.NF1	MA12R.NF1
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9
Power Input		W x No.		40 x 1	40 x 1
Running Current		A		0.1	0.1
Power Supply		V, Ø, Hz		220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	7.7 / 5.9 / 4.4	8.9 / 7.3 / 5.6
Sound Pressure	Cooling	H / M / L	dB(A)	38 / 32 / 27	44 / 38 / 32
Sound Power	Cooling		dB(A)	52	54
Dehumidification Rate			l/h	1.2	1.4
Dimensions	Body	W x H x D	mm	600 x 600 x 145	600 x 600 x 145
Net Weight	Body		kg	15.0	15.0
Piping Connections	Liquid		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)

## ARTCOOL Mirror

				AM07BP.NSJ	AC09BQ.NSJ	AC12BQ.NSJ	AC18BQ.NSK	AC24BQ.NSK
Capacity	Cooling / Heating	Nom	kW	2.1 / 2.3	2.5 / 3.2	3.5 / 3.8	5.0 / 5.8	6.6 / 7.5
Power Input		Nom	W	17	18	19	39	45
Running Current		Nom	A	0.14	0.16	0.17	0.28	0.33
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	8.6 / 7.2 / 5.6	9.2 / 7.4 / 5.6	9.6 / 8.1 / 5.6	14.2 / 11.3 / 9.9	15.2 / 12.7 / 10.2
Sound Pressure	Cooling	H / M / L	dB(A)	35 / 32 / 27	36 / 33 / 27	40 / 35 / 27	44 / 38 / 35	46 / 41 / 36
Sound Power	Cooling		dB(A)	57	57	57	59	65
Dehumidification Rate			l/h	0.9	1.1	1.2	1.9	2.6
Dimension	Body	W x H x D	mm	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192	998 x 345 x 212	998 x 345 x 212
Net weight	Body		kg	9.1	9.9	9.9	13.2	11.6
Piping Connection	Liquid		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 12.7 (1/2)

\* This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

## WALL MOUNTED UNITS



KBTU/H	5	7	9	12	15	18	24
KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Wall Mounted Unit	5	7	9	12	15	18	24
Silver			AC09SQ.NSJ	AC12SQ.NSJ		AC18SQ.NSK	
Pure (with Air Purification)			AP09RT.NSJ	AP12RT.NSJ			

## ARTCOOL Silver

				AC09SQ.NSJ	AC12SQ.NSJ	AC18SQ.NSK
Capacity	Cooling / Heating	Nom	kW	2.5 / 3.2	3.5 / 3.8	5.0 / 5.8
Power Input		Nom	W	18	19	39
Running Current		Nom	A	0.16	0.17	0.28
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	9.2 / 7.4 / 5.6	9.6 / 8.1 / 5.6	14.2 / 11.3 / 9.9
Sound Pressure	Cooling	H / M / L	dB(A)	36 / 33 / 27	40 / 35 / 27	44 / 38 / 35
Sound Power	Cooling		dB(A)	57	57	59
Dehumidification Rate			l/h	1.1	1.2	1.9
Dimension	Body	W x H x D	mm	837 x 308 x 192	837 x 308 x 192	998 x 345 x 212
Net weight	Body		kg	9.9	9.9	13.2
Piping Connection	Liquid		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)

## Air - Purifying

				AP09RT.NSJ	AP12RT.NSJ
Capacity	Cooling / Heating	Nom	kW	2.5 / 3.3	3.5 / 4.0
Power Input		W x No.		21	22
Running Current		A		0.18	0.19
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	10 / 6.6 / 4.2	10 / 6.6 / 4.2
Sound Pressure	Cooling	H / M / L	dB(A)	42 / 35 / 27	42 / 35 / 27
Sound Power	Cooling		dB(A)	59	59
Dehumidification Rate			l/h	0.9	0.9
Dimensions	Body	W x H x D	mm	857 x 348 x 189	857 x 348 x 189
Net Weight	Body		kg	9.5	9.5
Piping Connections	Liquid		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)







\* This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

## WALL MOUNTED UNITS



KBTU/H	5	7	9	12	15	18	24
KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Wall Mounted Unit	Deluxe	DM07RPNSJ	DC09RQ.NSJ	DC12RQ.NSJ	DC18RQ.NSK	DC24RQ.NSK
						










## DELUXE

				DM07RP.NSJ	DC09RQ.NSJ	DC12RQ.NSJ	DC18RQ.NSK	DC24RQ.NSK
Capacity	Cooling / Heating	Nom	kW	2.1 / 2.3	2.5 / 3.2	3.5 / 4.0	5.0 / 5.8	6.6 / 7.5
Power Input		Nom	W	17	18	19	39	45
Running Current		Nom	A	0.15	0.16	0.17	0.28	0.33
Power Supply		V, $\emptyset$ , Hz		220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	7.5 / 6.1 / 4.9	7.7 / 6.4 / 5.0	8.1 / 6.7 / 5.3	14.2 / 11.3 / 9.9	15.2 / 12.7 / 10.2
Sound Pressure	Cooling	H / M / L	dB(A)	35 / 31 / 26	36 / 32 / 27	38 / 34 / 29	44 / 38 / 34	47 / 41 / 36
Sound Power	Cooling		dB(A)	56	56	56	60	64
Dehumidification Rate			l/h	0.9	1.1	1.2	1.9	2.6
Dimension		W x H x D	mm	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
Net weight			kg	8.3	8.3	8.3	12.0	12.0
Piping Connection	Liquid		mm(inch)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)
	Gas		mm(inch)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 12.7 (1/2)	$\emptyset$ 12.7 (1/2)

## WALL MOUNTED UNITS



KBTU/H	5	7	9	12	15	18	24
KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Wall Mounted Unit	Sirius	PM05SPNSJ	PM07SPNSJ	PC09SQ.NSJ	PC12SQ.NSJ	PM15SPNSJ	PC18SQ.NSK	PC24SQ.NSK
								
								

## SIRIUS

				PM05SPNSJ	PM07SPNSJ	PC09SQ.NSJ	PC12SQ.NSJ	PM15SPNSJ	PC18SQ.NSK	PC24SQ.NSK
Capacity	Cooling / Heating	Nom	kW	1.5 / 1.6	2.1 / 2.3	2.5 / 3.2	3.5 / 3.8	4.2 / 5.4	5.0 / 5.8	6.6 / 7.5
Power Input		Nom	W	16	17	18	19	21	39	45
Running Current		Nom	A	0.13	0.14	0.16	0.17	0.18	0.28	0.33
Power Supply		V, $\emptyset$ , Hz		220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	8.3 / 6.7 / 5.6	8.6 / 7.2 / 5.6	9.2 / 7.4 / 5.6	9.6 / 8.1 / 5.6	100/85/61	142/113/99	152/127/102
Sound Pressure		H / M / L	dB(A)	34 / 31 / 27	35 / 32 / 27	36 / 33 / 27	40 / 35 / 27	41 / 36 / 29	44 / 38 / 35	46 / 41 / 36
Sound Power			dB(A)	57	57	57	57	57	59	65
Dehumidification Rate			l/h	0.9	0.9	1.1	1.2	1.2	1.9	2.6
Dimension		W x H x D	mm	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
Net weight			kg	7.4	7.4	8.7	8.7	8.7	12.0	12.8
Piping Connection	Liquid		mm(inch)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)
	Gas		mm(inch)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 12.7 (1/2)	$\emptyset$ 12.7 (1/2)

				MJ05PC.NSJ	MJ07PC.NSJ	MJ09PC.NSJ	MJ12PC.NSJ	MJ15PC.NSJ	MJ18PC.NSK	MJ24PC.NSK
Capacity	Cooling / Heating	Nom	kW	1.5 / 1.6	2.1 / 2.3	2.5 / 3.2	3.5 / 3.8	4.2 / 5.4	5.0 / 5.8	6.6 / 7.5
Power Input		Nom	W	16	17	18	19	21	39	45
Running Current		Nom	A	0.13	0.14	0.16	0.17	0.18	0.28	0.33
Power Supply		V, $\emptyset$ , Hz		220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	8.3 / 6.7 / 5.6	8.6 / 7.2 / 5.6	9.2 / 7.4 / 5.6	9.6 / 8.1 / 5.6	100/85/61	142/113/99	152/127/102
Sound Pressure		H / M / L	dB(A)	34 / 31 / 27	35 / 32 / 27	36 / 33 / 27	40 / 35 / 27	41 / 36 / 29	44 / 38 / 35	46 / 41 / 36
Sound Power			dB(A)	57	57	57	57	57	59	65
Dehumidification Rate			l/h	0.9	0.9	1.1	1.2	1.2	1.9	2.6
Dimension		W x H x D	mm	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
Net weight			kg	8.7	8.7	8.7	8.7	8.7	12.0	12.8
Piping Connection	Liquid		mm(inch)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)	$\emptyset$ 6.35 (1/4)
	Gas		mm(inch)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 9.52 (3/8)	$\emptyset$ 12.7 (1/2)	$\emptyset$ 12.7 (1/2)

\* This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

## CEILING MOUNTED CASSETTE



KBTU/H	5	7	9	12	15	18	24
KW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Capacity	1 Way Cassette	5	7	9	12	15	18	24
Model	MT09R.NU1	MT11R.NU1						
Capacity <th>4 Way Cassette</th> <th>5</th> <th>7</th> <th>9</th> <th>12</th> <th>15</th> <th>18</th> <th>24</th>	4 Way Cassette	5	7	9	12	15	18	24
Model	MT06R.NR0	MT08R.NR0	CT09FN.R0	CT12FN.R0	CT18FN.Q0	CT24FN.B0		

\* Dual vane is applied to 24k (4Way cassette)

## 1Way Cassette

INDOOR				MT09R.NU1		MT11R.NU1	
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9		
Power Input		Nom	W	20	20		
Running Current		Nom	A	0.2	0.2		
Power Supply		V, Ø, Hz		220-240, 1, 50	220-240, 1, 50		
Air Flow Rate		H / M / L	m <sup>3</sup> /min	7.5 / 7.3 / 6.8	8.1 / 7.4 / 7.0		
Sound Pressure	Cooling	H / M / L	dB(A)	36 / 34 / 32	37 / 36 / 33		
Sound Power	Cooling	Max	dB(A)	54	57		
Dehumidification Rate		l/h		1.1	1.2		
Dimensions	Body	W x H x D	mm	860 x 132 x 450	860 x 132 x 450		
Net Weight	Body		kg	13.5	13.5		
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)		
	Gas		mm(inch)	Ø9.52 (3/8)	Ø9.52 (3/8)		
Decoration Panel	Model			PT-UUC1	PT-UUC1		
	Color			Morning Fog (RAL120-4)	Morning Fog (RAL120-4)		
	Dimensions	W x H x D	mm	1,100 x 34 x 500	1,100 x 34 x 500		
	Weight		kg	4.4	4.4		

## 4Way Cassette

				MT06R.NR0	MT08R.NR0	CT09FN.R0	CT12FN.R0	CT18FN.Q0	CT24FN.B0	
Capacity	Cooling / Heating	Nom	kW	1.5 / 1.6	2.1 / 2.3	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	6.7 / 7.5	
Power Input		Nom	W	20	20	20	20	40	60	
Running Current		Nom	A	0.40	0.40	0.40	0.40	0.40	0.60	
Power Supply		V, Ø, Hz		220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	
Air Flow Rate		H / M / L	m <sup>3</sup> /min	7.5 / 6.0 / 5.0	7.5 / 6.0 / 5.0	8.5 / 7.0 / 6.0	9.5 / 8.0 / 7.0	13.0 / 12.0 / 11.0	17.0 / 15.0 / 13.0	
Sound Pressure		H / M / L	dB(A)	31 / 27 / 24	31 / 27 / 24	36 / 33 / 30	38 / 35 / 32	41 / 39 / 36	38 / 36 / 34	
Sound Power			dB(A)	48	48	52	52	57	57	
Dehumidification Rate		l/h		-	-	0.9	1.4	2.0	2.7	
Dimension		W x H x D	mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840	
Net weight			kg	14.0	14.0	14.0	14.0	14.3	20.5	
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	
	Gas		mm(inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)	
Decoration Panel	Model			PT-QCHW0	PT-QCHW0	PT-QCHW0	PT-QCHW0	PT-QCHW0	PT-MCHW0	
	Color			Morning Fog (RAL 120-4)						
	Dimensions	W x H x D	mm	620 x 20 x 620	620 x 20 x 620	620 x 20 x 620	620 x 20 x 620	620 x 20 x 620	950 x 35 x 950	
	Weight		kg	3.0	3.0	3.0	3.0	3.0	6.3	

\* This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

## CEILING CONCEALED DUCT



kBtu/h	05	07	09	12	15	18	24
kW	1.5	2.1	2.6	3.5	4.2	5.3	7.0

Capacity	Mid / High Static Pressure	05	07	09	12	15	18	24
Model							CM18FN10	CM24FN10
Capacity	Low Static Pressure	05	07	09	12	15	18	24
Model				CL09FN50	CL12FN50		CL18FN60	CL24FN30

## Duct (Mid Static)

				CM18FN10		CM24FN10	
Capacity	Cooling / Heating	Nom	kW	5.3 / 5.8	7.0 / 7.7		
Power Input		Nom	W	160	180		
Running Current		Nom	A	0.90	1.00		
Power Supply		V, Ø, Hz		220-240, 1, 50	220-240, 1, 50		
Air Flow Rate		H / M / L	m <sup>3</sup> /min	16.5 / 14.5 / 13.0	18.0 / 16.5 / 14.5		
Sound Pressure		H / M / L	dB(A)	34 / 32 / 30	35 / 34 / 32		
Sound Power			dB(A)	59	60		
Dehumidification Rate		l/h		1.5	2.5		
Dimension		W x H x D	mm	900 x 270 x 700	900 x 270 x 700		
Net weight			kg	26.5	26.5		
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)		
	Gas		mm(inch)	Ø12.7 (1/2)	Ø12.7 (1/2)		
External Static Pressure	Min-Max		mmAq (Pa)	2-15 (20-147)	2-15 (20-147)		

## Duct (Low Static)

				CL09FN50	CL12FN50	CL18FN60	CL24FN30
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9	5.3 / 5.8	7.0 / 7.7
Power Input		Nom	W	100	100	140	160
Running Current		Nom	A	0.80	0.80	0.80	1.00
Power Supply		V, Ø, Hz		220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	10.0 / 8.5 / 7.0	10.0 / 8.5 / 7.0	15.0 / 12.5 / 10.0	20.0 / 16.0 / 12.0
Sound Pressure		H / M / L	dB(A)	31 / 28 / 27	31 / 28 / 27	36 / 34 / 31	39 / 35 / 32
Sound Power			dB(A)	55	55	54	58
Dehumidification Rate		l/h		0.55	1.11	1.58	2.65
Dimension		W x H x D	mm	900 x 190 x 700	900 x 190 x 700	900 x 190 x 700	1,100 x 190 x 700
Net weight			kg	24.0	24.0	24.0	27.0
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm(inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
External Static Pressure	Min-Max		mmAq (Pa)	0-5 (0-50)	0-5 (0-50)	0-5 (0-50)	0-5 (0-50)

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.



# COMBINATION TABLE



## MU2R15

Operation	Cooling													
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
1 UNIT	5				5	3,000	0.88	5,000	1.47	5,750	1.69	226	381	477
	7				7	4,200	1.23	7,000	2.05	8,050	2.36	303	540	683
	9				9	5,400	1.58	9,000	2.64	10,350	3.03	408	676	864
	12				12	7,200	2.11	12,000	3.52	13,800	4.04	540	926	1,176
2 UNIT	5	5			10	6,000	1.76	10,000	2.93	11,500	3.37	414	682	889
	5	7			12	7,200	2.11	12,000	3.52	13,800	4.04	486	833	1,106
	5	9			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	7			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	9			16	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	5	12			17	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	9			18	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	12			19	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	9	12			21	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376

Operation	Heating													
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
1 UNIT	5				5	3,300	0.97	5,500	1.61	6,050	1.77	235	380	472
	7				7	5,040	1.48	8,400	2.46	9,240	2.71	355	604	721
	9				9	6,480	1.90	10,800	3.17	11,880	3.48	454	784	949
	12				12	7,920	2.32	13,200	3.87	14,520	4.26	554	969	1,185
2 UNIT	5	5			10	6,600	1.93	11,000	3.22	12,100	3.55	408	706	854
	5	7			12	7,920	2.32	13,200	3.87	14,520	4.26	498	872	1,066
	5	9			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	7			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	9			16	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	5	12			17	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	9	9			18	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	12			19	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	9	12			21	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



## MU2R17

Operation	Cooling													
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
1 UNIT	5				5	3,000	0.88	5,000	1.47	5,750	1.69	226	381	477
	7				7	4,200	1.23	7,000	2.05	8,050	2.36	303	540	683
	9				9	5,400	1.58	9,000	2.64	10,350	3.03	408	676	864
	12				12	7,200	2.11	12,000	3.52	13,800	4.04	540	926	1,176
2 UNIT	5	5			10	6,000	1.76	10,000	2.93	11,500	3.37	414	682	889
	5	7			12	7,200	2.11	12,000	3.52	13,800	4.04	486	833	1,058
	5	9			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	7			14	8,400	2.46	14,000	4.10	16,100	4.72	583	988	1,376
	7	9			16	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	5	12			17	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	9	9			18	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	7	12			19	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	9	15			20	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	9	12			21	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
2 UNIT	7	15			22	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	9	15			24	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699
	12	12			24	9,600	2.81	16,000	4.69	18,400	5.39	657	1,251	1,699

Operation	Heating													
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
1 UNIT	5				5	3,300	0.97	5,500	1.61	6,050	1.77	235	380	472
	7				7	5,040	1.48	8,400	2.46	9,240	2.71	355	604	721
	9				9	6,480	1.90	10,800	3.17	11,880	3.48	454	784	920
	12				12	7,920	2.32	13,200	3.87	14,520	4.26	554	942	1,155
2 UNIT	5	5			10	6,600	1.93	11,000	3.22	12,100	3.55	408	706	854
	5	7			12	7,920	2.32	13,200	3.87	14,520	4.26	498	872	1,066
	5	9			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	7			14	9,600	2.81	16,000	4.69	18,400	5.39	613	1,066	1,433
	7	9			16	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	5	12			17	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	9	9			18	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	7	12			19	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	5	15			20	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	9	12			21	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
2 UNIT	7	15			22	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	9	15			24	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633
	12	12			24	10,800	3.17	18,000	5.28	19,400	5.69	706	1,247	1,633

## COMBINATION TABLE



## MU3R19

Operation	Cooling														
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max	
					Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max		
1 UNIT	5				5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571	
	7				7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645	
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847	
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1,139	
	15				15	8,520	2.50	15,000	4.40	17,040	4.99	573	1,003	1,356	
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	747	1,302	1,827	
	5	5			10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788	
5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991		
5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215		
7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215		
7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1,467		
5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1,083	1,603		
9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
7	12			19	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
5	15			20	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
9	12			21	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
7	15			22	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
5	18			23	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
9	15			24	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
12	12			24	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
7	18			25	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
9	18			27	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
12	15			27	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
5	24			29	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
12	18			30	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
15	15			30	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	2,040		
5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1,239		
5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1,013	1,500		
5	5	9		19	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	7	7		19	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	7	9		21	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	7	7		21	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	5	12		22	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	9	9		23	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	7	9		23	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	7	12		24	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	5	15		25	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	9	9		25	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	9	12		26	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	7	12		26	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	7	15		27	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
9	9	9		27	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	9	12		28	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	5	18		28	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	9	15		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	12	12		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
7	7	15		29	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
5	7	18		30	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		
9	9	12		30	10,800	3.17	18,000	5.28	21,600	6.33	544	1,111	1,918		

## COMBINATION TABLE



Operation	Heating														
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max	
					Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max		
1 UNIT	5				5	4,000	1.17	5,500	1.61	6,325	1.85	279	384	589	
	7				7	5,040	1.48	8,400	2.46	9,660	2.83	342	579	743	
	9				9	6,480	1.90	10,800	3.17	12,420	3.64	483	757	997	
	12				12	7,920	2.32	13,200	3.87	15,180	4.45	537	954	1,234	
	15				15	9,900	2.90	16,500	4.84	18,975	5.56	688	1,189	1,593	
	18				18	11,880	3.48	19,800	5.80	22,770	6.67	845	1,483	1,978	
	5	5			10	7,200	2.11	12,000	3.52	14,400	4.22	329	598	861	
5	7			12	8,640	2.53	14,400	4.22	17,280	5.06	430	904	1,301		
5	9			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360		
7	7			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360		
7	9			16	11,520	3.38	19,200	5.63	23,040	6.75	540	1,118	1,610		
5	12			17	12,240	3.59	20,400	5.98	24,480	7.17	598	1,319	1,899		
9	9			18	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
7	12			19	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
5	15			20	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
9	12			21	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
7	15			22	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
5	18			23	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
9	15			24	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
12	12			24	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
7	18			25	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
9	18			27	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
12	15			27	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
5	24			29	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
12	18			30	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
15	15			30	12,960	3.80	21,600	6.33	25,000	7.33	660	1,391	2,040		
5	5	5		15	10,800	3.17	18,000	5.28	21,600	6.33	497	946	1,363		
5	5	7		17	12,240	3.59	20,400	5.98	24,480	7.17	551	1,118	1,610		
5	5	9		19	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	7	7		19	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	7	9		21	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	7	7		21	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	5	12		22	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	9	9		23	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	7	9		23	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	5	15		25	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	9	9		25	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	7	12		24	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	5	15		25	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	9	9		25	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	9	12		26	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	7	12		26	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	7	15		27	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
9	9	9		27	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
7	9	12		28	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	5	18		28	12,960	3.80	21,600	6.33	25,000	7.33	725	1,266	1,823		
5	9	15		29											

# COMBINATION TABLE



## MU3R21

Cooling															
Operation	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
						Min		Rated		Max					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max	
1 UNIT					5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571	
					7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645	
					9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847	
					12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1139	
					15	8,520	2.50	15,000	4.40	17,040	4.99	573	1003	1356	
					18	10,800	3.17	18,000	5.28	21,600	6.33	747	1302	1827	
		5				10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788
		5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991
		5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1215
		7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1215
		7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1467
		5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1083	1603
		9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1182	1890
		7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	669	1290	2064
		5	15			20	12,000	3.52	20,000	5.86	24,000	7.03	669	1406	2249
		9	12			21	12,600	3.69	21,000	6.15	24,150	7.08	743	1530	2450
		7	15			22	12,600	3.69	21,000	6.15	24,150	7.08	743	1530	2450
	2 UNIT					23	12,600	3.69	21,000	6.15	24,150	7.08	743	1530	2450
		5	18			24	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		9	15			24	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		12	12			24	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		7	18			25	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		9	18			27	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		12	15			27	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		5	24			29	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		12	18			30	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		15	15			30	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		7	24			31	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		9	24			33	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		15	18			33	12,600	3.69	21,000	6.15	25,000	7.33	743	1530	2450
		5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1239
		5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1013	1500
		5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1212	1940
		5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1212	1940
		5	7	9		21	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301
	7	7	7		21	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	5	12		22	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	9	9		23	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	7	7	9		23	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	7	12		24	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	5	15		25	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	7	9	9		25	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	9	12		26	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	7	7	12		26	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
	5	7	15		27	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
3 UNIT		9	9	9	27	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		7	9	12	28	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	5	18	28	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	9	15	29	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	12	12	29	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		7	7	15	29	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	7	18	30	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		9	9	12	30	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		7	9	15	31	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		7	12	12	31	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	12	15	32	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		5	9	18	32	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		7	7	18	32	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		9	9	15	33	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	
		9	12	12	33	12,600	3.69	21,000	6.15	25,000	7.33	682	1438	2301	

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



Heating															
Operation	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
						Min		Rated		Max					
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max	
1 UNIT					5	4,000	1.17	5,500	1.61	6,325	1.85	279	384	589	
					7	5,040	1.48	8,400	2.46	9,660	2.83	342	579	743	
					9	6,480	1.90	10,800	3.17	12,420	3.64	483	757	997	
					12	7,920	2.32	13,200	3.87	15,180	4.45	537	954	1234	
					15	9,900	2.90	16,500	4.84	18,975	5.56	688	1189	1593	
					18	11,880	3.48	19,800	5.80	22,770	6.67	845	1483	1978	
		5	5			10	7,200	2.11	12,000	3.52	14,400	4.22	329	598	861
		5	7			12	8,640	2.53	14,400	4.22	17,280	5.06	430	904	1301
		5	9			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1360
		7	7			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1360
		7	9			16	11,520	3.38	19,200	5.63	23,040	6.75	540	1118	1610
		5	12			17	12,240	3.59	20,400	5.98	24,480	7.17	598	1319	1899
		9	9			18	12,960	3.80	21,600	6.33	25,920	7.60	660	1430	2059
		7	12			19	13,680	4.01	22,800	6.68	26,600	7.80	725	1543	2221
		5	15			20	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		9	12			21	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		7	15			22	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
	2 UNIT					23	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		5	18			24	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		9	15			24	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		12	12			24	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		7	18			25	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		9	18			27	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		12	15			27	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		5	24			29	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		12	18			30	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		15	15			30	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		7	24			31	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		9	24			33	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		15	18			33	14,400	4.22	24,000	7.03	26,600	7.80	764	1662	2380
		5	5	5		15	10,800	3.17	18,000	5.28	21,600	6.33	497	946	1363
		5	5	7		17	12,240	3.59	20,400	5.98	24,480	7.17	551	1118	1610
		5	5	9		19	13,680	4.01	22,800	6.68	26,600	7.80	725	1419	2044

# COMBINATION TABLE



## MU4R25

Operation	Cooling														
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max	
Btu/h						kW	Btu/h	kW	Btu/h	kW					
1 UNIT	5				5	3,600	1.06	5,000	1.47	6,000	1.76	288	363	571	
	7				7	4,200	1.23	7,000	2.05	8,400	2.46	319	478	645	
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	378	595	847	
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	478	822	1,139	
	15				15	8,520	2.50	15,000	4.40	17,040	4.99	573	1,003	1,356	
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	747	1,302	1,827	
	5	5			10	7,200	2.11	10,000	2.93	12,000	3.52	350	532	788	
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	350	669	991	
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215	
	7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	408	821	1,215	
	7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	469	991	1,467	
	5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	532	1,083	1,603	
	9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	599	1,182	1,749	
	7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	669	1,290	1,909	
	9	12			20	12,000	3.52	20,000	5.86	24,000	7.03	669	1,406	2,080	
2 UNIT	9	9			21	12,600	3.69	21,000	6.15	24,150	7.08	743	1,530	2,264	
	7	15			22	13,200	3.87	22,000	6.45	25,300	7.42	743	1,638	2,425	
	5	18			23	13,800	4.04	23,000	6.74	26,450	7.75	821	1,752	2,593	
	9	15			24	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	12	12			24	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	7	18			25	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	9	18			27	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	12	15			27	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	5	24			29	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	12	18			30	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	15	15			30	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	7	24			31	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	9	24			33	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	15	18			33	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
	18	18			36	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770	
12	24			36	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770		
15	24			39	14,400	4.22	24,000	7.03	27,000	7.91	904	1,871	2,770		
5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	422	837	1,239		
5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	481	1,013	1,500		
5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,794		
5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	544	1,212	1,794		
5	7	9		21	12,600	3.69	21,000	6.15	25,200	7.39	682	1,438	2,128		
7	7	7		21	12,600	3.69	21,000	6.15	25,200	7.39	682	1,438	2,128		
5	5	12		22	13,200	3.87	22,000	6.45	26,400	7.74	731	1,540	2,279		
5	9	9		23	13,800	4.04	23,000	6.74	27,600	8.09	731	1,647	2,437		
7	9	9		23	13,800	4.04	23,000	6.74	27,600	8.09	731	1,647	2,437		
5	7	12		24	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	5	15		25	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	9	9		25	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	9	12		26	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	7	12		26	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	7	15		27	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	9	9		27	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	9	12		28	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	5	18		28	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	9	15		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	12	12		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	7	15		29	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	7	18		30	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	9	12		30	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	9	15		31	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	12	12		31	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	12	15		32	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	9	18		32	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	7	18		32	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	9	15		33	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	12	12		33	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	9	18		34	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	12	15		34	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	5	24		34	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	12	18		35	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	15	15		35	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	7	24		36	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	12	15		36	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
12	12	12		36	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	9	18		36	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	12	18		37	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	15	15		37	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	9	24		38	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
5	15	18		38	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
7	7	24		38	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	12	18		39	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
9	15	15		39	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		
12	12	15		39	14,400	4.22	24,000	7.03	29,000	8.50	837	1,758	2,603		

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



Operation	Cooling														
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)			
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max	
Btu/h						kW	Btu/h	kW	Btu/h	kW					
4 UNIT	5	5	5	5	20	12,000	3.52	20,000	5.86	24,000	7.03	592	1,265	1,872	
	5	5	5	7	22	13,200	3.87	22,000	6.45	29,000	8.50	659	1,495	2,212	
	5	5	5	9	24	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	7	7	24	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	7	9	26	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	7	7	7	26	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	5	12	27	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	9	9	28	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	7	7	9	28	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	7	7	7	7	28	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	5	12	29	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	5	5	15	30	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	5	7	9	9	30	14,400	4.22	24,000	7.03	29,000	8.50	731	1,758	2,603	
	7	7	7	9	30	14,400	4.22	24,000							

# COMBINATION TABLE



## MU4R25

Heating														
Operation	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)		
						Min		Rated		Max				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max
1 UNIT	5				5	4,000	1.17	5,500	1.61	6,325	1.85	279	384	589
	7				7	5,040	1.46	8,400	2.46	9,660	2.83	342	579	743
	9				9	6,480	1.90	10,800	3.17	12,420	3.64	483	757	997
	12				12	7,920	2.32	13,200	3.87	15,180	4.45	537	954	1,234
	15				15	9,900	2.90	16,500	4.84	18,975	5.56	688	1,189	1,593
	18				18	11,880	3.48	19,800	5.80	22,770	6.67	845	1,483	1,978
	24				24	15,240	4.47	25,400	7.44	26,670	7.82	1,101	1,840	2,327
	5	5			10	7,200	2.11	12,000	3.52	14,400	4.22	329	598	861
	5	7			12	8,640	2.53	14,400	4.22	17,280	5.06	430	904	1,301
	5	9			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360
	7	7			14	10,080	2.95	16,800	4.92	20,160	5.91	484	945	1,360
	7	9			16	11,520	3.38	19,200	5.63	23,040	6.75	540	1,118	1,610
	5	12			17	12,240	3.59	20,400	5.98	24,480	7.17	598	1,319	1,899
	9	9			18	12,960	3.80	21,600	6.23	25,920	7.60	650	1,430	2,059
	7	12			19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,543	2,221
	5	15			20	14,400	4.22	24,000	7.03	28,800	8.44	764	1,662	2,393
	9	12			21	15,120	4.43	25,200	7.39	29,000	8.50	793	1,749	2,518
	7	15			22	15,840	4.64	26,400	7.74	29,000	8.50	867	1,836	2,644
	5	18			23	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
	9	15			24	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850
12	12			24	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
7	18			25	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
9	18			27	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
12	15			27	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
5	24			29	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
12	18			30	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
15	15			30	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
7	24			31	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
9	24			33	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
15	18			33	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
18	18			36	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
12	24			36	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
15	24			39	16,560	4.85	27,600	8.09	29,000	8.50	945	1,977	2,850	
5	5	5		15	10,800	3.17	18,000	5.28	21,600	6.33	497	946	1,363	
5	5	7		17	12,240	3.59	20,400	5.98	24,480	7.17	551	1,118	1,610	
5	5	9		19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,419	2,044	
5	7	7		19	13,680	4.01	22,800	6.68	27,360	8.02	725	1,419	2,044	
5	7	9		21	15,120	4.43	25,200	7.39	30,240	8.86	730	1,610	2,319	
7	7	7		21	15,120	4.43	25,200	7.39	30,240	8.86	730	1,610	2,319	
5	5	12		22	15,840	4.64	26,400	7.74	31,000	9.09	798	1,697	2,444	
5	9	9		23	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	7	9		23	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	7	12		24	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	5	15		25	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	9	9		25	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	9	12		26	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	7	12		26	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	7	15		27	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	9	9		27	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	9	12		28	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	5	18		28	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	9	15		29	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	12	12		29	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	7	15		29	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	7	18		30	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	9	12		30	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	9	15		31	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	12	15		32	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	9	18		32	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	7	18		32	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	9	15		33	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	12	12		33	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	9	18		34	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	12	15		34	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	5	24		34	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	12	18		35	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	15	15		35	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	7	24		36	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	12	15		36	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
12	12	12		36	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	9	18		36	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	12	18		37	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	15	15		37	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	9	24		38	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
5	15	18		38	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
7	7	24		38	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	12	18		39	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
9	15	15		39	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	
12	12	15		39	16,560	4.85	27,600	8.09	31,000	9.09	870	1,838	2,647	

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



Heating																
Operation	Combination of Indoor Unit (kBtu/h Class)					Total Capacity						Input(W)				
						Min		Rated		Max						
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max		
5	5	5	5	5	20	14,400	4.22	24,000	7.03	28,800	8.44	700	1,418	2,041		
5	5	5	7	7	22	15,840	4.64	26,400	7.74	31,000	9.09	795	1,625	2,339		
5	5	5	9	9	24	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647		
5	5	7	7	24	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	5	7	9	26	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	7	7	7	26	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	5	5	12	27	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	5	9	9	28	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	7	7	9	28	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
7	7	7	7	28	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	5	7	12	29	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	5	5	15	30	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
5	7	9	9	30	16,560	4.85	27,600	8.09	31,000	9.09	832	1,838	2,647			
7	7	7	9	30	16,560	4.85	27,600	8.09	31,000	9.09	8					

# COMBINATION TABLE



## MU4R27

Operation	Cooling												Input(W)		
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min Btu/h	kW	Rated Btu/h	kW	Max Btu/h	kW	Min	Rated	Max	
1 UNIT	5				5	4,500	1.32	5,000	1.47	6,000	1.76	416	416	612	
	7				7	4,800	1.41	7,000	2.05	8,400	2.46	416	494	663	
	9				9	5,400	1.58	9,000	2.64	10,800	3.17	416	617	861	
	12				12	7,200	2.11	12,000	3.52	14,400	4.22	494	846	1,153	
	15				15	8,520	2.50	14,200	4.16	17,040	4.99	592	1,029	1,395	
	18				18	10,800	3.17	18,000	5.28	21,600	6.33	769	1,328	1,804	
	24				24	14,400	4.22	24,000	7.03	25,500	7.47	1,029	1,815	2,536	
	5	5			10	6,000	1.76	10,000	2.93	12,000	3.52	478	623	853	
	5	7			12	7,200	2.11	12,000	3.52	14,400	4.22	444	761	1,038	
	5	9			14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,228	
	7	7			14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,228	
7	9			16	9,600	2.81	16,000	4.69	19,200	5.63	601	1,047	1,423		
5	12			17	10,200	2.99	17,000	4.98	20,400	5.98	646	1,121	1,537		
9	9			18	10,800	3.17	18,000	5.28	21,600	6.33	692	1,195	1,623		
7	12			19	11,400	3.34	19,000	5.57	22,800	6.68	715	1,270	1,740		
5	15			20	12,000	3.52	20,000	5.86	24,000	7.03	761	1,347	1,829		
9	12			21	12,600	3.69	21,000	6.15	25,200	7.39	808	1,423	2,012		
7	15			22	13,200	3.87	22,000	6.45	26,400	7.74	855	1,475	2,154		
5	18			23	13,800	4.04	23,000	6.74	27,600	8.09	879	1,554	2,351		
9	15			24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,505		
12	12			24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,505		
7	18			25	15,000	4.40	25,000	7.33	30,000	8.79	975	1,755	2,721		
9	18			27	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
12	15			27	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
5	24			29	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
12	18			30	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
15	15			30	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
7	24			31	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
9	24			33	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
15	18			33	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
18	18			36	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
12	24			36	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
15	24			39	16,200	4.75	27,000	7.91	31,050	9.10	1,047	2,011	2,891		
5	5	5		15	9,000	2.64	15,000	4.40	18,000	5.28	522	916	1,258		
5	5	7		17	10,200	2.99	17,000	4.98	20,400	5.98	607	1,054	1,445		
5	5	9		19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,636		
5	7	7		19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,636		
5	7	9		21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,891		
7	7	7		21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,891		
2	5	12		22	13,200	3.87	22,000	6.45	26,400	7.74	806	1,387	2,025		
5	9	9		23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,219		
7	7	9		23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,219		
5	7	12		24	14,400	4.22	24,000	7.03	28,800	8.44	871	1,535	2,379		
5	5	15		25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,605		
7	9	9		25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,605		
5	9	12		26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,784		
7	7	12		26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,784		
5	7	15		27	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	9	9		27	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	9	12		28	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	5	18		28	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	9	15		29	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	12	12		29	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	7	15		29	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	7	18		30	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	9	12		30	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	9	15		31	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	12	12		31	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	12	15		32	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	9	18		32	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	7	18		32	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	9	15		33	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	12	12		33	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	9	18		34	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	12	15		34	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	5	24		34	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	12	18		35	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	15	15		35	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	7	24		36	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	12	15		36	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
12	12	12		36	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	9	18		36	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	12	18		37	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	15	15		37	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	9	24		38	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	15	18		38	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	7	24		38	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	12	18		39	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
9	15	15		39	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
12	12	15		39	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	9	24		40	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
7	15	18		40	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	12	24		41	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		
5	18	18		41	16,200	4.75	27,000	7.91	31,050	9.10	984	1,890	2,784		

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



Operation	Cooling															Input(W)		
	Combination of Indoor Unit (kBtu/h Class)					Total Capacity												
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min Btu/h	kW	Rated Btu/h	kW	Max Btu/h	kW	Min	Rated	Max				
1 UNIT	5				5	20	12,000	3.52	20,000	5.86	24,000	7.03	680	1,202	1,633			
	5				5	22	13,200	3.87	22,000	6.45	26,400	7.74	764	1,317	1,923			
	5				5	24	14,400	4.22	24,000	7.03	28,800	8.44	827	1,458	2,215			
	5				5	26	15,600	4.57	26,000	7.62	31,200	9.14	913	1,679	2,520			
	5				5	27	16,200	4.75	27,000	7.91	32,400	9.50	935	1,795	2,706			
	5				5	28	16,200	4.75	27,000	7.91	32,400	9.50	935	1,795	2,706			
	5				5	29	16,200	4.75	27,000	7.91	32,400	9.50	935	1,795	2,706			
	5				5	30	16,200	4.75	27,000	7.91	32,40							

## COMBINATION TABLE



## MU4R27

Operation	Heating											Input(W)		
	Combination of Indoor Unit (kBtu/h Class)				Total Capacity									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
1 UNIT	5				5	5000	1.47	5500	1.61	6325	1.85	610	610	714
	7				7	5400	1.58	8400	2.46	9660	2.83	610	636	825
	9				9	6480	1.90	10800	3.17	12420	3.64	610	826	1077
	12				12	7920	2.32	13200	3.87	15180	4.45	583	1021	1338
	15				15	9900	2.90	16500	4.84	18975	5.56	744	1279	1744
	18				18	11880	3.48	19800	5.80	22770	6.67	909	1577	2133
	24				24	15240	4.47	25400	7.44	26670	7.82	1192	2077	2538
	5	5			10	7200	2.11	12000	3.52	14400	4.22	451	773	1081
	5	7			12	8640	2.53	14400	4.22	17280	5.06	541	940	1337
	5	9			14	10080	2.95	16800	4.92	20160	5.91	656	1112	1571
	5	7	7		14	10080	2.95	16800	4.92	20160	5.91	656	1112	1571
	5	9	7		16	11520	3.38	19200	5.63	23040	6.75	749	1289	1844
	5	12	7		17	12240	3.59	20400	5.98	24480	7.17	796	1392	1968
	5	9	12		18	12960	3.80	21600	6.33	25920	7.60	844	1471	2094
	5	12	9		19	13680	4.01	22800	6.68	27360	8.02	892	1577	2222
5	15	15		20	14400	4.22	24000	7.03	28800	8.44	940	1657	2352	
5	12	18		21	15120	4.43	25200	7.39	30240	8.86	989	1766	2568	
5	15	12		22	15840	4.64	26400	7.74	31680	9.28	1038	1848	2811	
5	18	18		23	16560	4.85	27600	8.09	33120	9.71	1112	1960	3127	
5	15	15		24	17280	5.06	28800	8.44	34100	9.99	1100	2045	3384	
5	12	12		24	17280	5.06	28800	8.44	34100	9.99	1100	2045	3384	
5	7	18		25	18000	5.28	30000	8.79	34100	9.99	1147	2194	3384	
5	9	18		27	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	12	15		27	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	15	24		29	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	12	18		30	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	15	15		30	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	9	24		31	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	12	24		33	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	18	18		36	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	12	24		36	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	15	24		39	18600	5.45	31000	9.09	34100	9.99	1194	2157	3384	
5	9	5	5	15	10800	3.17	18000	5.28	21600	6.33	660	1140	1590	
5	5	7	7	17	12240	3.59	20400	5.98	24480	7.17	748	1309	1850	
5	5	9	9	19	13680	4.01	22800	6.68	27360	8.02	838	1482	2089	
5	7	7	7	19	13680	4.01	22800	6.68	27360	8.02	838	1482	2089	
5	7	9	9	21	15120	4.43	25200	7.39	30240	8.86	930	1660	2414	
5	7	7	7	21	15120	4.43	25200	7.39	30240	8.86	930	1660	2414	
5	5	12	12	22	15840	4.64	26400	7.74	31680	9.28	976	1738	2520	
5	5	9	9	23	16560	4.85	27600	8.09	33120	9.71	1046	1842	2767	
5	7	7	9	23	16560	4.85	27600	8.09	33120	9.71	1046	1842	2767	
5	5	7	12	24	17280	5.06	28800	8.44	34560	10.13	1093	1922	2951	
5	5	5	15	25	18000	5.28	30000	8.79	34720	10.18	1140	2063	2998	
5	7	9	9	25	18000	5.28	30000	8.79	34720	10.18	1140	2063	2998	
5	5	9	12	26	18720	5.49	31200	9.14	34720	10.18	1188	2177	2998	
5	7	7	12	26	18720	5.49	31200	9.14	34720	10.18	1188	2177	2998	
5	7	7	15	27	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	9	9	27	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	9	12	28	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	5	18	28	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	9	15	29	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	12	12	29	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	7	15	29	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	7	18	30	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	9	12	30	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	9	15	31	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	12	12	31	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	12	15	32	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	9	18	32	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	7	18	32	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	9	15	33	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	12	12	33	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	9	18	34	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	12	15	34	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	15	24	34	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	12	18	35	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	15	15	35	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	15	24	36	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	12	15	36	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	12	12	12	36	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	9	18	36	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	12	18	37	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	15	15	37	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	9	24	38	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	15	18	38	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	7	24	38	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	12	18	39	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	9	15	15	39	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	12	12	15	39	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	9	24	40	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	7	15	18	40	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	12	12	24	41	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	
5	5	18	18	41	18600	5.45	31000	9.09	34720	10.18	1188	2177	2998	

## COMBINATION TABLE



Operation	Heating											Input(W)		
	Combination of Indoor Unit (kBtu/h Class)				Total Capacity									
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	Min		Rated		Max		Min	Rated	Max
4 UNIT	5	5	5	5	20	14400	4.22	24000	7.03	28800	8.44	840	1480	2100
	5	5	5	7	22	15840	4.64	26400	7.74	31680	9.28	927	1651	2470
	5	5	5	9	24	17280	5.06	28800	8.44	34560	10.13	1038	1826	2861
	5	5	7	7	24	17280	5.06	28800	8.44	34560	10.13	1038	1826	2861
	5	5	7	9	26	18000	5.28	30000	8.79	36000	10.55	1083	1960	3125
	5	7	7	7	26	18000	5.28	30000	8.79	36000	10.55	1083	1960	3125
	5	5	5	12	27	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	5	9	9	28	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	5	7	9	28	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	7	7	7	28	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	5	5	12	29	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	5	5	15	30	18600	5.45	31000	9.09	36000	10.55	1128	2068	3125
	5	5	7	9	30	18600	5.45	31000	9.09	36000	10.			

# COMBINATION TABLE



## MU5R30

Operation	Combination of Indoor Unit (kBtu/h Class)						Cooling						Input(W)		
							Total Capacity								
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Min		Rated		Max		Min	Rated	Max
Btu/h							kW	Btu/h	kW	Btu/h	kW				
1 UNIT	5					5	4,500	1.32	5,000	1.47	6,000	1.76	416	418	629
	7					7	4,800	1.41	7,000	2.05	8,400	2.46	416	494	681
	9					9	5,400	1.58	9,000	2.64	10,800	3.17	416	617	884
	12					12	7,200	2.11	12,000	3.52	14,400	4.22	494	846	1,184
	15					15	8,520	2.50	14,200	4.16	17,040	4.99	592	1,029	1,432
	18					18	10,800	3.17	18,000	5.28	21,600	6.33	769	1,328	1,852
	24					24	14,400	4.22	24,000	7.03	25,500	7.47	1,029	1,815	2,604
	5	5				10	6,000	1.76	10,000	2.93	12,000	3.52	378	623	876
	5	7				12	7,200	2.11	12,000	3.52	14,400	4.22	444	761	1,066
	5	9				14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,261
	7	7				14	8,400	2.46	14,000	4.10	16,800	4.92	533	903	1,261
	7	9				16	9,600	2.81	16,000	4.69	19,200	5.63	601	1,047	1,461
	5	12				17	10,200	2.99	17,000	4.98	20,400	5.98	646	1,121	1,578
	9	9				18	10,800	3.17	18,000	5.28	21,600	6.33	692	1,195	1,667
	7	12				19	11,400	3.34	19,000	5.57	22,800	6.68	715	1,270	1,787
	5	15				20	12,000	3.52	20,000	5.86	24,000	7.03	761	1,347	1,878
9	12				21	12,600	3.69	21,000	6.15	25,200	7.39	808	1,423	2,066	
7	15				22	13,200	3.87	22,000	6.45	26,400	7.74	855	1,475	2,211	
5	18				23	13,800	4.04	23,000	6.74	27,600	8.09	879	1,554	2,414	
9	15				24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,572	
12	12				24	14,400	4.22	24,000	7.03	28,800	8.44	927	1,633	2,572	
7	18				25	15,000	4.40	25,000	7.33	30,000	8.79	975	1,755	2,794	
9	18				27	16,200	4.75	27,000	7.91	32,400	9.50	1,047	2,011	3,213	
12	15				27	16,200	4.75	27,000	7.91	32,400	9.50	1,047	2,011	3,213	
5	24				29	17,400	5.10	29,000	8.50	33,000	9.67	1,145	2,284	3,341	
12	18				30	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
15	15				30	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
7	24				31	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
9	24				33	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
15	18				33	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
18	18				36	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
12	24				36	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
15	24				39	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
18	24				42	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
24	24				48	18,000	5.28	30,000	8.79	33,000	9.67	1,195	2,429	3,341	
5	5	5			15	9,000	2.64	15,000	4.40	18,000	5.28	522	916	1,292	
5	5	7			17	10,200	2.99	17,000	4.98	20,400	5.98	607	1,054	1,483	
5	5	9			19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,680	
5	7	7			19	11,400	3.34	19,000	5.57	22,800	6.68	672	1,194	1,680	
5	7	9			21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,942	
7	7	7			21	12,600	3.69	21,000	6.15	25,200	7.39	760	1,338	1,942	
5	12	12			22	13,200	3.87	22,000	6.45	26,400	7.74	804	1,387	2,079	
5	9	9			23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,278	
7	7	9			23	13,800	4.04	23,000	6.74	27,600	8.09	826	1,461	2,278	
5	7	12			24	14,400	4.22	24,000	7.03	28,800	8.44	871	1,535	2,442	
5	5	15			25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,674	
7	9	9			25	15,000	4.40	25,000	7.33	30,000	8.79	916	1,650	2,674	
5	9	12			26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,859	
7	7	12			26	15,600	4.57	26,000	7.62	31,200	9.14	962	1,767	2,859	
5	7	15			27	16,200	4.75	27,000	7.91	32,400	9.50	984	1,890	3,120	
9	9	9			27	16,200	4.75	27,000	7.91	32,400	9.50	984	1,890	3,120	
7	9	12			28	16,800	4.92	28,000	8.21	33,600	9.85	1,030	2,028	3,327	
5	5	15			28	16,800	4.92	28,000	8.21	33,600	9.85	1,030	2,028	3,327	
5	9	15			29	17,400	5.10	29,000	8.50	33,600	9.85	1,077	2,173	3,327	
5	12	12			29	17,400	5.10	29,000	8.50	33,600	9.85	1,077	2,173	3,327	
7	7	15			29	17,400	5.10	29,000	8.50	33,600	9.85	1,077	2,173	3,327	
5	7	18			30	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	9	12			30	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	9	15			31	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	12	12			31	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	12	15			32	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	9	18			32	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	7	18			32	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	9	15			33	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	12	12			33	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	9	18			34	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	12	15			34	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	5	24			34	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	12	18			35	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	15	15			35	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	7	24			36	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	12	15			36	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
12	12	12			36	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	9	18			36	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	12	18			37	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	15	15			37	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	9	24			38	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	15	18			38	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	7	24			38	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	12	18			39	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	15	15			39	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
12	12	15			39	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	9	24			40	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
7	15	18			40	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	12	24			41	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
5	18	18			41	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
12	12	18			42	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	9	24			42	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
9	15	18			42	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	
12	15	15			42	18,000	5.28	30,000	8.79	33,600	9.85	1,123	2,326	3,327	

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



Operation	Combination of Indoor Unit (kBtu/h Class)						Cooling						Input(W)		
							Total Capacity								
	UNIT-A	UNIT-B	UNIT-C												



# COMBINATION TABLE



## MU5R30

Operation	Cooling														
	Combination of Indoor Unit (kBTu/h Class)						Total Capacity						Input(W)		
							Min		Rated		Max				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max
5	5	5	5	5	25	15,000	4.40	25,000	7.33	30,000	8.79	8.41	1,517	2,300	
5	5	5	5	7	27	16,200	4.75	27,000	7.91	32,400	9.50	9.06	1,701	2,645	
5	5	5	5	9	29	17,400	5.10	29,000	8.50	34,800	10.20	9.93	1,897	3,026	
5	5	5	7	7	29	17,400	5.10	29,000	8.50	34,800	10.20	9.93	1,897	3,026	
5	5	5	7	9	31	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	7	31	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	5	12	32	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	9	9	33	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	9	33	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	7	33	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	7	12	34	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	5	15	35	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	9	9	35	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	7	9	35	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	5	5	9	12	36	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	12	36	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	7	15	37	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	9	9	9	37	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	9	9	37	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	7	9	37	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	5	18	38	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	7	12	38	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	9	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	5	12	39	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	15	39	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	9	9	39	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	5	5	9	9	39	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	9	18	40	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	9	9	12	40	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	9	12	40	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	7	12	40	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	9	15	41	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	7	15	41	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	9	9	9	9	41	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	9	9	9	41	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	9	18	42	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	12	15	42	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	18	42	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	9	9	12	42	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	9	12	42	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	9	15	18	43	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	9	15	43	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	12	12	43	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	7	15	43	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	9	9	9	9	43	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	12	15	44	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	5	24	44	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	7	18	44	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	9	9	9	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	9	9	12	44	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	12	18	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	15	15	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	9	9	15	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	12	12	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	9	15	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
9	9	9	9	9	45	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	7	24	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	9	9	18	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	9	12	15	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	12	12	12	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	9	18	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	7	12	15	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	7	18	46	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	15	15	47	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	9	9	9	15	47	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	9	9	12	12	47	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	9	9	15	47	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	9	12	12	47	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	5	9	24	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	5	7	7	24	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	9	9	18	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
5	7	9	12	15	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	12	15	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
9	9	9	9	12	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	
7	7	7	9	18	48	18,000	5.28	30,000	8.79	36,000	10.55	1.037	2,000	3,260	

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

# COMBINATION TABLE



RESIDENTIAL

MULTI SPLIT

Operation	Heating																		
	Combination of Indoor Unit (kBTu/h Class)										Total Capacity						Input(W)		
											Min		Rated		Max				
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E	Total	Btu/h	kW	Btu/h	kW	Btu/h	kW	Min	Rated	Max				
1 UNIT	5					5	5,000	1.47	5,500	1.61	6,325	1.85	610	610	714				
	7					7	5,500	1.61	6,000	1.75	6,800	1.99	610	610	825				
	9					9	6,480	1.90	10,800	3.17	12,420	3.64	610	826	1,077				
	12					12	7,920	2.32	13,200	3.87	15,180	4.45	583	1,021	1,338				
	15					15	9,900	2.90	16,500	4.84	18,975	5.56	744	1,279	1,744				
	18					18	11,880	3.48	19,800	5.80	22,770	6.67	909	1,577	2,133				
	24					24	15,240	4.47	25,400	7.44	26,670	7.82	1,192	2,077	2,538				
	5	5				10	7,200	2.11	12,000	3.52	14,400	4.22	451	773	1,081				
	5	7																	

# COMBINATION TABLE



## MU5R30

Operation	Heating																			
	Combination of Indoor Unit (kBTU/h Class)					Total	Total Capacity						Input(W)							
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E		Min	Rated		Max		Min	Rated	Max						
3 UNIT	7	18				43	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	7	12	24			43	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	5	15	24			44	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	9	18	18			45	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	9	12	24			45	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	12	15	18			45	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	15	15	15			45	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	7	15	24			46	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	5	18	24			47	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	9	15	24			48	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	12	18	18			48	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	12	12	24			48	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	15	15	18			48	20700	6.07	34500	10.11	38640	11.32	1.333	2.566	3.602					
	5	5	5			20	14400	4.22	24000	7.03	28800	8.44	1.480	2.100	2.700					
	5	5	5		7	22	15840	4.64	26400	7.74	31680	9.28	1.651	2.470	3.270					
	5	5	5		9	24	17280	5.06	28800	8.44	34560	10.13	1.826	2.861	3.796					
	5	5	7		7	24	17280	5.06	28800	8.44	34560	10.13	1.826	2.861	3.796					
	5	5	7		9	26	18720	5.49	31200	9.14	37440	10.97	2.068	3.349	4.430					
	5	7	7		7	26	18720	5.49	31200	9.14	37440	10.97	2.068	3.349	4.430					
	5	5	5		12	27	19440	5.70	32400	9.50	38640	11.32	2.230	3.524	4.660					
	5	5	9		9	28	20160	5.91	33600	9.85	38640	11.32	2.230	3.524	4.660					
	5	7	7		7	28	20160	5.91	33600	9.85	38640	11.32	2.230	3.524	4.660					
	7	7	7		7	29	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	5		15	30	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	7	9		9	30	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	7	7	7		9	30	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	9		12	31	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	7	7		12	31	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	7		15	32	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	7	7	9		9	32	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	9	9		9	32	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	9		18	33	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	7	9		12	33	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	7	7	7		12	33	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	9		15	34	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	12		12	34	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	7	7		15	34	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	7	9	9		9	34	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	5	7		18	35	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
	5	9	9		12	35	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660					
7	7	9		12	35	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	9		15	36	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	7		12	36	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	9		18	36	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	9		9	36	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	9		18	37	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	12		15	37	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	7		18	37	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	9		12	37	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	9	9		15	38	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	9		15	38	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	12		12	38	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	5		18	39	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	9		18	39	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	12		15	39	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	9		12	39	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	7		18	39	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	12		18	40	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	9		15	40	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	12		12	40	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	5	7		24	41	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	9	12		15	41	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	12	12		12	41	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	12		15	41	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	15		18	42	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	9		15	42	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	12		12	42	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	12		15	43	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	12	12		12	43	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	9		18	43	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	9	15		15	44	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	12		18	44	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	15		15	44	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	7	18		15	45	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	12		15	45	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	12	12		12	45	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	9		18	45	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	7		24	45	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	12		18	46	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	9	15		15	46	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	12	12		15	46	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	12	12		18	47	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
7	7	9		24	47	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	9	15		18	47	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
5	9	15		15	47	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
12	12	12		12	48	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						
9	9	12		18	48	20700	6.07	34500	10.11	38640	11.32	2.267	3.524	4.660						

# COMBINATION TABLE



Operation	Heating																			
	Combination of Indoor Unit (kBTU/h Class)					Total	Total Capacity						Input(W)							
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	UNIT-E		Min	Rated		Max										

# R410A MULTI SPLIT



R410A MULTI SPLIT

## OUTDOOR UNITS





RESIDENTIAL

MULTI SPLIT

MU5M40

(Unit: mm)



OUTDOOR				MU5M40.U44	
Compressor	Type			Scroll	
Capacity*	Cooling	Min / Nom / Max	kW	1.3 / 11.2 / 14.7	
	Heating	Min / Nom / Max	kW	1.5 / 12.5 / 16.0	
Low Temperature Capacity	Heating - 7 <sup>°</sup>	Max	kW	11.0	
Power Input*	Cooling	Min / Nom / Max	kW	0.4 / 3.3 / 5.5	
	Heating	Min / Nom / Max	kW	0.4 / 3.8 / 5.6	
Running Current*	Cooling	Min / Nom / Max	A	1.8 / 14.9 / 24.9	
	Heating	Min / Nom / Max	A	1.9 / 17.0 / 25.4	
EER				3.40	
COP				3.33	
SEER				7.10	
SCOP				4.00	
Pdesign (@-10 <sup>°</sup> )			kW	8.90	
Season Energy Label	Cooling / Heating (A+++ to D Scale)			A++ / A+	
Annual Energy Consumption	Cooling / Heating		kWh	552 / 3,114	
Airflow Rate		Nom	m <sup>3</sup> /min	80	
Sound Pressure Level	Cooling	Nom	dB(A)	53	
	Heating	Nom	dB(A)	55	
Sound Power Level	Cooling	Max	dB(A)	67	
Dimensions	W x H x D		mm	950 × 834 × 330	
Net Weight			kg	73	
Refrigerant	Type			R410A	
	Charge		kg	3.4	
	Additional Charge		g/m	20	
	GWP			2087.5	
Operation Range (Outdoor)			t-CO <sub>2</sub> eq	7.098	
	Cooling	Min / Max	° DB	-10 ~ 48	
	Heating	Min / Max	° WB	-25 ~ 18	
Power Supply			V, Ø, Hz	220-240, 1, 50	
Power Supply Cable			No. x mm <sup>2</sup>	3C × 3.5	
Transmission Cable			No. x mm <sup>2</sup>	4C × 0.75	
Circuit Breaker			A	40	
Piping Length Total			m	85	
Piping Length per Branch		Max	m	25	
Piping Elevation Difference	IDU - ODU	Max	m	15	
	IDU - IDU	Max	m	7.5	
Piping Connection	Liquid		mm(inch) x No.	Ø 6.35 (1/4) × 5	
	Gas		mm(inch) x No.	Ø 9.52 (3/8) × 5	

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ This Product is available from Apr.2020

Note: 1. Capacities are based on the following conditions:

Cooling: - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating: - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \*: See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.


4. At least two indoor units should be connected.

5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases (R410A)

## OUTDOOR UNITS

FM40AH  
FM48AH  
FM56AH

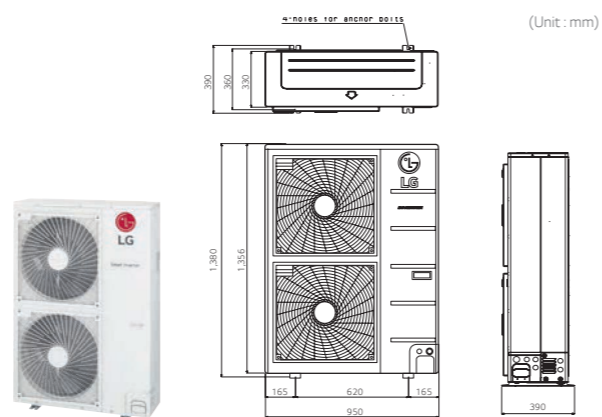

OUTDOOR				FM40AH.U34	FM48AH.U34	FM56AH.U34
<b>Compressor</b>	Type			Scroll	Scroll	Scroll
<b>Capacity*</b>	Cooling	Min / Nom / Max	kW	2.8 / 12.3 / 15.4	3.3 / 14.1 / 17.0	4.0 / 15.5 / 18.5
	Heating	Min / Nom / Max	kW	3.1 / 13.5 / 16.2	3.7 / 16.0 / 17.3	4.5 / 17.4 / 18.8
<b>Low Temperature Capacity</b>	Heating	Max	kW	12.5	14.5	15.5
<b>Power Input*</b>	Cooling	Min / Nom / Max	kW	0.82 / 2.42 / 4.90	0.96 / 3.12 / 5.30	1.18 / 3.87 / 5.60
	Heating	Min / Nom / Max	kW	0.89 / 2.87 / 5.10	1.06 / 3.76 / 5.40	1.29 / 4.34 / 5.80
<b>Running Current*</b>	Cooling	Min / Nom / Max	A	3.7 / 11.0 / 22.2	4.4 / 14.1 / 24.0	5.3 / 17.5 / 25.4
	Heating	Min / Nom / Max	A	4.0 / 13.0 / 23.1	4.8 / 17.0 / 24.5	5.9 / 19.7 / 26.3
<b>EER</b>				5.08	4.51	4.01
<b>COP</b>				4.70	4.25	4.01
<b>SEER</b>				7.40	7.20	6.90
<b>SCOP</b>				4.20	4.20	4.20
<b>Pdesign(@-10<sup>°</sup>)</b>			kW	8.6	9.5	9.5
<b>Seasonal Energy Label (A++ to E Scale)</b>	Cooling / Heating			- / -	- / -	- / -
<b>Annual Energy Consumption</b>	Cooling / Heating	kWh		981 / 2,867	1,167 / 3,167	1,348 / 3,167
<b>Air Flow Rate</b>	Nom	m <sup>3</sup> /min x No.		110	110	110
<b>Sound Pressure Level</b>	Cooling	Nom	dB(A)	51	53	53
	Heating	Nom	dB(A)	53	55	55
<b>Sound Power Level</b>	Cooling	Max	dB(A)	69	71	73
	Heating	Max	dB(A)	70	72	74
<b>Dimensions</b>	W x H x D	mm		950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
<b>Net Weight</b>			kg	87	87	87
<b>Refrigerant</b>	Type			R410A	R410A	R410A
	Charge	kg		4,200	4,200	4,200
	Additional Charging Volume	g/m		20	20	20
	GWP (Global Warming Potential)			2,087.5	2,087.5	2,087.5
	t-CO <sub>2</sub> eq.			8.768	8.768	8.768
<b>Operation Range (Outdoor)</b>	Cooling	Min. - Max.	°C DB	-10 - 48	-10 - 48	-10 - 48
	Heating	Min. - Max.	°C WB	-25 - 18	-25 - 18	-25 - 18
<b>Power Supply</b>			V, ∅, Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
<b>Power Supply Cable</b>			No. x mm <sup>2</sup>	3C x 4.0	3C x 4.0	3C x 4.0
<b>Transmission Cable</b>	ODU-BD	No. x mm <sup>2</sup>		4C x 1.25	4C x 1.25	4C x 1.25
	BD-IDU	No. x mm <sup>2</sup>		4C x 0.75	4C x 0.75	4C x 0.75
<b>Circuit Breaker</b>			A	40	40	40
<b>Max Piping Length</b>	Total Piping(Main+Total Branch)	m		125	135	145
	Main Piping	m		55	55	55
	Total Branch Piping	m		70	80	90
	Each Branch Piping	m		15	15	15
<b>Piping Elevation Difference</b>	IDU-ODU	Max.	m	30	30	30
	IDU-IDU	Max.	m	15	15	15
<b>Piping Connections</b>	Liquid	mm(inch) x No.		∅ 9.52 x 1	∅ 9.52 x 1	∅ 9.52 x 1
	Gas	mm(inch) x No.		∅ 19.05 x 1	∅ 19.05 x 1	∅ 19.05 x 1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ This Product is available from Apr.2020

Note : 1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \* : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.


4. At least two indoor units should be connected.

5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases (R410A)

## OUTDOOR UNITS

FM41AH  
FM49AH  
FM57AH

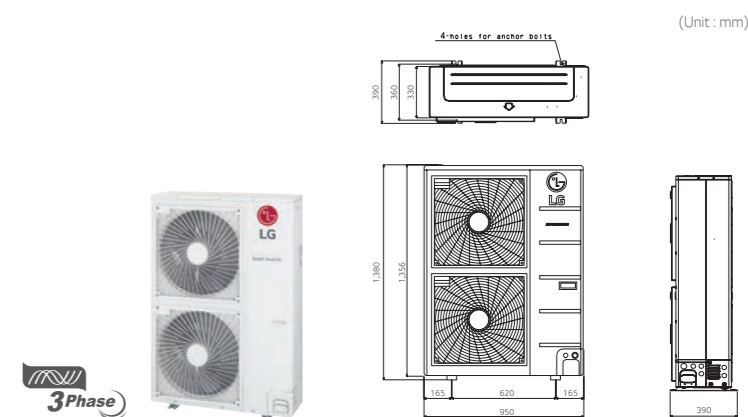

OUTDOOR				FM41AH.U34	FM49AH.U34	FM57AH.U34
<b>Compressor</b>	Type			Scroll	Scroll	Scroll
<b>Capacity*</b>	Cooling	Min / Nom / Max	kW	2.8 / 12.3 / 15.4	3.3 / 14.1 / 17.0	4.0 / 15.5 / 18.5
	Heating	Min / Nom / Max	kW	3.1 / 13.5 / 16.2	3.7 / 16.0 / 17.3	4.5 / 17.4 / 18.8
<b>Low Temperature Capacity</b>	Heating	Max	kW	12.5	14.5	15.5
<b>Power Input*</b>	Cooling	Min / Nom / Max	kW	0.82 / 2.42 / 4.90	0.96 / 3.12 / 5.30	1.18 / 3.87 / 5.60
	Heating	Min / Nom / Max	kW	0.89 / 2.87 / 5.10	1.06 / 3.76 / 5.40	1.29 / 4.34 / 5.80
<b>Running Current*</b>	Cooling	Min / Nom / Max	A	1.2 / 3.6 / 7.4	1.4 / 4.7 / 8.0	1.8 / 5.8 / 8.4
	Heating	Min / Nom / Max	A	1.3 / 4.3 / 7.7	1.6 / 5.7 / 8.1	1.9 / 6.5 / 8.7
<b>EER</b>				5.08	4.51	4.01
<b>COP</b>				4.70	4.25	4.01
<b>SEER</b>				7.40	7.20	6.90
<b>SCOP</b>				4.20	4.20	4.20
<b>Pdesign(@-10<sup>°</sup>)</b>			kW	8.6	9.5	9.5
<b>Seasonal Energy Label (A++ to E Scale)</b>	Cooling / Heating			- / -	- / -	- / -
<b>Annual Energy Consumption</b>	Cooling / Heating	kWh		981 / 2,867	1,167 / 3,167	1,348 / 3,167
<b>Air Flow Rate</b>	Nom	m <sup>3</sup> /min x No.		110	110	110
<b>Sound Pressure Level</b>	Cooling	Nom	dB(A)	51	53	53
	Heating	Nom	dB(A)	53	55	55
<b>Sound Power Level</b>	Cooling	Max	dB(A)	69	71	73
	Heating	Max	dB(A)	70	72	74
<b>Dimensions</b>	W x H x D	mm		950 x 1,380 x 330	950 x 1,380 x 330	950 x 1,380 x 330
<b>Net Weight</b>			kg	87	87	87
<b>Refrigerant</b>	Type			R410A	R410A	R410A
	Charge	kg		4,200	4,200	4,200
	Additional Charging Volume	g/m		20	20	20
	GWP (Global Warming Potential)			2,087.5	2,087.5	2,087.5
	t-CO <sub>2</sub> eq.			8.768	8.768	8.768
<b>Operation Range (Outdoor)</b>	Cooling	Min. - Max.	°C DB	-10 - 48	-10 - 48	-10 - 48
	Heating	Min. - Max.	°C WB	-25 - 18	-25 - 18	-25 - 18
<b>Power Supply</b>			V, ∅, Hz	3 / 380-415 / 50	3 / 380-415 / 50	3 / 380-415 / 50
<b>Power Supply Cable</b>			No. x mm <sup>2</sup>	5C x 2.5	5C x 2.5	5C x 2.5
<b>Transmission Cable</b>	ODU-BD	No. x mm <sup>2</sup>		4C x 1.25	4C x 1.25	4C x 1.25
	BD-IDU	No. x mm <sup>2</sup>		4C x 0.75	4C x 0.75	4C x 0.75
<b>Circuit Breaker</b>			A	20	20	20
<b>Max Piping Length</b>	Total Piping(Main+Total Branch)	m		125	135	145
	Main Piping	m		55	55	55
	Total Branch Piping	m		70	80	90
	Each Branch Piping	m		15	15	15
<b>Piping Elevation Difference</b>	IDU-ODU	Max.	m	30	30	30
	IDU-IDU	Max.	m	15	15	15
<b>Piping Connections</b>	Liquid	mm(inch) x No.		∅ 9.52 x 1	∅ 9.52 x 1	∅ 9.52 x 1
	Gas	mm(inch) x No.		∅ 19.05 x 1	∅ 19.05 x 1	∅ 19.05 x 1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ This Product is available from Apr.2020

Note : 1. Capacities are based on the following conditions:

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero.

2. \* : See page "Combination Table".

3. Due to our policy of innovation some specifications may be changed without notification.

4. At least two indoor units should be connected.


5. Minimum combination capacity rate should be more than 40%.

6. This product contains fluorinated greenhouse gases (R410A)

# CEILING & FLOOR CONVERTIBLE

## Flexible Installation


The ceiling and floor models can be installed either on the ceiling or on the floor. This saves space when installed in the shops or offices.

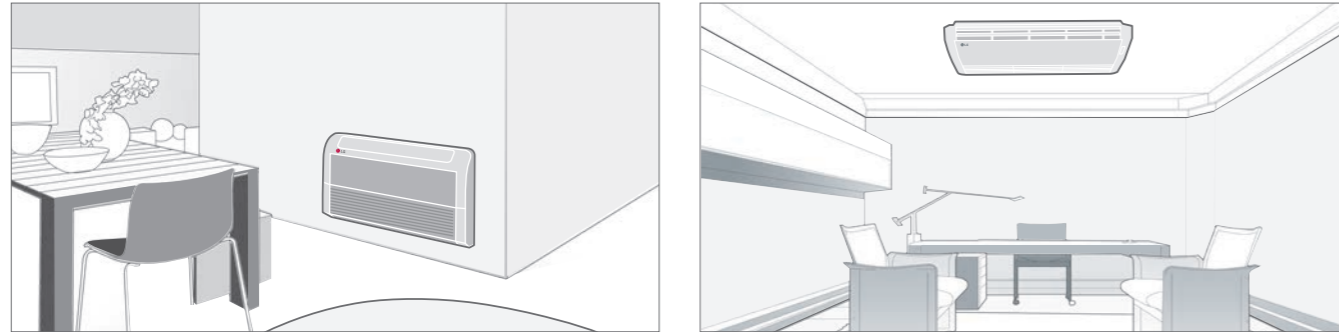

\* Ceiling & Floor : CV09 NE2 / CV12 NE2

## Air Flow Direction Control

Vertical air flow direction can be adjusted using remote controller, and horizontal airflow direction can be adjusted manually.

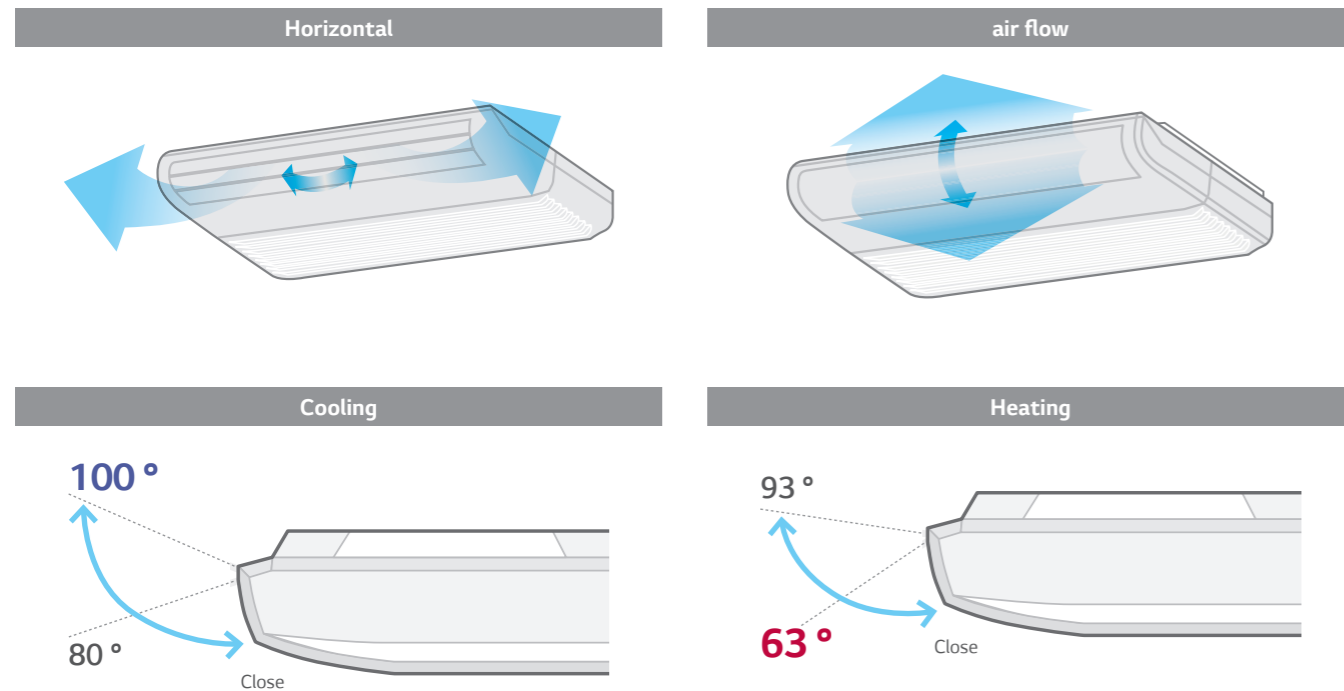

# CEILING & FLOOR CONVERTIBLE

CAPACITY (kW)		2.6	3.5	5.3	7.0
Ceiling & Floor Convertible unit		CV09.NE2	CV12.NE2	-	-

## Ceiling & Floor Convertible unit


INDOOR				CV09.NE2	CV12.NE2
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9	3.5 / 3.9
Power Input		Nom	W	30	40
Running Current		Nom	A	0.4	0.4
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m <sup>3</sup> /min	7.6 / 6.9 / 6.2	9.2 / 7.6 / 6.6
Sound Pressure	Cooling	H / M / L	dB(A)	38 / 35 / 31	40 / 36 / 32
Sound Power	Cooling	Max	dB(A)	52	56
Dehumidification Rate			l/h	1.2	1.2
Dimensions	Body	W x H x D	mm	900 x 490 x 200	900 x 490 x 200
Net Weight	Body		kg	13.7	13.7
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm(inch)	Ø9.52 (3/8)	Ø9.52 (3/8)

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.  
 Note : 1. Capacities are based on the following conditions :  
 Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB  
 Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB  
 Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero  
 2. Definition of Power Input Nominal conditions - Performance tested under EN14511  
 3. Due to our policy of innovation some specifications may be changed without notification  
 4. This product contains fluorinated greenhouse gases (R410A)

# CONSOLE

## Optimised Air Flow for Cooling & Heating

During cooling operation, the vane adjusts upwards to direct air flow toward the ceiling. During heating operation, the van directs the air flow toward the floor to balance out the room temperature. A wireless controller is included with the indoor console unit.

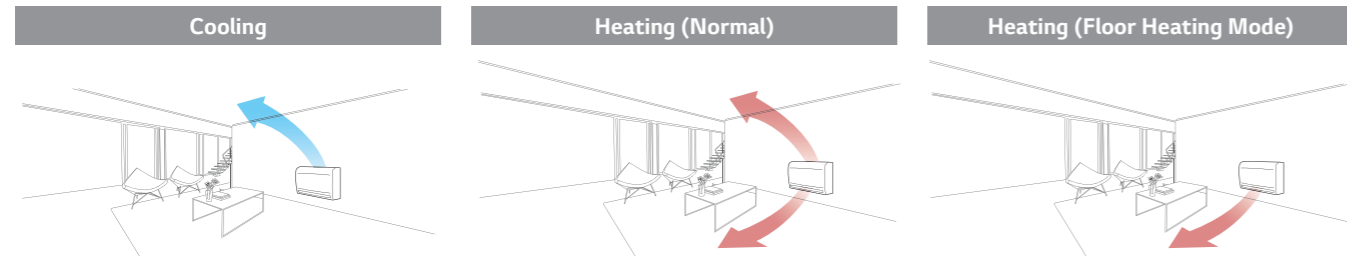

## Quick Floor Heating

Console air conditioners offer a fast and powerful performance. Using the floor heating mode, console air conditioners provide faster floor heating and help to reach the desired temperature quickly.

	Company A	Electric Heater	LG	LG Floor Heating Mode
<b>Lead Time for Heating (13°C - 21°C)</b>	12 minutes 30 seconds	50 minutes	<b>9 minutes 30 seconds</b>	<b>8 minutes 40 seconds</b>

(Test Condition :Target Temp 23°C, Indoor Room : 13°C-, Outdoor Room : 7°C)

## 5-Step Vane Control

There are 5 different stages to control air flow direction.



# CONSOLE

	CAPACITY (kW)	2.6	3.5	5.3
Console		CQ09.NA0	CQ12.NA0	CQ18.NA0

## Console

INDOOR				CQ09.NA0
Capacity	Cooling / Heating	Nom	kW	2.6 / 2.9
Power Input		Nom	W	20
Running Current		Nom	A	0.6
Power Supply			V, Ø, Hz	220-240, 1, 50
Air Flow Rate		H / M / L	m³/min	8.5 / 6.7 / 5.0
Sound Pressure	Cooling	H / M / L	dB(A)	38 / 32 / 27
Sound Power	Cooling	Max	dB(A)	53
Dehumidification Rate			l/h	1.2
Dimensions	Body	W x H x D	mm	700 x 600 x 210
Net Weight	Body		kg	14.0
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)
	Gas		mm(inch)	Ø9.52 (3/8)

\* CQ09, CQ12, CQ18 are compatible between SCAC and MULTI.

INDOOR				CQ12.NA0	CQ18.NA0
Capacity	Cooling / Heating	Nom	kW	3.5 / 3.9	5.3 / 5.8
Power Input		Nom	W	20	40
Running Current		Nom	A	0.6	0.7
Power Supply			V, Ø, Hz	220-240, 1, 50	220-240, 1, 50
Air Flow Rate		H / M / L	m³/min	9.0 / 6.9 / 5.2	10.1 / 8.6 / 7.2
Sound Pressure	Cooling	H / M / L	dB(A)	39 / 32 / 27	44 / 39 / 35
Sound Power	Cooling	Max	dB(A)	56	60
Dehumidification Rate			l/h	1.4	2.3
Dimensions	Body	W x H x D	mm	700 x 600 x 210	700 x 600 x 210
Net Weight	Body		kg	14.0	14.0
Piping Connection	Liquid		mm(inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm(inch)	Ø9.52 (3/8)	Ø12.7 (1/2)

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

Note : 1. Capacities are based on the following conditions :

Cooling : - Indoor Temperature 27°C (80.6°F) DB / 19°C (66.2°F) WB - Outdoor Temperature 35°C (95°F) DB / 24°C (75.2°F) WB

Heating : - Indoor Temperature 20°C (68°F) DB / 15°C (59°F) WB - Outdoor Temperature 7°C (44.6°F) DB / 6°C (42.8°F) WB

Piping Length - Interconnecting Piping Length 7.5m - Level Difference of Zero

2. Definition of Power Input Nominal conditions - Performance tested under EN14511

3. Due to our policy of innovation some specifications may be changed without notification

4. This product contains fluorinated greenhouse gases (R410A)

# LG WI-FI MODEM

Control LG air conditioners via using the internet devices as Android or iOS bases smartphones

PWFMDD200



## Features


- Access LG air conditioner anytime and from anywhere with Wi-Fi equipped device
- LG's exclusive Home Appliances control app(SmartThinQ) is available
- Simple operation for various functions
  - On/Off
  - Operation Mode
  - Current/Set Temperature
  - Fan Speed
  - Vane Control<sup>2)</sup>
  - Reservation (Sleep, Weekly On/Off)
  - Energy Monitoring<sup>1)</sup>
  - Filter Management
  - Error check



MODEL NAME	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	Multi Indoor unit <sup>3)</sup>
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG Smart ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

\* Functionality may be different according to each IDU model  
 \* User interface of application shall be revised for its design and contents improvement  
 \* Application is optimized for smartphone use, so it may not be well functioning with tablet devices  
 1) LG Centralized controller and PDI installation is required for this function  
 2) Vane Control may not be possible according to the type of Indoor unit  
 3) For the compatibility with Indoor unit, please contact regional office

## Overview

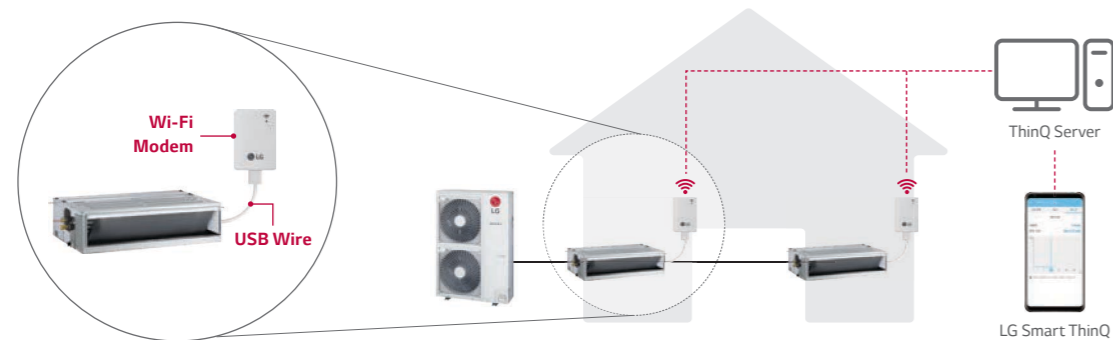

\* Search "LG Smart ThinQ" on Google market or Appstore then download the app.  
 \* Internet service with Wi-Fi connection has to be available

# ACCESSORIES

## Standard Wired Remote Controller



Model Name	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On/Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	
Auto Swing / Vane Control	•	•
Reservation	Simple / Sleep / On, Off / Weekly / Holiday	
Time Display	•	•
Electrical Failure Compensation	•	•
Child Lock	•	•
Operation Status LED	•	•
Indoor Temperature Display	•	•
WirelessRemoteControllerReceiver	-	•
Size (W x H x D, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	•	•


\* Refer to each model PDB for applicable models.

## Remote Controller



PQRHQ0FDB

## PI 485

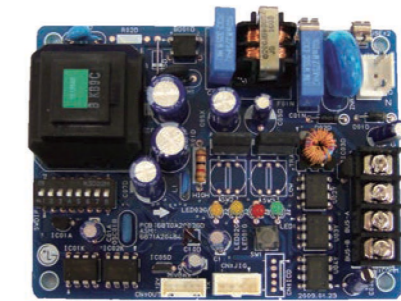

PMNFP14A1

Power : Single phase AC 220V 50/60Hz  
 Max. no of the indoor units that can be connected: 64 UNITS  
 Model applied : RAC / Multi / Single / Thermo V  
 \* Refer to each product PDB for applicable models

## Dry Contact



MODEL	PDRYCB000	PDRYCB400	PDRYCB300	PDRYCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12 V from indoor unit PDB
Voltage / Non Voltage Input		•	•	
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	
Fan Speed Setting			•	•
Thermo Off		•	•	
Energy Saving		•		
Temperature Setting		•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

\* Refer to each product PDB for applicable models

# ACCESSORIES

## Distributor Box

### PMBD3620, PMBD3630, PMBD3640


Easy installation using the range of Distributor Boxes.

For	2 Indoors	3 Indoors	4 Indoors
Distributor	 PMBD3620	 PMBD3630	 PMBD3640

Various distributors can make much easier installation for any sites

### Features

- Distribution of refrigerant to various indoor units.
- 3 models (2, 3, 4 Indoor Units)
- EEV included
- Controlling PCB inside the unit
- Internally insulated (Prevents any chances of drainage)
- Flare joints for easy and clean installation
- Compact design (Low height)
- Flexible installation

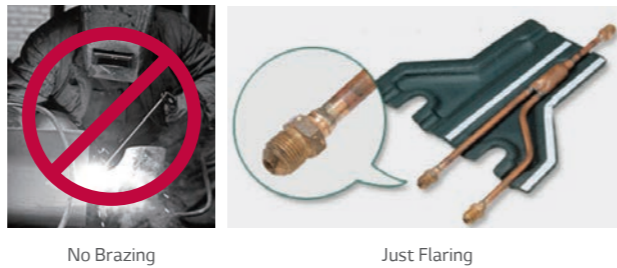

### Specification

		PMBD3620	PMBD3630	PMBD3640
Connectable Indoor Units	Number of Indoor Units	1 - 2	1 - 3	1 - 4
	Capacity	5k / 7k / 9k / 12k / 18k / 24k	5k / 7k / 9k / 12k / 18k / 24k	5k / 7k / 9k / 12k / 18k / 24k
Power Source	V, Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50
Power Consumption	W	10	10	10
Running Current	A	0.05	0.05	0.05
Dimensions	W x H x D	302 x 143 x 252 (11.9 x 5.6 x 9.9)	302 x 143 x 252 (11.9 x 5.6 x 9.9)	302 x 143 x 252 (11.9 x 5.6 x 9.9)
Net Weight	kg/lb	4.8 / 10.6	4.9 / 10.8	5 / 11
Piping Connection (To Outdoor Unit)	Liquid	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
Piping Connection (To Indoor Unit)	Liquid	Ø6.35 (1/4) x 2EA	Ø6.35 (1/4) x 3EA	Ø6.35 (1/4) x 4EA
	Gas	Ø9.52 (3/8) x 2EA	Ø9.52 (3/8) x 3EA	Ø9.52 (3/8) x 4EA
Accessories	Hanger (Bracket)	EA	4	4
	Screw	EA	8	8
	Manual	EA	1	1

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.  
 Note : 1. The piping connection must be suit the piping sizes of the indoor unit which will be connected. (If need, use the connector which is included in the indoor unit)  
 2. The BD should be installed inside the building.

# ACCESSORIES

## Y Branch and Branch Kit


### PMBL5620 (2 units) / PMBL1203F0 (3 units)







### Features

- Y Branch and Branch kit make Multi FDX installation much easier.
- Y Branch and Branch kit for both gas and liquid are provided.
- Insulation material is also provided for covering the branches.

### Application

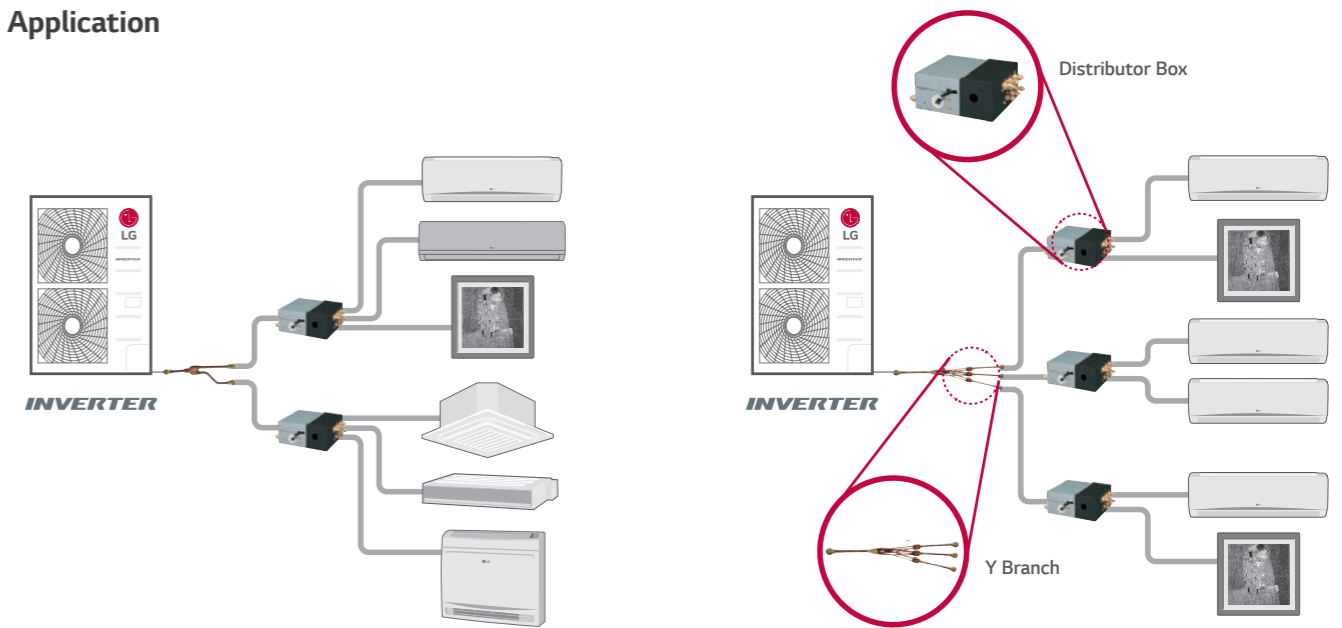

### Accessory Model Name

MODEL NAME	NO. OF BRANCH DISTRIBUTION UNITS	APPLICABLE MODEL	SPECIFICATION	
			GAS	LIQUID
PMBL5620	2 Units	1Ø, 3Ø		
PMBL1203F0	3 Units	1Ø, 3Ø		

(Unit: mm)



# COMMERCIAL

SINGLE SPLIT



# LINE - UP

## H-INVERTER (R32)

## STANDARD INVERTER (R32)

kBTu/h	Type kW	H-INVERTER (R32)				STANDARD INVERTER (R32)								
		Ceiling Mounted Cassette	Ceiling Concealed Duct		Ceiling Suspended	ODU		Ceiling Mounted Cassette	Ceiling Concealed Duct		Ceiling Suspended	Console / Wall Mounted	ODU	
			Mid Static	Low Static		1Ø	3Ø		Mid Static	Low Static			1Ø	3Ø
9	2.5													
12	3.4													
18	5.0													
24	6.8													
30	8.0													
36	9.5													
42	12.0													
48	13.4													
60	14.6													
70	20.0													
85	25.0													

# LINE - UP

## COMPACT INVERTER (R32)

## STANDARD INVERTER (R410A)

kBTu/h	Type kW	COMPACT INVERTER (R32)						STANDARD INVERTER (R410A)			
		Ceiling Mounted Cassette	Ceiling Concealed Duct		Ceiling Suspended	Wall Mounted	ODU	Ceiling Concealed Duct (High Static)	Floor Standing	ODU	
			Mid Static	Low Static			1Ø		1Ø	3Ø	
9	2.5										
12	3.4										
18	5.0										
24	6.8										
30	8.0										
36	9.5										
42	12.0										
48	13.4										
60	14.6										
70	20.0										
85	25.0										

# SINGLE SPLIT



# FEATURE OVERVIEW

Category	H-Inverter (R32)									
	kBtu/h	9	12	18	24	30	36	42	48	60
	kW	2.5	3.4	5.0	6.8	8.0	9.5	12.0	13.4	14.6
<b>Supreme Energy Efficiency</b>	BLDC Comp. & Fan Motor	•	•	•	•	•	•	•	•	•
	Eurovent Certi.	•	•	•	•	•	•	•	•	•
	High Level SEER / SCOP	•	•	•	•	•	•	•	•	•
	Variable Voltage Control	•	•	•	•	•	•	•	•	•
	Wide Louver Fin	•	•	•	•	•	•	•	•	•
	Optimised Heat Exchanger Path			•	•	•	•	•	•	•
	Power Saving Start up	•	•	•	•	•	•	•	•	•
	Peak Current Control			•	•	•	•	•	•	•
	Mode Lock	•*	•*	•	•	•	•	•	•	•
	Standby Mode	•	•	•	•	•	•	•	•	•
<b>Comfort Environment</b>	Comfort Cooling with Humidity sensor**			•	•	•	•	•	•	•
	Night Silent Operation			•	•	•	•	•	•	•
	Continuous Cooling Operation	•	•	•	•	•	•	•	•	•
<b>High Performance &amp; Reliability</b>	Quick & Reliable Operation	•	•	•	•	•	•	•	•	•
	R1 Compressor						•	•	•	•
	Corrosion resistance Black Fin	•	•	•	•	•	•	•	•	•
<b>Convenient Control System</b>	Long Pipe Installation	•	•	•	•	•	•	•	•	•
	LG ThinQ***	•	•	•	•	•	•	•	•	•
	Easy control (PI-485 Connection)	•	•	•	•	•	•	•	•	•
<b>Enhanced Application</b>	1 Point External Input****	•	•	•	•	•	•	•	•	•
	Forced Cooling Operation			•	•	•	•	•	•	•
	Mobile LG MV	•	•	•	•	•	•	•	•	•
	Weekly Program*****	•	•	•	•	•	•	•	•	•
<b>Enhanced Application</b>	Synchro function									
	Connection with AHU			•	•	•	•	•	•	•

\* With controller PREMTB001 / PREMTBB01 / PREMTB100 / PREMTBB10  
 \*\* Available only for Ceiling Mounted cassette (840 x 840), Ceiling Suspended, Console models.  
 \*\*\* Available with LG Wi-Fi modem(PWFMDD200) and it should be connected to the indoor unit  
 \*\*\*\* Available except for Wall Mounted Unit.  
 \*\*\*\*\* Weekly program is available with wired remote controller

Category	Standard Inverter (R32)									Compact Inverter (R32)				
	kBtu/h	9	12	18	24	30	36	42	48	60	18	24	30	36
	kW	2.5	3.4	5.0	6.8	8.0	9.5	12.0	13.4	14.6	5.0	6.8	8.0	9.5
<b>Supreme Energy Efficiency</b>	BLDC Comp. & Fan Motor	•	•	•	•	•	•	•	•	•	•	•	•	•
	Eurovent Certi.	•	•	•	•	•	•	•	•	•	•	•	•	•
	High Level SEER / SCOP	•	•	•	•	•	•	•	•	•	•	•	•	•
	Variable Voltage Control	•	•	•	•	•	•	•	•	•	•	•	•	•
	Wide Louver Fin	•	•	•	•	•	•	•	•	•	•	•	•	•
	Optimised Heat Exchanger Path				•	•	•	•	•	•		•	•	•
	Power Saving Start up	•	•	•	•	•	•	•	•	•	•	•	•	•
	Peak Current Control				•	•	•	•	•	•		•	•	•
	Mode Lock	•*	•*	•	•	•	•	•	•	•	•*	•	•	•
	Standby Mode	•	•	•	•	•	•	•	•	•	•	•	•	•
<b>Comfort Environment</b>	Comfort Cooling with Humidity sensor**	•	•	•	•	•	•	•	•	•	•	•	•	•
	Night Silent Operation			•	•	•	•	•	•	•		•	•	•
	Continuous Cooling Operation	•	•	•	•	•	•	•	•	•				
<b>High Performance &amp; Reliability</b>	Quick & Reliable Operation	•	•	•	•	•	•	•	•	•	•	•	•	•
	R1 Compressor							•	•	•				
	Corrosion resistance Black Fin	•	•	•	•	•	•	•	•	•	•	•	•	•
<b>Convenient Control System</b>	Long Pipe Installation	•	•	•	•	•	•	•	•	•	•	•	•	•
	LG ThinQ***	•	•	•	•	•	•	•	•	•	•	•	•	•
	Easy control (PI-485 Connection)	•	•	•	•	•	•	•	•	•	•	•	•	•
<b>Enhanced Application</b>	1 Point External Input****	•	•	•	•	•	•	•	•	•	•	•	•	•
	Forced Cooling Operation				•	•	•	•	•	•		•	•	
	Mobile LG MV	•	•	•	•	•	•	•	•	•	•	•	•	•
	Weekly Program*****	•	•	•	•	•	•	•	•	•	•	•	•	•
<b>Enhanced Application</b>	Synchro function							•	•	•	•			
	Connection with AHU				•	•	•	•	•	•		•	•	•

\* With controller PREMTB001 / PREMTBB01 / PREMTB100 / PREMTBB10  
 \*\* Available only for Ceiling Mounted cassette (840 x 840), Ceiling Suspended, Console models.  
 \*\*\* Available with LG Wi-Fi modem(PWFMDD200) and it should be connected to the indoor unit  
 \*\*\*\* Available except for Wall Mounted Unit.  
 \*\*\*\*\* Weekly program is available with wired remote controller

# WHY LG SINGLE SPLIT?

## Triple Line-up for On-site Customization

LG's commercial triple line-up provides more customizable options for unique customer needs and installation requirements.



LINE-UP	DESCRIPTION	9K (2.5kW)	12K (3.4kW)	18K (5.0kW)	24K (6.8kW)	30K (8.0kW)	36K (9.5kW)	42K (12.0kW)	48K (13.4kW)	60K (14.6kW)
<b>H-INVERTER (R32)</b> SEER A+++ - A+	<b>High Performance</b> - Suitable for high quality functions - Maximum pipe length up to 85m* - Floor Detection Sensor (Default) - Wide Cooling operation range (-20℉ - 52℉) & 100% Capacity at 48℉* - Wide Heating operation range (-25℉ - 18℉) & 100% Capacity at -15℉*									
<b>STANDARD INVERTER (R32)</b> SEER A++ - A	<b>Wide Commercial Applications</b> - Suitable for wide commercial applications - Maximum pipe length up to 85m* - Synchro Function over 36k Model (Max. 4 IDUs) - Wi-Fi Modem and Floor Detection Sensor (Option) - Wide Cooling operation range (-20℉ - 52℉)* - Wide Heating operation range (-25℉ - 18℉)*									
<b>COMPACT INVERTER (R32)</b> SEER A+ - A	<b>Compact &amp; Cost Effective</b> - Suitable for busy environments and small shops - Very compact and easy to install - Maximum pipe length up to 50m* - Wi-Fi Modem and Floor Detection Sensor (Option) - Cooling operation range (-20℉ - 50℉)* - Heating operation range (-15℉ - 18℉)*									

\* This specification can be different as per each model or combination.

### Application : Premium residences & office spaces Solution : H-Inverter




\* Based on maximum operation

**High Performance**

- High energy savings  
Seasonal efficiency class: A+++ - A+
- Powerful cooling & heating under harsh conditions\*
- Maximum pipe length up to 85m
- Comfort heating with floor sensor (with premium panel)
- Embedded Drain Pump
- Connection with AHU

※ The indoor unit functions is an example of cassette model.  
※ The specification can be different as per each model or combination.

### Application : Large restaurant & cafes Solution : Standard Inverter

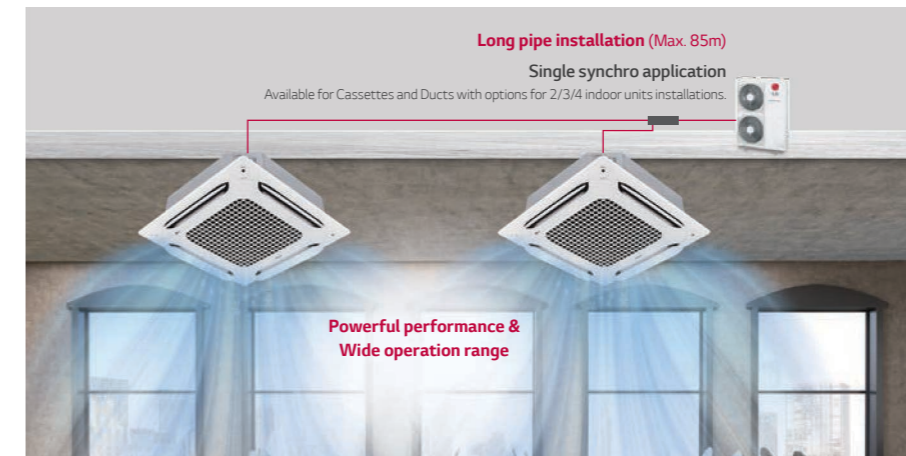


\* Accessories are ordered and purchased separately and installed at field.

**Wide commercial applications**

- Wide operation range  
Cooling (DB) : -20 - 52 °C  
Heating (WB) : -25 - 18 °C
- Maximum pipe length up to 85m
- Synchro Function over 36k Model (Max. 4 IDUs)
- Connection with AHU
- On-demand accessories\*  
Wi-Fi, Drain pump, human detection

※ The specification can be different as per each model or combination.

### Application : Small shops Solution : Compact Inverter

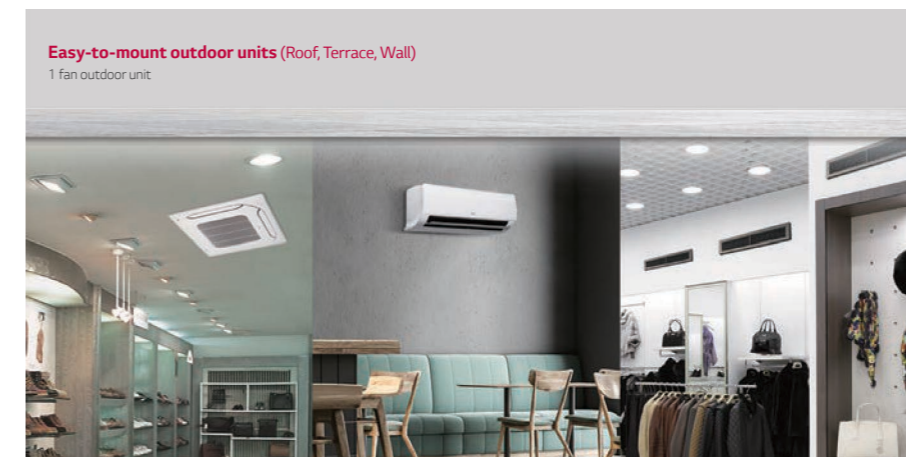

\* Accessories are ordered and purchased separately and installed at field.

**Compact & Cost Effective**


- Very compact and easy to install
- Maximum pipe length up to 50m
- Connection with AHU
- On-demand accessories\*  
Wi-Fi, Drain pump, human detection

※ The specification can be different as per each model or combination.

# WHY LG SINGLE SPLIT?

## Free Combination

By applying concept of free combination, the total line-up increases from 45 to 93 sets while number of outdoor unit is decreased from 17 EA to 5 EA.

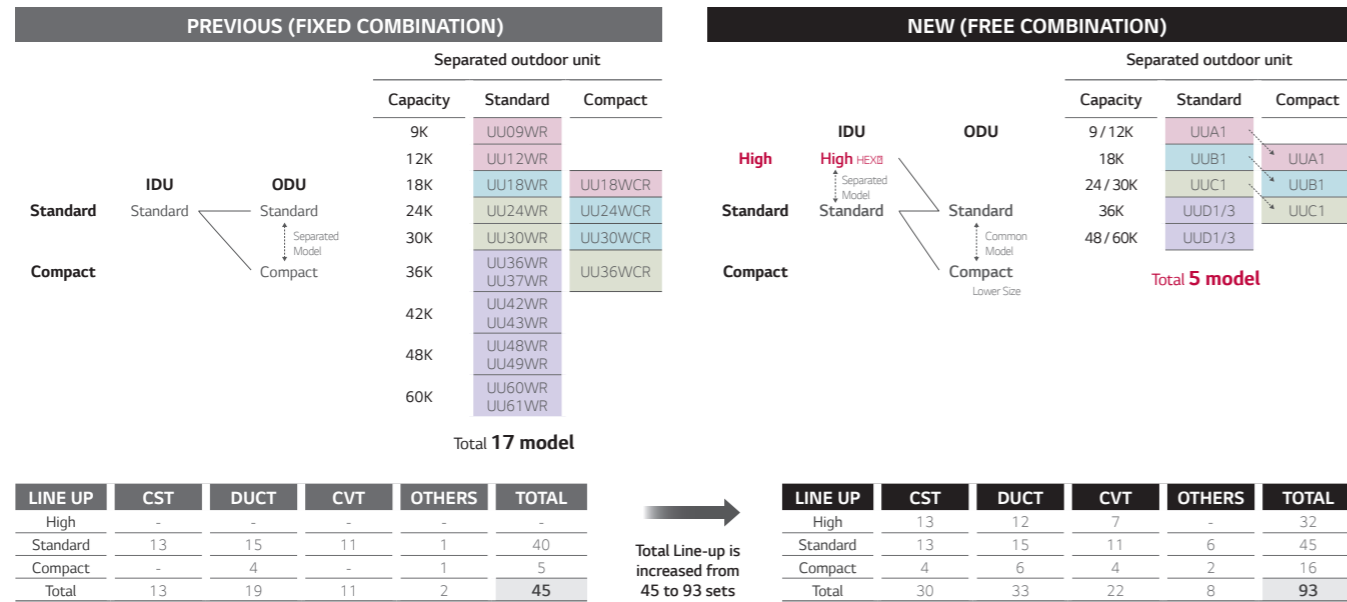

## Expanded Product Type

LG Single split expands from double to triple line-up including various types of indoor units.

CAPACITY	H-INVERTER (R32)				STANDARD INVERTER (R32)				COMPACT INVERTER (R32)					
	Cassette	Duct Mid Static	Duct Low Static	Ceiling Suspended	Cassette	Duct Mid Static	Duct Low Static	Ceiling Suspended	Console / Wall Mounted	Cassette	Duct Mid Static	Duct Low Static	Ceiling Suspended	Wall Mounted
9k	UT09FH			<b>NEW!</b>	CT09F		CL09F		UQ09F					
12k	UT12FH	UM12FH	UL12FH		CT12F		CL12F		UQ12F					
18k	UT18FH	UM18FH	UL18FH	UV18FH	CT18F	CM18F	CL18F	UV18F	UQ18F	<b>NEW!</b>	CM18F	CL18F	UV18F	<b>NEW!</b>
24k	UT24FH	UM24FH		UV24FH	CT24F	CM24F	CL24F	UV24F		CT24F	CM24F	CL24F	UV24F	
30k	UT30FH	UM30FH		UV30FH	UT30F	UM30F		UV30F	US30F	UT30F	UM30F		UV30F	US30F
36k	UT36FH	UM36FH		UV36FH	UT36F	UM36F		UV36F	US36F	UT36F	UM36F		UV36F	US36F
42k	UT42FH	UM42FH		UV42FH	UT42F	UM42F		UV42F						
48k	UT48FH	UM48FH			UT48F	UM48F		UV48F						
60k	UT60FH				UT60F	UM60F		UV60F						

Common ODU	UUA1	UUB1	UUC1	UUD1 (1Ø) UUD3 (3Ø)
	770 × 545 × 288	870 × 650 × 330	950 × 834 × 330	950 × 1380 × 330

## Differentiated Specification

LG Single Split provides differentiated features (performance/installation/convenience) with each product line.

Items	H-INVERTER	STANDARD	COMPACT	19Y Standard (R32)
	High Performance	Wide commercial applications	Compact & Cost Effective	
Performance	SEER Class	A+++ ~ A+	A++ ~ A+	A++ ~ A
	Cooling Capacity* @48ℓ	112%	105%	88%
	Heating Capacity* @-15ℓ	124%	107%	98%
	Operation Range (Cooling, DB)	-20 ~ 50 °C	-10 ~ 48 °C	-15 ~ 48 °C
	Operation Range (Heating, WB)	-20 ~ 18 °C	-15 ~ 18 °C	-18 ~ 18 °C
Installation	Max. Pipe Length	50 m	35 m	50 m
	Cooling Capacity @50m	113%	109%	-
	Drain Pump (Cassette)	ℓ	ℓ	ℓ
	Drain Pump (Duct, Suspended)	ℓ	Accessory	Accessory
	Humidity Control (cassette, suspended, console)	ℓ	ℓ	ℓ
Convenience	Wi-Fi (Cassette)	Accessory	Accessory	Accessory
	Floor Detection (Cassette)	ℓ	N/A	N/A
	Air purifying (Cassette)	Accessory	N/A	N/A
	Human detection (Cassette)	Accessory	Accessory	Accessory
	Others	Synchro Application	N/A	36k ℓ
AHU Comm. Kit Application		18k ℓ	18k ℓ	24k ℓ

\* Based on internal test data for 9.5kW model. (Capacity is calculated compared to 19Y standard model)  
 ※ This specification can be different as per each model or combination.  
 ※ In the case of cassette model, note that the function depends on the application of recommended decoration panel.

# SUPREME ENERGY EFFICIENCY

## SEER / SCOP

LG's advanced technologies achieve world-class energy efficiency.



### SEER / SCOP class

kW	2.5	3.4	5.0	6.8	8.0	9.5	Average
SEER	7.0	6.8	7.6	8.5	7.8	7.6	7.6
	A++	A++	A++	A+++	A++	A++	A++
SCOP	4.0	4.0	4.4	4.8	4.8	4.5	4.4
	A+	A+	A+	A++	A++	A+	A+

※ These values are based in the H-Inverter Ceiling Cassette model and can change based on the applied combination.

### European Energy Labeling


	SEER	SCOP
A+++	SEER ≥ 8.5	SCOP ≥ 5.1
A++	6.1 ≤ SEER < 8.5	4.6 ≤ SCOP < 5.1
A+	5.6 ≤ SEER < 6.1	4.0 ≤ SCOP < 4.6
A	5.1 ≤ SEER < 5.6	3.4 ≤ SCOP < 4.0
B	4.6 ≤ SEER < 5.1	3.1 ≤ SCOP < 3.4
C	4.1 ≤ SEER < 4.6	2.8 ≤ SCOP < 3.1
D	3.6 ≤ SEER < 4.1	2.5 ≤ SCOP < 2.8

\* Based on Ceiling Cassette (6.8 kW)

# SUPREME ENERGY EFFICIENCY


## Energy Savings

LG commercial air conditioners will automatically alter the temperature of discharge air by controlling their refrigerant temperature based on the difference between the indoor temperature and the target indoor temperature. During cooling operation, evaporating temperature will increase if the temperature difference reduces. This allows for enhanced comfort and reduced energy consumption.

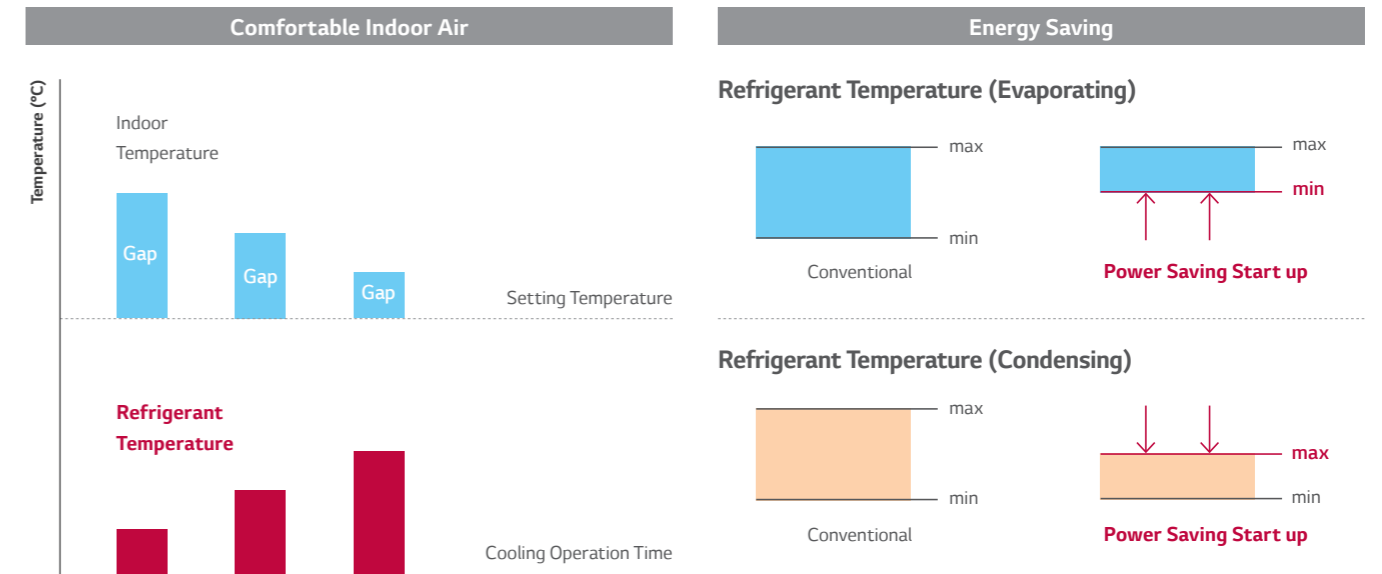


## Peak Current Control

The peak current control function prevents the air conditioner from running at the maximum level while maintaining current system settings, in order to reduce energy consumption. This function helps minimize energy costs during the peak periods of energy use when the energy billing is much higher.

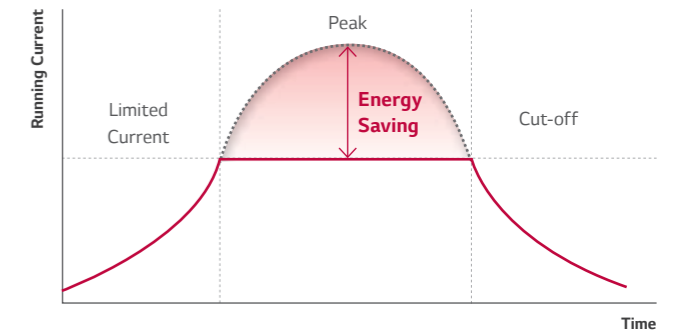

## Mode Lock

Set the operation mode to either cooling-only or heating-only, either by adjusting the wired remote controller or setting the DIP switch to avoid combined use of cooling and heating. (Some models need wired remote controller for mode lock function according to feature overview table)

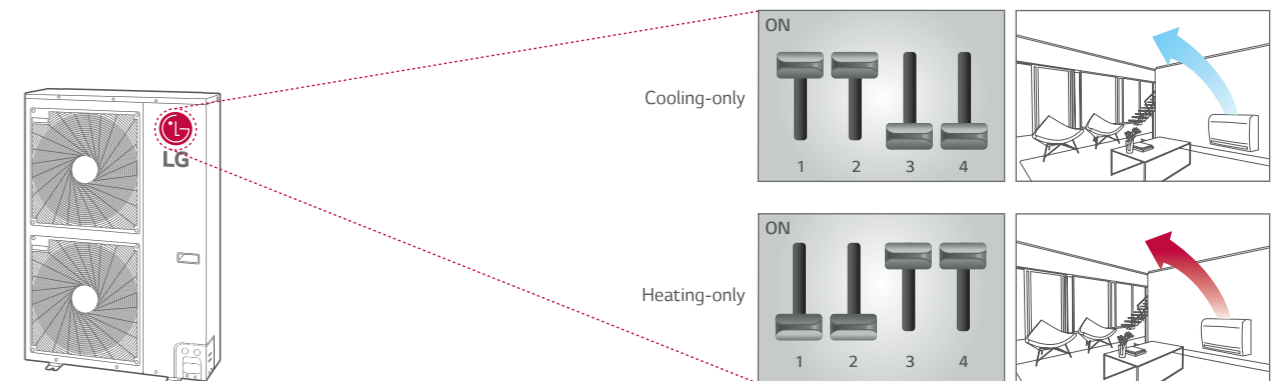

# COMFORTABLE ENVIRONMENT

## Comfort with Temperature & Humidity Sensors

With Dual Sensing Control, air conditioners can rapidly achieve a comfortable indoor environment for customers.




By sensing both temperature and humidity, this feature helps avoid over-cooling and dehumidification, maximizing comfort




※ Comfort cooling apply to Ceiling Cassette, Ceiling Suspended, Console  
- It does not apply to small capacity cassette models (UT09FH, UT12FH, CT09F, CT12F, CT18F)

### Dry Summer

During a dry summer season, the system senses the low humidity levels and decreases the operating ratio to increase humidity for a more comfortable environment and energy efficient operation.

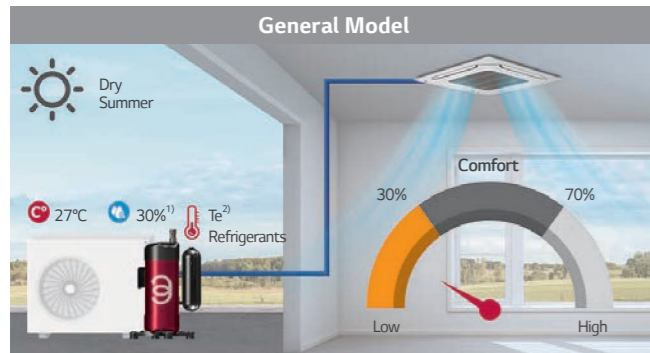


- **Uncomfortable Environment**  
Excessive latent heat elimination regardless of humidity
- **Waste Energy**  
Eliminate latent heat unnecessarily

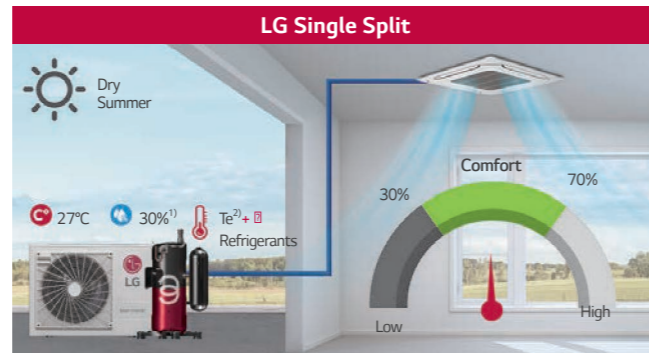


- **Comfortable Environment**  
By making the room less dry
- **Increased Energy Efficiency**  
Provide optimized cooling and save energy considering humidity  
Humidity Condition : Low (< 30%), Standard (30~70%)  
1) Indoor Condition 2) Evaporation Temperature

### Wet Summer

During a wet summer season, the system senses the high humidity levels and increases the operating ratio to rapidly decrease humidity for a more comfortable indoor environment.

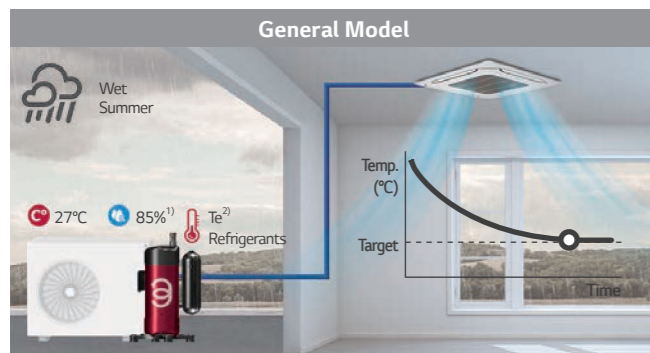

- **Uncomfortable Environment**  
General latent heat elimination regardless of humidity

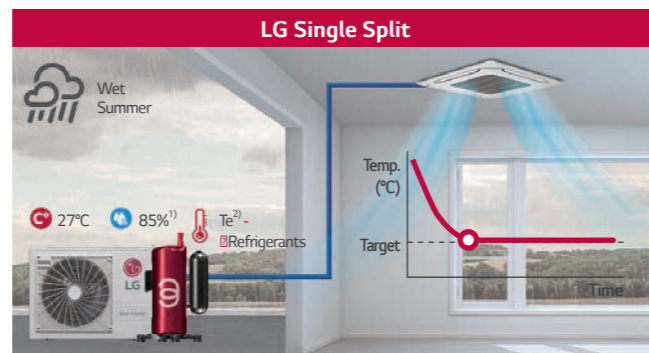

- **Comfortable Environment**  
Quick latent heat elimination with humidity sensors  
1) Indoor Condition 2) Evaporation Temperature

# COMFORTABLE ENVIRONMENT

## Night Silent Operation

Night Silent Operation can reduce noise levels at night time by simply setting the dip switch on the PCB of the outdoor unit.




※ Refer to the install manual for details.  
(Setting method, operation time)



\* The value is based on 1.4.6kW model.

## Continuous Cooling Operation

LG Single Split is able to perform continuous cooling at low ambient temperature (as low as -15°C)

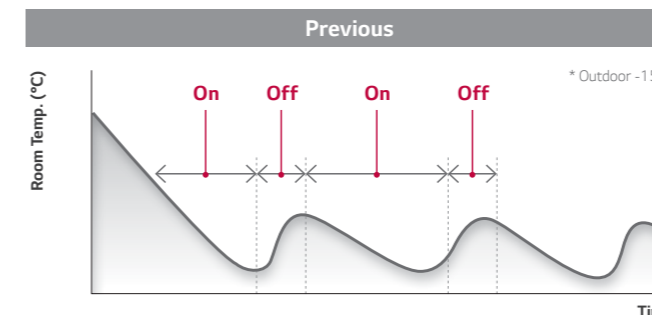

\* Based on a stand 36k model (before 2019)

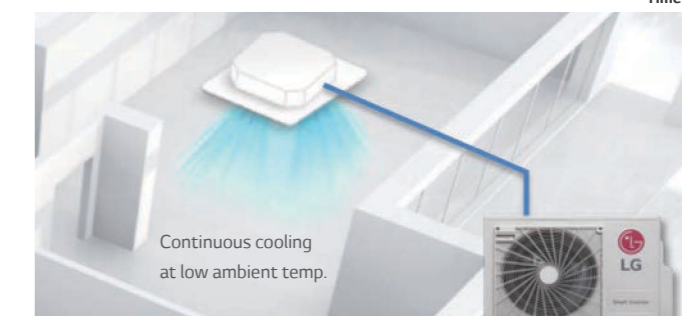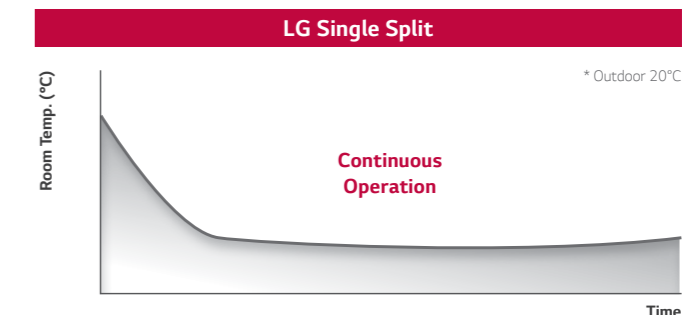

\* Based on a stand 36k model (after 2019)



# HIGH PERFORMANCE & RELIABILITY


## Quick & Reliable Operation

Through pressure and temperature sensing, the desired indoor temperature can be reached more rapidly.



- Quick response due to sensing with ready for operation.
- Target performance point is reached while avoiding compressor damage from liquid compression or oil shortage.

- With pressure sensing, the desired temperature is achieved in 30% less time in cooling and 44% in heating.


### Temperature Sensor Only

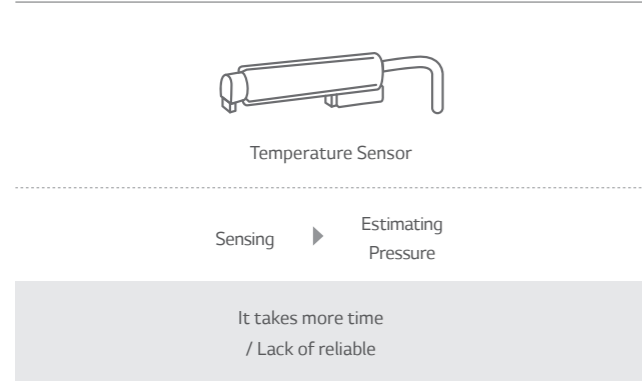

### Smart Sensor

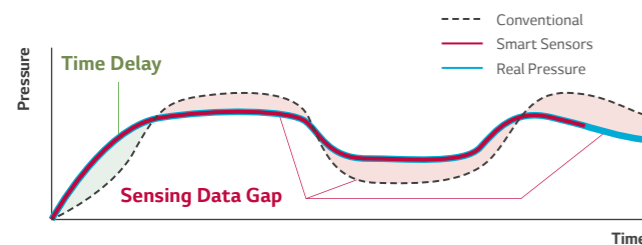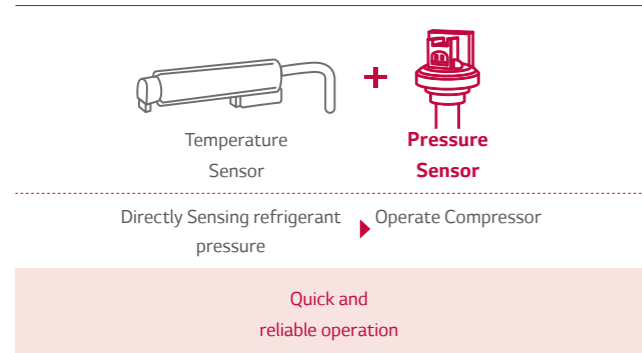


### • Cooling

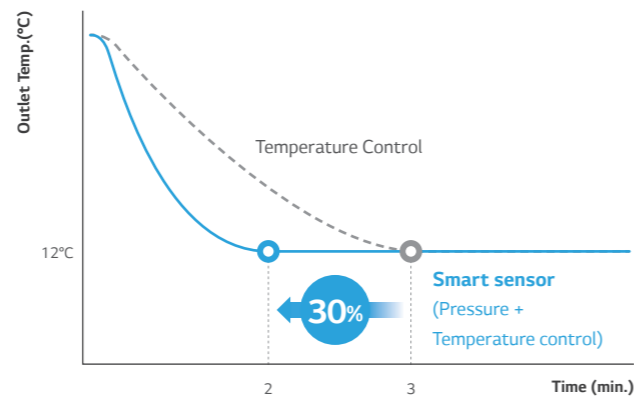

※ Based on internal test data

### • Heating

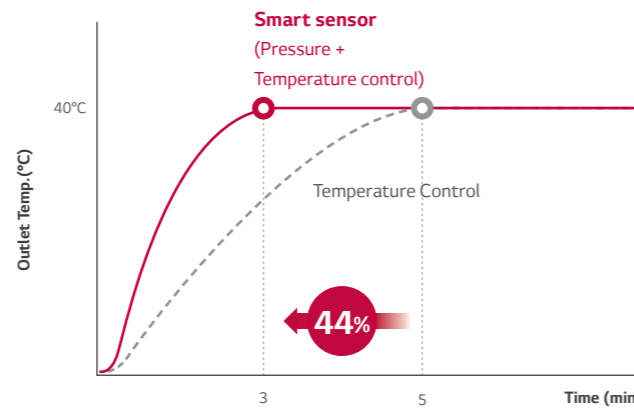


※ Based on internal test data

# HIGH PERFORMANCE & RELIABILITY

## R1 Compressor™

R1 Compressor is one that combines high-efficiency, low sound characteristics of the scroll and the simple compressing structure of the rotary compressor. This technology enables a highly efficient compact model.

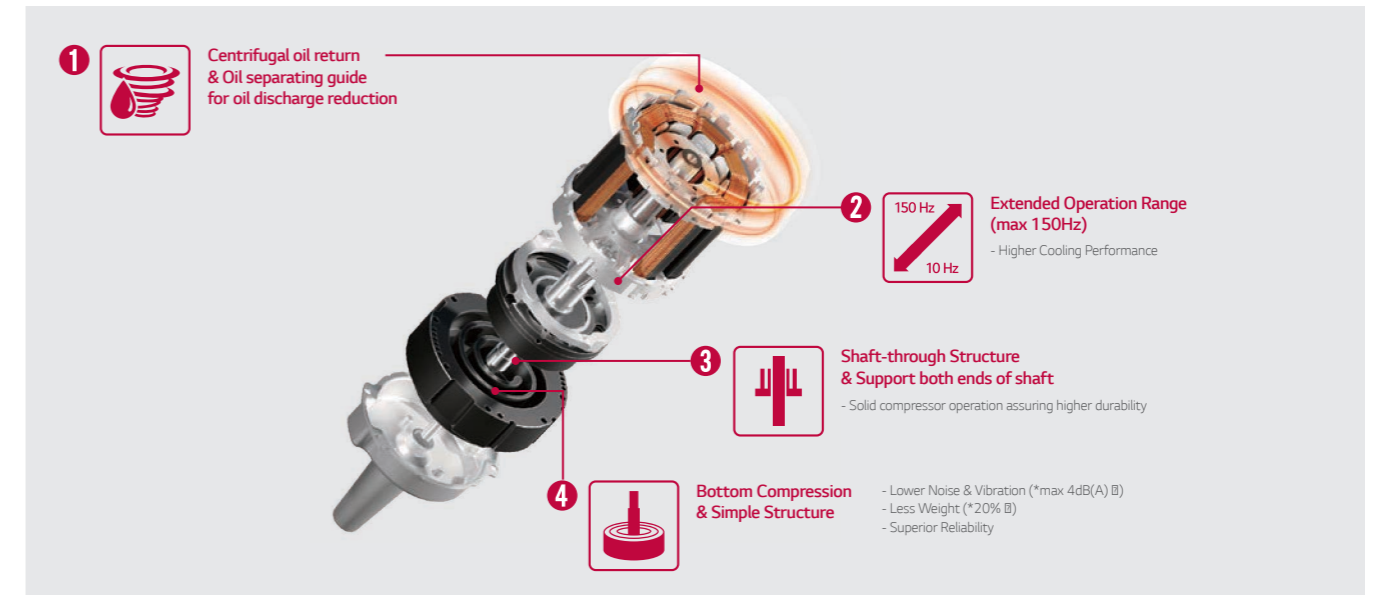


### Conventional Compressor

**Scroll :** High efficiency / Low sound  
(Continuous compression, but complex structure)



**Rotary :** Simple structure  
(Compression per 1 rotation)



### R1 Compressor™

**Revolutionary Scroll :** High efficiency / Stable Structure & Simple

**Hybrid Scroll Shape**

(LG patent)\*  
\* Patent registration number (S.Korea : 10-1059880, USA : RE46106)

**Motor**

**Compression parts (upper & lower)**

Scroll penetrated by shaft  
□ remove tilting moment

**Simple structure : without sub-frame**

Oil feeding structure better than previous scroll

**Oil**


Extended operation (Max. 150Hz)  
Low noise & Vibration (Max. 4dB(A) @)  
Less weight (20% @)

# HIGH PERFORMANCE & RELIABILITY

## Corrosion Resistance Black Fin

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution including fumes from factories.

**Longer Lifespan, Lower Maintenance Costs**

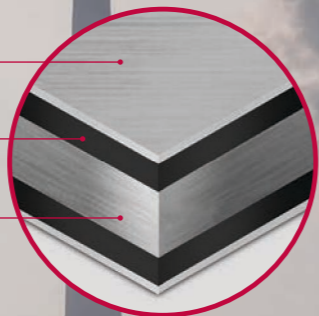


- Hydrophilic Film (Water Flow)**  
The Hydrophilic coating minimizes moisture buildup on the fin.
- Acryl + Epoxy + Melamine Resin (Corrosion Resistant)**  
The Black coating provides strong protection from corrosion.
- Aluminum Fin**

Note : Product is not fully treated for anti-corrosion. To install near the sea, additional treatment must be required.

### SST (Salt Spray Test)


Test Process



× Process repeated

Test process is conducted according to ISO 9227.  
1) Salty water concentration : NaCl aqueous solution (5%)


Test Result (5% Area of defects compared to initial)

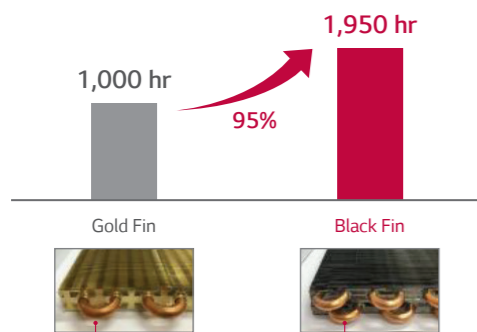

100% copper material to prevent corrosion & refrigerant leakage

### CCT (Cyclic Corrosion Test)


Test Process

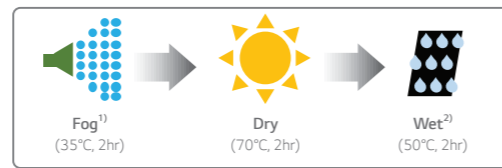

× Process Repeated

Test process is conducted according to ISO 14933.  
1) Salty water concentration : NaCl aqueous solution (5%)  
※ Dry condition changed : 60°C, 4hr ▯ 70°C, 2hr  
2) Deionized water

Test Result (5% Area of defects compared to initial)

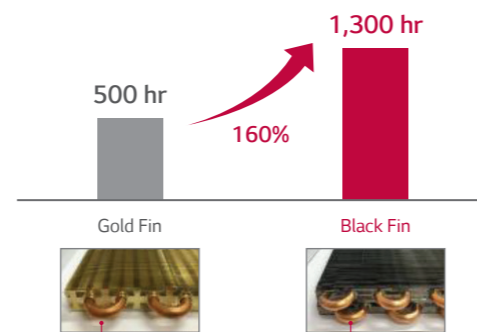


100% copper material to prevent corrosion & refrigerant leakage

# HIGH PERFORMANCE & RELIABILITY

## Long Pipe Installation

Maximum pipe length up to 85m and elevation length up to 30m provides flexibility for various conditions and easy installation.

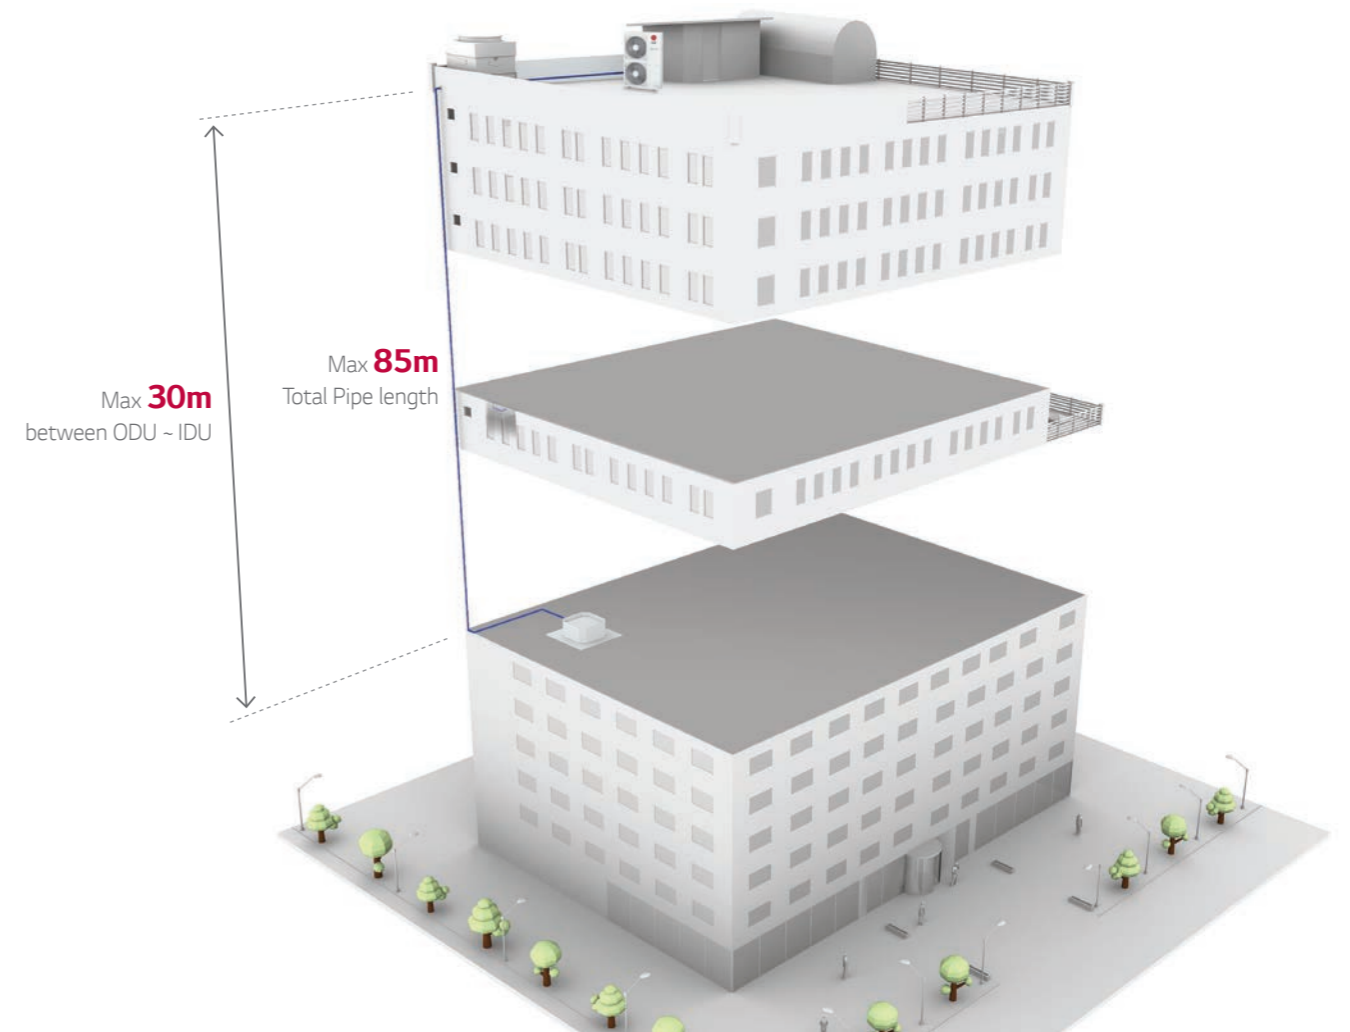

[Test condition]

- Location : LG HQ
- Installation : Apply the maximum pipe length by model
- Period : 3 month (checking oil level in real time)
- No use U-Trap

Model name	UUA1	UUB1	UUC1	UUD1 / UUD3
Total pipe length (m)	30	30 / 35*	50	85
Pipe Elevation Level ODU-IDU (m)	30	30	30	30

\* 24k, 30k

# CONVENIENT CONTROL SYSTEM


## LG ThinQ®

Users can control air conditioners using Android or iOS-enabled smartphones and voice commands via Google assistant and Amazon's Alexa.



※ Search "LG ThinQ" on Google or Apple store then download the app.  
 ※ Wi-Fi modem (PWFMD2200) is required by option.

### Access your air conditioner anytime and from anywhere

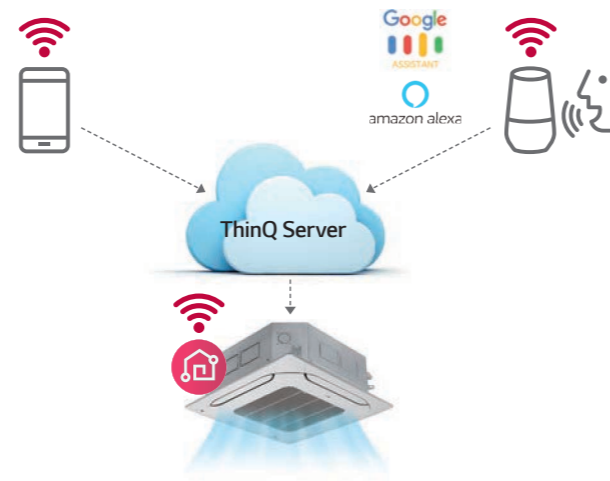


### Simple operation for various functions

- On/Off\*
- Mode Selection\*
- Current temperature\*
- Set temperature\*
- Set fan speed\*
- Vane Control

\* This functions are used by google assistant & amazon alexa  
 ※ In some countries, the use of the google assistant & amazon alexa system may be restricted.  
 - Launched country : Germany, UK, Ireland, Austria, Switzerland, France, Spain, Italy, Russia, Norway, Netherland, Portugal, Turkey, Sweden, Denmark

## Easy Control (Central Controller)

PI-485 is a gateway device that provides communication between LG Outdoor Units and LG central controllers such as ACP, AC Smart.

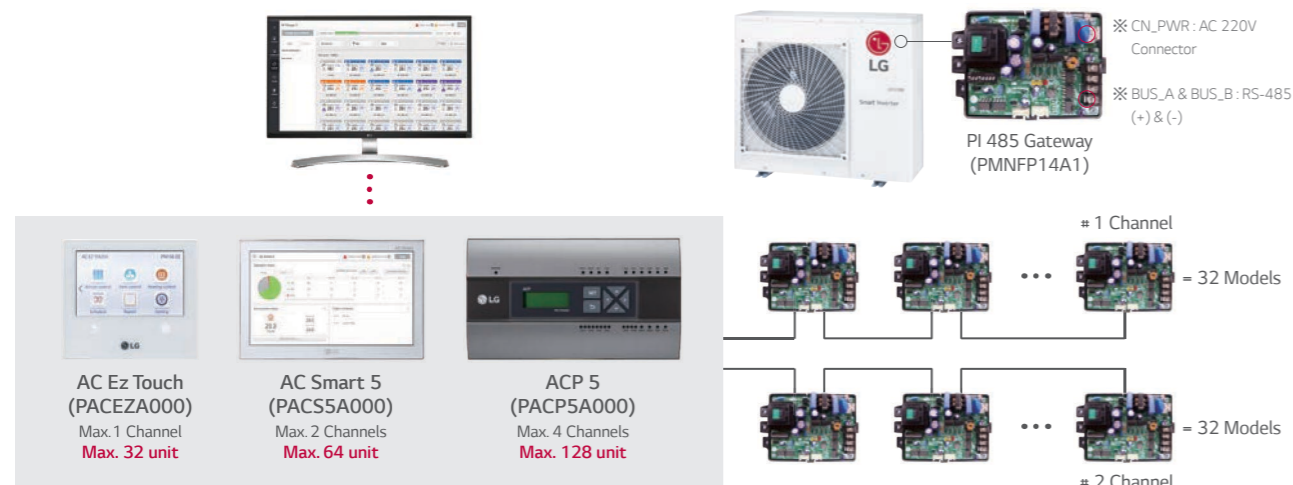


# CONVENIENT CONTROL SYSTEM

## 1 Point External Input (On / Off Control)

Indoor unit can be controlled by external devices without dry contact, so customer can save cost of installation.


Connection between an indoor unit and external devices directly

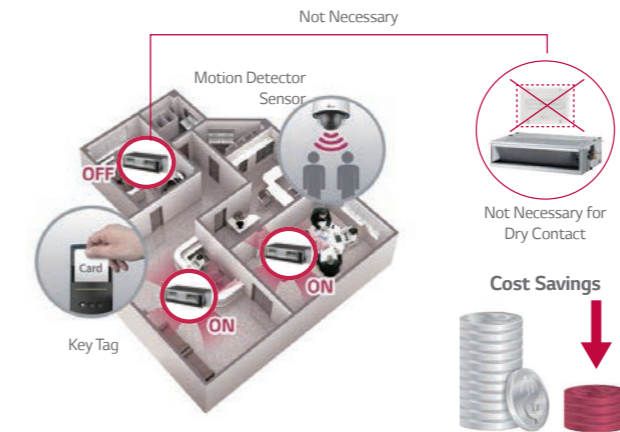

\* In case of needing more functions beside on / off control, a dry contact is required to be installed.

## Forced Cooling Operation

This function allows the refrigerant to be recharged or pumped down, regardless of the indoor temperature. Note that this function can be used when indoor units are being moved or repaired.

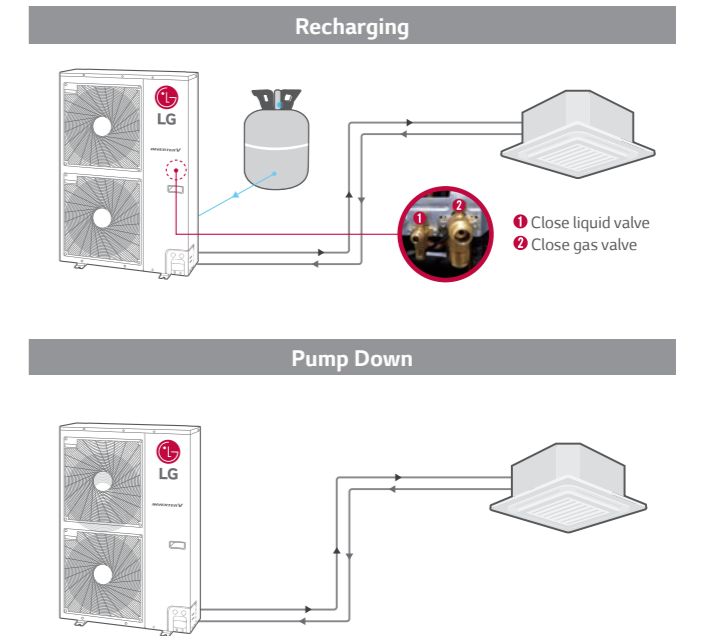

## Mobile LGMV

LGMV (Monitoring View) helps engineers to inspect and monitor air conditioning unit easily.




Install / SVC Engineer Mobile LGMV

### Error Indicator

Contents	
01	Air temperature sensor of indoor unit
02	Inlet pipe temperature sensor of indoor unit
03	Communication error : Wired Remote Controller & Indoor Unit
⋮	

A technician not only can check the cycle information with diagrams & graph, but also check easily the error status (troubleshooting guide) and take action immediately.

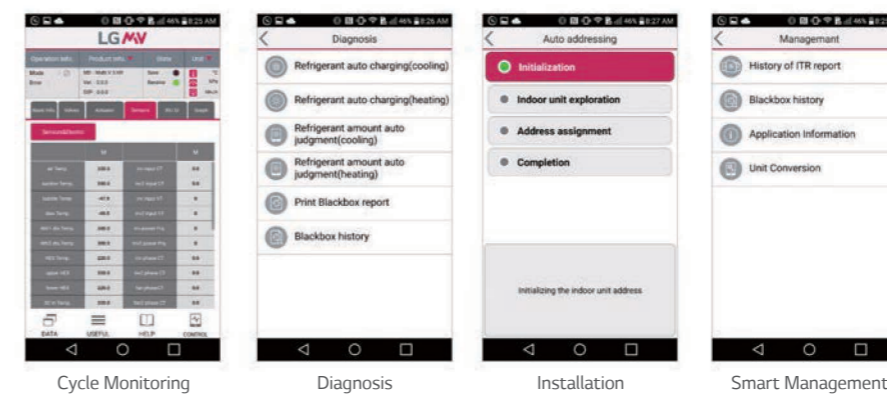


※ Search "Mobile LGMV" on Google or Apple store then download the app.  
 ※ Wi-Fi modem (PWFMD2200) is required by option.

# ENHANCED APPLICATION

## Synchro function

Maximum 4 indoor units can be combined by using a branch kit and setting dip switch for one outdoor unit. It can be easily applied to various sites.

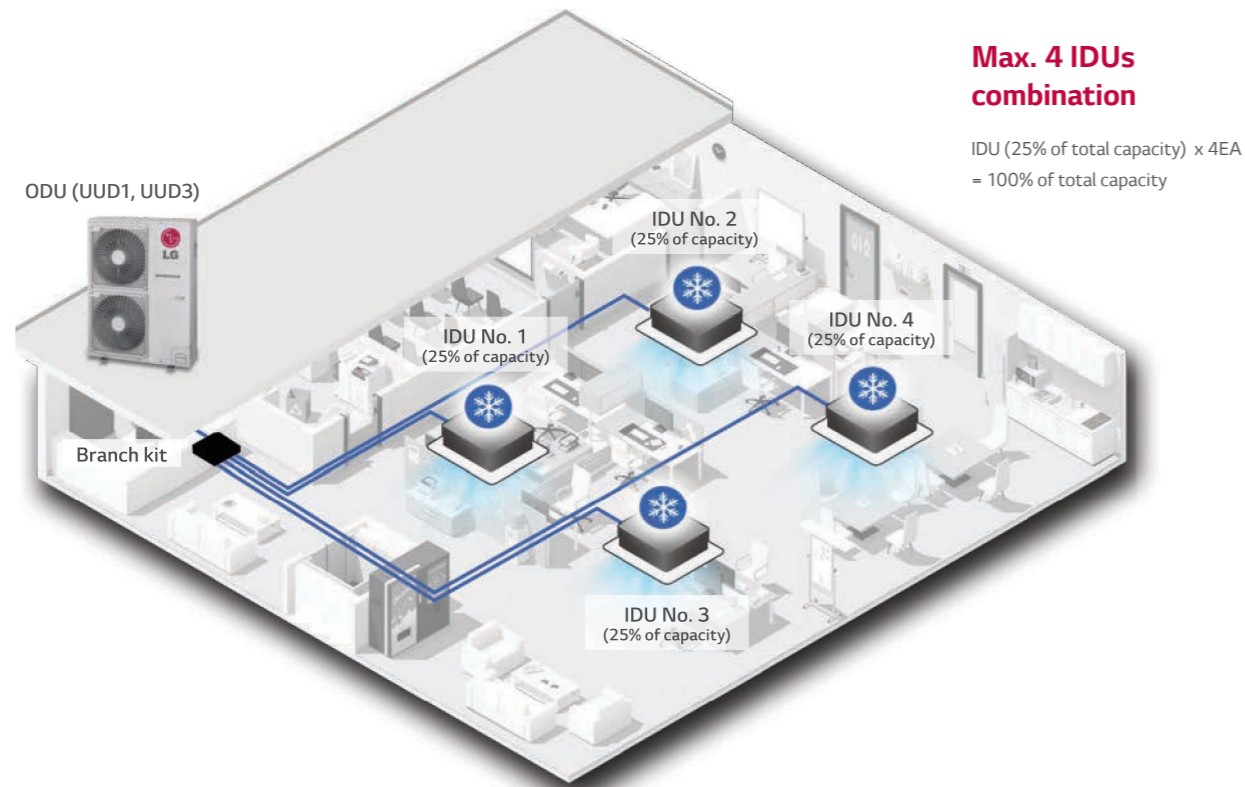

Combination table

Model	Duo		Trio		Quartet	
	Cassette	Duct	Cassette	Duct	Cassette	duct
UUD1, UUD3	CT18F x 2EA CT24F x 2EA UT30F x 2EA	CM18F x 2EA CM24F x 2EA UM30F x 2EA	CT12F x 3EA CT18F x 3EA	CL12F x 3EA CM18F x 3EA	CT12F x 4EA	CL12F x 4EA
Branch kit	PMUB11A		PMUB111A		PMUB1111A	
Dip switch						

Note  
 1. Possible indoor units: Single CAC indoor unit series  
 • Dry contact & Zone control & Auto changeover is not available which is connected with synchro.  
 • When using synchro operation  
 - Do not use wireless remote controller  
 - Use only one wired remote controller in the indoor units.  
 - Some Central controllers and some functions of central controller can not be available with synchro operation.  
 2. Branch kits are required for operating Synchro models.




# ENHANCED APPLICATION

## Connection with AHU


Single split can be connected to AHU using communication kit.

**SIMPLE** **COMPLICATED**

Simple and space saving  
 Easy installation  
 Low maintenance cost

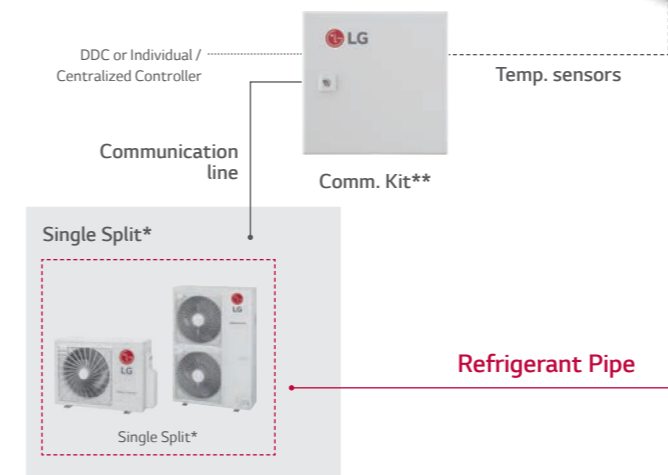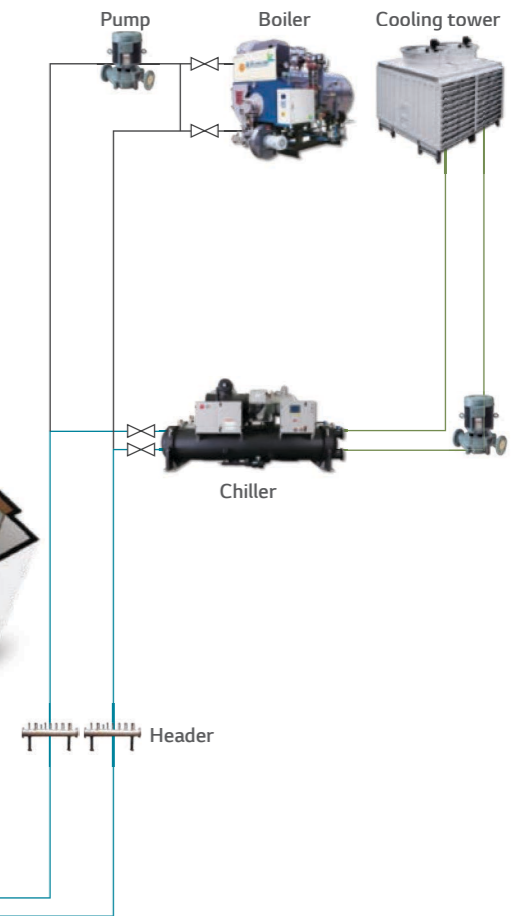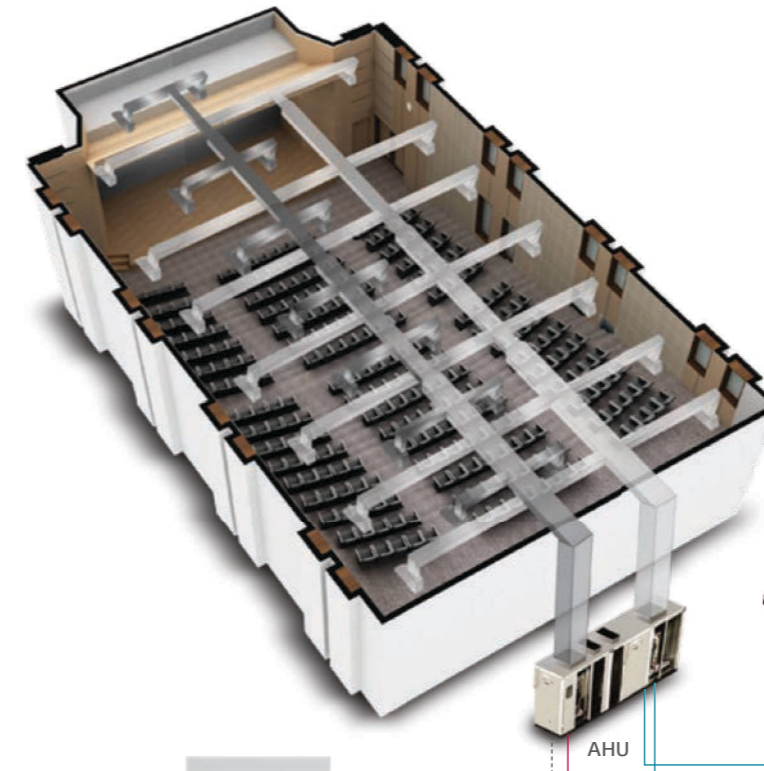

### Complicated piping work

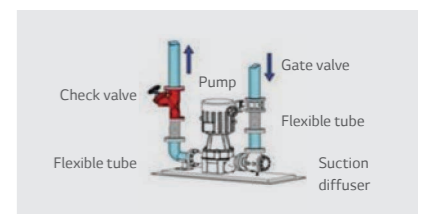

\* The single model can be applied only to UUB1, UUC1, UUD1, UUD3

\*\* Model name of communication kit  
 - RA air temperature control : PAHCMR000  
 - SA air temperature control : PAHCMS000

# CEILING MOUNTED CASSETTE




## NEW DESIGN

### 4-way air flow with new dual vane design


Innovative dual vane designs each of the best airflow over various spaces.



#### New types wind

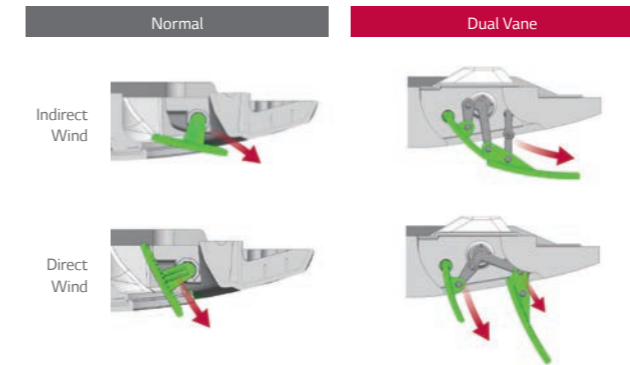

#### 6 air flow modes

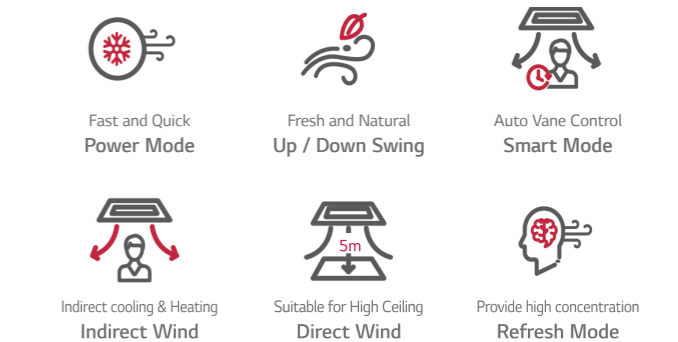

### Brighter Color

Color enhancement allows cassette to blend in to most interior ceiling spaces.



### Wide Design

Bigger inlet and outlet make faster cooling / heating airflow.



# NEW DESIGN


## Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, so it makes High Efficient and reduces noise level.



## High Efficiency Heat Exchanger (HEX)

Highly integrated heat exchanger is applied to increase cooling and heating efficiency.

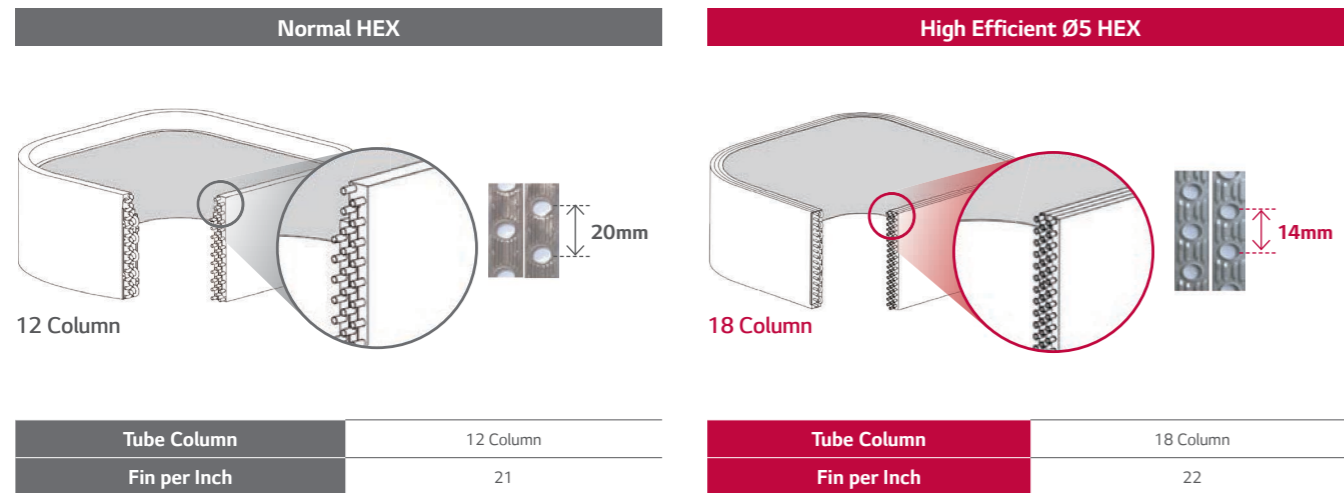


※This specification can be different as per each model.

# SMART

## Sensor reads temperature from ceiling to floor for heating


IDU provides the human oriented room temperature with sensing floor And calculating by floor and ceiling temperature by thermopile Sensor

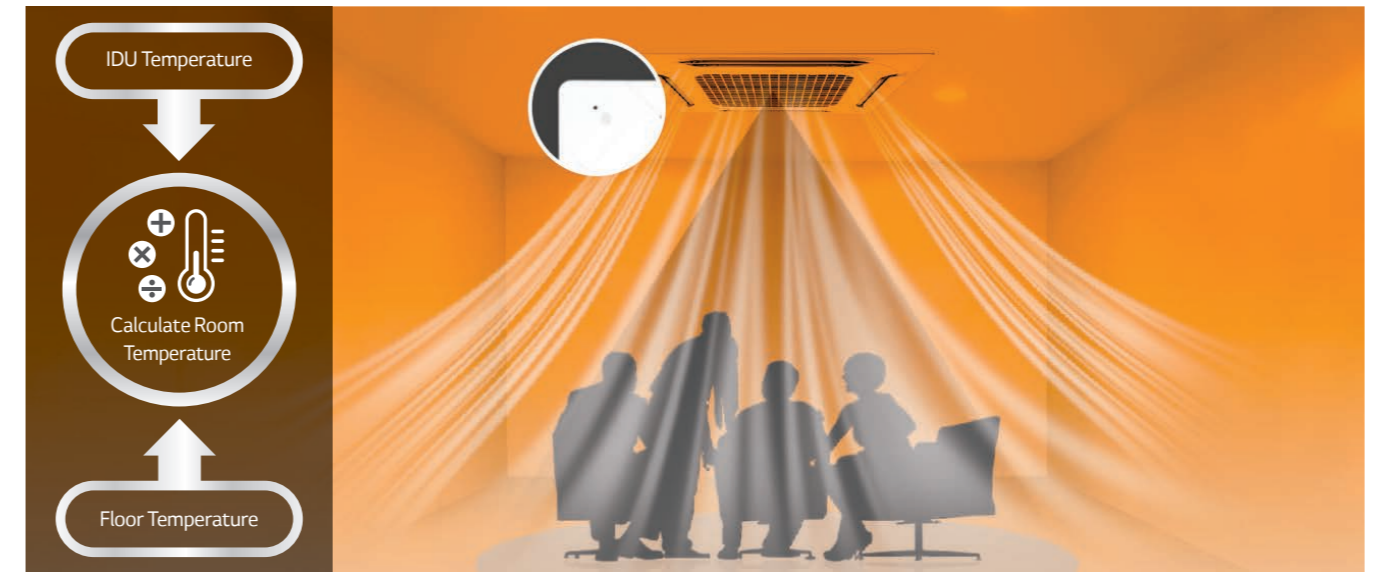

※ Available only for products with floor temperature sensor.

## Human detecting Direct / Indirect airflow


Human sensing function finds users to provide their favorite airflow.

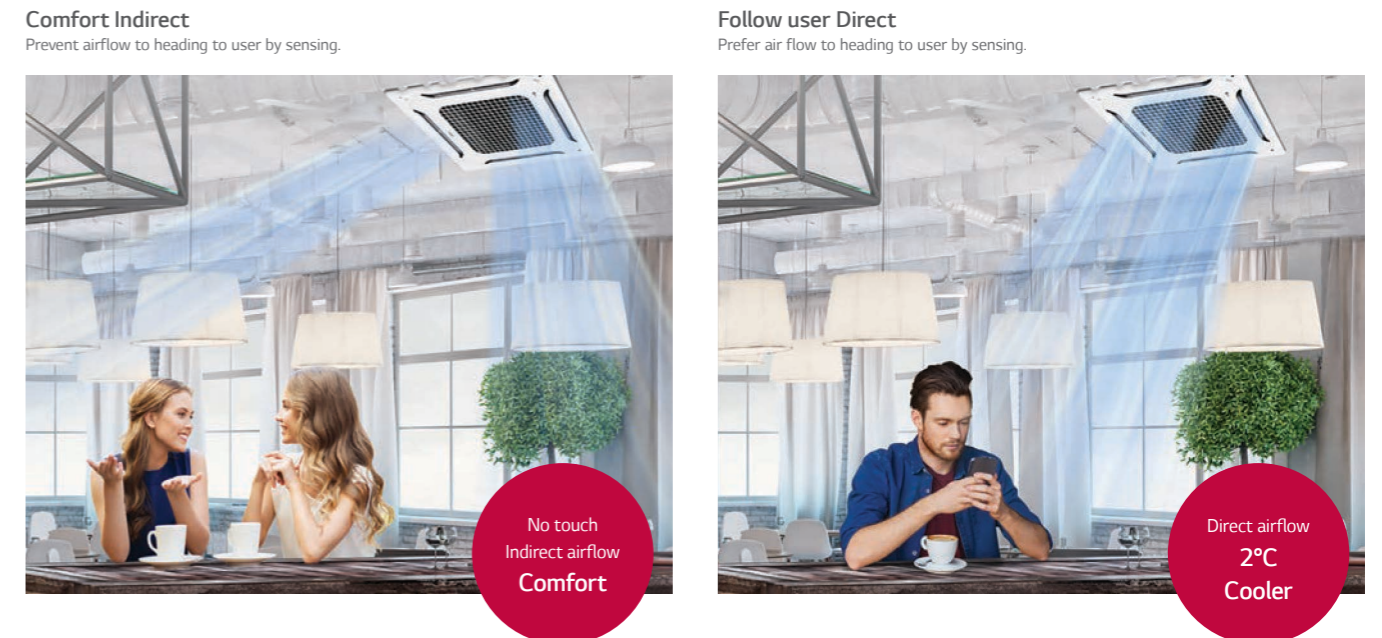

# SMART


## Human detecting ON/OFF Learning operation system

IDU senses people to switch ON/OFF for Max. 54% power saving.

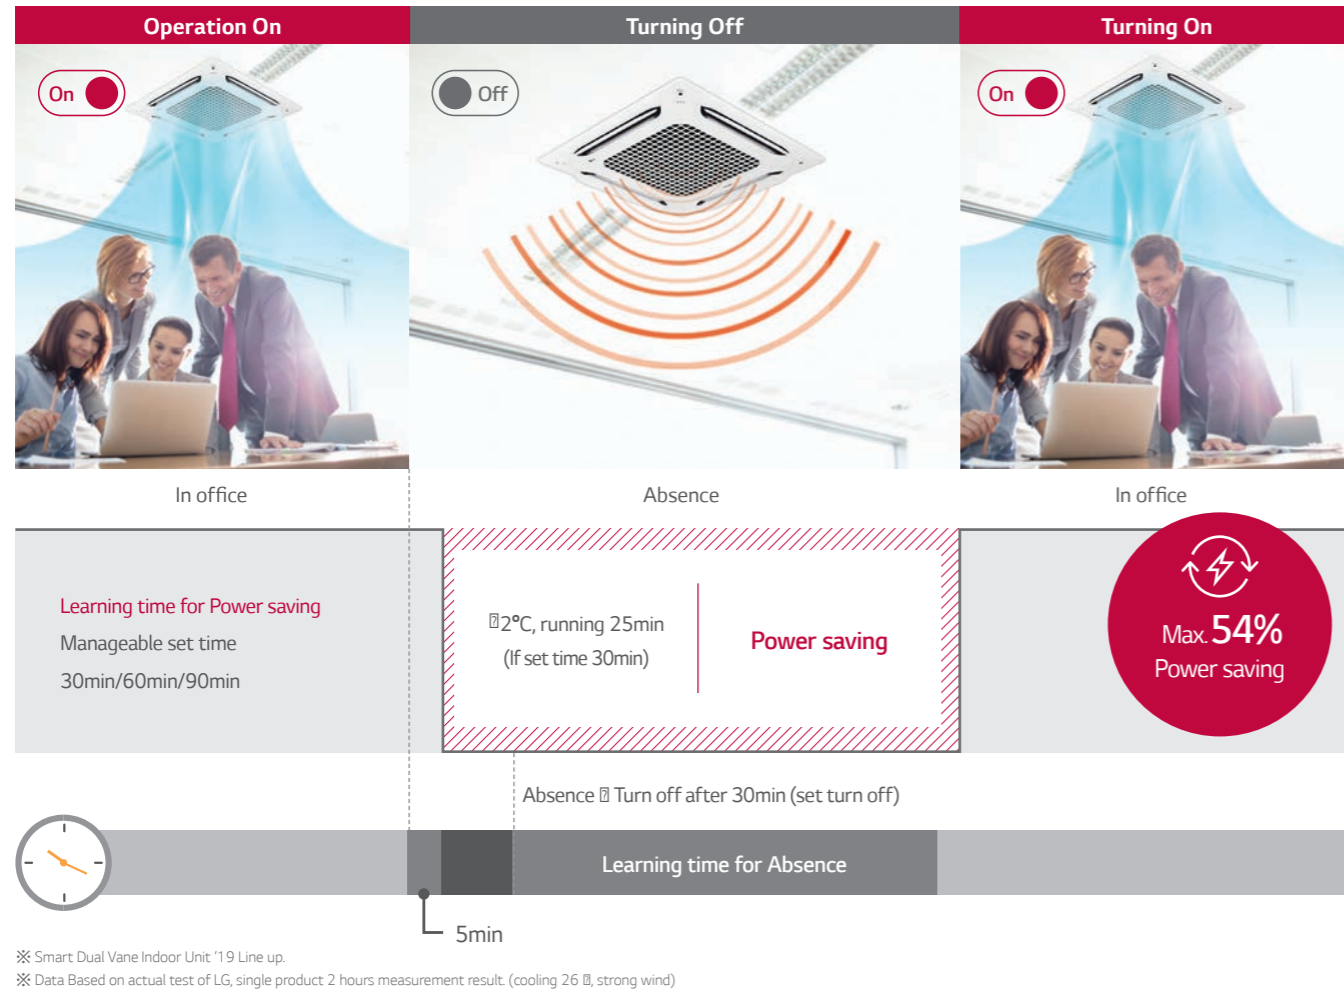

## Elevation Grill

4 lines of elevation grille contributes stable movement and convenient filter management.

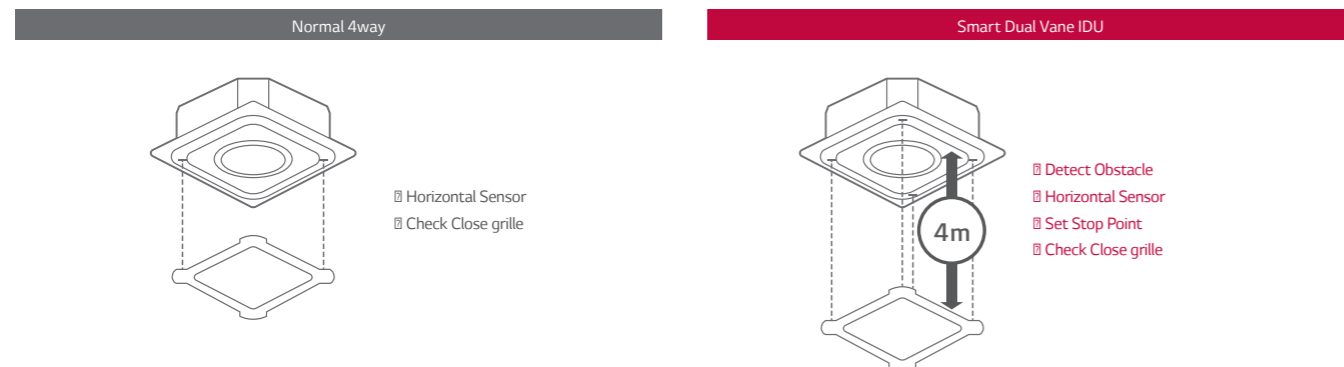

# SMART


## Everyday High performance of Air purifying

Air purifying function makes clean spaces for everyday.



## Convenient and Powerful 4 Steps Air purifying

Easy to manage air purifying system with one-touch air cleaning filter.

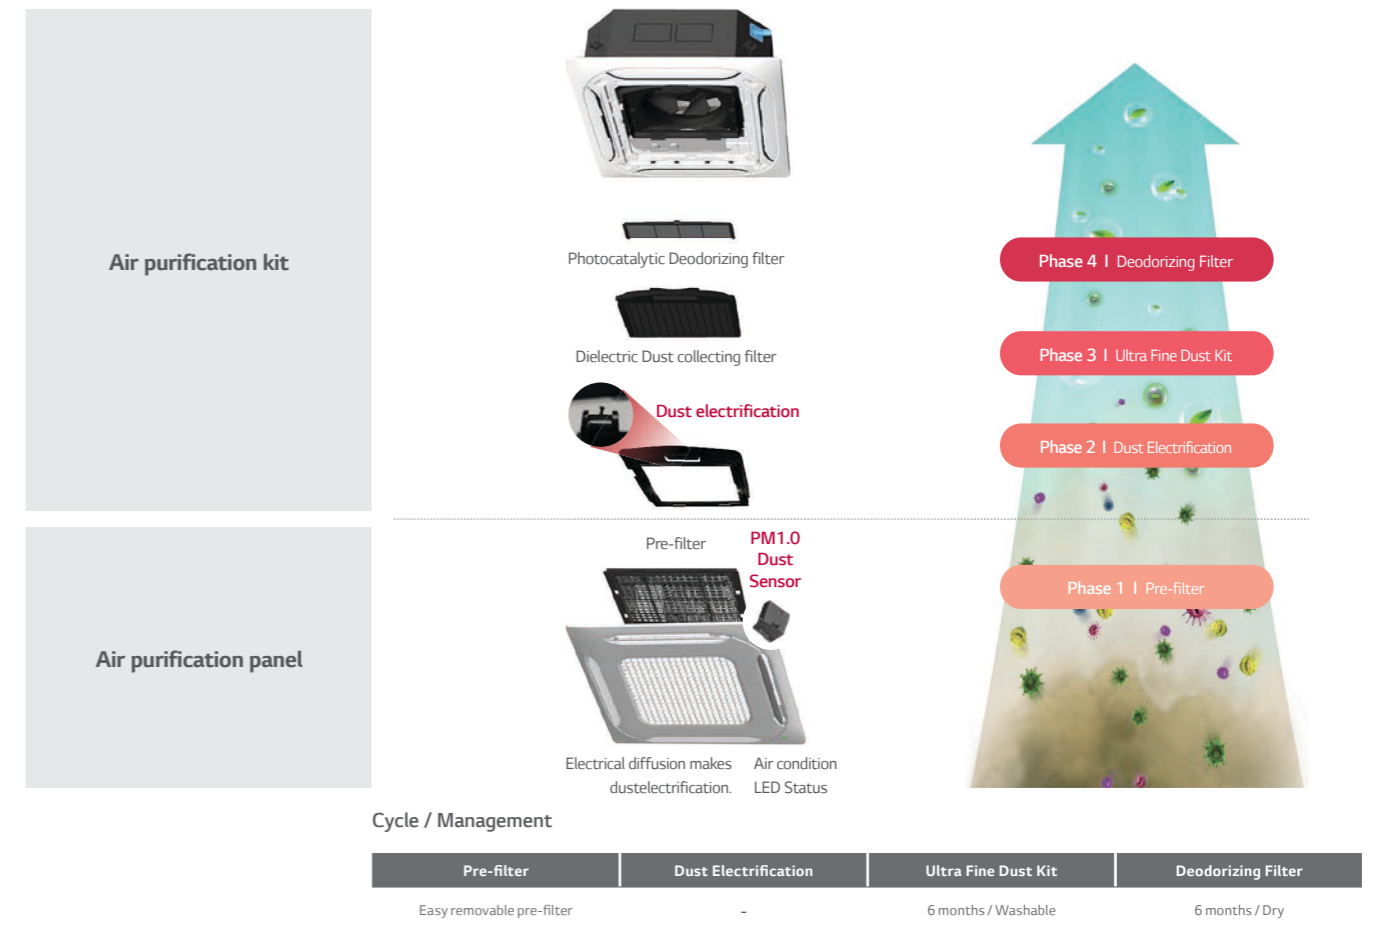

※ Available in case both Air Purification Kit (PTAFMPO) and Air purification panel (PTAFGW0) are installed.


# SMART

## Various Display of Air purifying

Installed Wi-Fi leads unlimited boundary to control IDU and display air purifying status.

**IDU LED**

Shows quality of Indoor air in real time



■ Good      ■ Bad  
■ Normal      ■ Very Bad


**Remote controller**

Display Air status and Fine Dust Concentration



**Mobile**


Whenever & Wherever  
Check and Control Air status



## Pairing LG ThinQ

Anywhere! Anytime! Can connect to IDU with LG ThinQ

- Monitoring Air status Easy to check indoor air status
  - Ultra Fine / Extra Fine / Fine Dust
  - Day / Week / Month / Yearly
- Mobile Remote Control Remote control by using mobile phone
  - Control Mode / Temperature / Air flow etc.
- Display Power Consumption Check power consumption of A/C
  - Check energy display
  - Set target energy consumption level

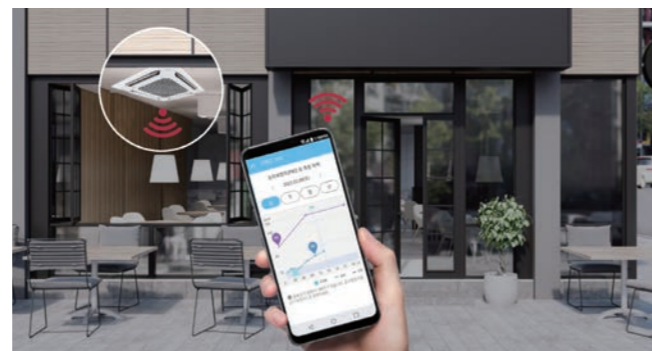

# CEILING MOUNTED CASSETTE



## H-INVERTER (R32)

UT09FH  
UT12FH  
UT18FH  
UT24FH  
UT30FH



UUA1 ULO

UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

COMBINATION				9	12	18	24	30
Capacity	Cooling	Min - Rated - Max	kW	1.6 / 2.5 / 4.0	1.6 / 3.4 / 4.8	2.0 / 5.0 / 6.0	2.7 / 6.8 / 8.3	3.2 / 8.0 / 9.5
	Heating	Min - Rated - Max	kW	1.7 / 3.2 / 4.5	1.7 / 4.1 / 5.8	2.3 / 5.8 / 7.0	3.2 / 7.9 / 9.9	3.6 / 9.0 / 10.7
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.32 / 0.61 / 0.98	0.32 / 0.97 / 1.78	0.30 / 1.25 / 1.69	0.30 / 1.66 / 2.31	0.40 / 2.12 / 2.82
	Heating	Min - Rated - Max	kW	0.32 / 0.75 / 1.06	0.32 / 1.03 / 1.87	0.30 / 1.47 / 1.98	0.40 / 1.76 / 2.53	0.40 / 2.14 / 2.93
Running Current	Cooling	Rated	A	2.7	4.3	7.2	7.4	9.4
	Heating	Rated	A	3.3	4.6	7.7	7.8	9.5
EER / COP			kWh/kWh	4.10 / 4.30	3.50 / 4.00	4.00 / 3.95	4.10 / 4.48	3.77 / 4.20
SEER / SCOP			kWh/kWh	7.0 / 4.0	6.8 / 4.0	7.6 / 4.4	8.5 / 4.8	7.8 / 4.8
Pdesign	Cooling @ 35ℓ		kW	2.5	3.4	5.0	6.8	8
	Heating @ -10ℓ		kW	2.8	2.8	4.1	5.5	5.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	A++ / A+	A+++ / A++	A++ / A++
Annual Energy Consumption	Cooling / Heating		kWh	125 / 980	175 / 980	230 / 1,305	280 / 1,604	359 / 1,604
Dehumidification Rate			l/h	0.1	0.8	1.9	1.7	2.7
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	49 / 52	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	63	65	68
	Liquid		mm (inch)	06.35 (1/4)	06.35 (1/4)	06.35 (1/4)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas		mm (inch)	09.52 (3/8)	09.52 (3/8)	012.7 (1/2)	015.88 (5/8)	015.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18	-20 - 18	-20 - 18

INDOOR				UT09FH NQ0	UT12FH NQ0	UT18FH NB0	UT24FH NAO	UT30FH NAO
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	30 / 26 / 22	30 / 26 / 22	33 / 26 / 22	43 / 35 / 28	43 / 35 / 28
Air Flow Rate		H / M / L	m³/min	11.0 / 10.0 / 9.3	11.0 / 10.0 / 9.3	17.0 / 15.5 / 14.0	23.8 / 21.4 / 19.0	23.8 / 21.4 / 19.0
Dimensions	Body	W x H x D	mm	570 x 256 x 570	570 x 256 x 570	840 x 204 x 840	840 x 288 x 840	840 x 288 x 840
Weight	Body		kg	13.9	13.9	21.1	25.3	25.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	41 / 39 / 37	41 / 39 / 37	37 / 36 / 34	42 / 41 / 40	42 / 41 / 40
Sound Power Level	Cooling	Max.	dB(A)	54	54	52	56	56
Piping Connections	Drain	O.D. / I.D.	mm	032.0 / 25.0	032.0 / 25.0	032.0 / 25.0	032.0 / 25.0	032.0 / 25.0
Recommended Decoration Panel*	Model Name		-	PT-QAGW0	PT-QAGW0	PT-AFGW0	PT-AFGW0	PT-AFGW0
	Color		-	White	White	White	White	White
Weight	Dimensions	Body	mm	620 x 34 x 620	620 x 34 x 620	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Body		kg	3.0	3.0	7.5	7.5	7.5

OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25
Power Supply Cable (included Earth)			No x mm³	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net		kg	33.3	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
	Type		-	R32	R32	R32
Refrigerant	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1.0	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283
Fan	Additional Charge (After 7.5m)		g/m	20	20	40
	Air Flow Rate	Rated	m³/minxNo.	28 x 1	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 30	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30	30

\* Decoration panel can be selected as an optional accessory.

Note:

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)



## CEILING MOUNTED CASSETTE



## H-INVERTER (R32)

UT36FH  
UT42FH  
UT48FH  
UT60FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD1 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	38 / 9.5 / 12.8	48 / 12.1 / 14.5	54 / 13.4 / 16.1	60 / 15.0 / 16.2
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8	7.0 / 17.5 / 19.3
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.40 / 2.15 / 3.23	0.60 / 3.14 / 4.24	0.80 / 3.83 / 5.17	0.90 / 4.69 / 5.25
	Heating	Min - Rated - Max	kW	0.50 / 2.40 / 3.36	0.70 / 3.29 / 4.28	0.80 / 4.19 / 5.24	1.10 / 5.38 / 6.19
Running Current	Cooling	Rated	A	9.6	13.8	16.9	20.5
	Heating	Rated	A	10.4	14.4	18.3	23.6
EER / COP			kWh/kWh	4.42 / 4.50	3.85 / 4.10	3.50 / 3.70	3.20 / 3.25
SEER / SCOP			kWh/kWh	7.6 / 4.5	7.4 / 4.5	6.8 / 4.5	6.6 / 4.5
Pdesign	Cooling @ 35B		kW	9.5	12.1	13.4	15
	Heating @ -10B		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	437 / 2,956	981 / 2,956	1,182 / 2,956	1,364 / 2,956
Dehumidification Rate			l/h	2.6	4.8	5.3	6.9
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flaredd	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	B	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	B	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UT36FH NAO	UT42FH NAO	UT48FH NAO	UT60FH NAO
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	70 / 59 / 50	70 / 59 / 50	81 / 60 / 50	81 / 60 / 50
Air Flow Rate		H / M / L	m³/min	28 / 25 / 23	28 / 25 / 23	30 / 27 / 24	30 / 27 / 24
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Weight		kg	27.2	27.2	27.2	27.2
Sound Pressure Level	Cooling	H / M / L	dB(A)	44 / 42 / 41	44 / 42 / 41	45 / 43 / 41	45 / 43 / 41
Sound Power Level	Cooling	Max.	dB(A)	59	59	61	61
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name		-	PT-AFGW0	PT-AFGW0	PT-AFGW0	PT-AFGW0
Recommended Decoration Panel*	Color		-	White	White	White	White
	Dimensions	Body	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Weight	Body	kg	7.5	7.5	7.5	7.5	

OUTDOOR				UUD1 U30			
Power Supply			Ø, V, Hz	1, 220-240, 50			
Circuit Breaker		Min	A	40			
Power Supply Cable (included Earth)			No x mm²	3C x 6.0			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
	Weight		kg	85.0			
Compressor	Type		-	Inverter Scroll			
	Type		-	R32			
Refrigerant	GWP (Global Warming Potential)		-	675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.		-	2.025			
	Additional Charge (After 7.5m)		g/m	40			
Fan	Air Flow Rate	Rated	m³/minxNo.	55 x 2			
	Total Piping Length	Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

## CEILING MOUNTED CASSETTE



## H-INVERTER (R32)

UT36FH  
UT42FH  
UT48FH  
UT60FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD3 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	38 / 9.5 / 12.8	48 / 12.1 / 14.5	54 / 13.4 / 16.1	60 / 15.0 / 16.2
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8	7.0 / 17.5 / 19.3
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.40 / 2.15 / 3.23	0.60 / 3.14 / 4.24	0.80 / 3.83 / 5.17	0.90 / 4.69 / 5.25
	Heating	Min - Rated - Max	kW	0.50 / 2.40 / 3.36	0.70 / 3.29 / 4.28	0.80 / 4.19 / 5.24	1.10 / 5.38 / 6.19
Running Current	Cooling	Rated	A	3.6	4.9	6.0	7.3
	Heating	Rated	A	3.8	5.1	6.5	8.2
EER / COP			kWh/kWh	4.42 / 4.50	3.85 / 4.10	3.50 / 3.70	3.20 / 3.25
SEER / SCOP			kWh/kWh	7.6 / 4.5	7.4 / 4.5	6.8 / 4.5	6.6 / 4.5
Pdesign	Cooling @ 35B		kW	9.5	12.1	13.4	15
	Heating @ -10B		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	437 / 2,956	981 / 2,956	1,182 / 2,956	1,364 / 2,956
Dehumidification Rate			l/h	2.6	4.8	5.3	6.9
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	B	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	B	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UT36FH NAO	UT42FH NAO	UT48FH NAO	UT60FH NAO
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	70 / 59 / 50	70 / 59 / 50	81 / 60 / 50	81 / 60 / 50
Air Flow Rate		H / M / L	m³/min	28 / 25 / 23	28 / 25 / 23	30 / 27 / 24	30 / 27 / 24
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Weight		kg	27.2	27.2	27.2	27.2
Sound Pressure Level	Cooling	H / M / L	dB(A)	44 / 42 / 41	44 / 42 / 41	45 / 43 / 41	45 / 43 / 41
Sound Power Level	Cooling	Max.	dB(A)	59	59	61	61
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name		-	PT-AFGW0	PT-AFGW0	PT-AFGW0	PT-AFGW0
Recommended Decoration Panel*	Color		-	White	White	White	White
	Dimensions	Body	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Weight	Body	kg	7.5	7.5	7.5	7.5	

OUTDOOR				UUD3 U30			
Power Supply			Ø, V, Hz	3, 380-415, 50			
Circuit Breaker		Min	A	20			
Power Supply Cable (included Earth)			No x mm²	5C x 2.5			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
	Weight		kg	85			
Compressor	Type		-	Inverter Scroll			
	Type		-	R32			
Refrigerant	GWP (Global Warming Potential)		-	675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.		-	2.025			
	Additional Charge (After 7.5m)		g/m	40			
Fan	Air Flow Rate	Rated	m³/minxNo.	55 x 2			
	Total Piping Length	Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

# CEILING MOUNTED CASSETTE



## STANDARD INVERTER (R32)

CT09F  
CT12F  
CT18F  
CT24F  
UT30F



UUA1 ULO

UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : [www.eurovent-certification.com](http://www.eurovent-certification.com)

COMBINATION				9	12	18	24	30
Capacity	Cooling	Min - Rated - Max	kW	1.5 / 2.5 / 3.2	1.5 / 3.4 / 4.5	2.0 / 5.0 / 5.8	2.7 / 6.8 / 8.0	3.2 / 8.0 / 9.2
	Heating	Min - Rated - Max	kW	1.8 / 3.2 / 3.7	1.8 / 4.1 / 5.0	2.3 / 5.7 / 6.6	3.0 / 7.5 / 9.0	3.6 / 8.9 / 10.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 0.61 / 0.87	0.30 / 0.98 / 1.62	0.30 / 1.57 / 2.20	0.40 / 1.93 / 2.66	0.50 / 2.45 / 3.14
	Heating	Min - Rated - Max	kW	0.30 / 0.75 / 0.89	0.30 / 1.11 / 1.57	0.30 / 1.52 / 2.13	0.40 / 1.96 / 2.84	0.50 / 2.62 / 3.25
Running Current	Cooling	Rated	A	2.7	4.4	8.0	8.6	10.9
	Heating	Rated	A	3.3	4.9	7.8	8.7	11.6
EER / COP			kWh/kWh	4.10 / 4.30	3.50 / 3.70	3.19 / 3.74	3.52 / 3.83	3.27 / 3.40
SEER / SCOP			kWh/kWh	6.7 / 4.0	6.7 / 4.0	6.4 / 4.3	7.4 / 4.3	7.1 / 4.3
Pdesign	Cooling @ 35ℓ		kW	2.5	3.4	5	6.8	8
	Heating @ -10ℓ		kW	2.8	2.8	4.1	5.6	5.6
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	131 / 980	178 / 980	273 / 1,335	322 / 1,823	394 / 1,823
Dehumidification Rate			l/h	0.63	1.26	1.89	2.8	2.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	49 / 52	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	63	65	68
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18	-20 - 18	-20 - 18

INDOOR				CT09F NRO	CT12F NRO	CT18F NQ0	CT24F NB0	UT30F NB0
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	26 / 22 / 19	28 / 24 / 20	30 / 26 / 22	36 / 26 / 21	40 / 33 / 26
Air Flow Rate		H / M / L	m³ / min	8.5 / 7.0 / 6.0	9.5 / 8.0 / 7.0	13 / 12 / 11	18 / 15.5 / 14	19 / 17 / 15.5
Dimensions	Body	W x H x D	mm	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840	840 x 204 x 840
Weight	Body		kg	1.24	1.24	1.39	2.11	2.11
Sound Pressure Level	Cooling	H / M / L	dB(A)	36 / 33 / 30	38 / 35 / 32	41 / 39 / 37	38 / 36 / 34	40 / 37 / 35
Sound Power Level	Cooling	Max.	dB(A)	52	52	57	53	57
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
Recommended Decoration Panel*	Model Name		-	PT-QAGW0	PT-QAGW0	PT-QAGW0	PT-AAGW0	PT-AAGW0
	Color		-	White	White	White	White	White
Dimensions	Body		mm	620 x 34 x 620	620 x 34 x 620	620 x 34 x 620	950 x 35 x 950	950 x 35 x 950
	Weight	Body	kg	3.0	3.0	3.0	7.1	7.1

OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25
Power Supply Cable (included Earth)			No x mm³	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net		kg	33.3	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
	Type		-	R32	R32	R32
Refrigerant	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1.0	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283
	Additional Charge (After 7.5m)		g/m	20	20	40
Fan	Air Flow Rate	Rated	m³/minxNo.	28 x 1	50 x 1	58 x 1
	Total Piping Length	Min / Max	m	5 / 30	5 / 30	5 / 30
Piping Elevation	IDU - ODU	Max	m	30	30	30

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

# CEILING MOUNTED CASSETTE



## STANDARD INVERTER (R32)

UT36F  
UT42F  
UT48F  
UT60F



UUD1 U30



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : [www.eurovent-certification.com](http://www.eurovent-certification.com)

COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	38 / 9.5 / 12.5	48 / 12.1 / 14.2	54 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.8 / 16.9 / 18.3
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.26 / 3.44	0.70 / 3.31 / 4.30	0.90 / 4.25 / 5.53	1.00 / 5.21 / 5.84
	Heating	Min - Rated - Max	kW	0.50 / 2.43 / 3.30	0.70 / 3.51 / 4.56	0.90 / 4.37 / 5.33	1.00 / 5.12 / 5.89
Running Current	Cooling	Rated	A	10.1	14.6	18.7	23.1
	Heating	Rated	A	10.7	15.0	19.0	22.7
EER / COP			kWh/kWh	4.20 / 4.45	3.66 / 3.85	3.15 / 3.55	2.80 / 3.30
SEER / SCOP			kWh/kWh	7.0 / 4.3	7.0 / 4.3	6.5 / 4.2	6.2 / 4.2
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1	13.4	14.6
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	475 / 3,093	1,037 / 3,093	1,237 / 3,167	1,413 / 3,167
Dehumidification Rate			l/h	4.5	2.4	5.7	6.6
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UT36F NAO	UT42F NAO	UT48F NAO	UT60F NAO
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	60 / 50 / 45	80 / 60 / 50	80 / 60 / 50	80 / 60 / 50
Air Flow Rate		H / M / L	m³/min	27.5 / 25 / 22.5	27.5 / 25 / 22.5	30 / 27.5 / 25	30 / 27.5 / 25
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
Weight	Body		kg	25.3	25.3	25.3	25.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	44 / 42 / 41	44 / 42 / 41	46 / 44 / 42	46 / 44 / 42
Sound Power Level	Cooling	Max.	dB(A)	61	61	62	62
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
Recommended Decoration Panel*	Model Name		-	PT-AAGW0	PT-AAGW0	PT-AAGW0	PT-AAGW0
	Color		-	White	White	White	White
Dimensions	Body		mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Weight	Body	kg	7.1	7.1	7.1	7.1

OUTDOOR				UUD1 U30
Power Supply			∅, V, Hz	1, 220-240, 50
Circuit Breaker		Min	A	40
Power Supply Cable (included Earth)			No x mm³	3C x 6.0
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330
Weight	Net		kg	85.0
Compressor	Type		-	Inverter Scroll
	Type		-	R32
Refrigerant	GWP (Global Warming Potential)		-	675
	Precharged Amount		kg	3.0
	t-CO <sub>2</sub> eq.		-	2.025
	Additional Charge (After 7.5m)		g/m	40
Fan	Air Flow Rate	Rated	m³/minxNo.	55 x 2
	Total Piping Length	Min / Max	m	5 / 85
Piping Elevation	IDU - ODU	Max	m	30

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

## CEILING MOUNTED CASSETTE



## STANDARD INVERTER (R32)

UT36F  
UT42F  
UT48F  
UT60F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com



UUD3 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.5	4.8 / 12.1 / 14.2	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.8 / 16.9 / 18.3
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.26 / 3.44	0.70 / 3.31 / 4.30	0.90 / 4.25 / 5.53	1.00 / 5.21 / 5.84
	Heating	Min - Rated - Max	kW	0.50 / 2.43 / 3.30	0.70 / 3.51 / 4.56	0.90 / 4.37 / 5.33	1.00 / 5.12 / 5.89
Running Current	Cooling	Rated	A	3.8	5.2	6.6	8.1
	Heating	Rated	A	3.9	5.4	6.7	7.9
EER / COP			kWh/kWh	4.20 / 4.45	3.66 / 3.85	3.15 / 3.55	2.80 / 3.30
SEER / SCOP			kWh/kWh	7.0 / 4.3	7.0 / 4.3	6.5 / 4.2	6.2 / 4.2
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1	13.4	14.6
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	475 / 3,093	1,037 / 3,093	1,237 / 3,167	1,413 / 3,167
Dehumidification Rate			l/h	2.4	4.5	5.7	6.6
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UT36F NAO	UT42F NAO	UT48F NAO	UT60F NAO
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	60 / 50 / 45	60 / 50 / 45	80 / 60 / 50	80 / 60 / 50
Air Flow Rate		H / M / L	m³/min	27.5 / 25 / 22.5	27.5 / 25 / 22.5	30 / 27.5 / 25	30 / 27.5 / 25
Dimensions	Body	W x H x D	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Weight	Body	kg	25.3	25.3	25.3	25.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	44 / 42 / 41	44 / 42 / 41	46 / 44 / 42	46 / 44 / 42
Sound Power Level	Cooling	Max.	dB(A)	61	61	62	62
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name		-	PT-AAGW0	PT-AAGW0	PT-AAGW0	PT-AAGW0
Recommended Decoration Panel*	Color		-	White	White	White	White
	Dimensions	Body	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Weight	Body	kg	7.1	7.1	7.1	7.1

OUTDOOR				UUD3 U30
Power Supply			Ø, V, Hz	3, 380-415, 50
Circuit Breaker		Min	A	20
Power Supply Cable (included Earth)			No x mm²	5C x 2.5
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330
	Weight	Net	kg	85.0
Compressor	Type		-	Inverter Scroll
	Type		-	R32
Refrigerant	GWP (Global Warming Potential)		-	675
	Precharged Amount		kg	3.0
	t-CO <sub>2</sub> eq.		-	2.025
	Additional Charging Volume		g/m	40
Fan	Air Flow Rate	Rated	m³/minxNo.	55 x 2
Total Piping Length		Min / Max	m	5 / 85
Piping Elevation	IDU - ODU	Max	m	30

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

## CEILING MOUNTED CASSETTE



## COMPACT INVERTER (R32)

CT18F  
CT24F  
UT30F  
UT36F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO

UUB1 U20

UUC1 U40



COMBINATION				18	24	30	36
Capacity	Cooling	Min - Rated - Max	kW	1.8 / 5.0 / 5.5	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.8
	Heating	Min - Rated - Max	kW	2.1 / 5.2 / 5.7	3.0 / 7.5 / 8.6	3.2 / 7.9 / 8.7	4.3 / 10.8 / 11.7
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.34 / 1.76 / 2.11	0.40 / 2.00 / 2.40	0.50 / 2.31 / 2.77	0.60 / 2.79 / 3.57
	Heating	Min - Rated - Max	kW	0.30 / 1.45 / 1.87	0.40 / 2.21 / 2.87	0.50 / 2.37 / 3.08	0.60 / 2.77 / 3.30
Running Current	Cooling	Rated	A	7.8	8.8	10.1	12.4
	Heating	Rated	A	6.4	9.6	10.4	12.3
EER / COP			kWh/kWh	2.85 / 3.60	3.40 / 3.39	3.25 / 3.34	3.40 / 3.90
SEER / SCOP			kWh/kWh	6.3 / 3.9	7.0 / 4.2	6.8 / 4.2	6.7 / 4.3
Pdesign	Cooling @ 35ℓ		kW	5	6.8	7.5	9.5
	Heating @ -10ℓ		kW	2.8	4.1	4.1	5.6
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	278 / 1,005	340 / 1,367	386 / 1,367	496 / 1,823
Dehumidification Rate			l/h	1.8	3.1	3.1	2.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	48 / 53	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	67	70
	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Piping Connections	Gas		mm (inch)	Ø9.52 (3/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-10 - 50	-10 - 48	-10 - 48	-20 - 50
	Heating	Min - Max	ℓ	-10 - 18	-15 - 18	-15 - 18	-15 - 18

INDOOR				CT18F NQ0	CT24F NB0	UT30F NB0	UT36F NAO
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	30 / 26 / 22	36 / 26 / 21	40 / 33 / 26	60 / 50 / 45
Air Flow Rate		H / M / L	m³/min	13 / 12 / 11	18 / 15.5 / 14	19 / 17 / 15.5	27.5 / 25 / 22.5
Dimensions	Body	W x H x D	mm	570 x 256 x 570	840 x 204 x 840	840 x 204 x 840	840 x 288 x 840
	Weight	Body	kg	13.9	21.1	21.1	25.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	41 / 39 / 37	38 / 36 / 34	40 / 37 / 35	44 / 42 / 41
Sound Power Level	Cooling	Max.	dB(A)	57	53	57	61
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0	Ø32.0 / 25.0
	Model Name		-	PT-QAGW0	PT-AAGW0	PT-AAGW0	PT-AAGW0
Recommended Decoration Panel*	Color		-	White	White	White	White
	Dimensions	Body	mm	620 x 34 x 620	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Weight	Body	kg	3.0	7.1	7.1	7.1

OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
	Weight	Net	kg	33.3	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
	Type		-	R32	R32	R32
Refrigerant	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1.0	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283
	Additional Charge (After 7.5m)		g/m	20	40	40
Fan	Air Flow Rate	Rated	m³/minxNo.	28 x 1	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 35	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30	30

\* Decoration panel can be selected as an optional accessory.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

# CASSETTE PANEL



## Model Name

PT-AAGW0  
PT-AEGW0  
PT-AFGW0  
PT-QAGW0

## Key Features

Model	Function					
	Dual Vane	Wi-Fi	FloorTemperatureSensor	Air Purification	Elevating Grille	Occupancy Sensor
PT-AAGW0	0	Optional	X	X	X	Optional
PT-AEGW0	0	Optional	X	X	0	Optional
PT-AFGW0	0	Optional	0	Optional	X	Optional

## Specification


Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)		
					W	H	D
PT-AAGW0	Grid	White (RAL 9003)	-	7.1	950	35	950
PT-AEGW0	Grid	White (RAL 9003)	-	8.5	950	35	950
PT-AFGW0	Grid	White (RAL 9003)	-	7.5	950	35	950
PT-QAGW0	Grid	White (RAL 9003)	-	3.0	620	34	620

## Air Purification Kit

Model	Image	Model name	Dielectric Dust collecting filter	Photocatalytic Deodorizing filter	HVPS	Ionizer
Air cleaning kit		PTAFMPO	0	0	0	0

# CASSETTE COVER

Cover in case of exposed cassette installation.

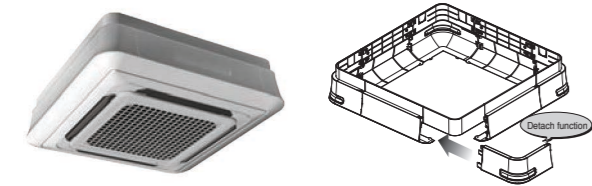

## Model Name


PTDCQ / PTDCA\*

## Applied Products

4 Way Cassette (for chassis TQ, TR)

## Included Parts

- Cover A, Cover B
- Cover C, Cover D
- Screws
- Installation Manual

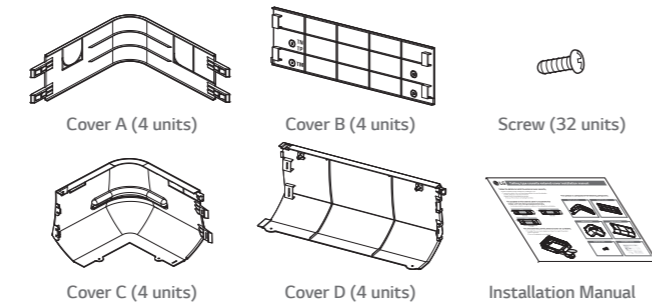

## Key Features

- Specially designed for indoor unit
- Covers the side area of cassette
- Gives elegant looks
- Light weight

## Specification

Model	Front Panel		Weight (kg)		Dimensions (mm)		
			NET	Gross	W	H	D
PTDCQ	PT-UQC	TR	5.0	7.2	907	907	268
		TQ	5.0	7.2	907	907	310

\* PTDCA suitable for Dual Vane 4 Way CST (840 x 840) will be available later


# CEILING CONCEALED DUCT



# CEILING CONCEALED DUCT


## External Static Pressure (ESP) Control

User has easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air volume. No additional accessories are necessary to control air flow.

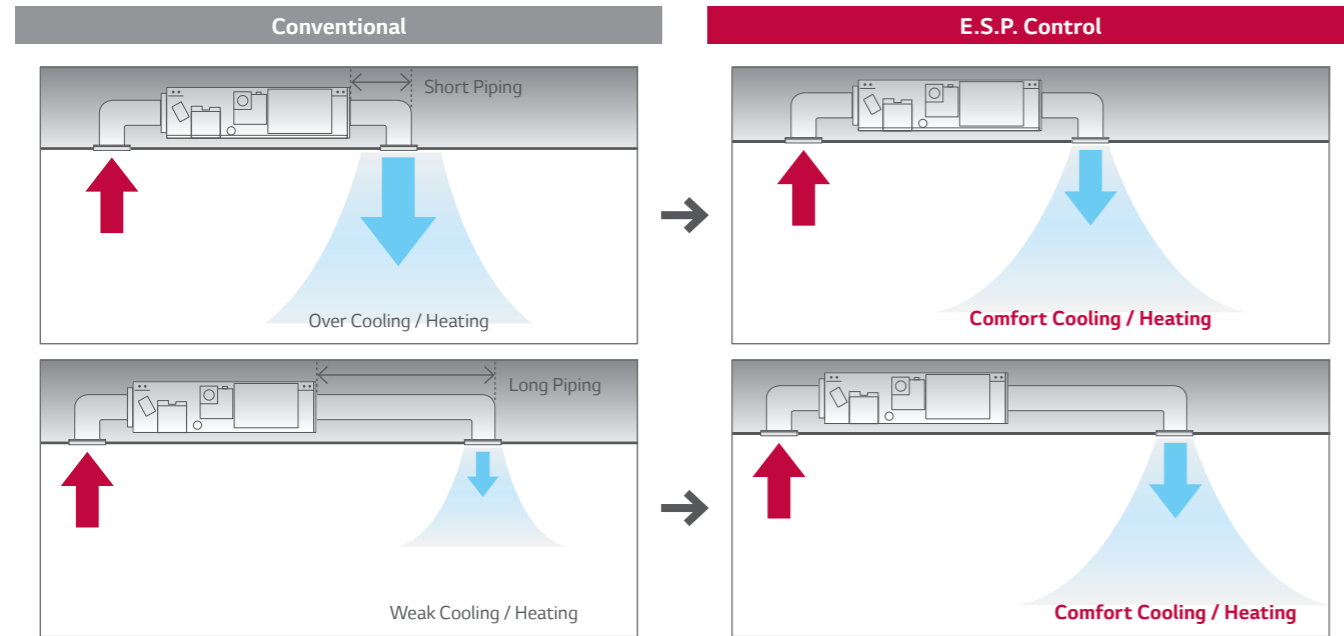

## High Head Drain Pump


High head drain pump automatically drains water up to a height of 700mm of drain-head height. It provides the perfect solution for draining of water. (Standard Inverter : Accessory (ABDPG) / Low-Static Duct : Included)

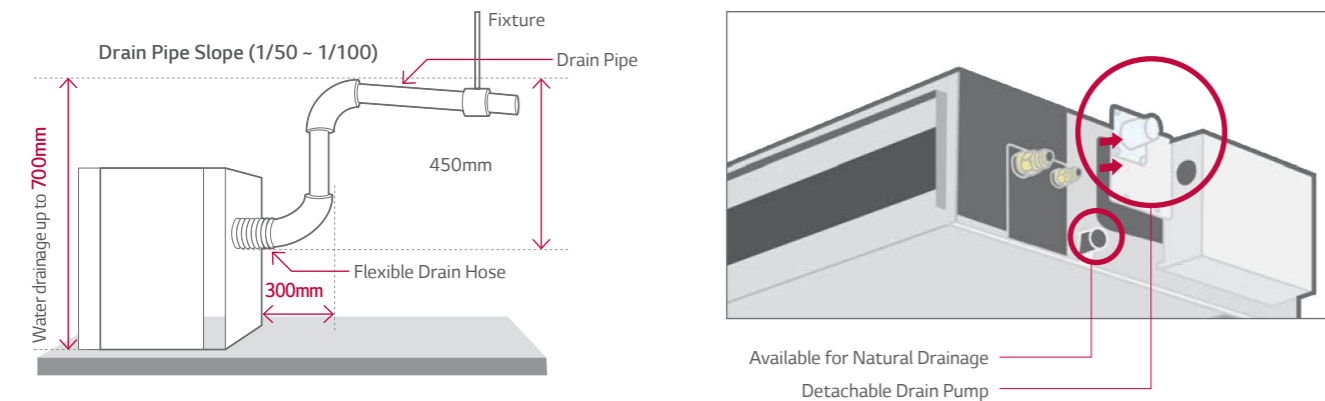

# CEILING CONCEALED DUCT

## Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.

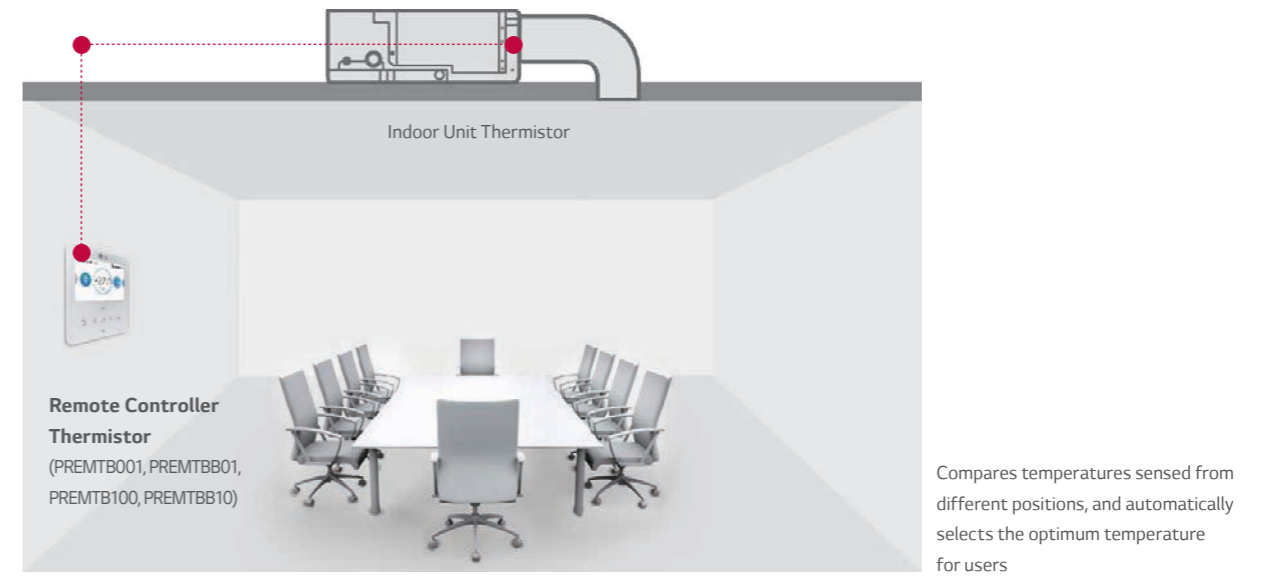


## Operation for Multiple Rooms

Using a spiral duct (Embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously. Also, zone control is available with zone controller accessory (ABZCA)

### Zone control features

- Controls different zones (up to 4 zones) by external thermostat (AC 24V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

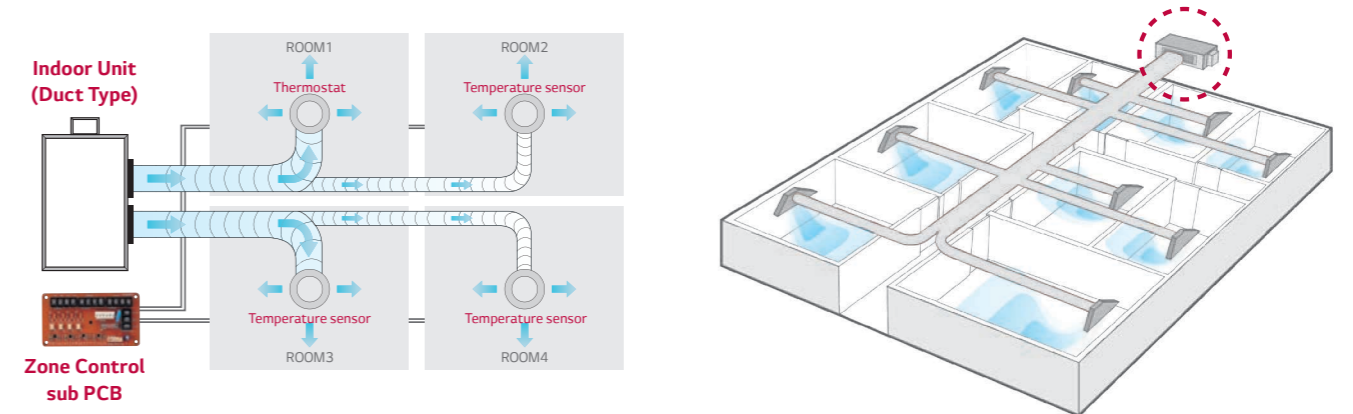


# CEILING CONCEALED DUCT


## Minimized Height and Depth

New Low Static ducts provide ideal solution for installation in limited space

### Low Static Duct

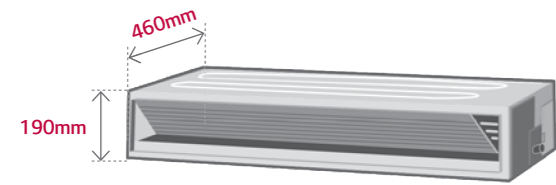


### Depth



\*CL09FN50, CL12FN50, CL18FN60, UL12FH.N50 only


## Wide Operation Range

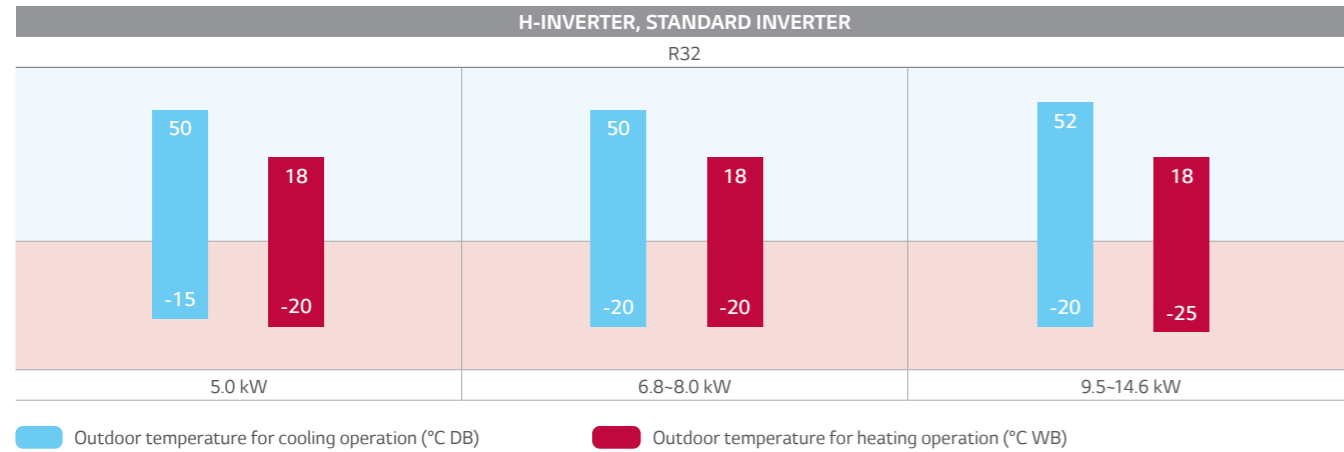

Blue bar: Outdoor temperature for cooling operation (°C DB)  
Red bar: Outdoor temperature for heating operation (°C WB)

## Easy Service & Maintenance

Users are not required to disassemble the whole panel for maintenance; since panel is divided into 2 components; one for heat exchanger and the other for fan/motor. The user can easily detach and re-attach the filter in the available limited space.

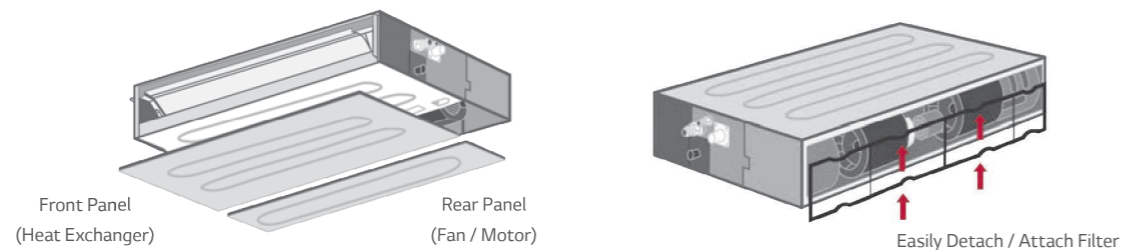


# CEILING CONCEALED DUCT (LOW STATIC PRESSURE)

## Quiet Operation


The noise level of low static ducts have been reduced, even though ESP has been increased.

	CL09F N50	CL12F N50	CL18F N60	CL24F N30
Sound Pressure (High / Medium / Low) dB (A)	35/30/27	35/30/27	34/31/29	39 / 35 / 32

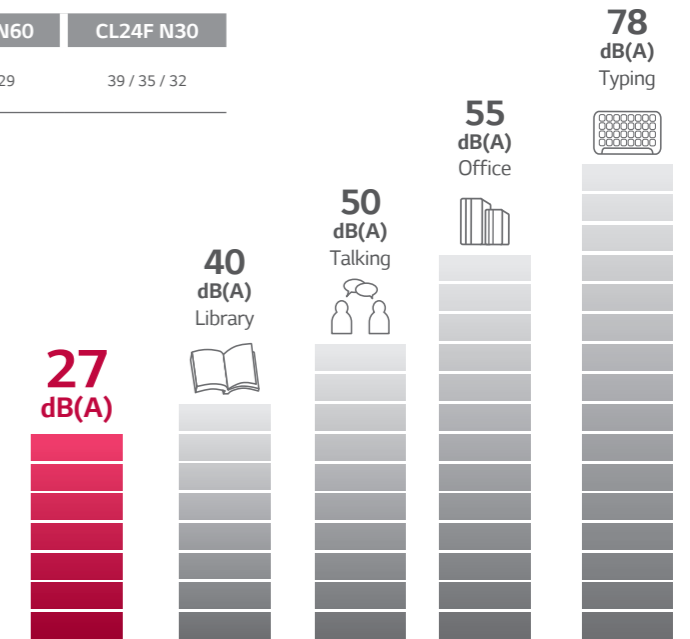

## Flexible Installation

Standard Inverter low static duct allows the air intake at the rear or bottom under installation condition.

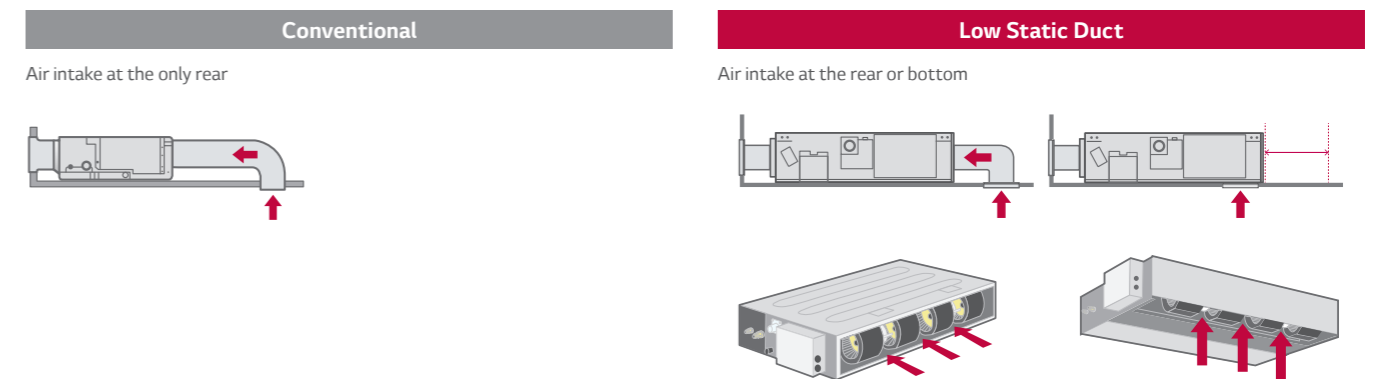

# CEILING CONCEALED DUCT



## H-INVERTER (R32)

### LOW STATIC PRESSURE - UL12FH / UL18FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO



UUB1 U20



COMBINATION				12	18
Capacity	Cooling	Min - Rated - Max	kW	1.5 / 3.4 / 4.7	2.0 / 5.0 / 6.0
	Heating	Min - Rated - Max	kW	1.8 / 4.0 / 4.9	2.3 / 5.8 / 7.0
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.33 / 1.06 / 1.84	0.30 / 1.39 / 1.88
	Heating	Min - Rated - Max	kW	0.33 / 1.08 / 1.63	0.30 / 1.57 / 2.12
Running Current	Cooling	Rated	A	4.7	7.6
	Heating	Rated	A	4.8	8.1
EER / COP			kWh/kWh	3.20 / 3.70	3.60 / 3.70
SEER / SCOP			kWh/kWh	6.1 / 4.0	6.5 / 4.1
Pdesign	Cooling @ 35ℓ		kW	3.4	5
	Heating @ -10ℓ		kW	2.9	4.1
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	195 / 1,015	269 / 1,400
Dehumidification Rate			l/h	0.8	2.6
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	47 / 52
	Cooling	Rated	dB(A)	65	63
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Connections Method		-	FLARED	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18

INDOOR				UL12FH N50	UL18FH N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	21 / 15 / 13	140 / 125 / 100
Air Flow Rate		H / M / L	m³/min	11.5 / 9.5 / 8	18.5 / 15 / 11
Dimensions	Body	W x H x D	mm	900 x 190 x 460	1,100 x 190 x 700
Weight	Body		kg	18	26.0
Sound Pressure Level	Cooling	H / M / L	dB(A)	35 / 30 / 27	38 / 34 / 31
Sound Power Level	Cooling	Max.	dB(A)	55	56
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUA1 ULO	UUB1 U20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330
Weight	Net		kg	33.3	44.5
Compressor	Type		-	Twin Rotary	Twin Rotary
	Type		-	R32	R32
Refrigerant	GWP (Global Warming Potential)		-	675	675
	Precharged Amount		kg	1.0	1.2
	t-CO <sub>2</sub> eq.		-	0.675	0.81
	Additional Charge (After 7.5m)		g/m	20	20
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 30
Piping Elevation	IDU - ODU	Max	m	30	30

# CEILING CONCEALED DUCT



## H-INVERTER (R32)

### MID STATIC PRESSURE - UM12FH / UM18FH / UM24FH / UM30FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO



UUB1 U20



UUC1 U40



COMBINATION				12	18	24	30
Capacity	Cooling	Min - Rated - Max	kW	1.6 / 3.5 / 5.1	2.0 / 5.0 / 6.0	2.7 / 6.8 / 8.3	3.1 / 7.8 / 9.3
	Heating	Min - Rated - Max	kW	1.6 / 4.0 / 5.8	2.3 / 5.8 / 7.0	3.0 / 7.5 / 9.4	3.6 / 9.0 / 10.7
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.32 / 1.03 / 1.93	0.30 / 1.26 / 1.70	0.40 / 1.84 / 2.56	0.50 / 2.25 / 2.99
	Heating	Min - Rated - Max	kW	0.32 / 0.98 / 1.85	0.30 / 1.49 / 2.01	0.40 / 1.75 / 2.52	0.50 / 2.27 / 3.11
Running Current	Cooling	Rated	A	4.6	7.3	8.2	10.0
	Heating	Rated	A	4.3	7.8	7.8	10.1
EER / COP			kWh/kWh	3.40 / 4.10	3.96 / 3.89	3.70 / 4.28	3.51 / 3.97
SEER / SCOP			kWh/kWh	6.1 / 3.9	6.6 / 4.2	6.8 / 4.3	6.6 / 4.3
Pdesign	Cooling @ 35ℓ		kW	3.5	5	6.8	7.8
	Heating @ -10ℓ		kW	2.8	4.4	5.4	5.4
Seasonal Energy Label	Cooling / Heating		-	A++ / A	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	201 / 1,005	265 / 1,467	350 / 1,758	419 / 1,758
Dehumidification Rate			l/h	0.4	1.3	1.2	2.2
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	47 / 52	48 / 52	50 / 52
	Cooling	Rated	dB(A)	65	63	65	68
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18	-20 - 18

INDOOR				UM12FH N10	UM18FH N10	UM24FH N20	UM30FH N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	150 / 130 / 110	180 / 150 / 130	134 / 101 / 80	134 / 101 / 80
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13	17.5 / 16 / 14	28 / 24 / 21	28 / 24 / 21
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700
Weight	Body		kg	25.4	27.0	39.3	39.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 32 / 30	35 / 34 / 32	34 / 33 / 32	34 / 33 / 32
Sound Power Level	Cooling	Max.	dB(A)	56	60	59	59
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net		kg	33.3	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
	Type		-	R32	R32	R32
Refrigerant	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1.0	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283
	Additional Charge (After 7.5m)		g/m	20	20	40
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 30	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30	30

## CEILING CONCEALED DUCT



## H-INVERTER (R32)

## MID STATIC PRESSURE

- UM36FH / UM42FH / UM48FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

## UUD1 U30



COMBINATION				36	42	48
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.8	4.8 / 12.0 / 14.4	5.4 / 13.4 / 16.1
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2	6.2 / 15.5 / 17.8
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.26 / 3.39	0.70 / 3.38 / 4.56	0.80 / 4.12 / 5.56
	Heating	Min - Rated - Max	kW	0.50 / 2.57 / 3.60	0.70 / 3.51 / 4.56	0.80 / 4.19 / 5.24
Running Current	Cooling	Rated	A	10.0	14.9	18.1
	Heating	Rated	A	11.3	15.3	18.4
EER / COP			kWh/kWh	4.20 / 4.20	3.55 / 3.85	3.25 / 3.70
SEER / SCOP			kWh/kWh	6.4 / 4.2	6.2 / 4.1	6.1 / 4.1
Pdesign	Cooling @ 35ℓ		kW	9.5	12	13.4
	Heating @ -10ℓ		kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	-
Annual Energy Consumption	Cooling / Heating		kWh	520 / 3,167	677 / 3,244	1,318 / 3,244
Dehumidification Rate			l/h	2.0	4.2	4.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18

INDOOR				UM36FH N30	UM42FH N30	UM48FH N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	242 / 159 / 124	242 / 159 / 124	242 / 159 / 124
Air Flow Rate		H / M / L	m³/min	40 / 34 / 28	40 / 34 / 28	40 / 34 / 28
Dimensions	Body	W x H x D	mm	1,250 x 360 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body		kg	44.3	44.3	44.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	39 / 38 / 36	39 / 38 / 36	39 / 38 / 36
Sound Power Level	Cooling	Max.	dB(A)	65	65	65
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUD1 U30		
Power Supply			Ø, V, Hz	1, 220-240, 50		
Circuit Breaker		Min	A	40		
Power Supply Cable (included Earth)			No x mm²	3C x 6.0		
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330		
Weight	Net		kg	85.0		
Compressor	Type		-	Inverter Scroll		
	Type		-	R32		
	GWP (Global Warming Potential)		-	675		
	Precharged Amount		kg	3.0		
	t-CO <sub>2</sub> eq.		-	2.025		
Refrigerant	Additional Charge (After 7.5m)		g/m	40		
			-	2.025		
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2		
Total Piping Length		Min / Max	m	5 / 85		
Piping Elevation	IDU - ODU	Max	m	30		


## CEILING CONCEALED DUCT



## H-INVERTER (R32)

## MID STATIC PRESSURE

- UM36FH / UM42FH / UM48FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

## UUD3 U30



COMBINATION				36	42	48
Capacity	Cooling	Min - Rated - Max	kW	3.8 - 9.5 - 12.8	4.8 - 12.0 - 14.4	5.4 - 13.4 - 16.1
	Heating	Min - Rated - Max	kW	4.3 - 10.8 - 13.7	5.4 - 13.5 - 16.2	6.2 - 15.5 - 17.8
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 - 2.26 - 3.39	0.70 - 3.38 - 4.56	0.80 - 4.12 - 5.56
	Heating	Min - Rated - Max	kW	0.50 - 2.57 - 3.60	0.70 - 3.51 - 4.56	0.80 - 4.19 - 5.24
Running Current	Cooling	Rated	A	3.8	5.3	6.5
	Heating	Rated	A	4.1	5.5	6.5
EER / COP			kWh/kWh	4.20 / 4.20	3.55 / 3.85	3.25 / 3.70
SEER / SCOP			kWh/kWh	6.4 / 4.2	6.2 / 4.1	6.1 / 4.1
Pdesign	Cooling @ 35ℓ		kW	9.5	12	13.4
	Heating @ -10ℓ		kW	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	-
Annual Energy Consumption	Cooling / Heating		kWh	520 / 3,167	677 / 3,244	1,318 / 3,244
Dehumidification Rate			l/h	2.0	4.2	4.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18

INDOOR				UM36FH N30	UM42FH N30	UM48FH N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	242 / 159 / 124	242 / 159 / 124	242 / 159 / 124
Air Flow Rate		H / M / L	m³/min	40 / 34 / 28	40 / 34 / 28	40 / 34 / 28
Dimensions	Body	W x H x D	mm	1,250 x 360 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body		kg	44.3	44.3	44.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	39 / 38 / 36	39 / 38 / 36	39 / 38 / 36
Sound Power Level	Cooling	Max.	dB(A)	65	65	65
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUD3 U30		
Power Supply			Ø, V, Hz	3, 380-415, 50		
Circuit Breaker		Min	A	20		
Power Supply Cable (included Earth)			No x mm²	5C x 2.5		
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330		
Weight	Net		kg	85.0		
Compressor	Type		-	Inverter Scroll		
	Type		-	R32		
	GWP (Global Warming Potential)		-	675		
	Precharged Amount		kg	3.0		
	t-CO <sub>2</sub> eq.		-	2.025		
Refrigerant	Additional Charge (After 7.5m)		g/m	40		
			-	2.025		
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2		
Total Piping Length		Min / Max	m	5 / 85		
Piping Elevation	IDU - ODU	Max	m	30		



## CEILING CONCEALED DUCT



## STANDARD INVERTER (R32)

LOW STATIC PRESSURE  
- CL09F / CL12F / CL18F / CL24F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO



UUB1 U20



UUC1 U40



COMBINATION				09	12	18	24
Capacity	Cooling	Min - Rated - Max	kW	1.5 / 2.5 / 3.2	1.5 / 3.4 / 4.7	2.0 / 5.0 / 5.8	2.7 / 6.8 / 7.8
	Heating	Min - Rated - Max	kW	1.8 / 3.2 / 4.0	1.8 / 4.0 / 4.9	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 0.67 / 0.93	0.33 / 1.06 / 1.84	0.3 / 1.35 / 1.89	0.4 / 2.03 / 2.84
	Heating	Min - Rated - Max	kW	0.38 / 0.75 / 1.63	0.33 / 1.08 / 1.63	0.4 / 1.77 / 2.48	0.4 / 2.13 / 3.30
Running Current	Cooling	Rated	A	3.0	4.7	7.5	9.0
	Heating	Rated	A	3.3	4.8	8.3	9.4
EER / COP			kWh/kWh	3.80 / 4.30	3.20 / 3.70	3.71 / 3.28	3.35 / 3.52
SEER / SCOP			kWh/kWh	6.1 / 4.0	5.6 / 3.8	6.1 / 3.9	6.2 / 3.9
Pdesign	Cooling @ 35ℓ		kW	2.5	3.4	5	6.8
	Heating @ -10ℓ		kW	2.9	2.9	4.1	5.4
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A+ / A	A++ / A	A++ / A
Annual Energy Consumption	Cooling / Heating		kWh	143 / 1,015	213 / 1,068	287 / 1,472	384 / 1,938
Dehumidification Rate			l/h	0.2	0.8	1.6	2.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	49 / 52	47 / 52	48 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	63	65
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50	-15 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18	-20 - 18
INDOOR				CL09F N50	CL12F N50	CL18F N60	CL24F N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	21 / 15 / 13	21 / 15 / 13	100 / 90 / 80	150 / 130 / 110
Air Flow Rate		H / M / L	m³/min	11.5 / 9.5 / 8	11.5 / 9.5 / 8	15 / 12 / 10	20 / 16 / 12
Dimensions	Body	W x H x D	mm	900 x 190 x 460	900 x 190 x 460	1,100 x 190 x 460	1,100 x 190 x 700
Weight	Body		kg	18.0	18.0	20.9	26.0
Sound Pressure Level	Cooling	H / M / L	dB(A)	35 / 30 / 27	35 / 30 / 27	34 / 31 / 29	39 / 35 / 32
Sound Power Level	Cooling	Max.	dB(A)	55	55	56	58
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25	25
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg	33.3	44.5	57.7	
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary	
	Type		-	R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	675	675	
	Precharged Amount		kg	1.0	1.2	1.9	
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283	
	Additional Charge (After 7.5m)		g/m	20	20	40	
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	58 x 1	
Total Piping Length		Min / Max	m	5 / 30	5 / 30	5 / 50	
Piping Elevation	IDU - ODU	Max	m	30	30	30	

## CEILING CONCEALED DUCT



## STANDARD INVERTER (R32)

MID STATIC PRESSURE  
- CM18F / CM24F / UM30F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUB1 U20



UUC1 U40




COMBINATION				18	24	30
Capacity	Cooling	Min - Rated - Max	kW	2.0 / 5.0 / 5.8	2.7 / 6.8 / 8.0	3.1 / 7.8 / 9.0
	Heating	Min - Rated - Max	kW	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0	3.6 / 9.0 / 10.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 1.33 / 1.86	0.40 / 1.95 / 2.69	0.40 / 2.23 / 3.03
	Heating	Min - Rated - Max	kW	0.40 / 1.76 / 2.46	0.50 / 2.27 / 3.29	0.50 / 2.64 / 3.33
Running Current	Cooling	Rated	A	7.4	8.7	9.9
	Heating	Rated	A	8.3	10.1	11.7
EER / COP			kWh/kWh	3.75 / 3.30	3.49 / 3.31	3.50 / 3.41
SEER / SCOP			kWh/kWh	6.4 / 4.1	6.6 / 3.9	6.1 / 4.0
Pdesign	Cooling @ 35ℓ		kW	5	6.8	7.8
	Heating @ -10ℓ		kW	4.1	5.4	5.4
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	273 / 1,400	361 / 1,938	448 / 1,890
Dehumidification Rate			l/h	1.2	2.6	2.4
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65	68
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18
INDOOR				CM18F N10	CM24F N10	UM30F N10
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	150 / 130 / 110	180 / 150 / 130	220 / 200 / 180
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13	18 / 16.5 / 14.5	22 / 20 / 18
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700
Weight	Body		kg	24.6	24.6	26.2
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 32 / 30	35 / 34 / 32	37 / 35 / 34
Sound Power Level	Cooling	Max.	dB(A)	59	60	62
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUB1 U20	UUC1 U40	
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	20	25	25
Power Supply Cable (included Earth)			No x mm²	3C x 2.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg	44.5	57.7	
Compressor	Type		-	Twin Rotary	Twin Rotary	
	Type		-	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	675	
	Precharged Amount		kg	1.2	1.9	
	t-CO <sub>2</sub> eq.		-	0.81	1.283	
	Additional Charge (After 7.5m)		g/m	20	40	
Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1	58 x 1	
Total Piping Length		Min / Max	m	5 / 30	5 / 50	
Piping Elevation	IDU - ODU	Max	m	30	30	

# CEILING CONCEALED DUCT



## STANDARD INVERTER (R32)

MID STATIC PRESSURE  
- UM36F / UM42F / UM48F / UM60F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD1 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.5	4.8 / 12.0 / 14.0	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.7 / 16.8 / 18.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.50 / 3.80	0.70 / 3.48 / 4.52	0.90 / 4.32 / 5.62	1.00 / 4.95 / 5.54
	Heating	Min - Rated - Max	kW	0.60 / 2.77 / 3.77	0.80 / 3.74 / 4.86	0.90 / 4.31 / 5.26	0.90 / 4.60 / 5.29
Running Current	Cooling	Rated	A	11.1	15.3	19.0	21.6
	Heating	Rated	A	12.6	16.4	18.4	20.4
EER / COP			kWh/kWh	3.80 / 3.90	3.45 / 3.61	3.10 / 3.60	2.95 / 3.65
SEER / SCOP			kWh/kWh	5.80 / 3.90	5.60 / 3.90	5.80 / 4.00	5.60 / 4.00
Pdesign	Cooling @ 35ℓ		kW	9.5	12.0	13.4	14.6
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A+ / A	A+ / A	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	573 / 3,410	750 / 3,410	1,386 / 3,325	1,564 / 3,325
Dehumidification Rate			l/h	2.9	4.4	4.8	4.7
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UM36F N20	UM42F N20	UM48F N30	UM60F N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	183 / 134 / 101	266 / 200 / 145	242 / 159 / 124	342 / 287 / 242
Air Flow Rate		H / M / L	m³/min	32 / 28 / 24	38 / 33 / 28	40 / 34 / 28	50 / 45 / 40
Dimensions	Body	W x H x D	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body		kg	38.5	38.5	43.5	43.5
Sound Pressure Level	Cooling	H / M / L	dB(A)	36 / 34 / 33	38 / 36 / 34	39 / 38 / 36	42 / 40 / 39
Sound Power Level	Cooling	Max.	dB(A)	60	62	65	66
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUD1 U30			
Power Supply			Ø, V, Hz	1, 220-240, 50			
Circuit Breaker		Min	A	40			
Power Supply Cable (included Earth)			No x mm²	3C x 6.0			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
Weight	Net		kg	85			
Compressor	Type		-	Inverter Scroll			
	Type		-	R32			
Refrigerant	GWP (Global Warming Potential)		-	675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.		-	2.025			
	Additional Charge (After 7.5m)		g/m	40			
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2			
Total Piping Length		Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

# CEILING CONCEALED DUCT



## STANDARD INVERTER (R32)

MID STATIC PRESSURE  
- UM 36F / UM42F / UM48F / UM60F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD3 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.5	4.8 / 12.0 / 14.0	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.7 / 16.8 / 18.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.50 / 3.80	0.70 / 3.48 / 4.52	0.90 / 4.32 / 5.62	1.00 / 4.95 / 5.54
	Heating	Min - Rated - Max	kW	0.60 / 2.77 / 3.77	0.80 / 3.74 / 4.86	0.90 / 4.31 / 5.26	0.90 / 4.60 / 5.29
Running Current	Cooling	Rated	A	4.0	5.5	6.8	7.7
	Heating	Rated	A	4.5	5.9	6.5	7.2
EER / COP			kWh/kWh	3.80 / 3.90	3.45 / 3.61	3.10 / 3.60	2.95 / 3.65
SEER / SCOP			kWh/kWh	5.8 / 3.9	5.6 / 3.9	5.8 / 4.0	5.6 / 4.0
Pdesign	Cooling @ 35ℓ		kW	9.5	12	13.4	14.6
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A+ / A	A+ / A	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	573 / 3,410	750 / 3,410	1,386 / 3,325	1,564 / 3,325
Dehumidification Rate			l/h	2.9	4.4	4.8	4.7
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18

INDOOR				UM36F N20	UM42F N20	UM48F N30	UM60F N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	183 / 134 / 101	266 / 200 / 145	242 / 159 / 124	342 / 287 / 242
Air Flow Rate		H / M / L	m³/min	32 / 28 / 24	38 / 33 / 28	40 / 34 / 28	50 / 45 / 40
Dimensions	Body	W x H x D	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Weight	Body		kg	38.5	38.5	43.5	43.5
Sound Pressure Level	Cooling	H / M / L	dB(A)	36 / 34 / 33	38 / 36 / 34	39 / 38 / 36	42 / 40 / 39
Sound Power Level	Cooling	Max.	dB(A)	60	62	65	66
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUD3 U30			
Power Supply			Ø, V, Hz	3, 380-415, 50			
Circuit Breaker		Min	A	20			
Power Supply Cable (included Earth)			No x mm²	5C x 2.5			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
Weight	Net		kg	85			
Compressor	Type		-	Inverter Scroll			
	Type		-	R32			
Refrigerant	GWP (Global Warming Potential)		-	675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.		-	2.025			
	Additional Charge (After 7.5m)		g/m	40			
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2			
Total Piping Length		Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

# CEILING CONCEALED DUCT



## COMPACT INVERTER (R32)

### LOW STATIC PRESSURE - CL18F / CL24F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO



UUB1 U20



COMBINATION				18	24
Capacity	Cooling	Min - Rated - Max	kW	1.8 / 4.7 / 5.1	2.7 / 6.8 / 7.5
	Heating	Min - Rated - Max	kW	2.1 / 5.2 / 5.7	3.0 / 7.5 / 8.6
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.34 / 1.62 / 1.99	0.40 / 2.12 / 2.54
	Heating	Min - Rated - Max	kW	0.30 / 1.53 / 1.99	0.50 / 2.41 / 3.13
Running Current	Cooling	Rated	A	7.2	9.3
	Heating	Rated	A	6.8	10.5
EER / COP			kWh/kWh	2.90 / 3.40	3.21 / 3.11
SEER / SCOP			kWh/kWh	5.1 / 3.8	6.0 / 4.1
Pdesign	Cooling @ 35ℓ		kW	4.7	6.8
	Heating @ -10ℓ		kW	2.7	4.2
Seasonal Energy Label	Cooling / Heating		-	A / A	A+ / A+
Annual Energy Consumption	Cooling / Heating		kWh	323 / 995	397 / 1,434
Dehumidification Rate			l/h	1.5	2.4
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	48 / 53
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-10 - 50	-10 - 48
	Heating	Min - Max	ℓ	-10 - 18	-15 - 18

INDOOR				CL18F N60	CL24F N30
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	100 / 90 / 80	150 / 130 / 110
Air Flow Rate		H / M / L	m³/min	15 / 12 / 10	20 / 16 / 12
Dimensions	Body	W x H x D	mm	1,100 x 190 x 460	1,100 x 190 x 700
Weight	Body		kg	20.9	26
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 31 / 29	39 / 35 / 32
Sound Power Level	Cooling	Max.	dB(A)	56	58
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUA1 ULO	UUB1 U20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330
Weight	Net		kg	33.3	44.5
Compressor	Type		-	Twin Rotary	Twin Rotary
Refrigerant	Type		-	R32	R32
	GWP (Global Warming Potential)		-	675	675
	Precharged Amount		kg	1.0	1.2
	t-CO <sub>2</sub> eq.		-	0.675	0.81
Fan	Additional Charge (After 7.5m)		g/m	20	40
	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 35
Piping Elevation	IDU - ODU	Max	m	30	30

# CEILING CONCEALED DUCT



## COMPACT INVERTER (R32)

### MID STATIC PRESSURE - CM18F / CM24F / UM30F / UM36F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUA1 ULO



UUB1 U20



UUC1 U40



COMBINATION				18	24	30	36
Capacity	Cooling	Min - Rated - Max	kW	1.8 / 5.0 / 5.6	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.5
	Heating	Min - Rated - Max	kW	2.2 / 5.5 / 6.7	3.0 / 7.4 / 8.5	3.2 / 8.0 / 8.8	4.3 / 10.8 / 11.5
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.35 / 1.67 / 1.92	0.50 / 2.34 / 2.81	0.50 / 2.57 / 3.08	0.60 / 3.16 / 3.86
	Heating	Min - Rated - Max	kW	0.32 / 1.58 / 1.77	0.40 / 2.17 / 2.82	0.50 / 2.25 / 2.93	0.60 / 3.03 / 3.48
Running Current	Cooling	Rated	A	7.4	10.3	11.0	14.0
	Heating	Rated	A	7.0	9.7	9.7	13.4
EER / COP			kWh/kWh	3.00 / 3.50	2.91 / 3.41	2.92 / 3.56	3.01 / 3.57
SEER / SCOP			kWh/kWh	6.1 / 3.8	5.8 / 4.1	5.6 / 3.9	5.9 / 4.0
Pdesign	Cooling @ 35ℓ		kW	5	6.8	7.5	9.5
	Heating @ -10ℓ		kW	2.8	4.1	4.3	5.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A	A+ / A+	A+ / A	A+ / A+
Annual Energy Consumption	Cooling / Heating		kWh	287 / 1,032	410 / 1,400	469 / 1,544	564 / 1,924
Dehumidification Rate			l/h	1.2	2.5	2.6	3.2
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	48 / 53	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	67	70
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-	Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-10 - 50	-10 - 48	-10 - 48	-20 - 50
	Heating	Min - Max	ℓ	-10 - 18	-15 - 18	-15 - 18	-15 - 18

INDOOR				CM18F N10	CM24F N10	UM30F N10	UM36F N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	150 / 130 / 110	180 / 150 / 130	220 / 200 / 180	183 / 134 / 101
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13	18 / 16.5 / 14.5	22 / 20 / 18	32 / 28 / 24
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	1,250 x 270 x 700
Weight	Body		kg	24.6	24.6	26.2	38.5
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 32 / 30	35 / 34 / 32	37 / 35 / 34	36 / 34 / 33
Sound Power Level	Cooling	Max.	dB(A)	59	60	62	60
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330
Weight	Net		kg	33.3	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary	Twin Rotary
Refrigerant	Type		-	R32	R32	R32
	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.675	0.81	1.283
Fan	Additional Charge (After 7.5m)		g/m	20	40	40
	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	58 x 1
Total Piping Length		Min / Max	m	5 / 30	5 / 35	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30	30

# CEILING CONCEALED DUCT



## STANDARD INVERTER (R410A)

### HIGH STATIC PRESSURE

- UB70 / UB85



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com



UU70W



UU85W



INDOOR				UB70 N94	UB85 N94
Capacity	Cooling	Min / Nom / Max	kW	7.6 / 19.0 / 20.9	9.2 / 23.0 / 25.3
	Heating	Min / Nom / Max	kW	9.0 / 22.4 / 24.6	10.8 / 27.0 / 29.7
Low Temperature Capacity	Heating -7°C	Max	kW	18.0	24.0
	Cooling	Nom	kW	6.69	8.19
Power Input (Set)	Heating	Nom	kW	6.4	8.31
	Power Input (Indoor)	Min / Max (Nom ESP)	W	550 / 760	610 / 920
Running Current	Cooling / Heating	Nom	A	11.5 / 10.7	13.5 / 13.6
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
EER				2.84	2.81
COP				3.50	3.25
SEER				4.60	4.80
SCOP				3.53	3.51
Pdesign (@ -10°C)			kW	13.4	18.5
Seasonal Energy Label	Cooling / Heating			-	-
Annual Energy Consumption	Cooling / Heating		kWh	-	-
	Liquid		mm (inch)	Ø9.52 (3/8)	Ø12.7 (1/2)
Piping Connection	Gas		mm (inch)	Ø25.4 (1/1)	Ø22.2 (7/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25
	Air Flow Rate	High / Medium / Low	m³/min	70.0 / 65.0 / 60.0	80.0 / 72.0 / 64.0
Sound Pressure	Cooling	High / Medium / Low	dB(A)	43 / 41 / 40	43 / 41 / 40
Sound Power	Cooling	Max	dB(A)	73	75
Dehumidification Rate			l/h	1.81 (4.2)	5.14 (11.9)
Dimensions	Body	W x H x D	mm	1,563 x 460 x 688	1,563 x 460 x 688
Net Weight	Body		kg	90.0	90.0
External Static Pressure		Min / Max	mmAq(Pa)	6 / 25 (60 / 250)	6 / 25 (60 / 250)
OUTDOOR				UU70W U34	UU85W U74
Compressor	Type			Hermetically Sealed Scroll	Hermetically Sealed Scroll
Airflow Rate	Nom		m³/min	110	190
Sound Pressure	Cooling	Nom	dB(A)	55	59
	Heating	Nom	dB(A)	58	60
Sound Power	Cooling	Max	dB(A)	75	75
Dimensions	W x H x D		mm	950 x 1,380 x 330	1,090 x 1,625 x 380
Net Weight			kg	110	144.0
Refrigerant	Type			R410A	R410A
	Charge		g	5,200	5,500
	Additional Charge		g/m	70	70
	GWP			2087.5	2087.5
	TCO2eq			10.9	11.5
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-20 / 48	-20 / 48
	Heating	Min / Max	°C WB	-18 / 18	-18 / 18
Power Supply			Ø, V, Hz	3, 380-415, 50	3, 380-415, 50
Power Supply Cable			No. x mm²	5C x 2.5	5C x 2.5
Transmission Cable			No. x mm²	4C x 1.0	4C x 1.0
Circuit Breaker			A	30	30
Piping Length Total		Min / Max	m	5 / 7.5	5 / 7.5
Piping Elevation Difference	IDU - ODU	Max	m	30	30
Piping Connection	Liquid		mm (inch)	Ø9.53 (3/8)	Ø12.7 (1/2)
	Gas		mm (inch)	Ø25.4 (1/1)	Ø22.2 (7/8)

Note :  
 1. Due to our policy of innovation some specifications may be changed without notification.  
 2. Performances are based on the following conditions (It is accordance with EN14511)  
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB  
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB  
 - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.  
 3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation  
 4. This product contains fluorinated greenhouse gases (R410A)

# CEILING SUSPENDED UNIT



# CEILING SUSPENDED UNIT

## Differentiated Design

Modern elegance design with V-shape and black vane is appropriate for any commercial space. It received iF Design Award.




## Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2m in height from floor, 15m away from ceiling.




With enlarged outlet space, optimized the Air flow Path and improved Heat Exchanger's performance

### • Outlet Space

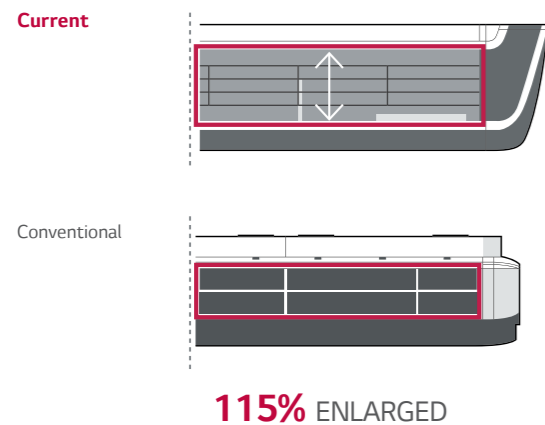


### • Optimized the Air flow Path

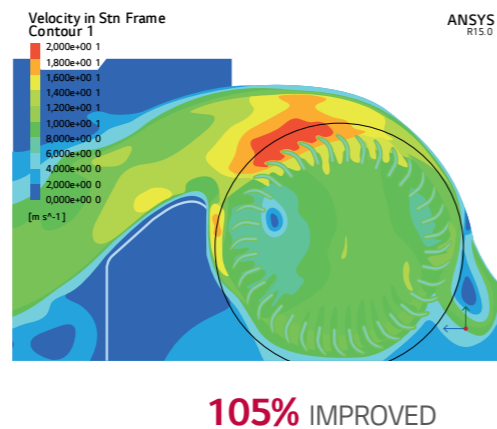

# CEILING SUSPENDED UNIT


## One Touch & 2 Piece Filter

Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.

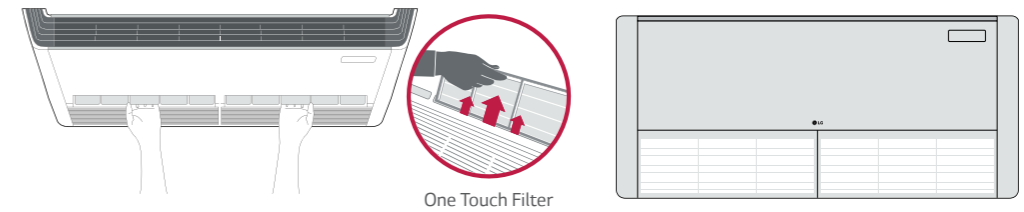


## Two Thermistors Control

Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.

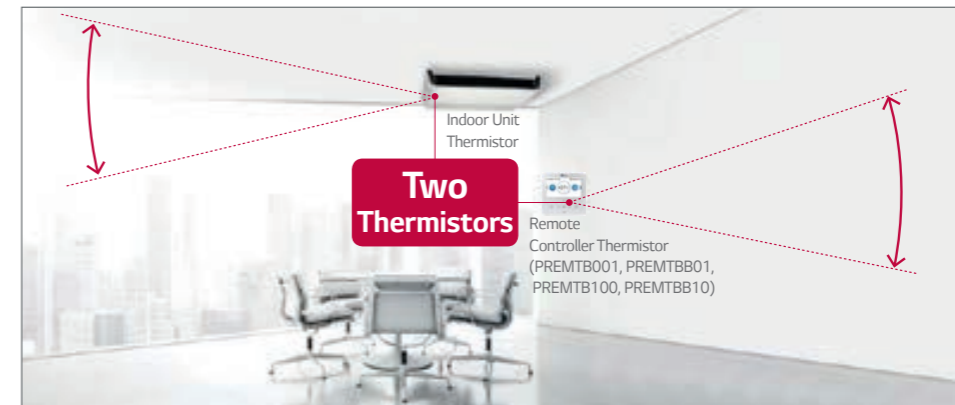

## Easy installation

Installation speed and ease is improved by reducing the total number of screws used and placing the screws on the easily accessible front panel.

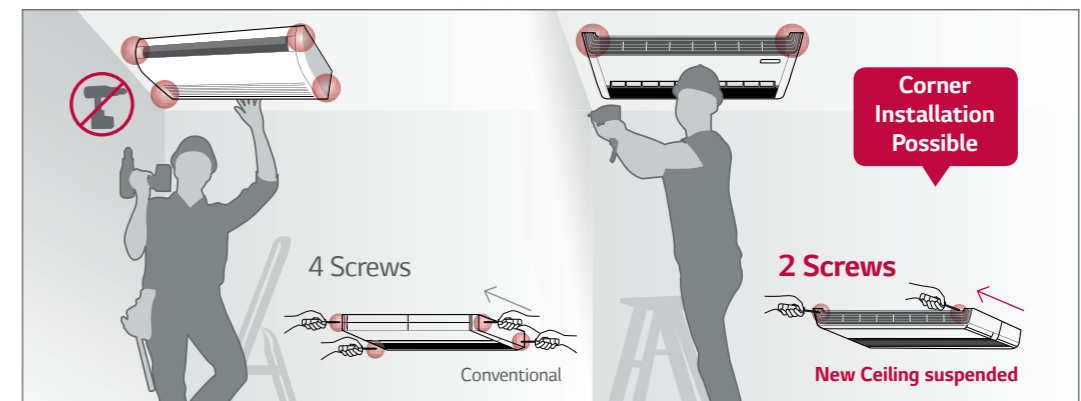

# CEILING SUSPENDED UNIT



## H-INVERTER (R32)

UV18FH / UV24FH / UV30FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
www.eurovent-certification.com

UUB1 U20

UUC1 U40



COMBINATION				18	24	30
Capacity	Cooling	Min - Rated - Max	kW	2.0 / 5.0 / 6.0	2.7 / 6.8 / 8.3	3.2 / 8.0 / 9.5
	Heating	Min - Rated - Max	kW	2.3 / 5.8 / 7.0	3.0 / 7.5 / 9.4	3.6 / 8.9 / 10.6
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 1.28 / 1.73	0.40 / 1.80 / 2.50	0.50 / 2.35 / 3.13
	Heating	Min - Rated - Max	kW	0.30 / 1.58 / 2.13	0.40 / 1.82 / 2.62	0.50 / 2.39 / 3.27
Running Current	Cooling	Rated	A	7.3	8	10.4
	Heating	Rated	A	8	8.1	10.6
EER / COP			kWh/kWh	3.90 / 3.67	3.77 / 4.11	3.41 / 3.72
SEER / SCOP			kWh/kWh	7.6 / 4.4	7.9 / 4.6	7.2 / 4.6
Pdesign	Cooling @ 35ℓ		kW	5	6.8	8
	Heating @ -10ℓ		kW	4.3	5.4	5.4
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A++	A++ / A++
Annual Energy Consumption	Cooling / Heating		kWh	230 / 1,368	301 / 1,644	389 / 1,644
Dehumidification Rate			l/h	1.9	2.0	2.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65	68
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method			-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18
INDOOR				UV18FH N10	UV24FH N20	UV30FH N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	17 / 15 / 13	35 / 32 / 27	35 / 32 / 27
Air Flow Rate		H / M / L	m³ / min	12.5 / 11 / 10	23 / 21 / 19	23 / 21 / 19
Dimensions	Body	W x H x D	mm	1,200 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	28.7	37.4	37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	41 / 39 / 38	43 / 42 / 40	43 / 42 / 40
Sound Power Level	Cooling	Max.	dB (A)	55	60	60
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUB1 U20	UUC1 U40	
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	
Circuit Breaker		Min	A	20	25	
Power Supply Cable (included Earth)			No x mm²	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D	ℓ	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg	44.5	57.7	
Compressor	Type		-	Twin Rotary	Twin Rotary	
	Type		-	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	675	
	Precharged Amount		kg	1.2	1.9	
	t-CO <sub>2</sub> eq.		-	0.81	1.283	
	Additional Charge (After 7.5m)		g / m	20	40	
Fan	Air Flow Rate	Rated	m³/minxNo.	50 x 1	58 x 1	
Total Piping Length		Min / Max	m	5 / 30	5 / 50	
Piping Elevation	IDU - ODU	Max	m	30	30	

Note:  
1. Due to our policy of innovation some specifications may be changed without notification.  
2. Performances are based on the following conditions (It is accordance with EN14511)  
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB  
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB  
- Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.  
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation  
4. This product contains fluorinated greenhouse gases (R32)

# CEILING SUSPENDED UNIT



## H-INVERTER (R32)

UV36FH / UV42FH



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
www.eurovent-certification.com

UUD1 U30



COMBINATION				36	42
Capacity	Cooling	Min - Rated - Max	kW	3.8 - 9.5 - 12.8	4.8 - 12.1 - 14.5
	Heating	Min - Rated - Max	kW	4.3 - 10.8 - 13.7	5.4 - 13.5 - 16.2
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.5 - 2.50 - 3.75	0.7 - 3.64 - 4.91
	Heating	Min - Rated - Max	kW	0.5 - 2.54 - 3.56	0.8 - 3.75 - 4.88
Running Current	Cooling	Rated	A	11.1	16
	Heating	Rated	A	11.4	16.5
EER / COP			kWh/kWh	3.80 / 4.25	3.32 / 3.60
SEER / SCOP			kWh/kWh	6.70 / 4.30	6.60 / 4.30
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1
	Heating @ -10ℓ		kW	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -
Annual Energy Consumption	Cooling / Heating		kWh	496 / 3,093	1,100 / 3,093
Dehumidification Rate			l/h	3.6	5.52
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method			-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18
INDOOR				UV36FH N20	UV42FH N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	59 / 40 / 28	59 / 40 / 28
Air Flow Rate		H / M / L	m³/min	30 / 25 / 20	30 / 25 / 20
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	37.4	37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	48 / 44 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max.	dB (A)	62	62
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5
Piping Connections	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUD1 U30	
Power Supply			Ø, V, Hz	1, 220-240, 50	
Circuit Breaker		Min	A	40	
Power Supply Cable (included Earth)			No x mm²	3C x 6.0	
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330	
Weight	Net		kg	85	
Compressor	Type		-	Inverter Scroll	
	Type		-	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	
	Precharged Amount		kg	3.0	
	t-CO <sub>2</sub> eq.		-	2.025	
	Additional Charge (After 7.5m)		g/m	40	
Fan	Air Flow Rate	Rated	m³/minxNo.	55 x 2	
Total Piping Length		Min / Max	m	5 / 85	
Piping Elevation	IDU - ODU	Max	m	30	

Note:  
1. Due to our policy of innovation some specifications may be changed without notification.  
2. Performances are based on the following conditions (It is accordance with EN14511)  
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB  
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB  
- Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.  
3. Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation  
4. This product contains fluorinated greenhouse gases (R32)

# CEILING SUSPENDED UNIT



## H-INVERTER (R32)

UV36FH / UV42FH



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : [www.eurovent-certification.com](http://www.eurovent-certification.com)

UUD3 U30



COMBINATION				36	42
Capacity	Cooling	Min - Rated - Max	kW	3.8 / 9.5 / 12.8	4.8 / 12.1 / 14.5
	Heating	Min - Rated - Max	kW	4.3 / 10.8 / 13.7	5.4 / 13.5 / 16.2
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.50 / 3.75	0.70 / 3.64 / 4.91
	Heating	Min - Rated - Max	kW	0.50 / 2.54 / 3.56	0.80 / 3.75 / 4.88
Running Current	Cooling	Rated	A	4.0	5.7
	Heating	Rated	A	4.1	5.9
EER / COP			kWh/kWh	3.80 / 4.25	3.32 / 3.60
SEER / SCOP			kWh/kWh	6.7 / 4.3	6.6 / 4.3
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1
	Heating @ -10ℓ		kW	9.5	9.5
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	- / -
Annual Energy Consumption	Cooling / Heating		kWh	496 / 3,093	1,100 / 3,093
Dehumidification Rate			l/h	3.6	5.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method			-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18

INDOOR				UV36FH N20	UV42FH N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	59 / 40 / 28	59 / 40 / 28
Air Flow Rate		H / M / L	m³/min	30 / 25 / 20	30 / 25 / 20
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	37.4	37.4
Sound Pressure Level	Cooling	H / M / L	dB (A)	48 / 44 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max.	dB (A)	62	62
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUD3 U30	
Power Supply			Ø, V, Hz	3, 380-415, 50	
Circuit Breaker		Min	A	20	
Power Supply Cable (included Earth)			No x mm²	5C x 2.5	
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330	
	Net		kg	85	
Compressor	Type		-	Inverter Scroll	
	Type		-	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	
	Precharged Amount		kg	3.0	
	t-CO₂eq.		-	2.025	
	Additional Charge (After 7.5m)		g/m	40	
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2	
Total Piping Length		Min / Max	m	5 / 85	
Piping Elevation	IDU - ODU	Max	m	30	

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)

# CEILING SUSPENDED UNIT



## STANDARD INVERTER (R32)

UV18F / UV24F / UV30F



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : [www.eurovent-certification.com](http://www.eurovent-certification.com)

UUB1 U20

UUC1 U40



COMBINATION				18	24	30
Capacity	Cooling	Min - Rated - Max	kW	2.0 / 5.0 / 5.8	2.7 / 6.7 / 8.0	3.1 / 7.7 / 8.8
	Heating	Min - Rated - Max	kW	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0	3.4 / 8.6 / 9.6
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 1.33 / 1.86	0.40 / 1.99 / 2.69	0.50 / 2.25 / 3.08
	Heating	Min - Rated - Max	kW	0.40 / 1.76 / 2.46	0.40 / 2.2 / 3.08	0.50 / 2.5 / 3.20
Running Current	Cooling	Rated	A	7.5	8.8	10.0
	Heating	Rated	A	8.3	9.8	11.1
EER / COP			kWh/kWh	3.75 / 3.29	3.37 / 3.41	3.42 / 3.44
SEER / SCOP			kWh/kWh	6.6 / 4.3	7.2 / 4.2	6.8 / 4.4
Pdesign	Cooling @ 35ℓ		kW	5	6.7	7.7
	Heating @ -10ℓ		kW	4.2	4.9	5.4
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	265 / 1,368	326 / 1,633	396 / 1,718
Dehumidification Rate			l/h	1.8	2.7	3.0
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52	50 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65	68
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method			-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-20 - 50	-20 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18

INDOOR				UV18F N10	UV24F N10	UV30F N10
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	17 / 15 / 13	33 / 26 / 19	47 / 40 / 33
Air Flow Rate		H / M / L	m³/min	13 / 12 / 11	16 / 15 / 14	19 / 17.5 / 16
Dimensions	Body	W x H x D	mm	1,200 x 235 x 690	1,200 x 235 x 690	1,200 x 235 x 690
Weight	Body		kg	27.3	28	28
Sound Pressure Level	Cooling	H / M / L	dB(A)	42 / 40 / 39	46 / 45 / 43	46 / 44 / 43
Sound Power Level	Cooling	Max.	dB(A)	55	61	62
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0

OUTDOOR				UUB1 U20		UUC1 U40	
Power Supply			Ø, V, Hz	1, 220-240, 50		1, 220-240, 50	
Circuit Breaker		Min	A	20		25	
Power Supply Cable (included Earth)			No x mm²	3C x 2.5		3C x 2.5	
Dimensions	Net	W x H x D	mm	870 x 650 x 330		950 x 834 x 330	
	Net		kg	44.5		57.7	
Compressor	Type		-	Twin Rotary		Twin Rotary	
	Type		-	R32		R32	
Refrigerant	GWP (Global Warming Potential)		-	675		675	
	Precharged Amount		kg	1.2		1.9	
	t-CO₂eq.		-	0.81		1.283	
	Additional Charge (After 7.5m)		g/m	20		40	
Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1		58 x 1	
Total Piping Length		Min / Max	m	5 / 30		5 / 50	
Piping Elevation	IDU - ODU	Max	m	30		30	

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)

# CEILING SUSPENDED UNIT



## STANDARD INVERTER (R32)

UV36F / UV42F / UV48F / UV60F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD1 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	3.8 - 9.5 - 12.5	4.8 - 12.1 - 14.2	5.4 - 13.4 - 15.7	5.8 - 14.4 - 15.6
	Heating	Min - Rated - Max	kW	4.3 - 10.8 - 13.4	5.4 - 13.5 - 15.8	6.2 - 15.5 - 17.5	6.7 - 16.8 - 18.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 - 2.65 - 4.03	0.80 - 3.90 - 5.07	0.90 - 4.50 - 5.85	1.10 - 5.33 - 5.97
	Heating	Min - Rated - Max	kW	0.50 - 2.60 - 3.54	0.80 - 3.75 - 4.88	0.90 - 4.77 - 5.82	1.10 - 5.60 - 6.44
Running Current	Cooling	Rated	A	11.7	17.0	19.7	23.6
	Heating	Rated	A	11.4	16.5	20.6	24.6
EER / COP			kWh/kWh	3.59 / 4.15	3.10 / 3.60	2.98 / 3.25	2.70 / 3.00
SEER / SCOP			kWh/kWh	6.3 / 4.1	6.3 / 4.1	5.9 / 4.1	5.7 / 4.1
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1	13.4	14.4
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating			A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	528 / 3,244	1,152 / 3,244	1,363 / 3,244	1,516 / 3,244
Dehumidification Rate			l/h	3.6	5.5	6.3	7.1
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method				Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18
INDOOR				UV36F N20	UV42F N20	UV48F N20	UV60F N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	50 / 35 / 28	50 / 35 / 28	59 / 40 / 28	59 / 40 / 28
Air Flow Rate		H / M / L	m³/min	28 / 24 / 20	28 / 24 / 20	30 / 25 / 20	30 / 25 / 20
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	36.7	36.7	36.7	36.7
Sound Pressure Level	Cooling	H / M / L	dB(A)	46 / 43 / 40	46 / 43 / 40	48 / 44 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max.	dB(A)	62	62	63	63
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUD1 U30			
Power Supply			Ø, V, Hz	1, 220-240, 50			
Circuit Breaker		Min	A	40			
Power Supply Cable (included Earth)			No x mm²	3C x 6.0			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
Weight	Net		kg	85			
Compressor	Type			Inverter Scroll			
				R32			
Refrigerant	GWP (Global Warming Potential)			675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.			2.025			
Fan	Additional Charge (After 7.5m)		g/m	40			
	Air Flow Rate	Rated	m³/minxNo.	55 x 2			
Total Piping Length		Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

- Note:
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)

# CEILING SUSPENDED UNIT



## STANDARD INVERTER (R32)

UV36F / UV42F / UV48F / UV60F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUD3 U30



COMBINATION				36	42	48	60
Capacity	Cooling	Min - Rated - Max	kW	3.8 - 9.5 - 12.5	4.8 - 12.1 - 14.2	5.4 - 13.4 - 15.7	5.8 - 14.4 - 15.6
	Heating	Min - Rated - Max	kW	4.3 - 10.8 - 13.4	5.4 - 13.5 - 15.8	6.2 - 15.5 - 17.5	6.7 - 16.8 - 18.1
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 - 2.65 - 4.03	0.80 - 3.90 - 5.07	0.90 - 4.50 - 5.85	1.10 - 5.33 - 5.97
	Heating	Min - Rated - Max	kW	0.50 - 2.60 - 3.54	0.80 - 3.75 - 4.88	0.90 - 4.77 - 5.82	1.10 - 5.60 - 6.44
Running Current	Cooling	Rated	A	4.2	6.1	7.0	8.2
	Heating	Rated	A	4.1	5.9	7.3	8.5
EER / COP			kWh/kWh	3.59 / 4.15	3.10 / 3.60	2.98 / 3.25	2.70 / 3.00
SEER / SCOP			kWh/kWh	6.3 / 4.1	6.3 / 4.1	5.9 / 4.1	5.7 / 4.1
Pdesign	Cooling @ 35ℓ		kW	9.5	12.1	13.4	14.4
	Heating @ -10ℓ		kW	9.5	9.5	9.5	9.5
Seasonal Energy Label	Cooling / Heating			A++ / A+	- / -	- / -	- / -
Annual Energy Consumption	Cooling / Heating		kWh	528 / 3,244	1,152 / 3,244	1,363 / 3,244	1,516 / 3,244
Dehumidification Rate			l/h	3.6	5.5	6.3	7.1
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method				Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 52	-20 - 52	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-25 - 18	-25 - 18	-25 - 18	-25 - 18
INDOOR				UV36F N20	UV42F N20	UV48F N20	UV60F N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	50 / 35 / 28	50 / 35 / 28	59 / 40 / 28	59 / 40 / 28
Air Flow Rate		H / M / L	m³/min	28 / 24 / 20	28 / 24 / 20	30 / 25 / 20	30 / 25 / 20
Dimensions	Body	W x H x D	mm	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	36.7	36.7	36.7	36.7
Sound Pressure Level	Cooling	H / M / L	dB(A)	46 / 43 / 40	46 / 43 / 40	48 / 44 / 40	48 / 44 / 40
Sound Power Level	Cooling	Max.	dB(A)	62	62	63	63
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUD3 U30			
Power Supply			Ø, V, Hz	3, 380-415, 50			
Circuit Breaker		Min	A	20			
Power Supply Cable (included Earth)			No x mm²	5C x 2.5			
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330			
Weight	Net		kg	85			
Compressor	Type			Inverter Scroll			
				R32			
Refrigerant	GWP (Global Warming Potential)			675			
	Precharged Amount		kg	3.0			
	t-CO <sub>2</sub> eq.			2.025			
Fan	Additional Charge (After 7.5m)		g/m	40			
	Air Flow Rate	Rated	m³/minxNo.	55 x 2			
Total Piping Length		Min / Max	m	5 / 85			
Piping Elevation	IDU - ODU	Max	m	30			

- Note:
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)



# CEILING SUSPENDED UNIT



## COMPACT INVERTER (R32)

UV18F / UV24F / UV30F / UV36F



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : [www.eurovent-certification.com](http://www.eurovent-certification.com)

UUA1 ULO

UUB1 U20

UUC1 U40



COMBINATION				18	24	30	36
Capacity	Cooling	Min - Rated - Max	kW	1.8 / 5.0 / 5.5	2.7 / 6.8 / 7.5	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.5
	Heating	Min - Rated - Max	kW	2.2 / 5.3 / 5.8	2.9 / 7.3 / 8.4	3.2 / 8.0 / 8.8	4.1 / 10.3 / 11.5
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.32 / 1.62 / 1.93	0.40 / 2.06 / 2.47	0.50 / 2.42 / 2.90	0.70 / 3.28 / 3.87
	Heating	Min - Rated - Max	kW	0.30 / 1.44 / 1.86	0.40 / 2.23 / 2.90	0.50 / 2.48 / 3.22	0.60 / 2.78 / 3.45
Running Current	Cooling	Rated	A	7.2	9.0	10.6	14.6
	Heating	Rated	A	6.4	9.7	10.8	12.3
EER / COP			kWh/kWh	3.10 / 3.70	3.30 / 3.28	3.10 / 3.23	2.90 / 3.70
SEER / SCOP			kWh/kWh	6.6 / 4.6	6.6 / 4.2	6.6 / 4.3	6.1 / 4.2
Pdesign	Cooling @ 35ℓ		kW	5	6.8	7.5	9.5
	Heating @ -10ℓ		kW	2.9	4.3	4.4	5.5
Seasonal Energy Label	Cooling / Heating			A++ / A++	A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	265 / 883	361 / 1,433	398 / 1,433	545 / 1,833
Dehumidification Rate			l/h	1.7	2.4	2.8	3.6
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	48 / 53	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	67	70
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Connections Method				Flared	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-10 - 50	-10 - 48	-10 - 48	-20 - 50
	Heating	Min - Max	ℓ	-10 - 18	-15 - 18	-15 - 18	-15 - 18
INDOOR				UV18F N10	UV24F N10	UV30F N10	UV36F N20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	17 / 15 / 13	33 / 26 / 19	47 / 40 / 33	50 / 35 / 28
Air Flow Rate		H / M / L	m³ / min	13 / 12 / 11	16 / 15 / 14	19 / 17.5 / 16	28 / 24 / 20
Dimensions	Body	W x H x D	mm	1,200 x 235 x 690	1,200 x 235 x 690	1,200 x 235 x 690	1,600 x 235 x 690
Weight	Body		kg	27.3	28	28	36.7
Sound Pressure Level	Cooling	H / M / L	dB(A)	42 / 40 / 39	46 / 45 / 43	46 / 44 / 43	46 / 43 / 40
Sound Power Level	Cooling	Max.	dB(A)	55	61	62	62
Piping Connections	Drain(Natural Drainage)	O.D. / I.D.	mm	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5	Ø25.0 / 20.5
	Drain(Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
OUTDOOR				UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	15	20	25	25
Power Supply Cable (included Earth)			No x mm²	3C x 1.5	3C x 2.5	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	ℓ	770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg	33.3	44.5	57.7	
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary	
	Type			R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)			675	675	675	
	Precharged Amount		kg	1.0	1.2	1.9	
	t-CO <sub>2</sub> eq.			0.675	0.81	1.283	
	Additional Charge (After 7.5m)		g/m	20	40	40	
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	58 x 1	
Total Piping Length		Min / Max	m	5 / 30	5 / 35	5 / 50	
Piping Elevation	IDU - ODU	Max	m	30	30	30	

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)


# CONSOLE



# CONSOLE

## Optimised Air Flow for Cooling & Heating

During cooling operation, the vane adjusts upwards to direct air flow toward the ceiling. During heating operation, the van directs the air flow toward the floor to balance out the room temperature. A wireless controller is included with the indoor console unit.

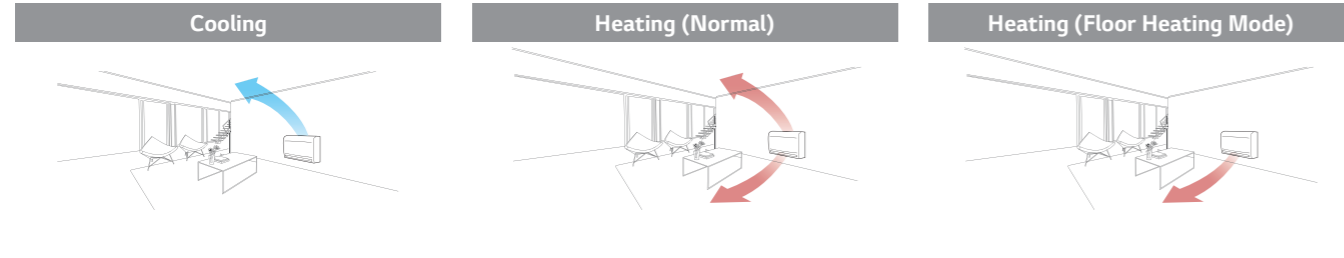

## Quick Floor Heating


Console air conditioners portray high speed and powerful performance. Using the floor heating mode, console air conditioners provide floor heating at a faster pace in order to reach desired temperature more quickly.

	Company A	Electric Heater	LG	LG Floor Heating Mode
 Vertical Horizontal				
<b>Lead Time for Heating (13°C - 21°C)</b>	12 minutes 30 seconds	50 minutes	<b>9 minutes 30 seconds</b>	<b>8 minutes 40 seconds</b>

(Test Condition :Target Temp 23°C, Indoor Room : 13°C-, Outdoor Room : 7°C)


## 5-Step Vane Control

There are 5 different stages to control air flow direction.

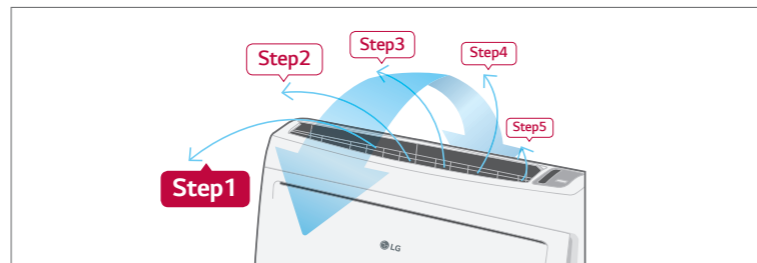


## Easy Installation and Service

### 6 Different Ways to Install Piping



### Easy Slide-type PCB

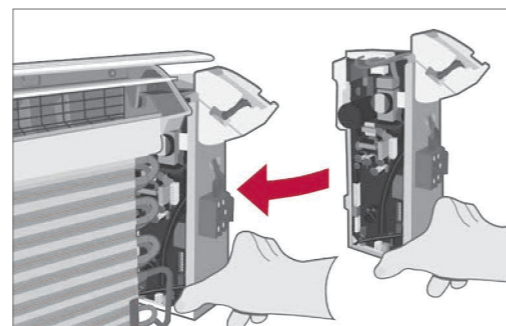


# CONSOLE



## STANDARD INVERTER (R32)

UQ09F  
UQ12F  
UQ18F

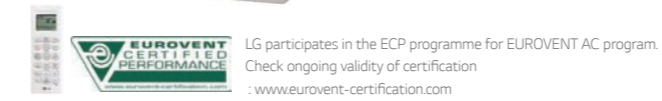

UUA1 ULO UUB1 U20



COMBINATION				9	12	18
Capacity	Cooling	Min - Rated - Max	kW	1.5 / 2.6 / 3.4	1.5 / 3.5 / 4.0	2.0 / 5.0 / 5.8
	Heating	Min - Rated - Max	kW	1.6 / 3.1 / 3.9	1.6 / 4.0 / 4.3	2.0 / 4.9 / 5.4
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.30 / 0.65 / 0.91	0.30 / 1.00 / 1.46	0.40 / 1.75 / 2.45
	Heating	Min - Rated - Max	kW	0.30 / 0.74 / 1.08	0.30 / 1.05 / 1.58	0.30 / 1.56 / 2.11
Running Current	Cooling	Rated	A	2.9	4.4	8.3
	Heating	Rated	A	3.3	4.7	8.0
EER / COP			kWh/kWh	4.00 / 4.20	3.50 / 3.80	2.85 / 3.14
SEER / SCOP			kWh/kWh	6.5 / 4.0	6.4 / 4.0	5.8 / 3.8
Pdesign	Cooling @ 35ℓ		kW	2.6	3.5	5
	Heating @ -10ℓ		kW	2.8	3	3.8
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A+	A+ / A
Annual Energy Consumption	Cooling / Heating		kWh	140 / 980	191 / 1,050	302 / 1,396
Dehumidification Rate			l/h	0.7	1.3	2.4
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	49 / 52	47 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	63
	Heating	Rated	dB(A)	65	65	63
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Connections Method			Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-15 - 50	-15 - 50	-15 - 50
	Heating	Min - Max	ℓ	-20 - 18	-20 - 18	-20 - 18
INDOOR				UQ09F NAO	UQ12F NAO	UQ18F NAO
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	37 / 30 / 25	37 / 30 / 25	44 / 39 / 35
Air Flow Rate		H / M / L	m³/min	8.5 / 6.7 / 5.0	8.5 / 6.7 / 5.0	10.1 / 8.6 / 7.2
Dimensions	Body	W x H x D	mm	700 x 600 x 210	700 x 600 x 210	700 x 600 x 210
Weight	Body		kg	16.3	16.3	16.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	38 / 32 / 27	38 / 32 / 27	44 / 39 / 35
Sound Power Level	Cooling	Max.	dB(A)	59	59	60
Piping Connections	Drain	O.D. / I.D.	mm	Ø16.7 / 12.2	Ø16.7 / 12.2	Ø16.7 / 12.2
OUTDOOR				UUA1 ULO	UUB1 U20	
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	
Circuit Breaker		Min	A	15	20	
Power Supply Cable (included Earth)			No x mm³	3C x 1.5	3C x 2.5	
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	
Weight	Net		kg	33.3	44.5	
Compressor	Type			Twin Rotary	Twin Rotary	
	Type			R32	R32	
Refrigerant	GWPP (Global Warming Potential)			675	675	
	Precharged Amount		kg	1.0	1.2	
	τ-CO <sub>2</sub> eq.			0.675	0.81	
	Additional Charge (After 7.5m)		g/m	20	20	
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	
	Total Piping Length	Min / Max	m	5 / 30	5 / 30	
Piping Elevation	IDU - ODU	Max	m	30	30	

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Performances are based on the following conditions (It is accordance with EN14511)
  - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
  - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
  - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
- Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
- This product contains fluorinated greenhouse gases (R32)

# FLOOR STANDING UNIT



## FLOOR STANDING UNIT

### Stylish Design


The new LG floor standing air conditioner which is Red Dot design award winner 2013, is ideal for modern interiors in your home or office.



reddot design award  
winner 2013


### Quick Response

Offering powerful cooling, the commercial air conditioning system can reach a set temperature in a shorter period of time. Meanwhile, the Power Heating function provides the optimal airflow angle, guaranteeing a faster heating performance.

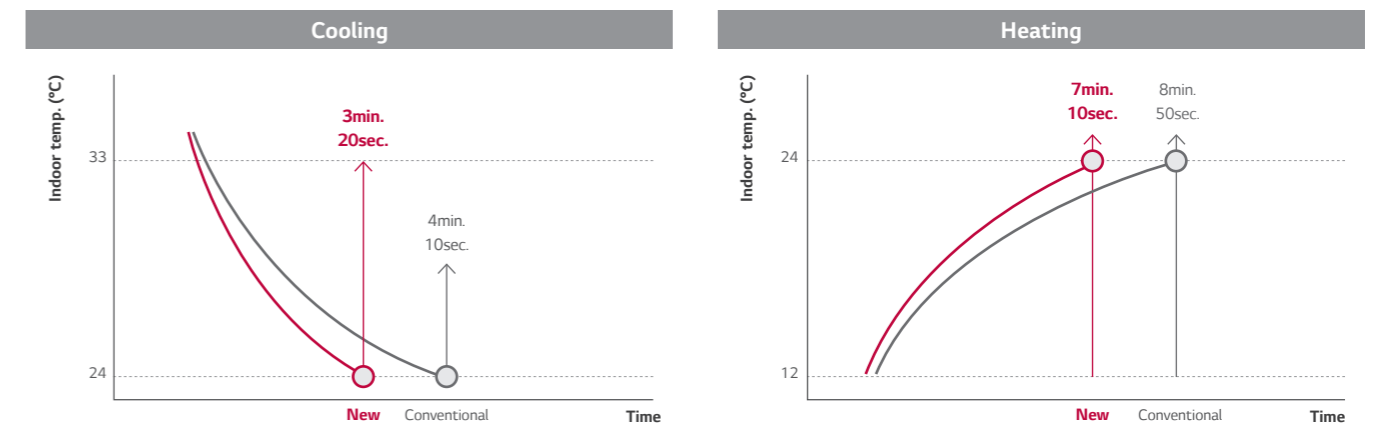

### Powerful Air Flow

The new LG floor standing air conditioner is efficient for using in large areas due to its powerful cooling and heating operation. The powerful air speed and volume means the air flow can reach up to 20m away from the air conditioner.

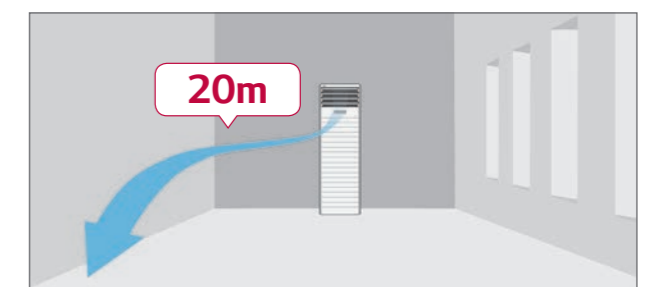

# FLOOR STANDING UNIT



## STANDARD INVERTER (R410A)

### UP48



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

### UU48W



### UU49W



INDOOR			UP48 NT2	UP49 NT2	
Capacity	Cooling	Min / Nom / Max	kW	6.0 / 13.4 / 15.2	6.0 / 13.4 / 15.2
	Heating	Min / Nom / Max	kW	6.0 / 15.5 / 17.1	6.0 / 15.5 / 17.1
Low Temperature Capacity	Heating -7°C	Max	kW	16.0	16.0
Power Input (Set)	Cooling	Nom	kW	4.2	4.2
	Heating	Nom	kW	4.5	4.5
Power Input (Indoor)		Nom	W	200	200
Running Current	Cooling / Heating	Nom	A	18.1 / 19.5	5.76 / 6.20
Power Supply			Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
EER				3.21	3.21
COP				3.41	3.41
SEER				5.05	5.05
SCOP				3.51	3.51
Pdesign (@ -10°C)			kW	11.5	11.5
Seasonal Energy Label	Cooling / Heating			-	-
Annual Energy Consumption	Cooling / Heating		kWh	-	-
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain	O.D. / I.D.	mm	32 / 25	32 / 25
Air Flow Rate		High / Medium / Low	m³/min	31 / 27 / 23	31 / 27 / 23
Sound Pressure	Cooling	High / Medium / Low	dB(A)	52 / 49 / 45	52 / 49 / 45
Sound Power	Cooling	Max	dB(A)	65	59
Dehumidification Rate			l/h	5.0	5.0
Dimensions	Body	W x H x D	mm	590 x 1,840 x 460	590 x 1,840 x 460
Net Weight	Body		kg	50.0	50.0

OUTDOOR			UU48W U32	UU49W U32	
Compressor	Type		Twin Rotary	Twin Rotary	
Airflow Rate		Nom	m³/min	110	110
Sound Pressure	Cooling	Nom	dB(A)	52	52
	Heating	Nom	dB(A)	54	54
Sound Power	Cooling	Max	dB(A)	72	68
Dimensions	W x H x D		mm	950 x 1,380 x 330	950 x 1,380 x 330
Net Weight			kg	92.0	96.0
Refrigerant	Type			R410A	R410A
	Charge		g	3,400	3,400
	Additional Charge		g/m	40	40
	GWP			2087.5	2087.5
	TCO2eq			7.1	7.1
Operation Range (Outdoor)	Cooling	Min / Max	°C DB	-15 / 48	-15 / 48
	Heating	Min / Max	°C WB	-18 / 18	-18 / 18
Power Supply			Ø, V, Hz	1, 220-240, 50	3, 380-415, 50
Power Supply Cable			No. x mm²	3C x 5.0	5C x 5.0
Transmission Cable			No. x mm²	4C x 0.75	4C x 0.75
Circuit Breaker			A	40	20
Piping Length Total		Min / Max	m	5 / 7.5	5 / 7.5
Piping Elevation Difference	IDU - ODU	Max	m	30	30
Piping Connection	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)

- Note:
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R410A)


# WALL MOUNTED UNIT



# WALL MOUNTED UNIT

## Wide Operational Range


Ideal and comprehensive solution for server rooms, machine rooms and kitchens.

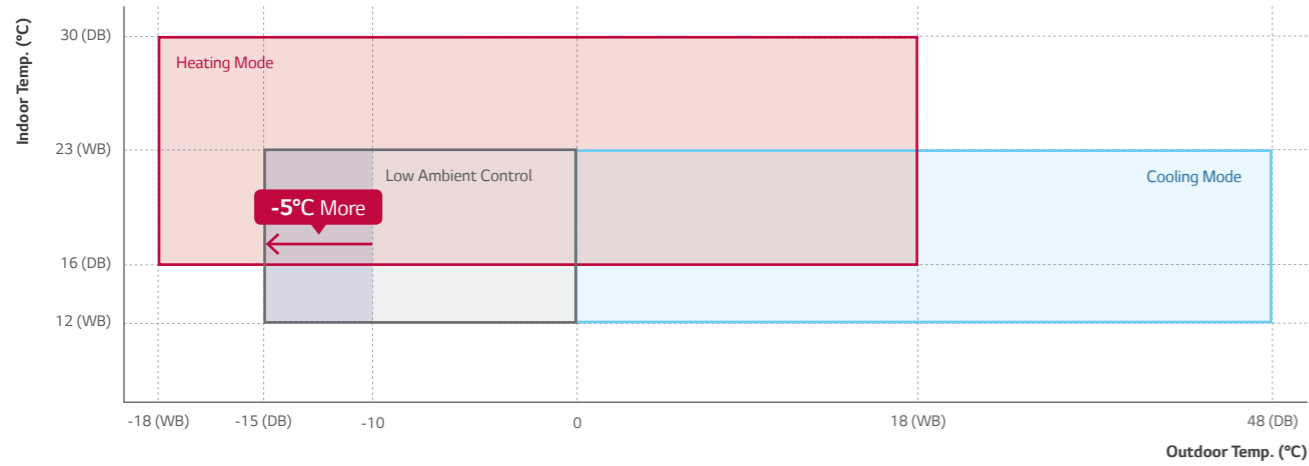

## Easy Installation


### Detachable Bottom Cover

The bottom cover is detachable when needed, making installation easier. Disassembly or additional support of the unit is unnecessary. Installation can be completed by one individual with LG's patented support tool.

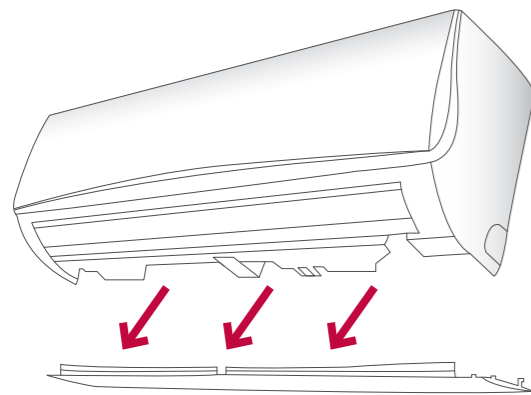

### Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

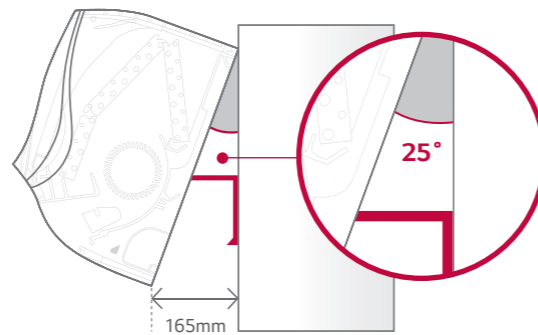

# WALL MOUNTED UNIT


## High Energy Efficiency

New wall mounted units provide good seasonal energy efficiency connected with Standard Inverter outdoor units.

	8.0kW	9.5kW
SEER	7.0 (A++)	6.1 (A++)
SCOP	4.3 (A+)	3.85 (A+)


## Powerful Cooling & Heating

### 20m Windblast

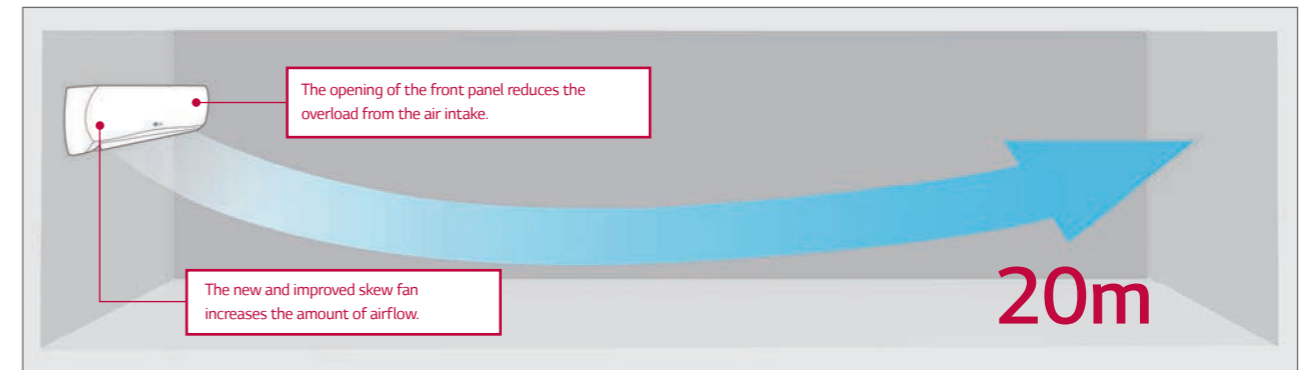

### Optimised Airflow

Direction of horizontal vane can be adjusted from step 1 to step 6 with full auto swing. This function can cool and heat specific areas much faster.

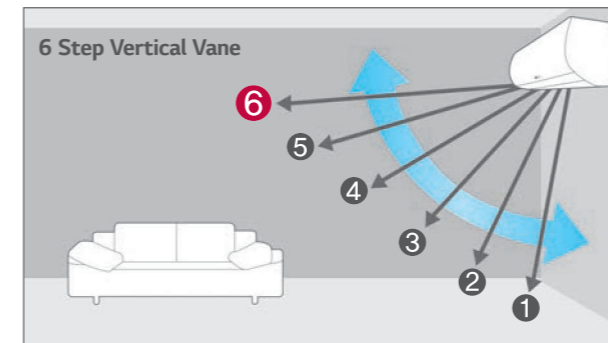

### Quick Cooling & Heating

Jet cooling and heating disperses air evenly at high speed to secure an optimally cooled or heated room in just 3 minutes.



## WALL MOUNTED UNIT



## STANDARD INVERTER (R32)

US30F / US36F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUC1 U40



UUD1 U30



UUD3 U30



COMBINATION				30	36	36
Capacity	Cooling	Min - Rated - Max	kW	3.2 / 8.0 / 9.0	3.8 / 9.5 / 12.5	3.8 / 9.5 / 12.5
	Heating	Min - Rated - Max	kW	3.6 / 9.0 / 10.0	4.3 / 10.8 / 13.4	4.3 / 10.8 / 13.4
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.28 / 3.17	0.30 / 2.57 / 3.91	0.30 / 2.57 / 3.91
	Heating	Min - Rated - Max	kW	0.50 / 2.5 / 3.20	0.50 / 2.77 / 3.77	0.50 / 2.77 / 3.77
Running Current	Cooling	Rated	A	10.1	11.4	4.1
	Heating	Rated	A	11.1	12.2	4.4
EER / COP			kWh/kWh	3.51 / 3.60	3.70 / 3.90	3.70 / 3.90
SEER / SCOP			kWh/kWh	7.0 / 4.3	6.10 / 3.85	6.10 / 3.85
Pdesign	Cooling @ 35ℓ		kW	8	9.5	9.5
	Heating @ -10ℓ		kW	5.4	8.7	8.7
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A	A++ / A
Annual Energy Consumption	Cooling / Heating		kWh	400 / 1,758	545 / 3,164	545 / 3,164
Dehumidification Rate			l/h	2.9	3.8	3.8
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 52	50 / 50	50 / 50
ODU Sound Power Level	Cooling	Rated	dB(A)	68	66	66
	Liquid		mm (inch)	09.52 (3/8)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas		mm (inch)	015.88 (5/8)	015.88 (5/8)	015.88 (5/8)
	Connections Method		-	Flared	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-20 - 50	-20 - 52	-20 - 52
	Heating	Min - Max	ℓ	-20 - 18	-25 - 18	-25 - 18

INDOOR				US30F NR0	US36F NR0	US36F NR0
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	47 / 42 / 36	65 / 47 / 42	65 / 47 / 42
Air Flow Rate		H / M / L	m³/min	21 / 17 / 13	25 / 21 / 17	25 / 21 / 17
Dimensions	Body	W x H x D	mm	1,200 x 360 x 265	1,200 x 360 x 265	1,200 x 360 x 265
Weight	Body		kg	18.3	18.3	18.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	46.0 / 42.0 / 38.0	51.0 / 46.0 / 42.0	51.0 / 46.0 / 42.0
Sound Power Level	Cooling	Max.	dB(A)	62	65	65
Piping Connections	Drain	O.D. / I.D.	mm	021.5 / 16.0	021.5 / 16.0	021.5 / 16.0

OUTDOOR				UUC1 U40	UUD1 U30	UUD3 U30
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50	3, 380-415, 50
Circuit Breaker		Min	A	25	40	20
Power Supply Cable (included Earth)			No x mm²	3C x 2.5	3C x 6.0	5C x 2.5
Dimensions	Net	W x H x D	mm	950 x 834 x 330	950 x 1,380 x 330	950 x 1,380 x 330
Weight	Net		kg	57.7	85	85
Compressor	Type		-	Twin Rotary	Inverter Scroll	Inverter Scroll
	Type		-	R32	R32	R32
	GWP (Global Warming Potential)		-	675	675	675
	Precharged Amount		kg	1.9	3.0	3.0
	t-CO <sub>2</sub> eq.		-	1.283	2.025	2.025
Refrigerant	Additional Charge (After 7.5m)		g/m	40	40	40
	Fan	Air Flow Rate	Rated	m³/min x No.	58 x 1	55 x 2
Total Piping Length		Min / Max	m	5 / 50	5 / 85	5 / 85
Piping Elevation	IDU - ODU	Max	m	30	30	30

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)

## WALL MOUNTED UNIT



## COMPACT INVERTER (R32)

US30F / US36F



LG participates in the ECP programme for EUROVENT AC program.  
Check ongoing validity of certification  
: www.eurovent-certification.com

UUB1 U20



UUC1 U40



COMBINATION				30	36
Capacity	Cooling	Min - Rated - Max	kW	3.0 / 7.5 / 8.3	3.8 / 9.5 / 10.6
	Heating	Min - Rated - Max	kW	3.1 / 7.7 / 8.5	4.3 / 10.8 / 11.5
Power Input (Set)	Cooling	Min - Rated - Max	kW	0.50 / 2.31 / 2.77	0.60 / 3.06 / 3.67
	Heating	Min - Rated - Max	kW	0.40 / 2.14 / 2.78	0.60 / 3.0 / 3.72
Running Current	Cooling	Rated	A	10.1	13.6
	Heating	Rated	A	9.3	13.3
EER / COP			kWh/kWh	3.25 / 3.60	3.10 / 3.60
SEER / SCOP			kWh/kWh	6.8 / 4.1	6.4 / 4.1
Pdesign	Cooling @ 35ℓ		kW	7.5	9.5
	Heating @ -10ℓ		kW	4.3	5.8
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating		kWh	386 / 1,468	520 / 1,980
Dehumidification Rate			l/h	3.0	3.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 54	54 / 56
ODU Sound Power Level	Cooling	Rated	dB(A)	67	70
	Liquid		mm (inch)	09.52 (3/8)	09.52 (3/8)
Piping Connections	Gas		mm (inch)	015.88 (5/8)	015.88 (5/8)
	Connections Method		-	Flared	Flared
Operation Range (Outdoor)	Cooling	Min - Max	ℓ	-10 - 48	-20 - 50
	Heating	Min - Max	ℓ	-15 - 18	-15 - 18

INDOOR				US30F NR0	US36F NR0
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50
Power Input (IDU)		H / M / L	W	47 / 42 / 36	65 / 47 / 42
Air Flow Rate		H / M / L	m³/min	21 / 17 / 13	25 / 21 / 17
Dimensions	Body	W x H x D	mm	1,200 x 360 x 265	1,200 x 360 x 265
Weight	Body		kg	18.3	18.3
Sound Pressure Level	Cooling	H / M / L	dB(A)	46.0 / 42.0 / 38.0	51.0 / 46.0 / 42.0
Sound Power Level	Cooling	Max.	dB(A)	62	65
Piping Connections	Drain	O.D. / I.D.	mm	021.5 / 16.0	021.5 / 16.0

OUTDOOR				UUB1 U20	UUC1 U40
Power Supply			∅, V, Hz	1, 220-240, 50	1, 220-240, 50
Circuit Breaker		Min	A	20	25
Power Supply Cable (included Earth)			No x mm²	3C x 2.5	3C x 2.5
Dimensions	Net	W x H x D	mm	870 x 650 x 330	950 x 834 x 330
Weight	Net		kg	44.5	57.7
Compressor	Type		-	Twin Rotary	Twin Rotary
	Type		-	R32	R32
	GWP (Global Warming Potential)		-	675	675
	Precharged Amount		kg	1.2	1.9
	t-CO <sub>2</sub> eq.		-	0.81	1.283
Refrigerant	Additional Charge (After 7.5m)		g/m	40	40
	Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1
Total Piping Length		Min / Max	m	5 / 35	5 / 50
Piping Elevation	IDU - ODU	Max	m	30	30

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
  - Performances are based on the following conditions (It is accordance with EN14511)
    - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
    - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
    - Interconnected Pipe is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0m.
  - Sound Level Values are measured at Noise Measuring chamber accordance with standard. Therefore, these values depend on the ambient conditions and values are normally higher in actual operation
  - This product contains fluorinated greenhouse gases (R32)

# AHU SOLUTION





## AHU COMBINATION



### Air Handling Applications

Economically feasible solution for pair application with air handling units.

#### Return/Room Air Temperature Control

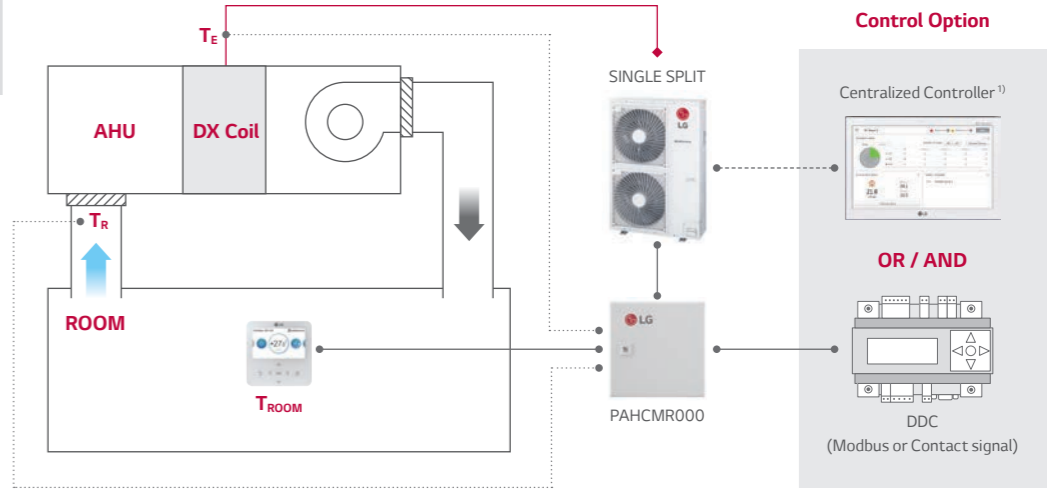

#### Discharge Air Temperature Control

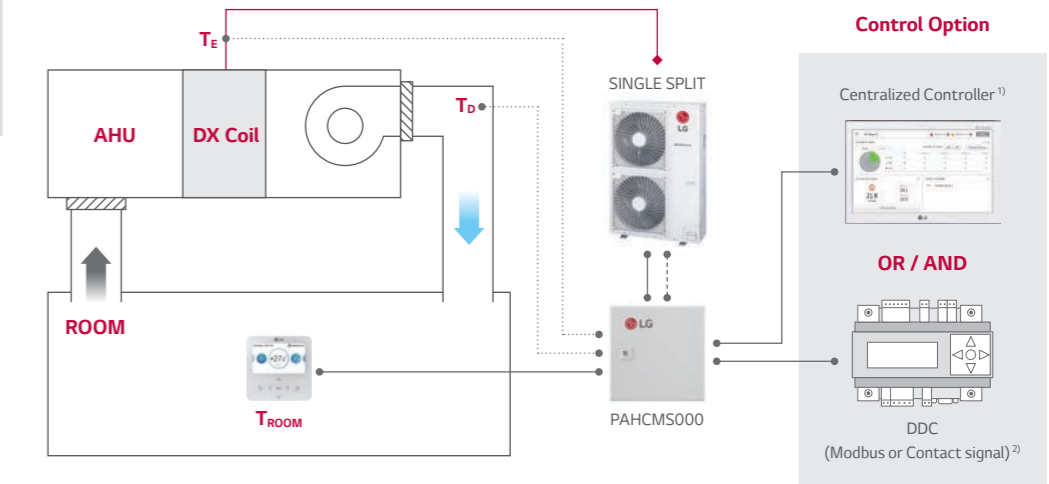

1) PI485(PMNFP14A1) is required for using centralized controller  
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC  
 3) For more detail, please refer to the PDB of AHU Communication Kit

# AHU COMBINATION

## COMMUNICATION KIT

PAHCMR000  
PAHCMS000



## Specifications

MODEL	COMBINATION		DESCRIPTION	DIMENSIONS (MM)		
	OUTDOOR UNIT	CENTRALIZED CONTROLLER		W	H	D
PAHCMR000	Single Split	-	Return / Room air temperature control by DDC or LG individual / centralized controller	300	300	155
PAHCMS000	Single Split	-	Discharge air temperature control by DDC or LG individual / centralized controller	380	300	155

## Function list for Communication kit

FUNCTION LIST*	PAHCMR000	PAHCMS000	NOTE
Comm. Kit Operation	On / Off	On / Off	
Operation Mode <sup>1)</sup>	Cooling / Heating	Cooling / Heating	
Return (room) Air Temperature	16-30°C	-	
Control			
Discharge Air Temperature <sup>2)</sup>	-	16-30°C	Available in case of using DDC with Modbus or LG Control system
Fan Speed <sup>3)</sup>	Low / Middle / High	Low / Middle / High	It may not be possible depending on the particular condition
Forced Thermal On / Off	On / Off	-	Available in case of using DDC with contact signal
Capacity Control	-	-	Available in case of using DDC with Modbus or contact signal
Monitor			
Comm. Kit Operation	On / Off	On / Off	
Operation Mode <sup>1)</sup>	Cooling / Heating	Cooling / Heating	Available in case of using DDC with Modbus or LG Control system
Fan Speed	Low / Middle / High	Low / Middle / High	
Error Alarm	-	-	
Compressor On / Off	On / Off	On / Off	Available in case of using DDC with Modbus or LG individual controller PAHCMR000 doesn't provide this in case of using DDC with contact signal

1) Available operation mode can be varied depending on the setting of AHU Communication Kit.

2) This range may differ depending on the type of controller

3) To control and monitor the fan speed, DO ports for the fan speed status have to be connected with the fan unit

\* Some of functions may not be possible depending on the setting of AHU Communication Kit. For more details of condition, please refer to the product data book

## Combination Table

Model Name	R32				R410A	
	UU1 U10	UUB1 U20	UUC1 U40	UUD1 U30 UUD3 U30	UU70WU34	UU85WU74
Capacity Index	9 - 18	18 - 30	24 - 36	36 - 60	70	85
Range	2.5 - 5.0	5.0 - 8.0	6.8 - 10.0	10.0 - 14.6	20.0	25.0
PAHCMR000	X	0	0	0	0	0
PAHCMS000	X	0	0	0	0	0

# ACCESSORIES






# LG WI-FI MODEM

Users can control air conditioners using Android or iOS-enabled smartphones.

## PWFMDD200



## Features


- Access LG air conditioner anytime and from anywhere with Wi-Fi equipped device
- LG's exclusive Home Appliances control app(ThinQ) is available
- Simple operation for various functions
  - On/Off
  - Operation Mode
  - Current/Set Temperature
  - Fan Speed
  - Vane Control<sup>2)</sup>
  - Reservation (Sleep, Weekly On/Off)
  - Energy Monitoring<sup>1)</sup>
  - Filter Management
  - Error check

MODEL NAME	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	Single Indoor unit <sup>3)</sup>
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG Smart ThinQ (Android v4.1(Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

\* Functionality may be different according to each IDU model  
 \* User interface of application shall be revised for its design and contents improvement  
 \* Application is optimized for smartphone use, so it may not be well functioning with tablet devices  
 1) LG Centralized controller and PDI installation is required for this function  
 2) Vane Control may not be possible according to the type of Indoor unit  
 3) For the compatibility with Indoor unit, please contact regional office



## Overview

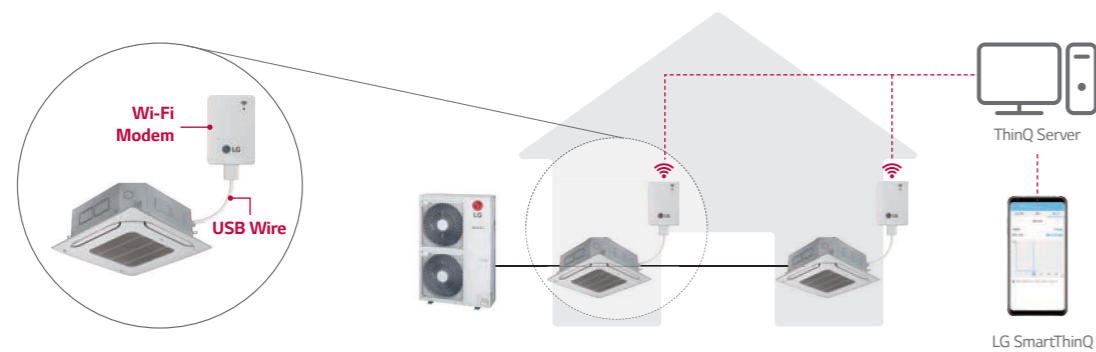

\* Search "LG Smart ThinQ" on Google market or Appstore then download the app.  
 \* Internet service with Wi-Fi connection has to be available

# ACCESSORIES

## Standard Wired Remote Controller



Model Name	PREMTB100 PREMTBB10	PREMTB001 PREMTBB01
Operation Mode	On/Off, Fan Speed Control, Temperature Setting	
Mode Change	Cooling / Heating / Auto / Dehumidification / Fan	
Auto Swing / Vane Control	•	
Reservation	Simple / Sleep / On, Off / Weekly / Holiday	
Time Display	•	
Electrical Failure Compensation	•	
Child Lock	•	
Operation Status LED	•	
Indoor Temperature Display	•	
Wireless Remote Controller Receiver	•	
Size (W x H x D, mm)	120 x 120 x 16	120 x 121 x 16
Backlight	•	


\* Refer to each model PDB for applicable models.

## Remote Controller



PQWRHQ0FDB

## PI 485

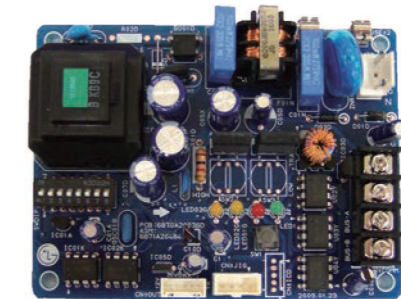

PMNFP14A1

Power : Single phase AC 220V 50/60Hz  
 Max. no of the indoor units that can be connected: 64 UNITS  
 Model applied : RAC / Multi / Single / Thermo V

\* Refer to each product PDB for applicable models

## Dry Contact



MODEL	PDRYCB000	PDRYCB400	PDRYCB300/320 <sup>1)</sup>	PDRYCB500
Contact Point	1 Control Point	2 Control Point	8 Control Point	Modbus RTU
Power Input	AC 220V from outside power source	DC 5V & 12V from indoor unit PCB	DC 5V & 12V from indoor unit PCB	DC 5V & 12 V from indoor unit PDB
Voltage / Non Voltage Input		•	•	
On / Off Control	•	•	•	•
Lock / Unlock	•	•	•	
Fan Speed Setting				•
Thermo Off		•	•	
Energy Saving		•	•	
Temperature Setting		•	•	•
Error Monitoring	•	•	•	•
Operation Monitoring	•	•	•	•

\* Refer to each product PDB for applicable models  
 1) Available April 2020. Can use a universal input port with PDRYCB320 model.


# CEILING CASSETTE

H-INVERTER (R32)

## UT09FH NQ0 / UT12FH NQ0

(Unit : mm)

Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication cable routing hole
5 Wired remote controller wire routing hole
6 Air Intake
7 Air Outlet
8 Decoration Panel (Accessory)
9 Decoration Corner Cover
10 Decoration Coner Display Cover
11 Flexible Drain Hose
12 Fresh air Intake Hole

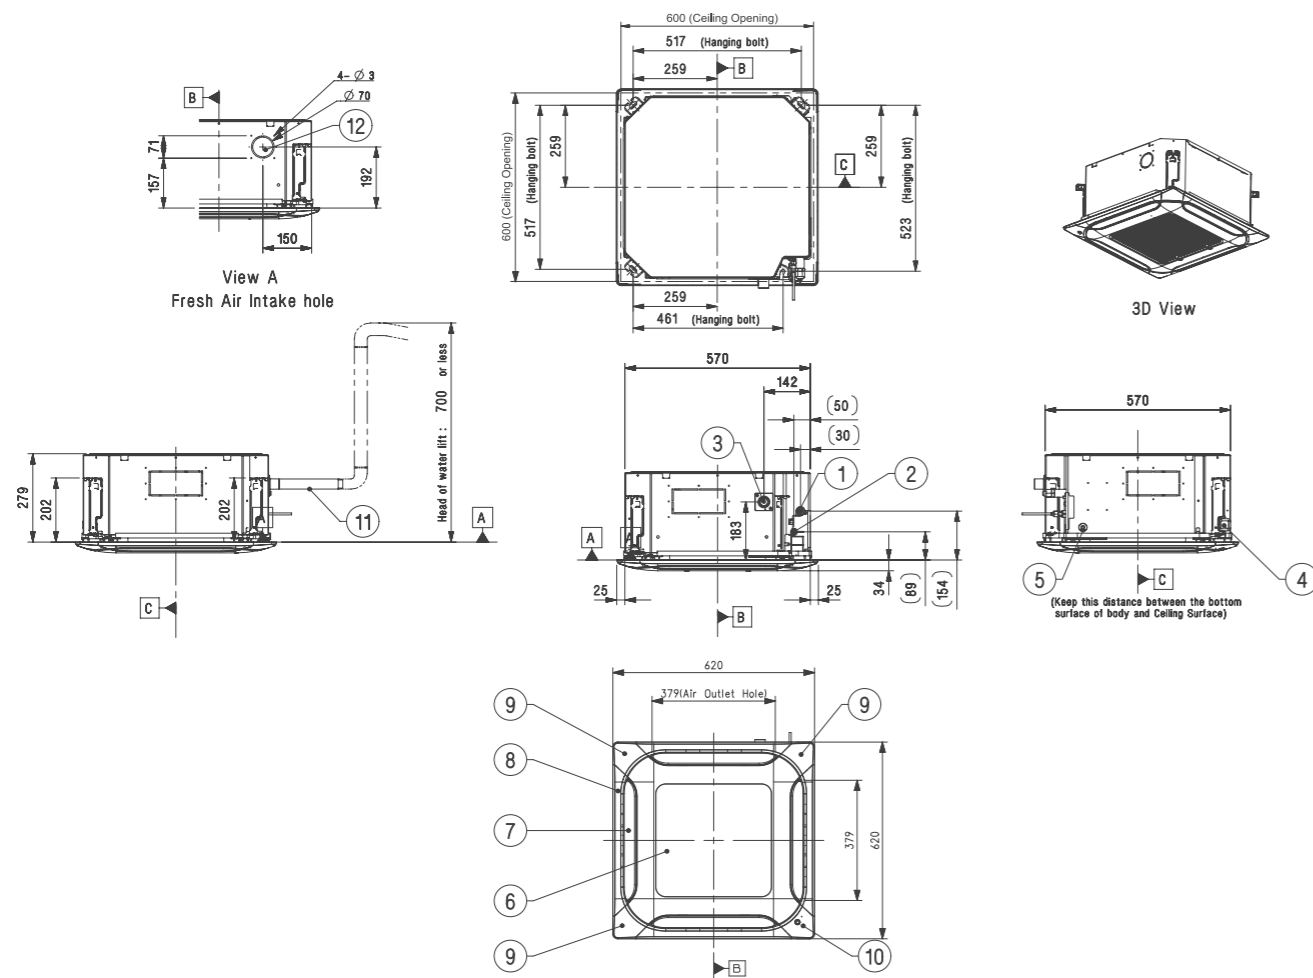


# CEILING CASSETTE

H-INVERTER (R32)

## UT18FH NB0

(Unit : mm)

Part Name
1 Gas Pipe Connection
2 Liquid Pipe Connection
3 Drain Pipe Connection
4 Power and Communication cable routing hole
5 Wired remote controller wire routing hole
6 Air Inlet
7 Air Outlet
8 Decoration Panel (Accessory)
9 Decoration Corner Cover
10 Flexible Drain Hose
11 Fresh air Intake Hole

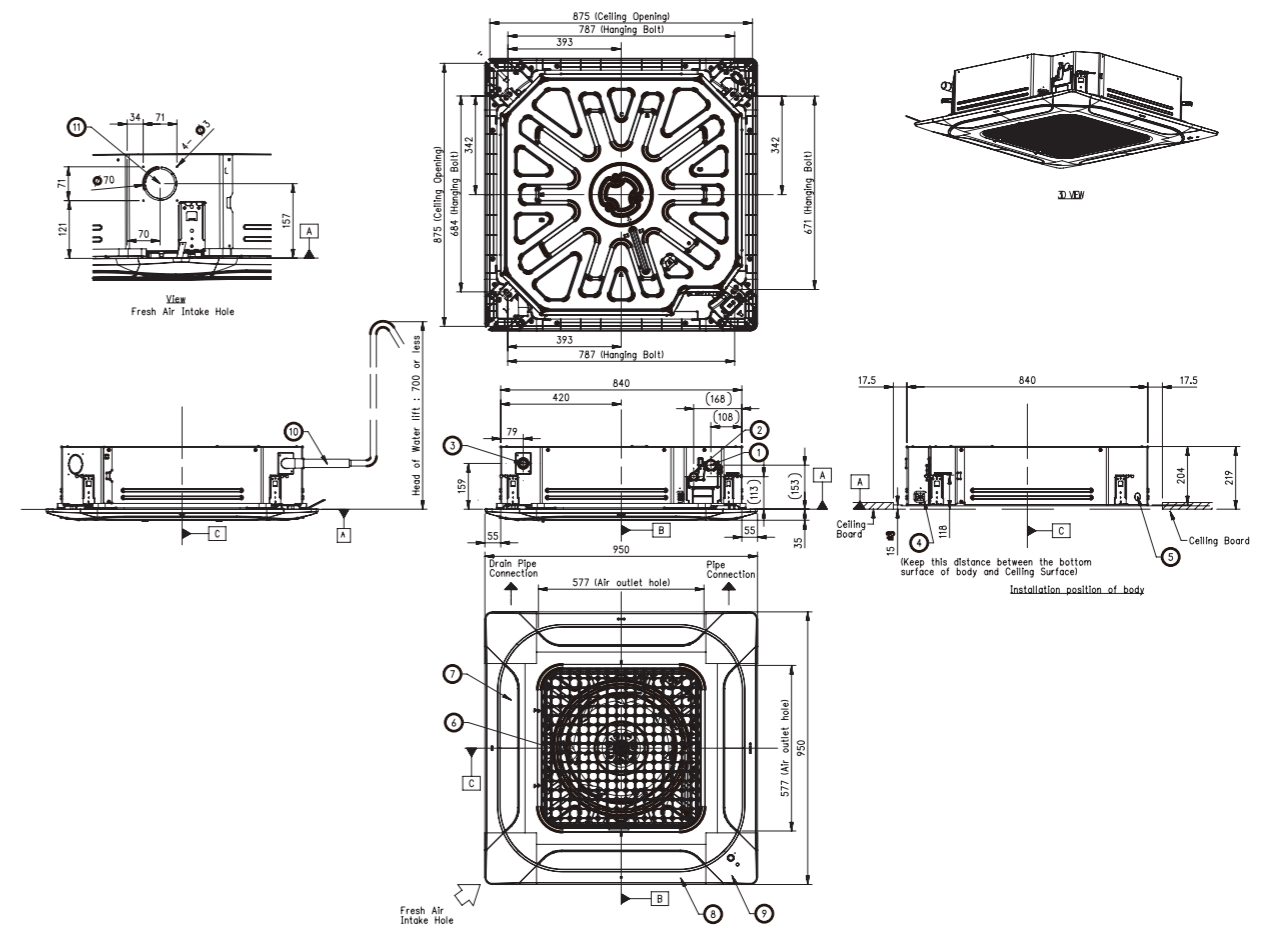


# CEILING CASSETTE

H-INVERTER (R32)

UT24FH NAO / UT30FH NAO / UT36FH NAO / UT42FH NAO  
UT48FH NAO / UT60FH NAO

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication cable routing hole
5	Wired remote controller wire routing hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh air Intake Hole

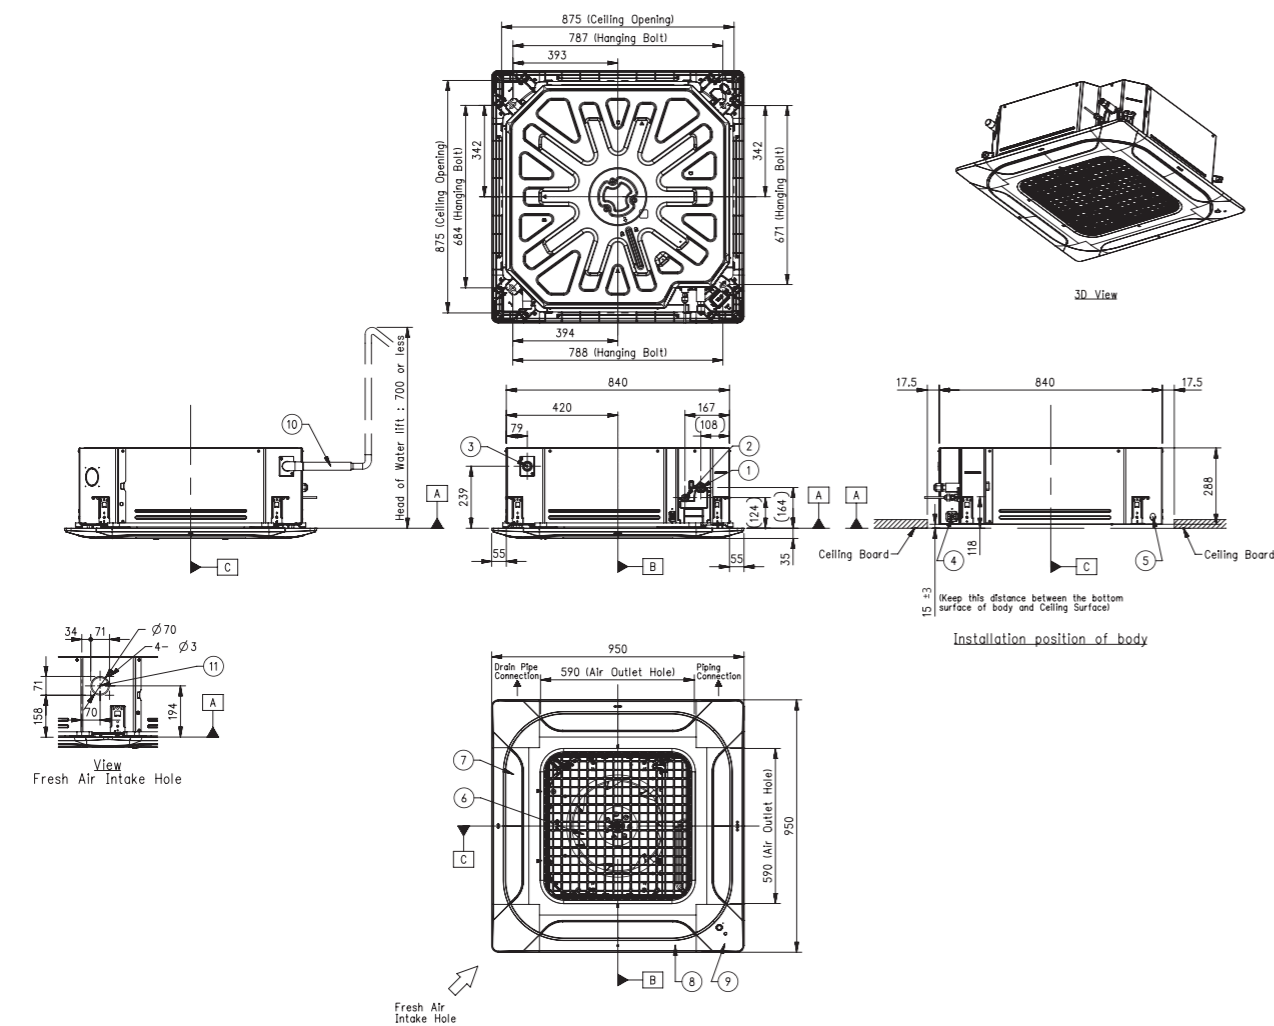


# CEILING CASSETTE

STANDARD INVERTER (R32)

CT09F NR0 / CT12F NR0

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Intake
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Decoration Corner Display Cover
11	Flexible Drain Hose
12	Fresh Air Intake Hole

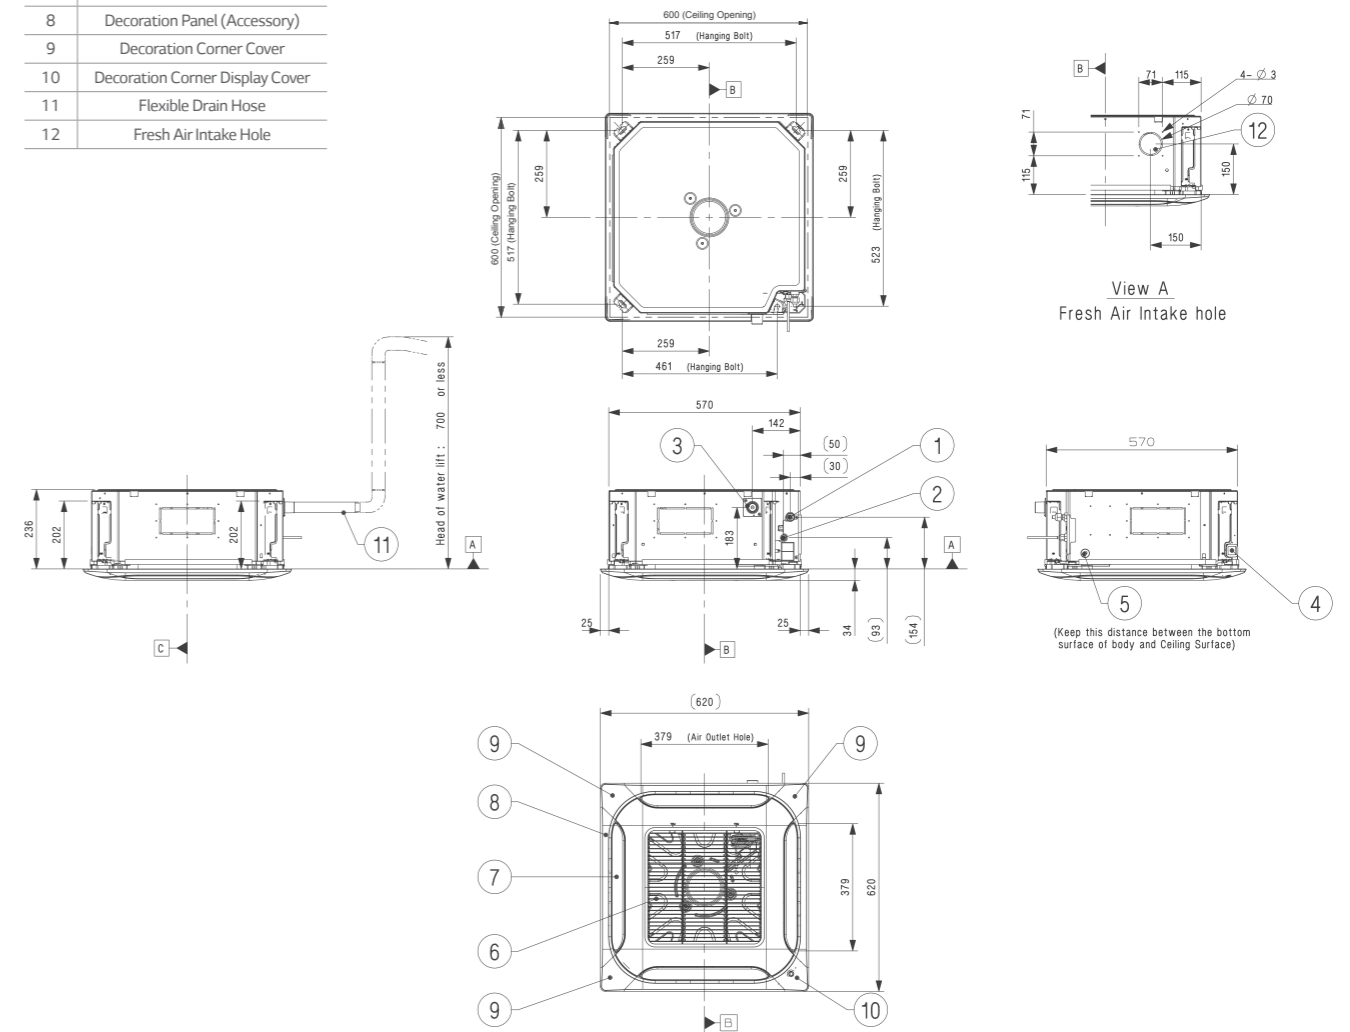


# CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

## CT18F NQ0

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication cable routing hole
5	Wired remote controller wire routing hole
6	Air Intake
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Decoration Coner Display Cover
11	Flexible Drain Hose
12	Fresh air Intake Hole

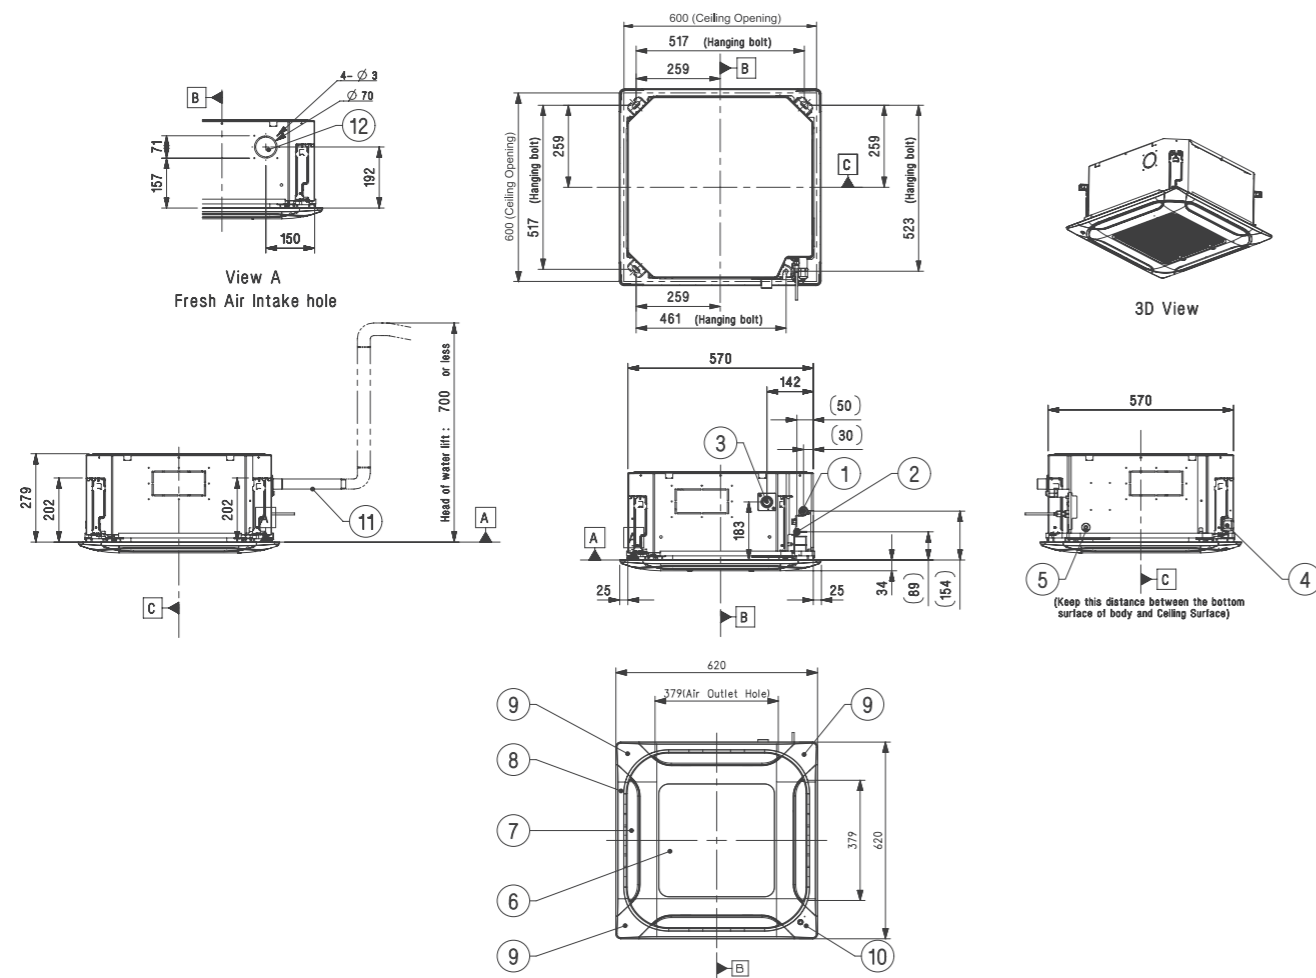


# CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

## CT24F NB0 / UT30F NB0

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Wired Remote Controller Wire Routing Hole
6	Air Inlet
7	Air Outlet
8	Decoration Panel (Accessory)
9	Decoration Corner Cover
10	Flexible Drain Hose
11	Fresh Air Intake Hole

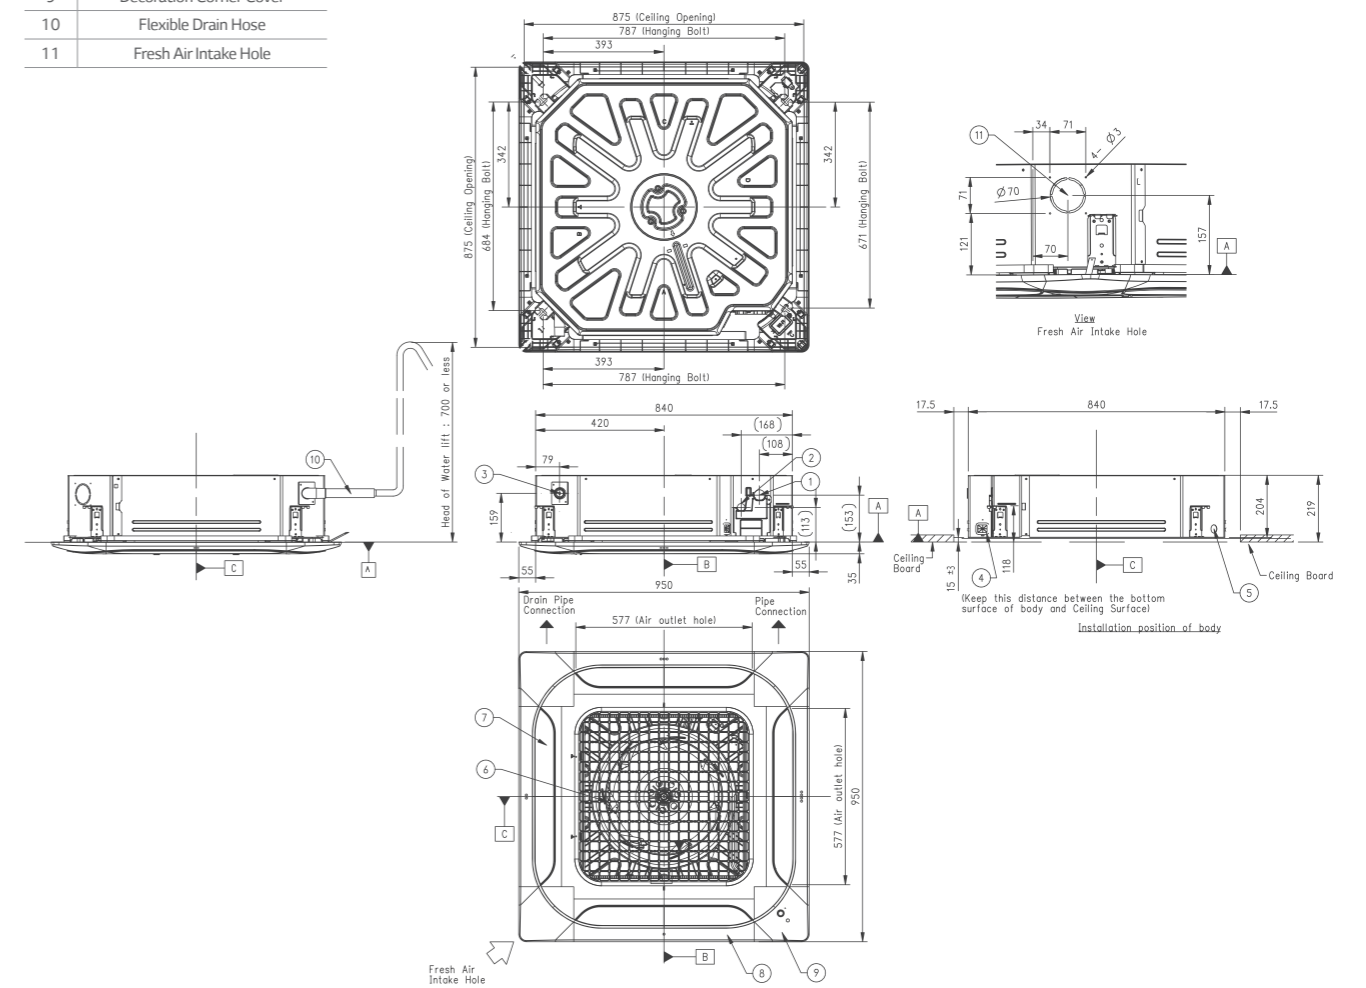


# CEILING CASSETTE

STANDARD / COMPACT INVERTER (R32)

## UT36F NAO

(Unit : mm)

Part Name	Part Name
1 Gas Pipe Connection	7 Air Outlet
2 Liquid Pipe Connection	8 Decoration Panel (Accessory)
3 Drain Pipe Connection	9 Decoration Corner Cover
4 Power and Communication Cable Routing Hole	10 Flexible Drain Hose
5 Wired Remote Controller Wire Routing Hole	11 Fresh Air Intake Hole
6 Air Inlet	

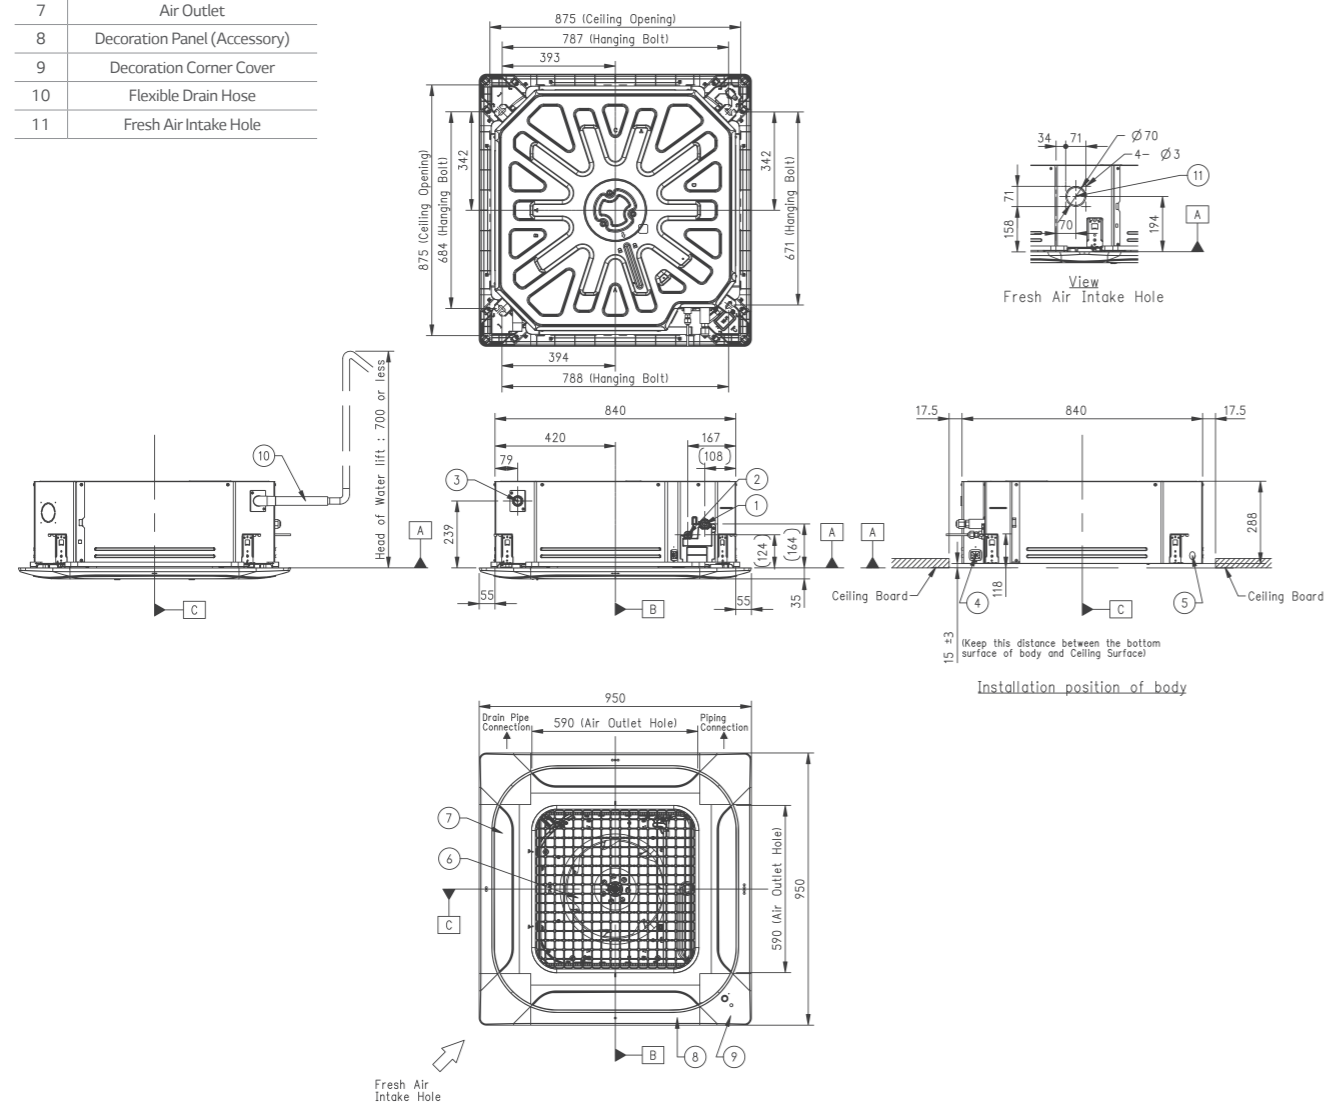


# CEILING CASSETTE

STANDARD INVERTER (R32)

## UT42F NAO / UT48F NAO / UT60F NAO

(Unit : mm)

Part Name	Part Name
1 Gas Pipe Connection	7 Air Outlet
2 Liquid Pipe Connection	8 Decoration Panel (Accessory)
3 Drain Pipe Connection	9 Decoration Corner Cover
4 Power and Communication Cable Routing Hole	10 Flexible Drain Hose
5 Wired Remote Controller Wire Routing Hole	11 Fresh Air Intake Hole
6 Air Inlet	

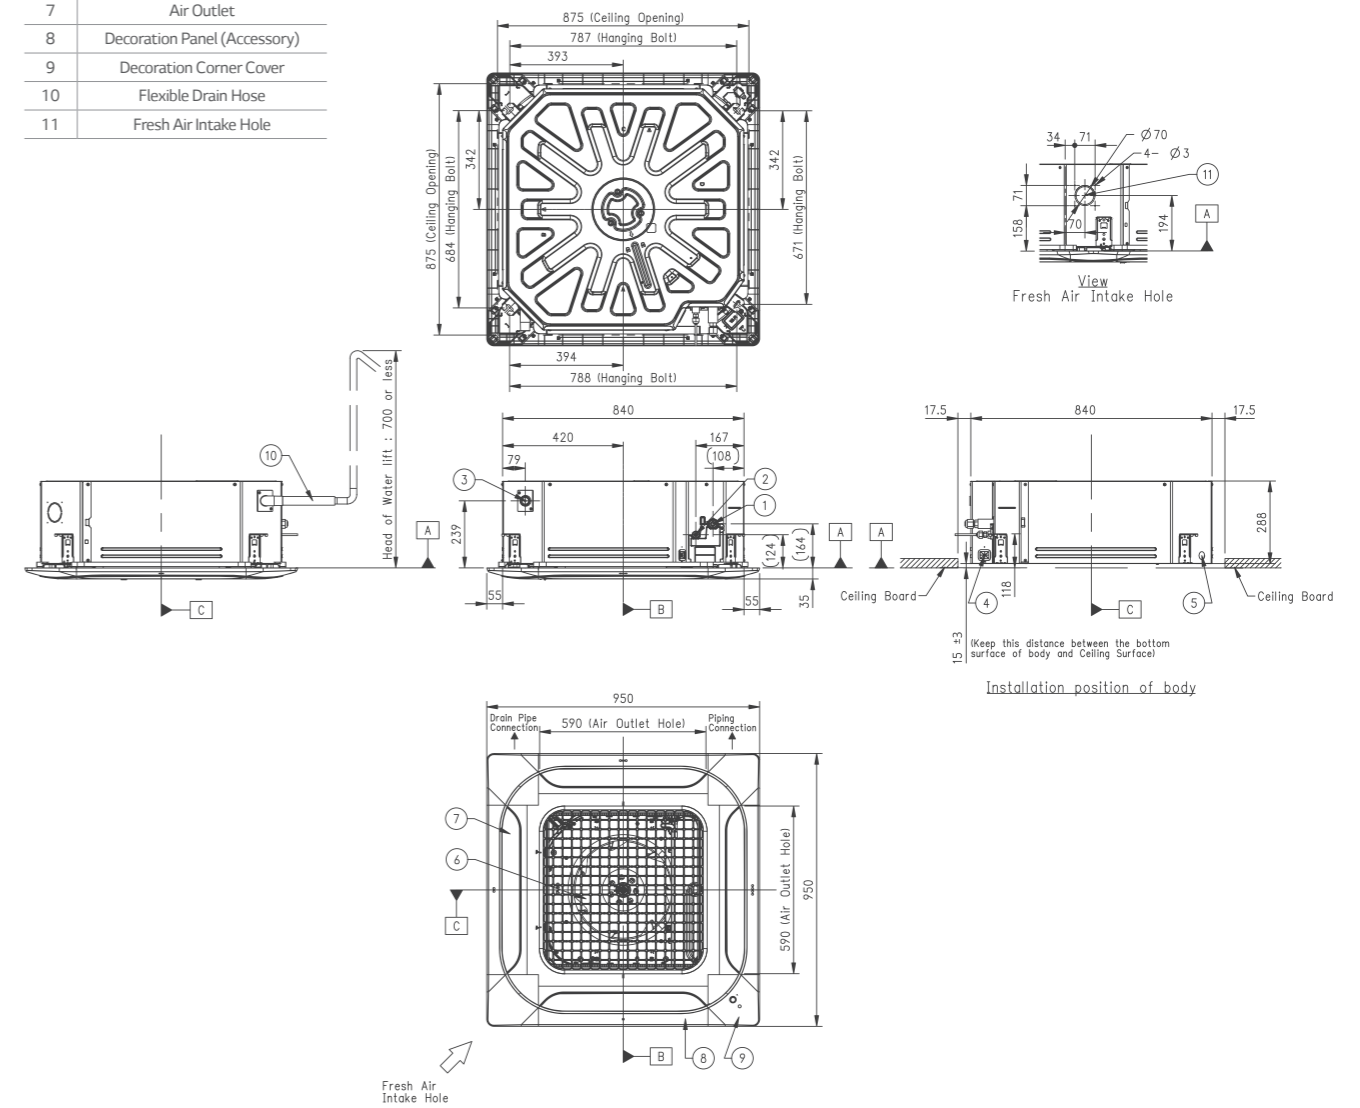


# CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC

## UM12FH N10 / UM18FH N10

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Routing Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

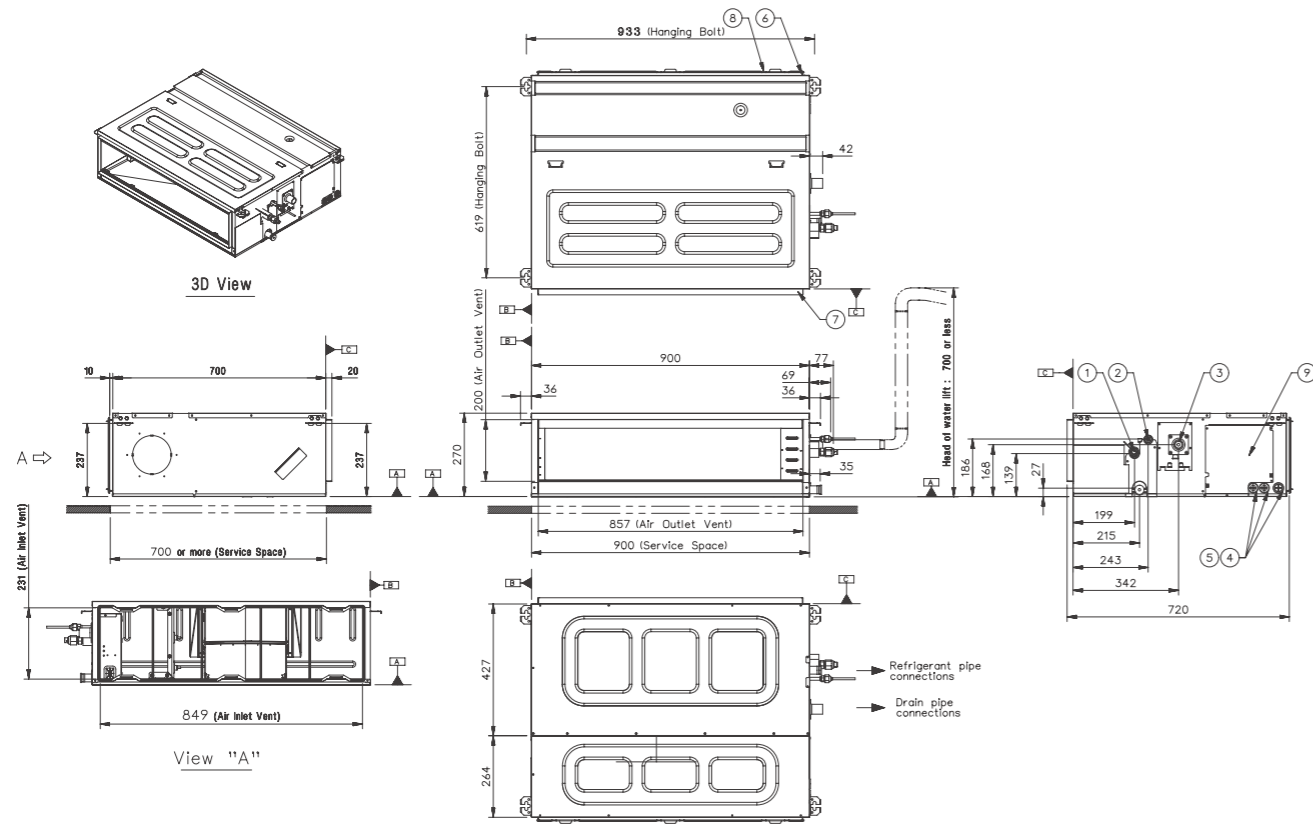


# CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC

## UM24FH N20 / UM30FH N20

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover
10	Flexible Drain Hose

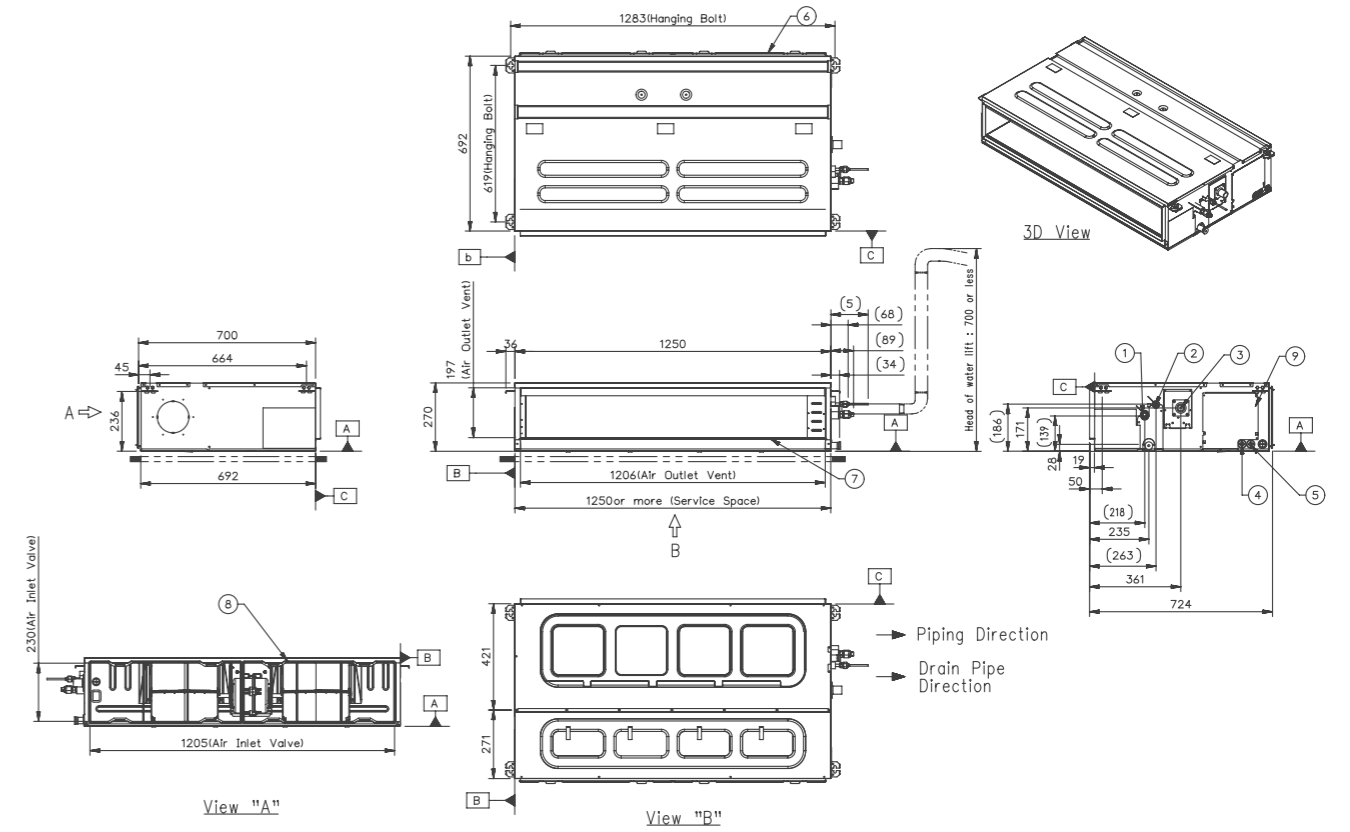


# CEILING CONCEALED DUCT

H-INVERTER (R32) / MID STATIC

## UM36FH N30 / UM42FH N30 / UM48FH N30

(Unit : mm)

	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

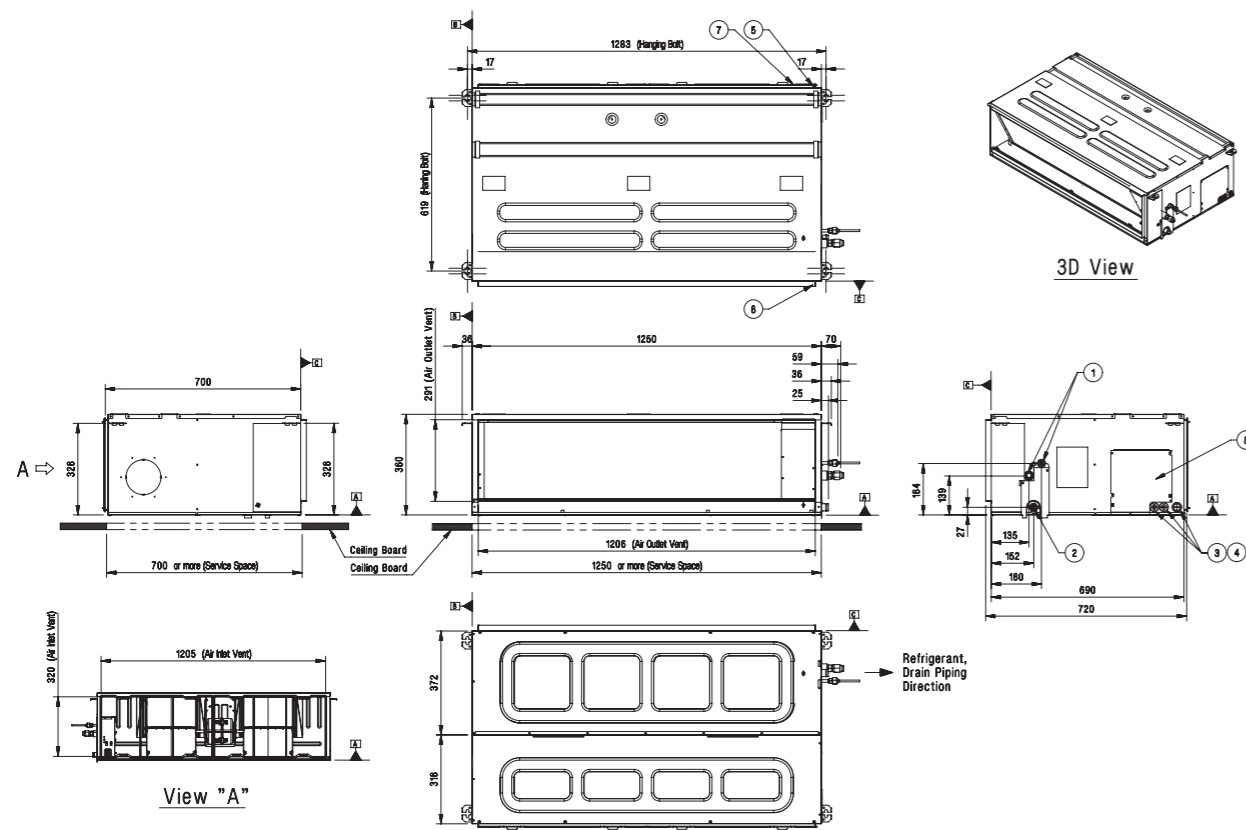


# CEILING CONCEALED DUCT

H-INVERTER (R32) / LOW STATIC

## UL12FH N50

(Unit : mm)

	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power supply Connection
5	Air Discharge
6	Air Suction

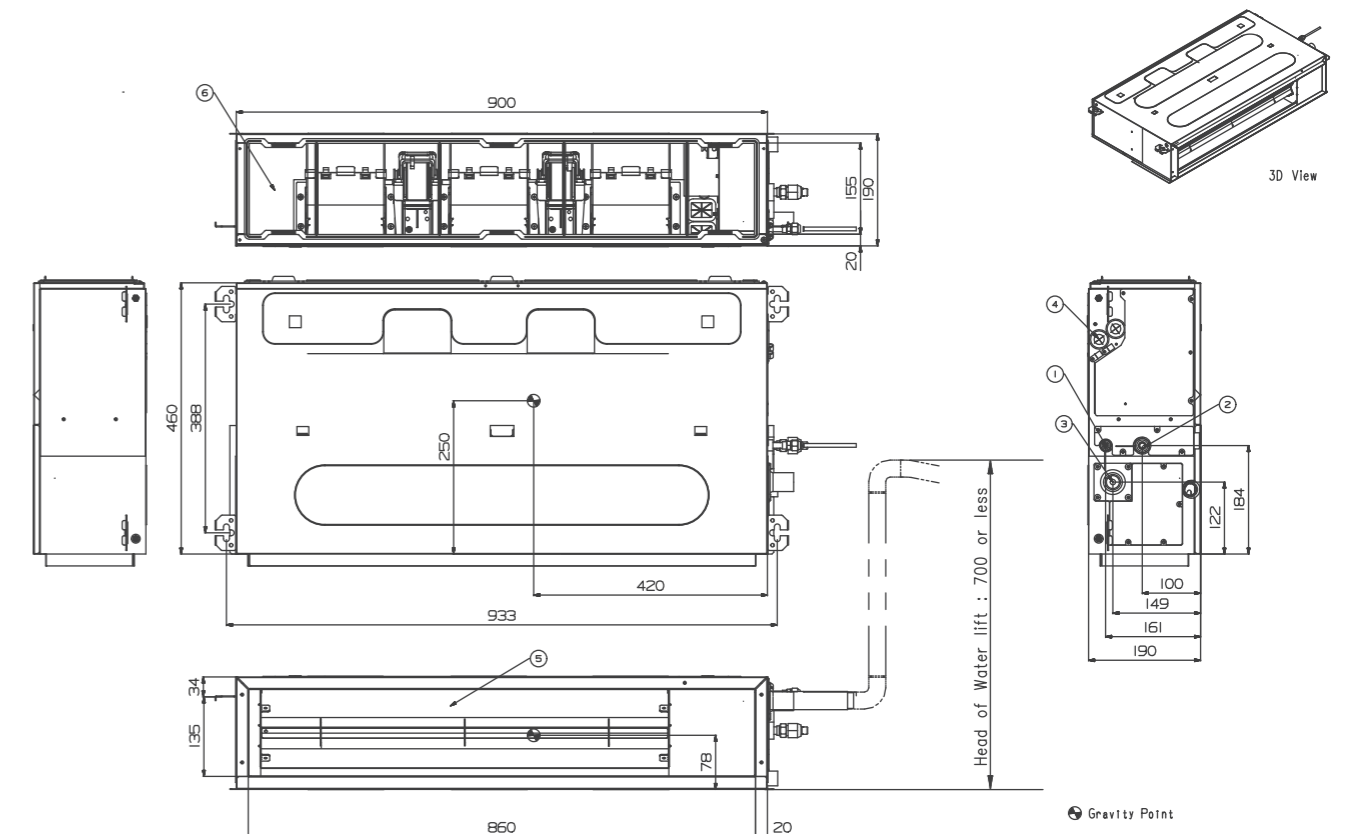



# CEILING CONCEALED DUCT

H-INVERTER (R32) / LOW STATIC



## UL18FH N30

(Unit : mm)

Part Name	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

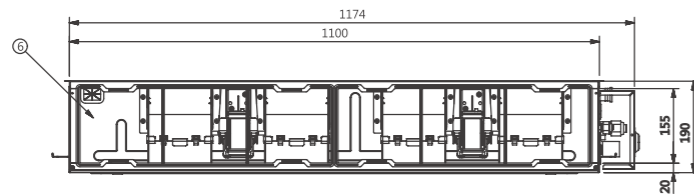

3D-VIEW

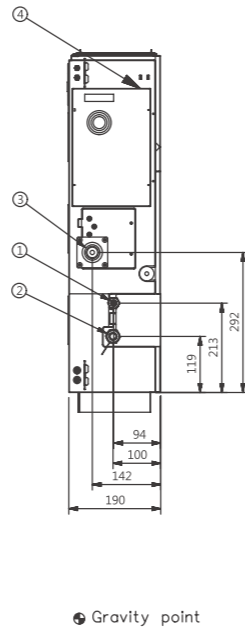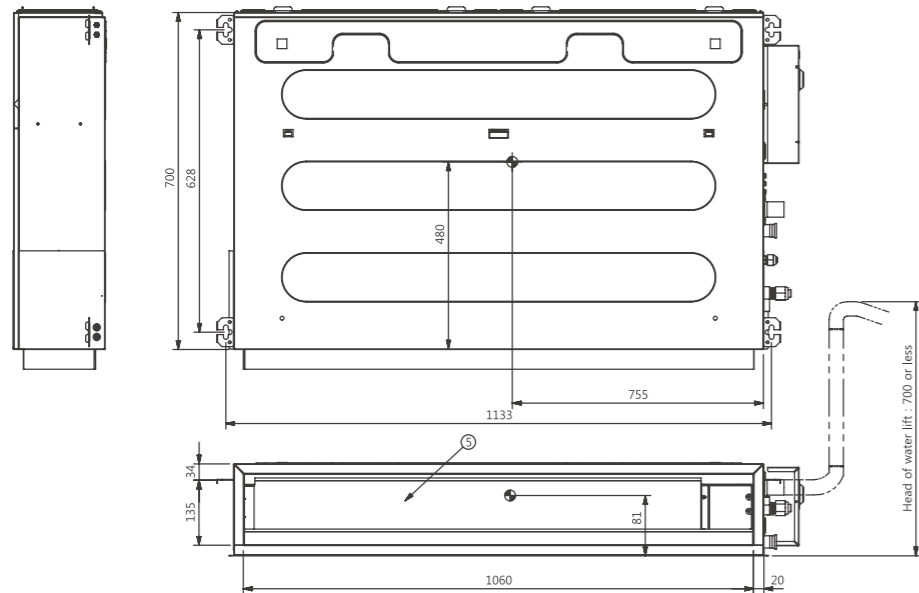

Gravity point


# CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / MID STATIC

## CM18F N10 / CM24F N10 / UM30F N10

(Unit : mm)


Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

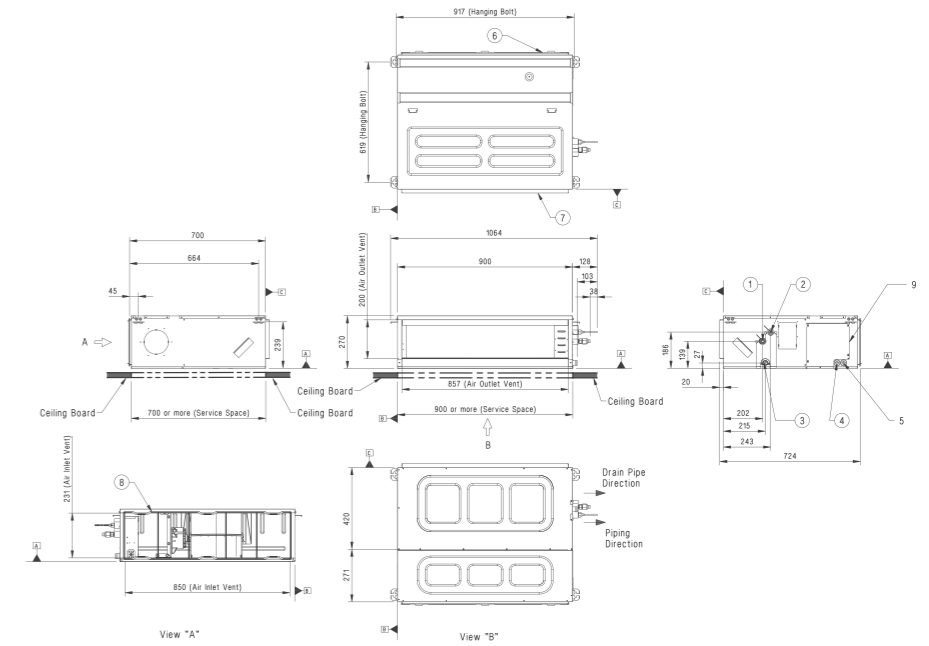

## UM36F N20

(Unit : mm)

Part Name	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

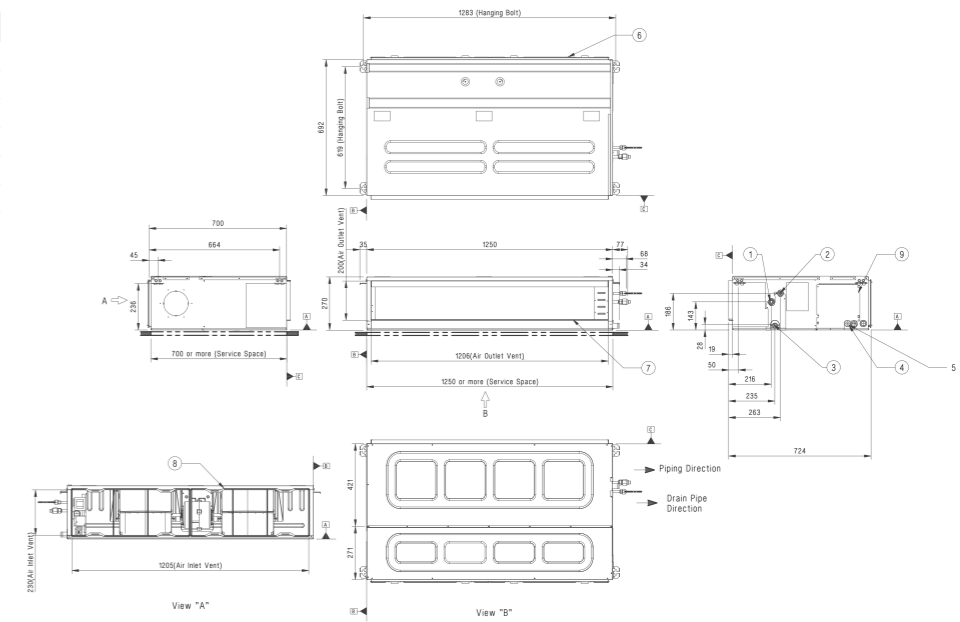




# CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / MID STATIC

## UM42F N20

(Unit : mm)

Part Name	Part Name
1	Liquid Pipe Connection
2	Gas Pipe Connection
3	Drain Pipe Connection
4	Power Supply Connection
5	Air Discharge
6	Air Suction

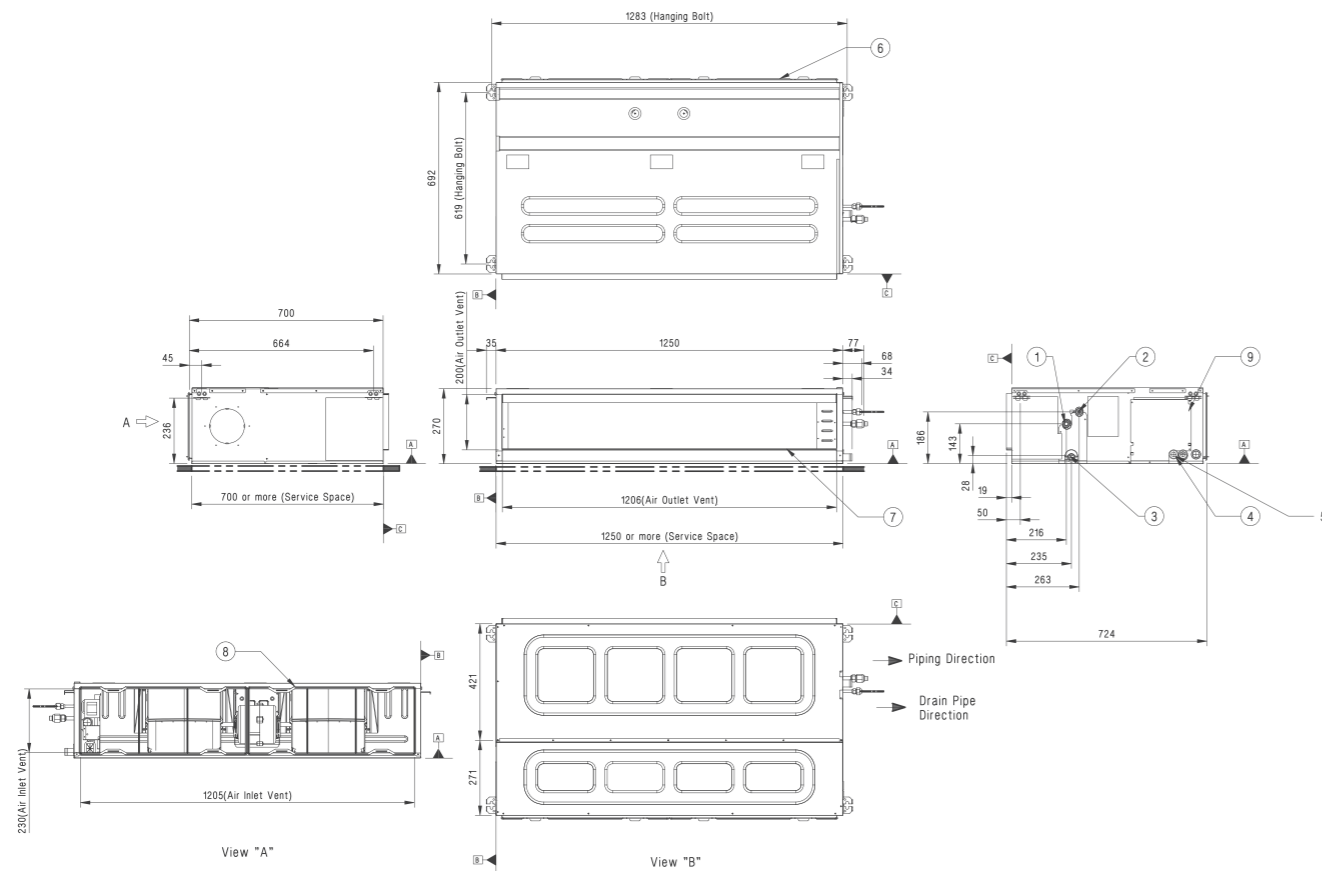


# CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / MID STATIC

## UM48F N30 / UM60F N30

(Unit : mm)

Part Name	Part Name
1	Gas Pipe Connection
2	Liquid Pipe Connection
3	Drain Pipe Connection
4	Power and Communication Cable Hole
5	Remote Controller Cable Hole
6	Air Inlet
7	Air Outlet
8	Air Filters
9	Control Cover

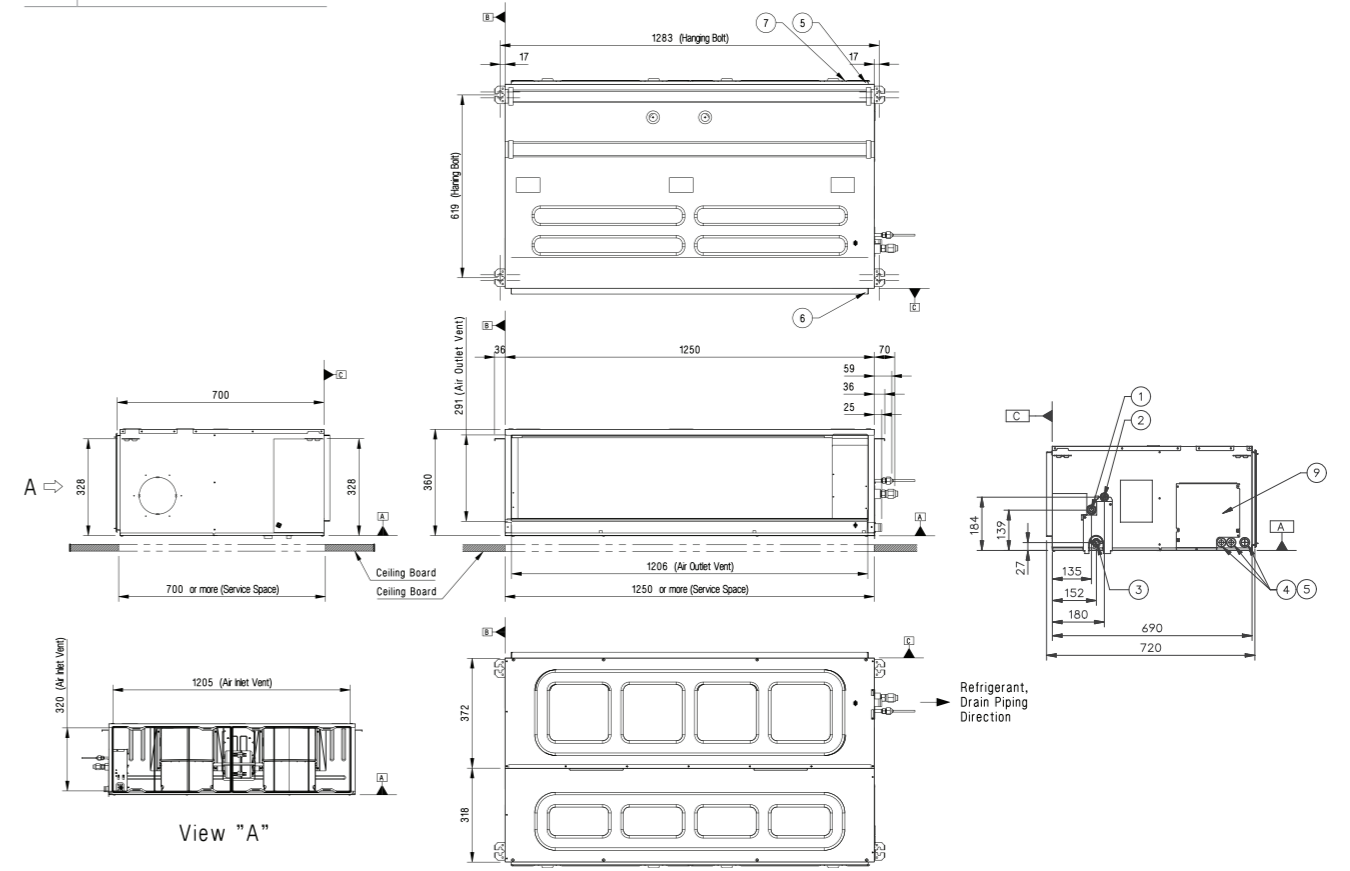


# CEILING CONCEALED DUCT

STANDARD INVERTER (R32) / LOW STATIC

## CL09F N50 / CL12F N50

(Unit : mm)

Part Name	
1	Liquid pipe connection
2	Gas pipe connection
3	Drain pipe connection
4	Power supply connection
5	Air discharge
6	Air suction

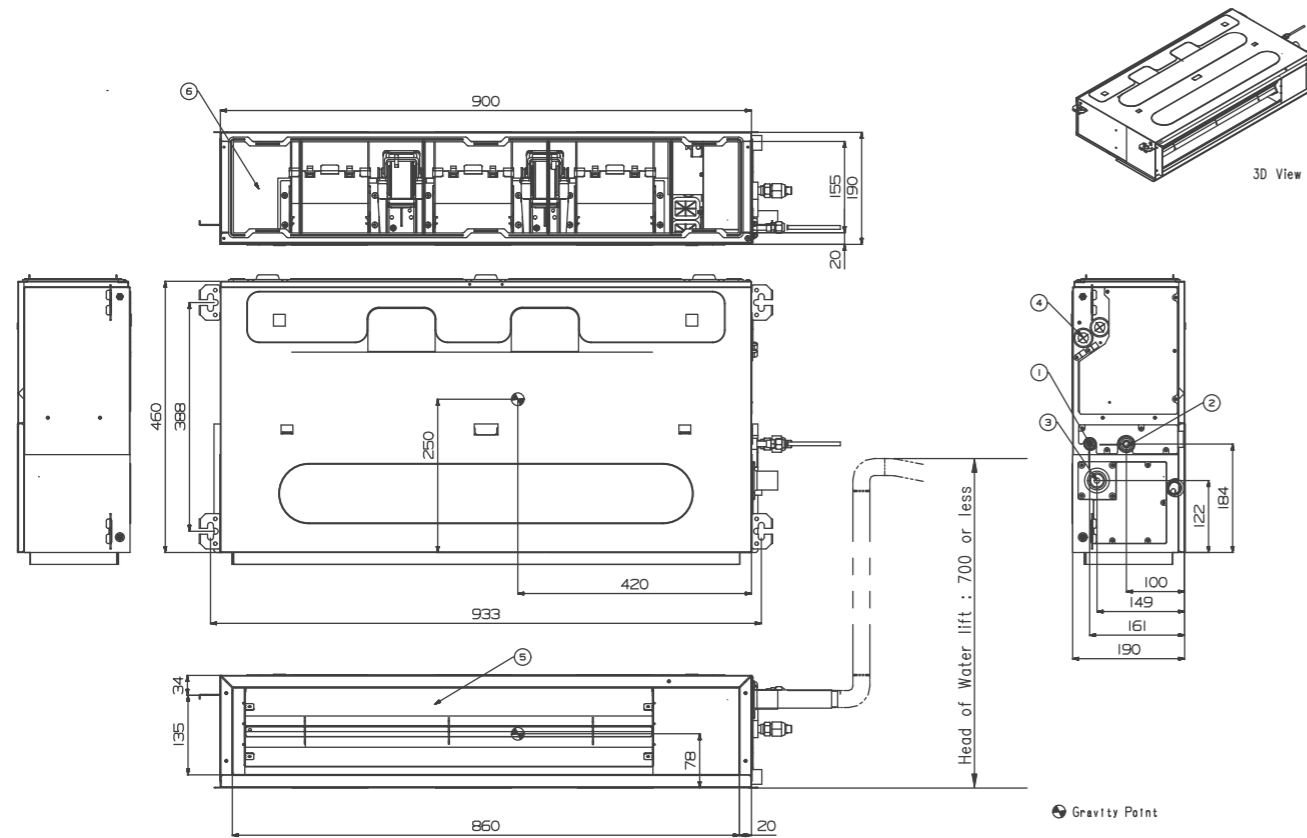


# CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / LOW STATIC

## CL18F N60

(Unit : mm)

Part Name	
1	Liquid pipe connection
2	Gas pipe connection
3	Drain pipe connection
4	Power supply connection
5	Air discharge
6	Air suction

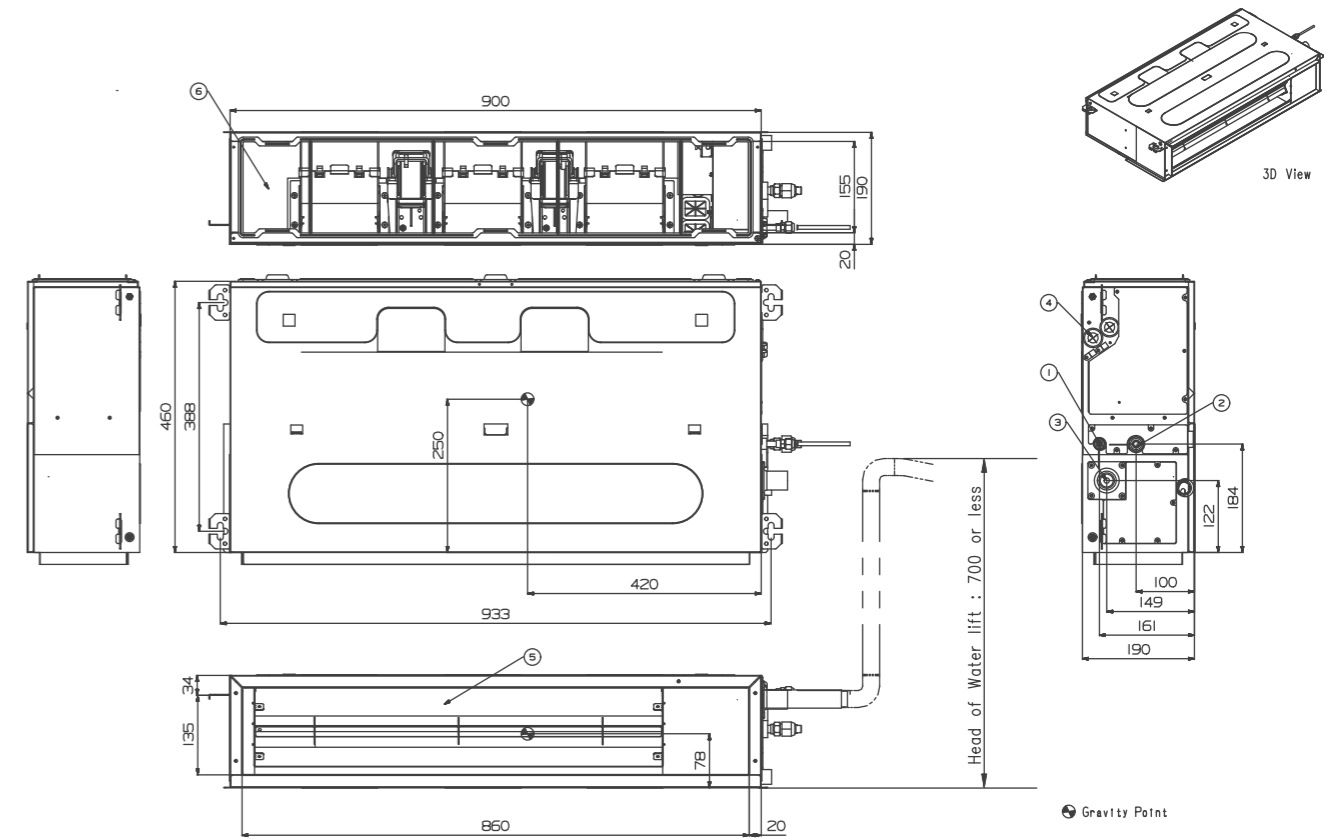


# CEILING CONCEALED DUCT

STANDARD / COMPACT INVERTER (R32) / LOW STATIC

## CL24F N30

(Unit : mm)

Part Name	
1	Liquid pipe connection
2	Gas pipe connection
3	Drain pipe connection
4	Power supply connection
5	Air discharge
6	Air suction

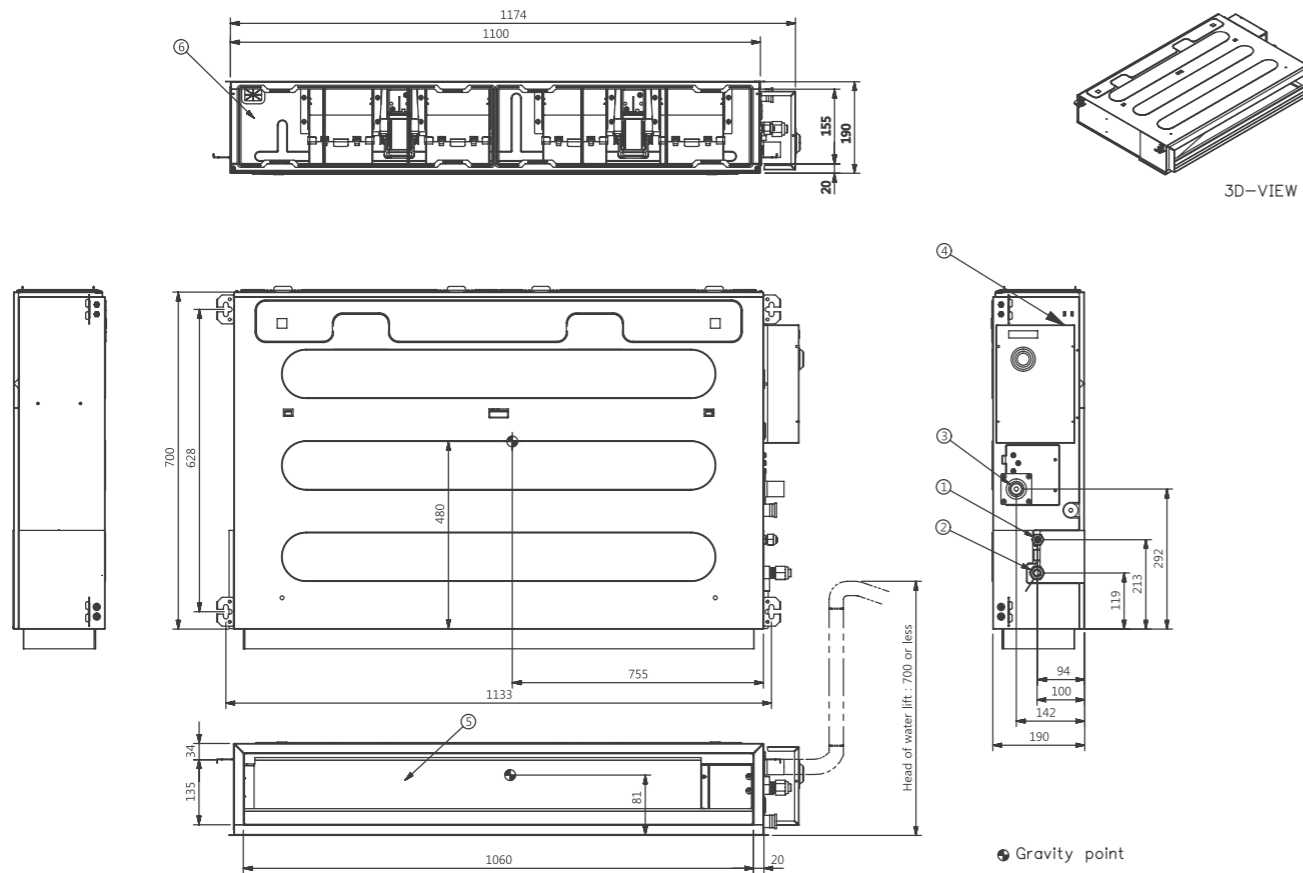


# CEILING CONCEALED DUCT

STANDARD INVERTER (R410A) / HIGH STATIC

## UB70 N94 / UB85 N94

(Unit : mm)

Part Name	
1	Air suction flange
2	Air discharge flange
3	Control Box
4	Gas piping connection
5	Liquid pipe connection
6	Drain pipe connection
7	Drain pump (Option)

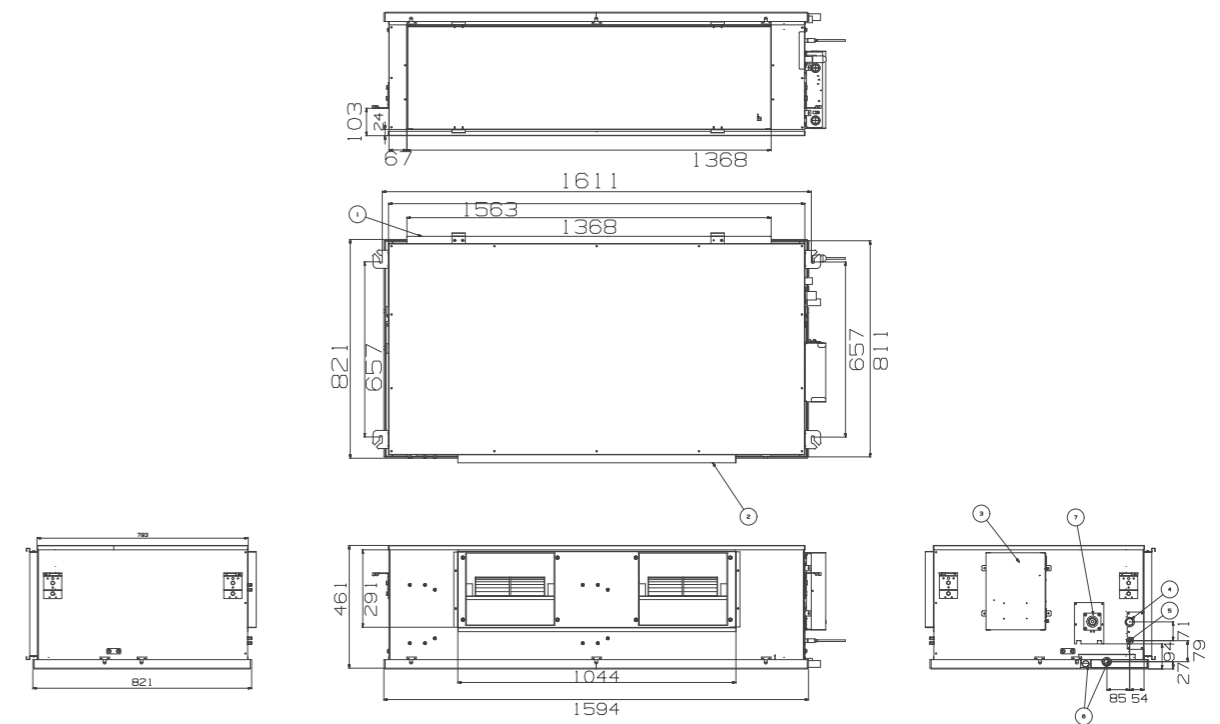


# CEILING SUSPENDED UNIT

H-INVERTER (R32)

## UV18FH N10

(Unit : mm)

	Part Name
1	Air Intake
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain hose routing hole
5	Refrigerant pipe and routing hole
6	Gas pipe connection
7	Liquid pipe connection

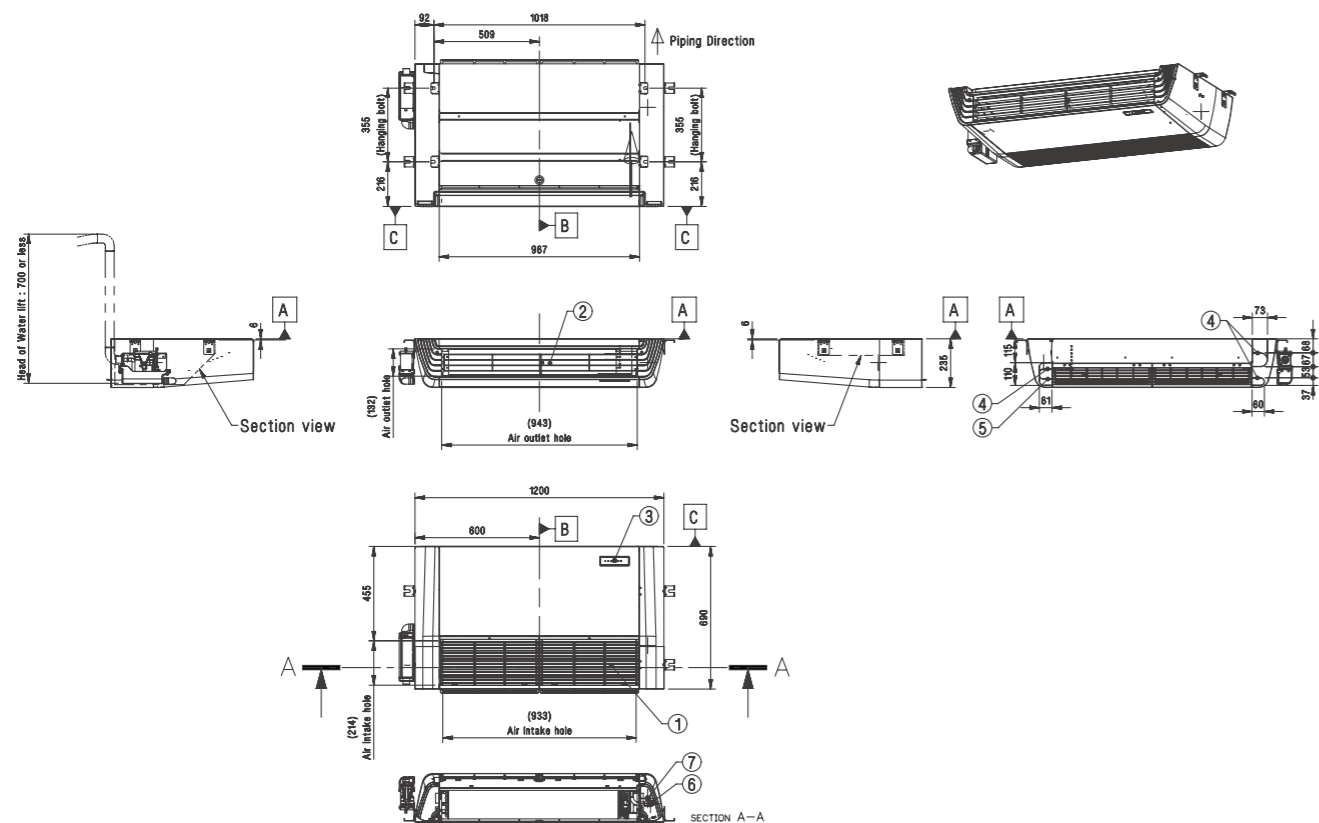


# CEILING SUSPENDED UNIT

H-INVERTER (R32)

## UV24FH N20 / UV30FH N20 / UV36FH N20 / UV42FH N20

(Unit : mm)

	Part Name
1	Air Intake
2	Air Outlet
3	Remote Controller Signal Receiver
4	Drain hose routing hole
5	Refrigerant pipe and routing hole
6	Gas pipe connection
7	Liquid pipe connection

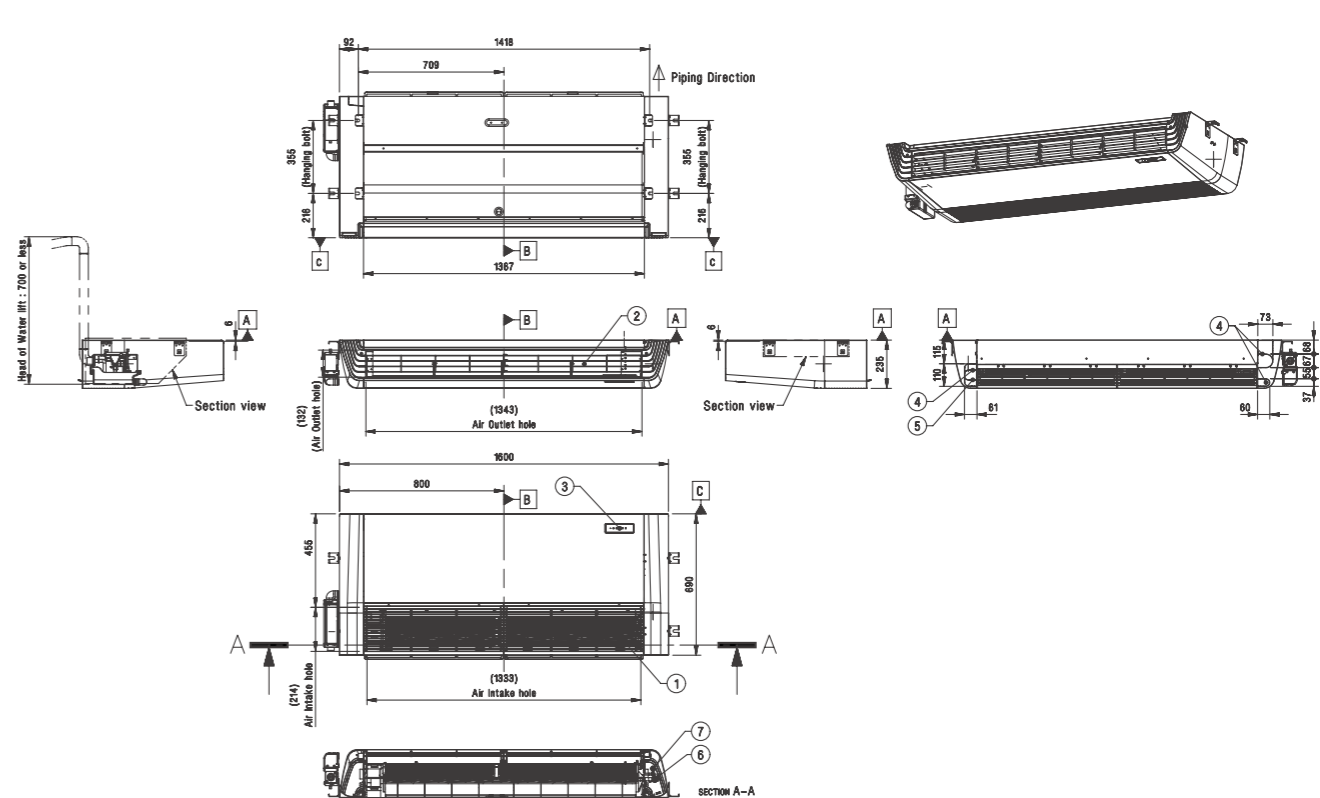


# CEILING SUSPENDED UNIT

STANDARD / COMPACT INVERTER (R32)

## UV18F N10 / UV24F N10 / UV30F N10

(Unit : mm)

Part Name	Part Name
1	Air Intake
2	Air outlet
3	Remote Controller Signal Receiver
4	Drain hose routing hole
5	Refrigerant pipe and cable routing hole
6	Gas pipe connection
7	Liquid pipe connection

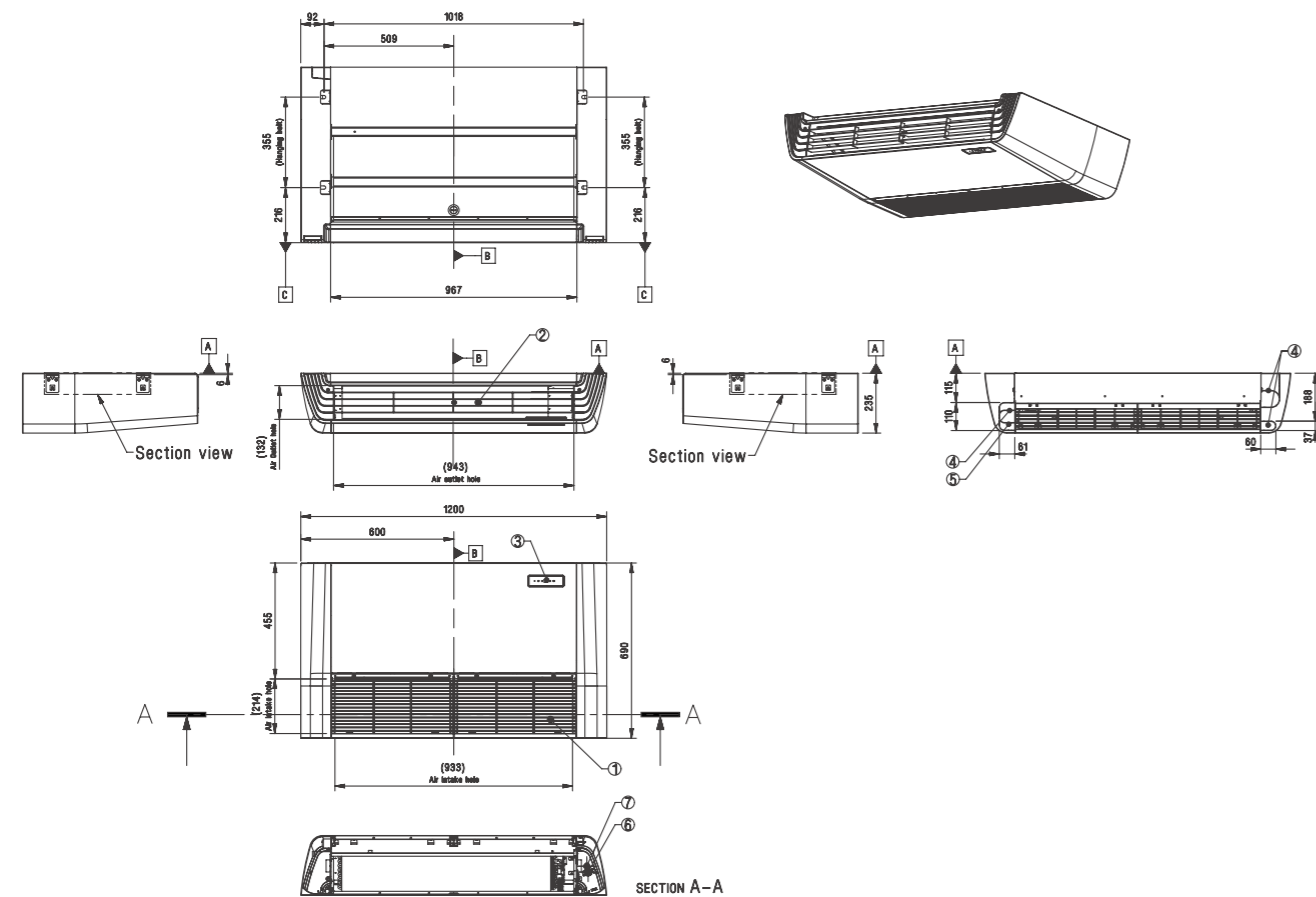


# CEILING SUSPENDED UNIT

STANDARD INVERTER (R32)

## UV36F N20 / UV42F N20 / UV48F N20 / UV60F N20

(Unit : mm)

Part Name	Part Name
1	Air Intake
2	Air outlet
3	Remote Controller Signal Receiver
4	Drain hose routing hole
5	Refrigerant pipe and cable routing hole
6	Gas pipe connection
7	Liquid pipe connection

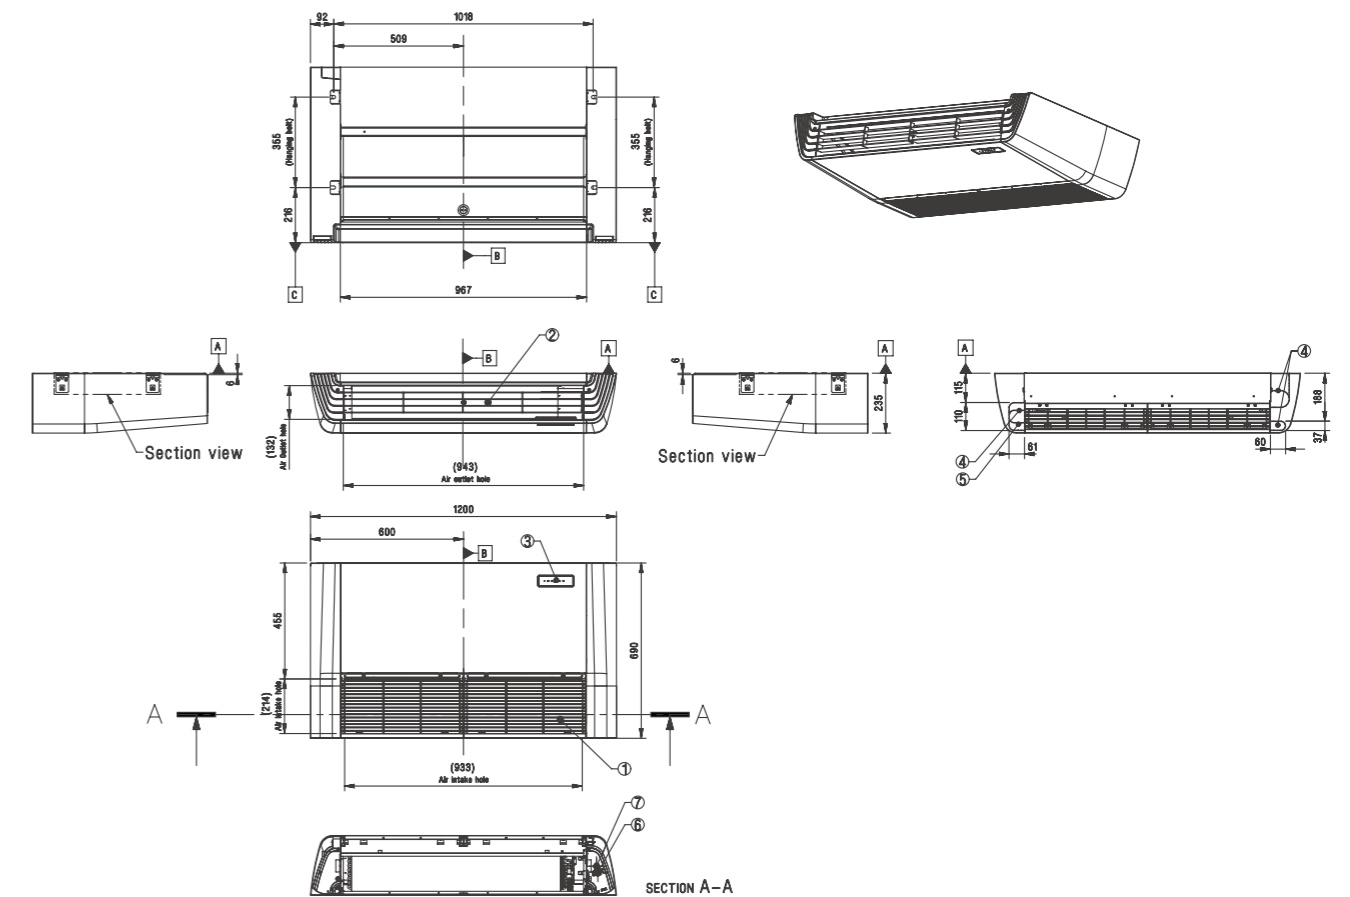


# CONSOLE

STANDARD INVERTER (R32)

## UQ09 NAO / UQ12 NAO / UQ18 NAO

(Unit : mm)

Part Name
1 Air Suction Grille
2 Remote Controller Signal Reciver
3 Air Discharge Grille
4 Gas Pipe Connection
5 Liquid Pipe Connection
6 Drain Hose Connection
7 Refrigerant / Drain Pipe & Cable Routing Hole
8 Installation Plate
9 Terminal Block for Power Supply & Communication

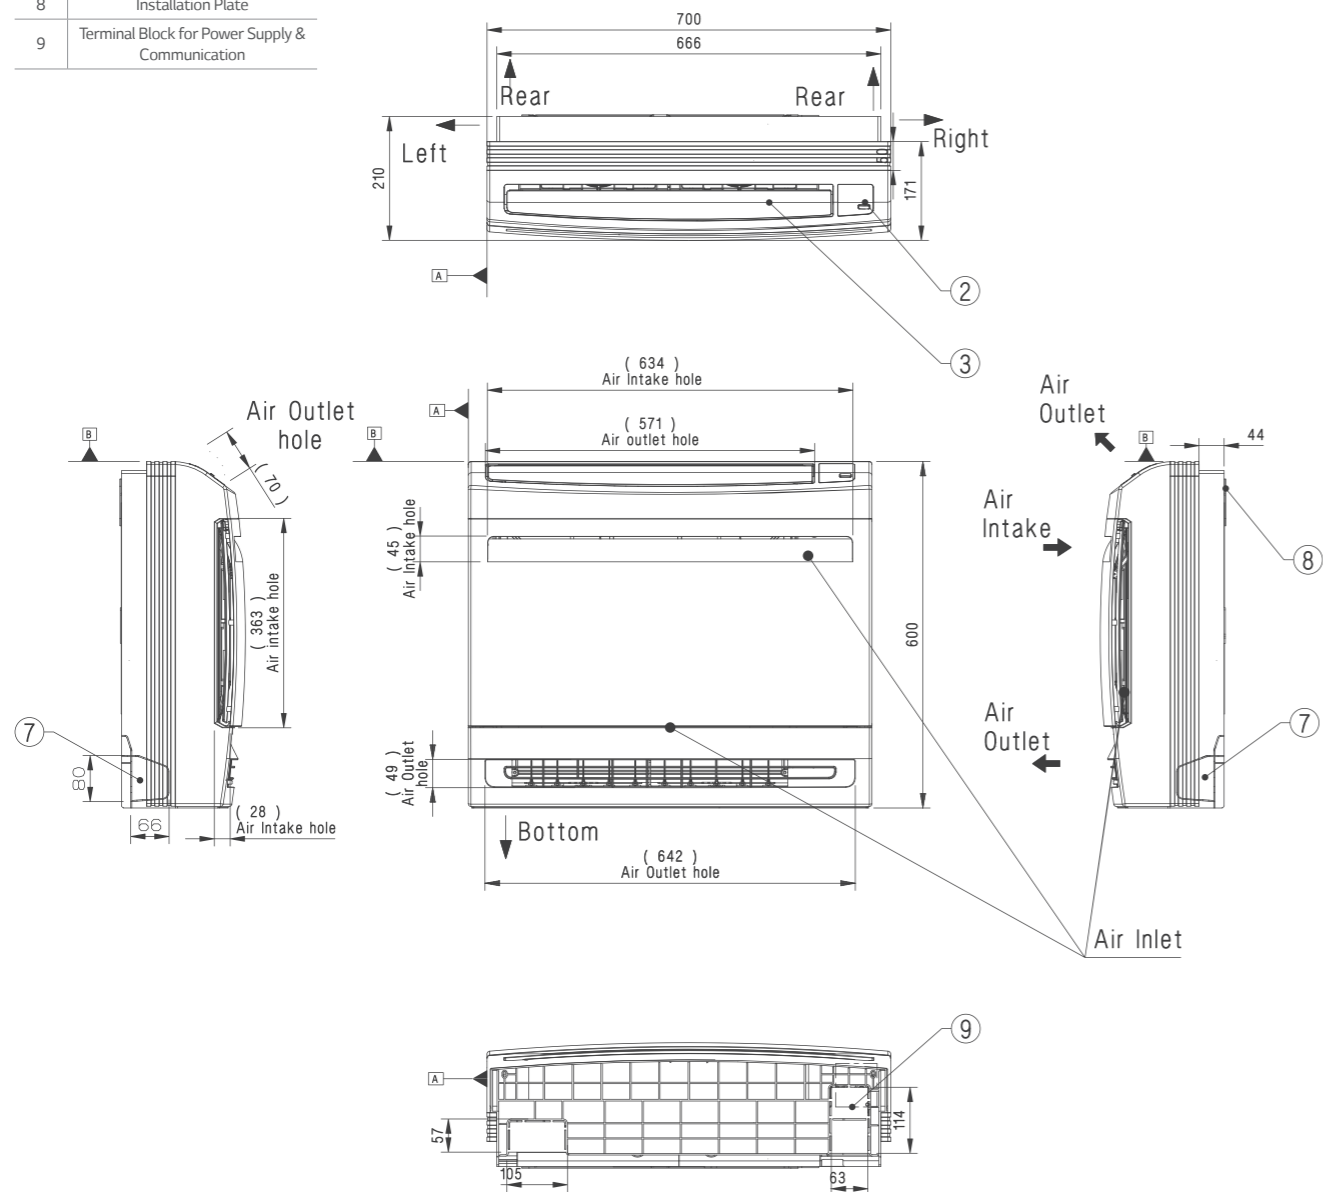


# WALL MOUNTED

STANDARD / COMPACT INVERTER (R32)

## US30F NR0 / US36F NR0

(Unit : mm)

Part Name
1 Refrigerant / Drain Pipe and Cabel Routing Hole
2 Installation Plate
3 Drain Hose Connection
4 Terminal Block for Power Supply Communication
5 Display & Remote Controller Signal Receiver
6 Decoration Cover

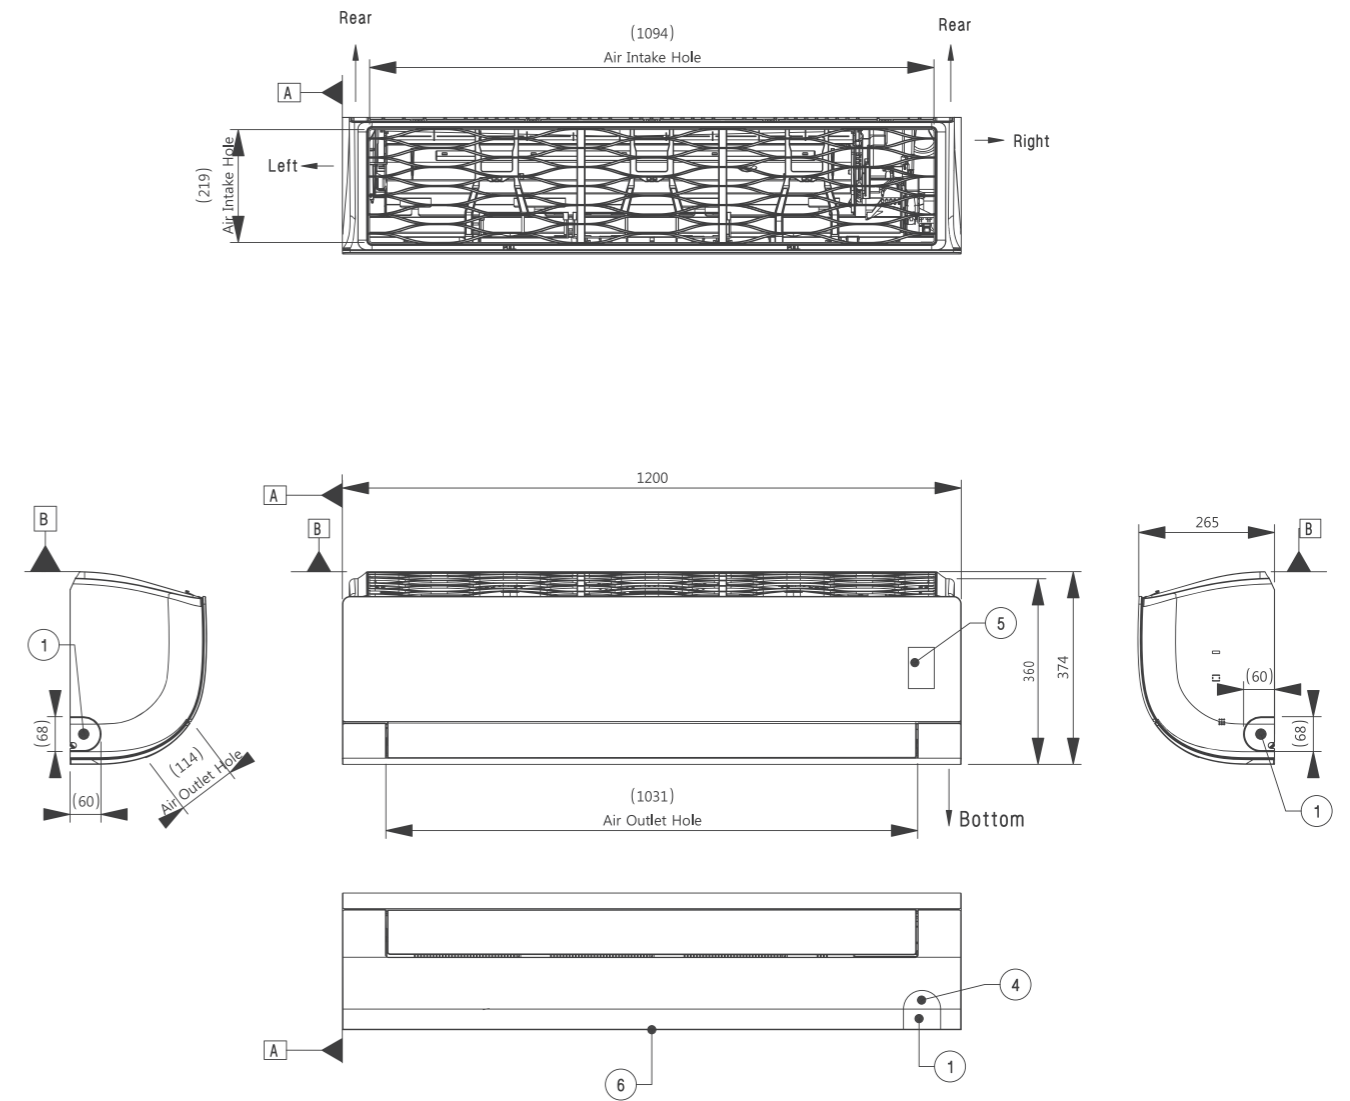


# FLOOR STANDING

STANDARD INVERTER (R410A)

## UP48 NT2

(Unit : mm)

Part Name
1 Front air discharge grille
2 Display & Single receiver
3 Air suction grille

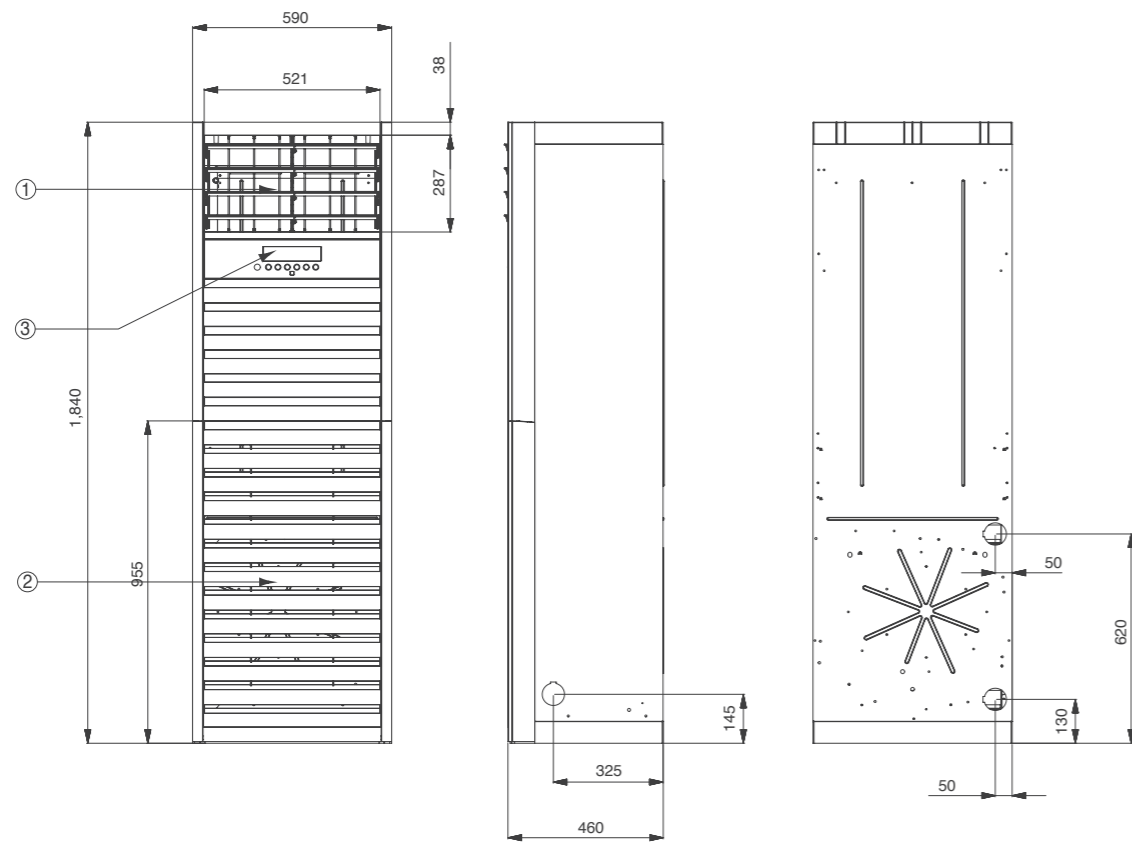


# UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)


## UUA1 UL0

(Unit : mm)

Part Name
1 Air Outlet
2 Control cover & SVC valve cover
3 Power and communication cable connection
4 Gas pipe connection
5 Liquid pipe connection
6 Power and communication cable routing hole
7 Refrigerant pipe routing hole
8 Handle
9 Intake air temperature sensor cover



3D View

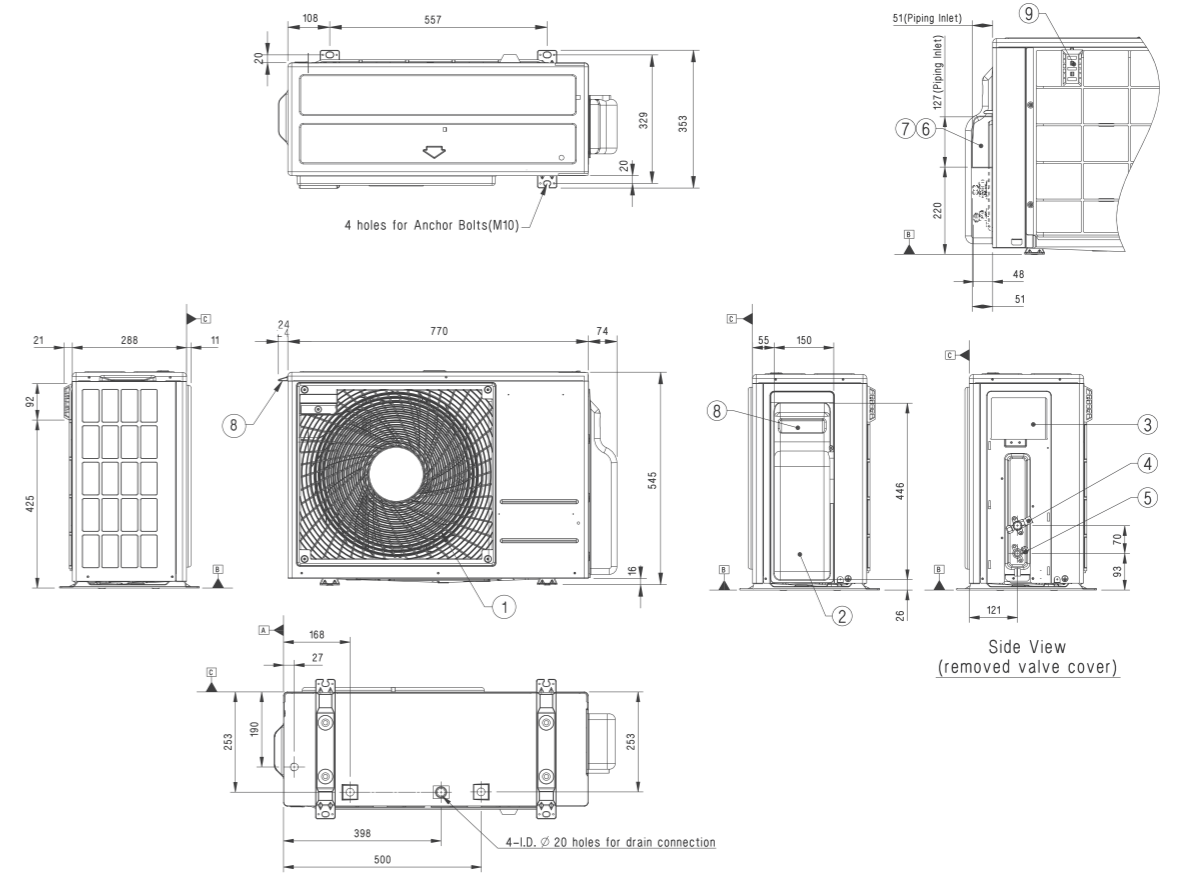

Side View  
(removed valve cover)


# UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)




## UUB1 U20

(Unit : mm)


Part Name
1 Air Outlet
2 Control cover & SVC valve cover
3 Power and communication cable connection
4 Gas pipe connection
5 Liquid pipe connection
6 Handle
7 Intake air temperature sensor cover



3D View

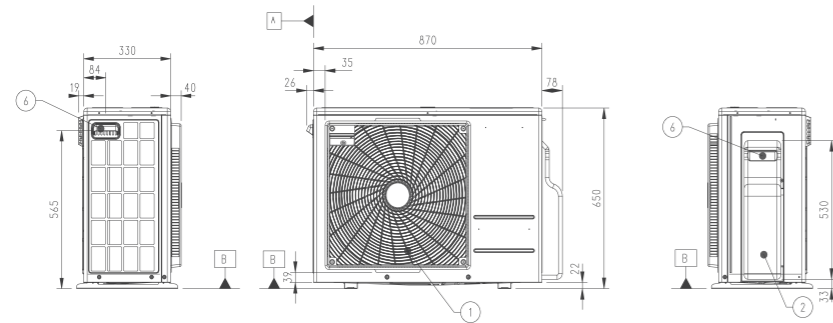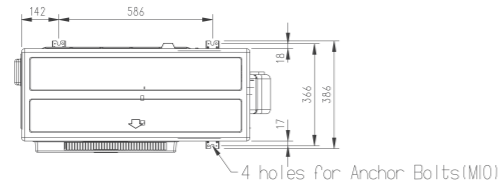

Side View  
(removed valve cover)

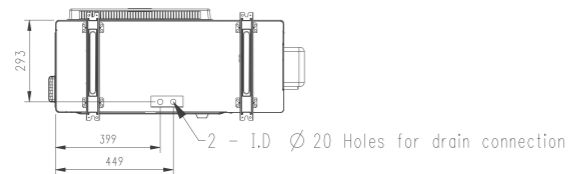


# UNIVERSAL OUTDOOR

HIGH / STANDARD / COMPACT INVERTER (R32)





## UUC1 U40

(Unit : mm)

Part Name
1 Air Outlet
2 Power and communication cable hole
3 Gas pipe connection
4 Liquid pipe connection
5 Handle
6 Pipe routing hole (Front)
7 Pipe routing hole (Side)
8 Pipe routing hole (Back)



3D View

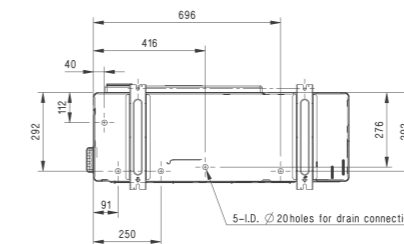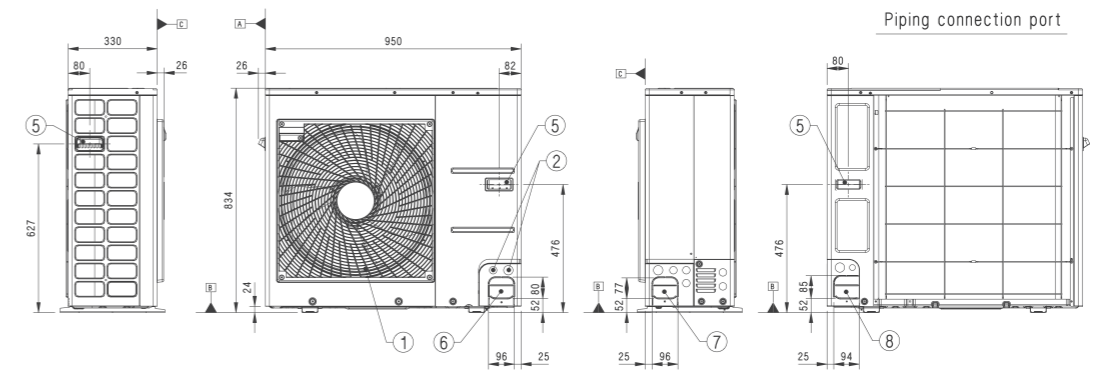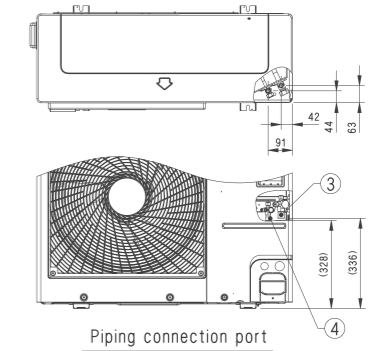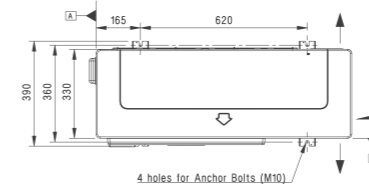




# UNIVERSAL OUTDOOR

STANDARD INVERTER (R32)



## UUD1 U30 / UUD3 U30

(Unit : mm)




Part Name
1 Air Outlet
2 Power and communication cable hole
3 Gas pipe connection
4 Liquid pipe connection
5 Handle
6 Pipe routing hole (Front)
7 Pipe routing hole (Side)
8 Pipe routing hole (Back)



3D View

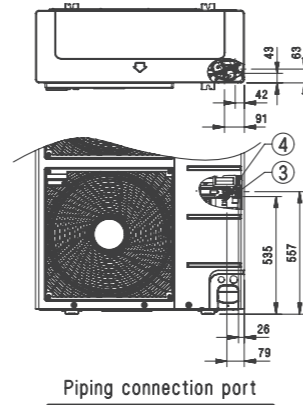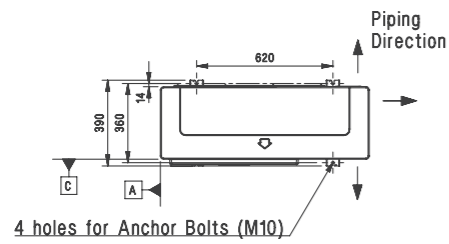

Piping connection port

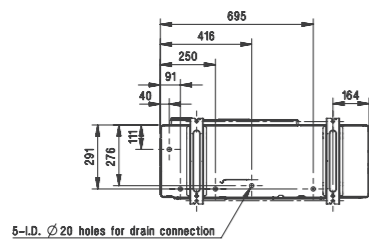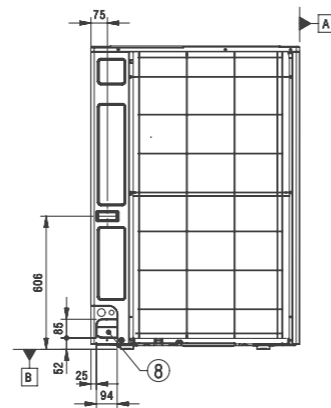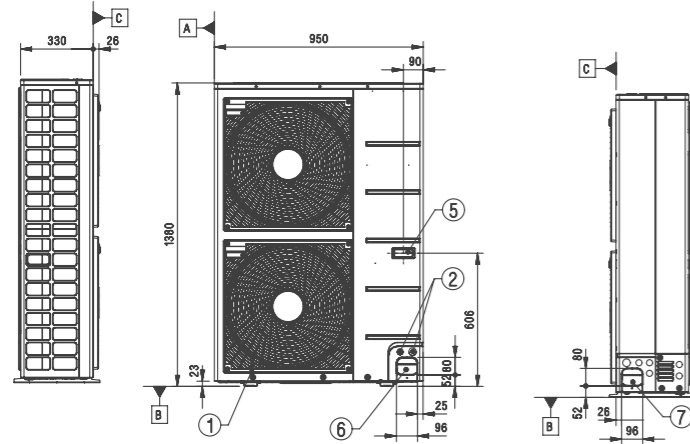



# UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)


## UU48WR U30 / UU49WR U30

(Unit : mm)





Part Name
1 Air Outlet
2 Power and communication cable hole
3 Gas Pipe Connection
4 Liquid Pipe Connection
5 Handle
6 Pipe routing hole (front)
7 Pipe routing hole (side)
8 Pipe routing hole (back)

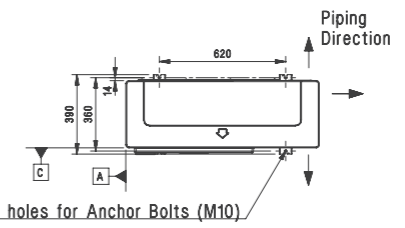

3D View

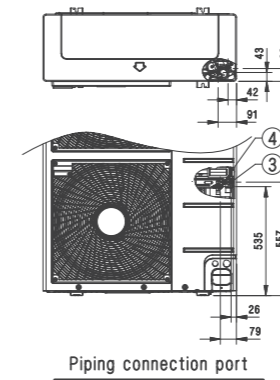

Piping connection port

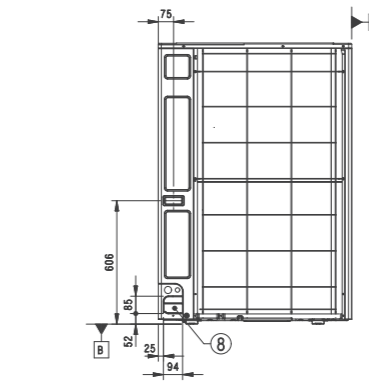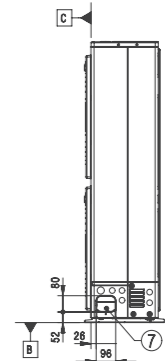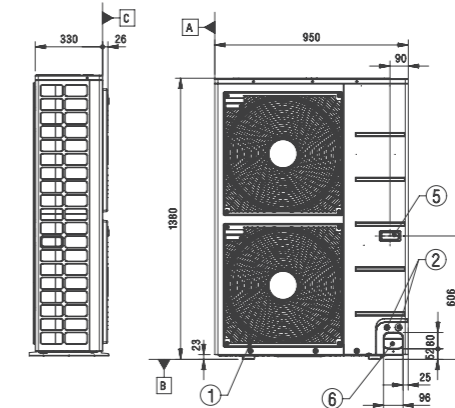


# UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)

## UU70W U34

(Unit : mm)

Part Name
1 Air discharge grille
2 Gas pipe connection
3 Liquid pipe connection
4 Power & Transmission connection

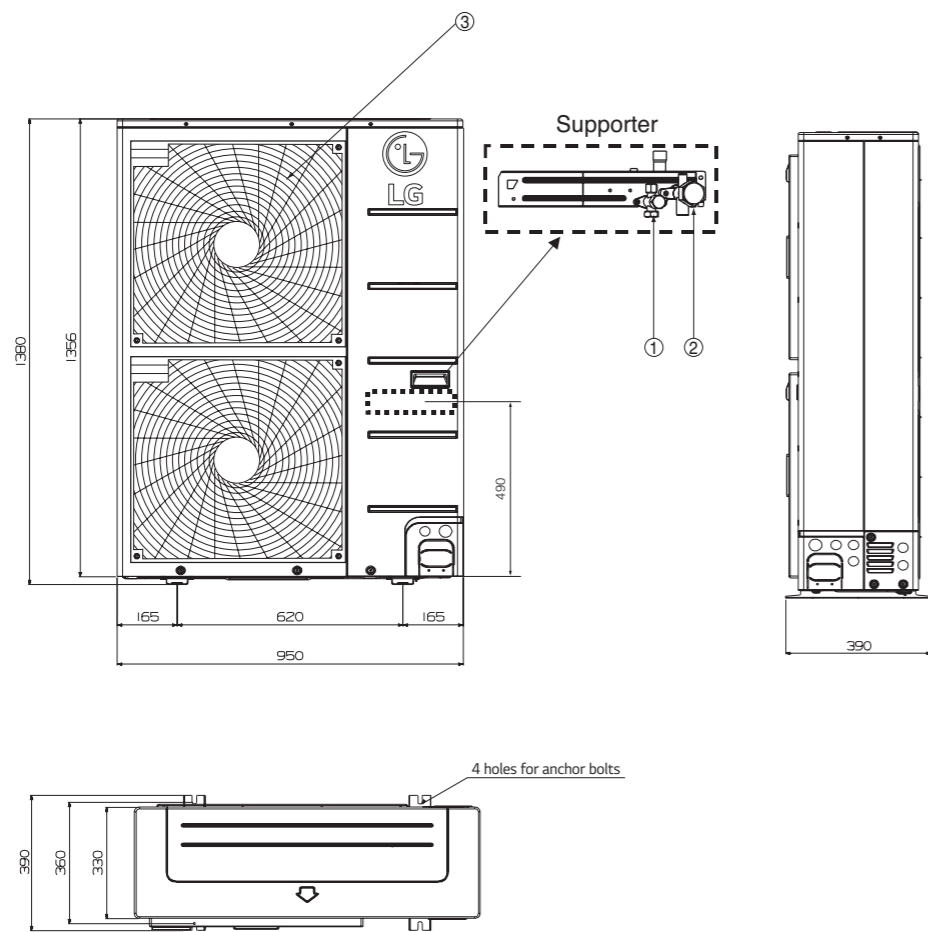

# UNIVERSAL OUTDOOR

STANDARD INVERTER (R410A)

## UU85W U74

(Unit : mm)

Part Name
1 Gas piping connection
2 Liquid piping connection
3 Air Inlet
4 Air Outlet
5 Drain Hole
6 Power and communication Cable Hole
7 Power and communication Cable Hole
8 Power and communication Cable Hole

