

User's Guide



Shop online at

omega.com®

Ω OMEGA®

omega.com

email: Info@omega.com

For latest product manuals:

omegamanual.info

ISO 9001
CERTIFIED
CORPORATE QUALITY
STAMFORD, CT

ISO 9002
CERTIFIED
CORPORATE QUALITY
MANCHESTER, UK

FMG-800 SERIES **Plastic Bodied Magmeter**



OMEGAnet® Online Service
omega.com

Internet e-mail
info@omega.com

Servicing North America:

U.S.A.:
ISO 9001 Certified

One Omega Drive, P.O. Box 4047
Stamford, CT 06907-0047
TEL: (203) 359-1660 FAX: (203) 359-7700
e-mail: info@omega.com

Canada:

976 Bergar
Laval (Quebec) H7L 5A1, Canada
TEL: (514) 856-6928 FAX: (514) 856-6886
e-mail: info@omega.ca

For immediate technical or application assistance:

U.S.A. and Canada: Sales Service: 1-800-826-6342 / 1-800-TC-OMEGA®
Customer Service: 1-800-622-2378 / 1-800-622-BEST®
Engineering Service: 1-800-872-9436 / 1-800-USA-WHEN®
TELEX: 996404 EASYLINK: 62968934 CABLE: OMEGA

Mexico:

En Español: (001) 203-359-7803 e-mail: espanol@omega.com
FAX: (001) 203-359-7807 info@omega.com.mx

Servicing Europe:

Benelux:

Postbus 8034, 1180 LA Amstelveen, The Netherlands
TEL: +31 (0)20 3472121 FAX: +31 (0)20 6434643
Toll Free in Benelux: 0800 0993344
e-mail: sales@omegaeng.nl

Czech Republic:

Frystatska 184, 733 01 Karviná, Czech Republic
TEL: +420 (0)59 6311899 FAX: +420 (0)59 6311114
Toll Free: 0800-1-66342 e-mail: info@omegashop.cz

France:

11, rue Jacques Cartier, 78280 Guyancourt, France
TEL: +33 (0)1 61 37 2900 FAX: +33 (0)1 30 57 5427
Toll Free in France: 0800 466 342
e-mail: sales@omega.fr

Germany/Austria:

Daimlerstrasse 26, D-75392 Deckenpfronn, Germany
TEL: +49 (0)7056 9398-0 FAX: +49 (0)7056 9398-29
Toll Free in Germany: 0800 639 7678
e-mail: info@omega.de

United Kingdom:
ISO 9002 Certified

One Omega Drive, River Bend Technology Centre
Northbank, Irlam, Manchester
M44 5BD United Kingdom
TEL: +44 (0)161 777 6611 FAX: +44 (0)161 777 6622
Toll Free in United Kingdom: 0800-488-488
e-mail: sales@omega.co.uk

It is the policy of OMEGA Engineering, Inc. to comply with all worldwide safety and EMC/EMI regulations that apply. OMEGA is constantly pursuing certification of its products to the European New Approach Directives. OMEGA will add the CE mark to every appropriate device upon certification.

The information contained in this document is believed to be correct, but OMEGA accepts no liability for any errors it contains, and reserves the right to alter specifications without notice.

WARNING: These products are not designed for use in, and should not be used for, human applications.

TABLE OF CONTENTS

General Information
General Information, Features, ModelsPage 1

Specifications
Specifications, Dimensions.....Page 2

Installation and Grounding
Flow Range, Positioning the Meter, Fittings, Piping Conditions, End Connections
Piping Conditions, End Connections, PositionPage 3

Straight and Full Pipe Recommendations Page 4

Electrical Connections, Cable Connections, Operation, Grounding.....Page 5

Maintenance, Repair, Troubleshooting
Battery Replacement, Problem, Probable Cause, Things to TryPage 6

TABLES, DIAGRAMS & CHARTS

Features, Models Page 1

Specifications, Dimensions Page 2

Flow Range Page 3

Straight and Full Pipe Recommendations Page 4

Cable Connections Page 5

Troubleshooting Page 6

GENERAL INFORMATION

The FMG800 Series is a full-bore, plastic-bodied electromagnetic flow meter designed for flow and usage monitoring applications in 1, 2 and 3 inch pipe. The polypropylene flow tube offers corrosion resistance to a wide range of chemicals. Its light weight and easy to install or remove from the pipe for inspection.

With no moving parts, the magmeter permits unobstructed flow, minimizing flow disturbances and hence, straight pipe requirements. The FMG800 Series can be used in piping configurations where there is little space between the meter and an elbow or valve. The FMG800 Series, like other magmeters, are resistant to wear from sand and debris found in ground or surface water. Since there are no bearings or propeller to wear out, downtime and maintenance and repair costs are kept to a minimum. Because there are no mechanical parts in the flow stream, the meter tolerates high flows without damage.

The hinged, opaque polyethylene cover protects from dust and UV rays, while permitting easy access to the LCD flow rate and total display. The electronics housing is made of rugged powder-coated die-cast aluminum. It can be fitted with cross-drilled screws and seal wire for tamper-evidence. Flow rate and total can be displayed in a variety of units, customer-selected and factory-set.

The FMG800 Series is used for tracking flow rate and total flow in usage monitoring applications, for instance, in compliance with regulatory requirements. These would include wells, industrial wastewater, gray water, irrigation metering, turf and landscape applications, and other water reclamation operations.


In the event of DC power loss, or when changing the battery, the FMG800 is designed to retain the internal settings and flow total.

The **FMG81x** is externally powered via a 5-pin connector and the power cable also provides pulse output for use with a variety of displays and controls for remote reading, data logging, pulse-to-analog conversion, and telemetry applications.

The **FMG80x** is a battery-operated unit for use when pulse output is not required. The standard batteries are user replaceable with an approximate 1 year life depending on usage.

Model	Description
FMG801	1" Battery Powered Magmeter
FMG802	2" Battery Powered Magmeter
FMG803	3" Battery Powered Magmeter
FMG811	1" DC Powered Magmeter 1 Pulse/Gal Output
FMG812	2" DC Powered Magmeter 1 Pulse/Gal Output
FMG813	3" DC Powered Magmeter 1 Pulse/Gal Output
FMG811-HF	1" DC Powered Magmeter High Frequency Output
FMG812-HF	2" DC Powered Magmeter High Frequency Output
FMG813-HF	3" DC Powered Magmeter High Frequency Output

FEATURES

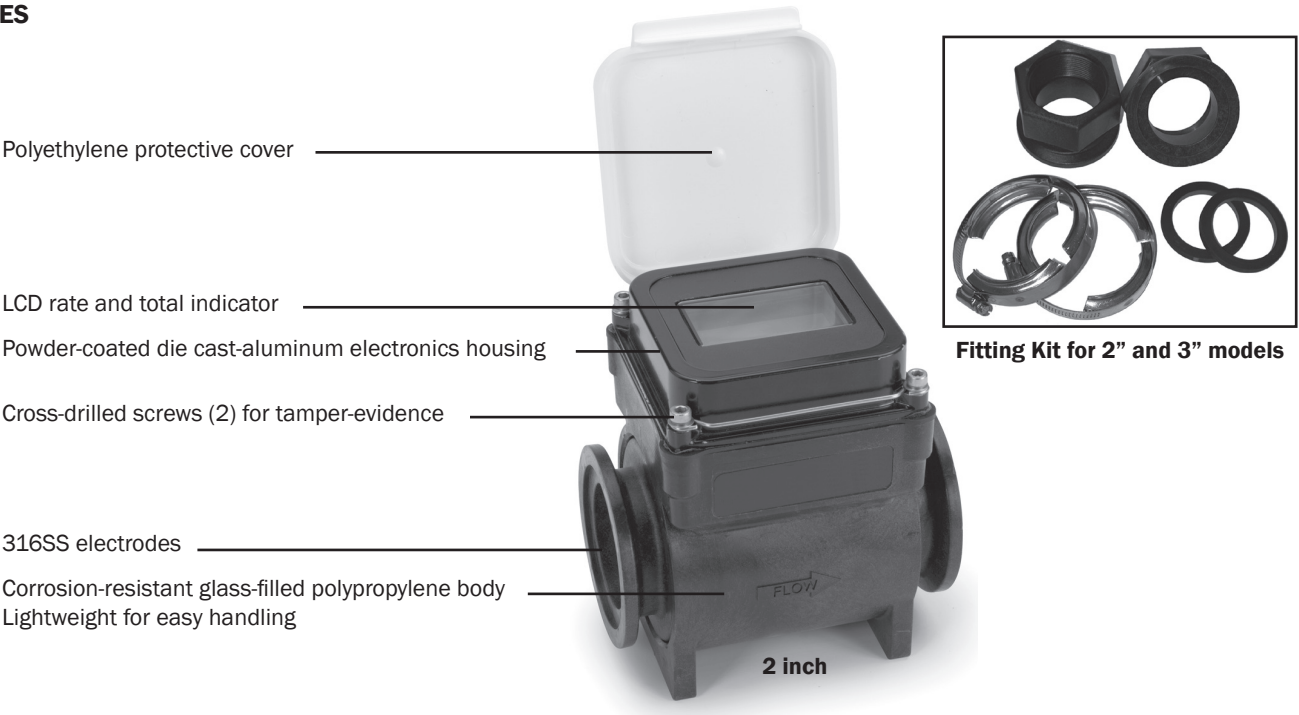


SPECIFICATIONS*

Pipe Size		1, 2 or 3 inch full port					
Fittings		1 inch NPTF, 2 or 3 inch flange clamps with 2 or 3 inch NPTF fitting kit					
Pressure		150 psi or 10.3 bar working pressure @ 70° F					
Operating Temperature Range		10° to 130° F (-12° to 54° C) operating, -40° to 176° F (-40° to 80° C) non-operating					
Accuracy		+/- 1% of reading (between 10% and 100% of max flow)					
		+/- 3% of reading (between cutoff and 10% of max flow)					
Flow Range	Minimum	1 inch: 2.3 GPM (.145 LPS)		2 inch: 6 GPM (.38 LPS)		3 inch: 14 GPM (.88 LPS)	
	Maximum	1 inch: 110 GPM (6.94 LPS)		2 inch: 300 GPM (18.9 LPS)		3 inch: 670 GPM (42.3 LPS)	
Materials	Body	Glass-filled polypropylene					
	Electrodes	316 stainless steel					
	Electronics Housing	Diecast aluminum, powder-coated					
	Display Cover	Polyethylene					
Display		Rate				Total	
	Digits	6				8	
	Units	Gallons/Minute, Cubic Feet/Second, Cubic Feet/Minute, Liters/Second Liters/Minute, Cubic Meters/Minute				Acre-Feet, Acre-Inch, Gallons, Gallons x 1000, Cubic Feet, Liters, Megaliters, Cubic Meters	
Security		Cross-drilled screws and tamper-evident seal (optional)					
Power	FMG81x	10-30 Vdc @ 60 mA max (15 mA average) NOTE: Using an unregulated power supply >18 Vdc may damage the meter due to AC line input voltage fluctuation					
	FMG80x	6 each AA alkaline cells, replaceable. Estimated life is 1 year depending on usage					
Pulse Output Signal (FMG81x Only)		Current sinking pulse, opto isolated, 32 Vdc max at 10 mA max					
Pulse Rate (FMG81x Only)							
Low Frequency		1 unit/pulse out, pulse width of 10ms depending on unit selection					
High Frequency		1"	2"	3"	Pulse width 1.1 ms, min - max frequency, 3 - 150 hz		
Pulse/Unit		80	30	13			
Empty Pipe Detection		Hardware/software, conductivity-based					
Conductivity		>20 microSiemens/cm					
Environmental		NEMA 4X standard					
Electrical Connection (FMG81x Only)		5 pin male circular connector, mates to industry standard cable					

*Specifications subject to change

DIMENSIONS

Power/Output Cable
- FMG81x Only

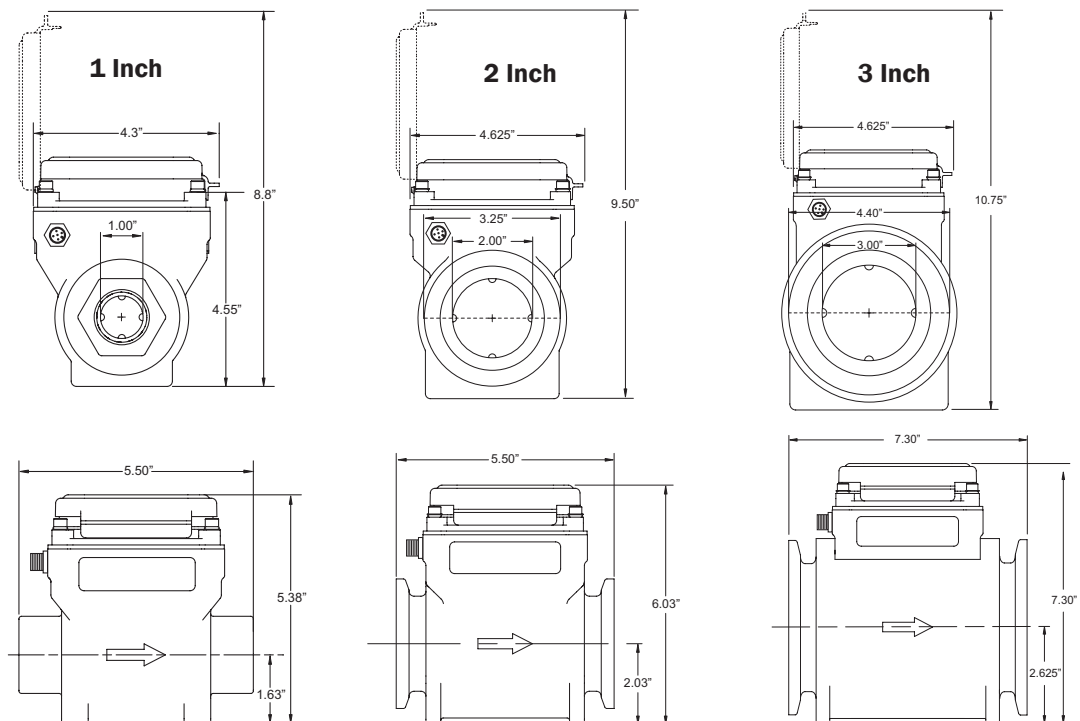

FLOW RANGE


	1"		2"		3"	
	Gal/Min	Liter/Sec	Gal/Min	Liter/Sec	Gal/Min	Liter/Sec
Minimum	2.3	.145	6	.38	14	.88
Maximum	110	6.94	300	18.9	670	42.3

INSTALLATION

Piping Conditions. Installing the meter with a length of straight pipe at least two times the diameter upstream and one diameters downstream is highly recommended. Some piping conditions require more than this. See chart for recommendations.


End Connections. The meter comes with union-type flange connections for ease in servicing the meter. To connect these to piping ends, a variety of kits are available.

Follow the diagram below to make the connections.

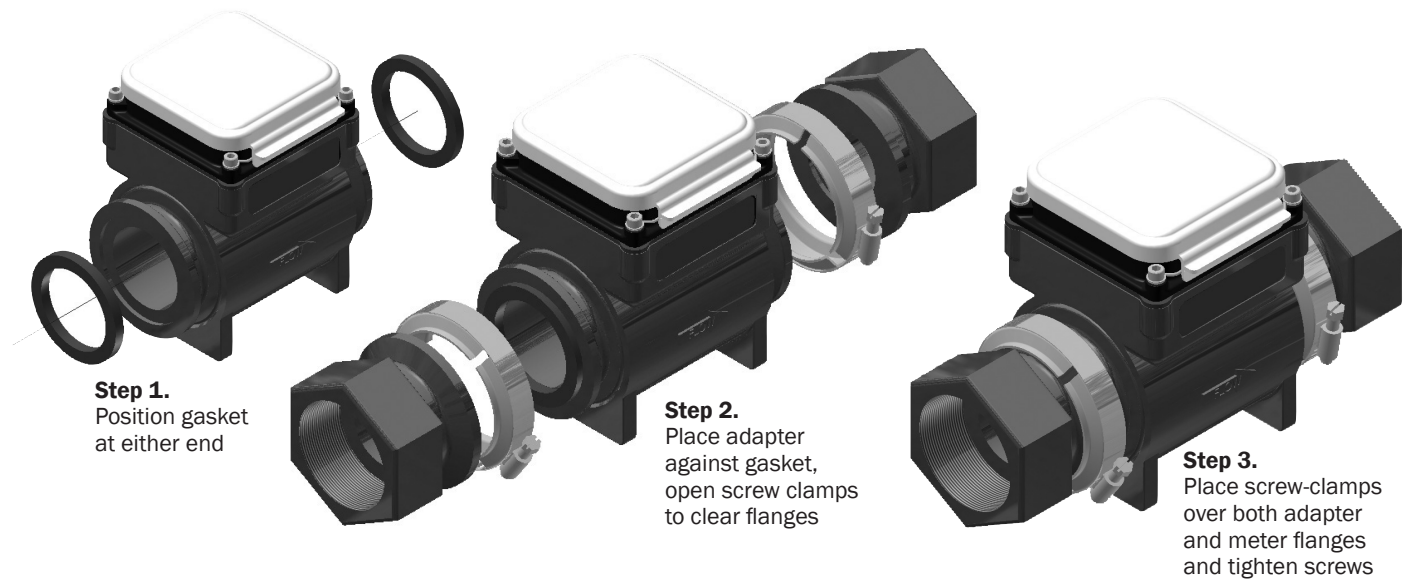

NOTE: Above installation instructions are for FMG802/812 (2") and FMG803/813 (3") only. The FMG801/811 (1") is provided with intergrated NPT female threaded ends.


Position. This is an all position meter which can be installed either vertically or horizontally, register up, down or angled. However, entrained air or solids may make some positions preferable to others. See the position diagram for guidance.

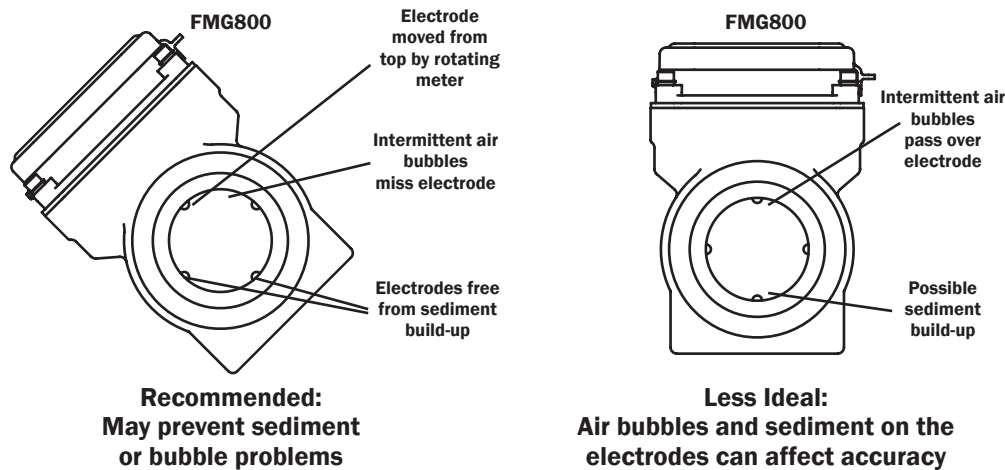


STRAIGHT and FULL PIPE RECOMMENDATIONS

(X = diameter)


Reduced Pipe

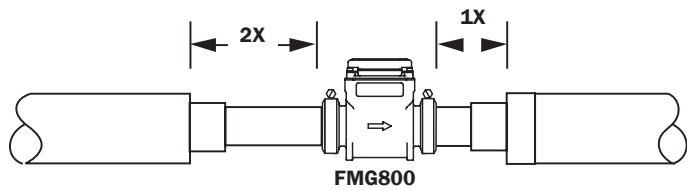


Expanded Pipe

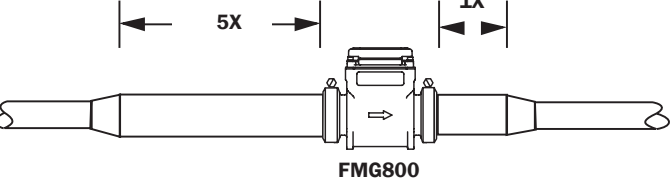



Elbows

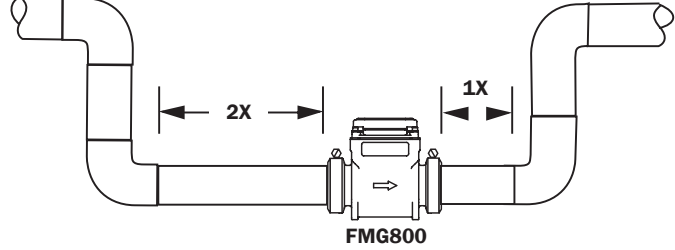


Swirling Flow: Partially Open Butterfly Valve

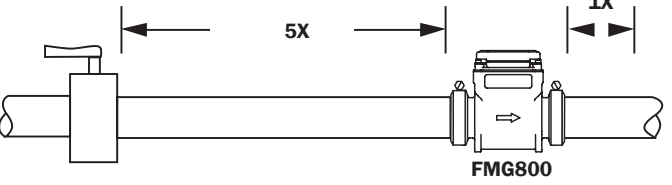


Recommended:
Keep pipe full at meter
for accuracy

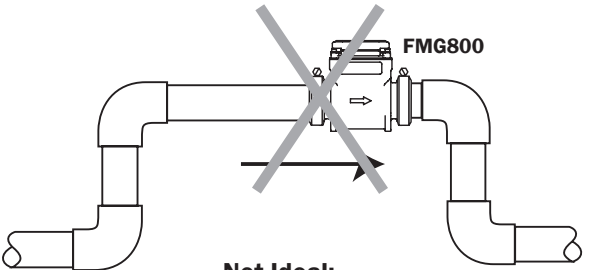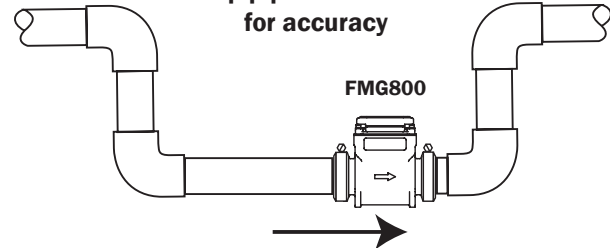


Not Ideal:
Allows air pockets to form at meter

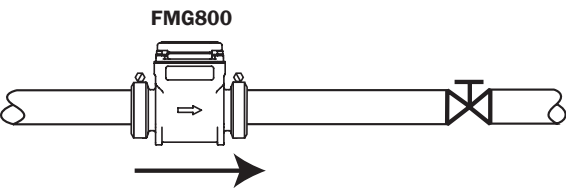


Recommended:
Keeps pipe full at meter for accuracy

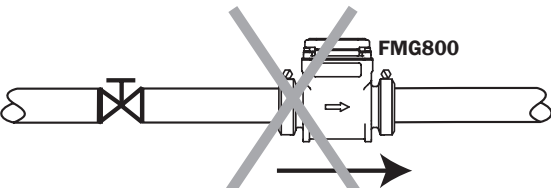

Not Ideal:
Post-valve cavitation can create air pocket

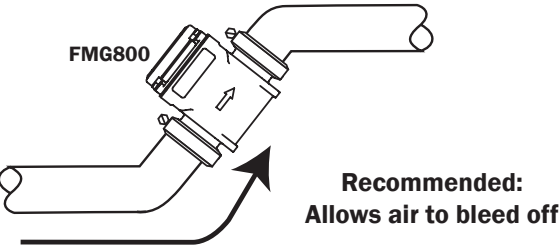

Recommended:
Allows air to bleed off

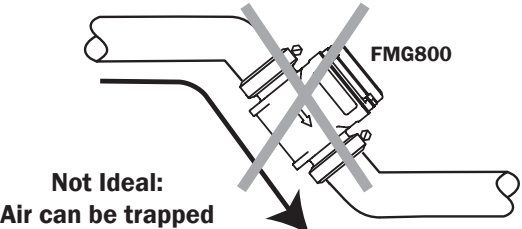


Not Ideal:
Air can be trapped

ELECTRICAL CONNECTIONS

FMG80x. The FMG80x is battery-powered totally self-contained and does not require any electrical connections (there is no output on the FMG80x model).

FMG81x. A connector is provided on the outside of the FMG81x. To connect to the meter, plug the cable in and hand tighten the retaining threads. Follow the diagram to make connections. If you are using the pulse output, connect power first and determine that the meter is working properly by observing the display. Then connect the pulse output.

CABLE CONNECTIONS

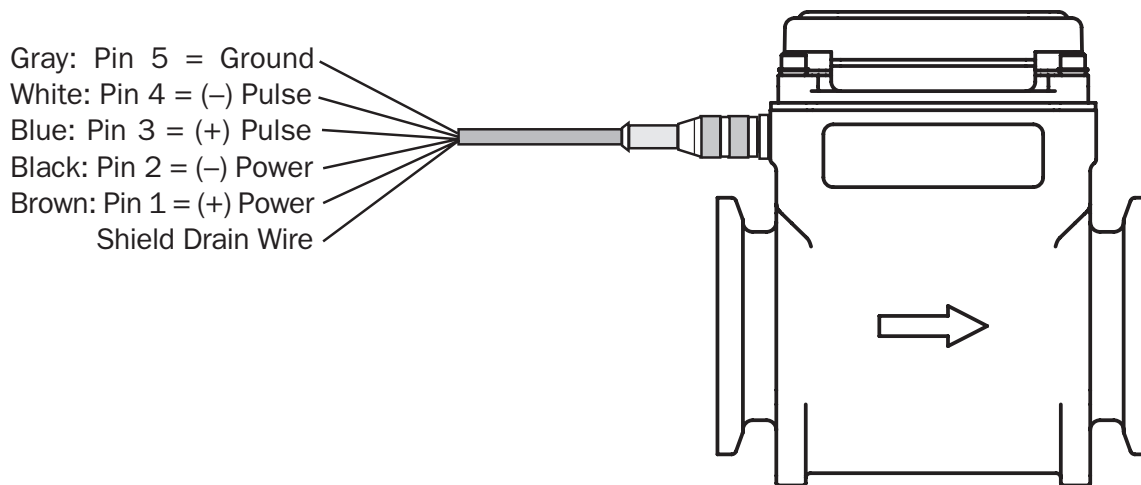

OPERATION

Grounding (FMG81x). For best performance, especially in chemically noisy environments, the gray ground wire and the bare drain wire should be connected together and to a good earth ground as close to the meter as possible. Metal pipe and fittings in contact with the fluid should also be bonded to the same earth ground with corrosion-resistant connections.

Display. The display reads flow rate and accumulated total, in the units for which it was ordered. The top line is total, the bottom line is rate, and indicators give the units (ac-ft, GPM for instance.) Empty or partially-full pipe is automatically detected and is indicated by a reading of “ – EP – “.

Battery. The AA Alkaline batteries are user replaceable with an approximate 1 year life depending on usage. On the battery-powered FMG80x there is a low-battery indicator (“low bat”) when the battery voltage drops below a certain point. Batteries should be changed within four weeks of the appearance of this indicator.

MAINTENANCE AND REPAIR

There are no user-serviceable parts in the FMG800 Series meters except the batteries in the FMG81x.

Battery Replacement. When the “low bat” indicator appears, the batteries should be changed. Six AA alkaline cells are required. To change the batteries, first remove the four screws which hold the top cover in place. Be careful not to lose the washers. Move the top cover to one side and remove the foam retainer which covers the battery tray or pack.

> Remove the old AA alkaline batteries from the battery tray, and replace them with fresh ones, taking care to follow the polarity indicators in the battery tray.

Replace the foam retainer, then put the top cover back in place. Warning! Use Extreme Caution not to pinch wiring or other assembly parts under the housing seal - this may cause an ingress of water, voiding the product warranty. Replace the four screws and washers, then tighten them securely using cross-pattern to evenly compress the gasket. Environmental and Safety note - take care to dispose of all batteries in accordance with Federal, State, and Local regulations.

TROUBLE SHOOTING

Problem	Probable Cause	Try...
Blank display: FMG81x	No power to unit	Check power supply Check wiring
Blank display: FMG80x	Batteries dead or misinstalled	Check polarity, replace batteries
Reading “-EP-”	Empty or partly filled pipe Excessive air pockets or foaming	Rearrange piping to ensure full pipe
Flow but no flow rate reading	Heavily coated electrodes	Remove meter and wipe electrodes



WARRANTY/DISCLAIMER

OMEGA ENGINEERING, INC. warrants this unit to be free of defects in materials and workmanship for a period of **13 months** from date of purchase. OMEGA's WARRANTY adds an additional one (1) month grace period to the normal **one (1) year product warranty** to cover handling and shipping time. This ensures that OMEGA's customers receive maximum coverage on each product.

If the unit malfunctions, it must be returned to the factory for evaluation. OMEGA's Customer Service Department will issue an Authorized Return (AR) number immediately upon phone or written request. Upon examination by OMEGA, if the unit is found to be defective, it will be repaired or replaced at no charge. OMEGA's WARRANTY does not apply to defects resulting from any action of the purchaser, including but not limited to mishandling, improper interfacing, operation outside of design limits, improper repair, or unauthorized modification. This WARRANTY is VOID if the unit shows evidence of having been tampered with or shows evidence of having been damaged as a result of excessive corrosion; or current, heat, moisture or vibration; improper specification; misapplication; misuse or other operating conditions outside of OMEGA's control. Components in which wear is not warranted, include but are not limited to contact points, fuses, and triacs.

OMEGA is pleased to offer suggestions on the use of its various products. However, OMEGA neither assumes responsibility for any omissions or errors nor assumes liability for any damages that result from the use of its products in accordance with information provided by OMEGA, either verbal or written. OMEGA warrants only that the parts manufactured by the company will be as specified and free of defects. OMEGA MAKES NO OTHER WARRANTIES OR REPRESENTATIONS OF ANY KIND WHATSOEVER, EXPRESSED OR IMPLIED, EXCEPT THAT OF TITLE, AND ALL IMPLIED WARRANTIES INCLUDING ANY WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. LIMITATION OF LIABILITY: The remedies of purchaser set forth herein are exclusive, and the total liability of OMEGA with respect to this order, whether based on contract, warranty, negligence, indemnification, strict liability or otherwise, shall not exceed the purchase price of the component upon which liability is based. In no event shall OMEGA be liable for consequential, incidental or special damages.

CONDITIONS: Equipment sold by OMEGA is not intended to be used, nor shall it be used: (1) as a "Basic Component" under 10 CFR 21 (NRC), used in or with any nuclear installation or activity; or (2) in medical applications or used on humans. Should any Product(s) be used in or with any nuclear installation or activity, medical application, used on humans, or misused in any way, OMEGA assumes no responsibility as set forth in our basic WARRANTY/DISCLAIMER language, and, additionally, purchaser will indemnify OMEGA and hold OMEGA harmless from any liability or damage whatsoever arising out of the use of the Product(s) in such a manner.

RETURN REQUESTS/INQUIRIES

Direct all warranty and repair requests/inquiries to the OMEGA Customer Service Department. BEFORE RETURNING ANY PRODUCT(S) TO OMEGA, PURCHASER MUST OBTAIN AN AUTHORIZED RETURN (AR) NUMBER FROM OMEGA'S CUSTOMER SERVICE DEPARTMENT (IN ORDER TO AVOID PROCESSING DELAYS). The assigned AR number should then be marked on the outside of the return package and on any correspondence.

The purchaser is responsible for shipping charges, freight, insurance and proper packaging to prevent breakage in transit.

FOR **WARRANTY** RETURNS, please have the following information available BEFORE contacting OMEGA:

1. Purchase Order number under which the product was PURCHASED,
2. Model and serial number of the product under warranty, and
3. Repair instructions and/or specific problems relative to the product.

FOR **NON-WARRANTY** REPAIRS, consult OMEGA for current repair charges. Have the following information available BEFORE contacting OMEGA:

1. Purchase Order number to cover the COST of the repair,
2. Model and serial number of the product, and
3. Repair instructions and/or specific problems relative to the product.

OMEGA's policy is to make running changes, not model changes, whenever an improvement is possible. This affords our customers the latest in technology and engineering.

OMEGA is a registered trademark of OMEGA ENGINEERING, INC.

© Copyright 2005 OMEGA ENGINEERING, INC. All rights reserved. This document may not be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form, in whole or in part, without the prior written consent of OMEGA ENGINEERING, INC.

Notes

Where Do I Find Everything I Need for Process Measurement and Control? **OMEGA...Of Course!** *Shop online at omega.com*

TEMPERATURE

- ☑ Thermocouple, RTD & Thermistor Probes, Connectors, Panels & Assemblies
- ☑ Wire: Thermocouple, RTD & Thermistor
- ☑ Calibrators & Ice Point References
- ☑ Recorders, Controllers & Process Monitors
- ☑ Infrared Pyrometers

PRESSURE, STRAIN AND FORCE

- ☑ Transducers & Strain Gages
- ☑ Load Cells & Pressure Gages
- ☑ Displacement Transducers
- ☑ Instrumentation & Accessories

FLOW/LEVEL

- ☑ Rotameters, Gas Mass Flowmeters & Flow Computers
- ☑ Air Velocity Indicators
- ☑ Turbine/Paddlewheel Systems
- ☑ Totalizers & Batch Controllers

pH/CONDUCTIVITY

- ☑ pH Electrodes, Testers & Accessories
- ☑ Benchtop/Laboratory Meters
- ☑ Controllers, Calibrators, Simulators & Pumps
- ☑ Industrial pH & Conductivity Equipment

DATA ACQUISITION

- ☑ Data Acquisition & Engineering Software
- ☑ Communications-Based Acquisition Systems
- ☑ Plug-in Cards for Apple, IBM & Compatibles
- ☑ Datalogging Systems
- ☑ Recorders, Printers & Plotters

HEATERS

- ☑ Heating Cable
- ☑ Cartridge & Strip Heaters
- ☑ Immersion & Band Heaters
- ☑ Flexible Heaters
- ☑ Laboratory Heaters

ENVIRONMENTAL MONITORING AND CONTROL

- ☑ Metering & Control Instrumentation
- ☑ Refractometers
- ☑ Pumps & Tubing
- ☑ Air, Soil & Water Monitors
- ☑ Industrial Water & Wastewater Treatment
- ☑ pH, Conductivity & Dissolved Oxygen Instruments