

Product Environmental Profile

Ortronics® Patch and Splice Fiber Enclosures



LEGRAND COMPANY OVERVIEW

- **Designed to Be Better – Our Commitment to Sustainability**

At Legrand®, our sustainability commitment translates into greater benefits and tangible value for our customers, business partners, employees, and the broader community.

- **Better Performance**

We provide building solutions to meet many building performance goals from sustainability and energy efficiency to productivity and occupant well being. The right choice in network and electrical infrastructure can play a key role in many facets of building performance. Our products help ensure electrical safety. They offer choice and flexibility in space design. They are designed to reduce installation time and material waste on site. Because we know buildings consume a great deal of energy, we offer a range of products and solutions that reduce energy consumption from lighting to plug load to data centers.

- **Better Solutions**

We offer a wide range of innovative solutions for the building, while constantly evolving our design and development processes to improve the environmental profile of our products. Through active monitoring and research, we serve as an expert resource for market trends and building and product performance standards to keep our customers at the top of their game.

- **Better Operations**

We focus on operational excellence because we believe optimizing the way we manage energy, water and waste is not only good for the environment, it's good for business. As part of the Department of Energy's Better Building, Better Plants Challenge (BBBP) Legrand has reduced its energy intensity by over 30% across 14 sites in the United States in just three years. Integrating sustainability into the way we run our operations makes us more competitive – and a better business partner.



For information on Legrand PEP's and other sustainability initiatives, scan the QR code to be brought to our Product Sustainability page.



LEGRAND'S ENVIRONMENTAL COMMITMENTS

- **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

- **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.


- **Involve the environment in product design**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

<p>Function</p>	<p>Provides enclosed space for mounting and organizing cables for patch and splice applications. Enclosed unit accommodates 4 rack units with dimensions of 7" H x 17" L x 19" D (18cm x 43cm x 49cm). This product has a functional lifetime of 20 years.</p>
<p>Reference Product</p>	<div style="text-align: center;">  </div> <p>Part Number: OR-FC04U-M FC Series High Density Fiber Enclosure, 4 rack units</p>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

Product Environmental Profile

Ortronics® Patch and Splice Fiber Enclosures



PRODUCTS CONCERNED

The environmental data is representative of the following products:

FC Series Enclosures

OR-FC01U-W
OR-FC02U-W
OR-FC04U-W
W = cabinet style

Infinium Enclosures

OR-XFC01UH-XXF
OR-XFC02UH-XXF
OR-XFC03UH-XXF
OR-XFC04UH-XXF
XX = type of drawerface / HD panel

Ultra High Density Enclosures

OR-UC01UA-P
OR-UC01UA-A

HiLOC Enclosure

OR-HC02U-P



CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

Total weight of Reference Product (with unit packaging)	15.38 lb (6.98 kg)				
Plastics as % of weight		Metals as % of weight		Other as % of weight	
PC-ABS	6.9%	Steel	58.5%	Paper	<0.1%
PC	3.2%	Copper Alloy	<0.1%		
PA	0.4%				
PVC	<0.1%				
				Packaging as % of weight	
				Paper and Cardboard	31.0%
				PE (low density)	<0.1%
Total plastics	10.5%	Total metals	58.5%	Total other and packaging	31.0%

Estimated recycled material content: 38% of weight.



MANUFACTURING

The Reference Product comes from sites that have received ISO 14001 certification.



DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency. Information on the distance of distribution is not available so the PCR hypothesis for "Intercontinental transport", 2175 miles (3500 km) by heavy truck, was used. This represents transportation of the Reference Product from our warehouse to the local point of distribution in the North American market.



INSTALLATION

No electricity is required for installing the Reference Product.

Product Environmental Profile

Ortronics® Patch and Splice Fiber Enclosures



USE

Servicing and maintenance:

Under normal conditions of use, this type of product requires no servicing or maintenance.

Consumable:

No consumables are necessary to use this type of product.



END OF LIFE

Development teams integrate product end-of-life factors in the design phase.

• **Hazardous waste* contained in the product:** no hazardous waste
 (*) Hazardous waste as defined by European Commission decision 2000/532/EC.

• **Recycling rate:**

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 99%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:	(% mass of Reference Product without packaging)
- plastic materials (excluding packaging):	14%
- metal materials (excluding packaging):	85%
- other materials (excluding packaging):	<1%

Recycling rate of packaging (all types of materials): 100% (% mass of packaging)



ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in North America.

The following modelling elements were taken into account:

Manufacturing	Packaging taken into account. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.
Distribution	Transport between the last distribution center and an average delivery to the sales area.
Installation	The end of life of the packaging (4.7 lb or 2.1 kg) is taken into account at this phase. Transport of packaging to end of life treatment.
Use	<ul style="list-style-type: none"> • Under normal conditions of use, this type of product requires no servicing or maintenance. • No consumables are necessary to use this type of product. • Product category: enclosure • Use scenario: no energy consumption during the 20 year working life. This modelling duration does not constitute a minimum durability requirement. • Energy model: Electricity(US) - 2009
End of life	The default end of life scenario modelled maximizes the environmental impact.
Software used	EIME V5 and its database "CODDE-2015-04" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard

Product Environmental Profile


Ortronics® Patch and Splice Fiber Enclosures



ENVIRONMENTAL IMPACTS (continued)

	Total for Life cycle		Raw material and manufacturing		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
Global warming (GW)	2.74E+01	kg CO ₂ eq.	2.56E+01	94%	1.22E+00	4%	1.32E-01	< 1%	0.00E+00	0%	4.15E-01	2%
Ozone depletion (OD)	2.18E-06	kg CFC-11 eq.	2.15E-06	99%	2.46E-09	< 1%	9.08E-10	< 1%	0.00E+00	0%	2.50E-08	1%
Acidification of soil and water (A)	6.12E-02	kg SO ₂ eq.	5.38E-02	88%	5.46E-03	9%	6.50E-04	1%	0.00E+00	0%	1.29E-03	2%
Water eutrophication (WE)	1.09E-02	kg PO ₄ ³⁻ eq.	8.41E-03	77%	1.26E-03	12%	7.00E-04	6%	0.00E+00	0%	5.14E-04	5%
Photochemical ozone creation (POCP)	7.18E-03	kg C ₂ H ₄ eq.	6.61E-03	92%	3.88E-04	5%	4.58E-05	< 1%	0.00E+00	0%	1.37E-04	2%
Depletion of abiotic resources - elements (ADPe)	1.60E-03	kg Sb eq.	1.60E-03	100%	4.87E-08	< 1%	5.76E-09	< 1%	0.00E+00	0%	1.51E-08	< 1%
Total use of primary energy (PE)	8.29E+02	MJ	8.02E+02	97%	1.72E+01	2%	1.90E+00	< 1%	0.00E+00	0%	7.11E+00	< 1%
Net use of fresh water (FW)	2.79E-01	m ³	2.79E-01	100%	1.09E-04	< 1%	4.15E-05	< 1%	0.00E+00	0%	5.09E-04	< 1%
Depletion of abiotic resources - fossil fuels (ADPf)	3.32E+02	MJ	3.08E+02	93%	1.71E+01	5%	1.84E+00	< 1%	0.00E+00	0%	5.89E+00	2%
Water pollution (WP)	4.66E+03	m ³	4.39E+03	94%	2.00E+02	4%	2.05E+01	< 1%	0.00E+00	0%	4.74E+01	1%
Air pollution (AP)	4.82E+03	m ³	4.70E+03	98%	4.98E+01	1%	1.67E+01	< 1%	0.00E+00	0%	4.75E+01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

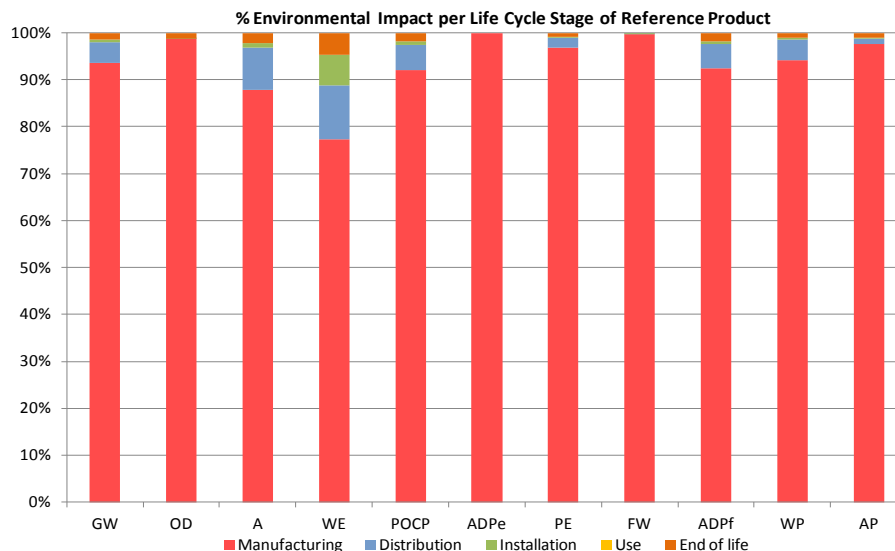

The environmental impact of the Reference Product occurs predominantly during the manufacturing phase.

Product Environmental Profile

Ortronics® Patch and Splice Fiber Enclosures



ENVIRONMENTAL IMPACTS (continued)

For products other than the Reference Product, the environmental impacts can be estimated by weighting the environmental impacts of the Reference Product by the values shown in the table below. Impacts for Use are not applicable. Impacts for Manufacturing are proportional to the mass of steel and plastic in each product. Impacts for Distribution and Installation are proportional to the mass of each product.

Part Number	Manufacturing	Distribution and Installation	End of Life
OR-FC01U-W	WP: 0.3 all else: 0.7	0.6	0.6
OR-FC02U-W	0.8	0.7	0.7
OR-FC04U-W	1.0	1.0	1.0
OR-UC01UA-P OR-UC01UA-A	A / WE / OD: 1.6 WP: 0.2 all else: 1.3	1.0	1.2
OR-HC02U-P	WP: 0.3 all else: 1.0	0.8	0.9
OR-XFC01UH-XXF	ADPf / AP / POCP: 1.7 WP: 0.4 all else: 1.3	1.2	1.4
OR-XFC02UH-XXF	ADPf / A / AP / POCP: 2.1 WP: 0.6 all else: 1.6	1.5	1.8
OR-XFC03UH-XXF	ADPf / A / AP / POCP: 2.5 WP: 0.8 all else: 2.0	1.8	2.2
OR-XFC04UH-XXF	ADPf / A / AP / POCP: 3.0 WP: 1.1 all else: 2.3	2.1	2.6

Global warming	GW	Total use of primary energy	PE
Ozone depletion	OD	Net use of fresh water	FW
Acidification of soil and water	A	Depletion of abiotic resources - fossil fuels	ADPf
Water eutrophication	WE	Water pollution	WP
Photochemical ozone creation	POCP	Air pollution	AP
Depletion of abiotic resources - elements	ADPe		

Registration number: LGRP-00012-V01.01-EN	Drafting rules: "PCR-ed3-EN-2015 04" Supplemented by "PSR-0005-ed1-EN-2012 12 11"
Verifier's accreditation number: VH25	Information and reference documents: www.pep-ecopassport.org
Date of issue: 11-2015	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input type="checkbox"/> External <input checked="" type="checkbox"/>	
The PCR Review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).	
The elements of the present PEP cannot be compared with elements from another program.	
Document in compliance with ISO 14025:2010: "Environmental labels and declarations - Type III environmental declarations"	
In compliance with ISO 14040:2006: "Environmental management - LCA - Principles and framework" In compliance with ISO 14044:2006: "Environmental management - LCA - Requirements and guidelines" In alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the product category of construction products"	