

# COSCO®

SIMPLE

SMART

FUN



To see installation videos, scan the QR Code or visit [www.coscokids.com](http://www.coscokids.com).

©2016 Dorel Juvenile. All Rights Reserved.

# COSCO®

## SCENERA NEXT CONVERTIBLE CAR SEAT


**Rear Facing:** 5-40 lb and 19-40 in.  
(2.3-18 kg and 48-101.6 cm)

**Forward Facing:** 22-40 lb and 29-43 in.  
and at least 1 year old  
(10.1-18 kg and 73.6-110 cm)

KEEP INSTRUCTIONS FOR FUTURE USE.  
Read all instructions before using this child restraint.

### **⚠ WARNING:**

Failure to follow the warnings on the labels and in the instruction manual can result in serious injury or death to your child.

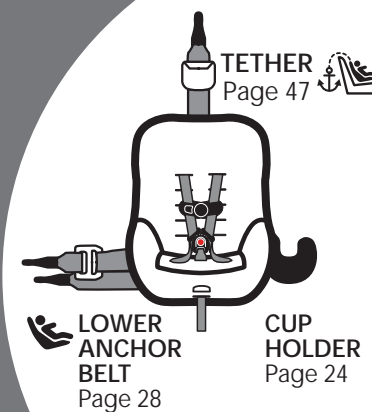

4358-7084 8.17.16

## Choosing Rear or Forward Facing

Your child's height, weight, and age determine how your child restraint should be placed in the vehicle.


Children up to 1 year of age must ride rear facing.

The American Academy of Pediatrics recommends that children should remain rear facing until they are at least 2 years old.

Please talk to your doctor about which is the best option for your child.

In this child restraint, your child can remain rear facing up to 40 lb (18 kg) and up to 40 in. (101.6 cm).

**⚠ WARNING:** Verify your child's weight and height (do not guess) before choosing the child restraint's placement.

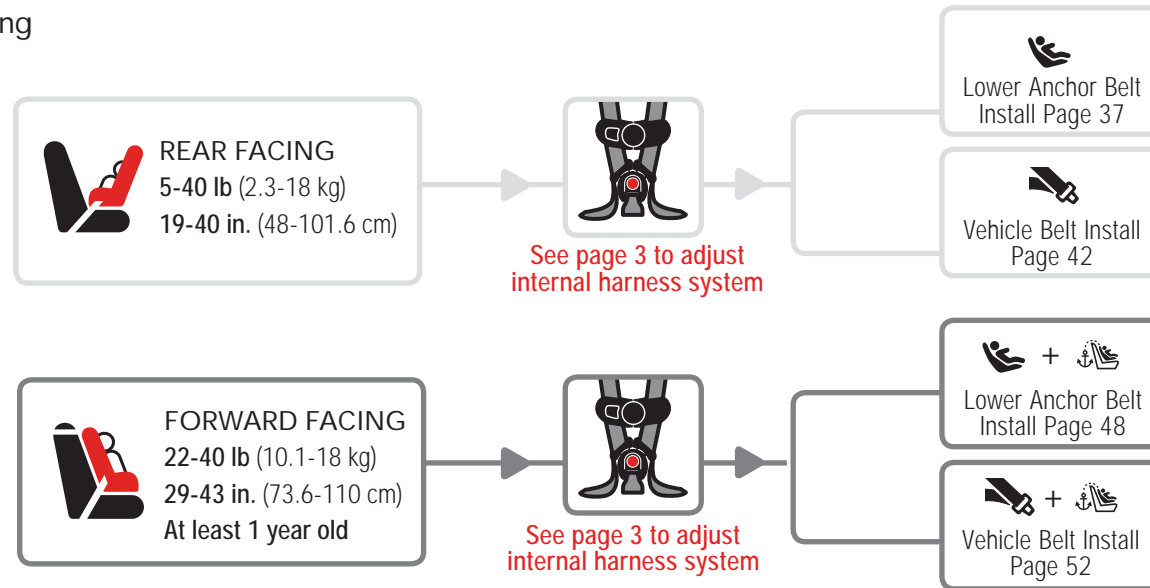

## Table of Contents

### Getting Started ..... 1

Parts of the Child Restraint.....	1
Prepare Child Restraint to Fit Your Child .....	3
How Does Your Child Fit?.....	4
Changing Position of Buckle .....	6
Changing Position of Shoulder Harness Strap.....	8
Harness System Adjustments for Smaller Infants.....	10
Securing Child in Child Restraint.....	15

### General Use ..... 18

Removing Harness System .....	18
Removing Seat Pad for Cleaning.....	20
Installing Harness System.....	21
Accessories on Select Models .....	24



### Safety Information ..... 25

Child Restraint Use .....	25
Vehicle Seating Position .....	26
Installation in Vehicle .....	26




### Vehicle Information..... 28

Choosing Lower Anchor or Vehicle Belts.....	28
Knowing Your Vehicle Belts .....	31
Aircraft Information .....	35

### Rear Facing ..... 36

 Lower Anchor Belt Installation ....	37
 Vehicle Belt Installation.....	42

### Forward Facing ..... 46


 Tether Use .....	47
 Lower Anchor Belt Installation ....	48
 Vehicle Belt Installation .....	52

### Important Information ..... 55

Using a Locking Clip .....	55
Dorel Juvenile Group Information .....	57
Registration and Safety Notices .....	58
Troubleshooting.....	59
Replacement Parts Order Form.....	60
Warranty .....	62

## Parts of the Child Restraint


Front View

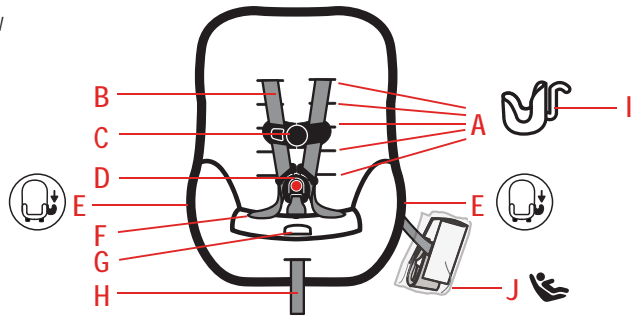

- |                                      |                                       |
|--------------------------------------|---------------------------------------|
| A. Shoulder Harness Slots            | F. Hip Harness Slots                  |
| B. Harness Strap                     | G. Harness Release Lever (under flap) |
| C. Chest Clip                        | H. Harness Adjustment Strap           |
| D. Buckle                            | I. Cup Holder (see page 24)           |
| E. Cup Holder Attachment (under pad) | J. Lower Anchor Belt (see page 28)    |


1

Side View

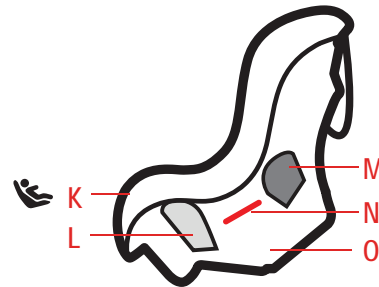

- |   |
|---|
| K. Lower Anchor Belt Attachment for Storage (under side of shell) |
| L. Rear-Facing Belt Path  |
| M. Forward-Facing Belt Path                                       |
| N. Rear-Facing Level Line   |

Back View

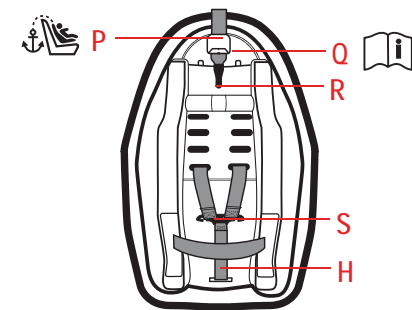

- |                                  |
|----------------------------------|
| O. Shell (child restraint)       |
| P. Tether (see page 47)          |
| Q. Instruction Manual Storage    |
| R. Tether Attachment for Storage |
| S. Splitter Plate                |


2

## Prepare Child Restraint to Fit Your Child



### 1. Fully Loosen Harness Strap

Push down on harness release lever (under flap on front of seat pad) while pulling out on harness strap as shown.




### 3. Release Chest Clip

Press on chest clip release button and pull apart. Place harness strap out of the way.



### 2. Unbuckle Harness

Press in towards the top of the red button. Pull buckle tongues out.



### 4. Place Child in Child Restraint to Determine Proper Harness Fit

The child's bottom and back should be flat against the child restraint. **See pages 4-5 for fit guidelines.**

## How Does Your Child Fit?

Use the guidelines below to determine if the buckle and harness strap are in the right place for your child.

### REAR FACING



#### Buckle Position

Start in the 1st slot and adjust outward as your child grows.

Buckle should be used in the slot closest to your child. The buckle should be not underneath or behind your child.

1st or 2nd slot **MUST** be used.



#### Harness Strap Position

Always choose the shoulder harness slot closest to your child's shoulder height.

Harness strap **MUST** be **at or slightly below** shoulders. If the lowest shoulder harness slots are above the child's shoulders, **do not** use this child restraint.

To change the buckle position, see pages 6-7.

To change harness strap position, see pages 8-9.

To make adjustments for smaller infants, see pages 10-14.

*continued on next page* **4**

## Changing Position of Buckle



### FORWARD FACING



#### Buckle Position

Start in the 1st slot and adjust outward as your child grows.

Buckle should be used in the slot closest to

your child. The buckle should not be underneath or behind your child.

Any slot can be used.




#### Harness Strap Position

Always choose the shoulder harness slot closest to your child's shoulder height.

Harness strap **MUST** be **at or slightly above** shoulders. If the highest shoulder harness slots are below the child's shoulders, **do not** use this child restraint.


To change the buckle position, see pages 6-7.

To change harness strap position, see pages 8-9.



#### 1. Turn Seat Over

Locate buckle's metal retainer on bottom of shell.



#### 2. Rotate Metal Retainer and Push It Up Through Shell and Pad



#### 3. From Top of Seat, Pull Buckle Out of Shell



#### 4. Insert Buckle's Metal Retainer into Slot Closest to Child

Buckle **MUST** face out.

You **MUST** use the 1st or 2nd buckle slots when child restraint is used rear facing. Any slot can be used when forward facing.

*continued on next page* 6

## Changing Position of Shoulder Harness Strap




5. Pull Metal Retainer Completely Through Pad and Shell

**⚠ WARNING:** Failure to place buckle's metal retainer completely through pad and shell can result in serious injury or death.




6. Check Buckle  
Pull up on buckle to make sure it is secured.  
The buckle **MUST** not pull out.



1. Fully Loosen Harness Strap


Push down on harness release lever (under flap on front of seat pad) while pulling out on harness strap as shown.



3. Pull Harness Strap Out of Shoulder Harness Slots




2. From Back, Remove Harness Strap Loops From Splitter Plate




If you will be using the lowest shoulder harness slots, see pages 10-14. Otherwise, continue on to step 4.

## Harness System Adjustments for Smaller Infants



4. Rethread Harness Strap into Correct Shoulder Harness Slots For Your Child

See pages 4-5 for fit guidelines.



5. Attach Harness Strap Loops to Splitter Plate

Sewn ends of the harness strap loops **MUST** face towards you.

**DO NOT** twist harness strap or harness adjustment strap. Make sure the harness strap loops are fitted **COMPLETELY ON** both sides of the splitter plate.

**⚠ WARNINGS:** Make sure the harness height is correct for your child's size.




Do not use this child restraint rear facing unless the top of your child's head is at least 1 in. (2.5 cm) below the top of the child restraint.




Do not use this child restraint forward facing if the tops of your child's ears are above the top of the child restraint.

Failure to follow these steps can result in serious injury or death.

When using the lowest shoulder harness slots, you **MUST** make these adjustments.



1. Pull Up Front of Seat Pad




3. From Bottom of Seat, Pull Metal Retainer Towards You and Push It Up into Middle Slot As Shown



2. With Buckle in the 1st Slot As Shown, Turn the Seat Over

If you need to move the buckle to the 1st slot, see page 6.



4. From Top of Seat, Lay the Metal Retainer Flat Against the Shell As Shown







**5. Check Buckle**

Pull up on buckle to make sure it is secured.

The buckle **MUST** not pull out.




**7. From Back, Remove Harness Strap Loops From Splitter Plate**




**6. Fully Loosen Harness Strap**

Push down on harness release lever (under flap on front of seat pad) while pulling out on harness strap as shown.



**8. Pull Harness Straps Out of Shoulder Harness Slots**




**9. Unthread Chest Clip**



**10. Unthread Buckle**


Do not unbuckle the buckle.




**11. Turn Seat Over and Pull Harness Strap Down and Out of Hip Harness Slot**



**12. Weave Harness Strap In and Out of Shell as Shown**




Harness strap goes behind buckle strap.




bottom of seat


*continued on next page* 12




**13. Thread Harness Strap Up Through Slot in Seat Pad**




**15. Thread Buckle and Chest Clip**  
Harness strap end goes through the **back** of buckle tongues and through the chest clip **front to back** as shown.




**14. Make Harness Strap Even**  
Sewn ends of harness strap loops **MUST** face each other.




**16. Thread Harness Strap Into Lowest Shoulder Harness Slots**



**17. Attach Harness Strap Loops to Splitter Plate**  
Sewn ends of the harness strap loops **MUST** face towards you.



**DO NOT** twist harness strap or harness adjustment strap. Make sure the harness strap loops are fitted **COMPLETELY ON** both sides of the splitter plate.



**18. Replace Seat Pad Around Front of Shell**

**⚠ WARNINGS:** Harness system must be installed correctly. Failure to follow these warnings can result in serious injury or death.




## Securing Child in Child Restraint



### 1. Place Child in Child Restraint

The child's bottom and back should be flat against the child restraint.

Position harness strap over child's shoulders and upper thighs.



### 3. Close Chest Clip

Insert right half of chest clip into left half and snap together.



### 5. Position Chest Clip

The chest clip must be placed at mid-chest (even with armpits) and away from the child's neck.



### 6. Check Harness Tightness

Try to pinch the harness at the shoulders vertically between index finger and thumb as shown.

**If your fingers slip off**, the harness is tight enough.

**If you can pinch the harness strap**, tighten more. The harness strap should be snug throughout its length.

A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.


*continued on next page* 16



### 2. Buckle Harness

Push buckle tongues into buckle until you hear a "click."

Pull up on harness strap to make sure buckle is locked.



### 4. Tighten Harness

Pull on harness adjustment strap to tighten harness snugly.

**⚠ WARNINGS:** Failure to fasten and tighten the harness system correctly may allow the child to be ejected from the child restraint in a crash or sudden stop causing serious injury or death.

Do not mistake comfort for safety. Harness system must be snugly adjusted.



**DO NOT** put snow-suits or bulky garments on your child when placing them in the child restraint.

Bulky clothing can prevent the harness straps from being tightened properly.

#### To Remove Child From Child Restraint

1. Loosen Harness Strap
2. Unbuckle Harness
3. Release Chest Clip
4. Remove Child

## Removing Harness System



Only remove the harness system to clean the seat pad.



### 1. Fully Loosen Harness Strap


Push down on harness release lever (under flap on front of seat pad) while pulling out on harness strap as shown.



### 3. Pull Harness Strap Out of Shoulder Harness Slots




### 2. From Back, Remove Harness Strap Loops From Splitter Plate




### 4. Unthread Chest Clip

## Removing Seat Pad for Cleaning



**5. Unthread Buckle**  
Do not unbuckle the buckle.




**8. Rotate Metal Retainer and Push It Up Through Shell and Pad**



**6. Pull Harness Strap Out of Seat**




**9. From Top of Seat, Pull Buckle Out of Shell**



**7. Turn Seat Over**  
Locate buckle's metal retainer on bottom of shell.

You must remove the harness system to remove the pad from the shell. See pages 18-19.



### Remove Pad

Pull pad off the bottom of child restraint and remove pad.

**⚠ WARNINGS:** Do not use child restraint without the seat pad.

Failure to do this can result in serious injury or death.

### Cleaning Pad

Machine wash separately with cold water on a gentle cycle. Do not use bleach. Tumble dry separately for 10-12 minutes on low heat. Remove immediately.

### Cleaning Harness Strap

Spot clean using warm sudsy water and damp cloth.

### Replacing Pad

Starting from bottom of child restraint, slip pad on shell. Pull harness adjustment strap through pad. Wrap pad around the top of shell. Install harness system, see pages 21-23.



## Installing Harness System




If you will be using the lowest shoulder harness slots, see pages 10-14.

Otherwise, continue on to step 1.



2. Pull Metal Retainer Completely Through Pad and Shell



1. Insert Buckle's Metal Retainer into Slot Closest to Child


Buckle **MUST** face out. You **MUST** use the 1st or 2nd buckle slots when child restraint is

used rear facing. Any slot can be used when forward facing.




3. Check Buckle

Pull up on buckle to make sure it is secured. The buckle **MUST** not pull out.




4. Rethread Harness Strap

With sewn end of harness strap loop facing the buckle, thread harness strap down through hip harness slot.




6. Make Harness Strap Even

Sewn ends of harness strap loops **MUST** face each other.



5. Pull Harness Strap Across Bottom of Shell


Harness strap **MUST** lie in front of harness adjustment strap as shown. Push harness strap up through other hip harness slot.




7. Thread Buckle and Chest Clip

Harness strap ends go through the **back** of buckle tongues and through the chest clip **front to back** as shown.

## Accessories on Select Models




**8. Thread Harness Strap Into Correct Shoulder Harness Slots For Your Child**  
See pages 4-5 for fit guidelines.



**DO NOT** twist harness strap or harness adjustment strap. Make sure the harness strap loops are fitted **COMPLETELY ON** both sides of the splitter plate.



**9. Attach Harness Strap Loops to Splitter Plate**  
Sewn ends of the harness strap loops **MUST** face towards you.




**⚠️ WARNINGS:** Failure to place harness adjustment strap behind the harness strap as shown can result in serious injury or death. Harness system must be installed correctly. Failure to follow these warnings can result in serious injury or death.



**Head Pillow**  
To remove, from the back of the head pillow gently pull the fabric

tabs out from the shoulder harness slots.

To attach, slide the fabric tabs into shoulder harness slots.



### Cup Holder

The cup holder can be attached to either side of the shell.

Pull pad off corner of shell. Align symbol on cup holder with symbol on shell.

Hook bottom of cup holder under edge of shell. Snap top of cup holder over edge of shell.

Replace pad.

The cupholder is dishwasher safe.



## Child Restraint Use

Never take your child out of the child restraint while the vehicle is moving.

Never leave child unattended.

Placing your child in a hot child restraint may result in burns.

Do not use a child restraint with damaged or missing parts.

Do not use cut, frayed or damaged harnesses.

Do not substitute parts or try to modify the child restraint in any way.

Do not lubricate buckles and fasteners.

Do not use any child restraint accessory except those approved by Dorel Juvenile Group.

Never allow any child to play with this child restraint; it is not a toy.

Do not remove or cover up any of the warning labels or other labels on the child restraint.

Read all instructions for additional warnings.

On the side of the child restraint there is a date of manufacture label. Do not use this child restraint more than 8 years after the date of manufacture.

## Vehicle Seating Position

Check the vehicle belt or lower anchor belt before each use. Use only if the belt can be tightened properly and locked securely in place.

This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure occupants.

Do not use a child restraint that has been in a crash. You must get a new child restraint.

### Installation in Vehicle



Never install a rear-facing child restraint in the front seat of a vehicle equipped with an active passenger side frontal airbag.



Always check vehicle owner's manual for child restraint use with side airbags.

Check the vehicle owner's manual for more information about air bag/child restraint use.



Use the child restraint only on vehicle seats that face forward.



Do not use on seats that face the sides or rear of the vehicle.

Use the center seating position if possible.

For vehicles without a back seat, refer to your vehicle owner's manual.



If you are not sure where to place the child restraint in your vehicle, consult your vehicle owner's manual, contact Dorel Juvenile Group Care Department (see page 57), or visit your local Child Passenger Inspection Station. Go to <http://www.safercar.gov/cpsApp/cps/index.htm> to find your closest station.



**Children are safer when properly restrained in**

**rear seating positions than in the front seating positions.**

**According to National Highway Traffic Safety Administration information, children in rear seating positions are statistically**


**safer, whether you have air bags, advanced air bags, or no air bags at all.**

**To avoid your child being seriously burned, take the following precautions:**

1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot seat and buckles before placing child in child restraint.

To help protect your vehicle seat's upholstery from damage, use a single layer towel underneath and behind child restraint.

## Choosing Lower Anchor or Vehicle Belts

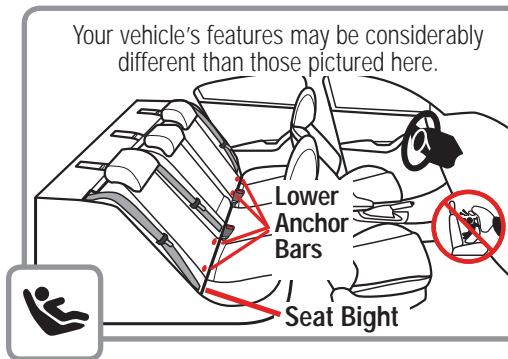


### The LATCH System

The lower anchors of LATCH (Lower Anchors and Tethers for CHildren) is a universal system for installing child restraints without using vehicle seat belts.

The lower anchor system can **ONLY** be used in vehicles that have the lower anchor bars installed and designated LATCH seating positions.

Most vehicles manufactured after September 2002 are equipped with lower anchor bars. Check your vehicle owner's manual to see which seating positions may be equipped with the LATCH system.

*continued on next page* 28



When installing this child restraint with vehicle belts, the lower anchor hooks and belt **MUST** be properly stored.


#### Storing Lower Anchor Belt:



When used rear facing, thread lower anchor belt through forward-facing belt path as shown. Then attach hooks to attachments near rear-facing belt path as shown. Gently pull free end of belt to remove slack.



When used forward facing, thread lower anchor belt through rear-facing belt path. Then attach hooks to attachments near rear-facing belt path as shown. Gently pull free end of belt to remove slack.

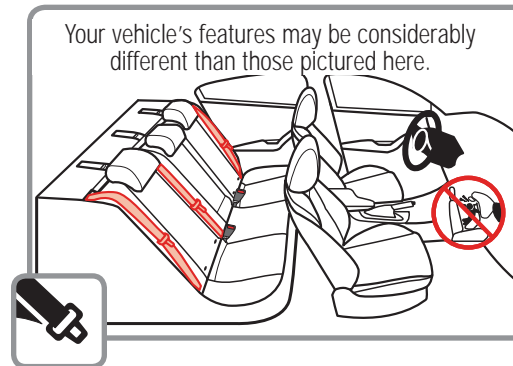

Your vehicle's features may be considerably different than those pictured here.

#### Vehicle Belts

If lower anchors are not an option, you must use the vehicle seat belt system to install the child restraint.

There are some vehicle belts that will not work with a child restraint or will require special attention.


Check your vehicle owner's manual for specific instructions.

**⚠ WARNINGS:** When used correctly the lower anchor belt or vehicle belts are equally safe. Do not use both the lower anchor belt and vehicle belt at the same time.



## Knowing Your Vehicle Belts

Not all vehicle belts and seating positions will work with child restraints. Please follow the following steps to understand how to lock a child restraint with a vehicle belt.



### 1. You MUST Review Your Vehicle Owner's Manual

Your vehicle owner's manual will let you know what vehicle

belts and seating positions child restraints can be installed in.




### 2. Determine How the Child Restraint Will Be Locked Into Place

The vehicle belt **MUST** NOT loosen after tightening.

This means there needs to be a way to lock the vehicle belt.

The ways this can be done are:

- By using the seat belt's retractor; or
- By using the seat belt's latch plate.



### 3. Check the Retractor

Retractors pull seat belts into stored positions and lock the belt to hold passengers in place.

A retractor is most likely how you will be locking a child restraint into place.

See the following "Types of Retractors" section for some common types of vehicle belt retractors that will work with this child restraint.

## Types of Retractors

**Switchable Retractor**  
(most vehicles have this type)



This retractor can be switched to a locking mode. You **MUST** have the retractor in the locking mode to use the seat belt with this child restraint.

**Switching to locking mode:** Slowly pull the shoulder belt all the way out, then let it go back in an inch or two.

As it goes back, in you will most likely hear a ratcheting sound.

Gently pull the belt to see if it has locked. You will not be able to pull any more belt out if the lock has engaged.

*continued on next page* 32

**Automatic Locking Retractor**



This retractor always locks.

It will automatically lock after slowly pulling the seat belt out at least halfway and letting the belt go back into the retractor an inch or two.

**Emergency Locking Retractor**

See Step 4 "Check the Latch Plates"


If the retractor does not lock, it is most likely an Emergency Locking Retractor. These retractors only lock during a sudden stop or collision.

You will need to determine if your seat belt's latch plate can lock the belt. See Step 4, "Check the Latch Plates," on next page.



**4. Check the Latch Plates**

Latch plates are the part of the seat belt that goes into the buckle.



**Locking Latch Plate**

Hold the lap belt with one hand and with your other hand grasp the tongue of the latch plate (the part that goes inside the buckle). Pull the latch plate straight out in line with the lap belt.

If the latch plate does not slide up and down the vehicle belt, it is a **locking latch plate**.



**Emergency Locking Retractor with a Sliding Latch Plate**

If the latch plate slides up and down the vehicle belt, it is a **sliding latch plate**.

Sliding latch plates easily slip between the lap and shoulder portions of the belt.

If you have an Emergency Locking Retractor with a Sliding Latch Plate, you **MUST** use a locking clip to install the child restraint. See pages 55-56.

**Never Use With This Child Restraint**

Emergency Locking Retractor Lap Only Belt



Inflatable Seat Belts





## Aircraft Information

This restraint is certified for aircraft use. Install the child restraint in a window seat to avoid blocking the aisle. If the aircraft lap belt is too short, ask the flight attendant for a belt extender.

Use only on forward facing aircraft seats. Contact the airline for their specific policies.



### Rear Facing Aircraft Installation

For rear facing installation follow pages 42-45.



Some airlines may ask to see a label stating that this child restraint is certified for aircraft use.

There is an airplane certification label located on the side of this child restraint as shown.




### Forward Facing Aircraft Installation

For forward facing installation follow pages 52-54.

## Rear Facing



5-40 lb (2.3-18 kg)  
19-40 in. (48-101.6 cm)



Lower Anchor Belt



Lap Belt



Lap/Shoulder Belt



**⚠ WARNINGS:** Never place a child rear facing in a seating position with an active frontal air bag. This can result in serious injury or death.

This child restraint **MUST** always face the rear of the vehicle when the child is less than 1 year old.

The American Academy of Pediatrics recommends that children should remain rear facing until they are at least 2 years old. Please talk to your doctor about which is the best option for your child.




## Lower Anchor Belt Installation

**⚠️ WARNINGS:** Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Check lower anchor belt before each use. Use only if the belt can be tightened properly and securely.


Do not fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.



Secure the tether hook when used rear facing. Attach the tether hook to storage attachment as shown and gently

tighten to remove slack.

Failure to follow these warnings can result in serious injury or death.




### 1. Remove Lower Anchor Belt from Storage Location

Remove it from the rear-facing belt path so both hooks are on the same side of the seat as shown.



### 2. Route Lower Anchor Belt Through Rear-Facing Belt Path

The lower anchor belt adjuster can be on either side.




### 3. Reach Under Pad and Pull Hook Across to Opposite Side

Belt **MUST** be in front of buckle strap.


You **MUST** use the 1st or 2nd buckle slot. Do not place belt over child's legs. Do not twist belt.



### 4. Finished Lower Anchor Belt Routing



### 5. Place Child Restraint Rear Facing in Back Seat



### 6. Check Level Line

For children who cannot sit up unassisted, the level line on shell **MUST** be parallel with the ground.

For children who can sit up unassisted, you may rotate the child restraint to be more upright.



**7. Attach Lower Anchor Hooks to Vehicle's Lower Anchors**

Review your vehicle owner's manual for lower anchor locations and lower anchor belt use.




**8. Tighten Belt**

Place hand in child restraint.

Firmly push child restraint down and back towards the vehicle seat back while pulling free end of belt to tighten.



It may be easier to pull pad away from shell and tighten the belt through the belt path opening as shown.



**9. Check Belt Tightness**

Hold child restraint at the belt path with your weakest hand.

Push and pull from side to side. It should not move more than 1 in. (2.5 cm).

**If it moves more than 1 in. (2.5 cm), you can try:**

- A. Pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to vehicle belt installation.



**10. Secure Child in Child Restraint**

See pages 15-17.




**11. Recheck Level Line**

Repeat steps 6-11 if level line is not parallel with the ground.



**NOTE:** You may need to place a large rolled towel(s) or foam pool noodle(s) under front of child restraint to help make level line parallel with the ground.


Check often to be sure padding is still in place and the belt is tight.



**To Release Lower Anchor Belt**

Remove child from child restraint.

Remove tension from the lower anchor belt by pushing down on side of child restraint with the lower anchor belt adjuster. Then press the adjuster button



to loosen belt. Unhook from anchor by squeezing spring lever on hook, pushing hook back into the seat bight, and twisting. Then pull it out of the vehicle seat.

**Store lower anchor belt when not in use. See page 29.**

Vehicle Belt Installation



**⚠ WARNINGS:** Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Secure lower anchor hooks to storage attachments as shown when installing with vehicle belts.



Secure the tether hook when used rear facing. Attach the tether hook to storage attachment as shown and gently tighten to remove slack.

Check vehicle belt before each use. Use only if the belt can be tightened properly and locked securely in place.

**Failure to follow these warnings can result in serious injury or death.**






**1. Place Child Restraint Rear Facing in Back Seat**



**2. Check Level Line**  
For children who cannot sit up unassisted, the level line on shell **MUST** be parallel with the ground.


For children who can sit up unassisted, you may rotate the child restraint to be more upright.




**3. Check if Your Vehicle Belts Will Work With This Child Restraint**

This is very important because **not all vehicle belts will work with child restraints.**

Review pages 31-34 and your vehicle owner's manual to determine what kind of vehicle belt you have and how to lock a child restraint in place.




**4. Route Vehicle Lap or Lap/Shoulder Belt Through Rear-Facing Belt Path**




**5. Reach Under Pad and Pull Vehicle Belt Across the Shell**

Belt **MUST** be in front of the buckle strap. You **MUST** use the 1st or 2nd buckle slot. **Do not** place belt over child's legs. **Do not** twist belt.




**6. Buckle Vehicle Belt**



**7. Tighten Belt**

Place hand in child restraint. Firmly push child restraint down and back towards the vehicle seat back while pulling shoulder belt or the free end of lap belt to tighten.



**8. Check Belt Tightness**

Hold child restraint at the belt path with your weakest hand. Push and pull from side to side. It should not move more than 1 in. (2.5 cm).

*continued on next page* 44

If it moves more than 1 in. (2.5 cm), you can try:

- A. Pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to the lower anchor belt installation if lower anchors are available in your vehicle.



**9. Secure Child in Child Restraint**

See pages 15-17.



**10. Recheck Level Line**

Repeat steps 2-5 if level line is not parallel with the ground.



**NOTE:** You may need to place a large rolled towel(s) or foam pool noodle(s) under front of child restraint to help achieve the correct recline angle. Check often to be sure padding is still in place and the belt is tight.

Forward Facing Installation



22-40 lb (10-18 kg)  
29-43 in. (73.6-110 cm)  
At least 1 year old



Lower Anchor Belt with Tether



Lap Belt with Tether



Lap/Shoulder Belt with Tether



**⚠ WARNINGS:** In this child restraint your child **MUST** be at least 1 year old before they sit forward facing.

The American Academy of Pediatrics recommends that children should remain rear facing until they are at least 2 years old. Please talk to your doctor about which is the best option for your child.




## Tether Use

You **MUST** always attach, adjust, and secure the top anchorage (tether) strap when installing the child restraint forward facing with internal harness. Tethers improve the installation and stability of child restraints and reduce the risk of injury. Attach the tether hook to the tether anchor designated by your vehicle manufacturer for that seating position. Check your vehicle owner's manual for more information. If the seating position does not have a tether anchor, use a different seating position or see your dealer or a qualified mechanic and have one installed.

**⚠ WARNING:** Do not fasten multiple tether hooks on the same tether anchor in the vehicle.



Pull free end to tighten



Lift up to loosen



### Adjusting Tether Strap

**To tighten:** After the child restraint is locked into place with lower anchor belt or vehicle belt, push down on child restraint and gently pull on free end of tether.

**To loosen:** Lift up on tether lock adjuster and push it towards tether hook.

### Storing Tether Strap

**When installing rear facing or when not in use,** attach the tether hook to its storage attachment

on the back of the shell as shown. Gently tighten to remove slack.

## Lower Anchor Belt Installation




**⚠ WARNINGS:** Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Check the lower anchor belt before each use. Use only if the belt can be tightened properly and securely.

Do not fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.

Failure to follow these warnings can result in serious injury or death.



### 1. Remove Lower Anchor Belt from Storage Location

Remove it from the rear-facing belt path so both hooks are on the same side of the seat as shown.




### 2. Route Lower Anchor Belt Through Forward-Facing Belt Path

**Do not twist belt.**

The lower anchor belt adjuster can be on either side.

*continued on next page* 48




**3. Finished Lower Anchor Belt Routing**



**5. Loosely Attach Tether Hook**

Check vehicle owner's manual for specific location.



**7. Tighten Belt**

Place hand in child restraint.

Firmly push down while pulling free end of belt to tighten.



**8. Tighten Tether**

Push firmly on the back of the seat and pull the tether strap to remove all slack and create tension on the strap.



**4. Place Child Restraint Forward Facing Flush Against Vehicle Seat Back**



**6. Attach Lower Anchor Hooks to Vehicle's Lower Anchors**

Review your vehicle owner's manual for lower anchor locations and lower anchor belt use.



It may be easier to pull back the pad and pull the free end of the belt parallel with the belt path as shown.

## Vehicle Belt Installation



### 9. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand. Push and pull from side to side.

It should not move more than 1 in. (2.5 cm). **If it moves more than 1 in. (2.5 cm), you can try:**


- A. Reinstalling the child restraint.
- B. Putting your knee in the seat and pulling the belt tighter.
- C. Changing to a different seating location.
- D. Switching to vehicle belt installation.



### To Release Lower Anchor Belt

Remove child from child restraint.

Remove tension from the lower anchor belt by pushing down on side of child restraint with the lower anchor belt adjuster. Then press the adjuster button to loosen belt.



Unhook from anchor by squeezing spring lever on hook, pushing hook back into the seat bight, and twisting. Then pull it out of the vehicle seat.

**Store lower anchor belt when not in use. See page 29.**

**⚠ WARNINGS:** Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt. Secure lower




anchor hooks to storage attachments as shown when installing with vehicle belts.

Check vehicle belt before each use. Use only if the belt can be tightened properly and locked securely in place.

Failure to follow these warnings can result in serious injury or death.



**1. Place Child Restraint Forward-Facing Flush Against Vehicle Seat Back**



**2. Loosely Attach Tether Hook**

Check vehicle owner's manual for specific location.



### 3. Check if Your Vehicle Belts Will Work With This Child Restraint


This is very important because **not**

**all vehicle belts will work with child restraints.**

Review pages 31-34 and your vehicle owner's manual to determine what kind of vehicle belt you have and how to lock a child restraint in place.



### 4. Route Vehicle Lap or Lap/Shoulder Belt Through Forward-Facing Belt Path




### 5. Buckle Vehicle Belt

Do not twist belt.



### 6. Tighten Tether

Push firmly on the back of the seat and pull the tether strap to remove all slack and create tension on the strap.



### 7. Tighten Belt

Place hand in child restraint.

Firmly push down while pulling shoulder belt or the free end of lap belt to tighten.



### 8. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand.

Push and pull from

side to side. It should not move more than 1 in. (2.5 cm). **If it moves more than 1 in. (2.5 cm), you can try:**

A. Reinstalling the child restraint.

B. Putting your knee in the seat and pulling the belt tighter.

C. Changing to a different seating location.

D. Switching to the lower anchor belt installation if lower anchors are available in your vehicle.



## Using a Locking Clip

You will rarely need to use a locking clip except in some older vehicles.

Built-in child restraint locking systems have been required in vehicles since 1996 and many vehicles had these features even earlier. Review pages 31-34 and your vehicle owner's manual to determine if your vehicle belts require a locking clip.

If you need a locking clip immediately, they are likely available at an auto dealership, an auto store, or where you purchased this child restraint. You can also call us at 1-800-544-1108 for one.

A locking clip will not fix all types of seat belt problems. You **MUST** have a lap and shoulder belt to use a locking clip.

**For Rear Facing installation**, follow Pages 42-44 Warnings and Steps 1-7 before starting locking clip installation.


**For Forward Facing installation**, follow Pages 52-54 Warnings and Steps 1-7 before starting locking clip installation.



### 1. Determine Locking Clip Position


Grasp both vehicle belts together just behind the latch plate to mark the position for locking clip. Unbuckle the belt.

**NOTE:** If the latch plate ends up just at the belt path opening so you cannot grasp the vehicle belt at the latch plate, grasp the vehicle belts on the opposite side of the child restraint, as close to the latch plate as possible.




### 2. Attach Locking Clip

Thread both portions of the vehicle belt onto the locking clip, as close to the latch plate as possible.




### 3. Position Locking Clip

It should be about 1 in. (2.5 cm) from vehicle belt's latch plate.



### 4. Rebuckle Vehicle Belt



### 5. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand. Push and pull from side to side. It

should not move more than 1 in. (2.5 cm). **If it moves more than 1 in. (2.5 cm), you can try:** **A.** Reinstalling the child restraint. **B.** Changing to a different seating location.

**When installed rear facing**, recheck the level line.

**When installed forward facing**, make sure to tighten the tether strap.

**Remove the locking clip when the seat belt is not being used with a child restraint.**

## Dorel Juvenile Group Information

Thank you for choosing this child restraint. The DJG family is committed to creating child restraints with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, when combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any concerns with this child restraint, please contact our Consumer Care Department at:

**Website:** [www.coscokids.com](http://www.coscokids.com)

**Telephone:** 1-800-544-1108  
M-TH from 8 A.M. to 6 P.M. EST  
FRI from 8 A.M. to 4:30 P.M. EST

**Mailing Address:**

Dorel Juvenile Group, Inc.  
Consumer Care Department  
P.O. Box 2609  
Columbus, IN 47202-2609

## Registration and Safety Notices

Please complete the postage-paid registration card that came with your child restraint, and send it to us. Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, email address if available, the restraint's model number, and manufacturing date to:

**Dorel Juvenile Group, Inc.**  
**Consumer Care Department**  
PO Box 2609  
Columbus, IN 47202-2609

or call 1-800-544-1108 or register online at [www.djgusa.com/registration/carseat/us](http://www.djgusa.com/registration/carseat/us).

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.

Consumer Care Department  
Please print (use dark ink).  
Your Name \_\_\_\_\_  
Your Street Address \_\_\_\_\_  
Your Email Address \_\_\_\_\_  
Model Number \_\_\_\_\_ Model Name \_\_\_\_\_ Manufacture Date \_\_\_\_\_  
BC090-BVM COSCO SEVERA NEXT 01/22/2015  
L#11 8265035

Example of model number, manufacture date, and line code.



If you don't have the card or if your address changes, you will find the model number, manufacture date, and line code on the label located on side of shell.



## Troubleshooting

### 1. Locate a Child Safety Seat Inspection Station for hands on training on how to use your child restraint:

Visit your local Child Passenger Inspection Station or go to <http://www.safercar.gov/cpsApp/cps/index.htm> to find your closest station.

### 2. If the child restraint buckle or harness release lever sticks or you cannot get the straps tight enough around child:

DO NOT LUBRICATE. Check around lever and retractor for dropped food, sticky spilled drinks, dirt, leaves, etc. Clean with warm water and/or remove object with tweezers. If you cannot get the harness to adjust and remain tight with the buckle securely locked, do not use the child restraint.

### 3. If your harness twists:

Straighten the harness each time you put your child in the child restraint to help prevent twisting. Lock the buckle and tighten harness and it will be ready for next use.

## Replacement Parts Order Form

Complete the form. Your model number and manufacturer date code **MUST** be included on the form to ensure proper replacement parts. The codes can be found on a label on side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page. Return the form with payment to:

**Dorel Juvenile Group, Inc.**  
**Consumer Care Department**  
P.O. Box 2609  
Columbus, IN 47202-2609

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area on the next page to charge credit card. (Visa or MasterCard **only**). We do not accept cash, personal checks, or other credit cards. All outside of U.S. and Canada **MUST** use credit card.

Ship To: (Please Print)

Name: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_

State/Province: \_\_\_\_\_ Zip: \_\_\_\_\_

Telephone: \_\_\_\_\_

Email Address: \_\_\_\_\_

We **MUST** have this information:

**Model Number** (8 to 9 characters):  
\_\_\_\_\_

**Manufacture Date** (mm/dd/yyyy):  
\_\_\_\_\_

**Replacement Parts List**

**NOTE:** If requested color is not available, similar color will be substituted. Prices are subject to change.

<b>Part</b>	<b>Cost</b>	<b>Qty</b>	<b>Total Cost</b>
Buckle Assembly	\$7.99	...	\$ _____
Harness Strap	\$2.99	...	\$ _____
Seat Pad Set	\$24.00	...	\$ _____
Chest Clip	\$1.50	...	\$ _____
Tether Kit	\$6.50	...	\$ _____
Lower Anchor Belt	\$17.99	...	\$ _____
Instructions	\$0.00	...	\$ _____
Locking Clip	\$2.50	...	\$ _____

**Merchandise Total** \$ \_\_\_\_\_

**Shipping and handling:.....** \$ \_\_\_\_\_

Up to \$25.00.....	\$5.95	\$100.01 to \$150.00..	\$10.95
\$25.01 to \$50.00.....	\$6.95	\$150.01 to \$200.00..	\$11.95
\$50.01 to \$75.00.....	\$8.95	\$200.01 and up .....	\$13.95
\$75.01 to \$100.00....	\$9.95	Outside Continental USA	\$10.00

**Sales Tax** .....\$ \_\_\_\_\_

(Arizona, California, Georgia, Indiana, Missouri, South Carolina, and Texas residents add applicable sales tax.)

**Grand Total** .....\$ \_\_\_\_\_

No shipping and handling on instructions for quantities under 6. Add \$.50 for each instruction over 6, then add applicable shipping and handling.

**Fill Out For Credit Card**  
 **Visa**     **MasterCard**

**Card Exp. Date:** \_\_\_\_\_

**Cardholder's Name:** \_\_\_\_\_

**Card Number:** \_\_\_\_\_

**Signature:** \_\_\_\_\_



**Warranty**

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:

This product is warranted against defective materials or workmanship for one year from the date of original purchase. **An original receipt is required to validate your warranty.** DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty write to DJG, Consumer Care Department, P. O. Box 2609, Columbus, IN 47202-2609; or call 1-800-544-1108 from 8:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 8:00 a.m. to 4:30 p.m. on Friday.

**Proof of purchase is required and shipping charges are the responsibility of the consumer.**

**Warranty Limitations:** This warranty does not include damages which arise from misuse or abuse of this product.

**Limitation of Damages:** The warranty

and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

**Limitation of warranties and other warranty terms and state law rights:**

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.