

synchrony Access - Fact Sheets

Table of Contents

Access

<i>1.59 Polycarbonate</i>	<i>1 – 2</i>
<i>1.50 Hard Resin</i>	<i>3 – 4</i>

PRODUCT FACT SHEET



Product Name synchrony Semi-Finished Enhanced SV Access 1.59

Customer Product Codes

Product:	CAT Code:	LGC:	LGC Description:	Notes:	FDA:
PG	578	L2142	SYNC SF ACCESS 159 PG ---	Country of Origin required on Label	Yes, US FDA disclaimer Required
HC	330	L2400	SYNC SF ACCESS 159 HC ---		

Product OPCs

Nominal Near Base Curve	Dynamic Range	PG (LGC: L2142)	HC (LGC: L2400)
5.00	-0.75	0102203536	0102207800
	-1.25	0102203544	0102207818

Product Range:

Nominal Diameter	Nominal Near Base Curve (D)	Dynamic Range (D) -Relative To Near	Recommended Rx Range (D)
80mm	5.00	-0.75	-2.00 to +4.00
		-1.25	-2.00 to +4.00

Material & Coating Specifications:

Type	1.59 Polycarbonate
Refractive Index	$n_d = 1.586$ $n_e = 1.590$
Abbe Number	$v_d = 30$ $v_e = 29$
Density	1.20 g/cm ³
UV Protection (ISO)	UVA : 100 %, UVB : 100 % Coated, 1.5 mm Centre Thickness
Coating Type	Hard Coated

Lens Geometry:

Nominal Base (D)	Radius (mm)	True Front Near Curve (D)	Central Curve Sag @ 50mm (mm)	Nominal Back Curve (D)	Centre Thickness (mm)	Nominal 'Distance' Edge Thickness (mm)	Nominal 'Near' Edge Thickness (mm)
5.00	107.07	4.95	2.96	-5.75	10.7 ±1.0	13.7	12.5

Surfacing: Recommended centre & edge thicknesses for all regions:

Power Range (D)	Minimum Centre Thickness (mm)	Minimum Edge Thickness (mm)
-2.00 to +2.00	1.5*	1.0
+2.25 to +4.00		0.5

* Thicknesses are based on whichever is the limiting factor

Document Number: 0102207.FS6

Reviewed by: Geoff Riley, 26 May 2017

For External Distribution

Page 1 of 2

PRODUCT FACT SHEET




Product Name synchrony Semi-Finished Enhanced SV Access 1.59

Product Markings:

Front Surface Ink Markings:	Front Surface Permanent Markings:	Back Surface Permanent Markings: Laser applied Visible Code:

Recommended Base Curve Selection Chart:

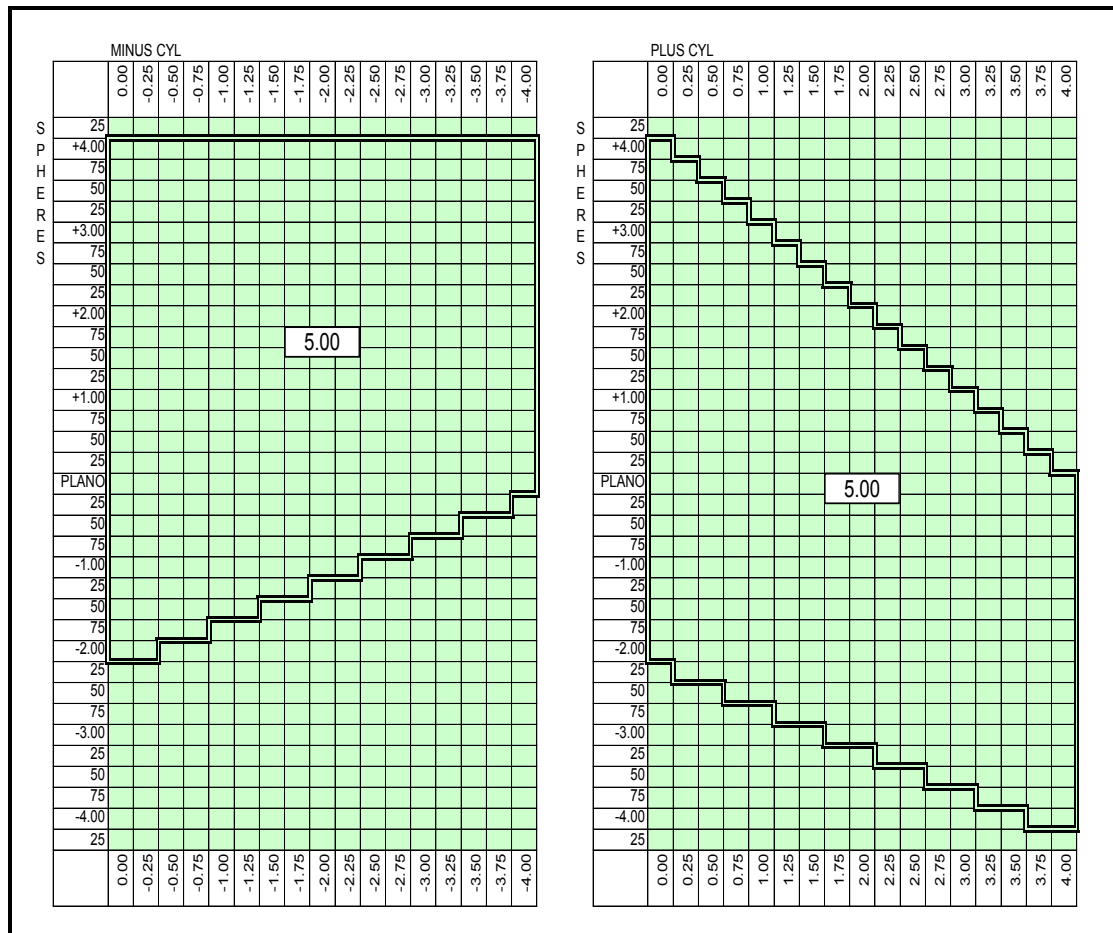

Document Number: 0102207.FS6

For External Distribution

Reviewed by: Geoff Riley, 26 May 2017

Page 2 of 2

PRODUCT FACT SHEET



Product Name synchrony Semi-Finished Enhanced SV Access 1.5

Customer Product Codes

Product:	CAT Code:	LGC:	LGC Description:	Notes:	FDA:
UNC	945	L2331	SYNC SF ACCESS 15 UNC ---	Country of Origin required on Label	Yes, US FDA disclaimer Required
HC	575	L2141	SYNC SF ACCESS 15 HC ---		

Product OPCs

Nominal Near Base Curve	Dynamic Range	UNC (LGC: L2331)	HC (PG) (LGC: L2141)
3.00	-0.75	5114425274	5113636889
	-1.25	5114425282	5113636897
5.00	-0.75	5114404212	5113619166
	-1.25	5114404220	5113619174
9.00	-0.75	5114446882	5113642267
	-1.25	5114446890	5113642275

Product Range:

Nominal Diameter		Nominal Near Base Curve (D)	Dynamic Range (D) -Relative To Near	Recommended Rx Range (D)
Coated	Uncoated			
78 mm	75 mm	3.00	-0.75 and -1.25	-6.00 to -2.25
		5.00	-0.75 and -1.25	-2.00 to +4.00
		9.00	-0.75 and -1.25	+4.25 to +6.00

Material & Coating Specifications:

Type	1.5 Polymer
Refractive Index	$n_d = 1.499$ $n_e = 1.500$
Abbe Number	$v_d = 58$ $v_e = 56$
Density	1.32 g/cm ³
UV Protection (ISO)	UVA : 91 %, UVB : 100 % at 2.0 mm Centre Thickness
Coating Type	Uncoated & Hardcoated

Lens Geometry:

Base	Radius (mm)	True Front Near Curve (D) (1.530)	Nominal Back Curve (D) (1.530)	Centre Thickness (±1.0mm)	Nominal Distance Edge Thickness		Nominal Packaged Weight (g)	
					78mm diameter	75mm diameter	78mm diameter	75mm diameter
3.00	176.67	3.00	-3.00	12.0	14	14	90	84
5.00	106.00	5.00	-3.00	11.7	11	11	80	75
9.00	58.89	9.00	-6.00	10.0	7	7	63	60

Surfacing: Recommended centre & edge thicknesses for all regions: **Thicknesses are based on whichever is the limiting factor*

Power Range (D)	Minimum Centre Thickness (mm)	Minimum Edge Thickness (mm)
-6.00 to -2.25	1.5	
-2.00 to +2.00	1.8 or *	1.0*
+2.25 to +6.00		0.5

Document Number: 5113619.FS9

Reviewed by: Geoff Riley, 25 May 2017

For External Distribution

Page 1 of 2

PRODUCT FACT SHEET




Product Name synchrony Semi-Finished Enhanced SV Access 1.5

Product Markings:

Front Surface: Ink Markings	Front Surface: Permanent Markings	Back Surface: Permanent Markings

Recommended Base Curve Selection Chart:

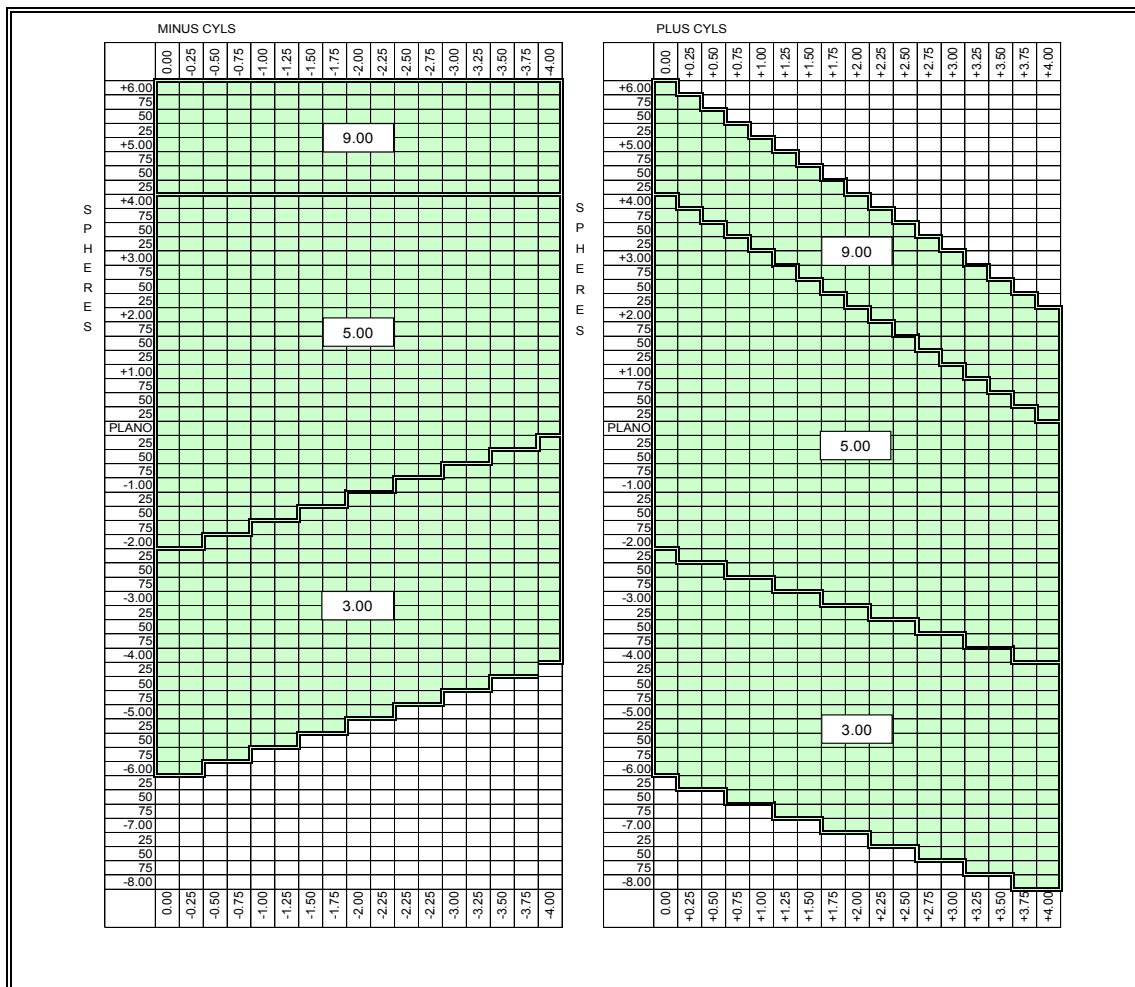

Document Number: 5113619.FS9

For External Distribution

Reviewed by: Geoff Riley, 25 May 2017

Page 2 of 2